



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Larson Engineering, Inc.				
	Well Goodman Unit No. 1-26				
	Field Wildcat				
	County	Ness	State	Kansas	
15-135-25,072-00-00	Location	62' FNL & 2585' FWL			Other Services CNL/CDL DIL
	Sec: 26	Twp: 20S	Rge: 26W	Elevation	
	Permanent Datum	Ground Level	Kelly Bushing	7	Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing				
Date	06/21/2010				
Run Number	Two				
Depth Driller	4550				
Depth Logger	4550				
Bottom Logged Interval	4549				
Top Log Interval	3600				
Casing Driller	8.625 @ 260				
Casing Logger	248				
Bit Size	7.875				
Type Fluid in Hole	Chemical				
Salinity, ppm CL	4.000				
Density / Viscosity	9.3	48			
pH / Fluid Loss	10.0	11.2			
Source of Sample	Flowline				
Rm @ Meas. Temp	.8 @ 80				
Rmf @ Meas. Temp	.6 @ 80				
Rmc @ Meas. Temp	1.08 @ 80				
Source of Rmf / Rmc	Charts				
Rm @ BHT	.52 @ 124				
Operating Rig Time	3 Hours				
Max Rec. Temp. F	124				
Equipment Number	17				
Location	Hays				
Recorded By	Jason Wellbrock				
Witnessed By	Bob Lewellyn				

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ness City W15.6 to Crd, S11, 1 1/2E, S Into

Database File: c:\warrior\data\larson_goodman unit no. 1-26\larsonhd.db
Dataset Pathname: dil\lar2in
Presentation Format: micro
Dataset Creation: Mon Jun 21 21:23:41 2010
Charted by: Depth in Feet scaled 1:240

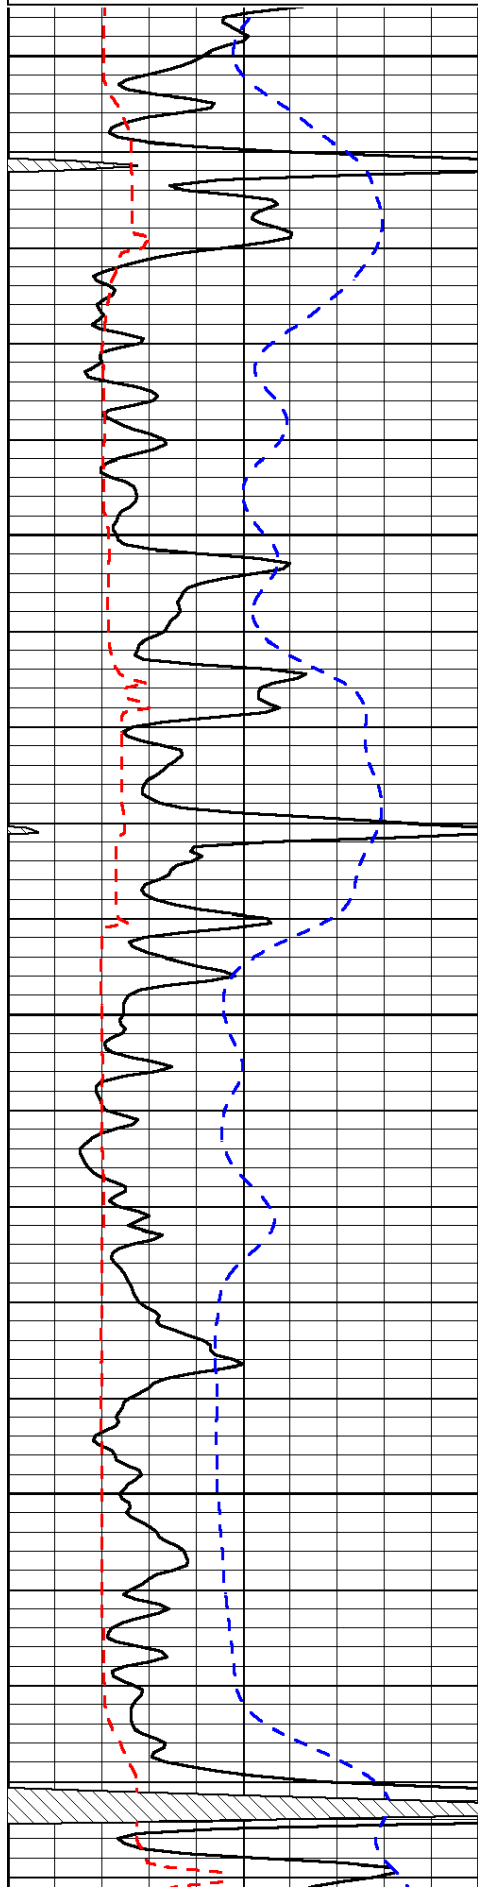
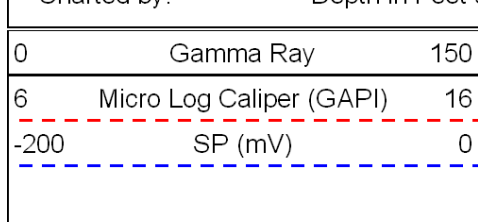


3600

3650

3700

3750

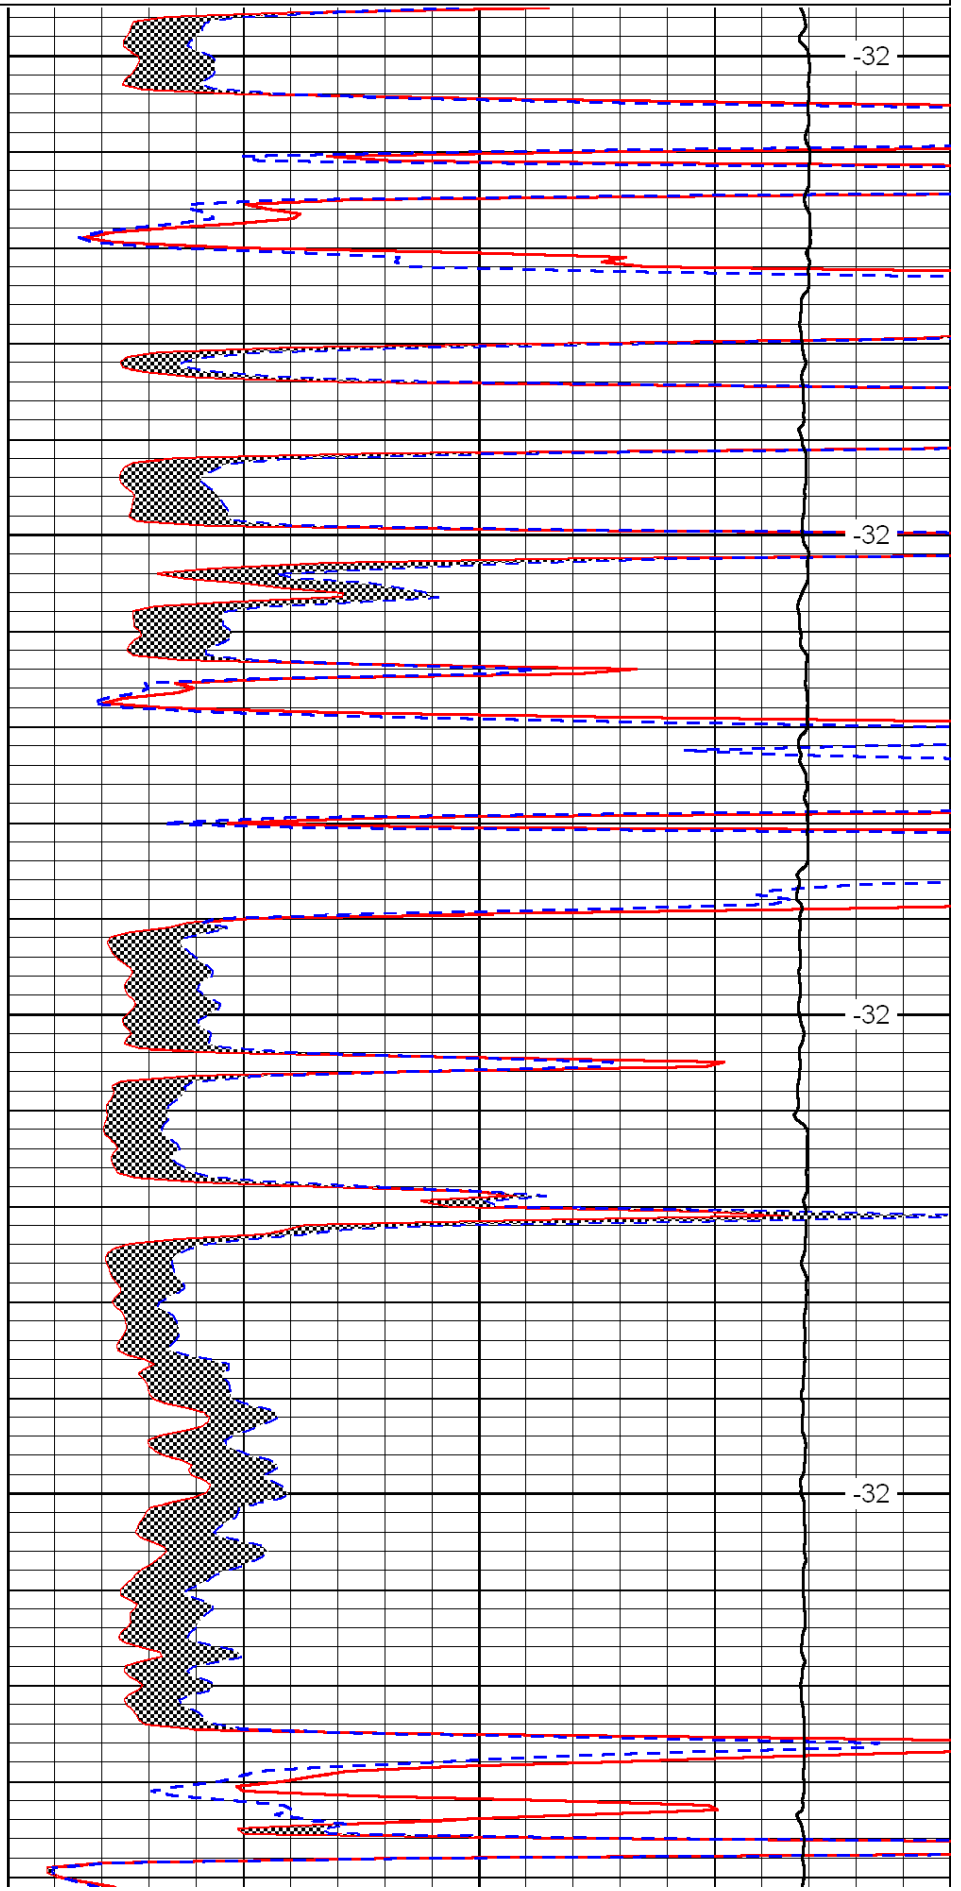
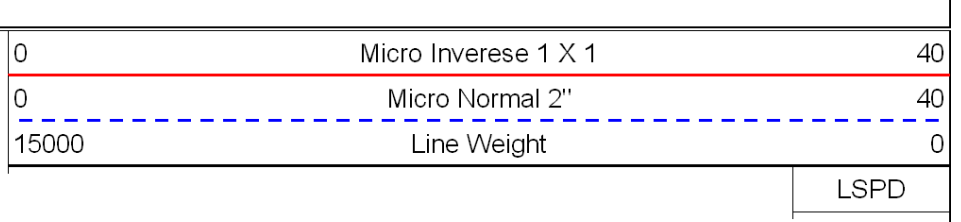



-32

-32

-32

-32

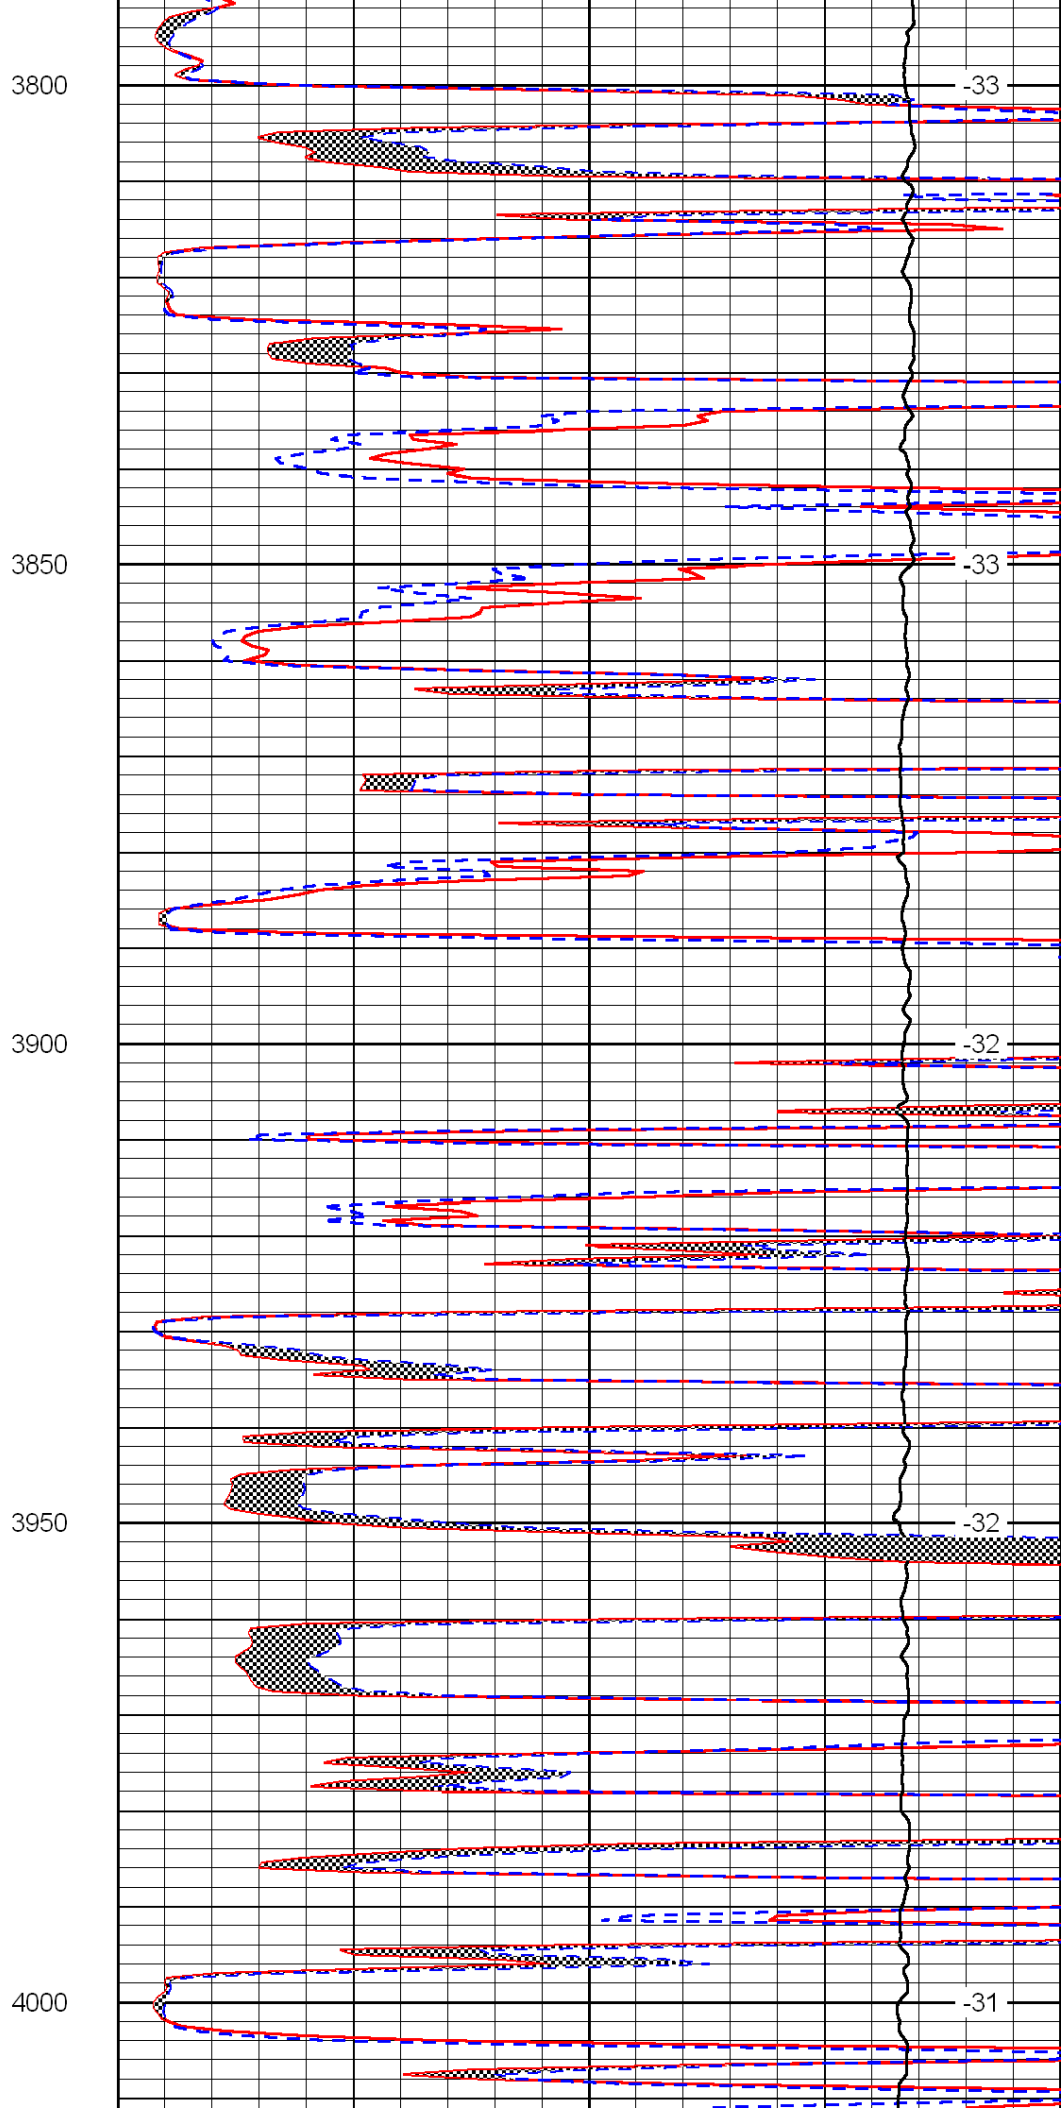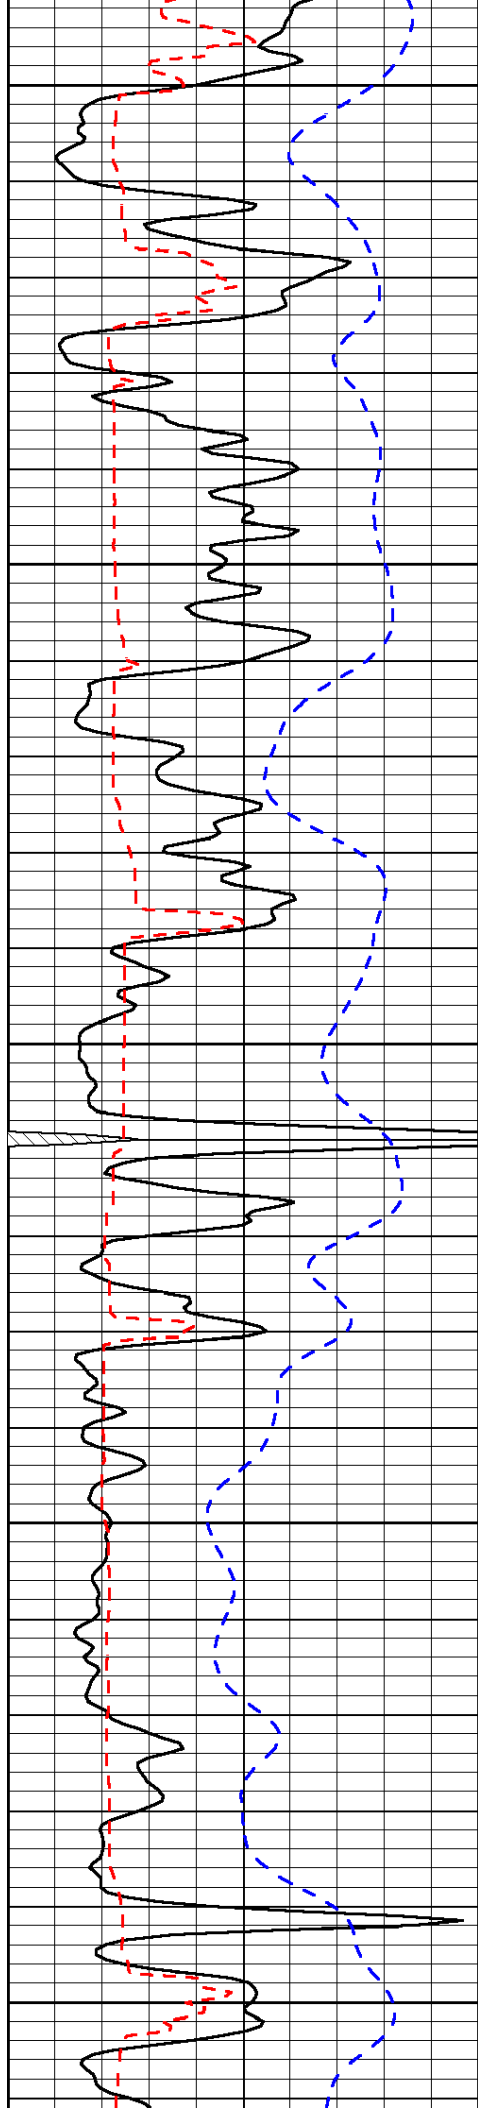

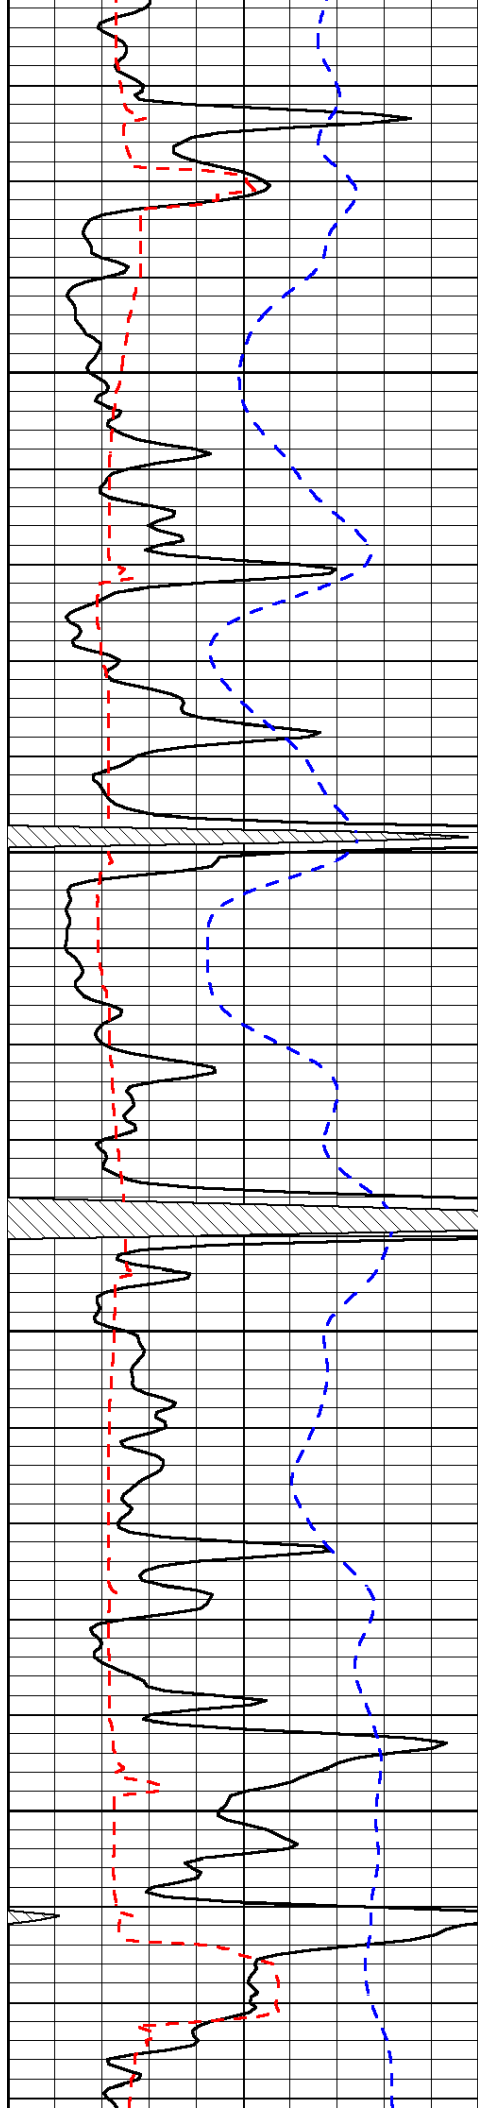


4050

4100

4150

4200

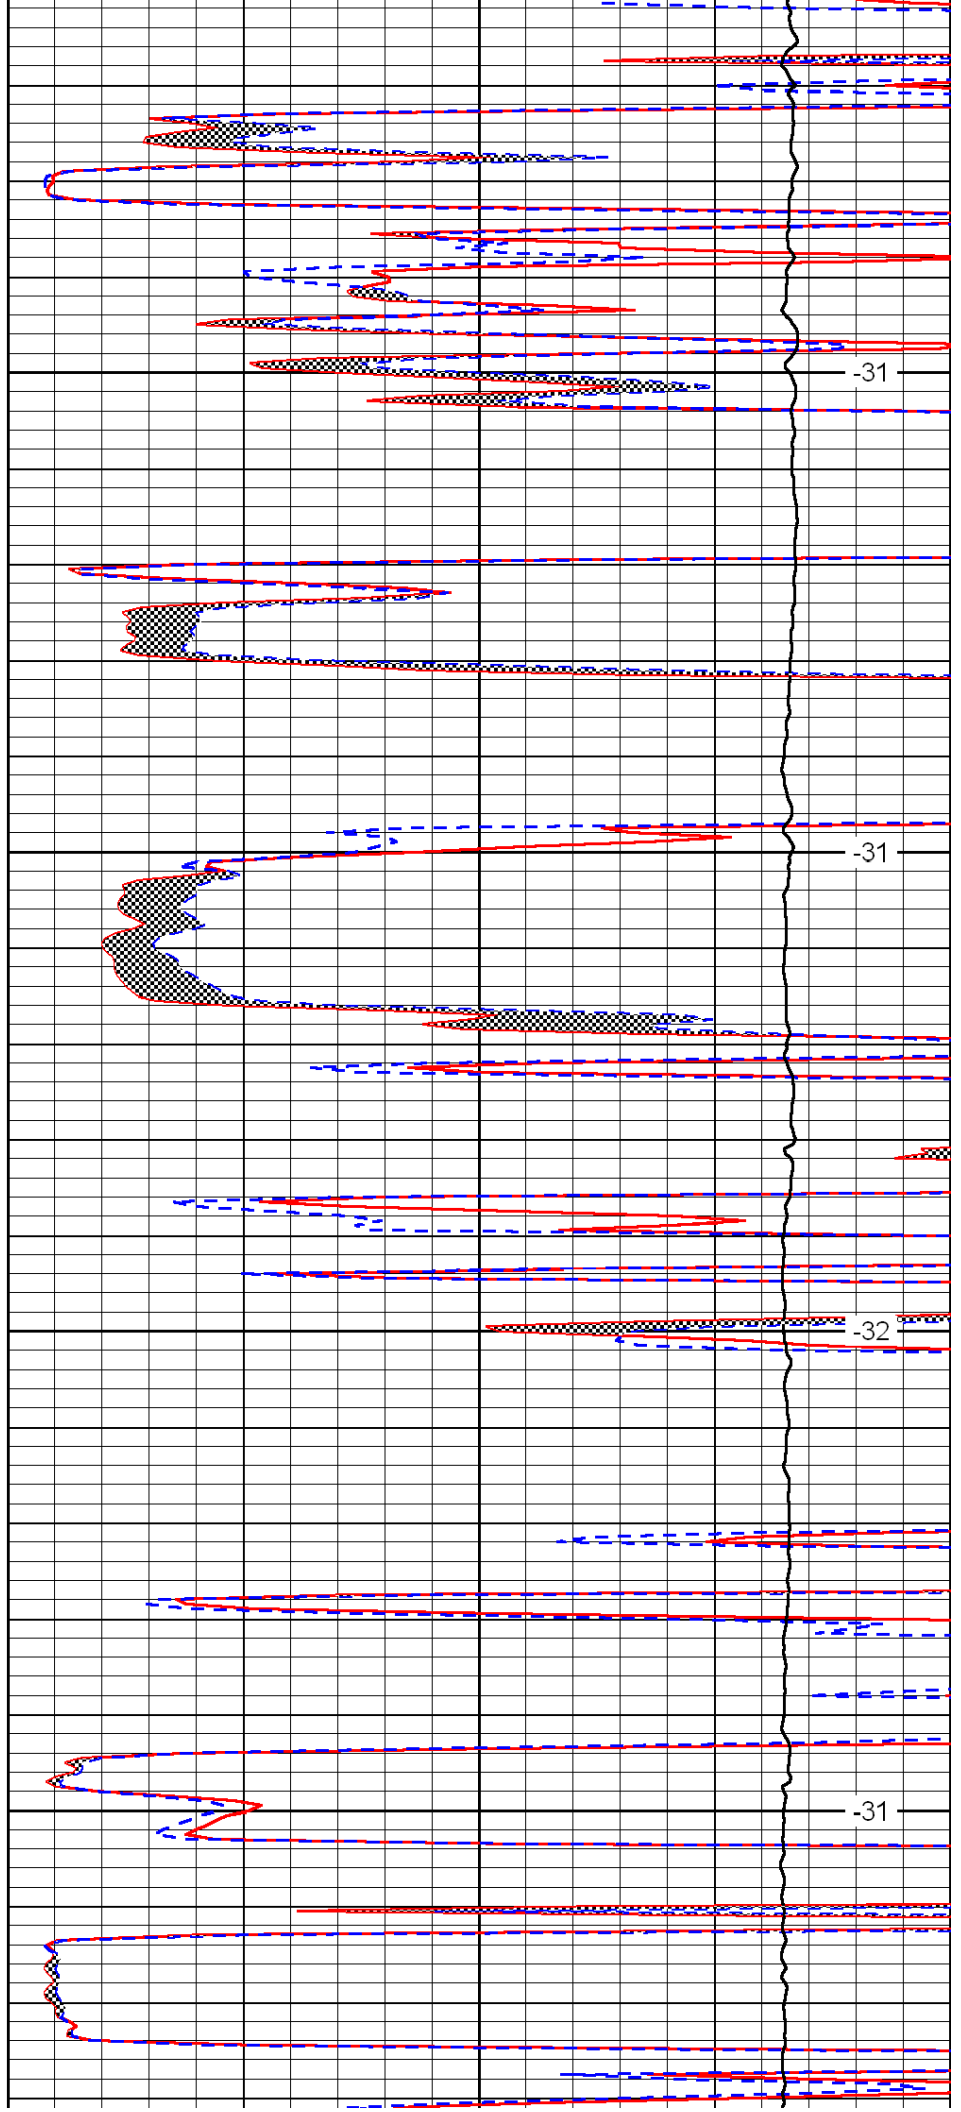


-31

-31

-32

-31

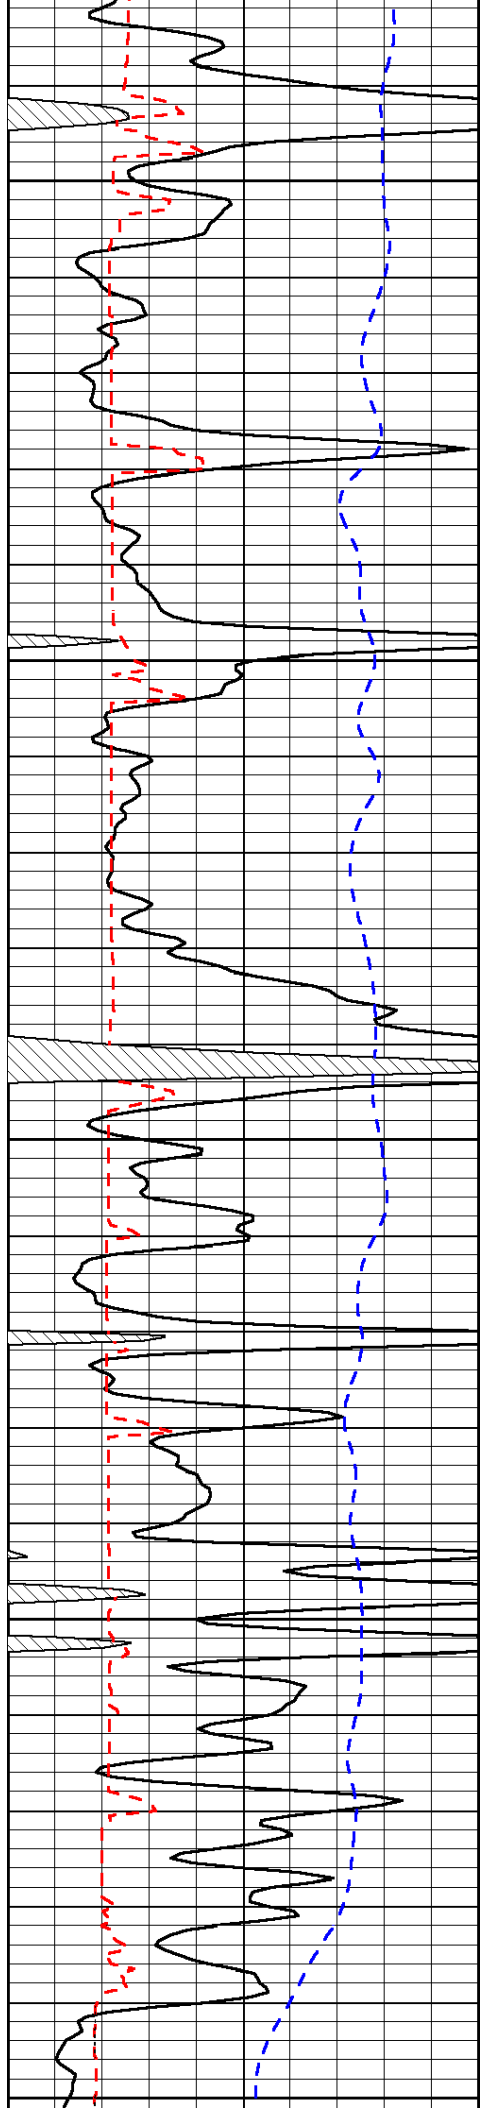


4250

4300

4350

4400

4450

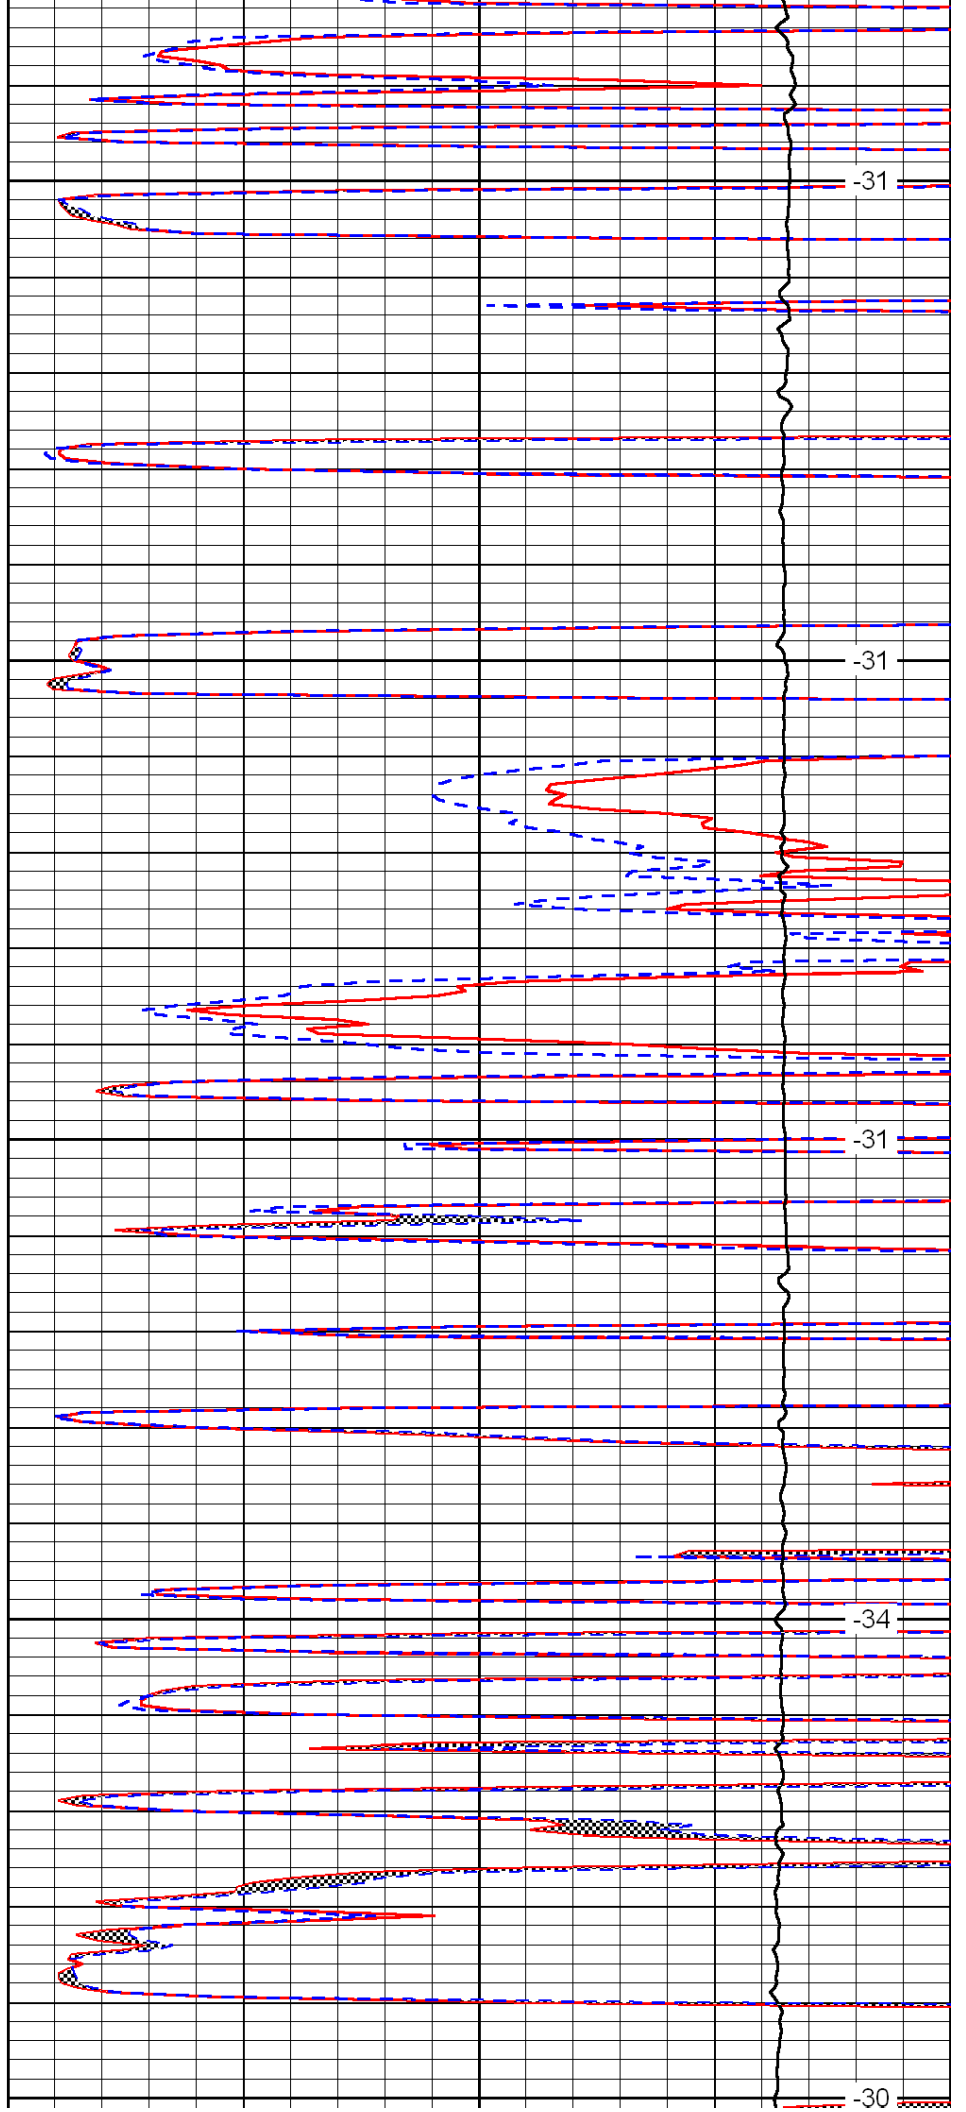


-31

-31

-31

-34


-30

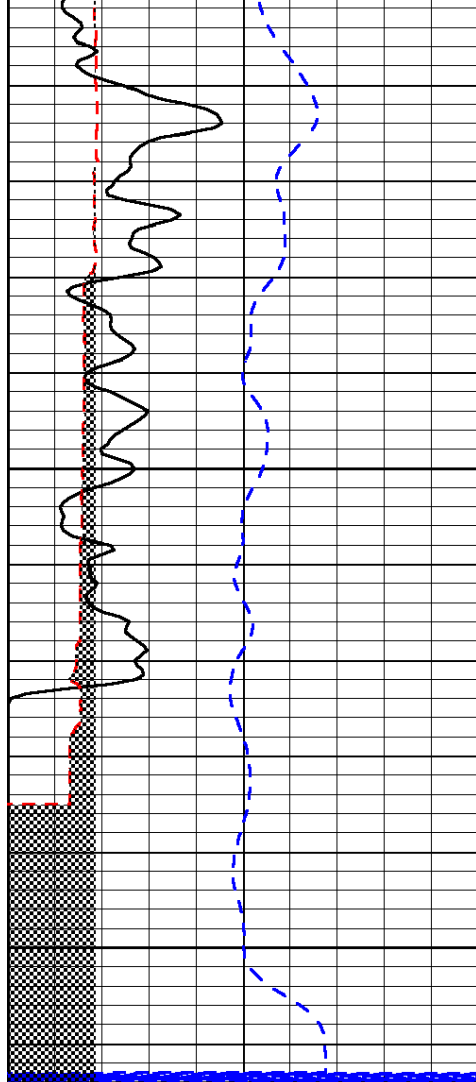

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4500

4550

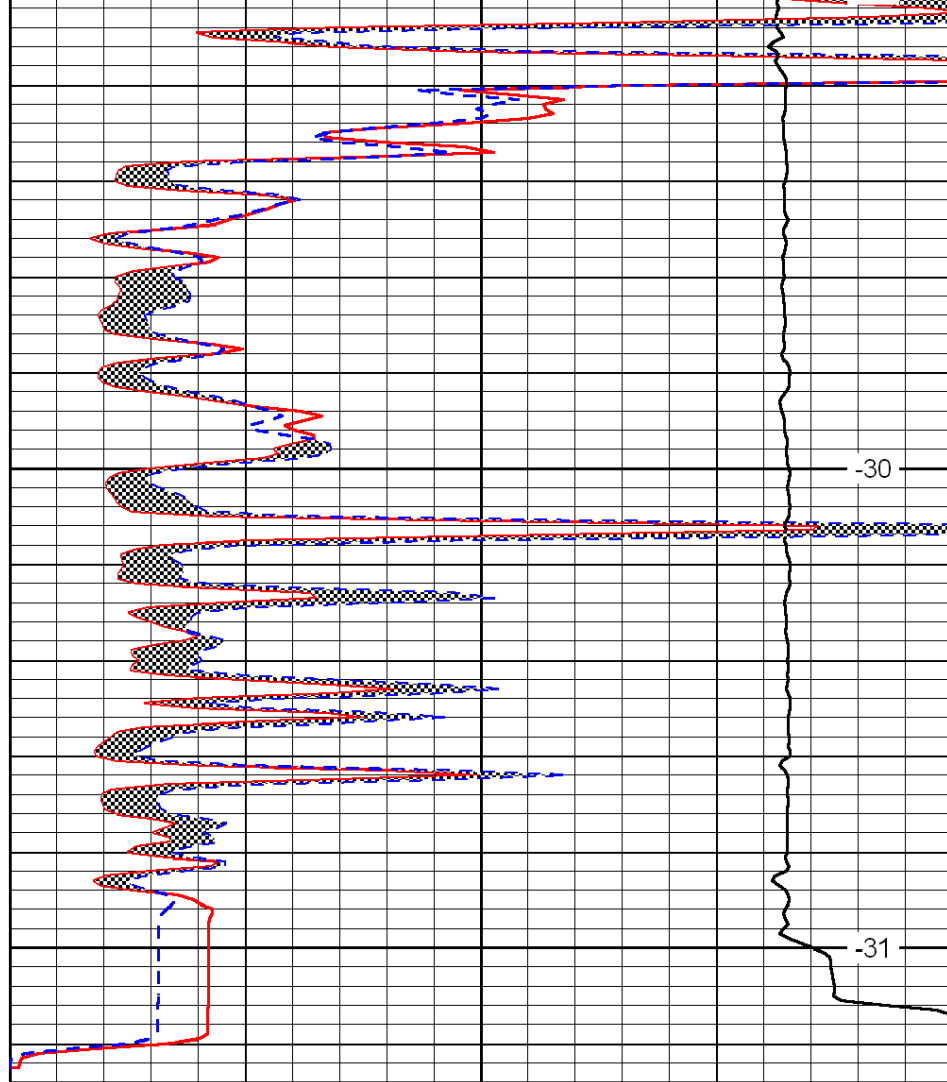

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
15000	Line Weight	0

LSPD