LOG-TECH

DIGITAL LOG (785) 625-3858

Dual Induction Log

API No. 15-153-20,880-00-00

Company Murfin Drilling Company, Inc.

Well Sherilyn No. 1-14

Field Wildcat

County Rawlins State Kansas

Location 2,310' FSL & 660' FEL

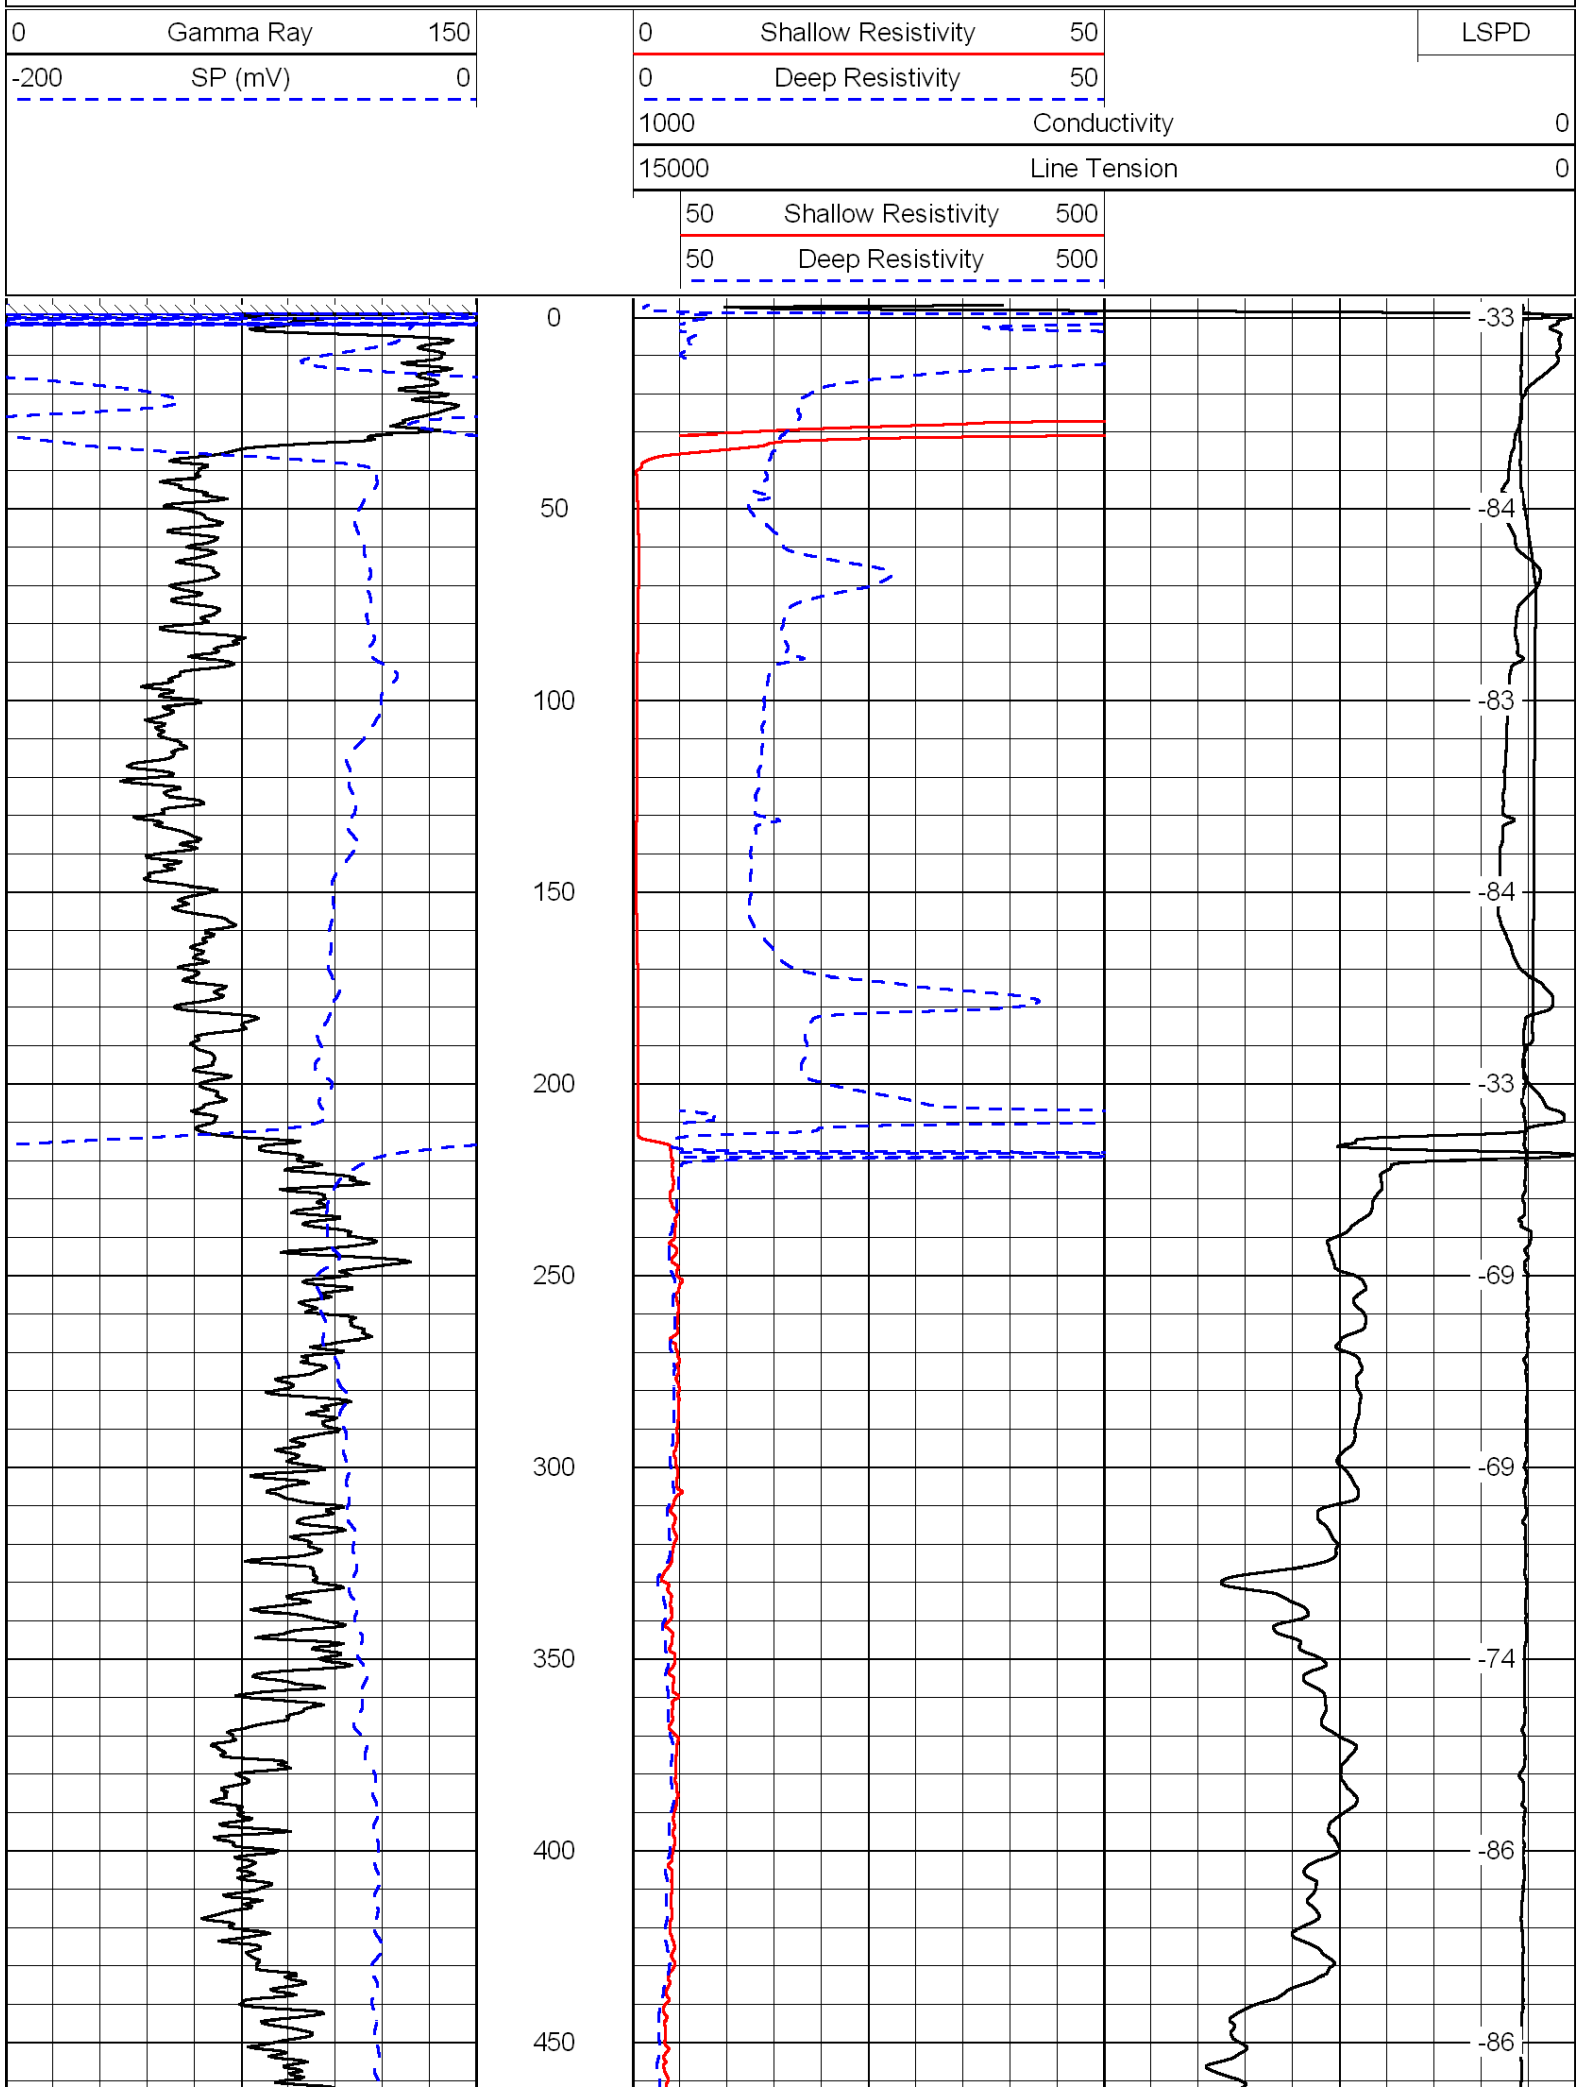
Sec: 14 Twp: 5S Rge: 31W

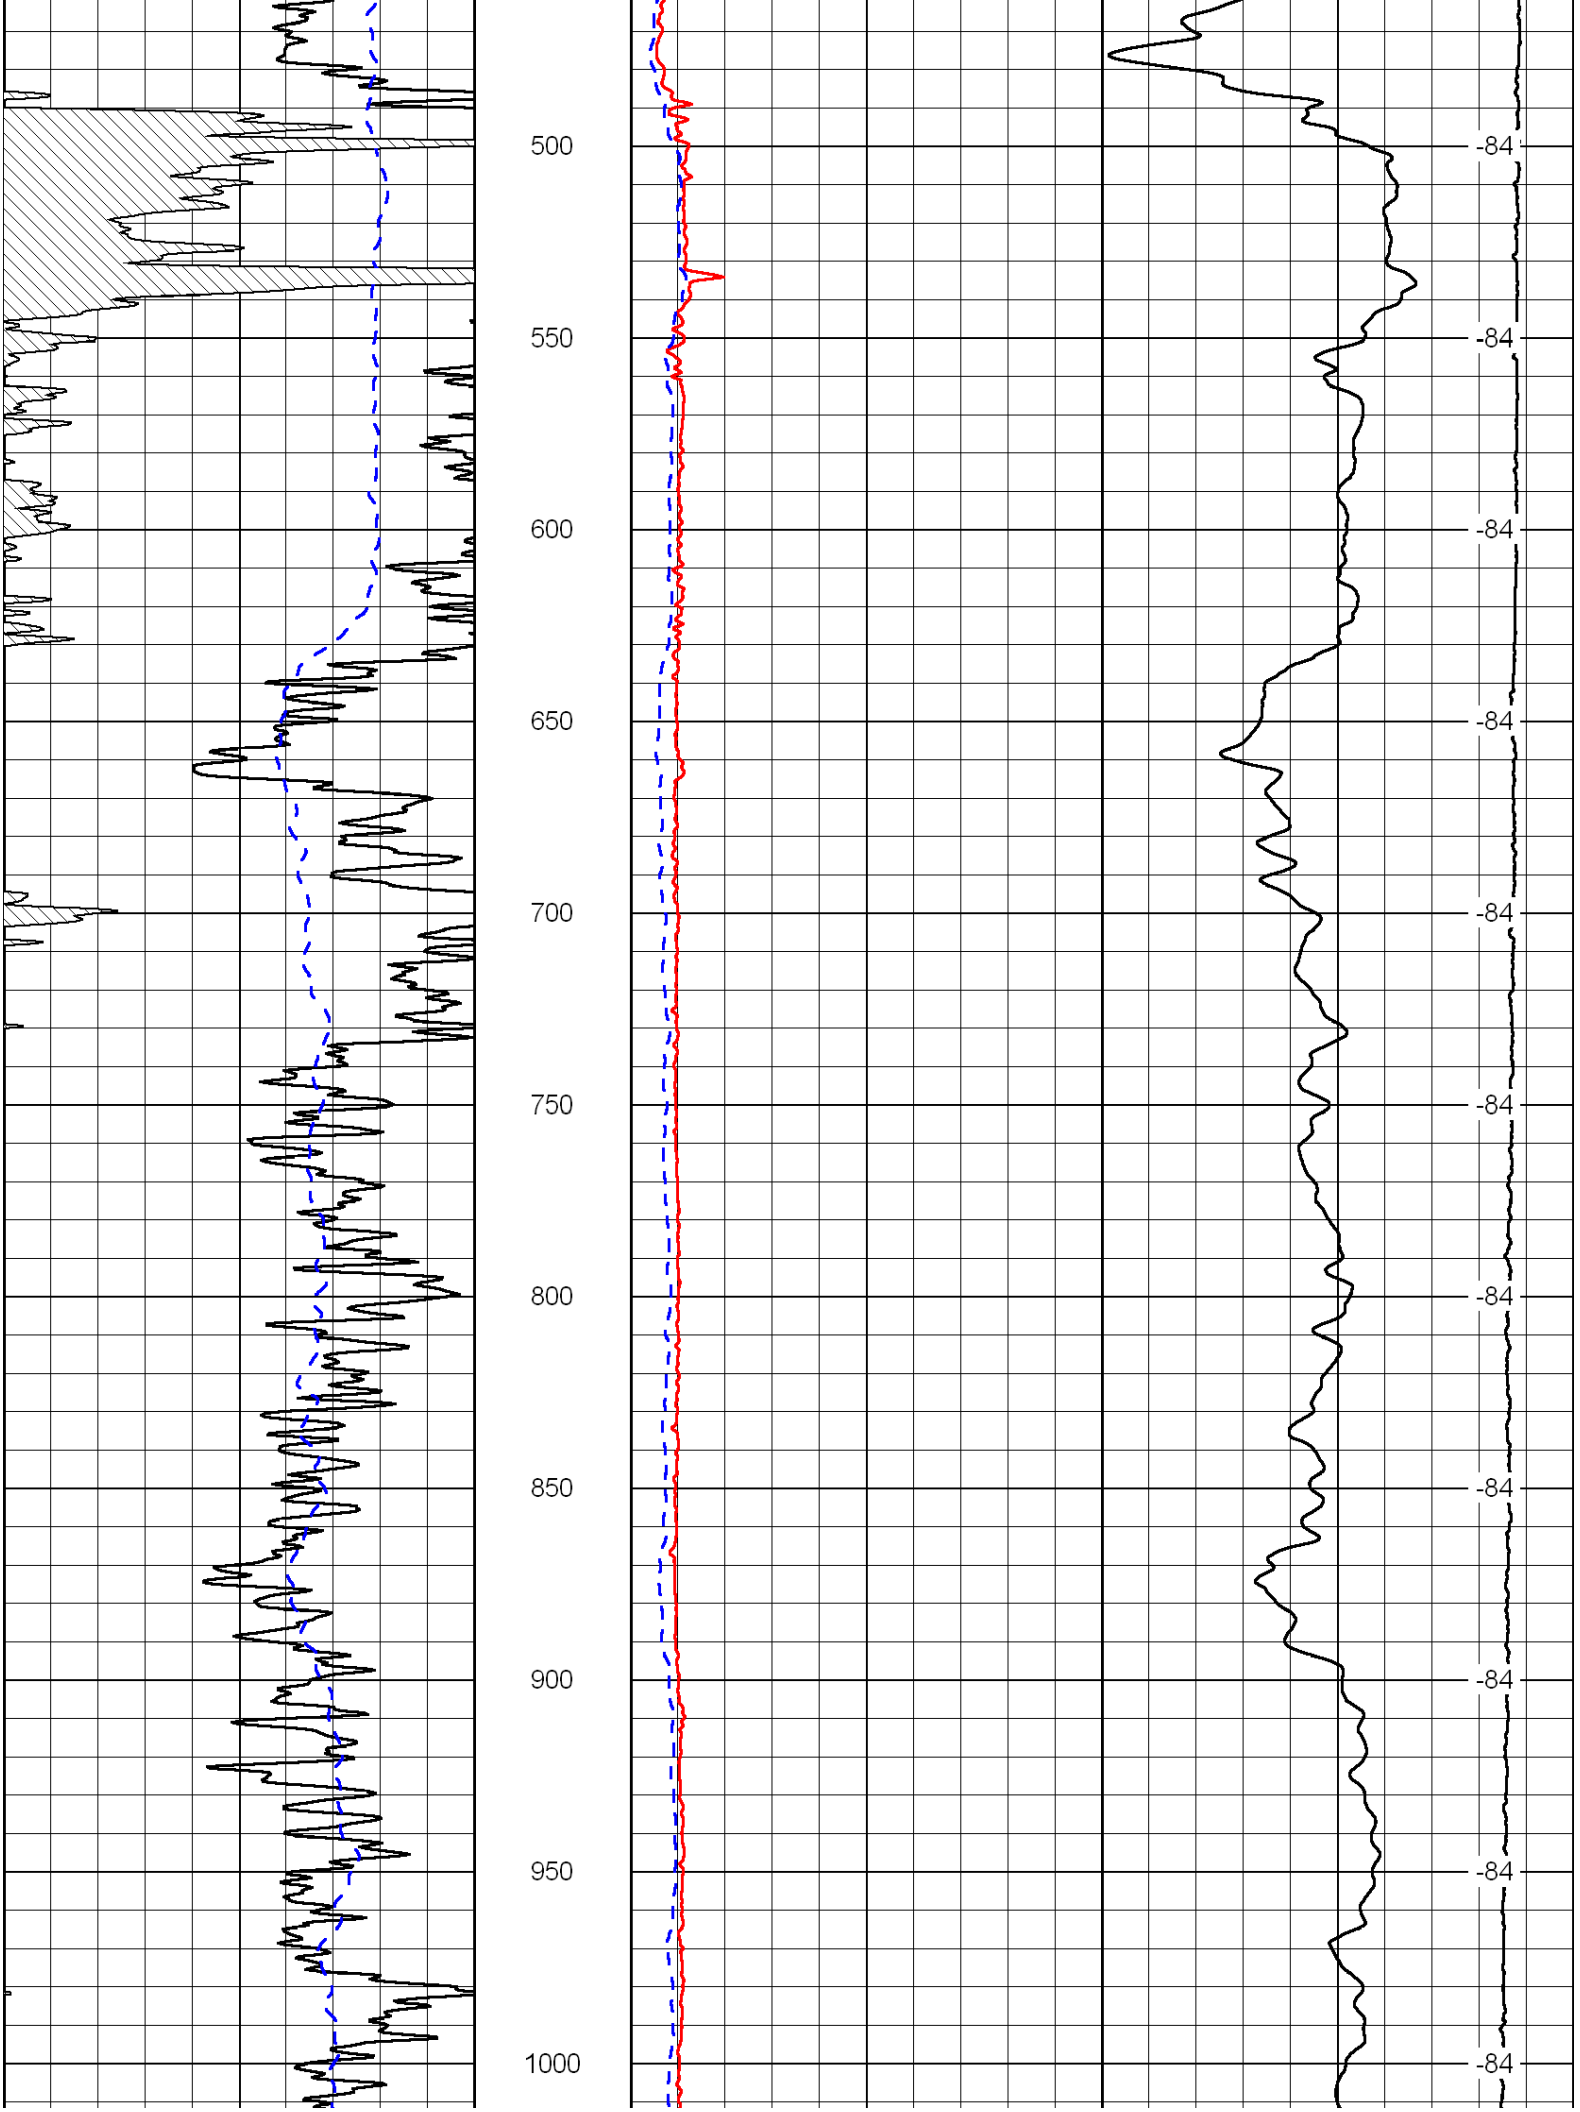
Other Services
CNL/CDL
MEL/BHCS

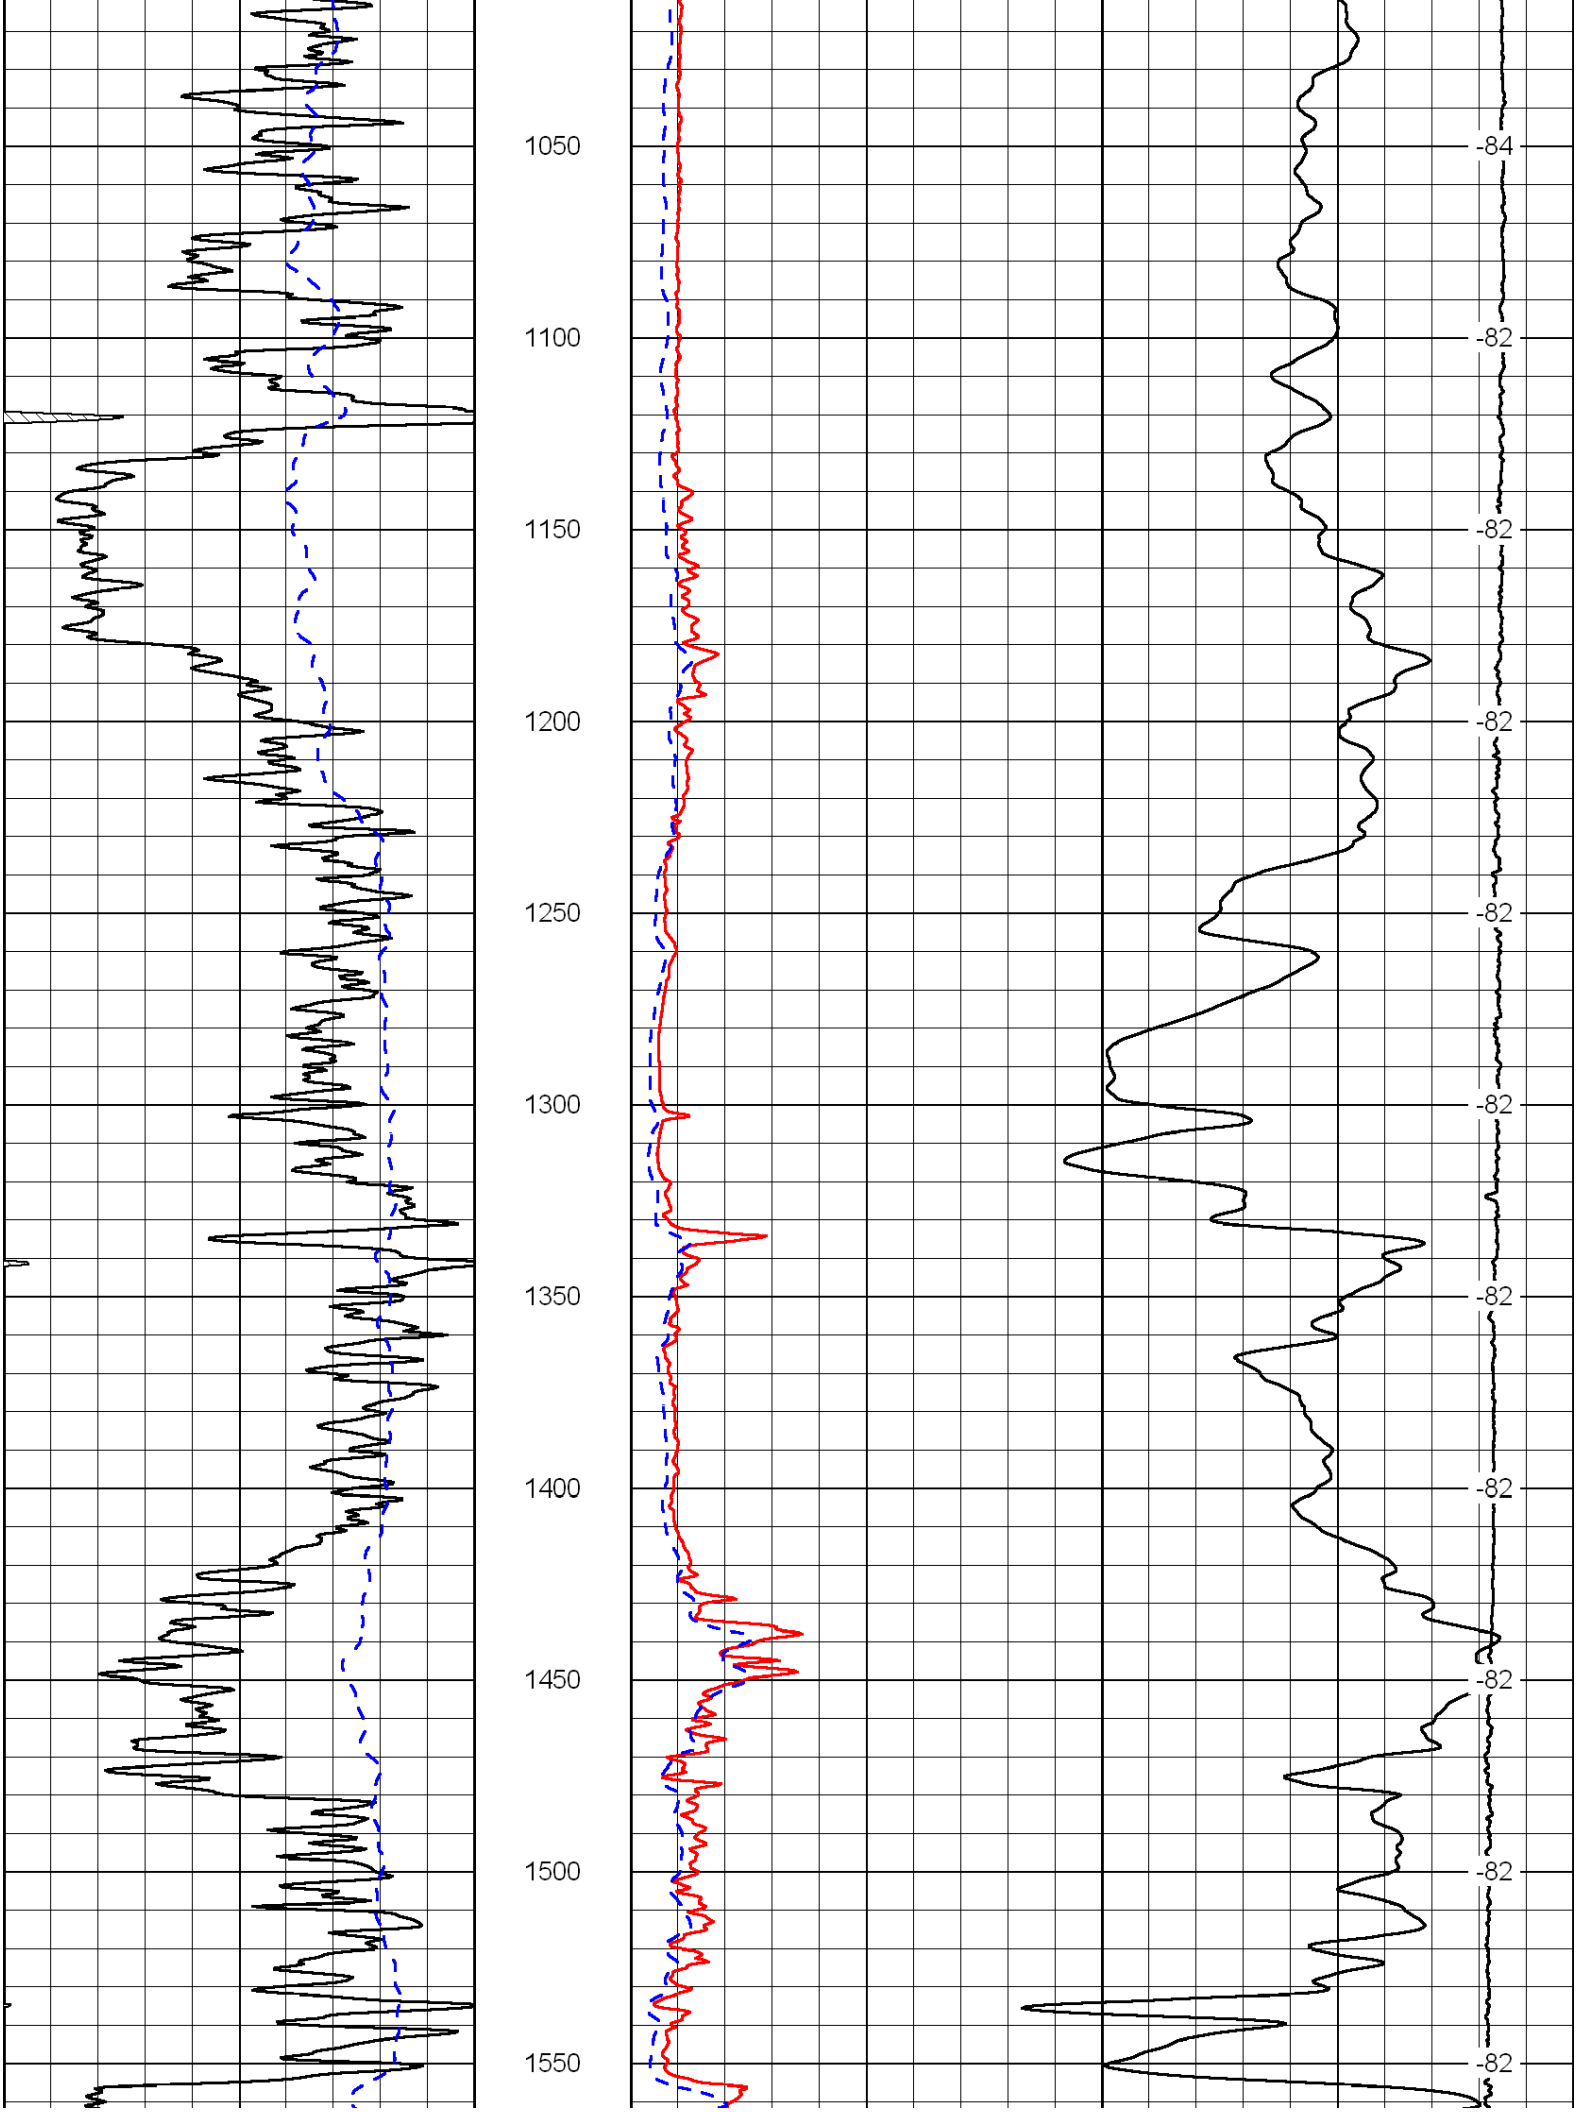
Elevation
K.B. 2933
D.F.
G.L. 2928

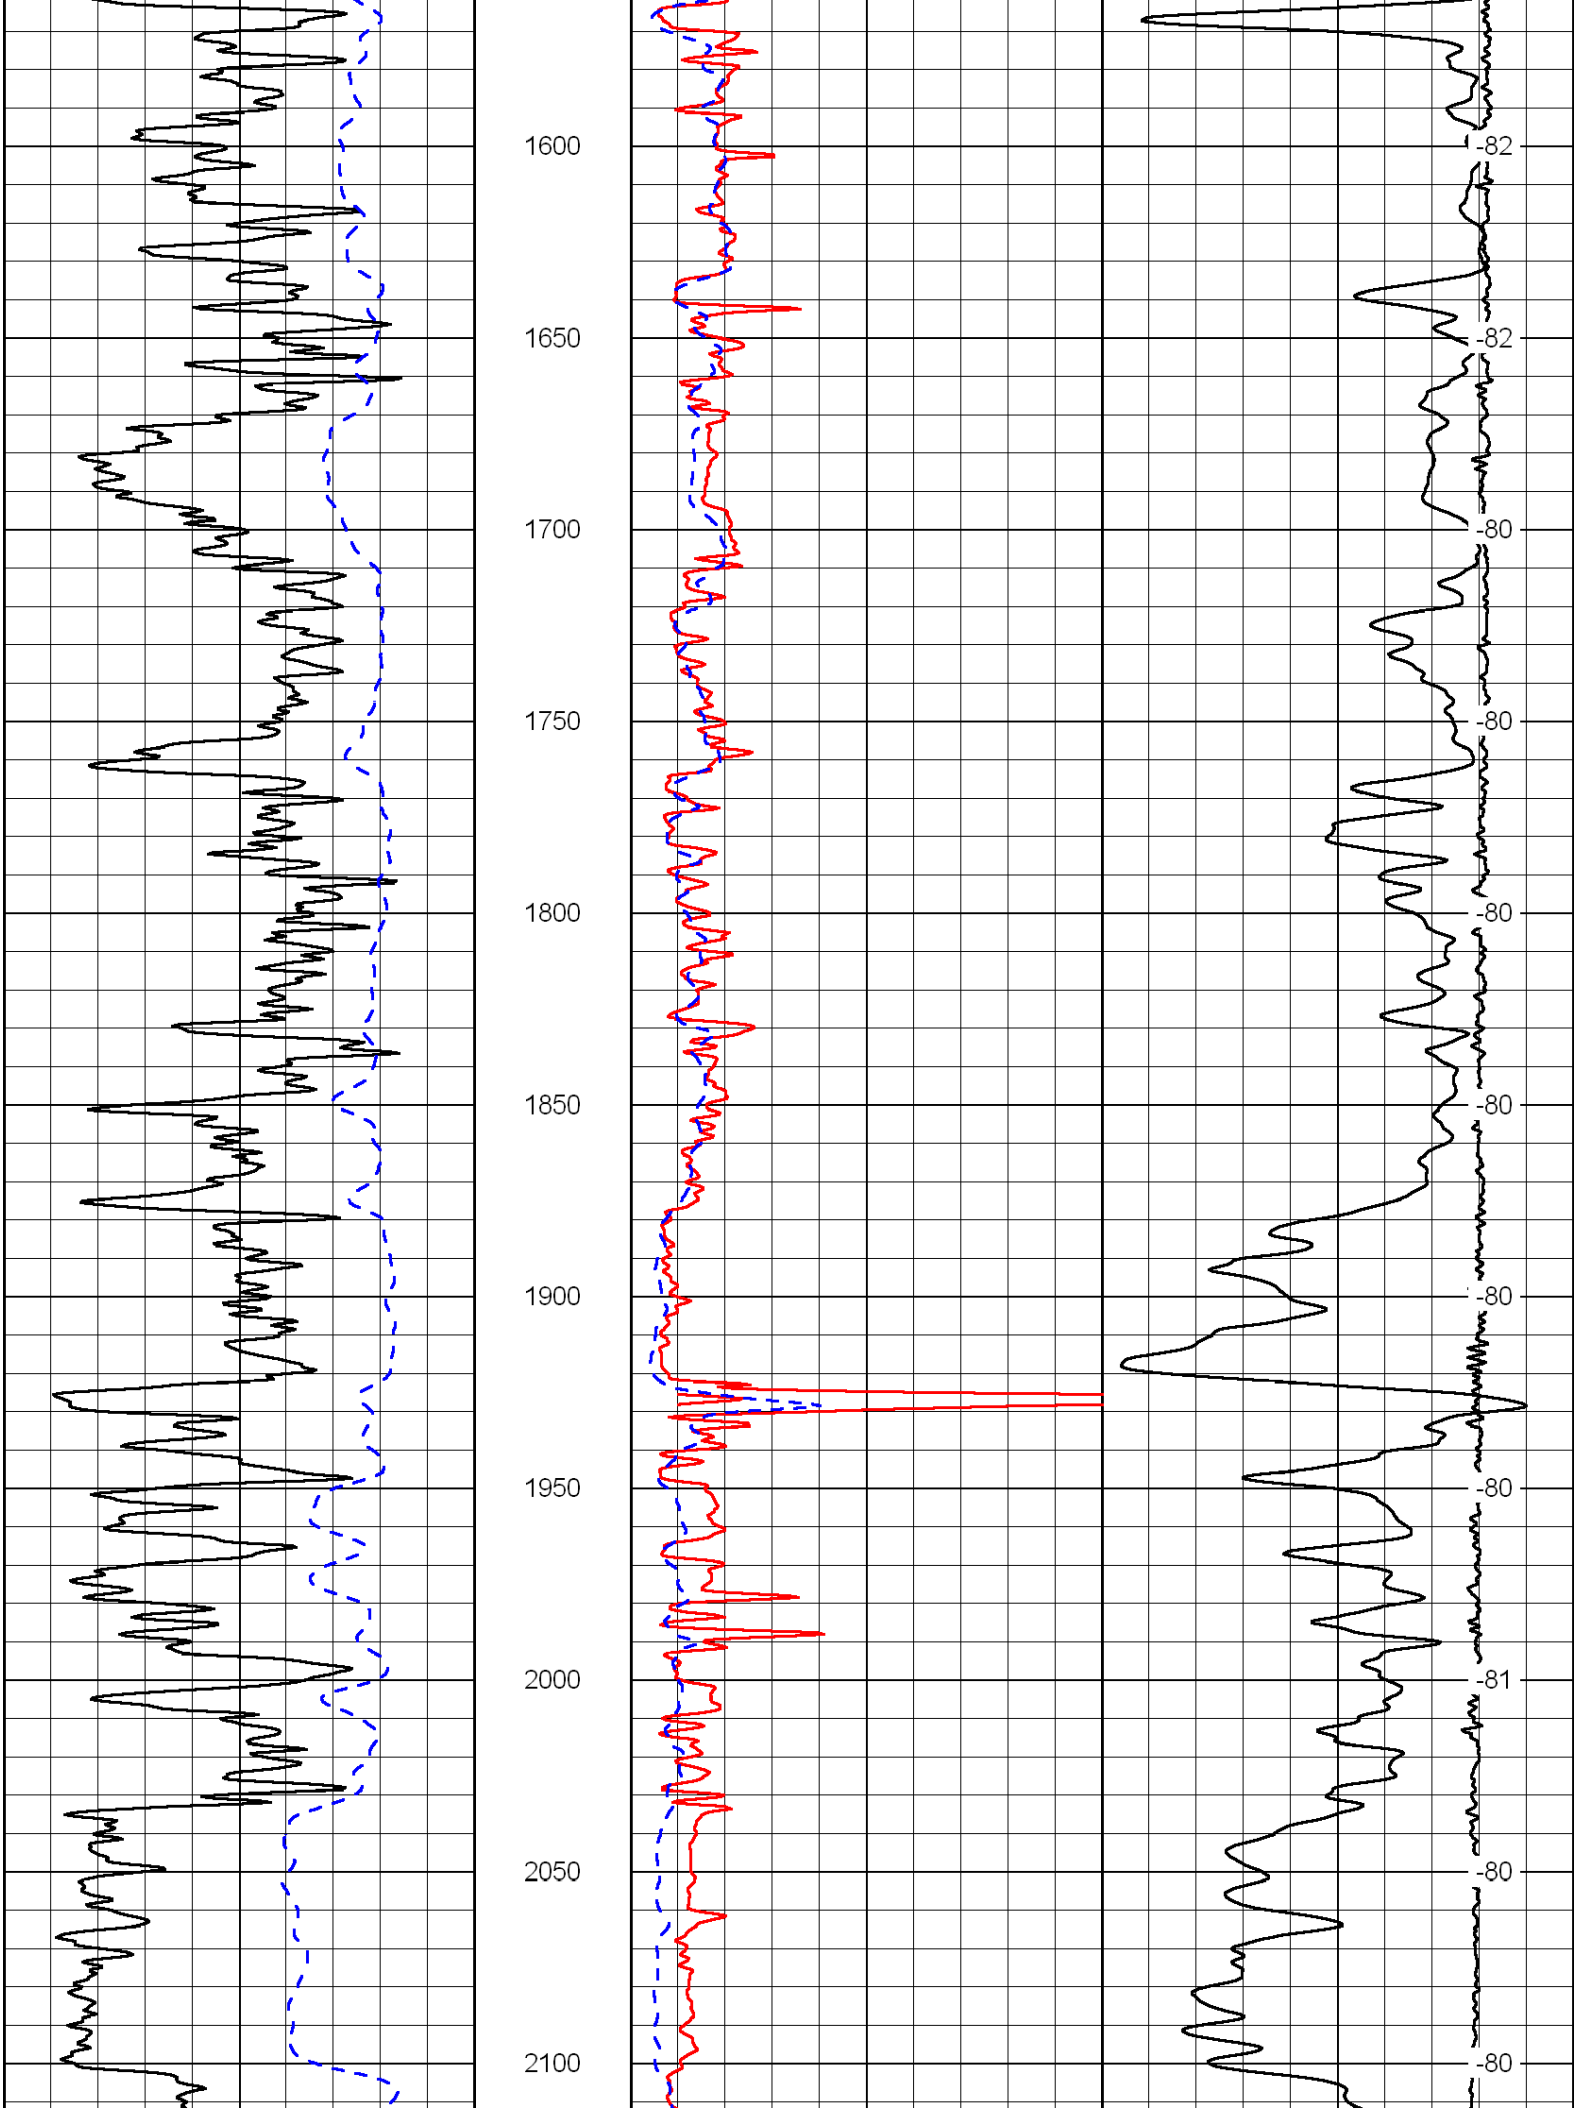
Permanent Datum Ground Level
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum Elevation 2928
Drilling Measured From Kelly Bushing

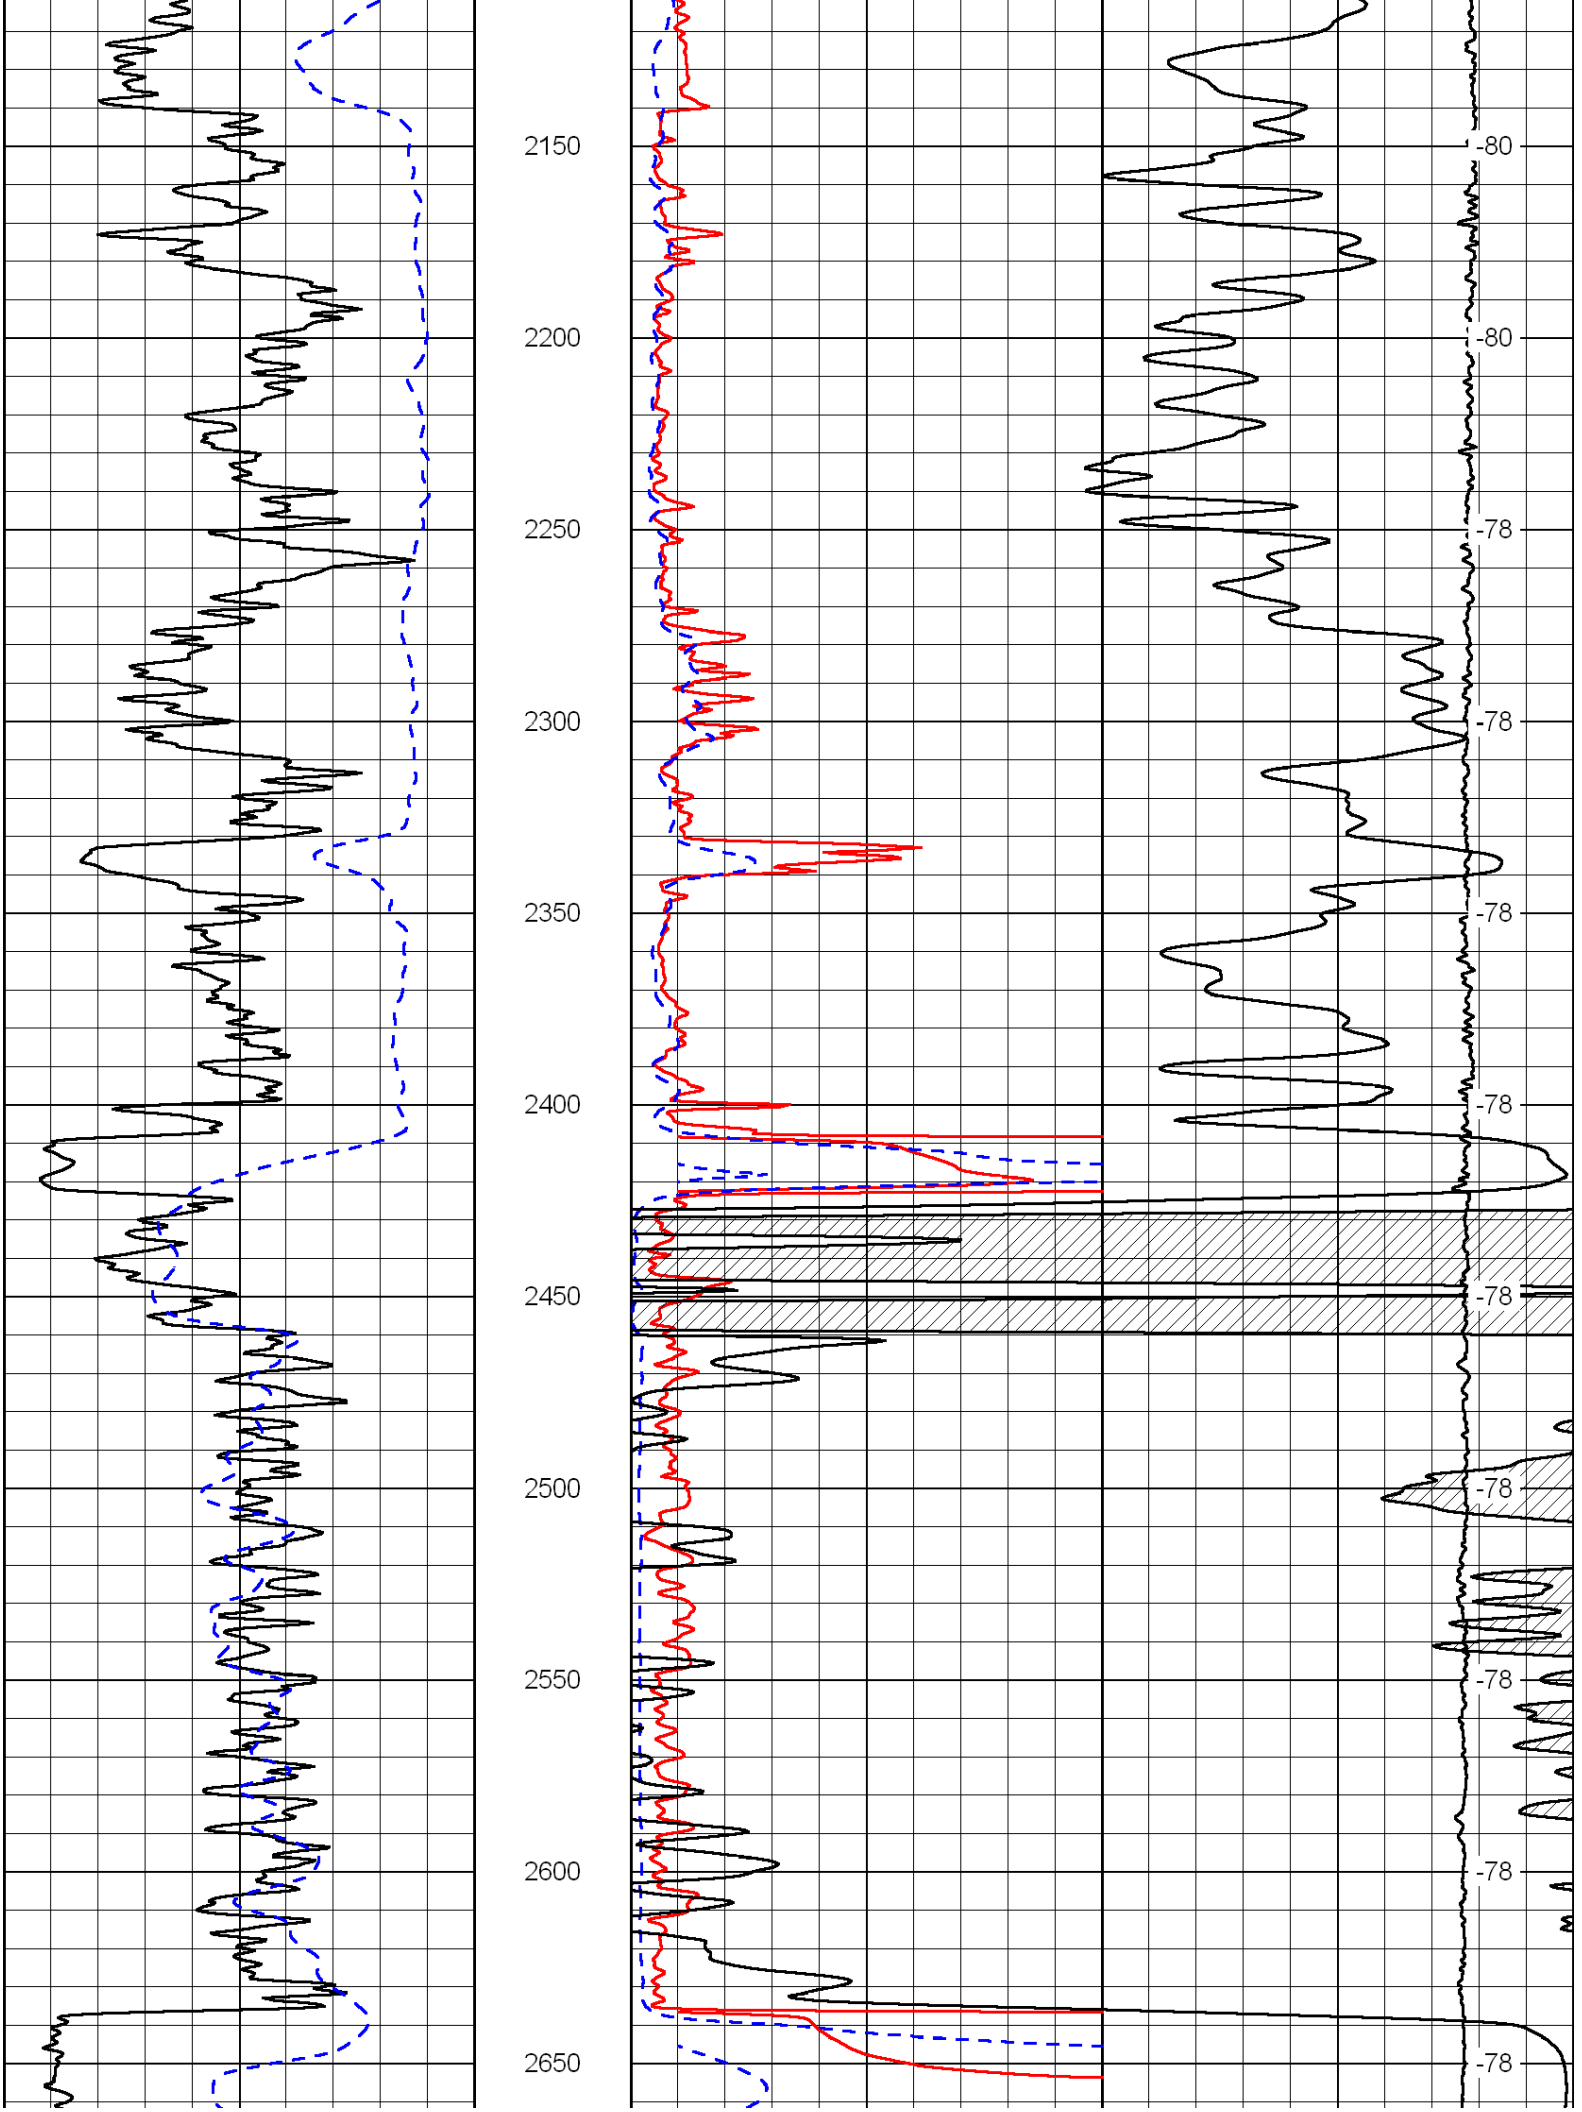
| | | |

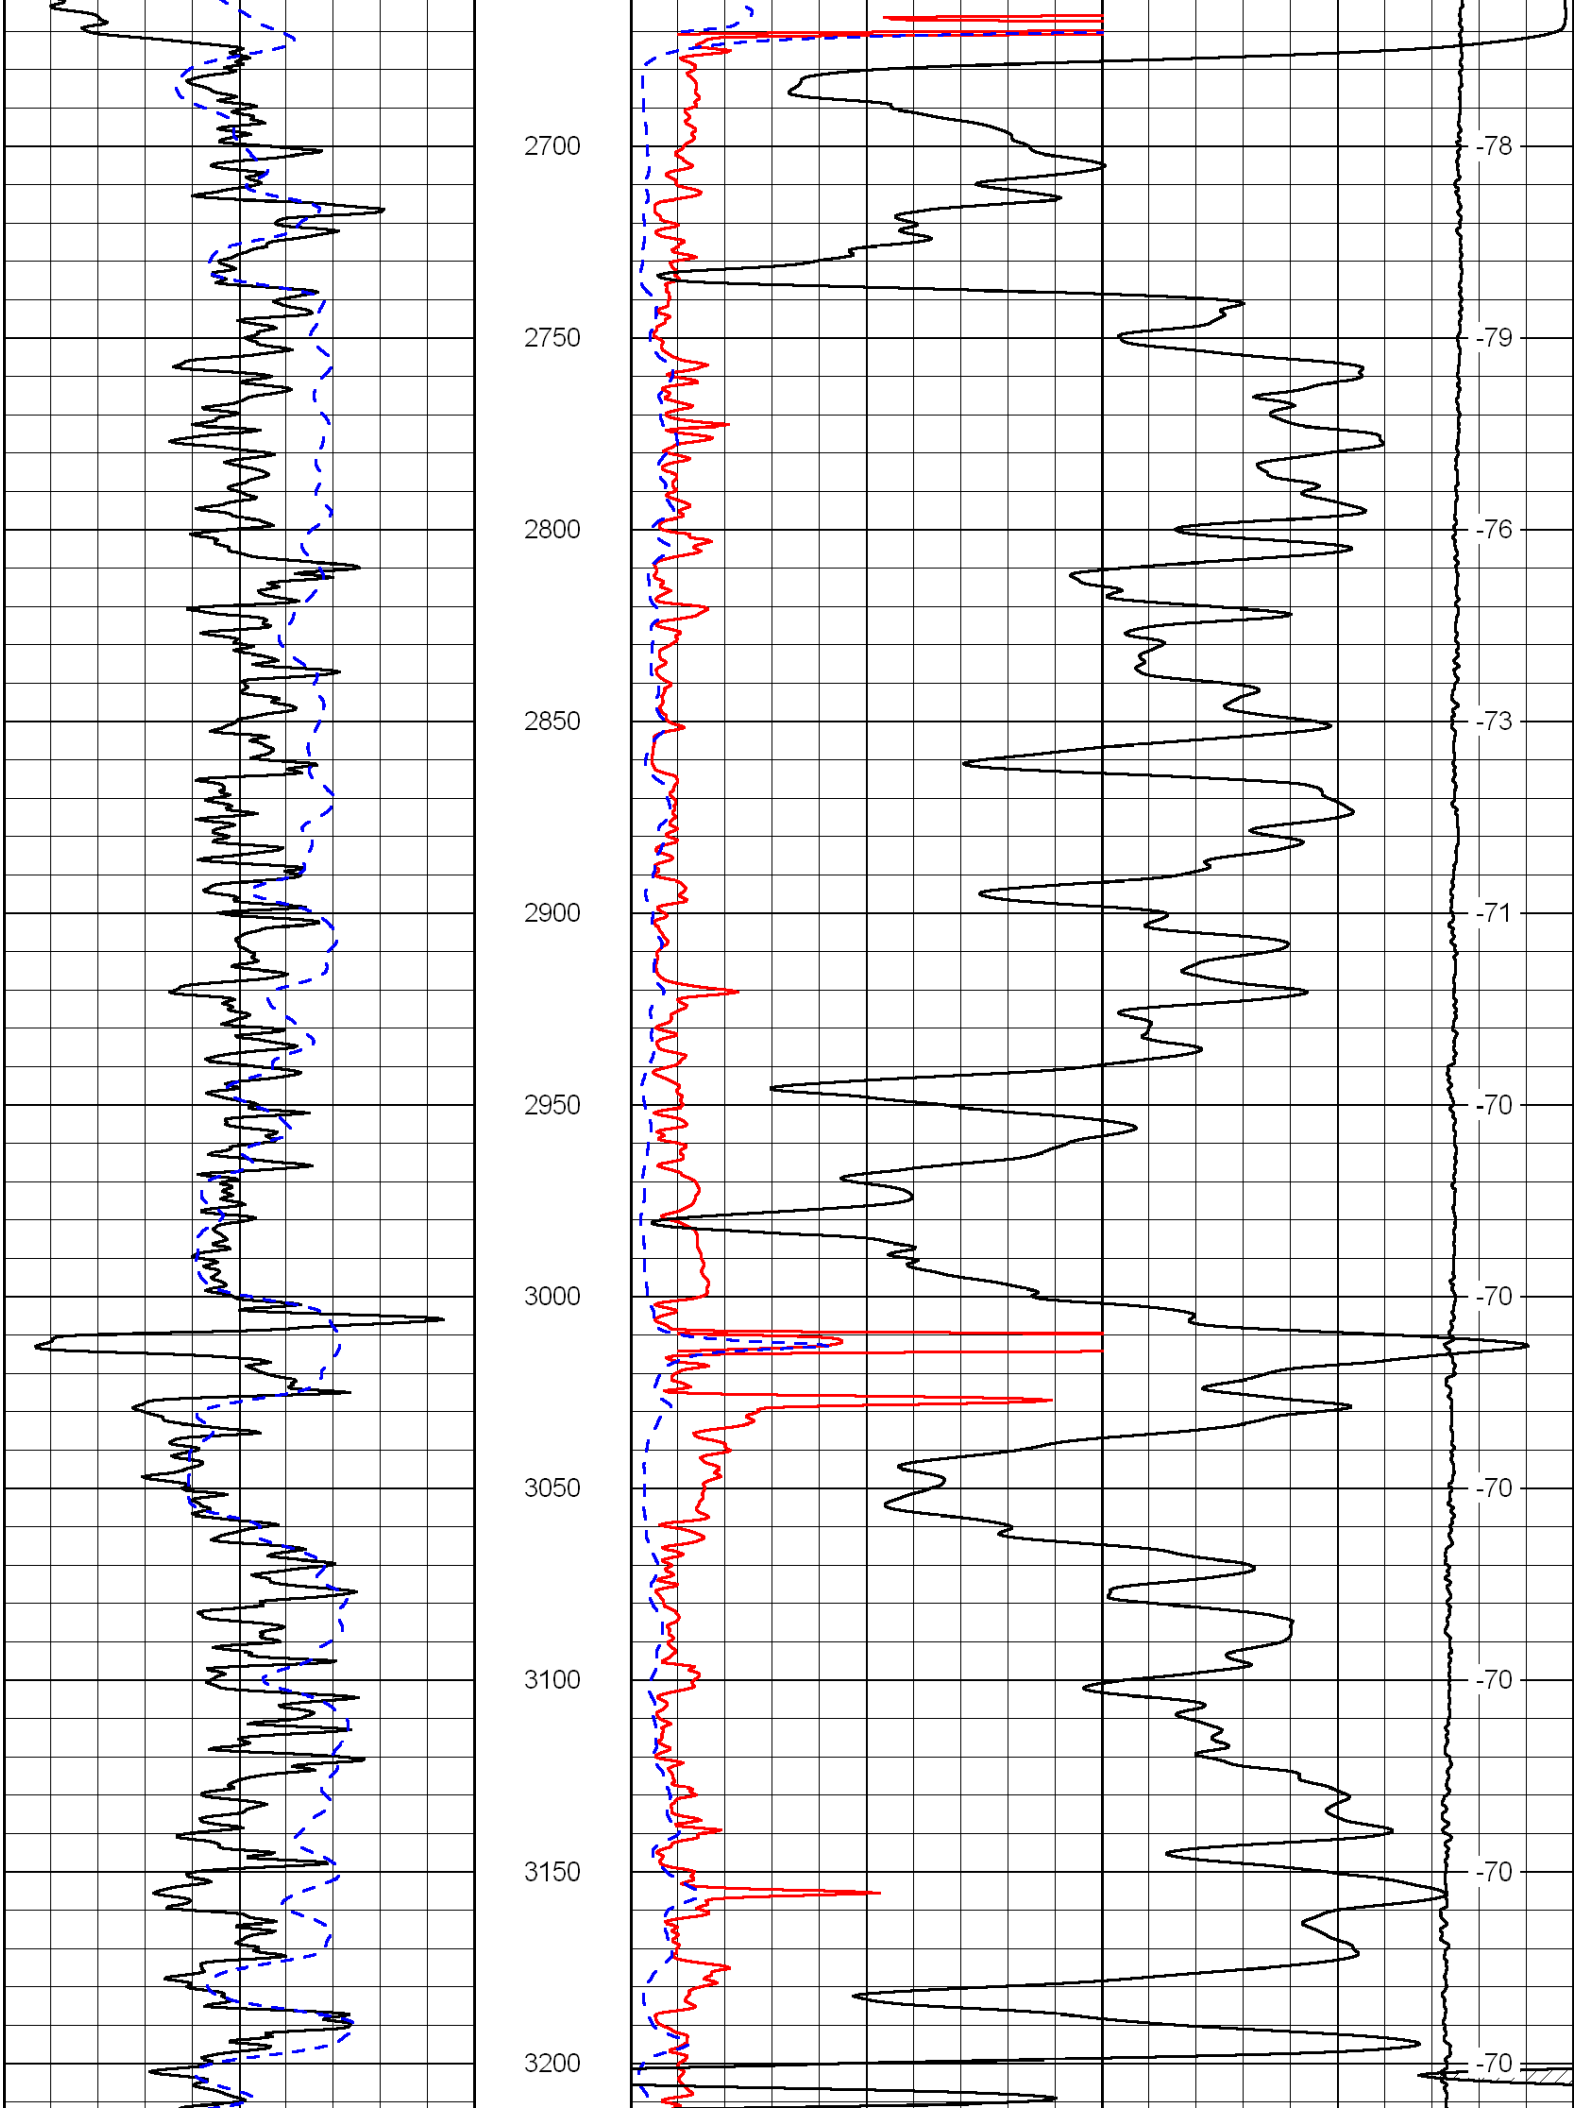

0 Gamma Ray 150
-200 SP (mV) 0
0 Shallow Resistivity 50
0 Deep Resistivity 50
1000 Conductivity 0
15000 Line Tension 0
50 Shallow Resistivity 500
50 Deep Resistivity 500
LSPD
0
50
100
150
200
250
300
350
400
450
-33
-84
-83
-84
-33
-69
-69
-74
-86
-86

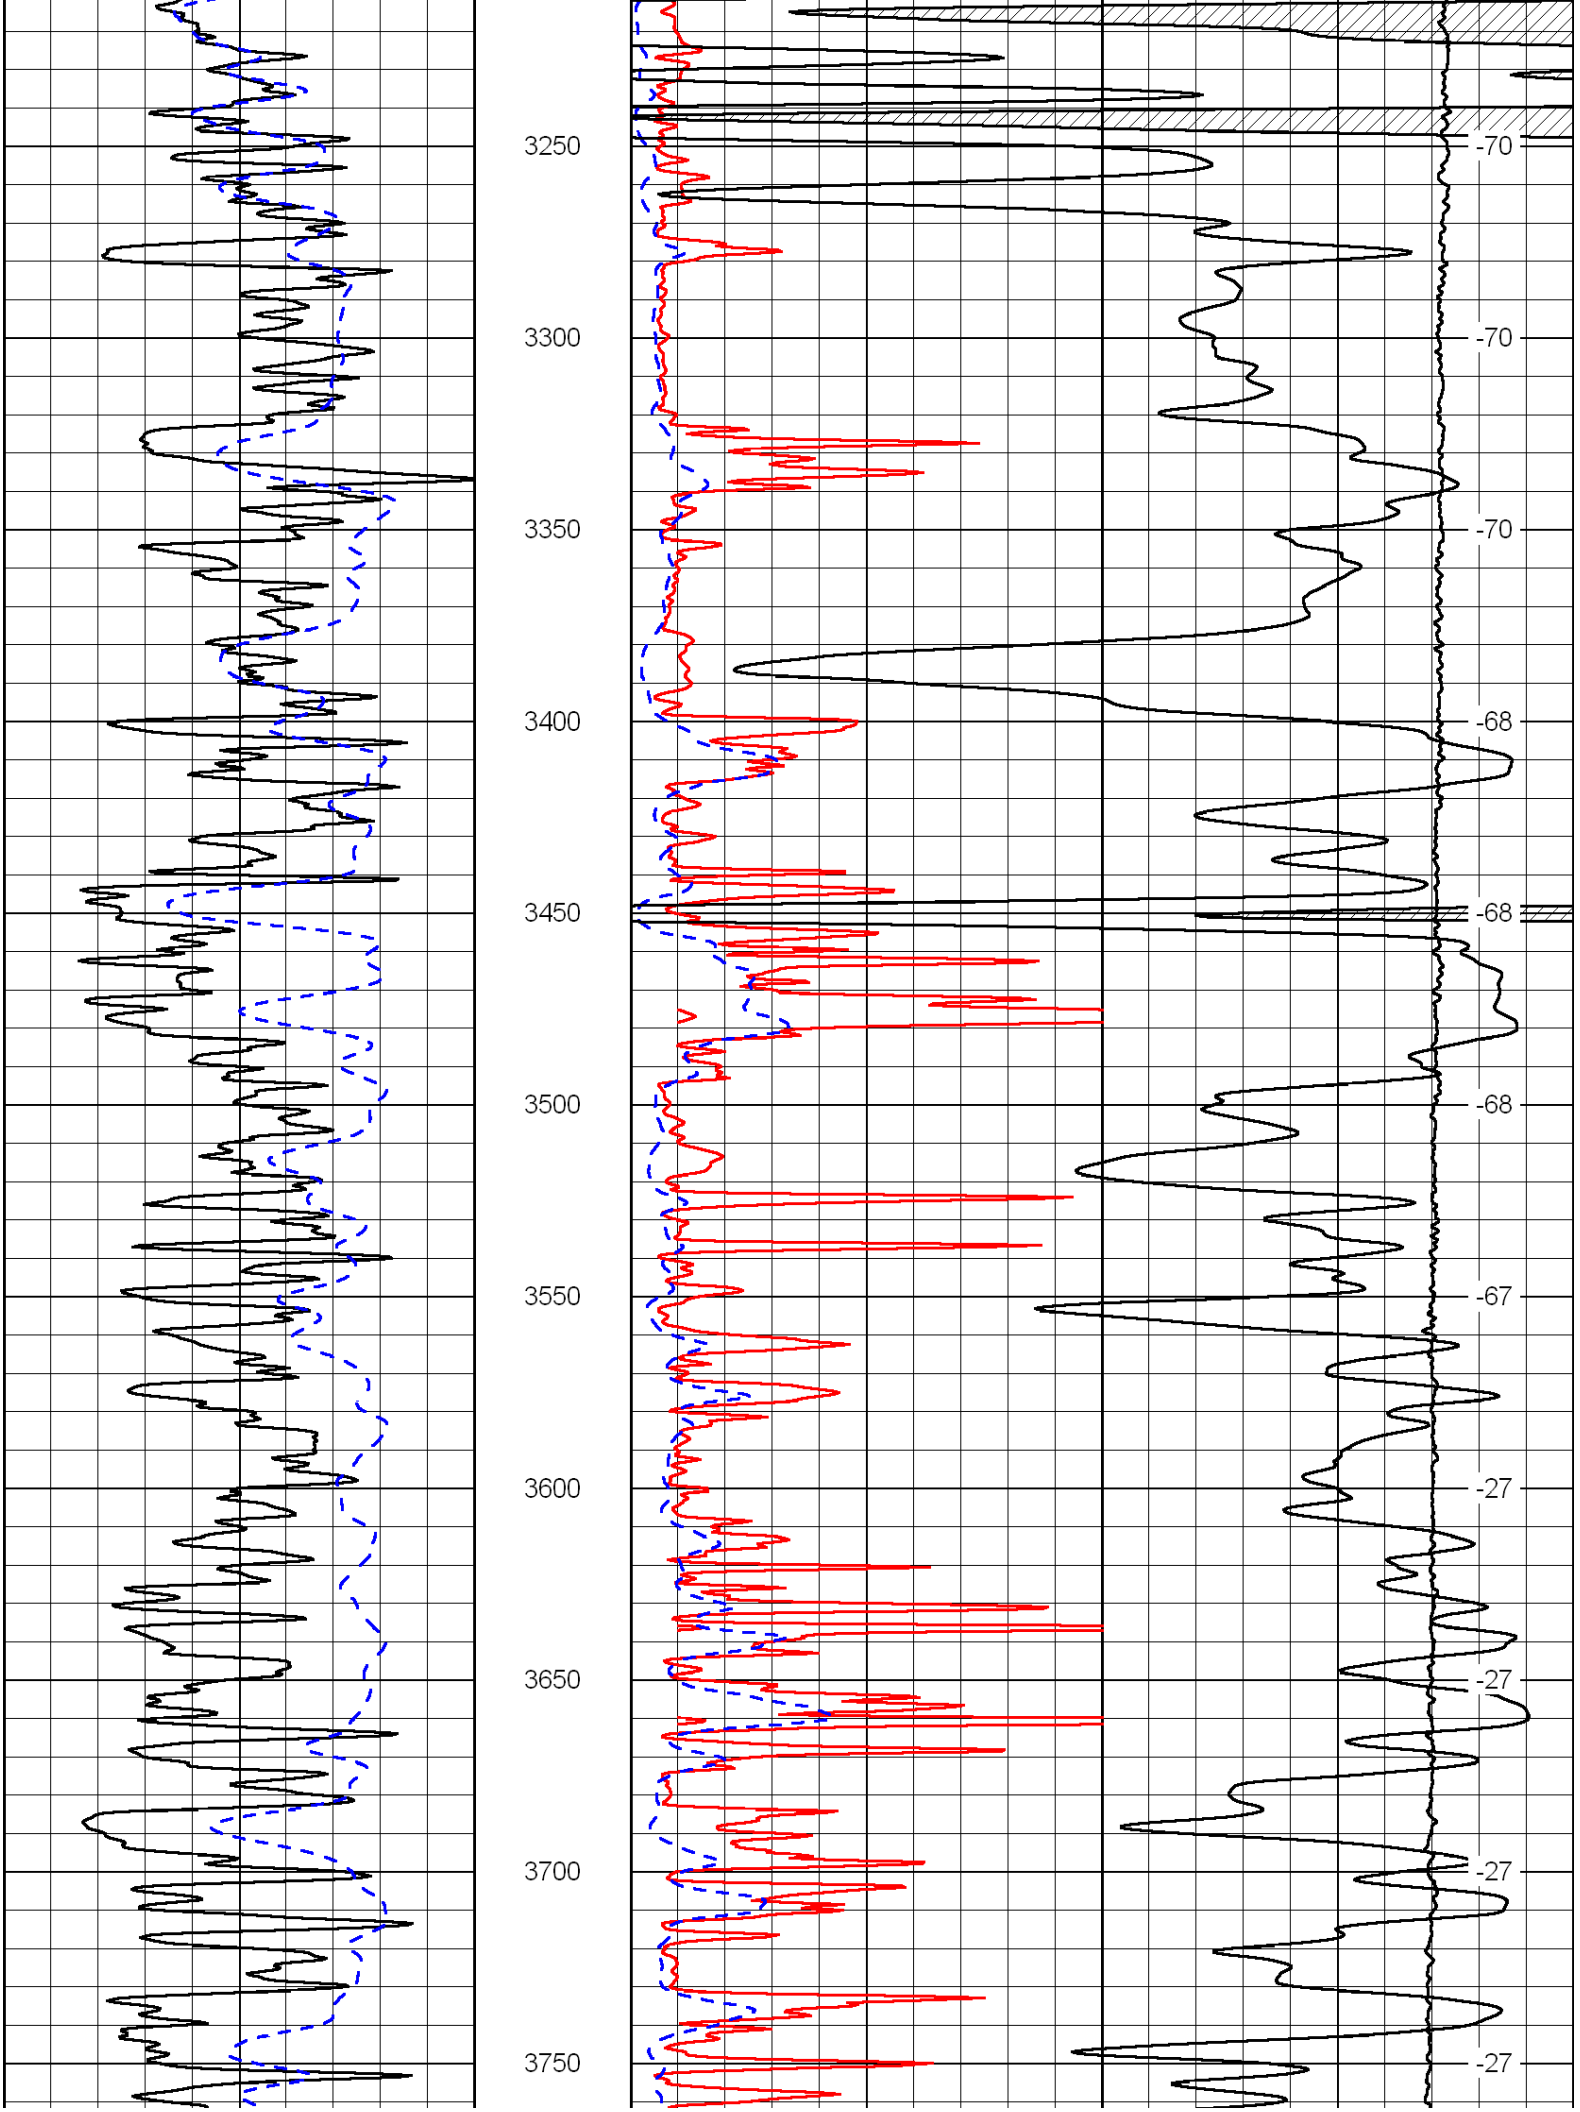

500
550
600
650
700
750
800
850
900
950
1000
-84
-84
-84
-84
-84
-84
-84
-84
-84
-84

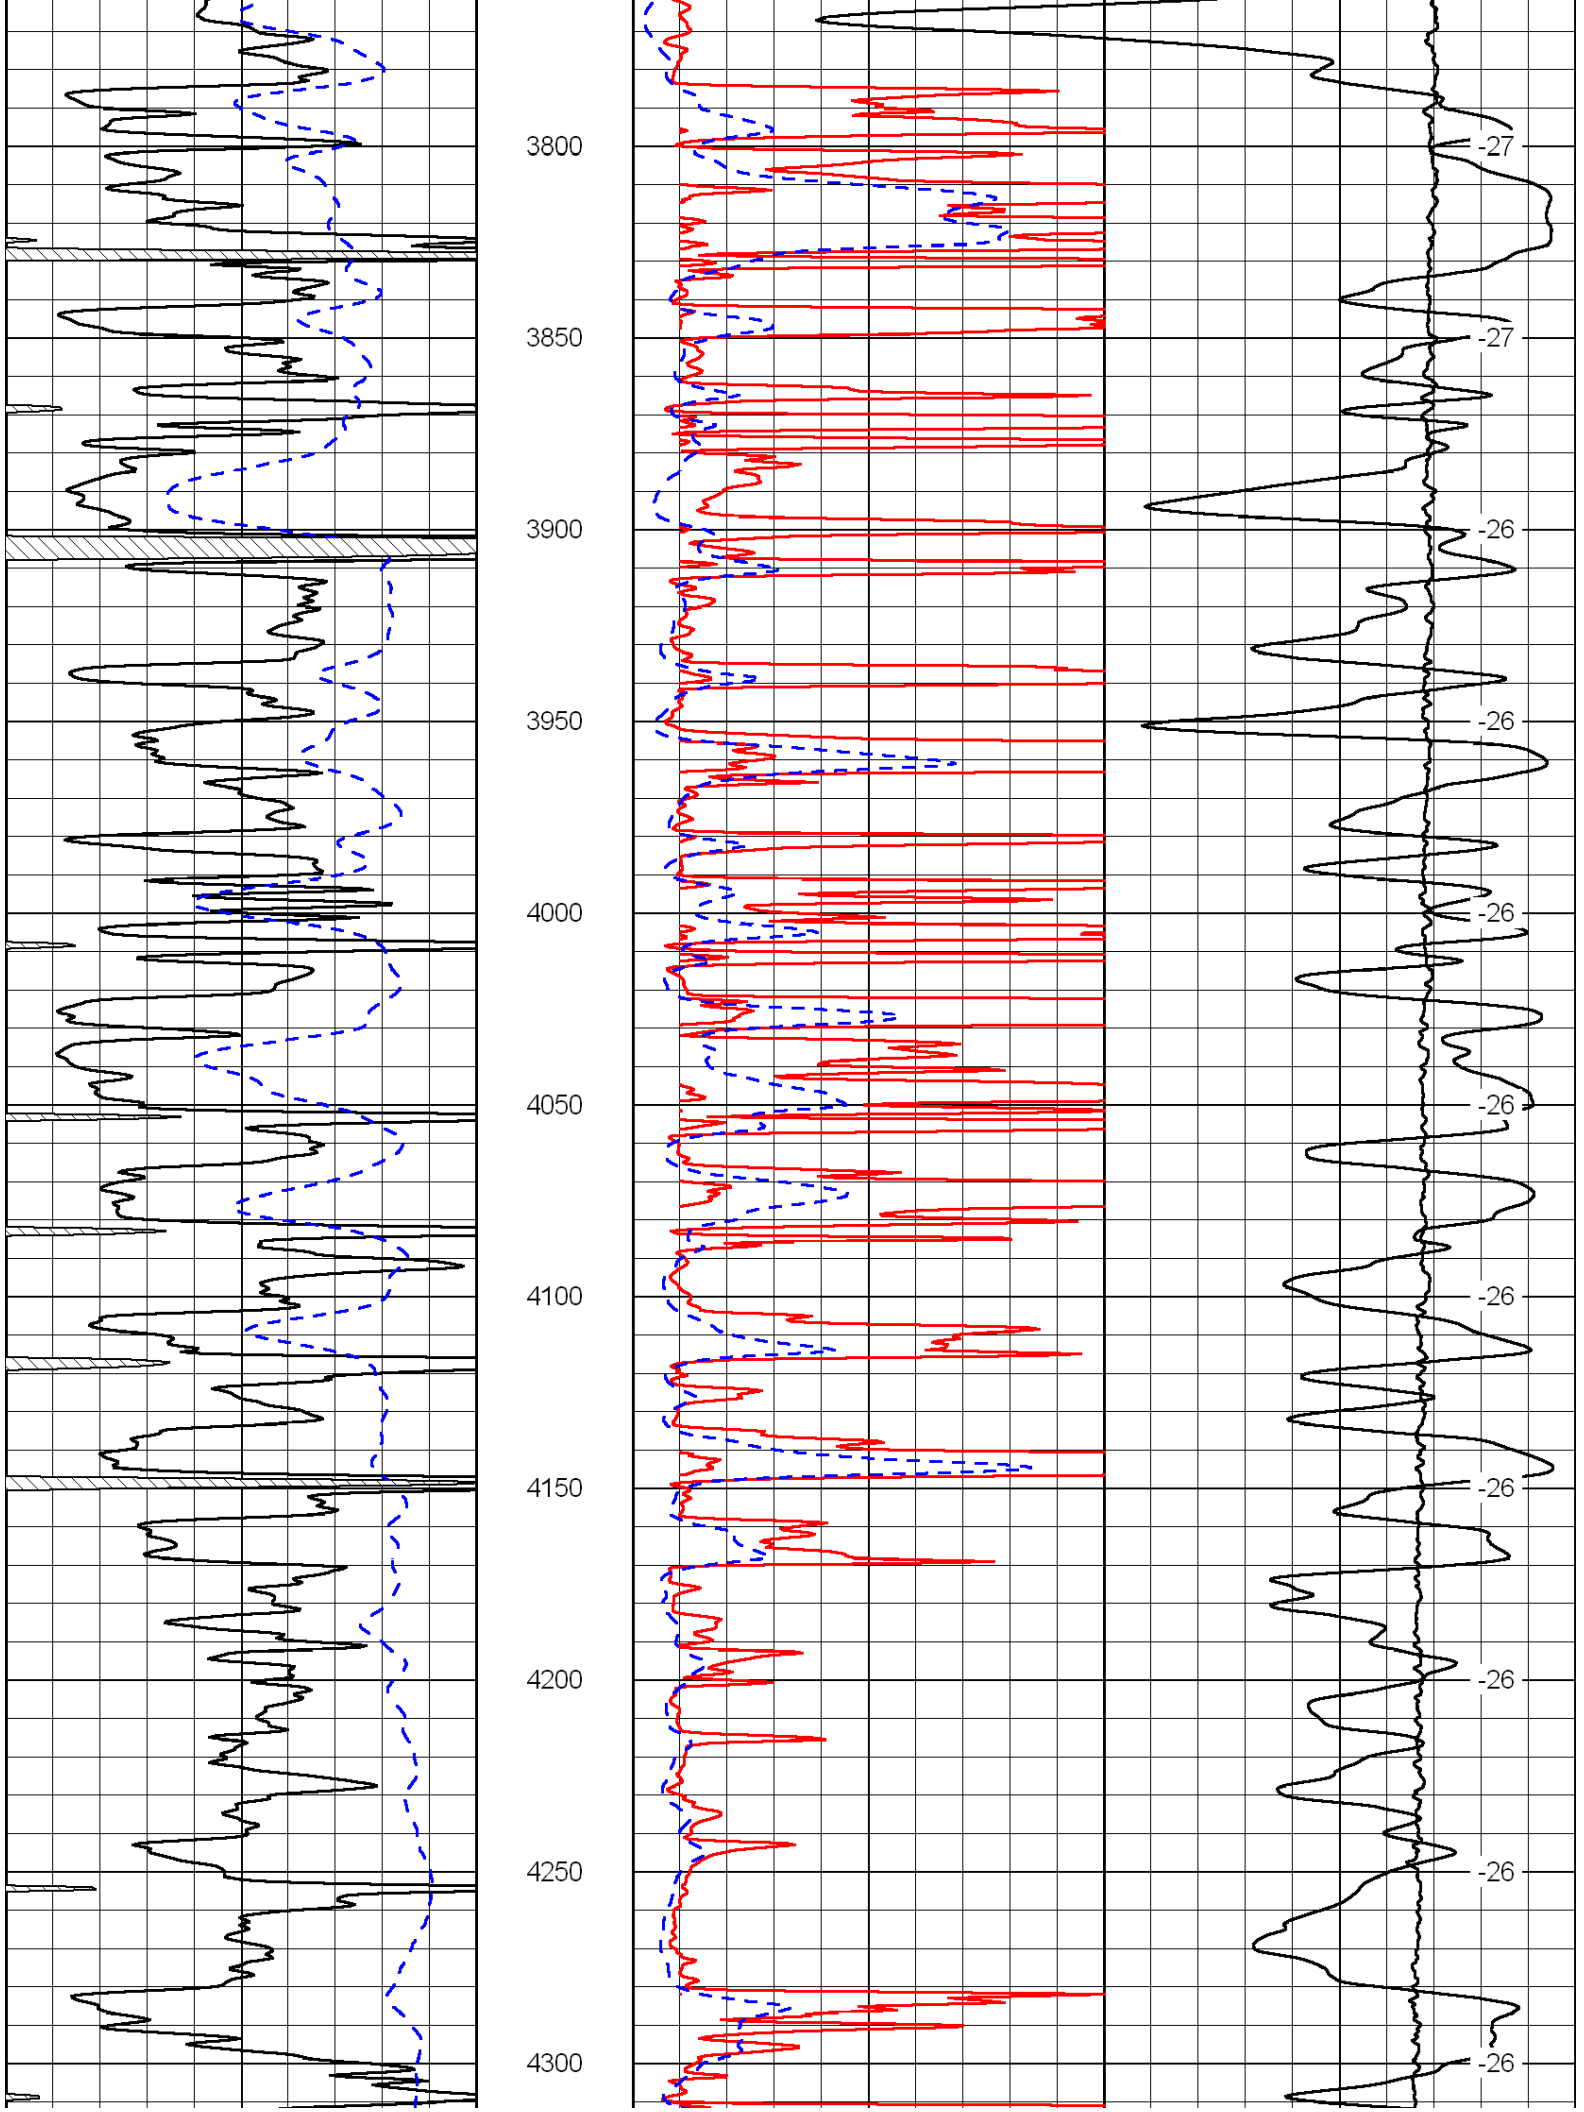

1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550
-84
-82
-82
-82
-82
-82
-82
-82
-82
-82

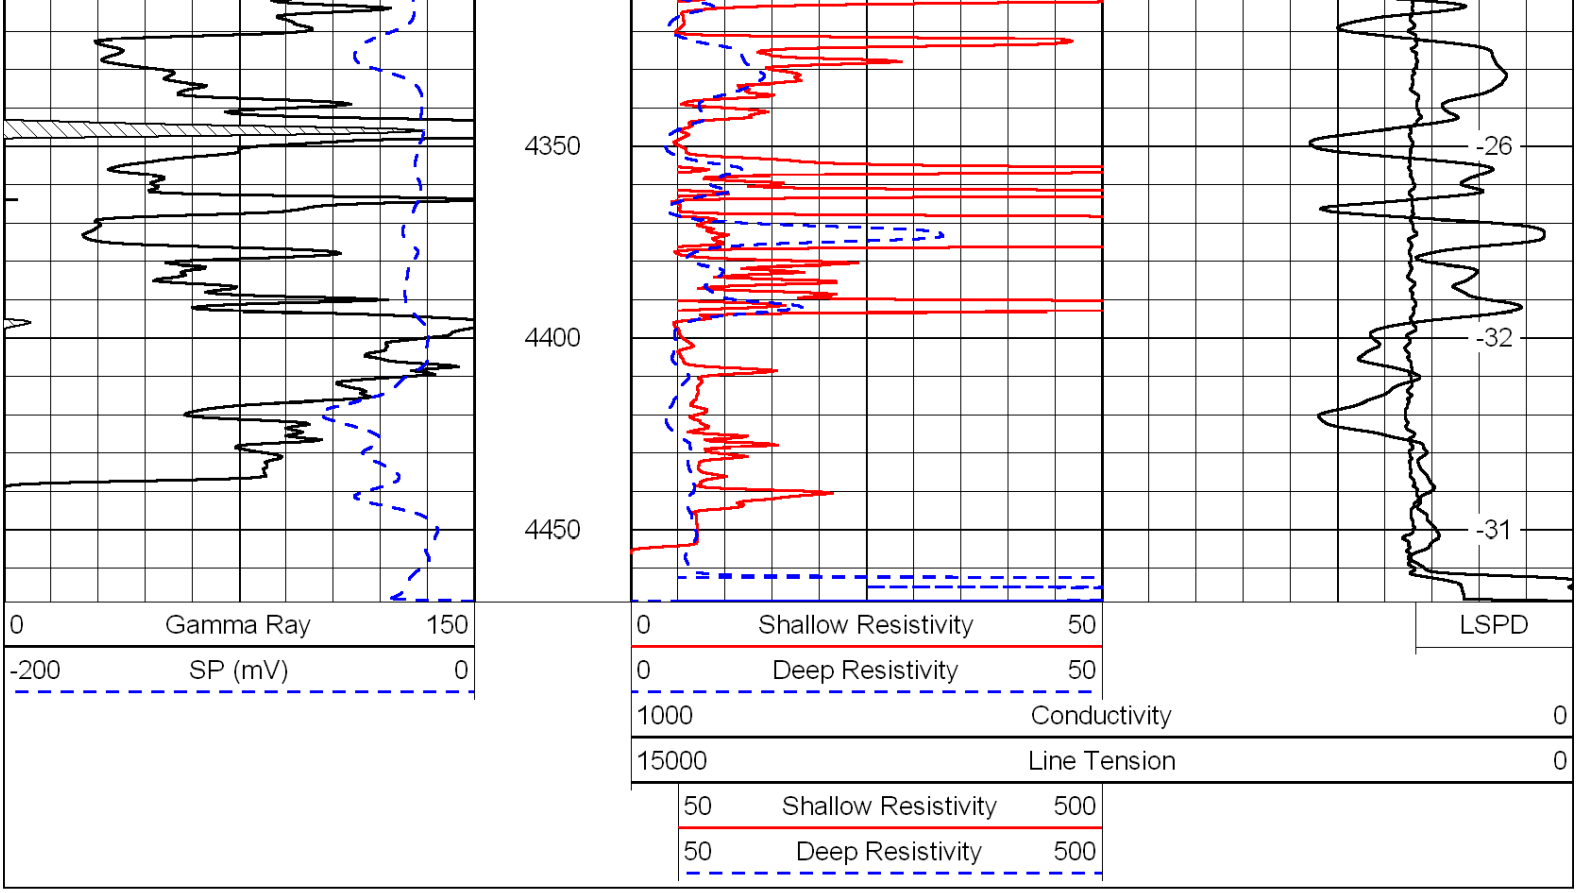

1600
1650
1700
1750
1800
1850
1900
1950
2000
2050
2100
-82
-82
-80
-80
-80
-80
-80
-80
-81
-80
-80


2150
2200
2250
2300
2350
2400
2450
2500
2550
2600
2650
-80
-80
-78
-78
-78
-78
-78
-78
-78
-78

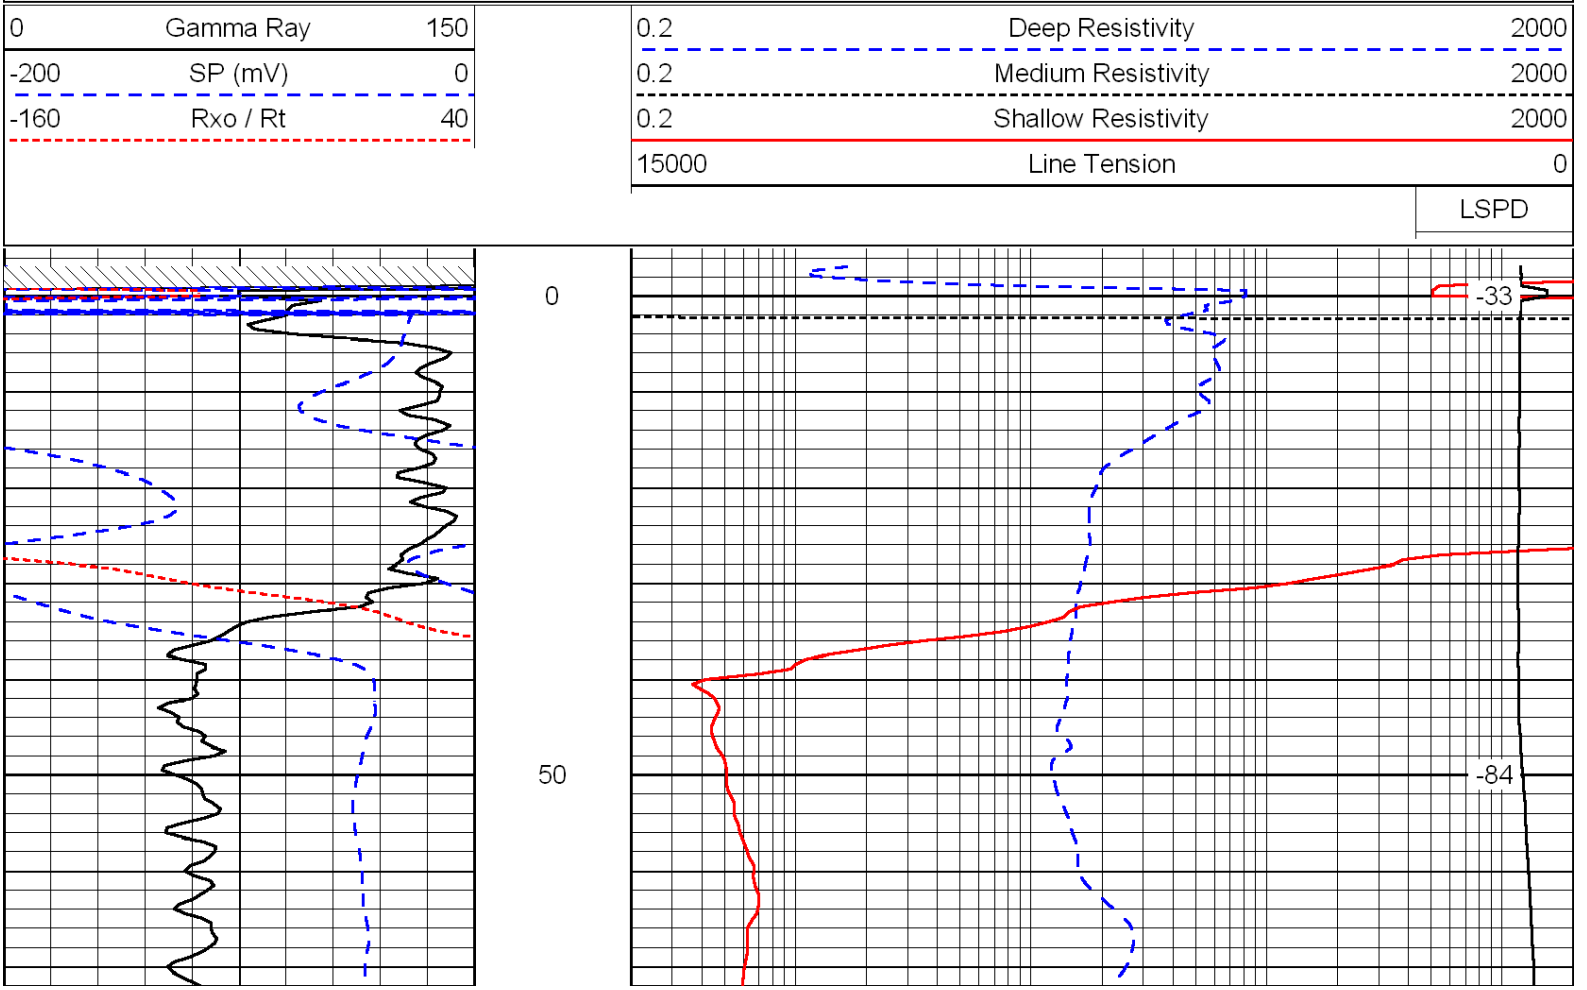

2700
2750
2800
2850
2900
2950
3000
3050
3100
3150
3200
-78
-79
-76
-73
-71
-70
-70
-70
-70
-70
-70

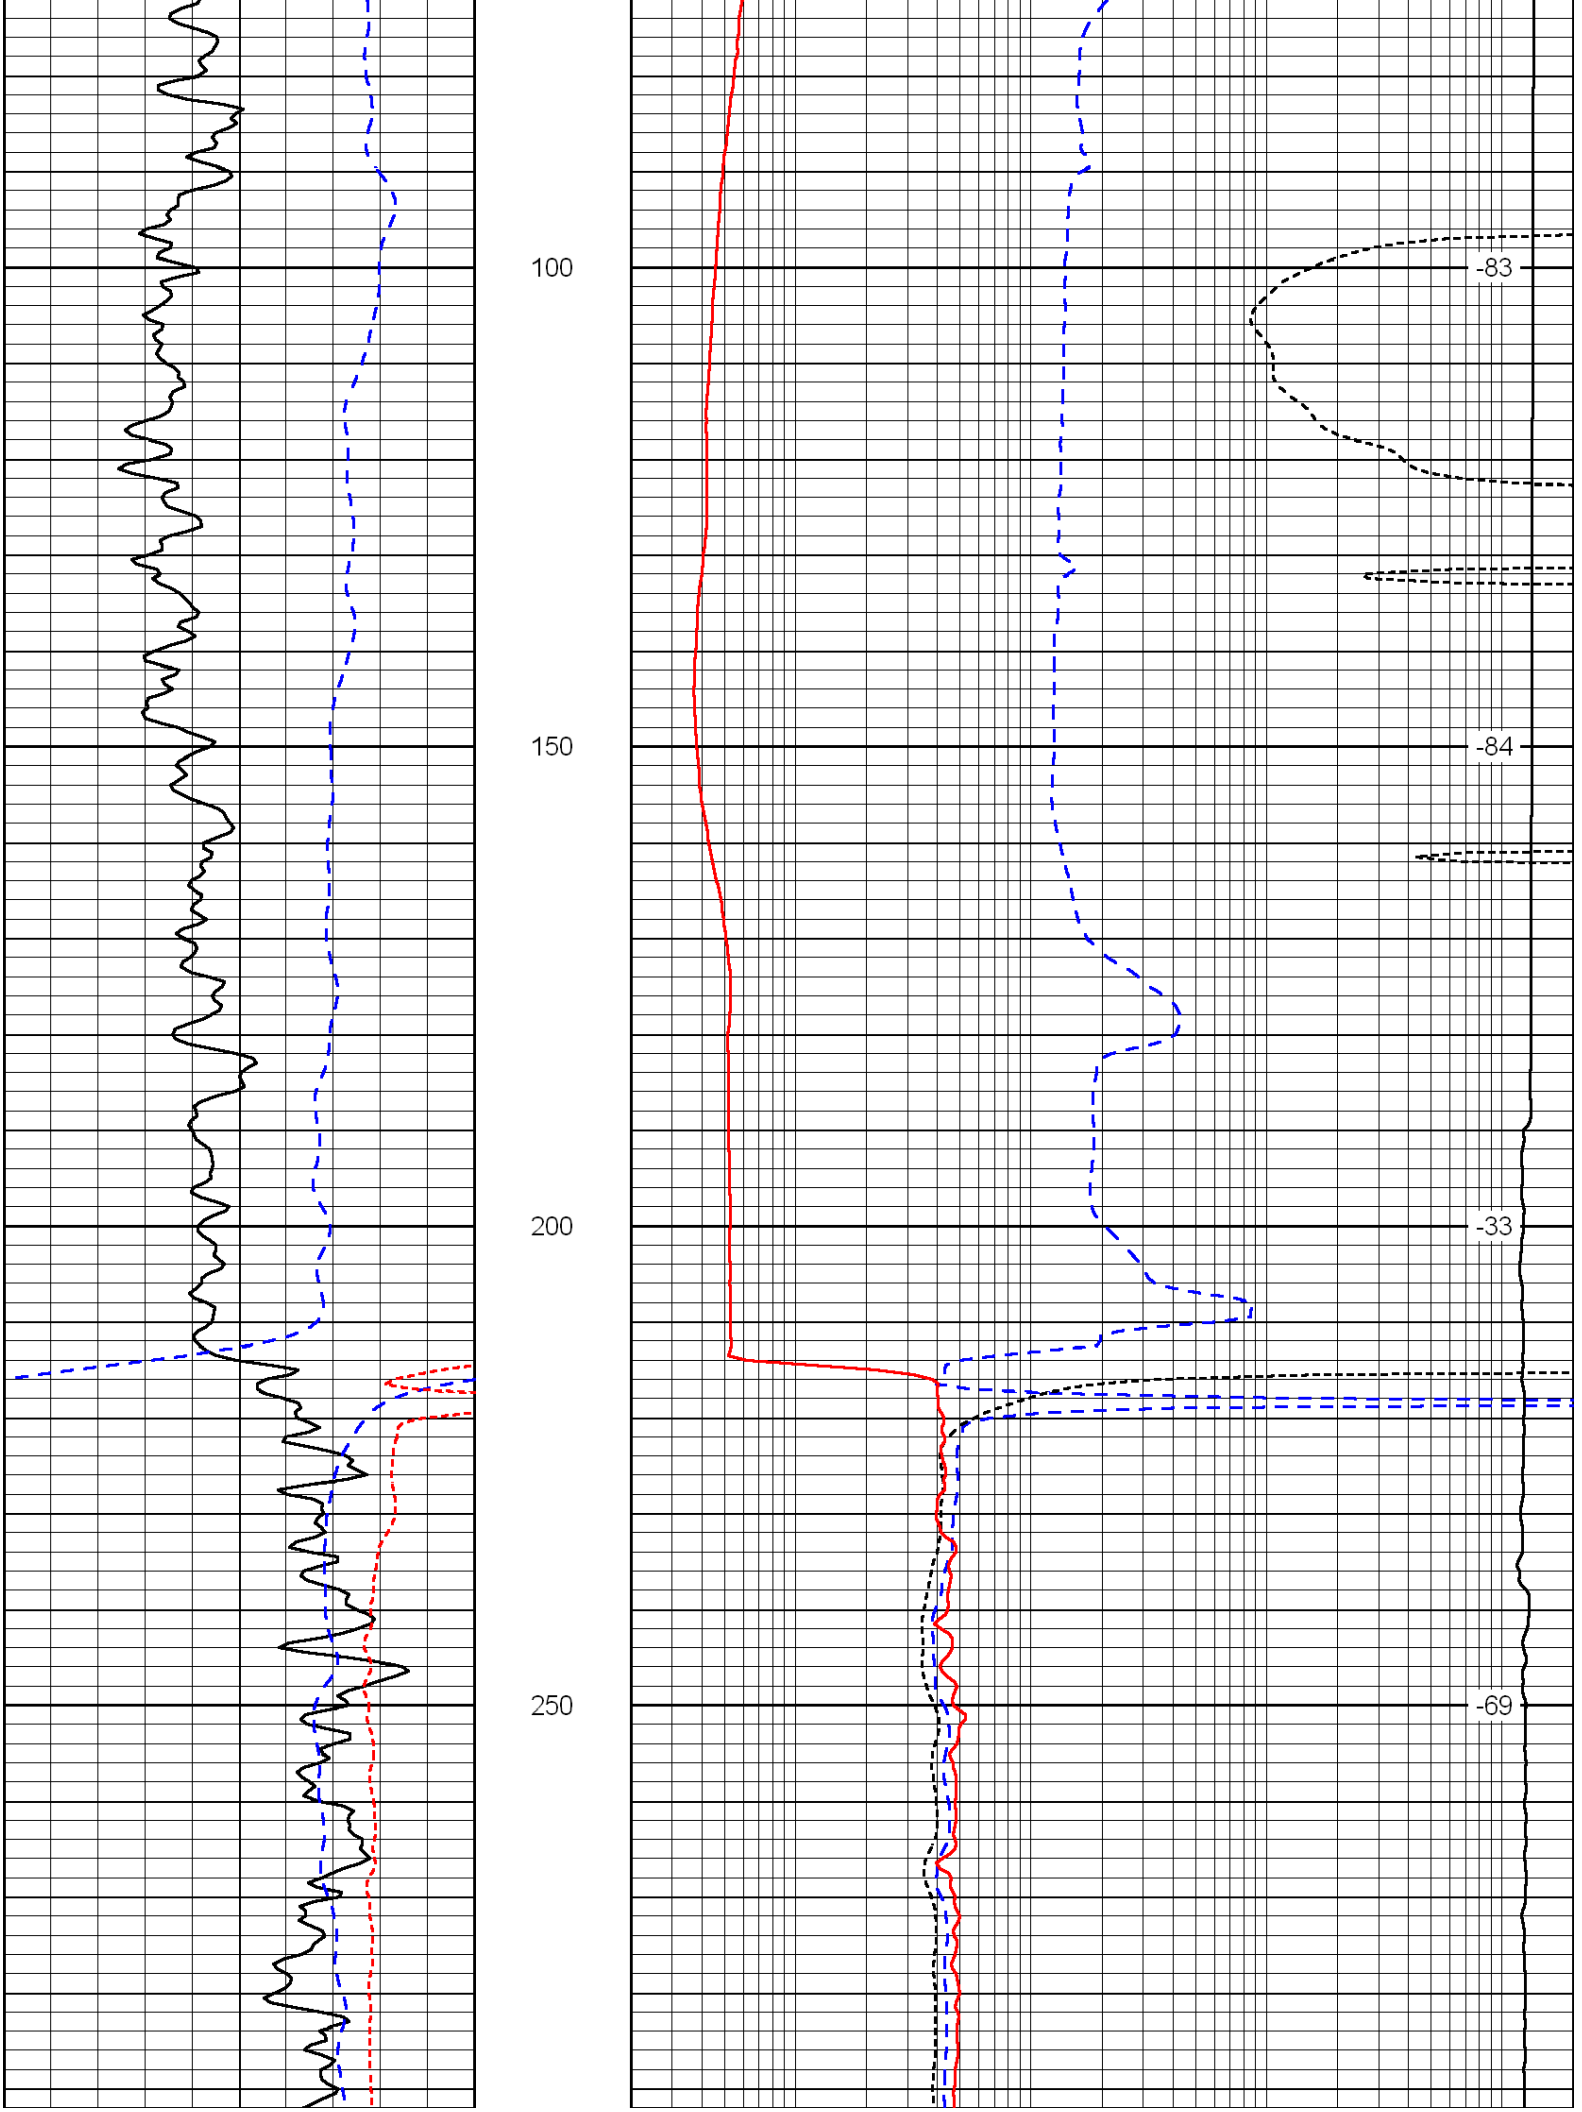

3250
3300
3350
3400
3450
3500
3550
3600
3650
3700
3750
-70
-70
-70
-68
-68
-68
-67
-27
-27
-27
-27

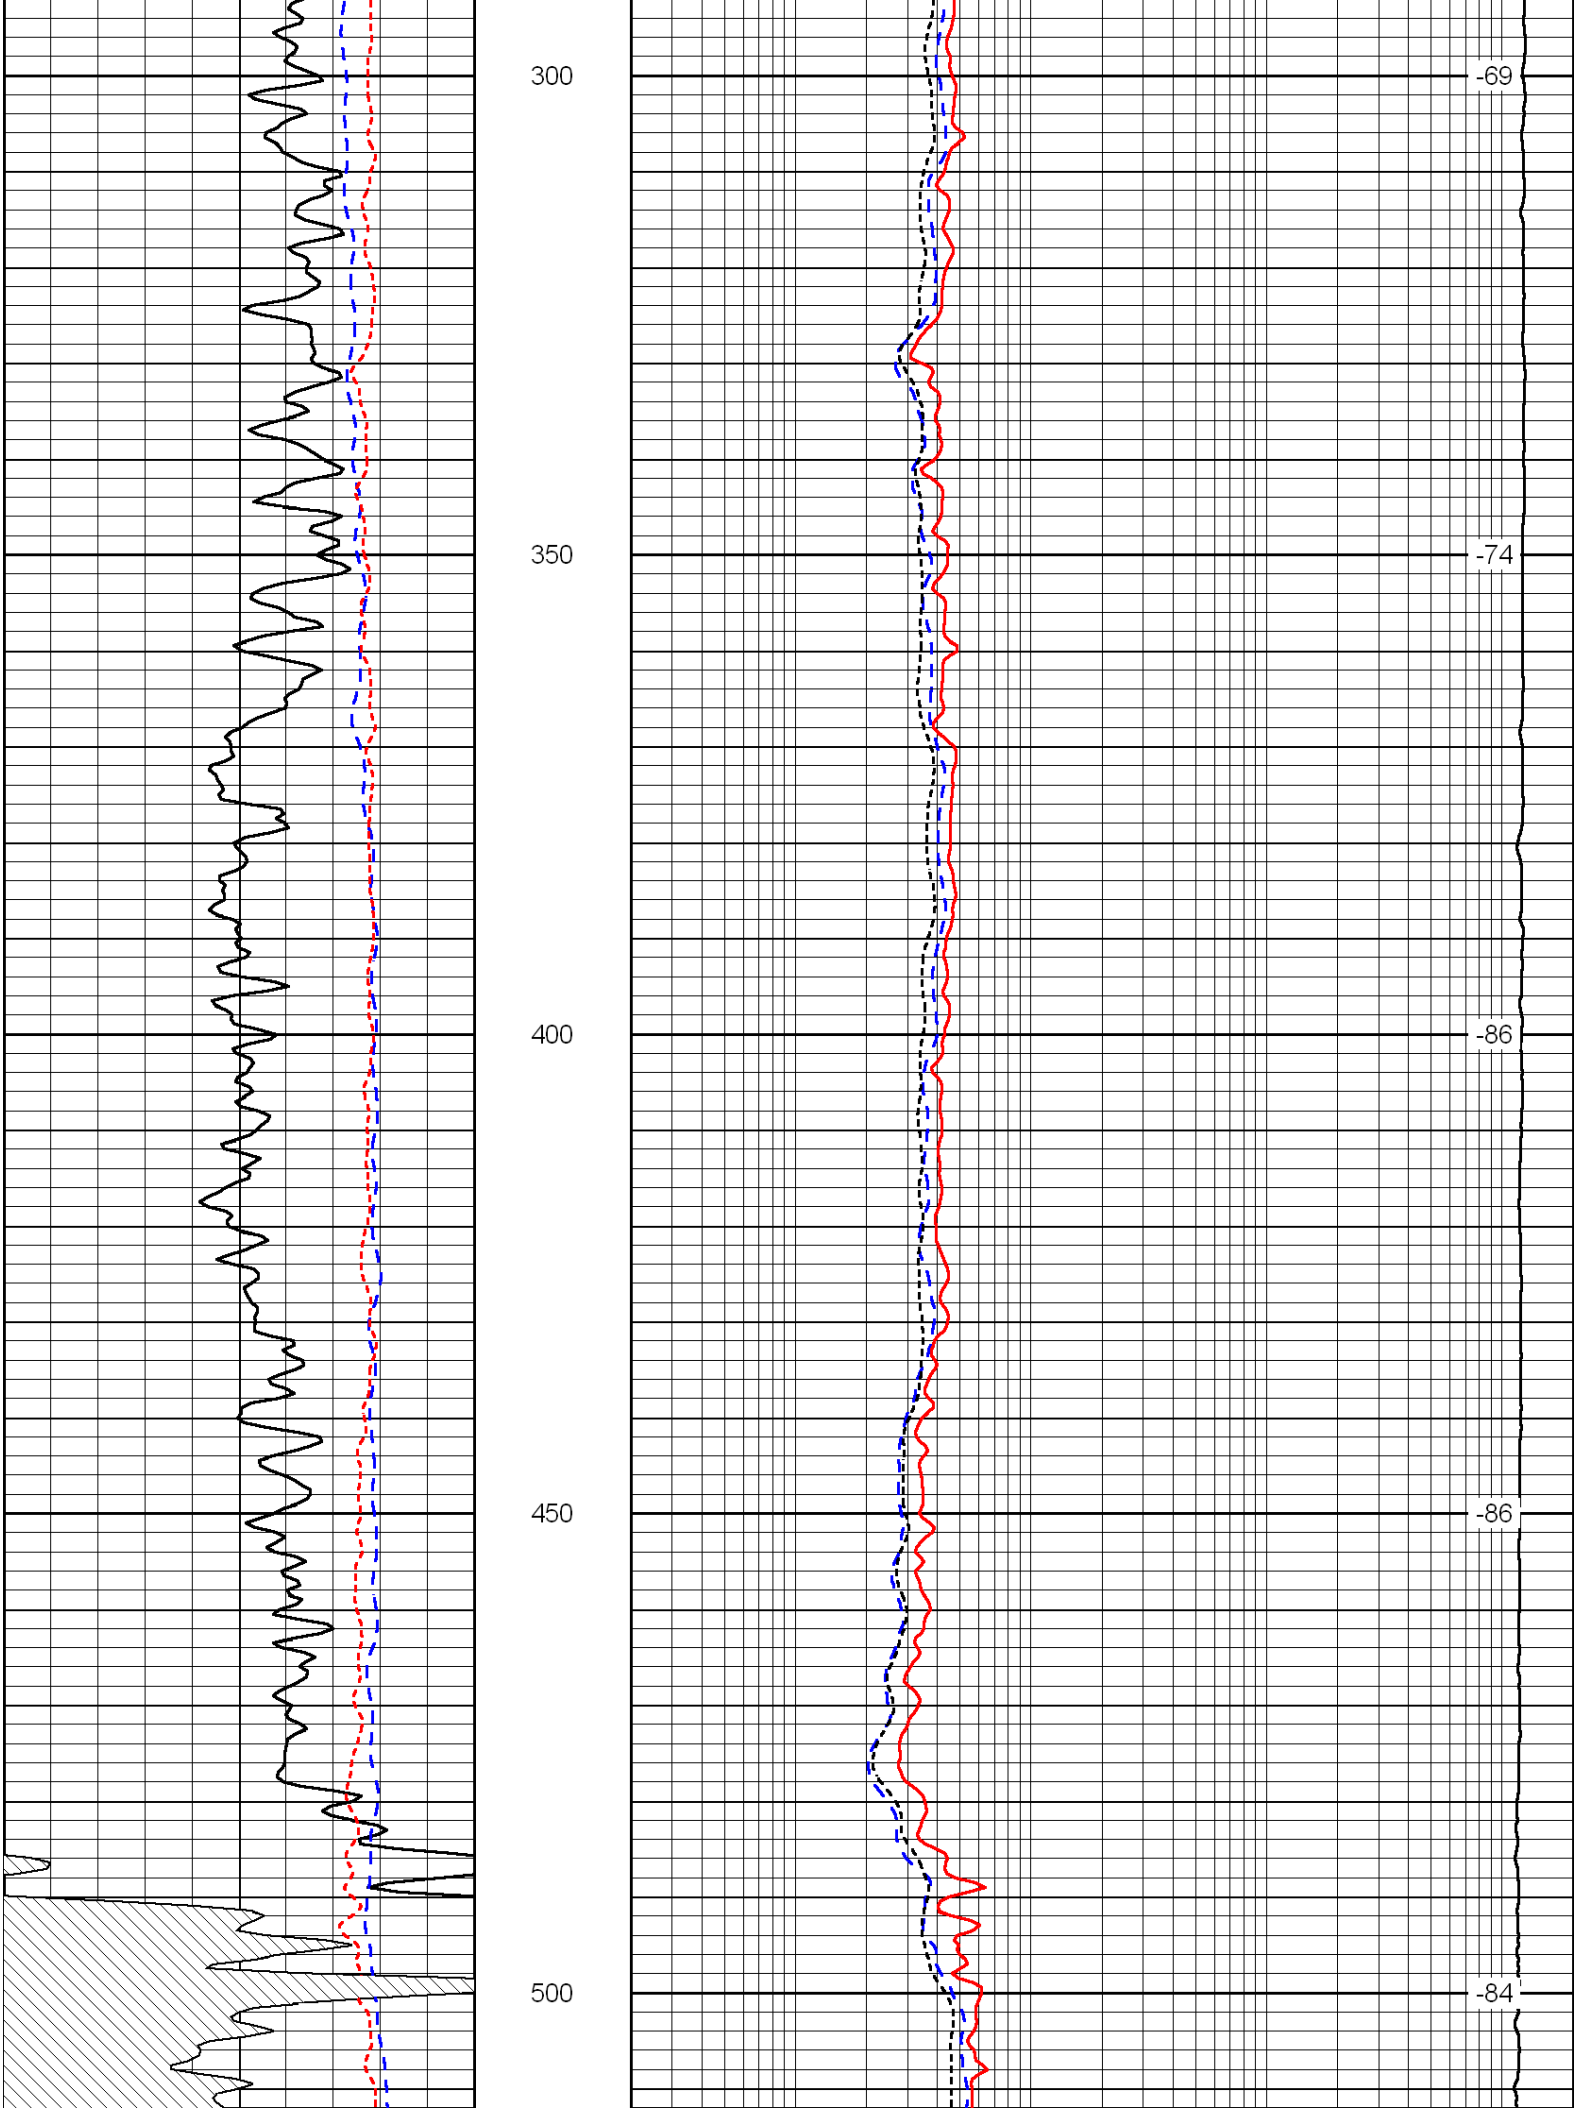

3800
3850
3900
3950
4000
4050
4100
4150
4200
4250
4300
-27
-27
-26
-26
-26
-26
-26
-26
-26
-26

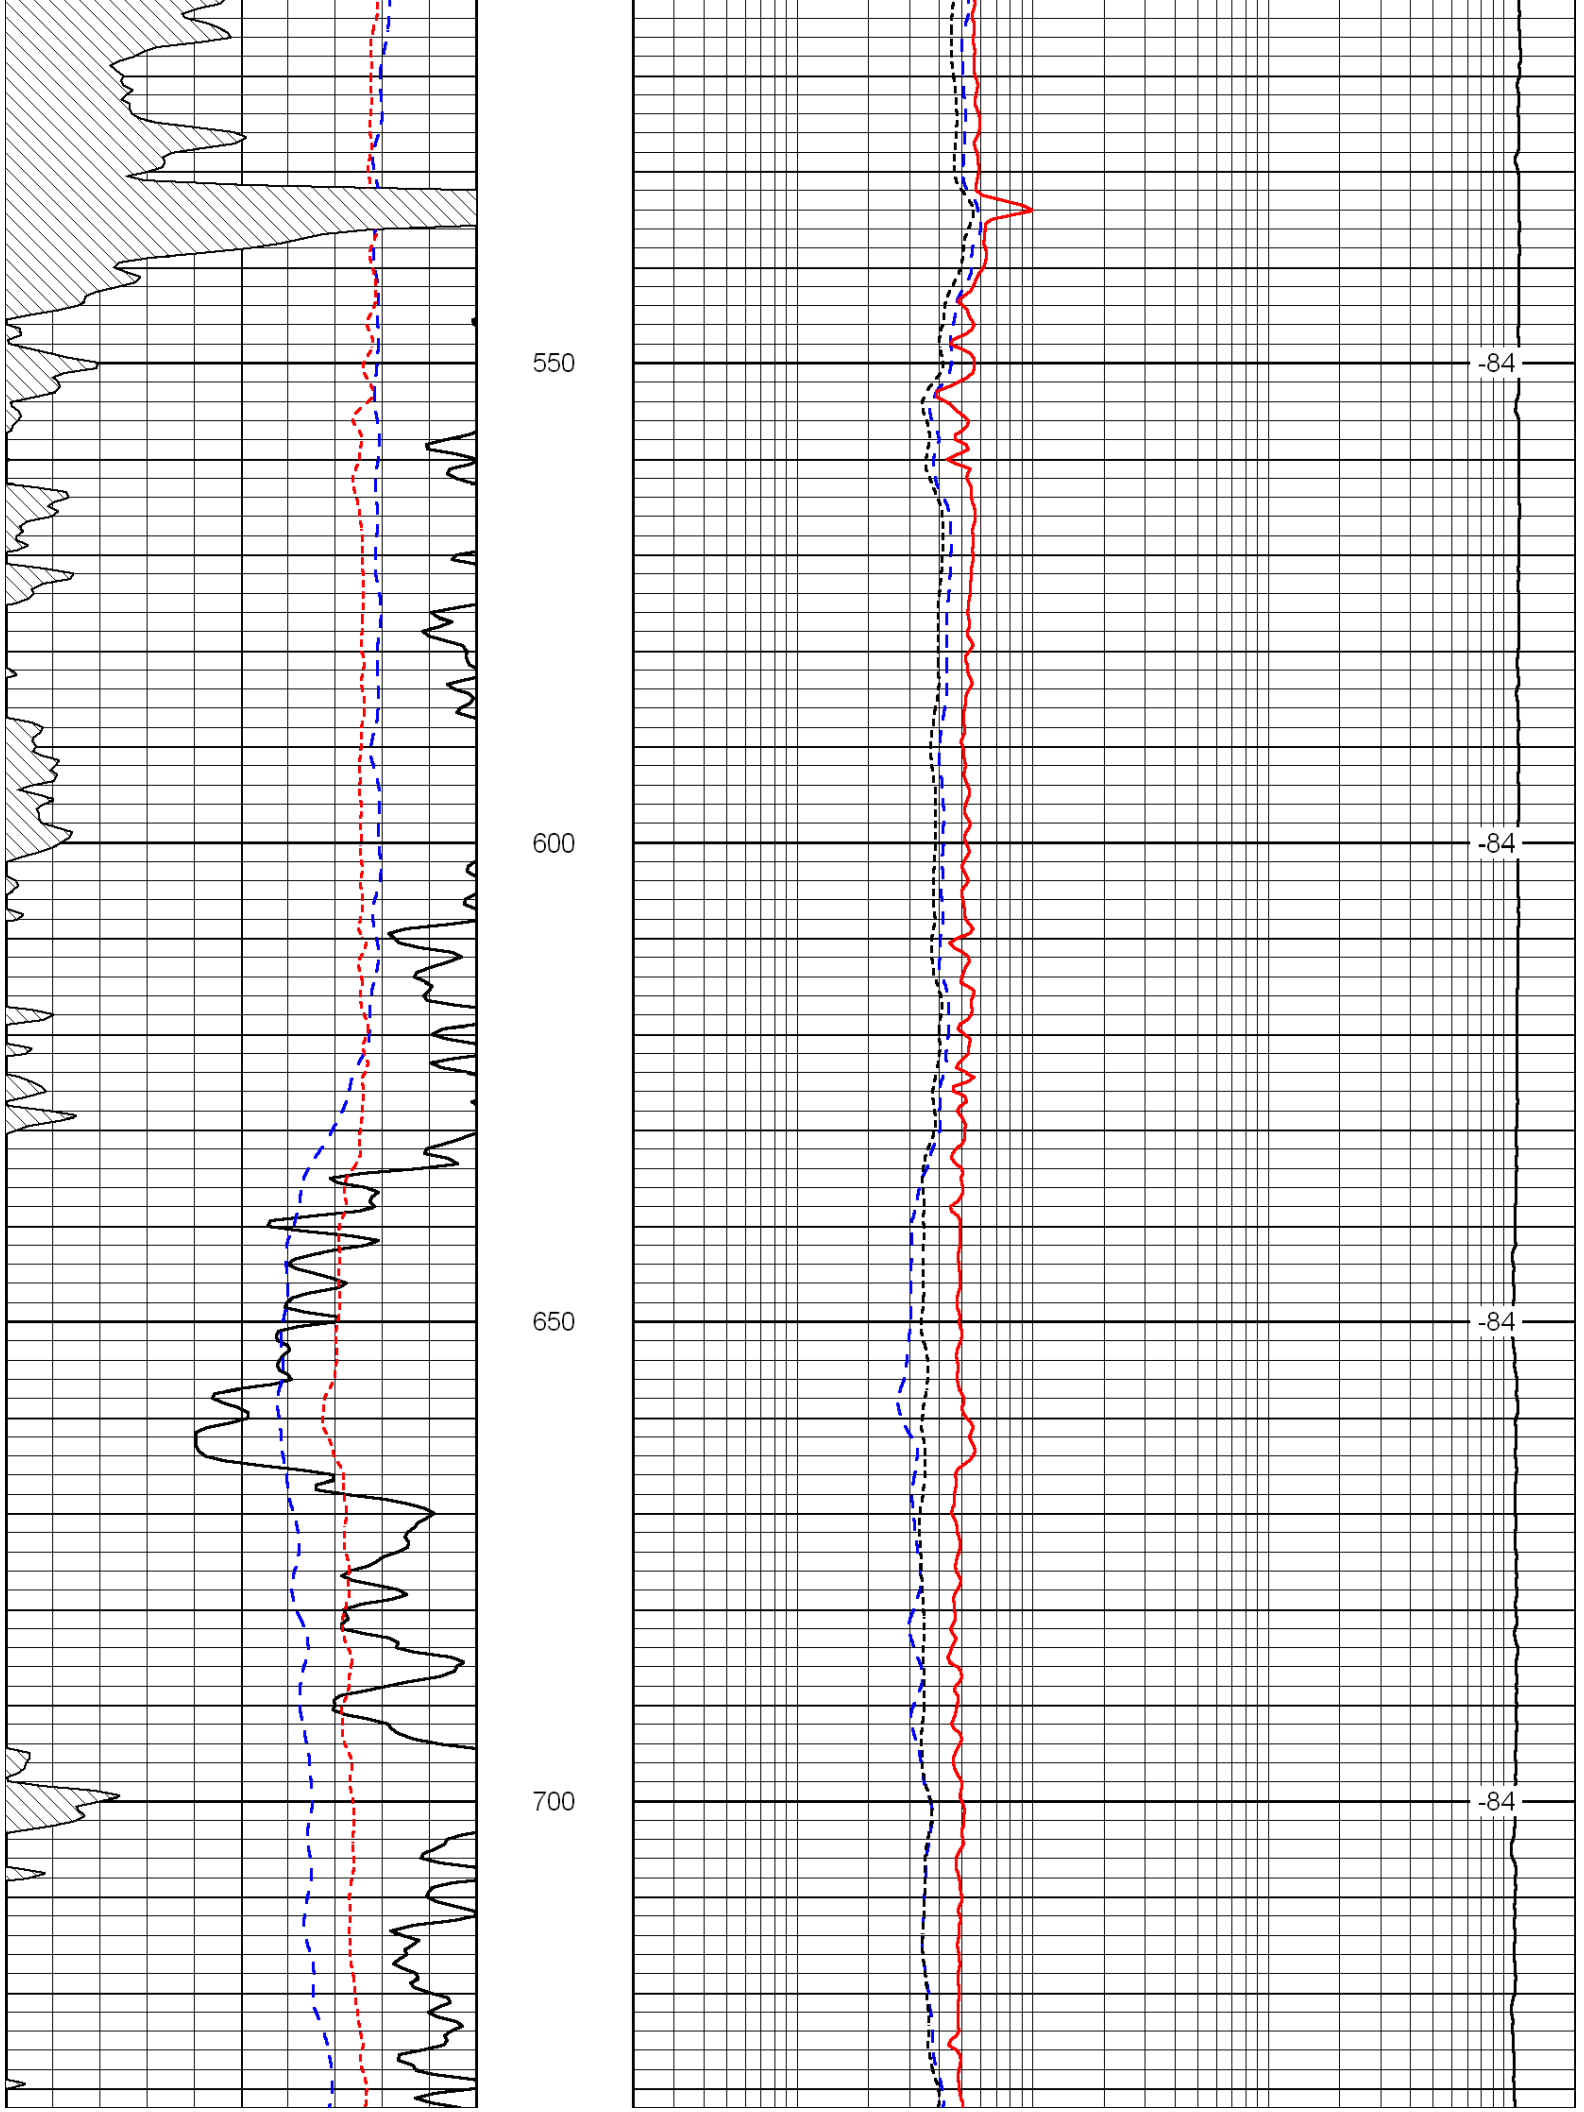


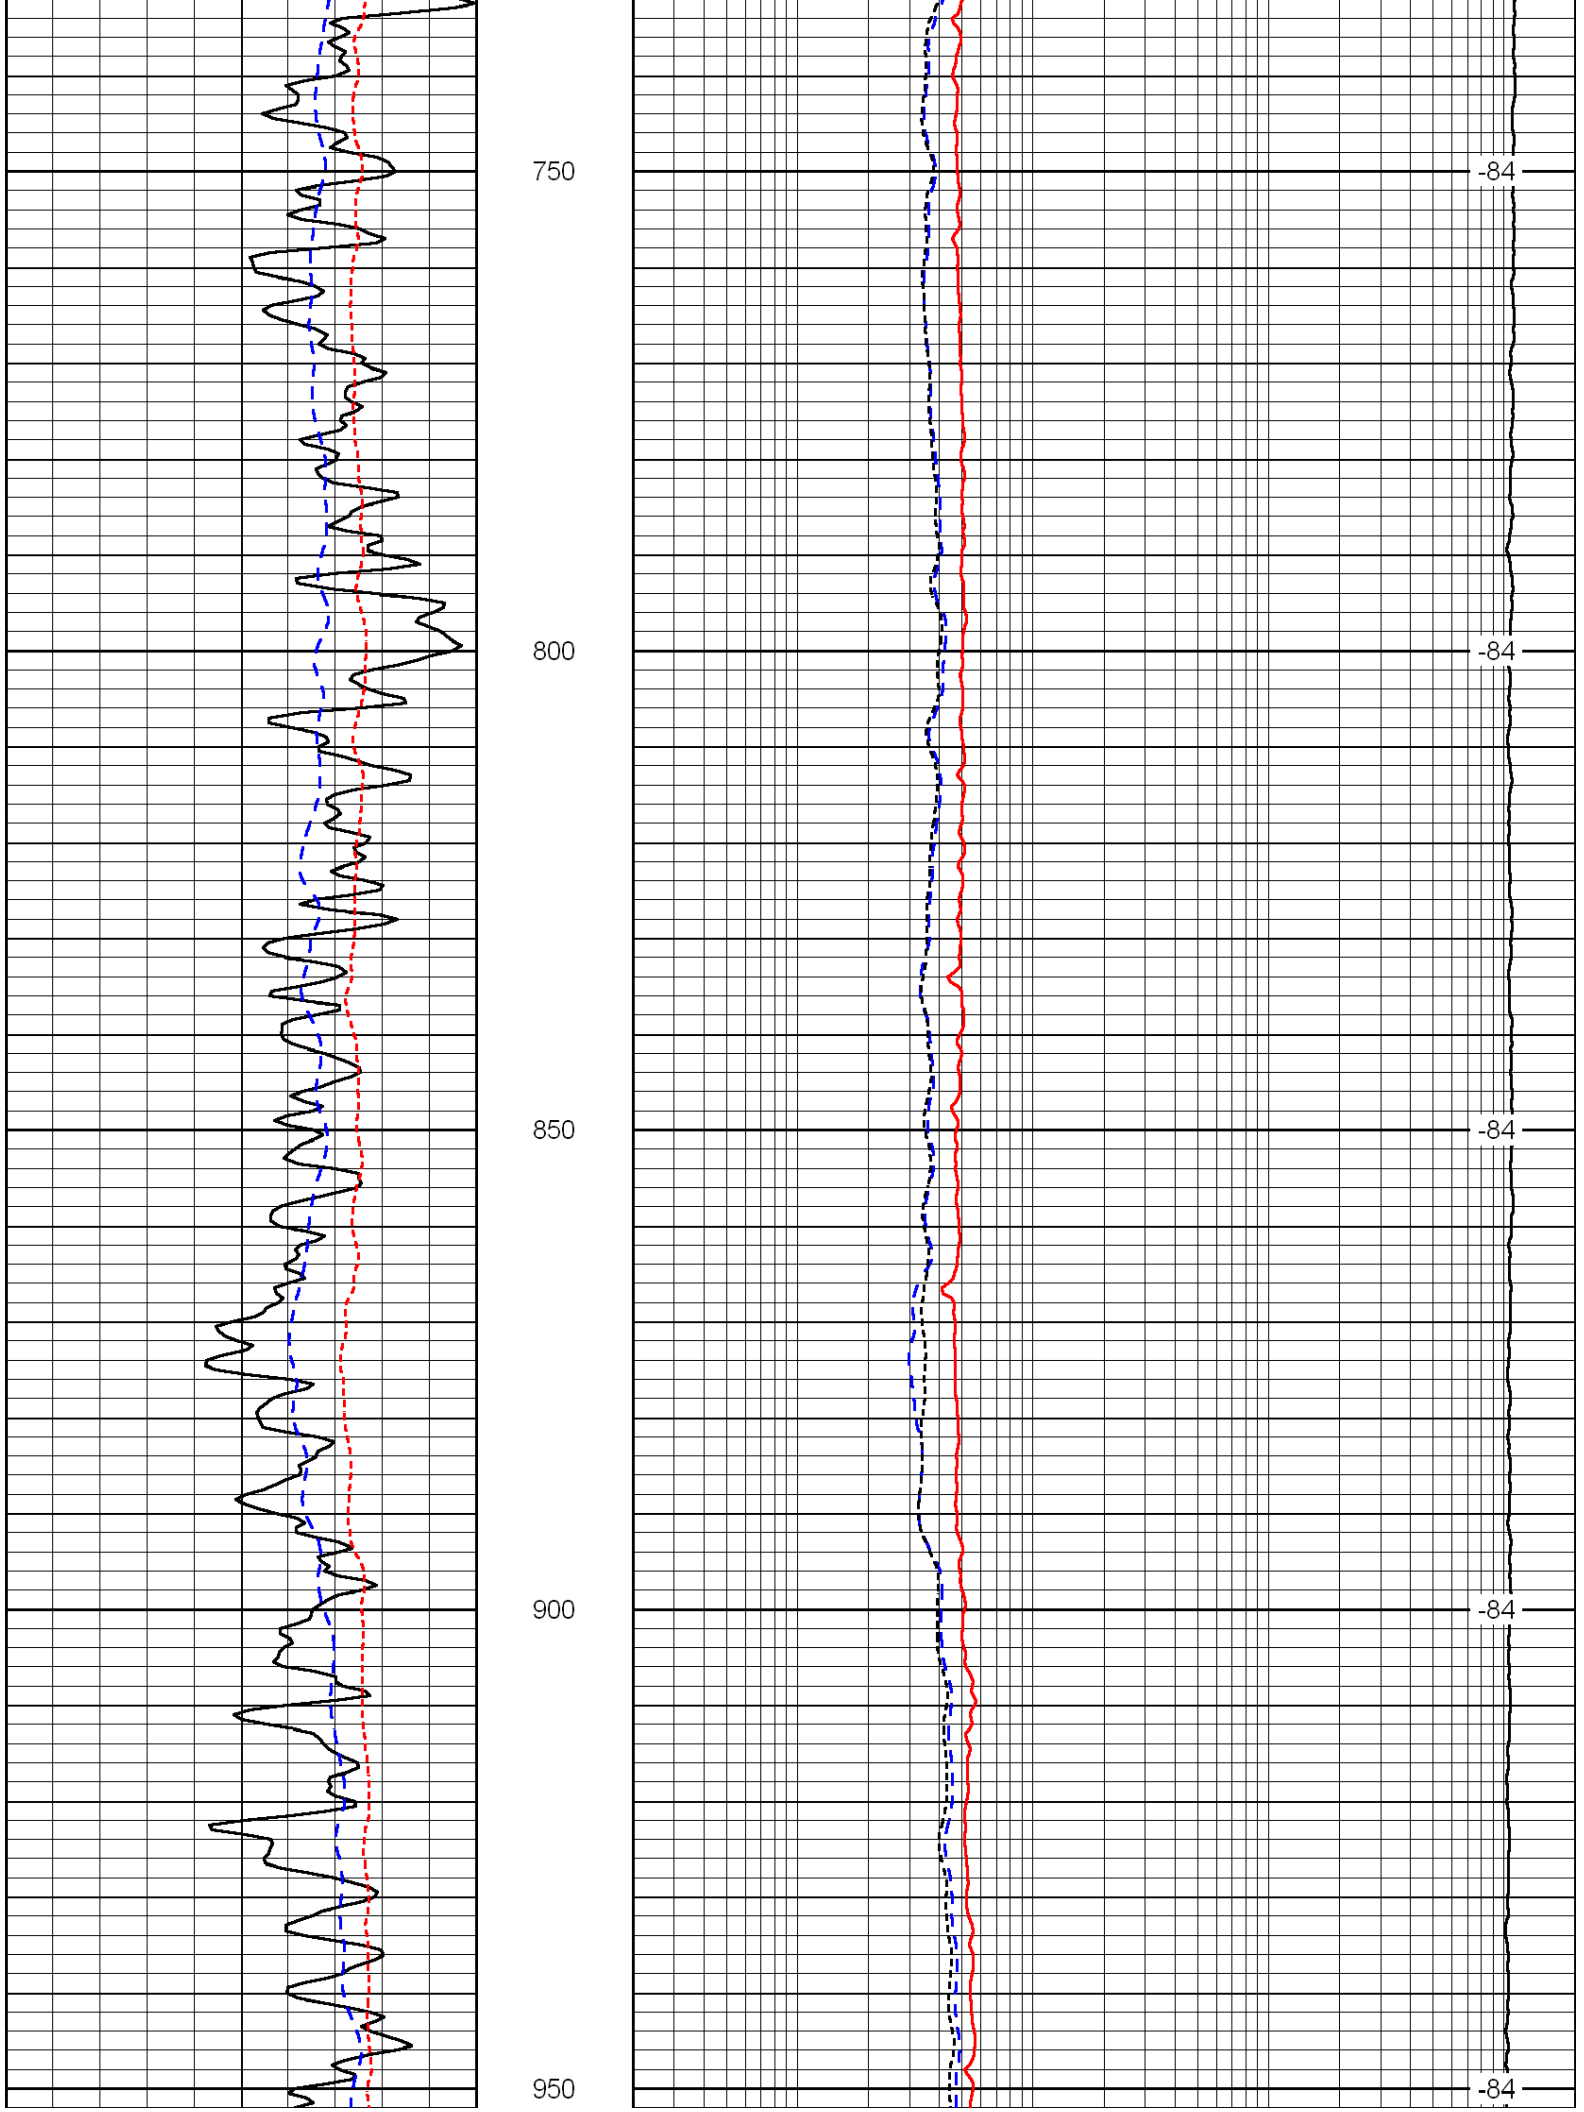
Database File: c:\warrior\data\murfin_sherilyn no. 1-14\murfhd.db
Dataset Pathname: dil/murfstck
Presentation Format: dil
Dataset Creation: Sun May 30 23:19:35 2010
Charted by: Depth in Feet scaled 1:240

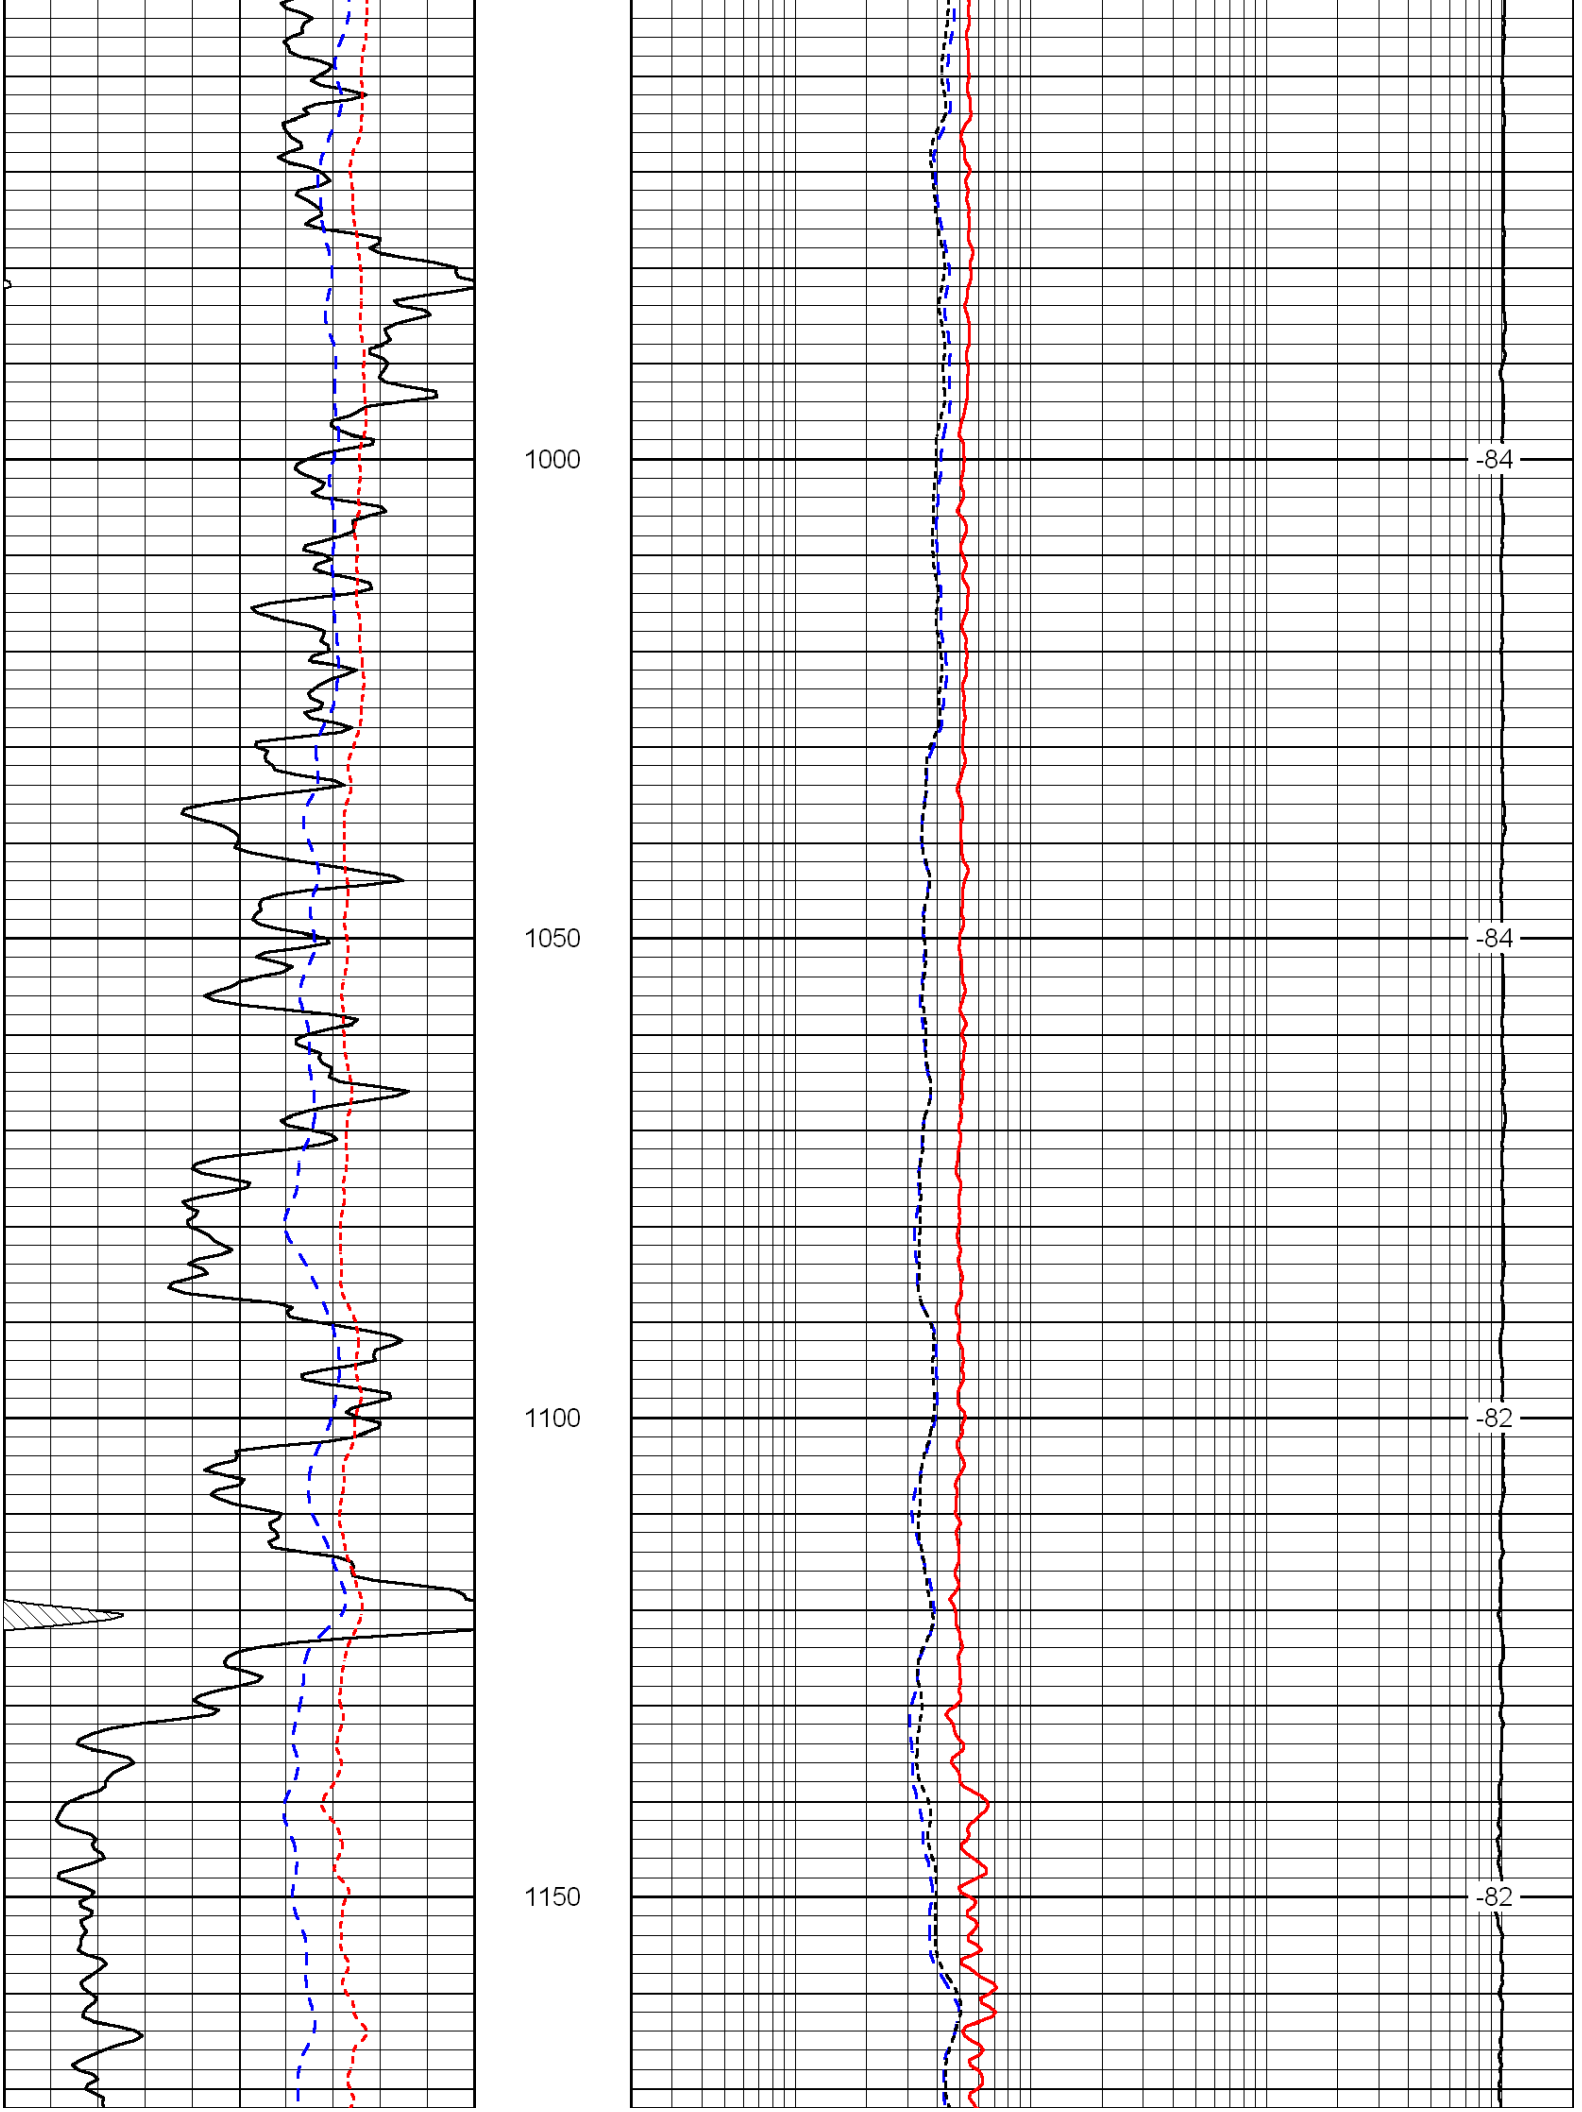


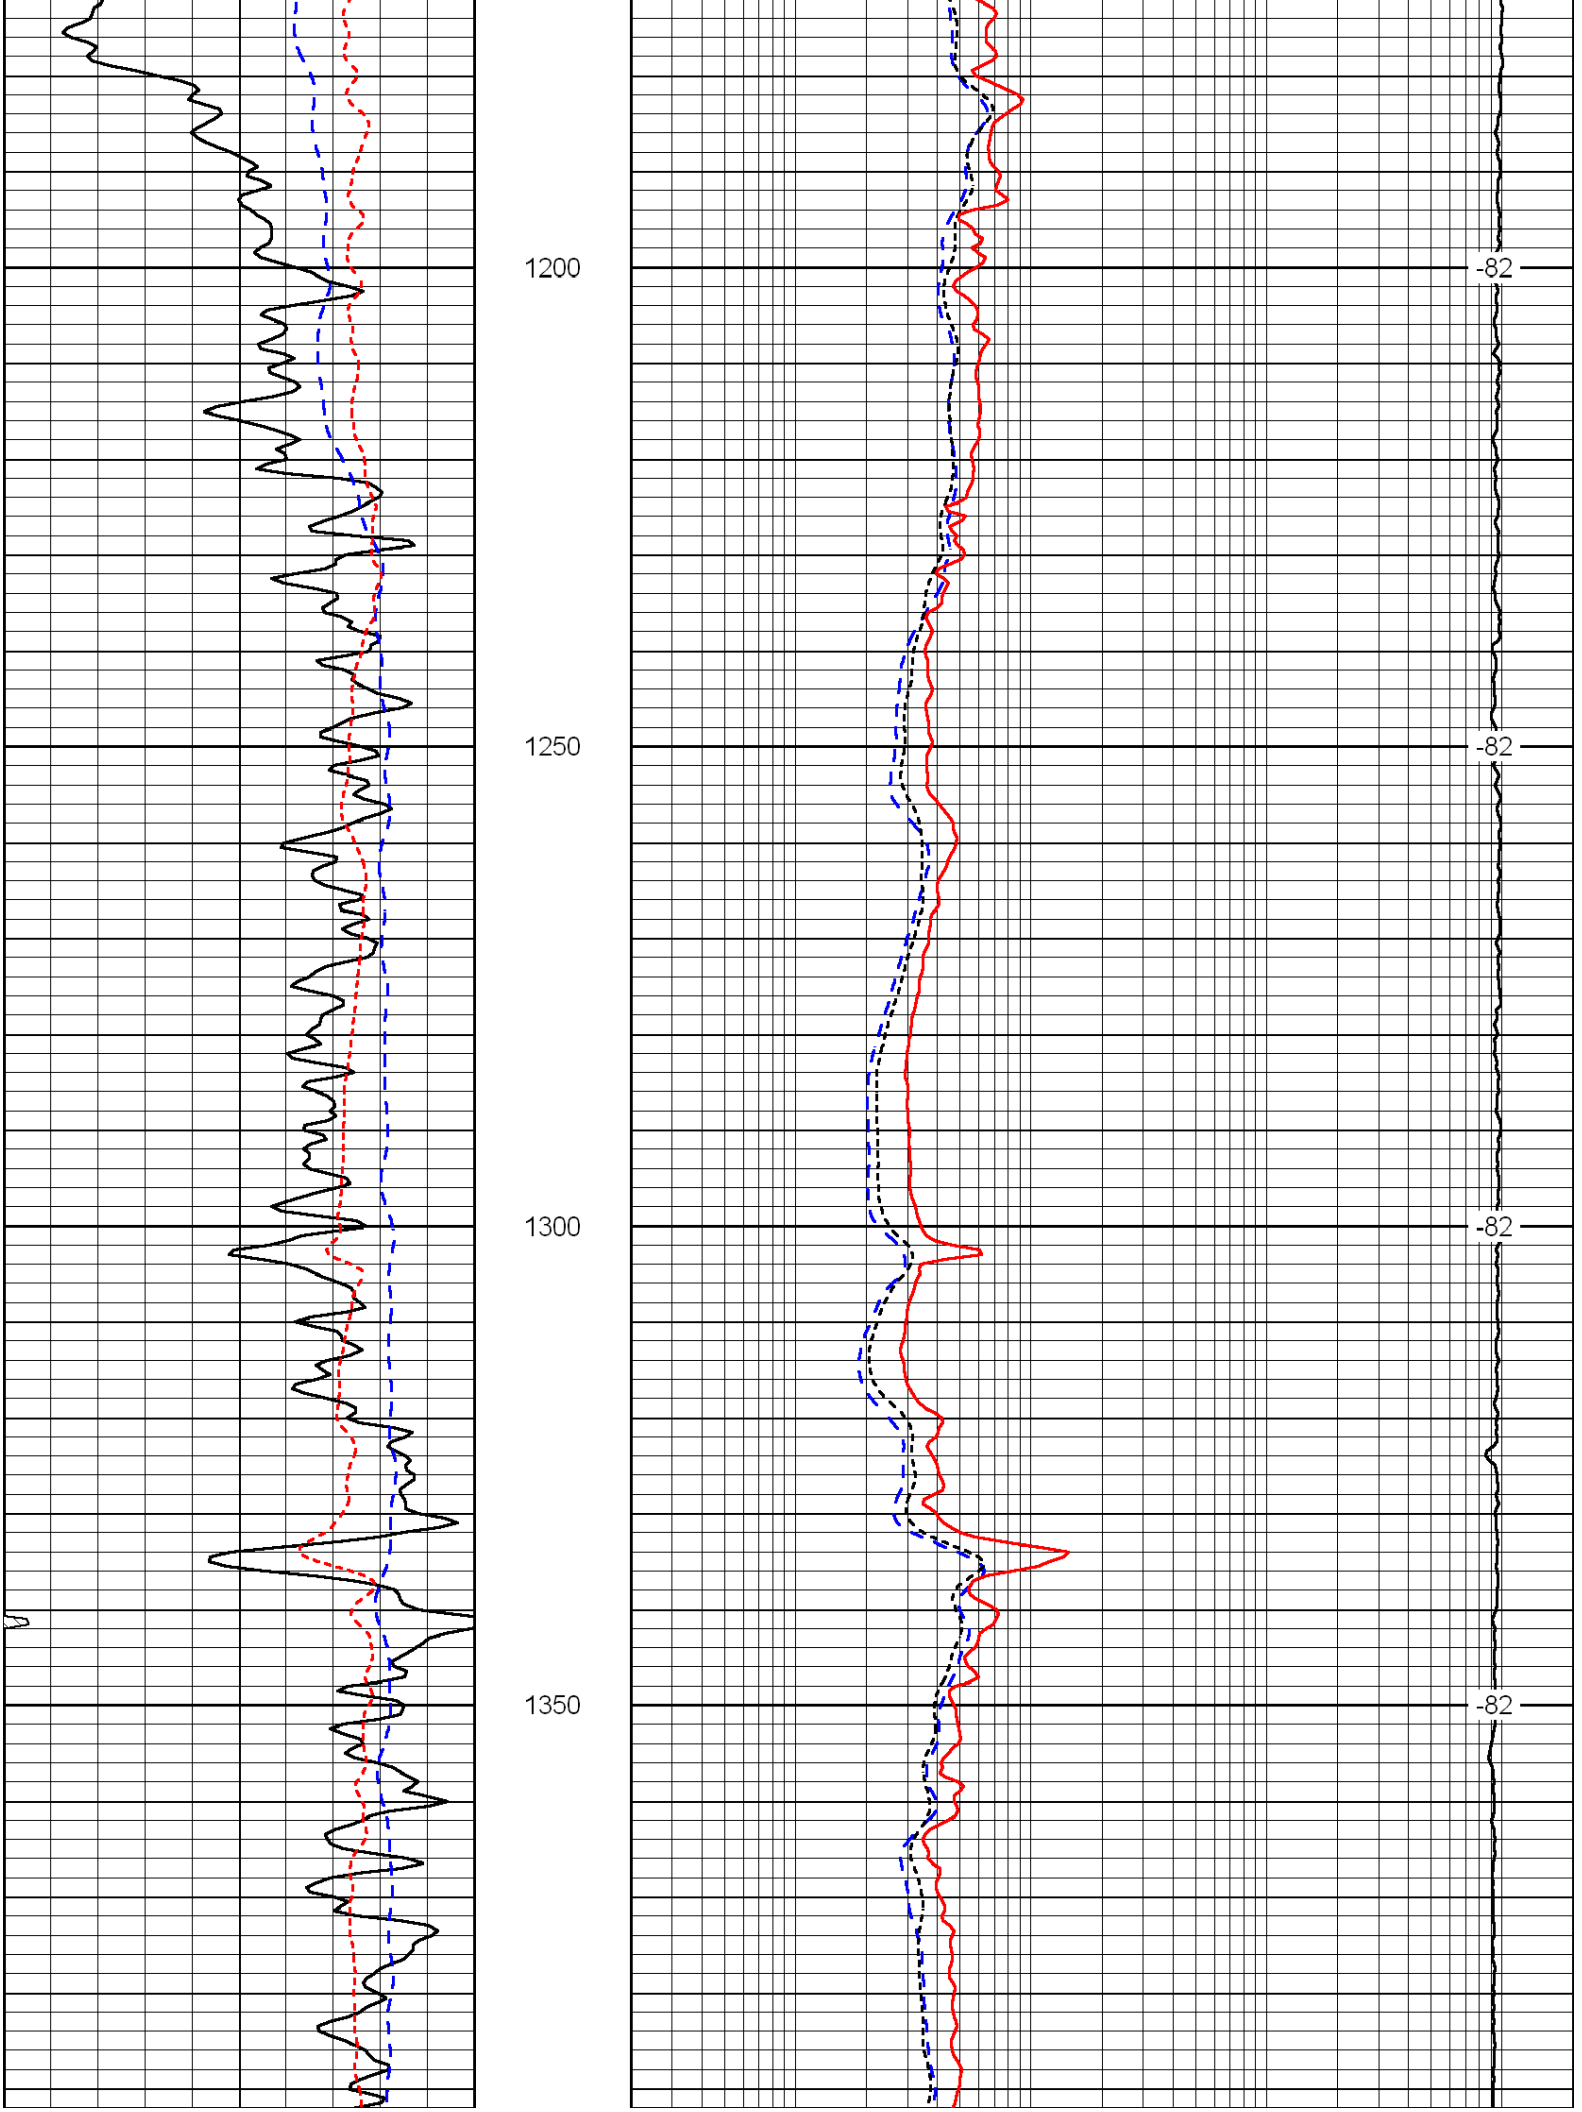

100
150
200
250
-83
-84
-33
-69

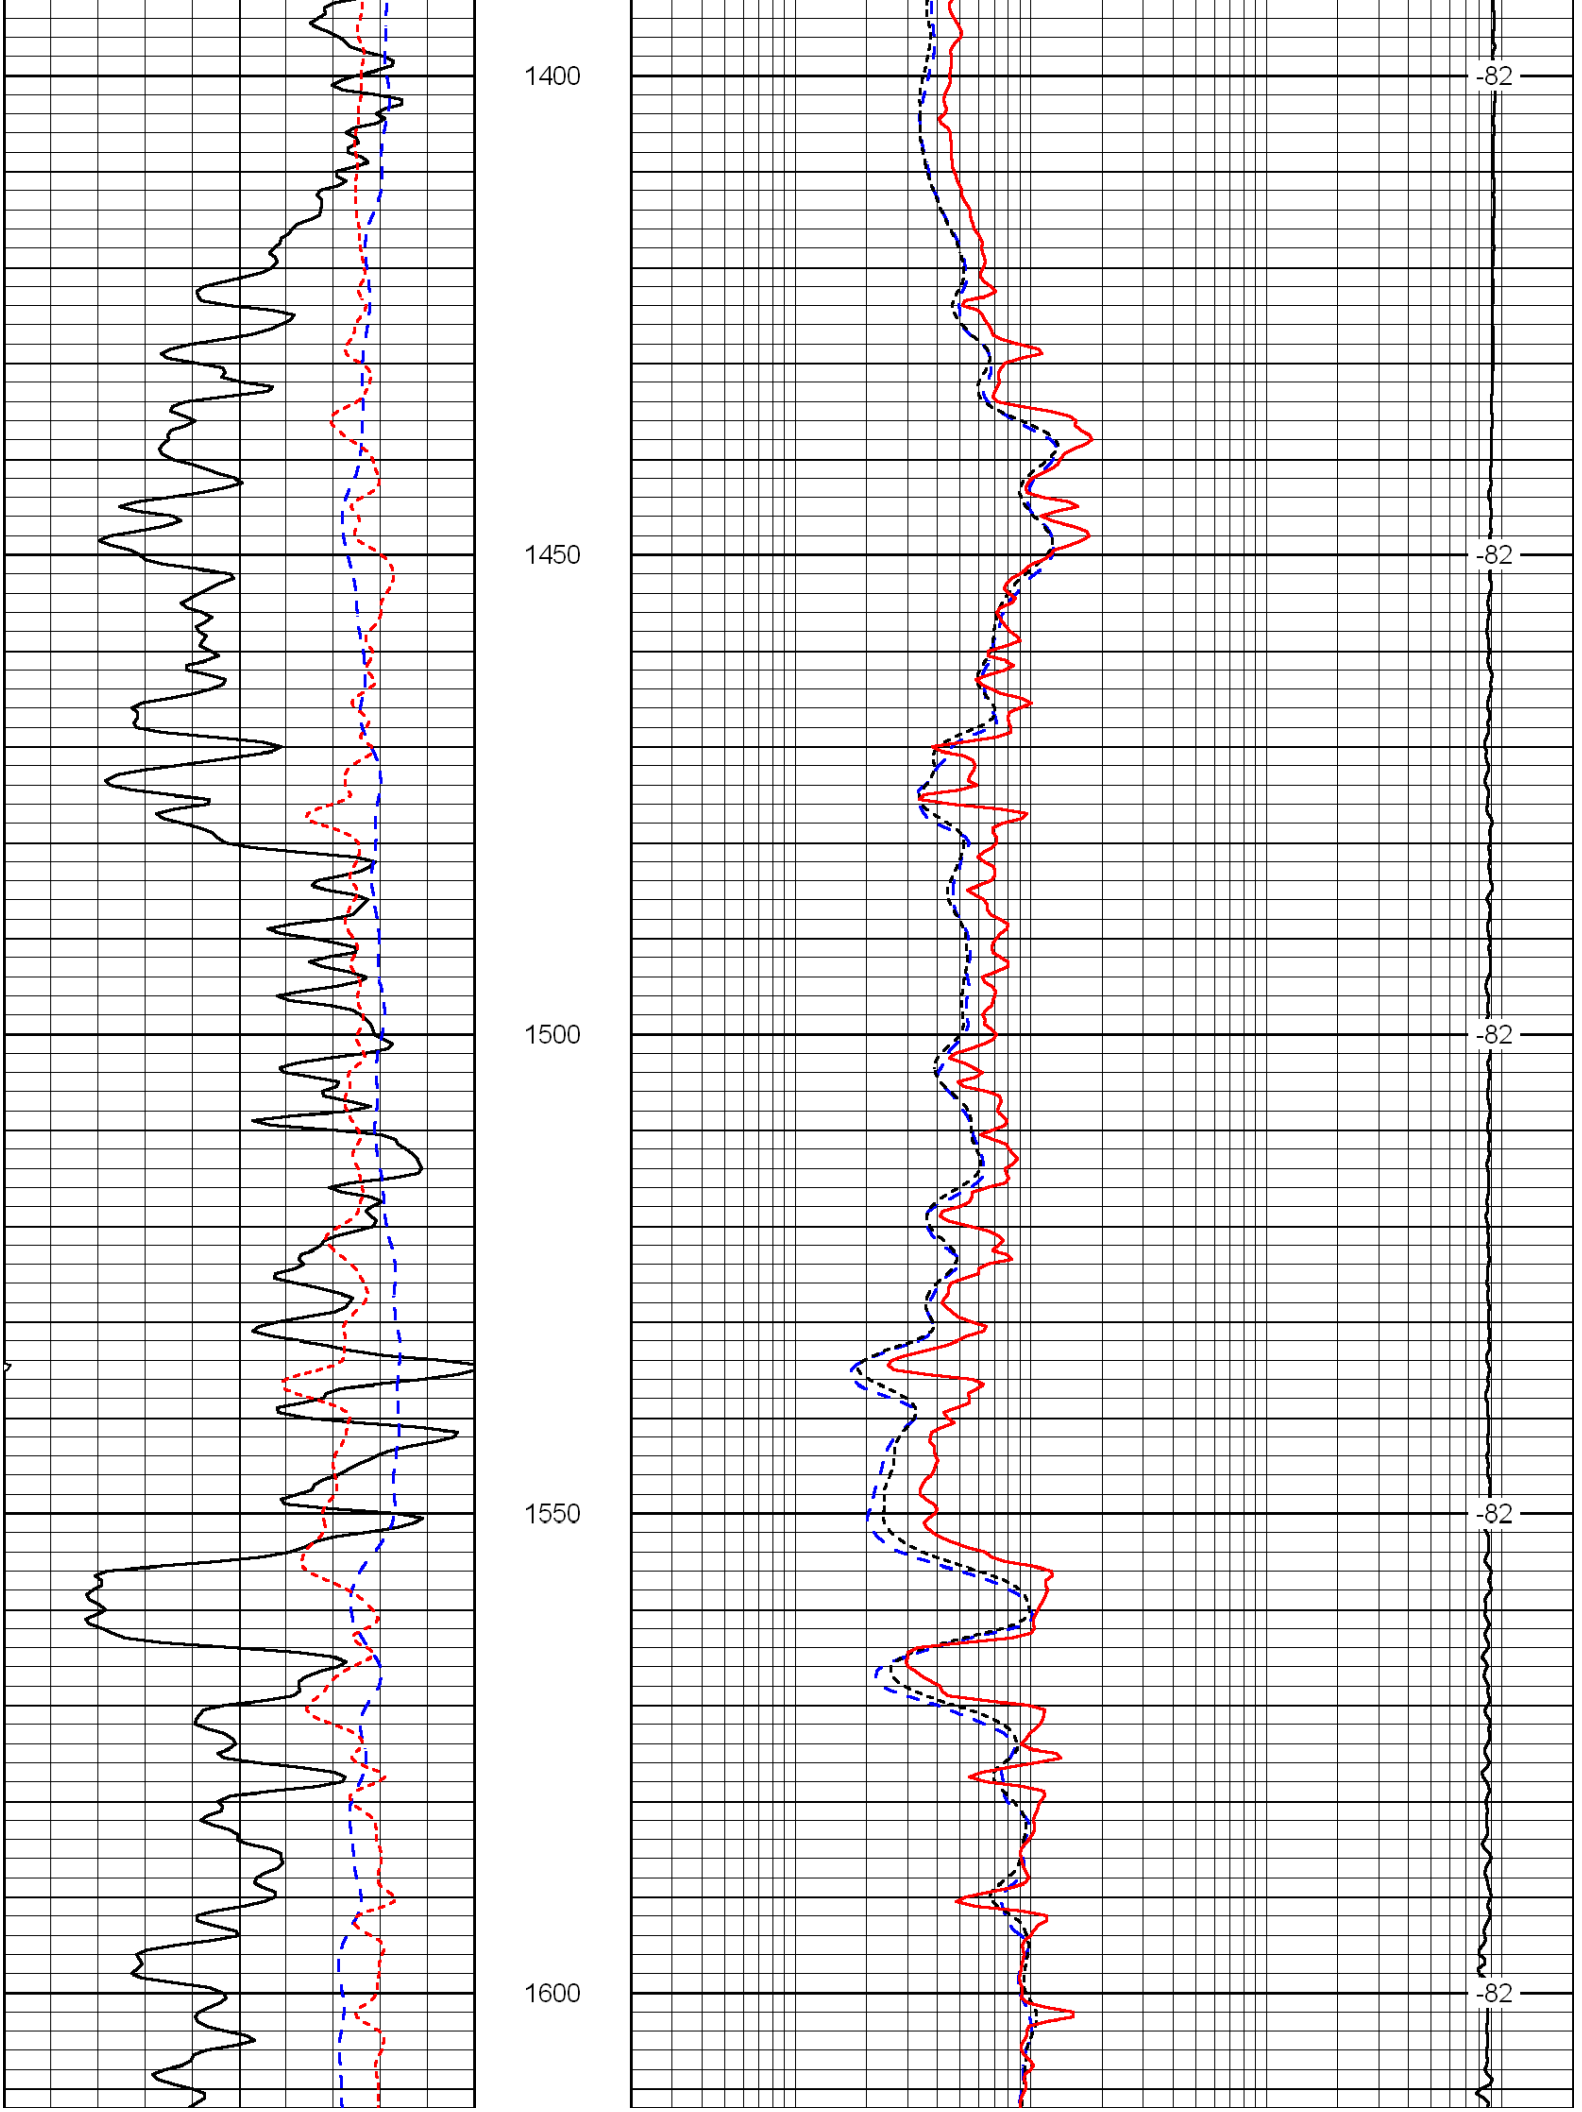

300
350
400
450
500
-69
-74
-86
-86
-84

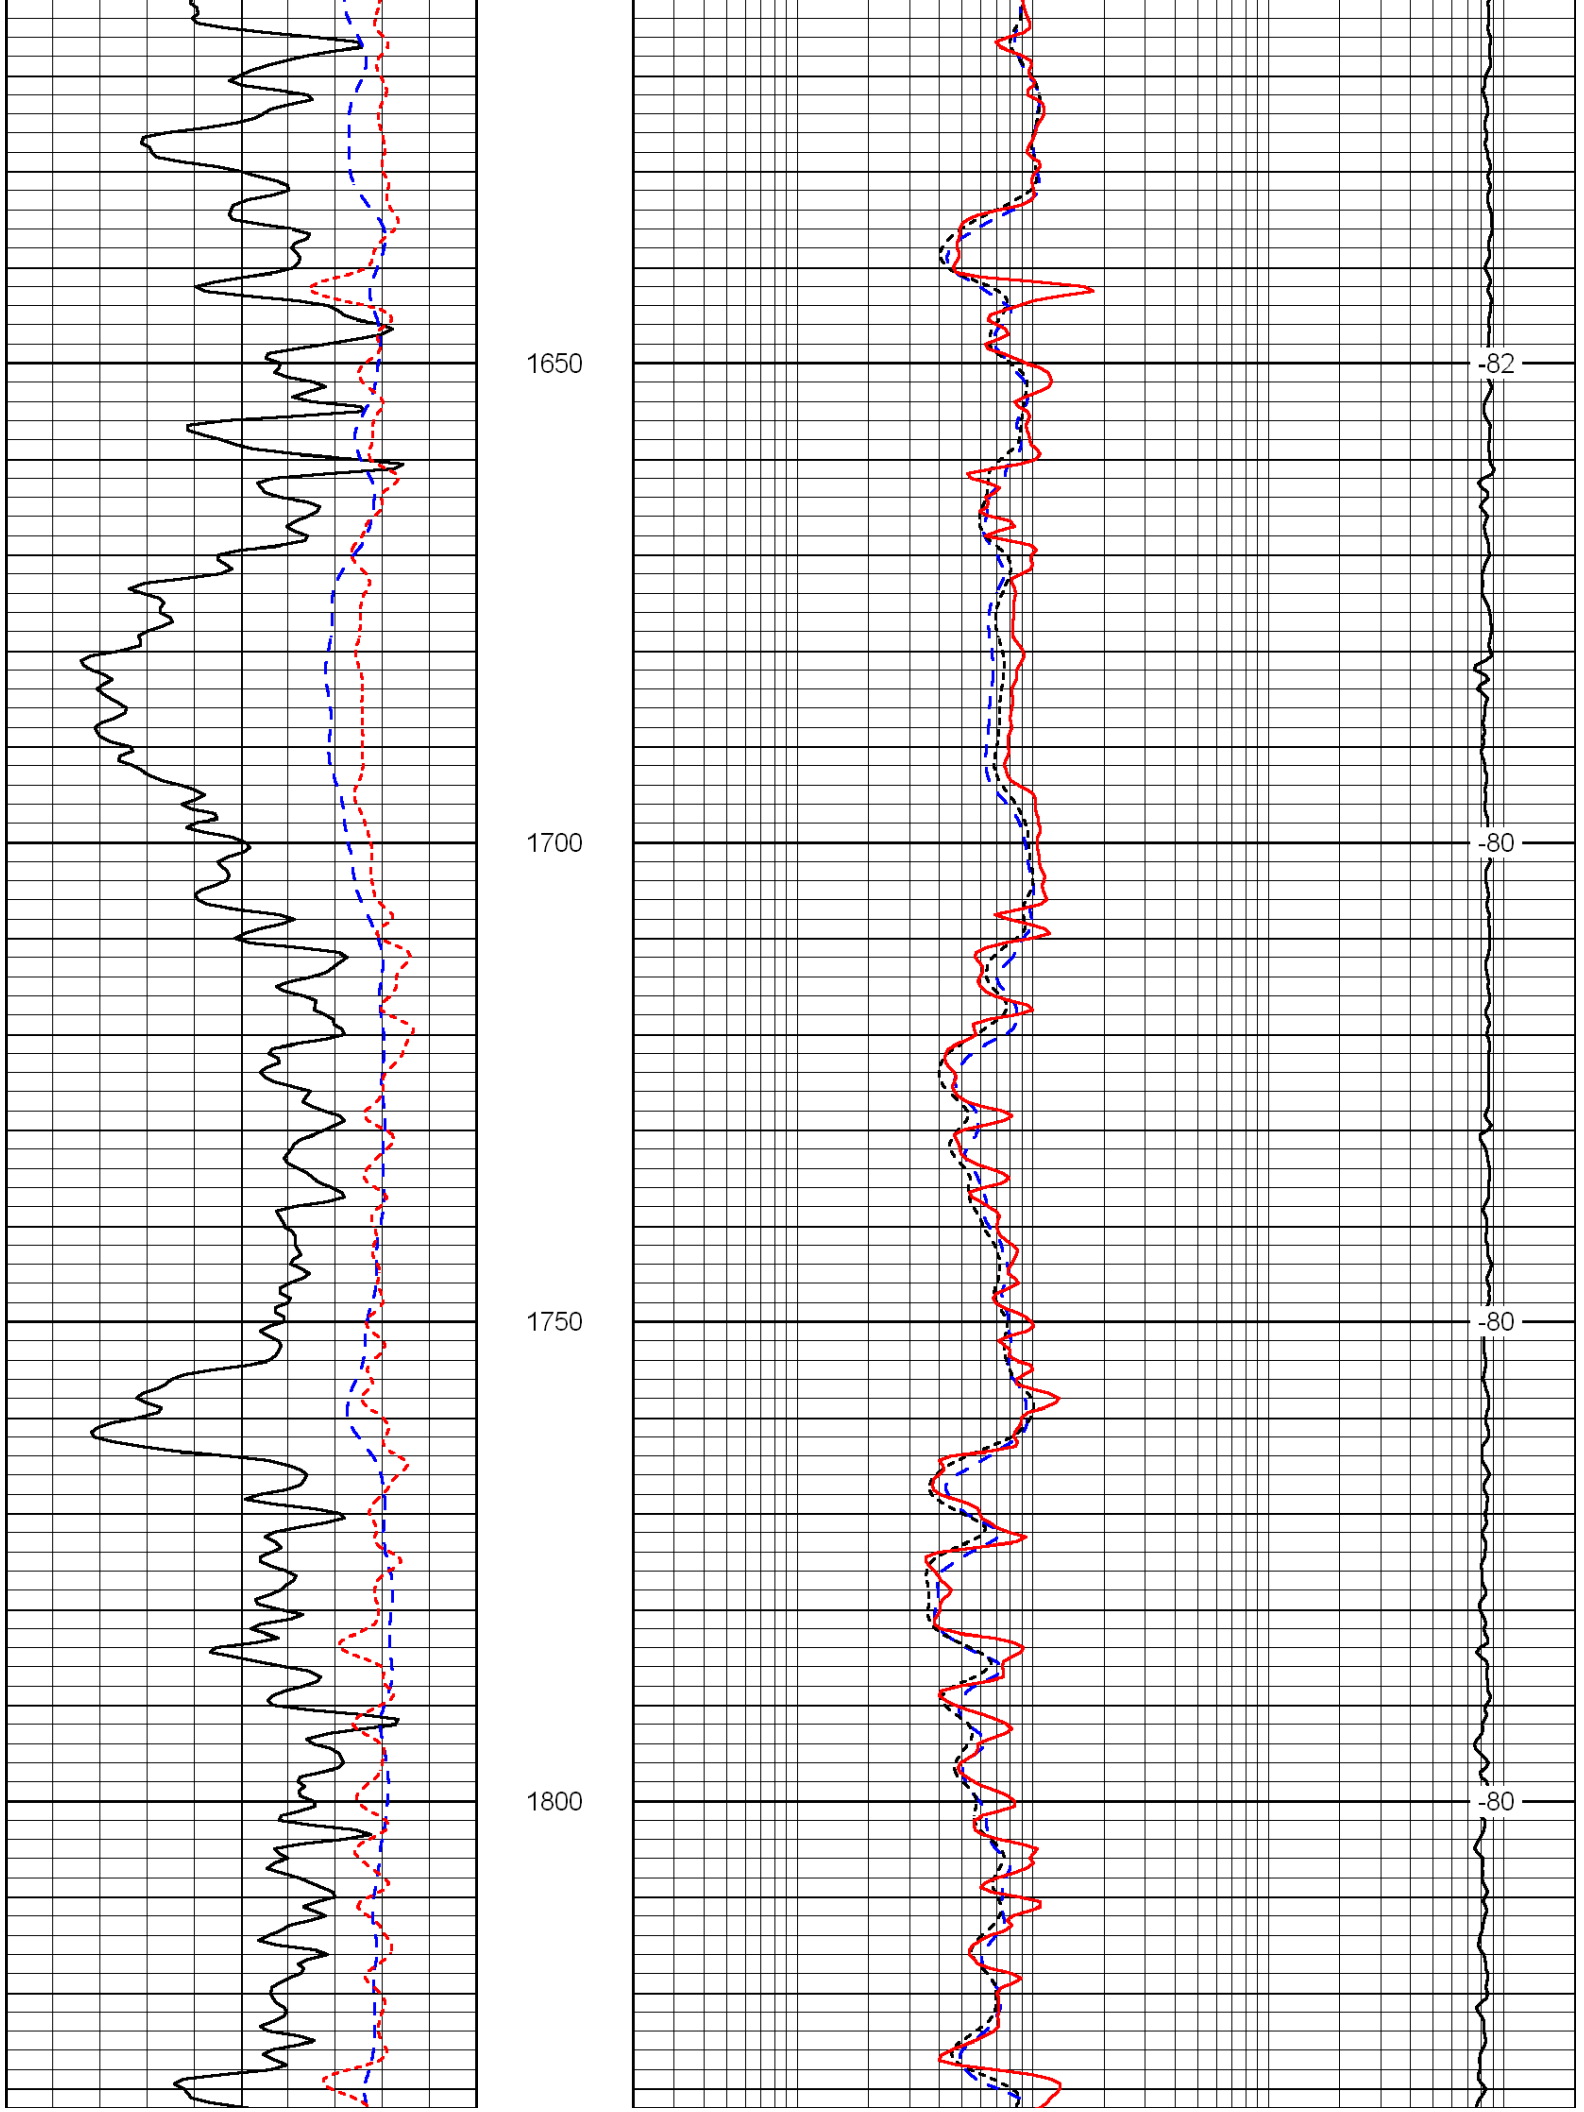

550
600
650
700
-84
-84
-84
-84

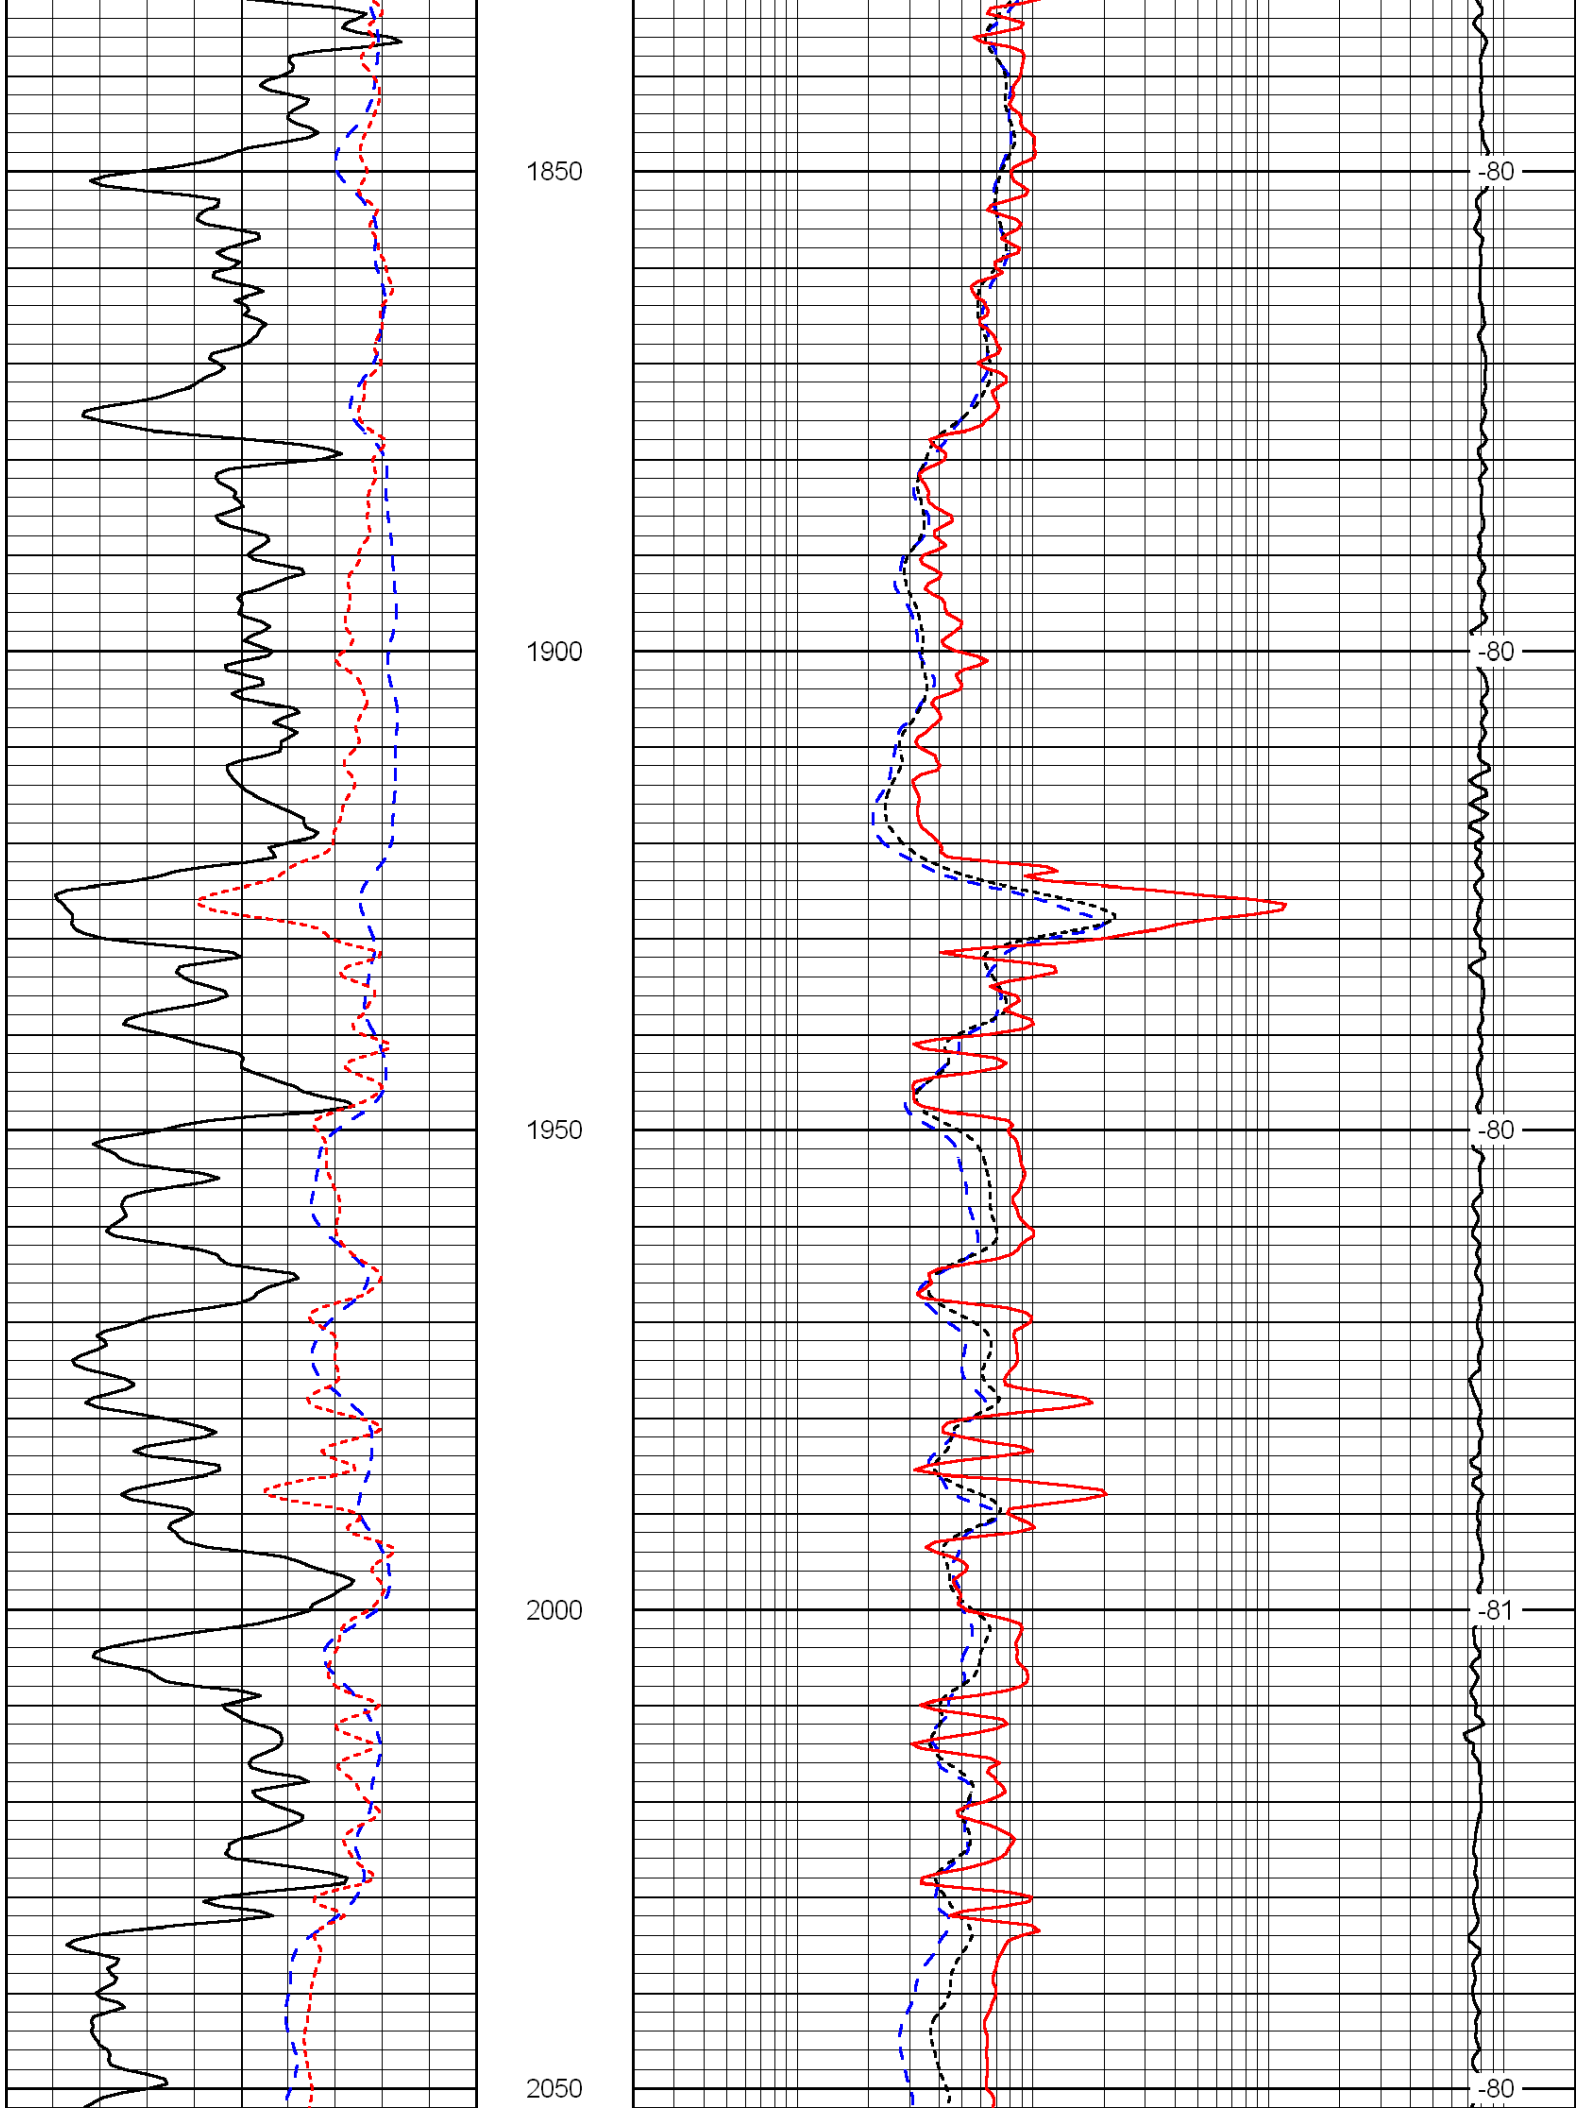

750
800
850
900
950
-84
-84
-84
-84
-84

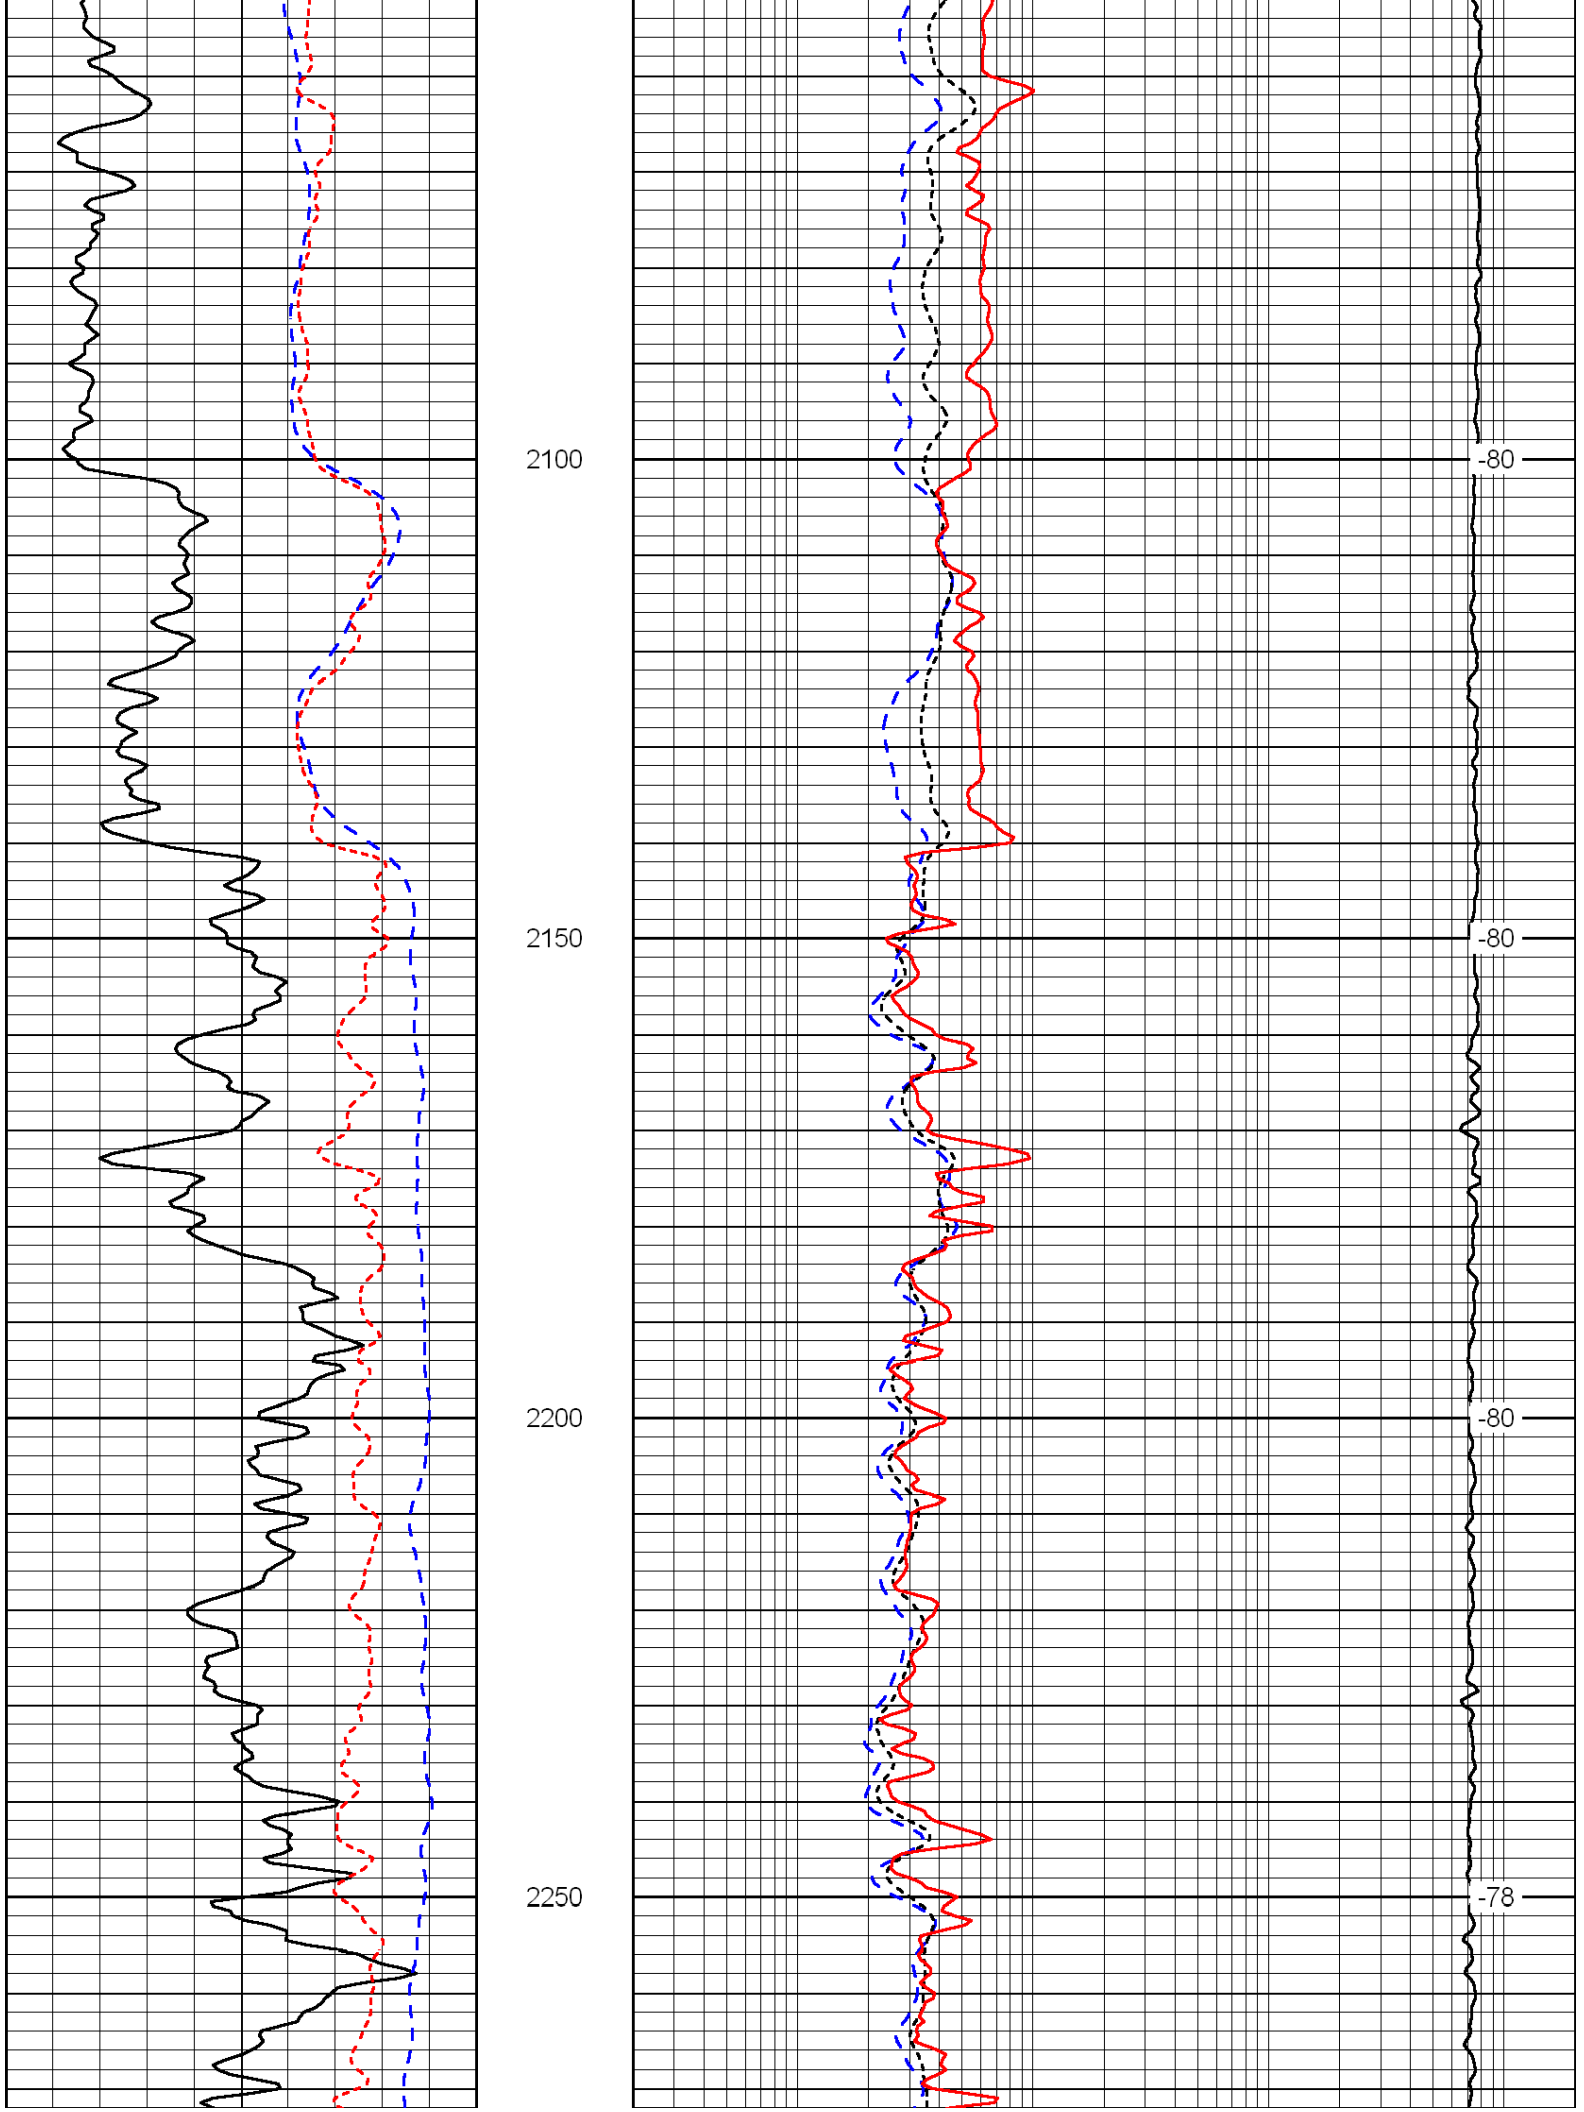

1000
1050
1100
1150
-84
-84
-82
-82

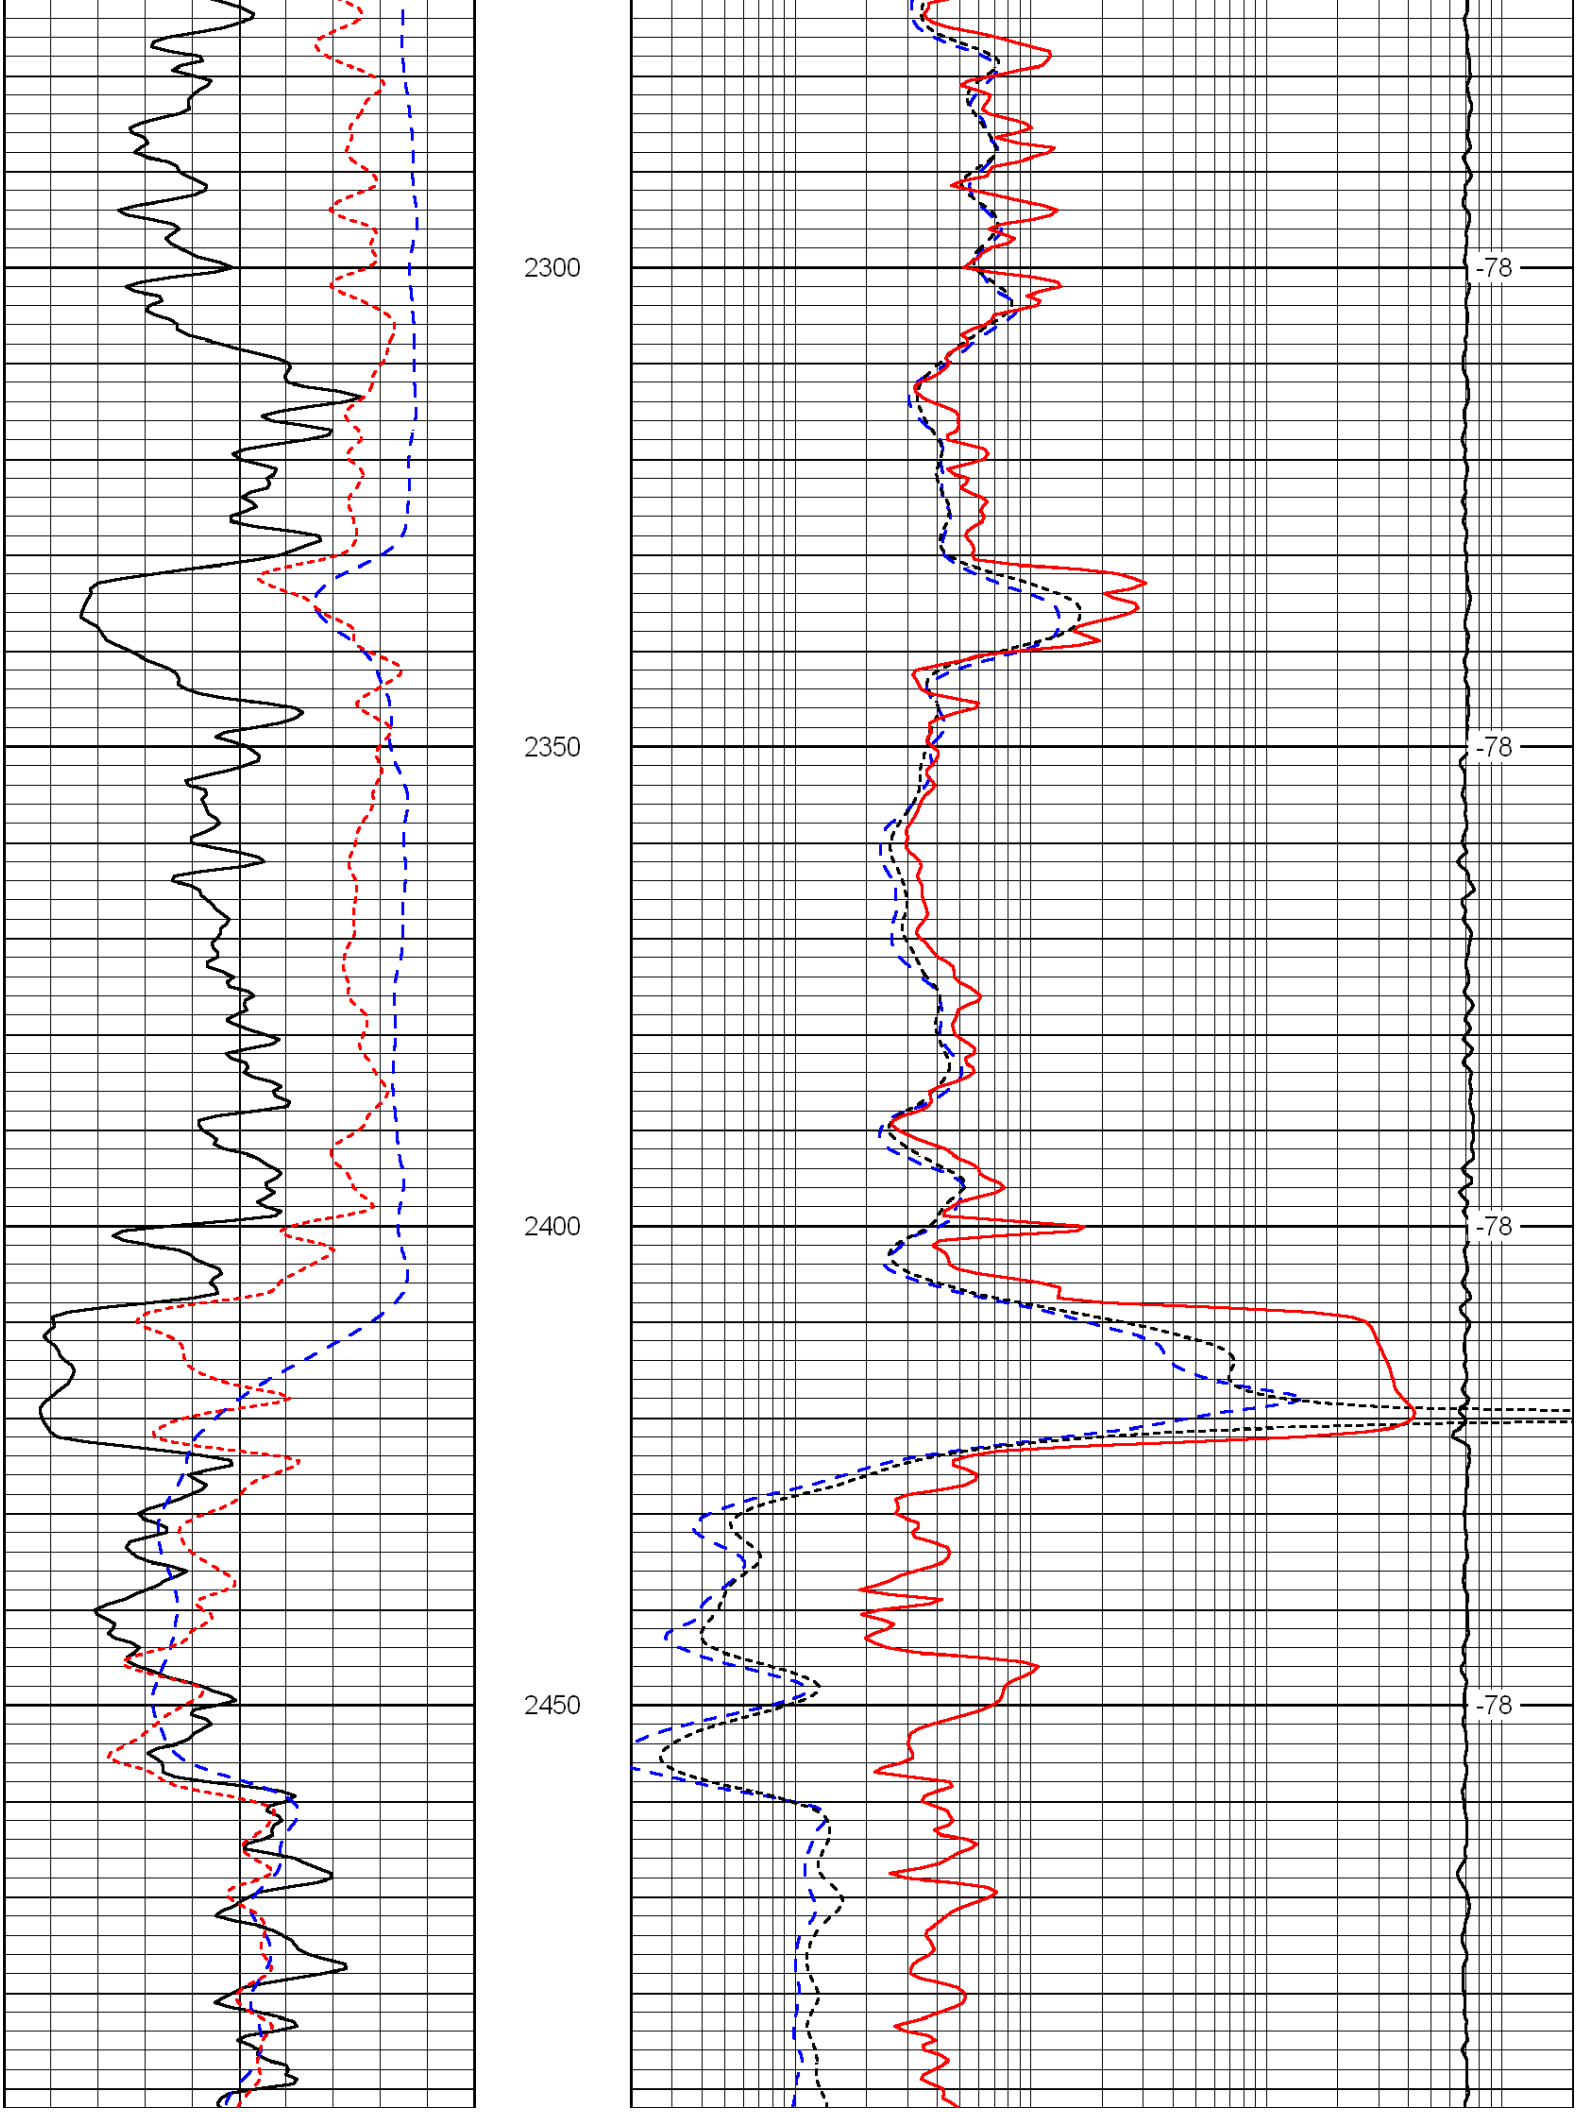

1200
1250
1300
1350
-82
-82
-82
-82

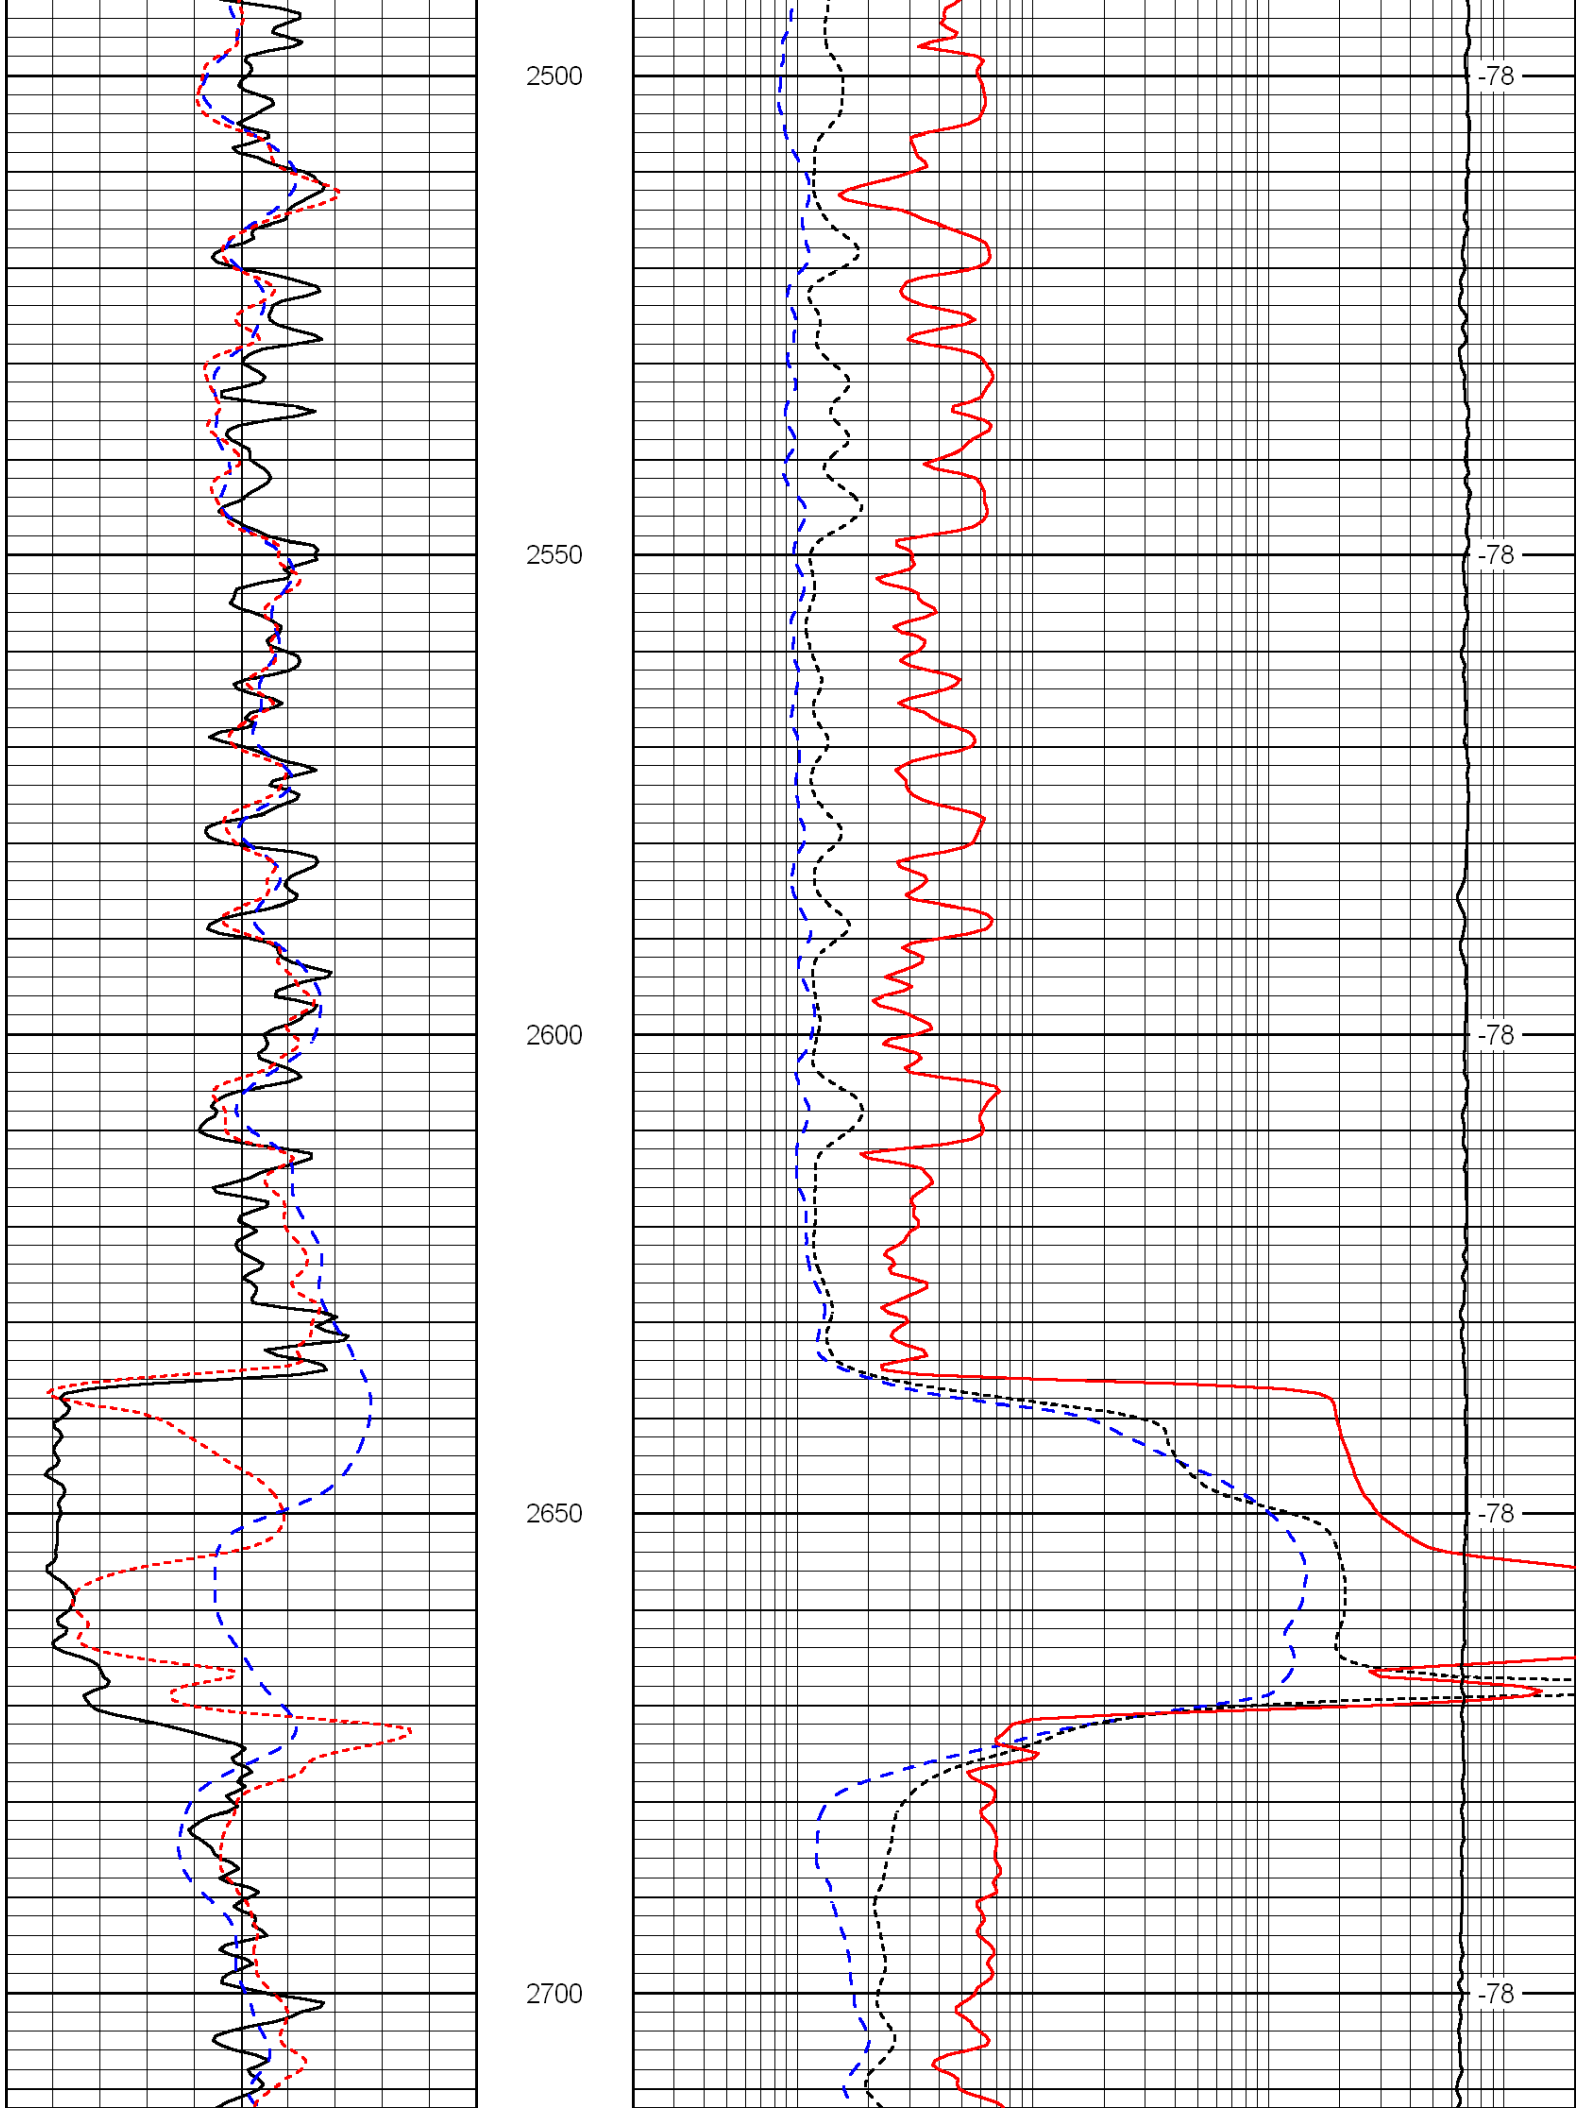

1400
1450
1500
1550
1600
-82
-82
-82
-82
-82

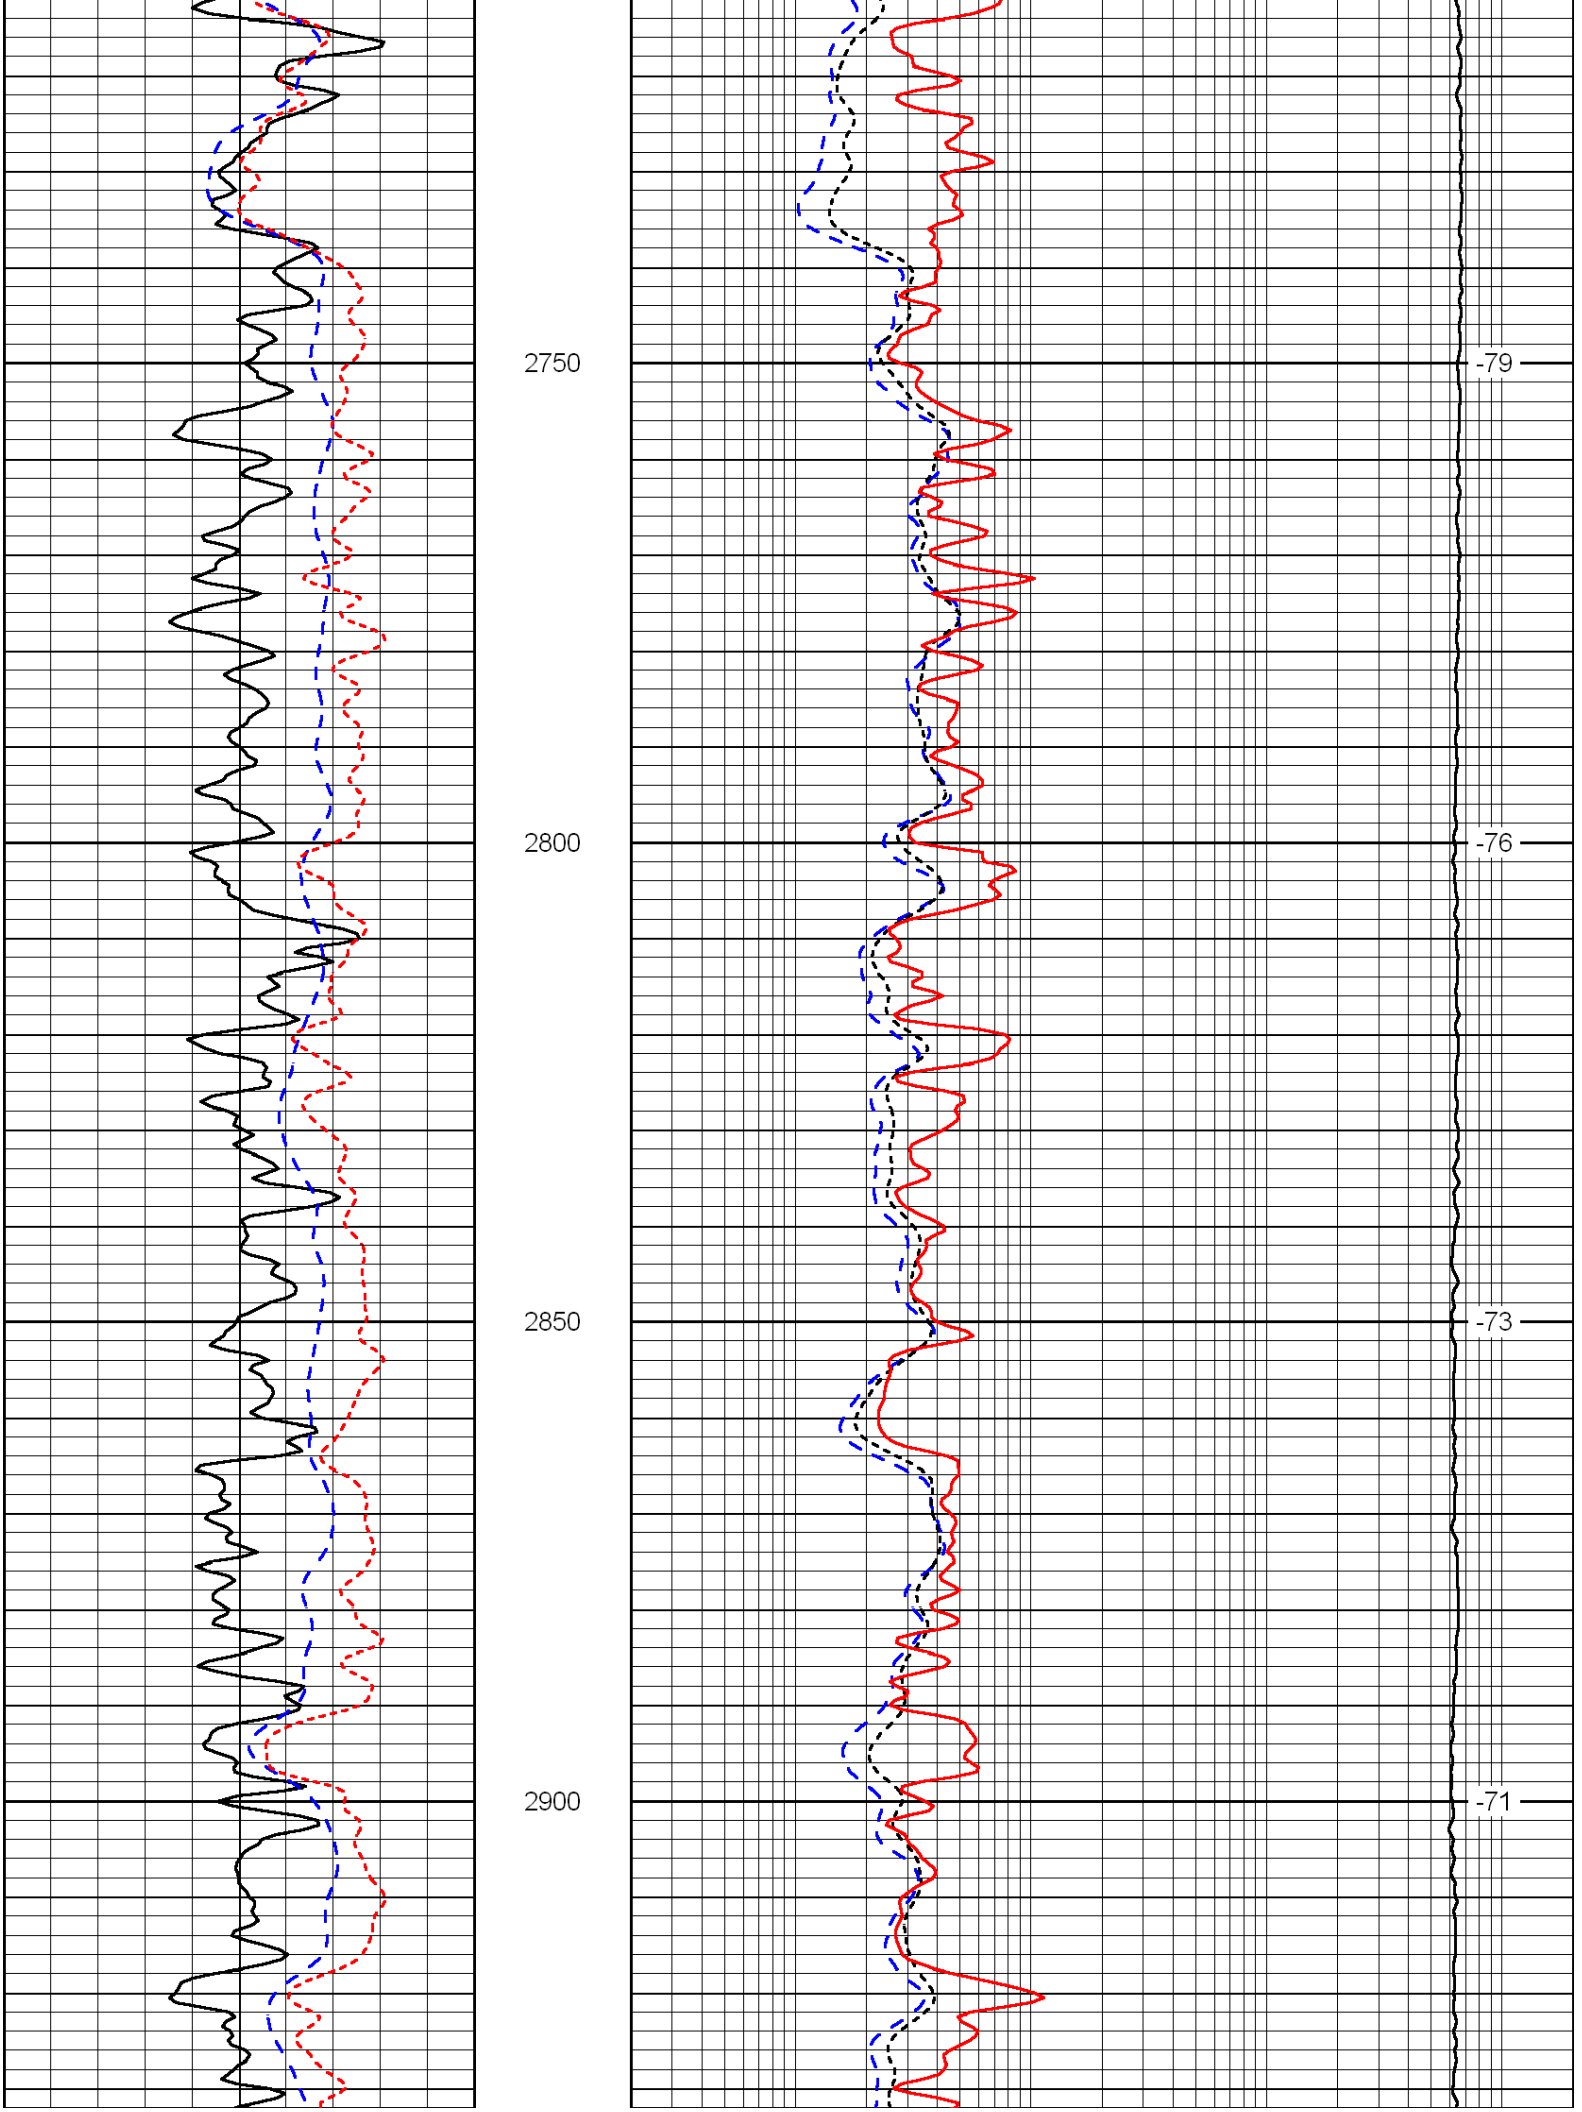

1650
1700
1750
1800
-82
-80
-80
-80

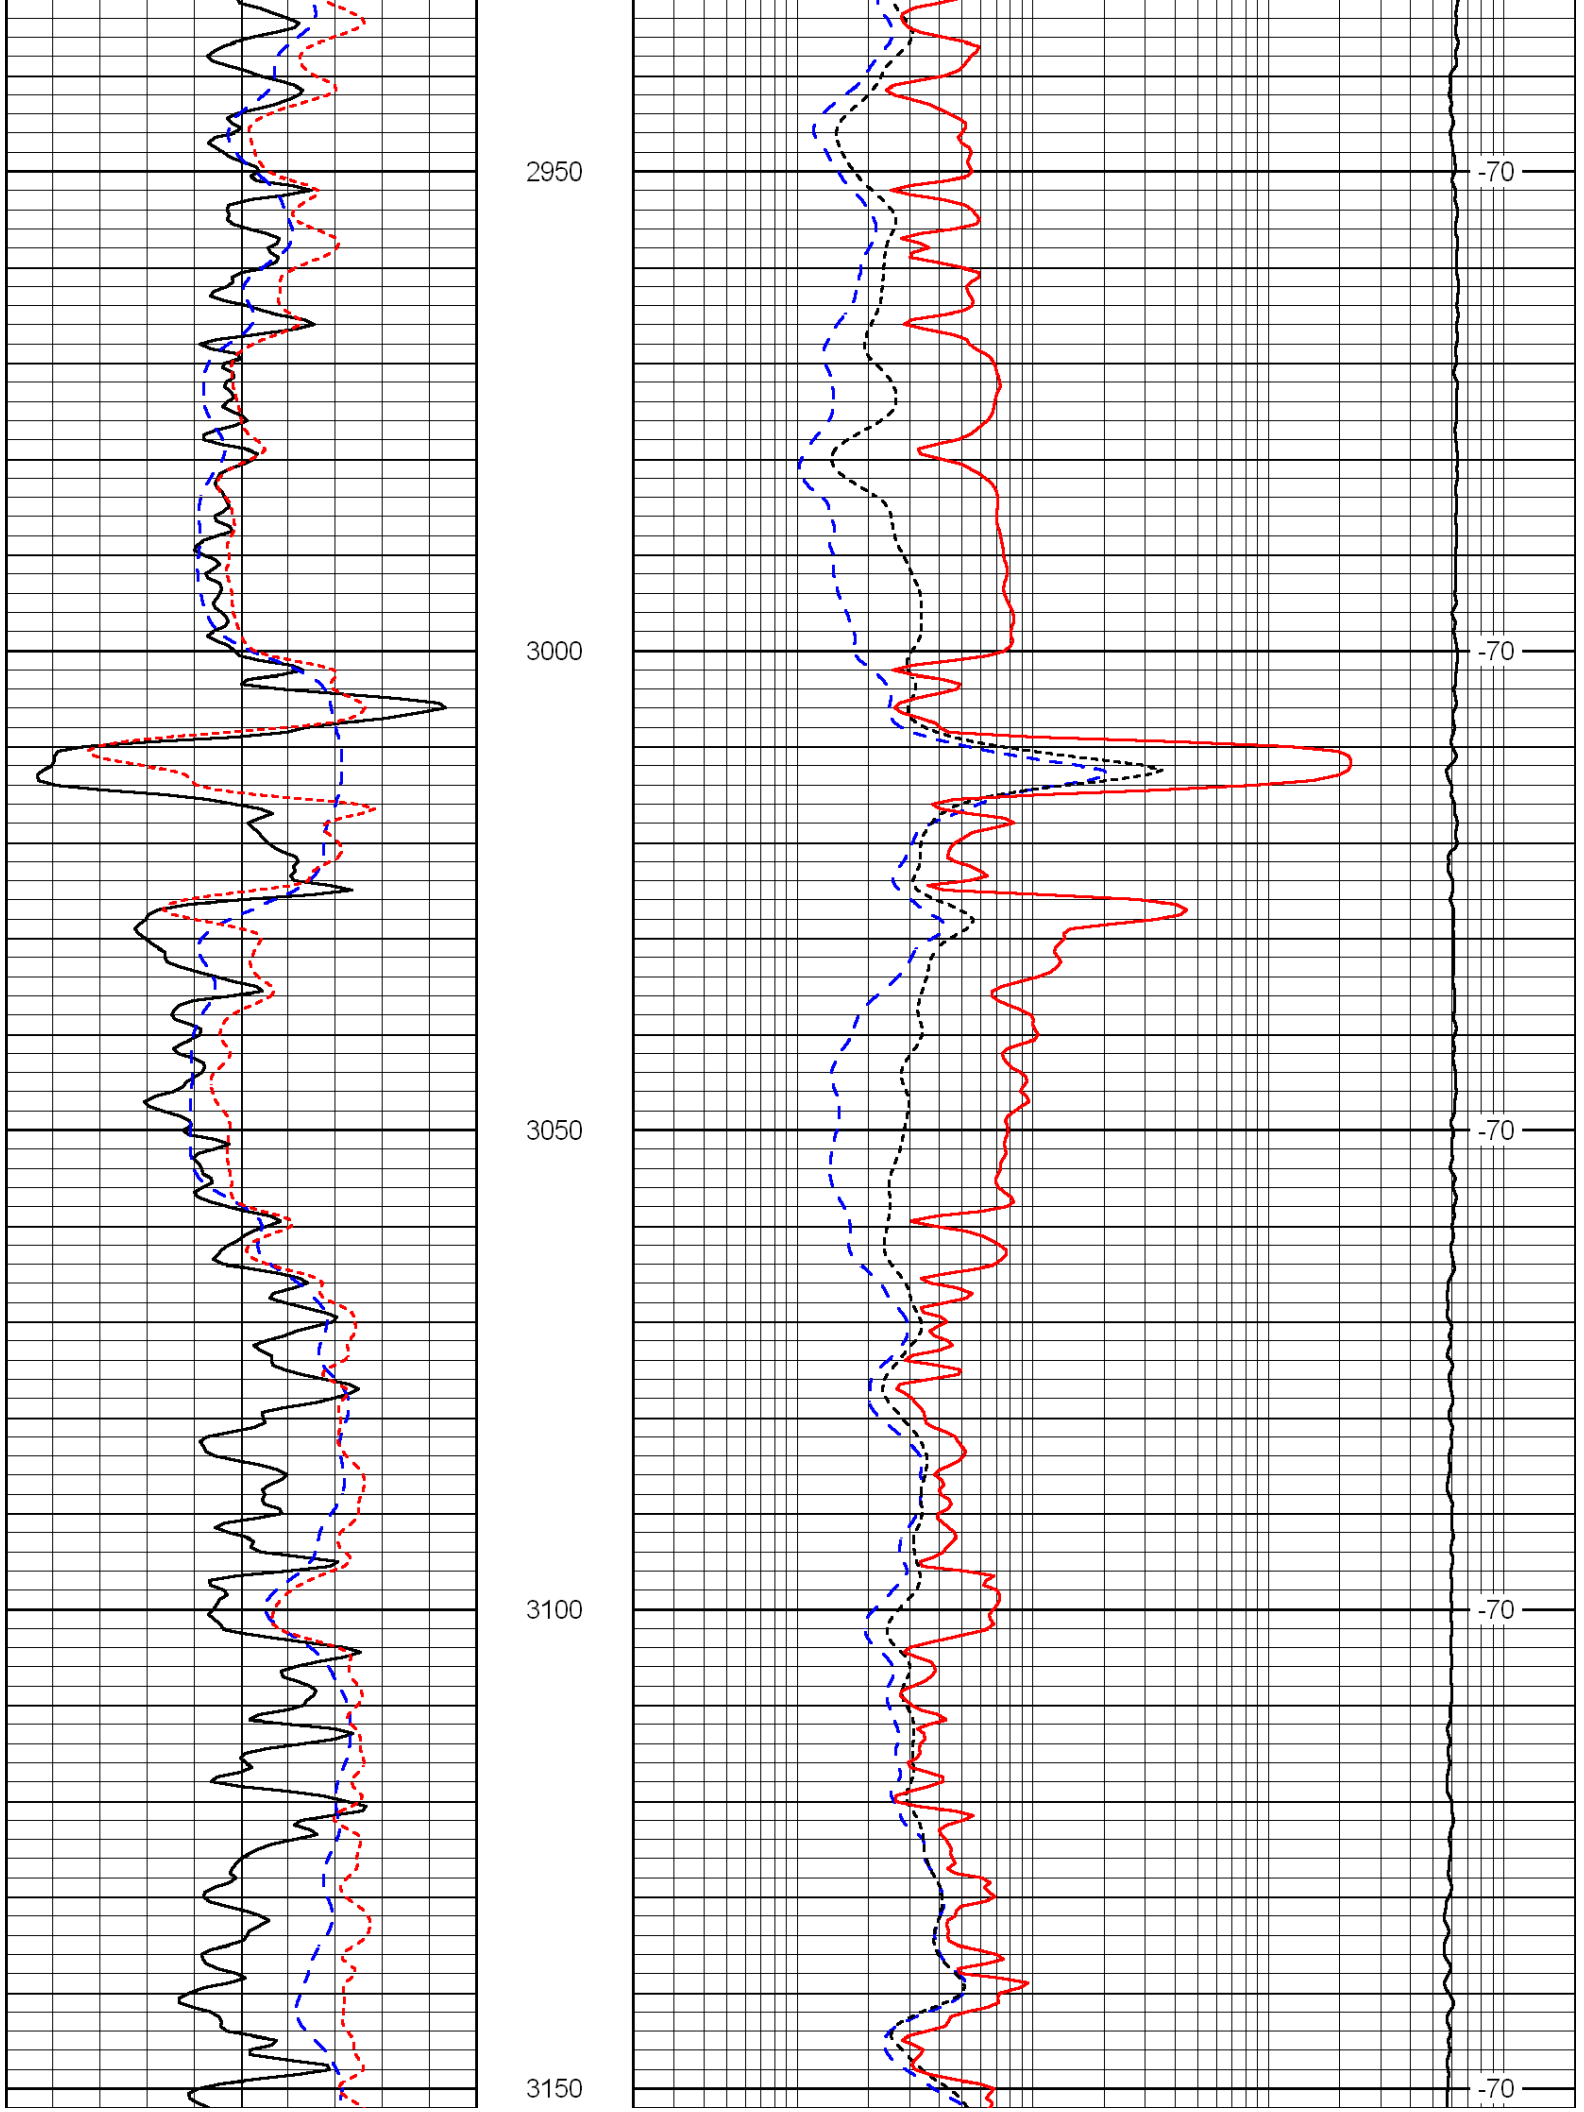

1850
1900
1950
2000
2050
-80
-80
-80
-81
-80

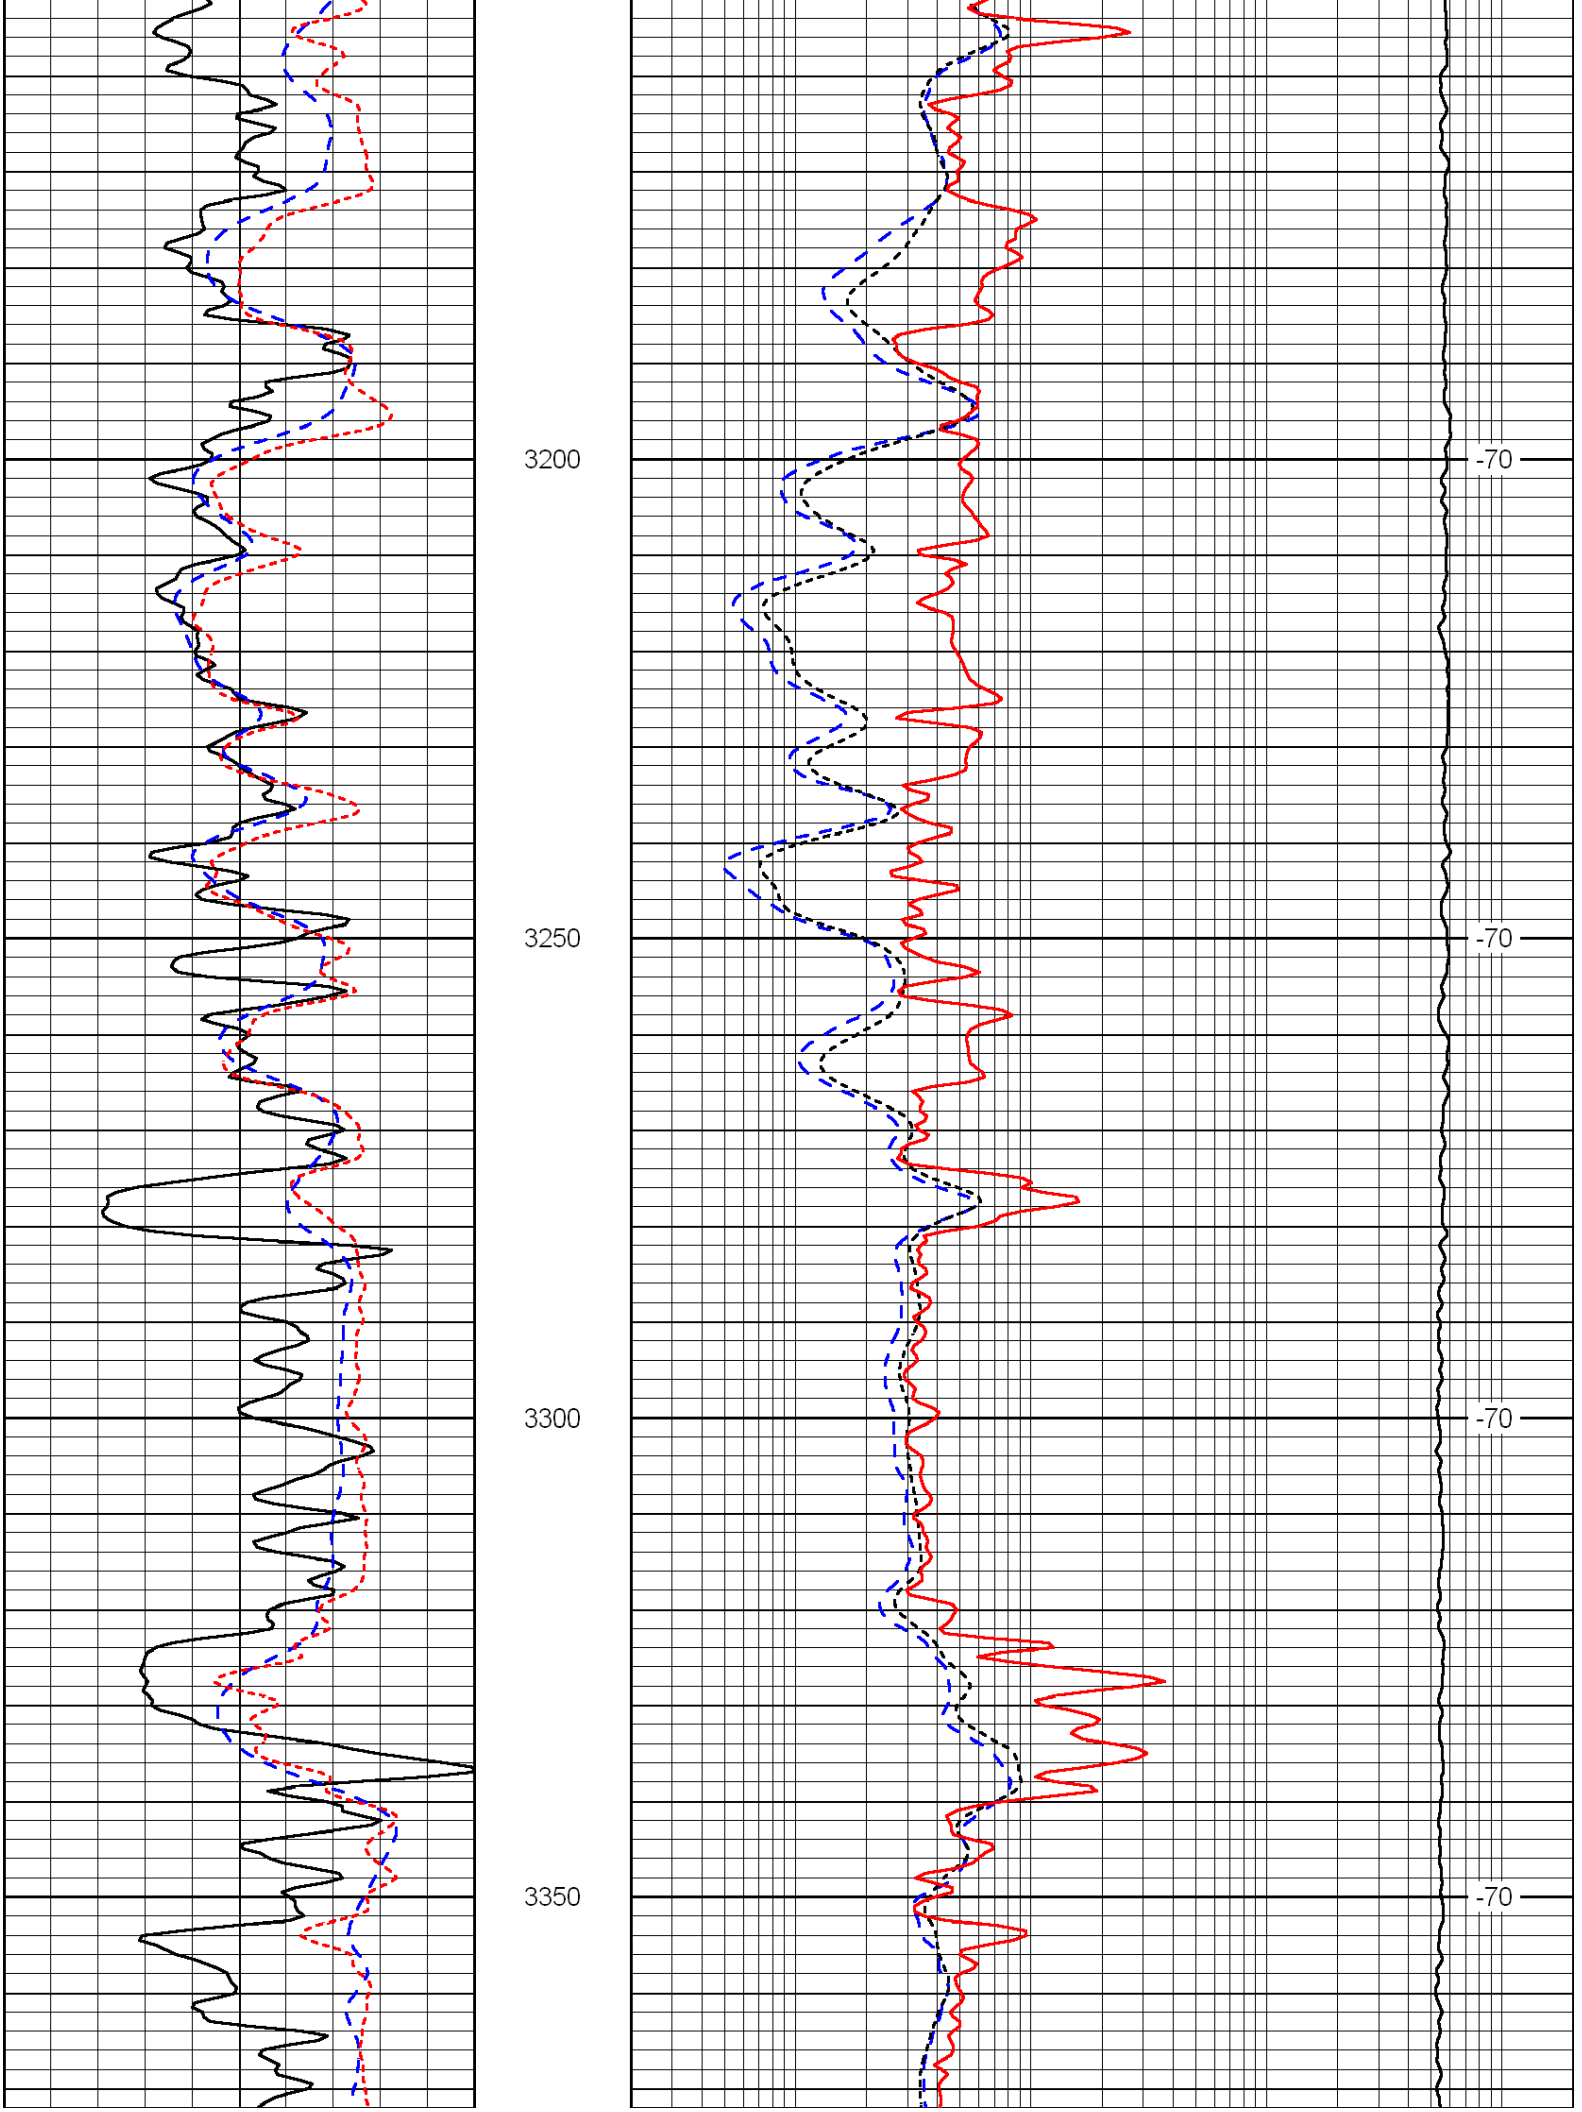

2100
2150
2200
2250
-80
-80
-80
-78

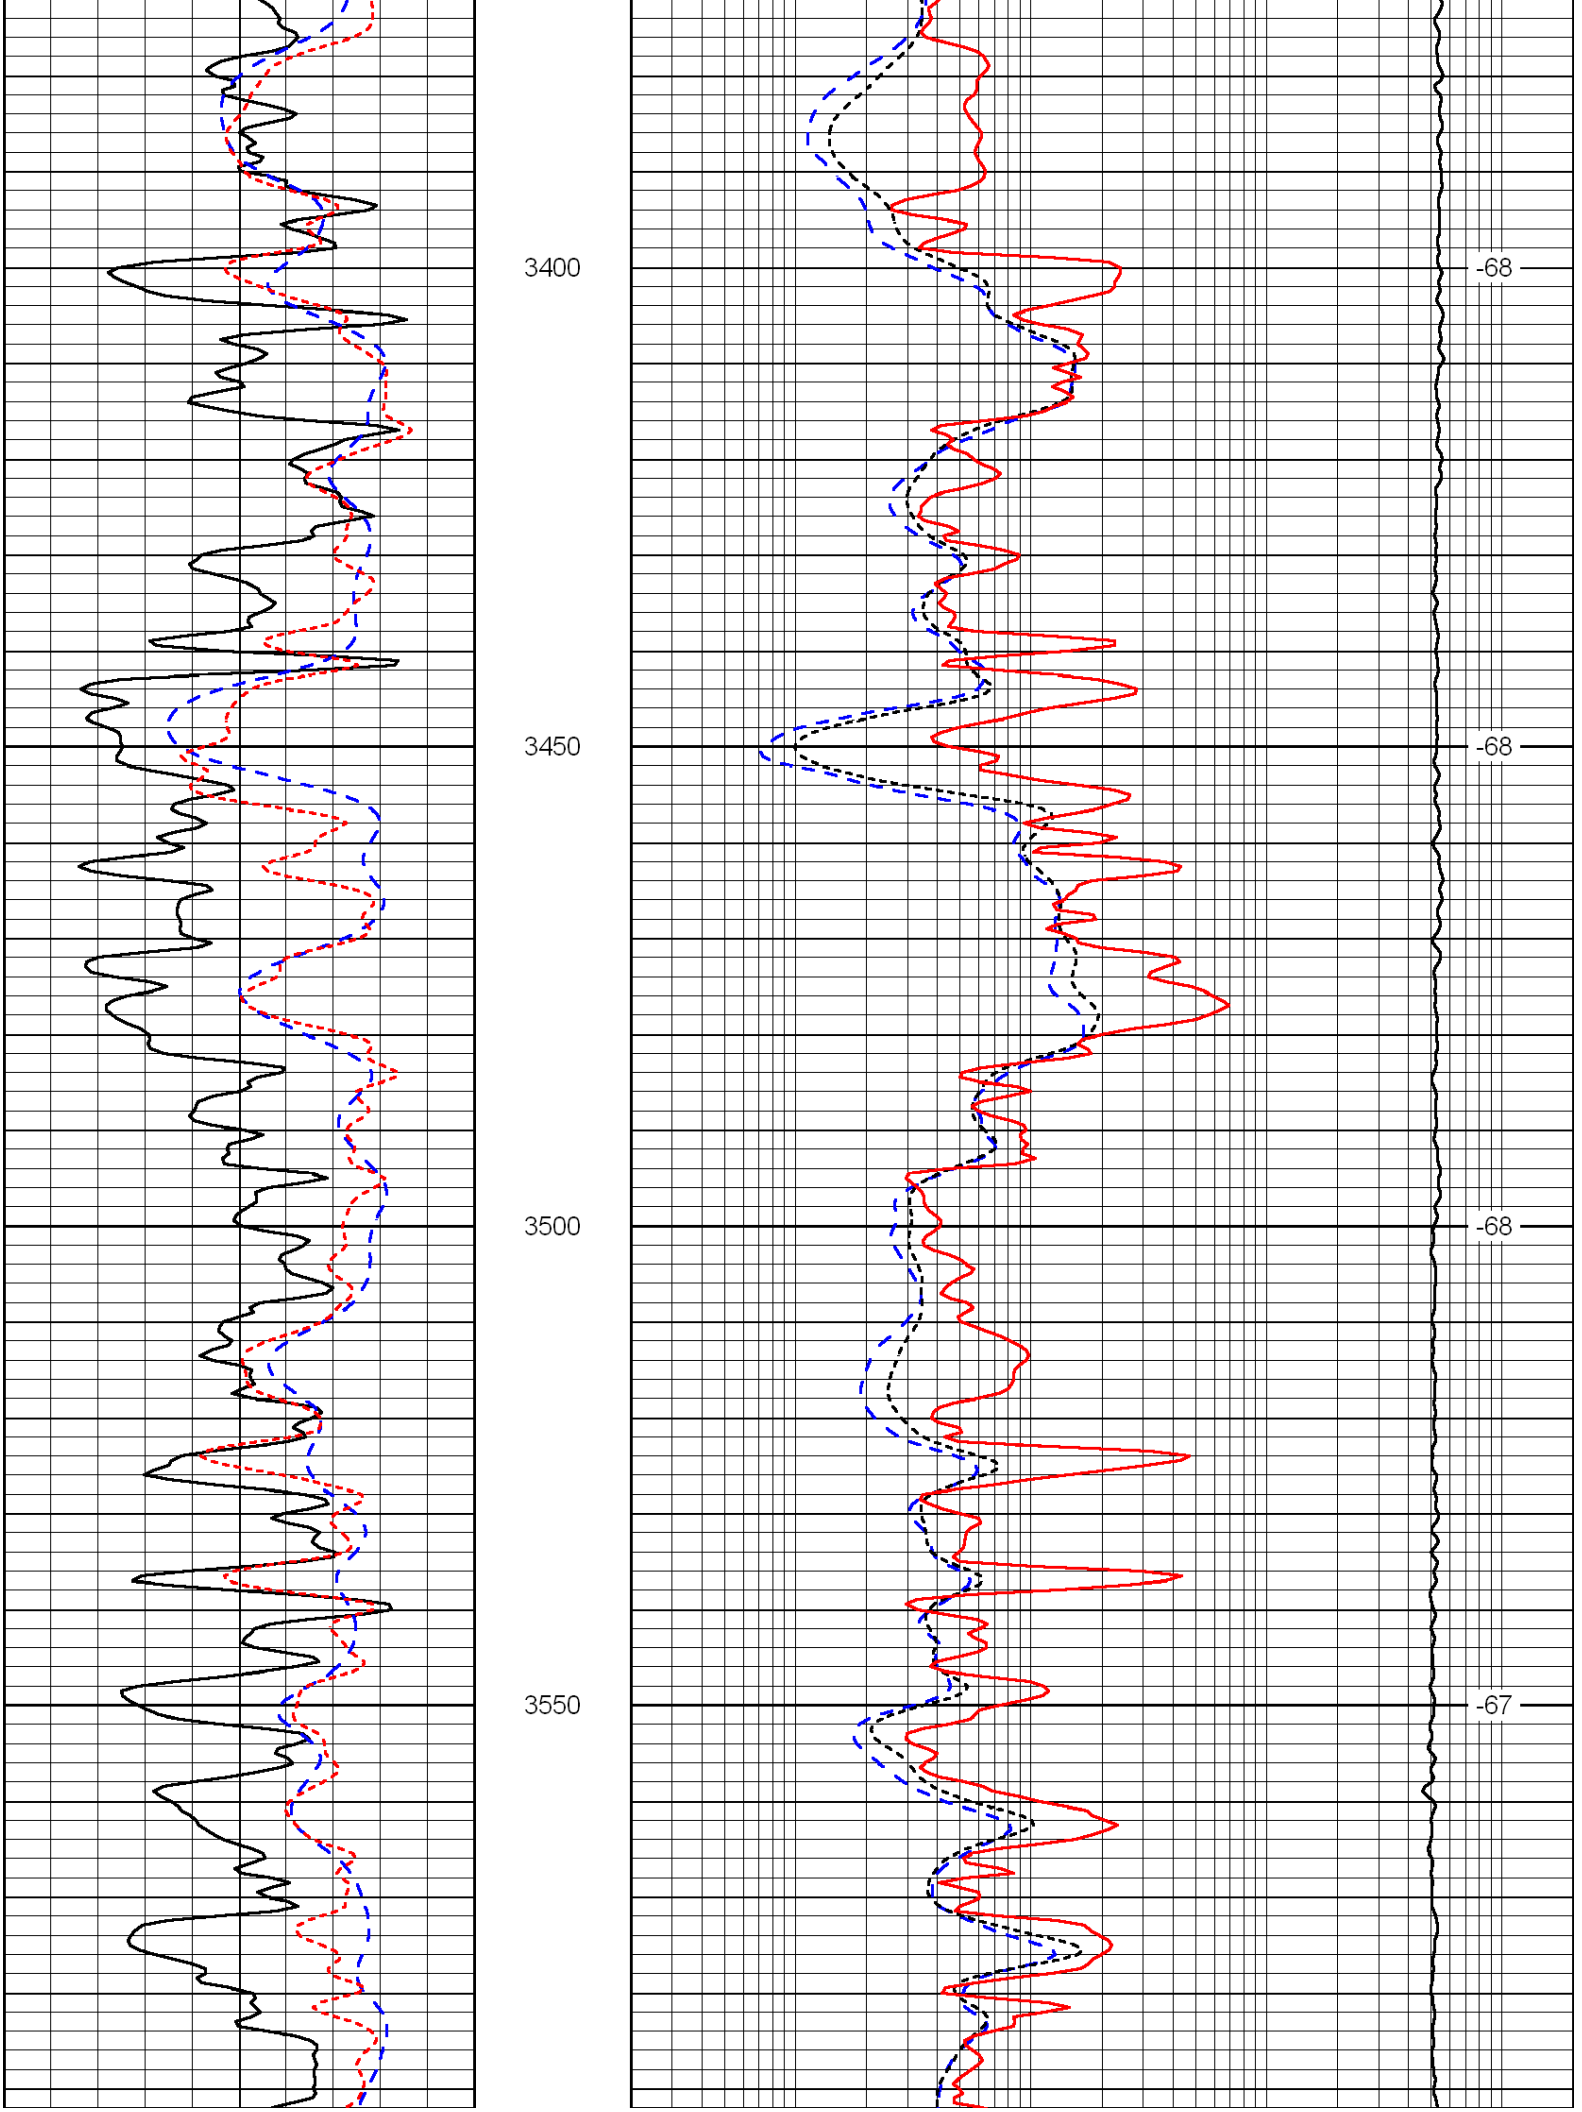

2300
2350
2400
2450
-78
-78
-78
-78

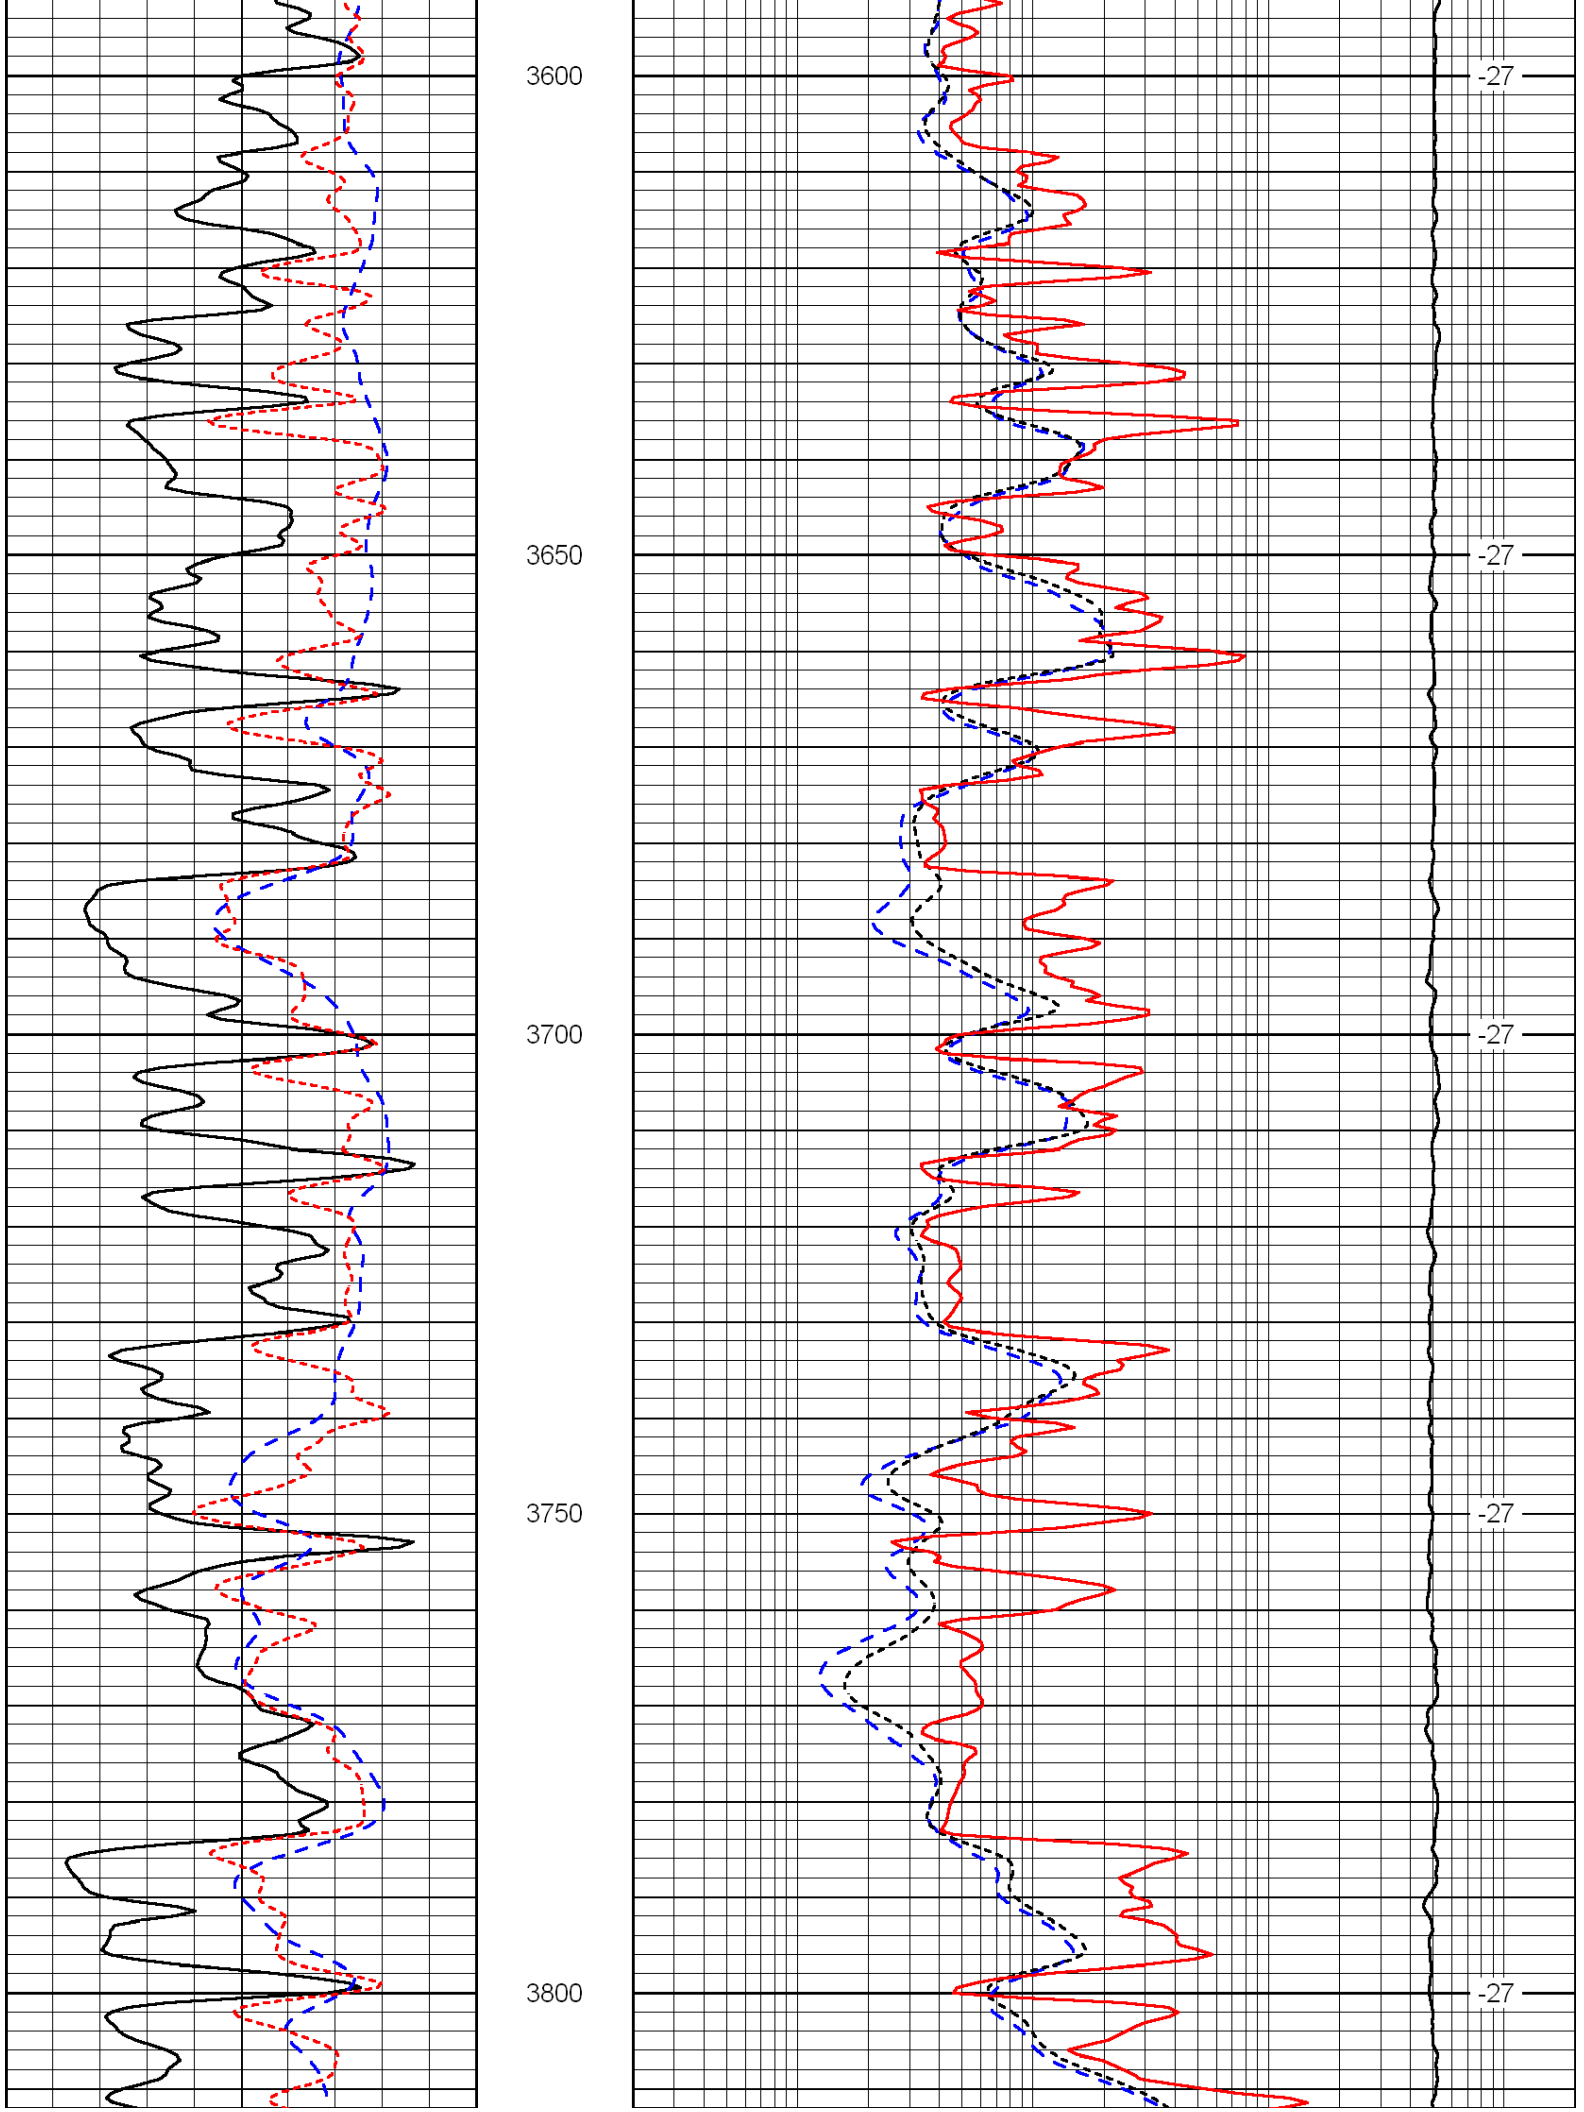

2500
2550
2600
2650
2700
-78
-78
-78
-78
-78

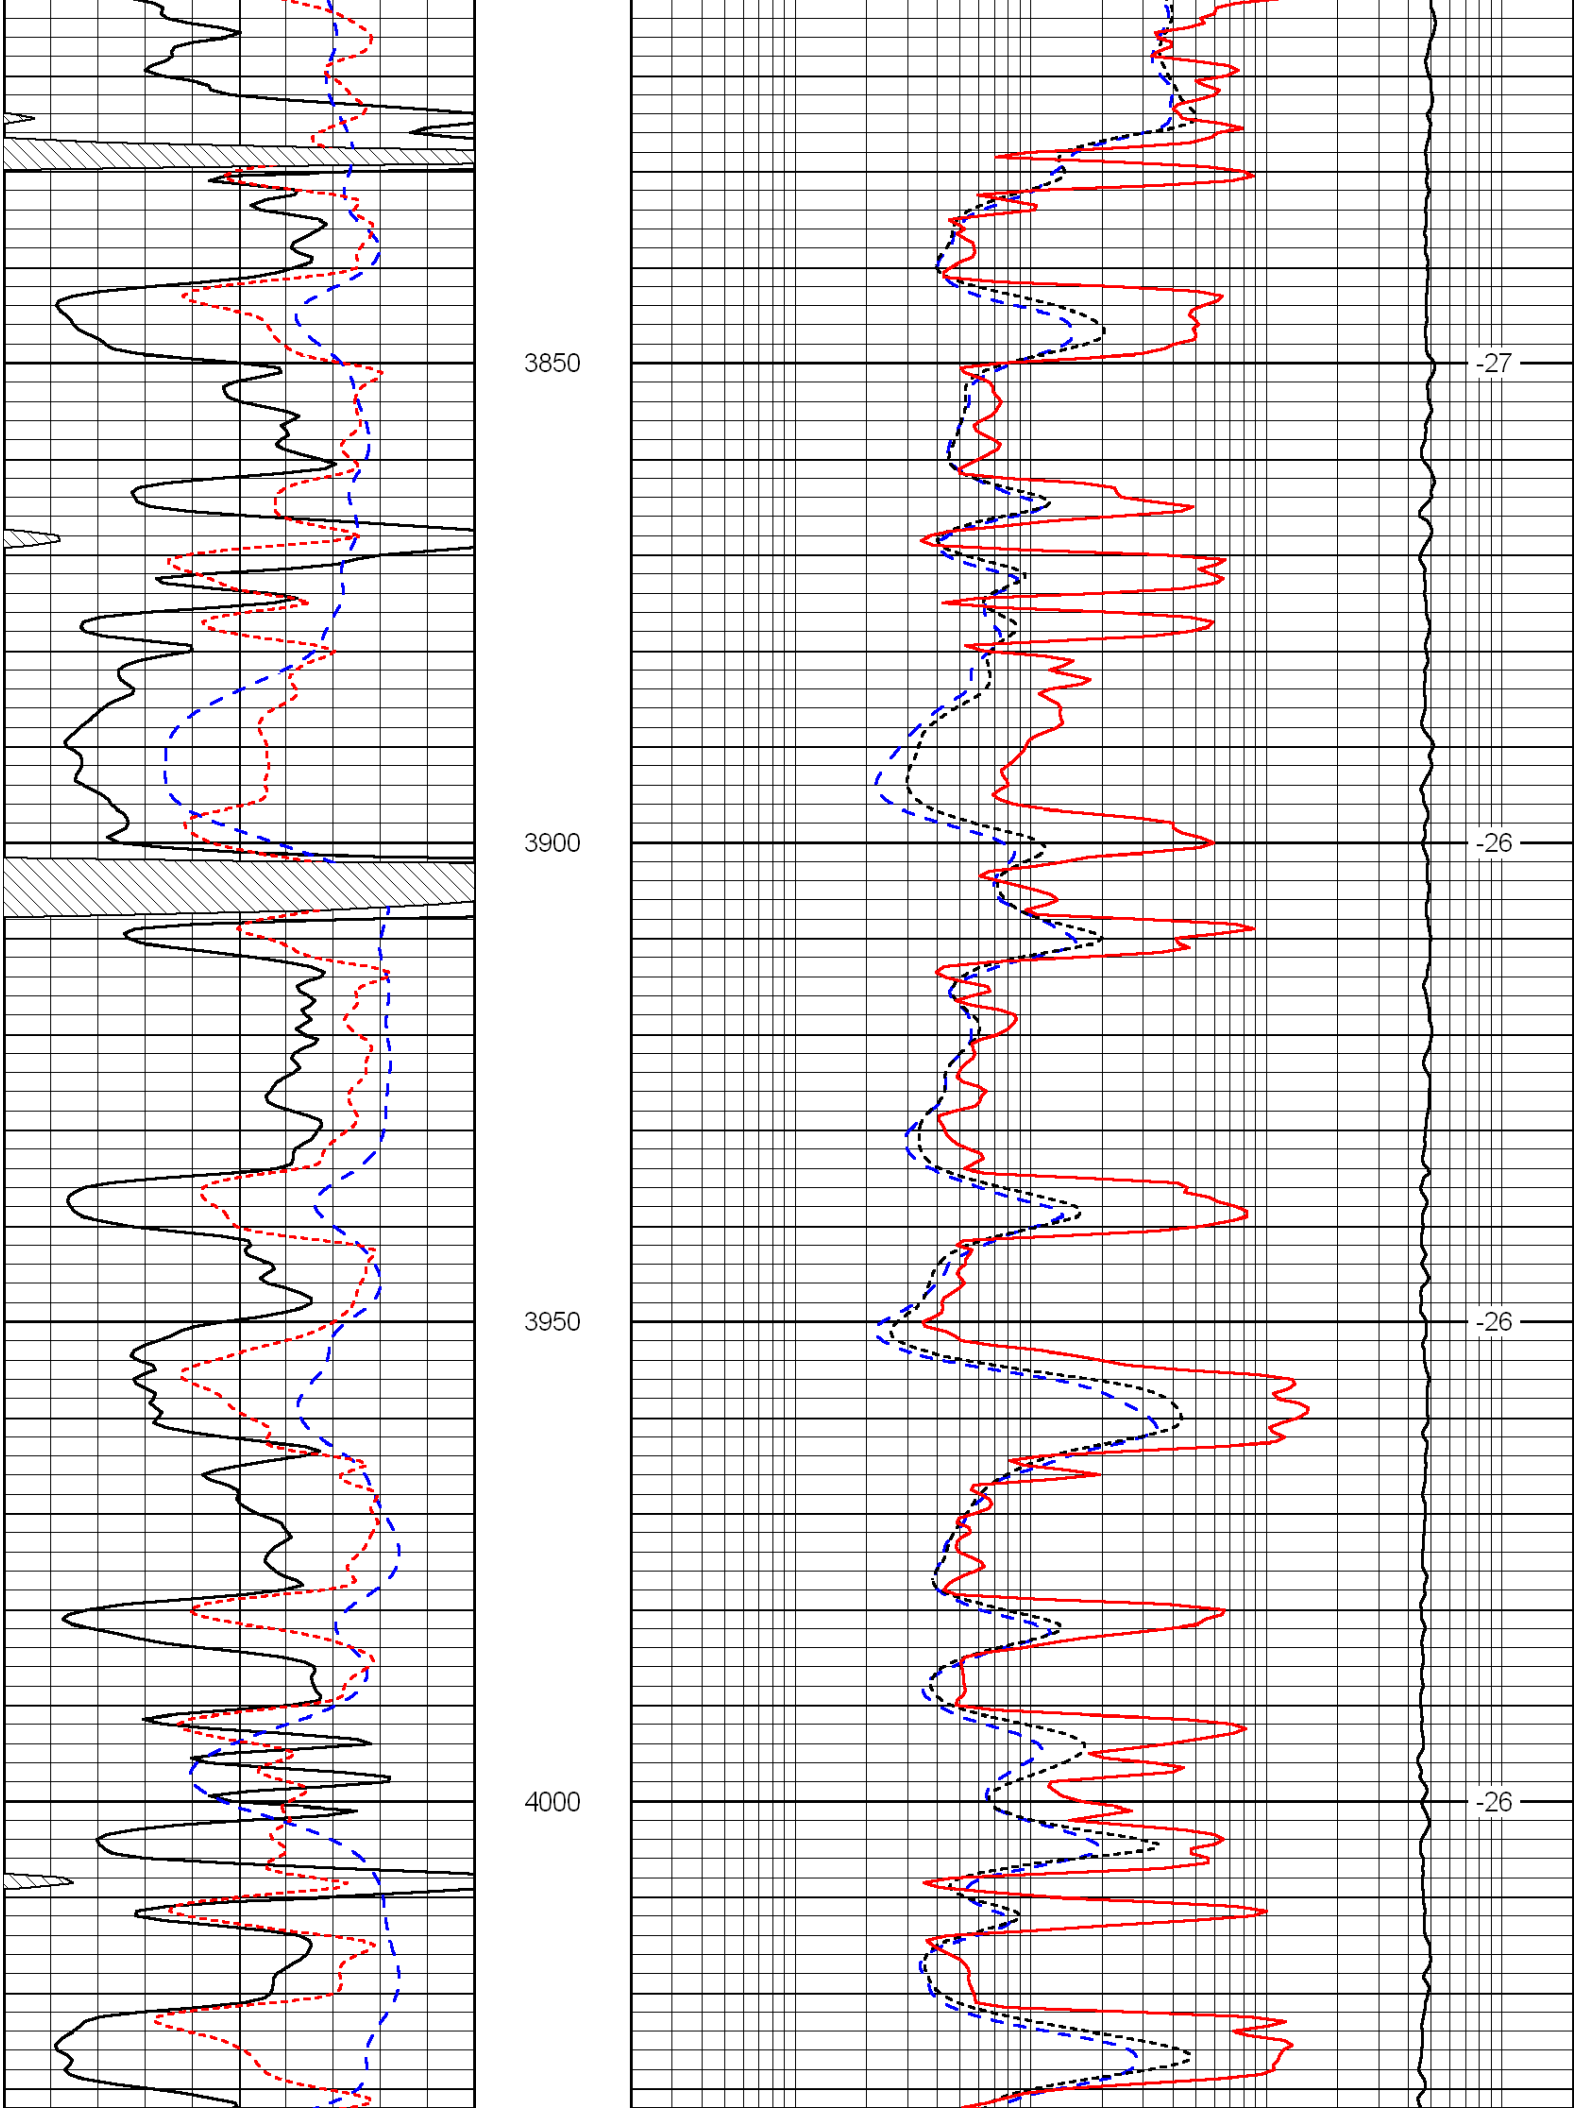

2750
2800
2850
2900
-79
-76
-73
-71

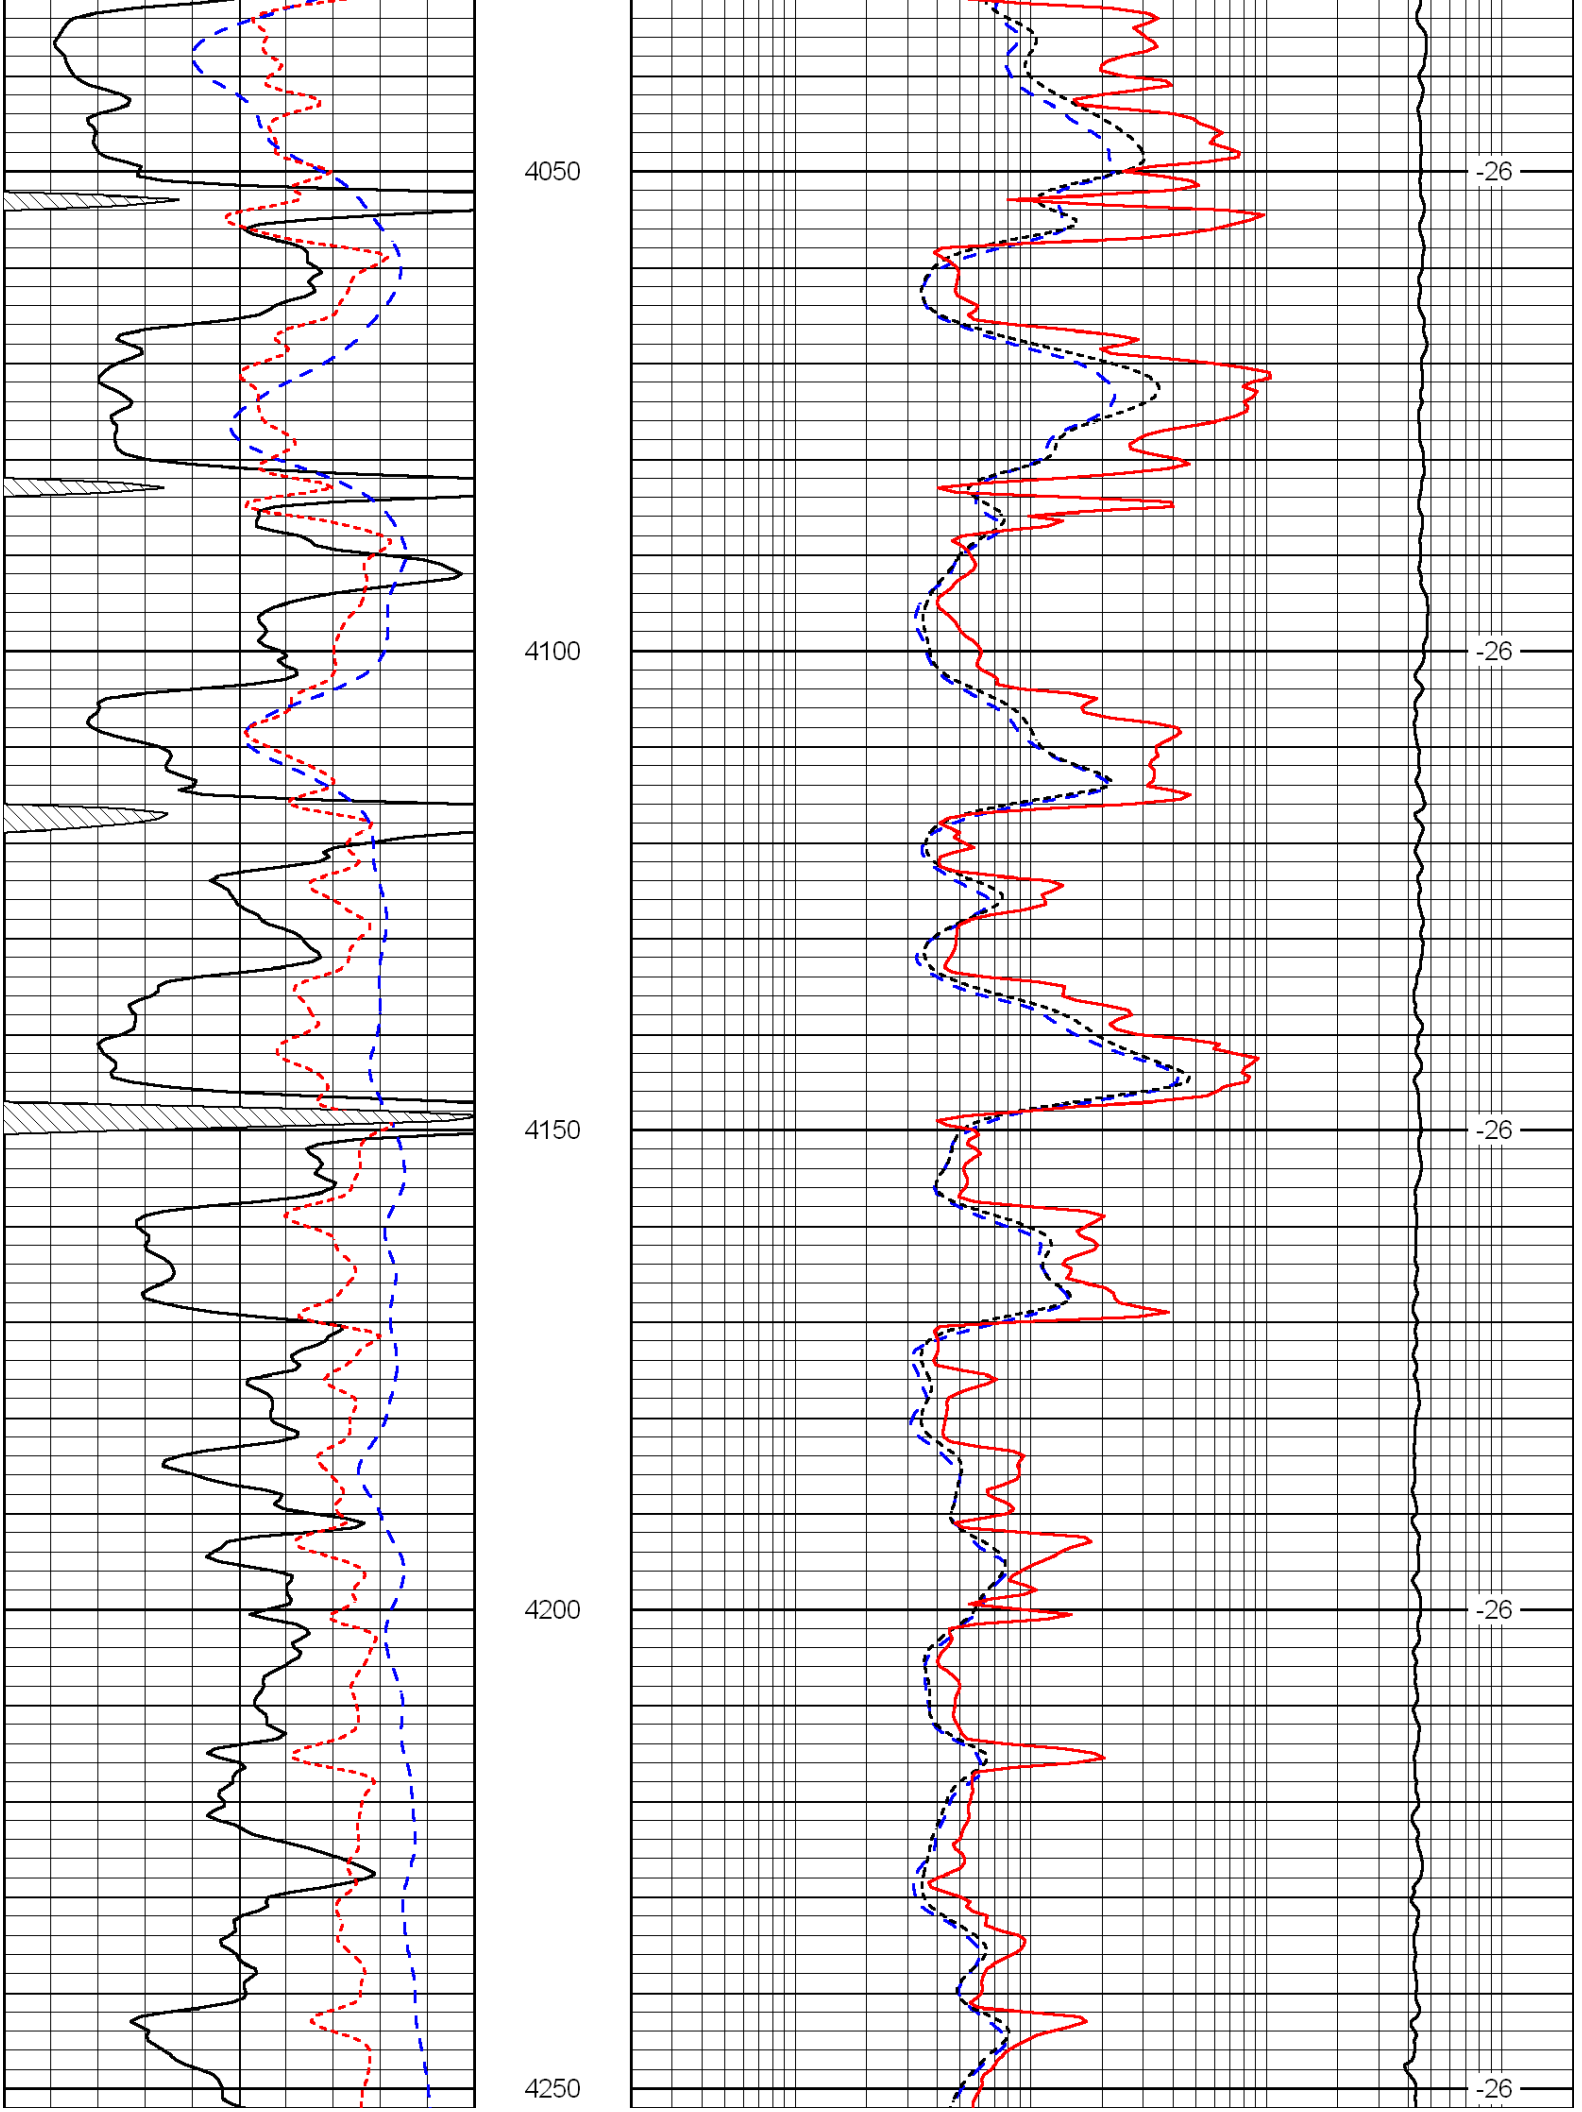

2950
3000
3050
3100
3150
-70
-70
-70
-70
-70

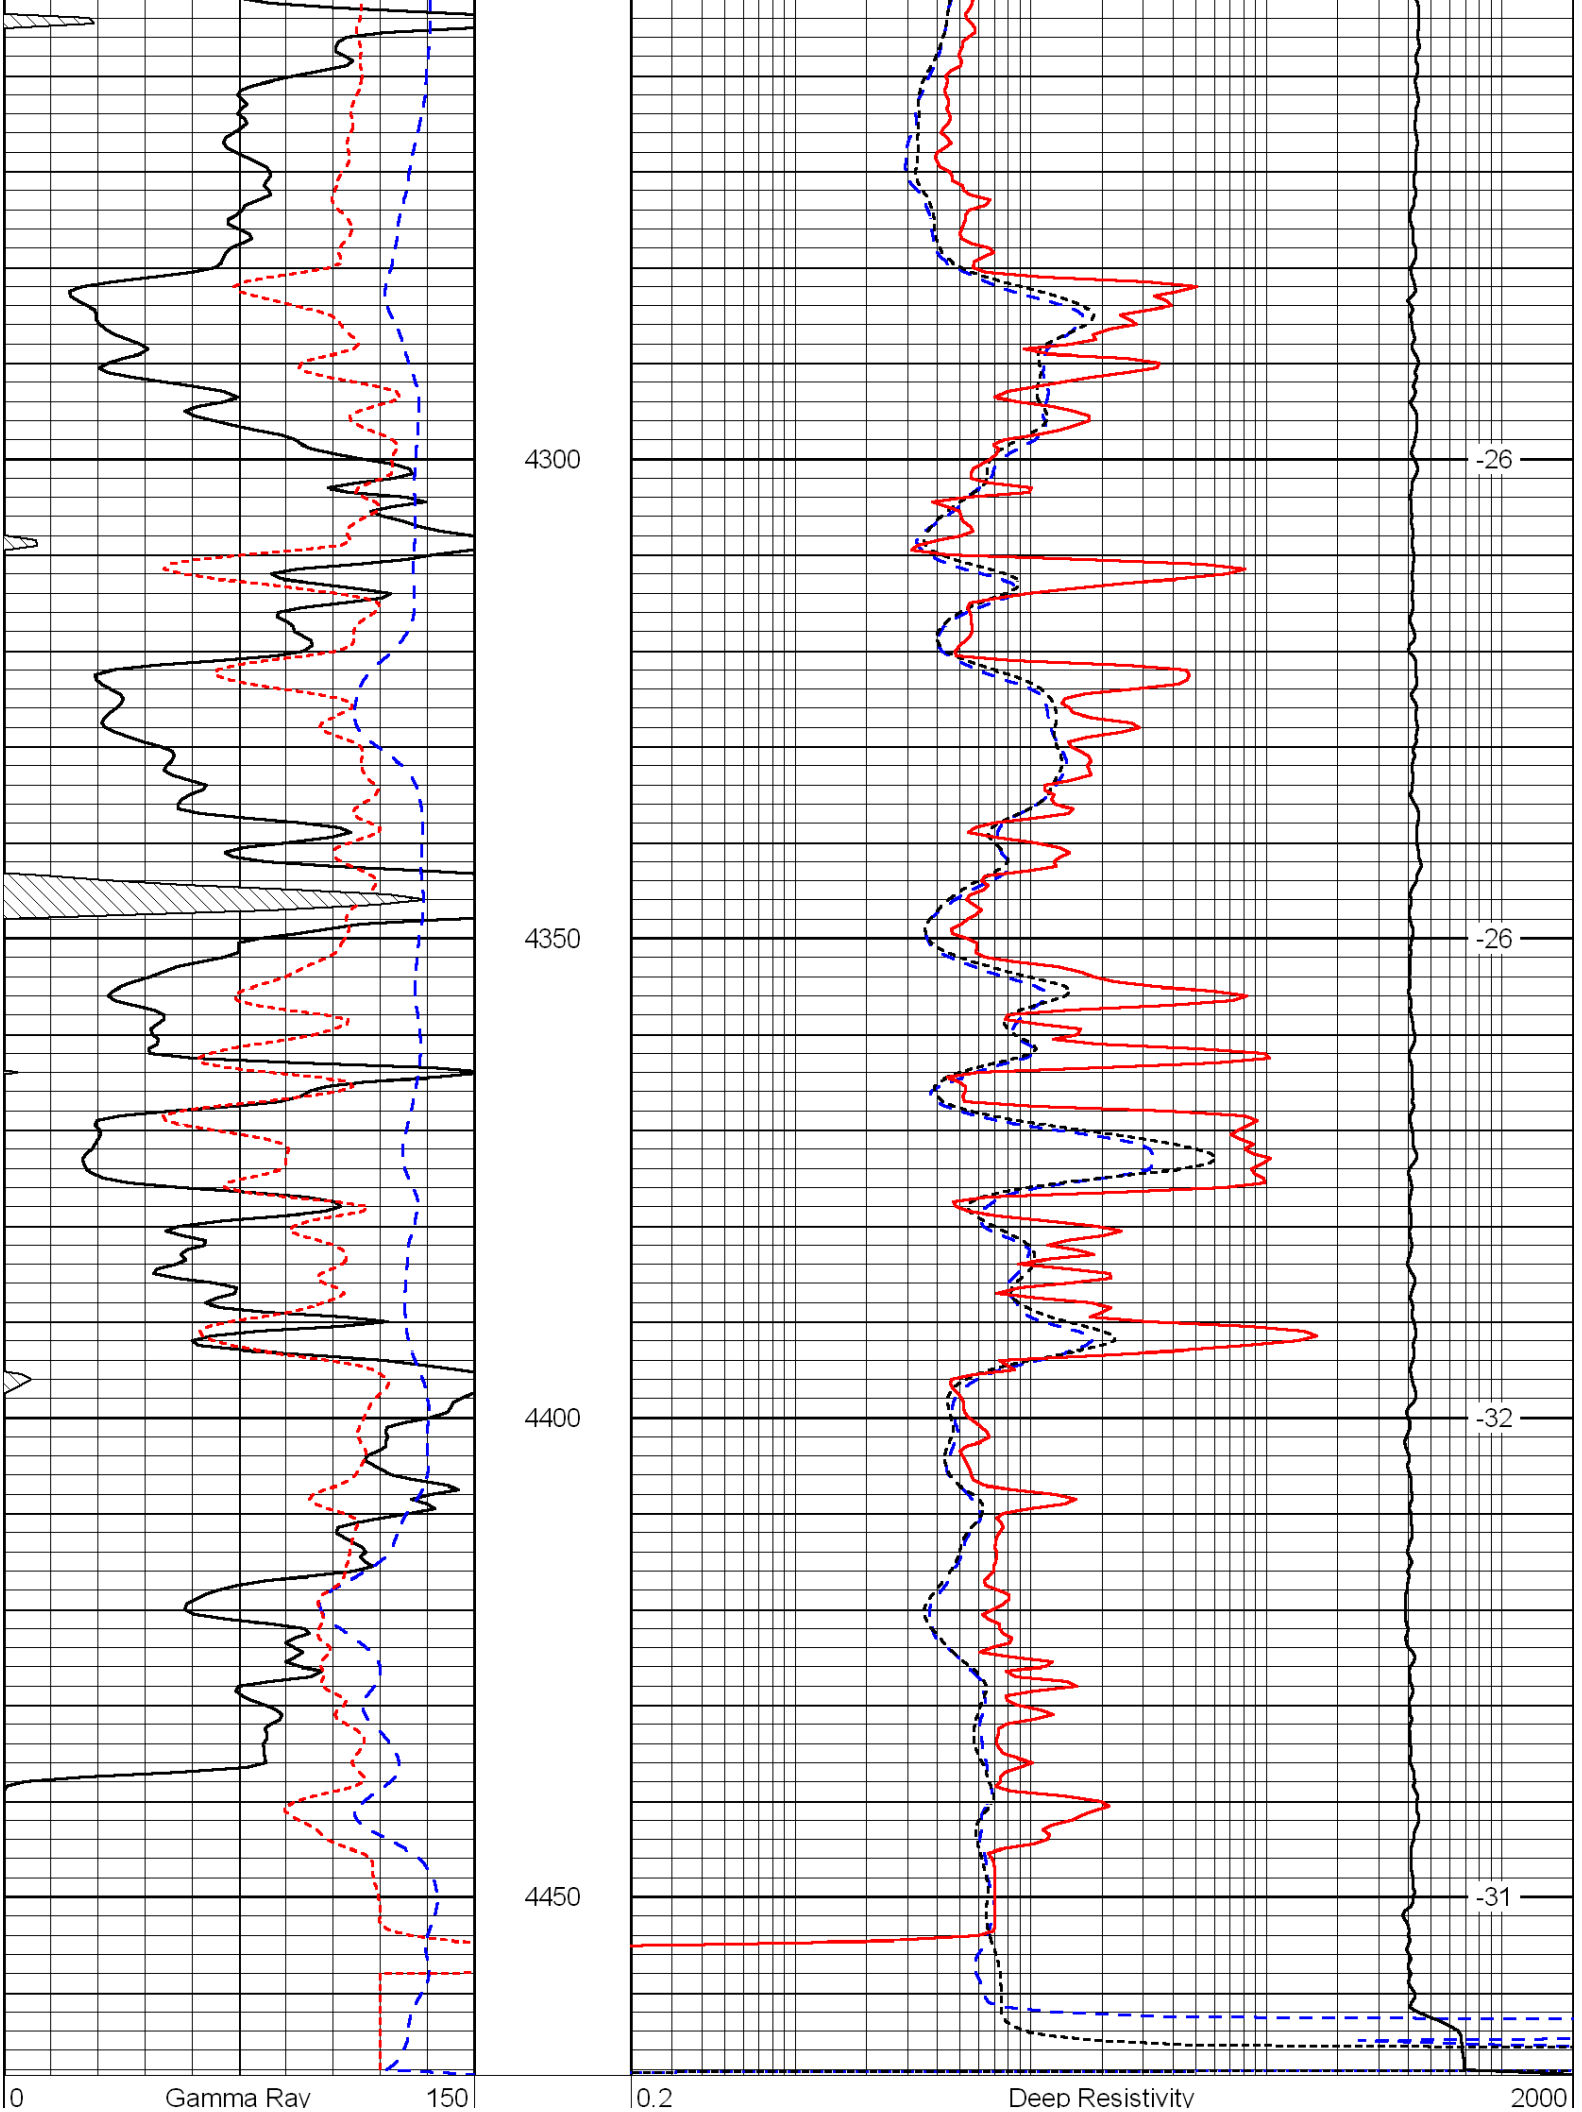

3200
3250
3300
3350
-70
-70
-70


3400
3450
3500
3550
-68
-68
-68
-67


3600
3650
3700
3750
3800
-27
-27
-27
-27
-27


3850
3900
3950
4000
-27
-26
-26
-26


4050
4100
4150
4200
4250
-26
-26
-26
-26
-26


4300
4350
4400
4450
-26
-26
-32
-31
0
Gamma Ray
150
0.2
Deep Resistivity
2000

-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD