



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Falcon Exploration, Inc.		
	Well Swayze No. 3-19		
	Field Wildcat		
	County Clark	State	Kansas
15-025-21499-00-00	Location	2360' FSL & 2500' FWL	
	Sec: 19	Twp: 30 S	Rge: 22 W
	Permanent Datum	Ground Level	Elevation 2456
	Log Measured From	Kelly Bushing	10 Ft. Above Perm. Datum
	Drilling Measured From	Kelly Bushing	
Date		5/6/2010	
Run Number		Two	
Depth Driller		6122	
Depth Logger		6119	
Bottom Logged Interval		6118	
Top Log Interval		3600	
Casing Driller		8.625 @ 682	
Casing Logger		682	
Bit Size		7.875	
Type Fluid in Hole		Chemical	
Salinity, ppm CL		7.000	
Density / Viscosity		9.3 47	
pH / Fluid Loss		8.5 11.5	
Source of Sample		Flowline	
Rm @ Meas. Temp		1.30 @ 50	
Rmf @ Meas. Temp		0.98 @ 50	
Rmc @ Meas. Temp		1.76 @ 60	
Source of Rmf / Rmc		Charts	
Rm @ BHT		0.47 @ 137	
Operating Rig Time		7 Hours	
Max Rec. Temp. F		137	
Equipment Number		15	
Location		Hays	
Recorded By		B. Becker	
Witnessed By		Keith Reavis	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Kingsdown, Ks; 6-1/2 South; West Into

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

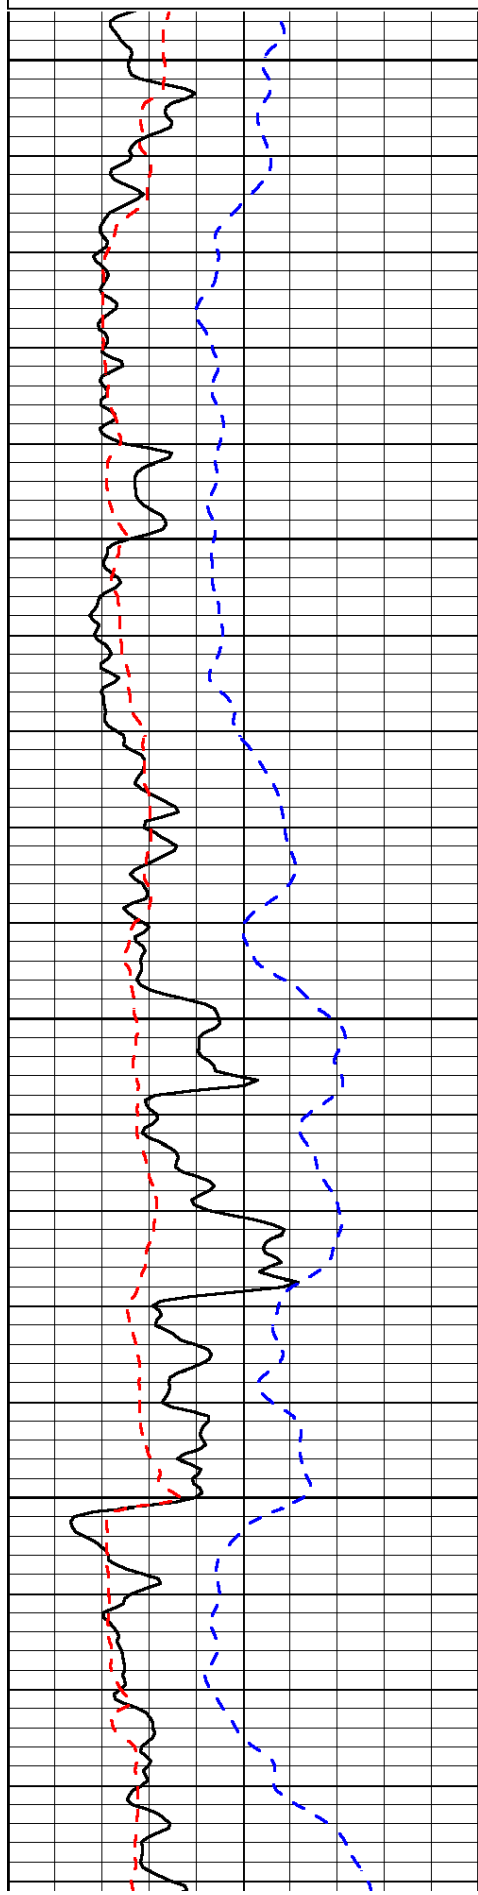

4000


4050

4100

4150

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


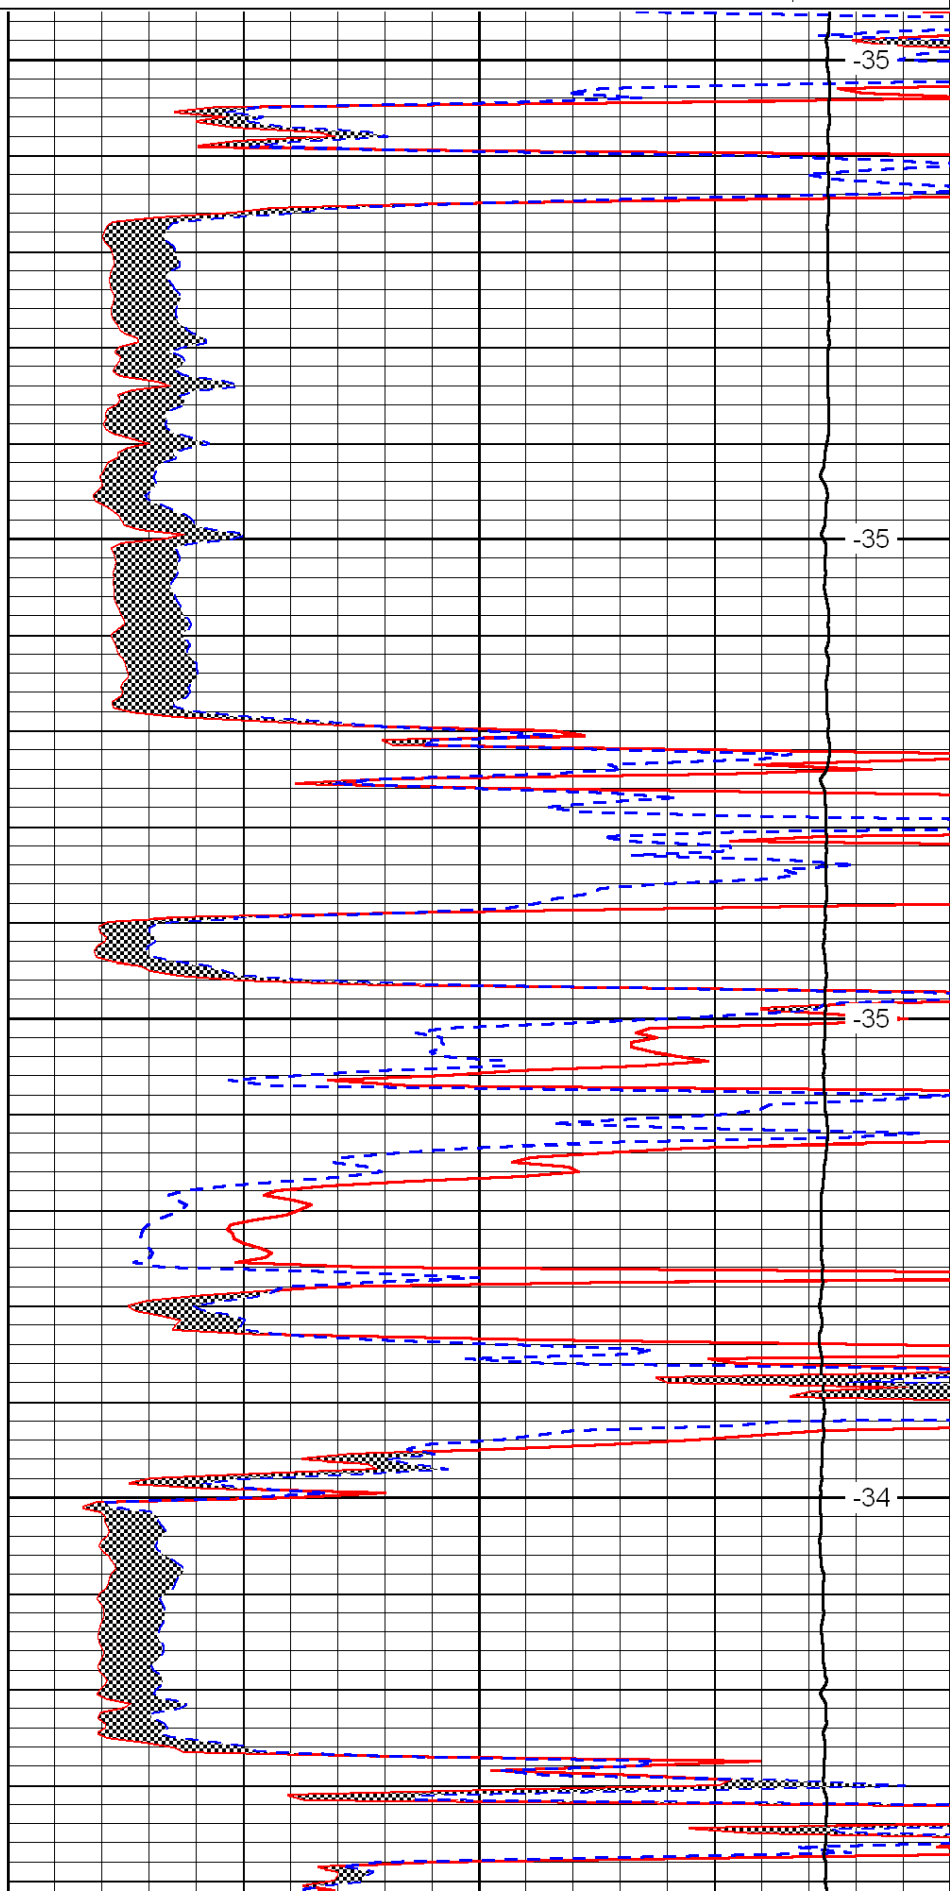



-35

-35

-35

-34

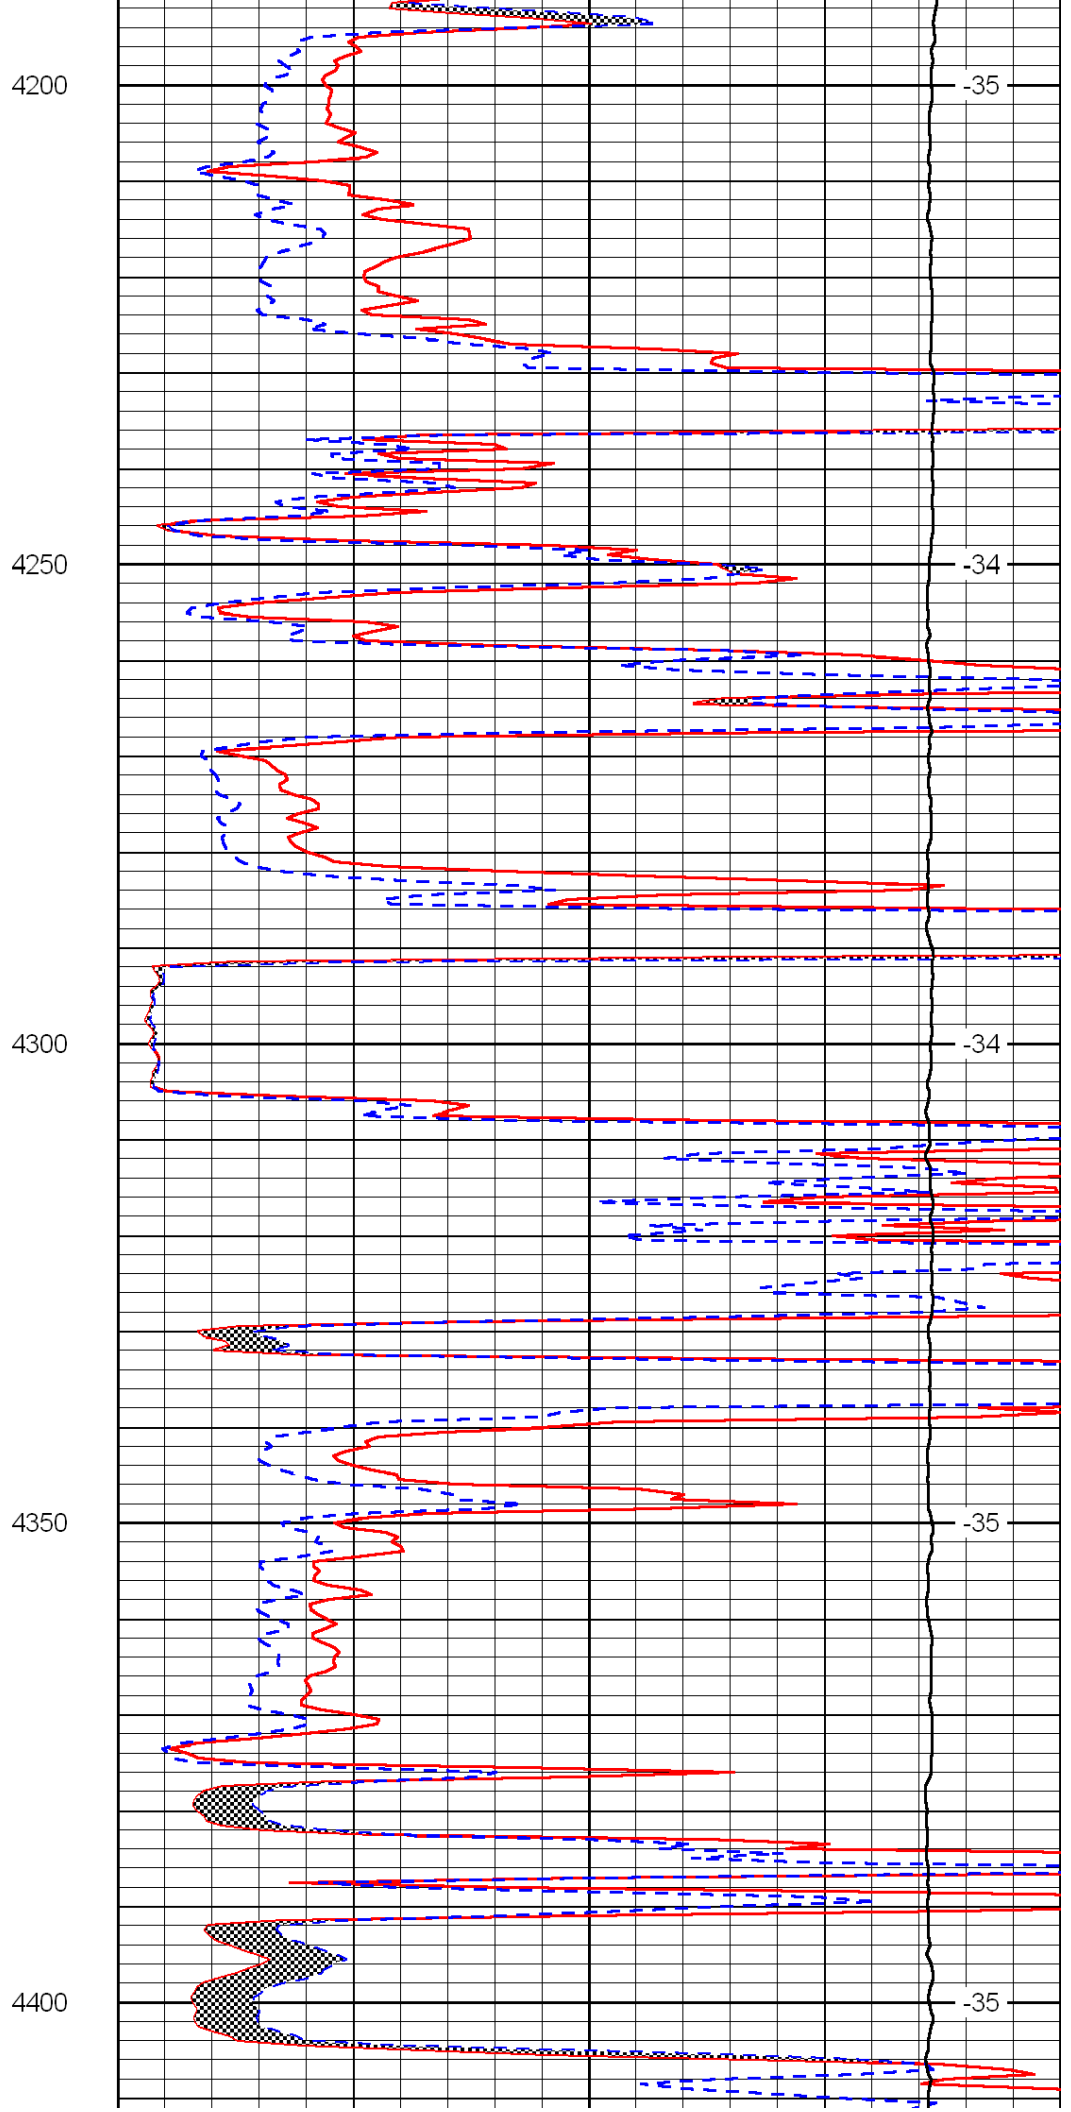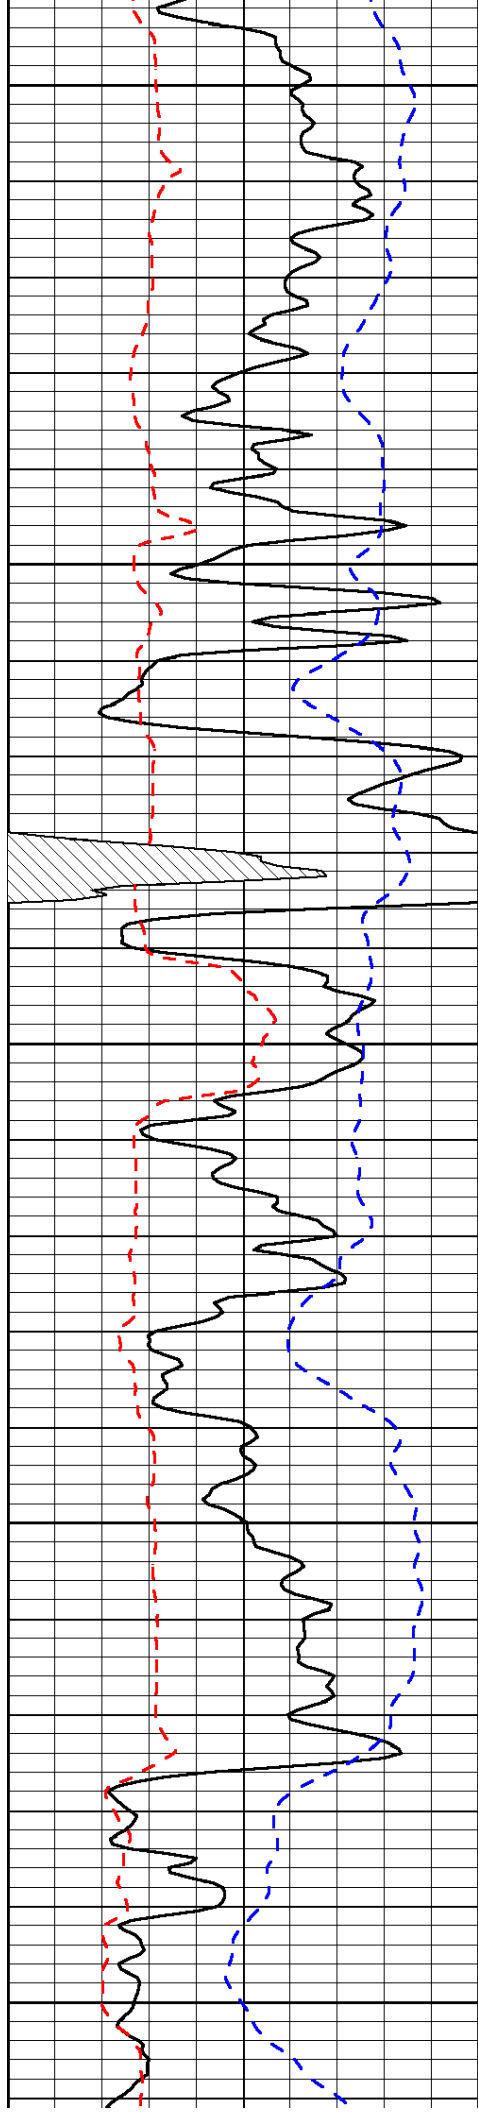

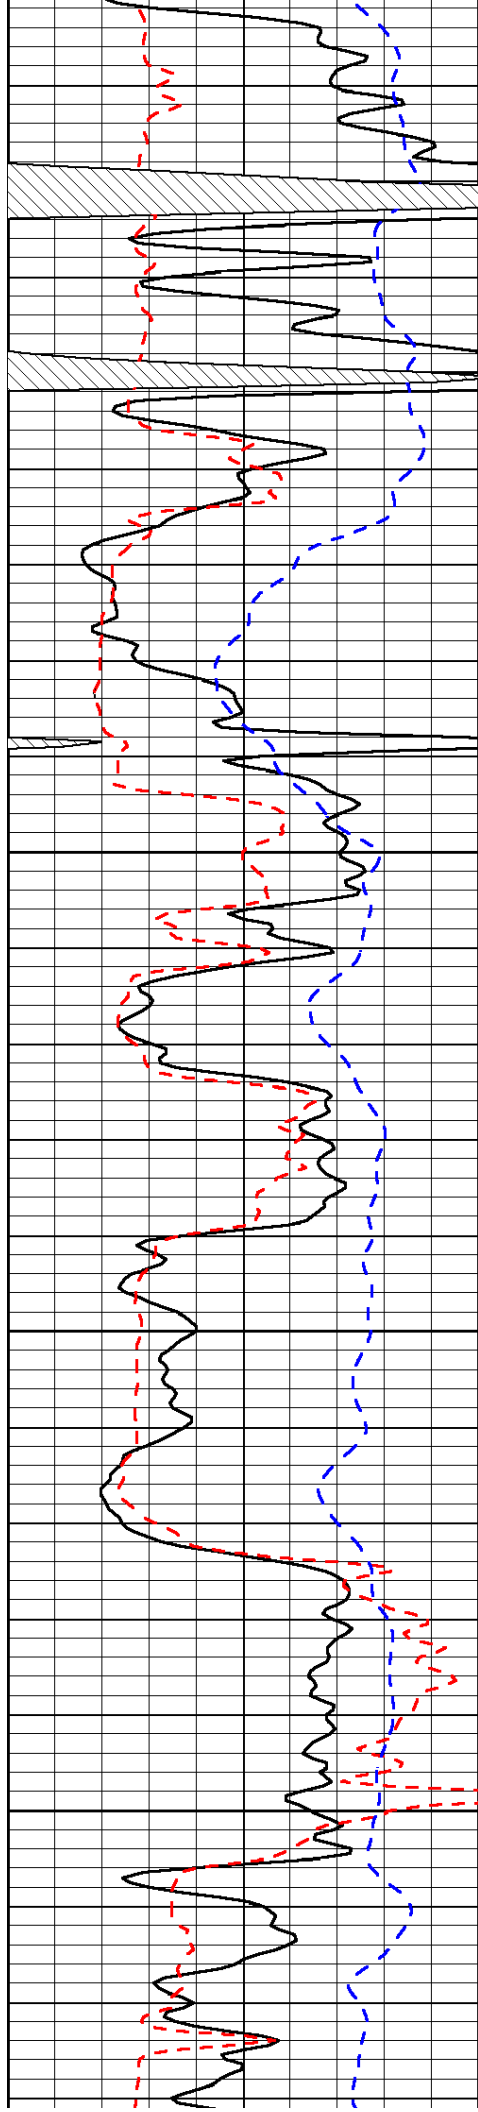



4450

4500

4550

4600

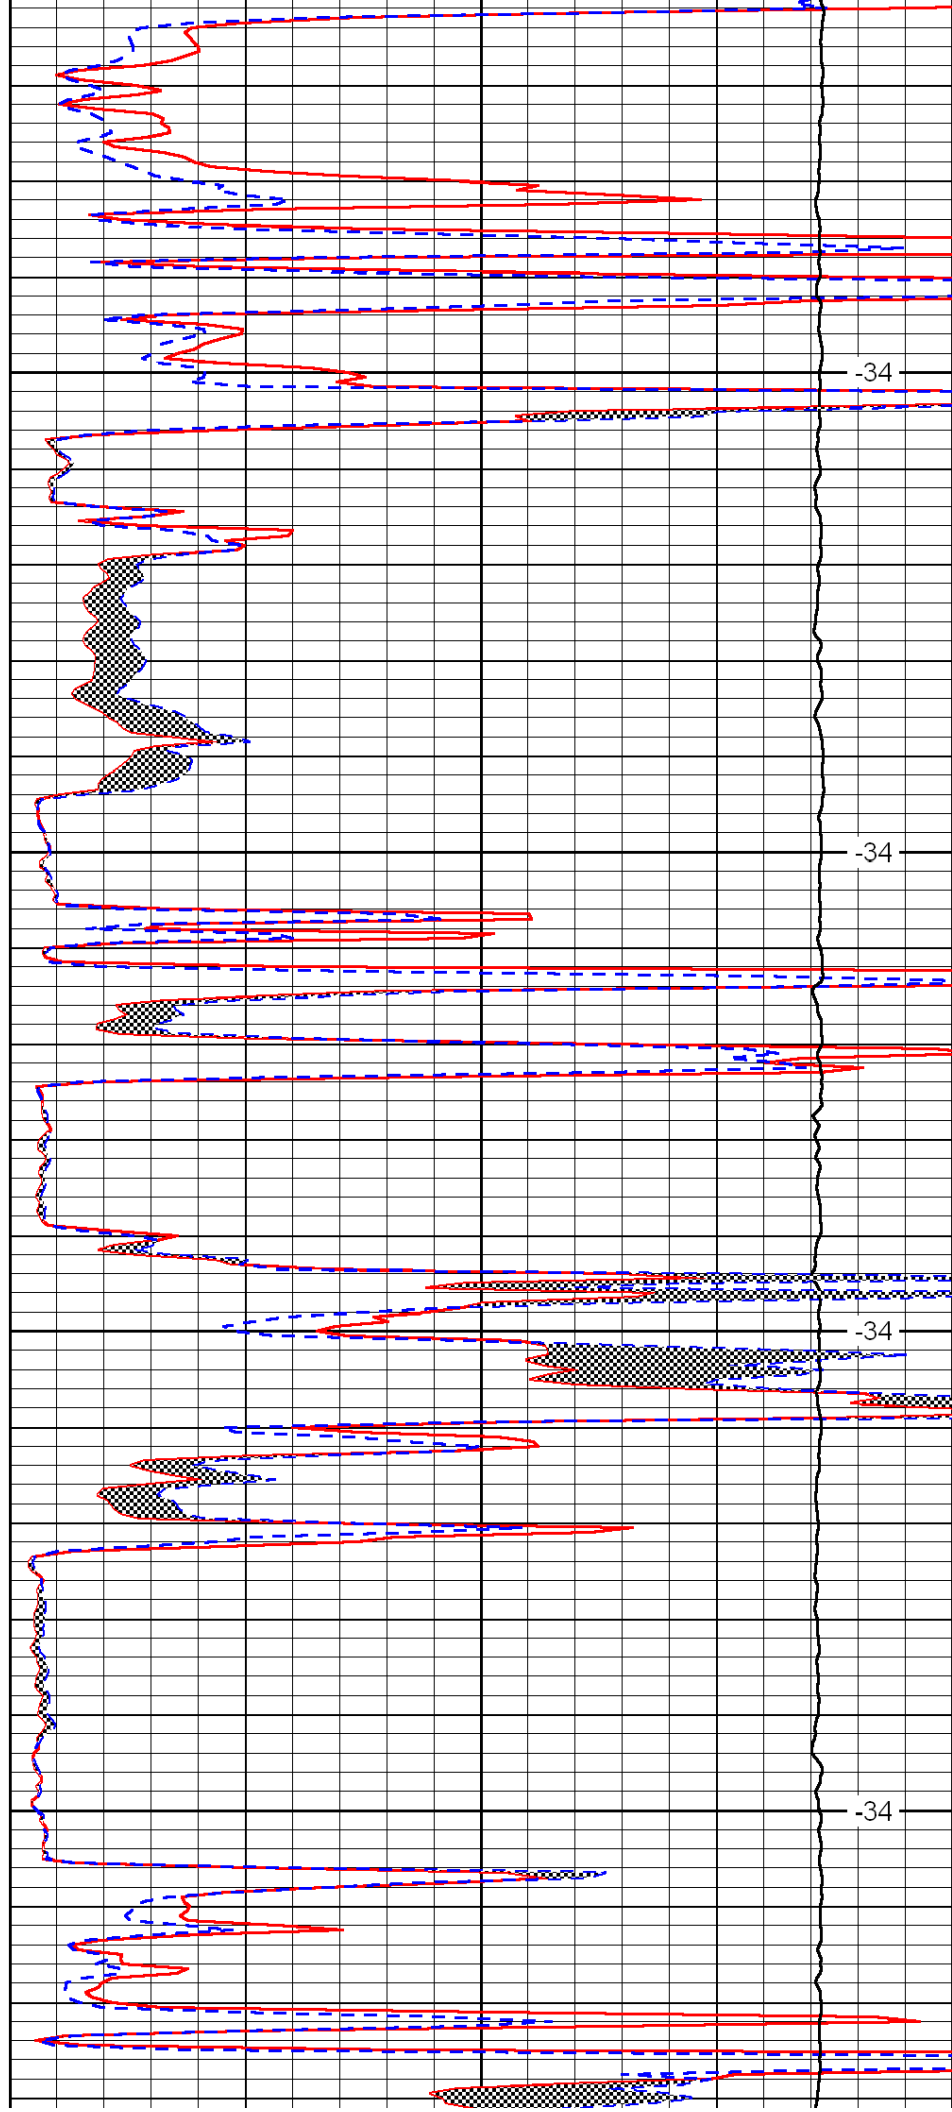

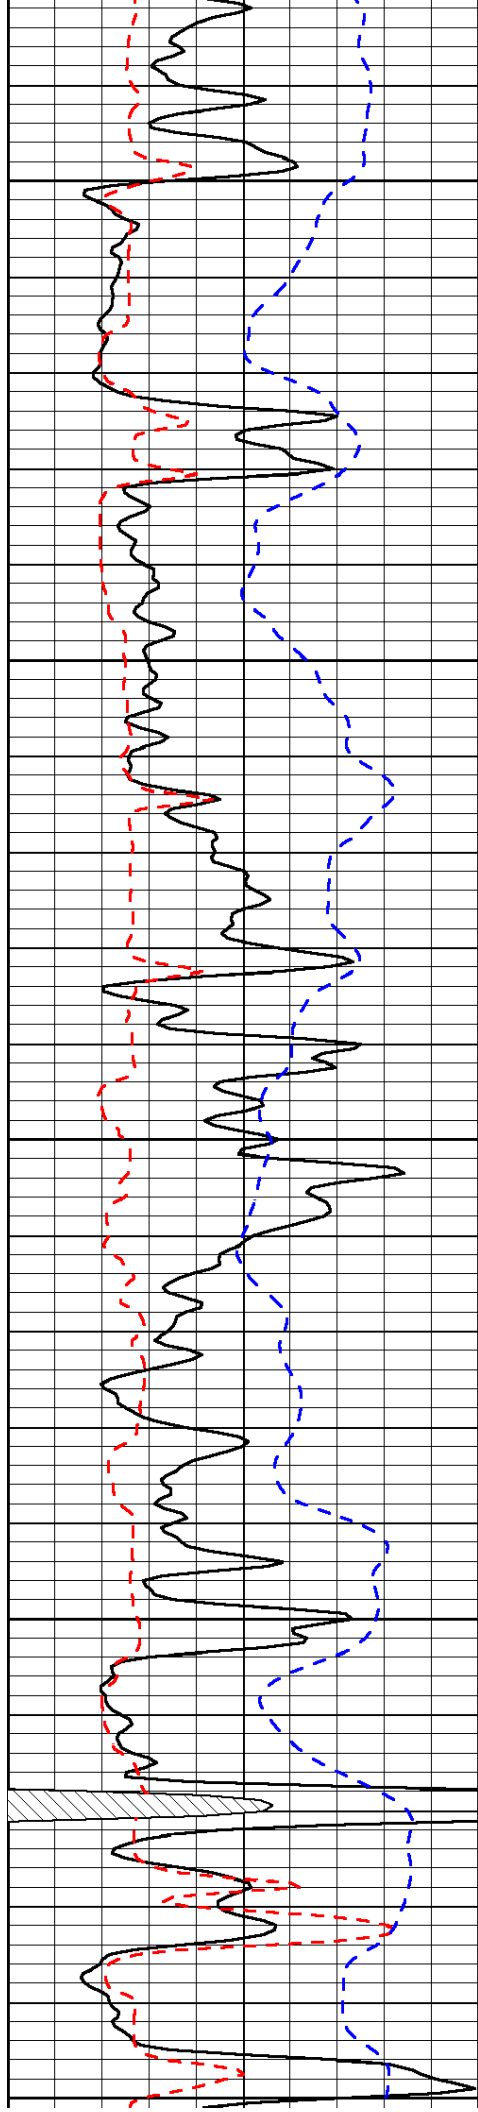

4650

-34

4700

-33

4750


-33


4800

-34

4850

-33

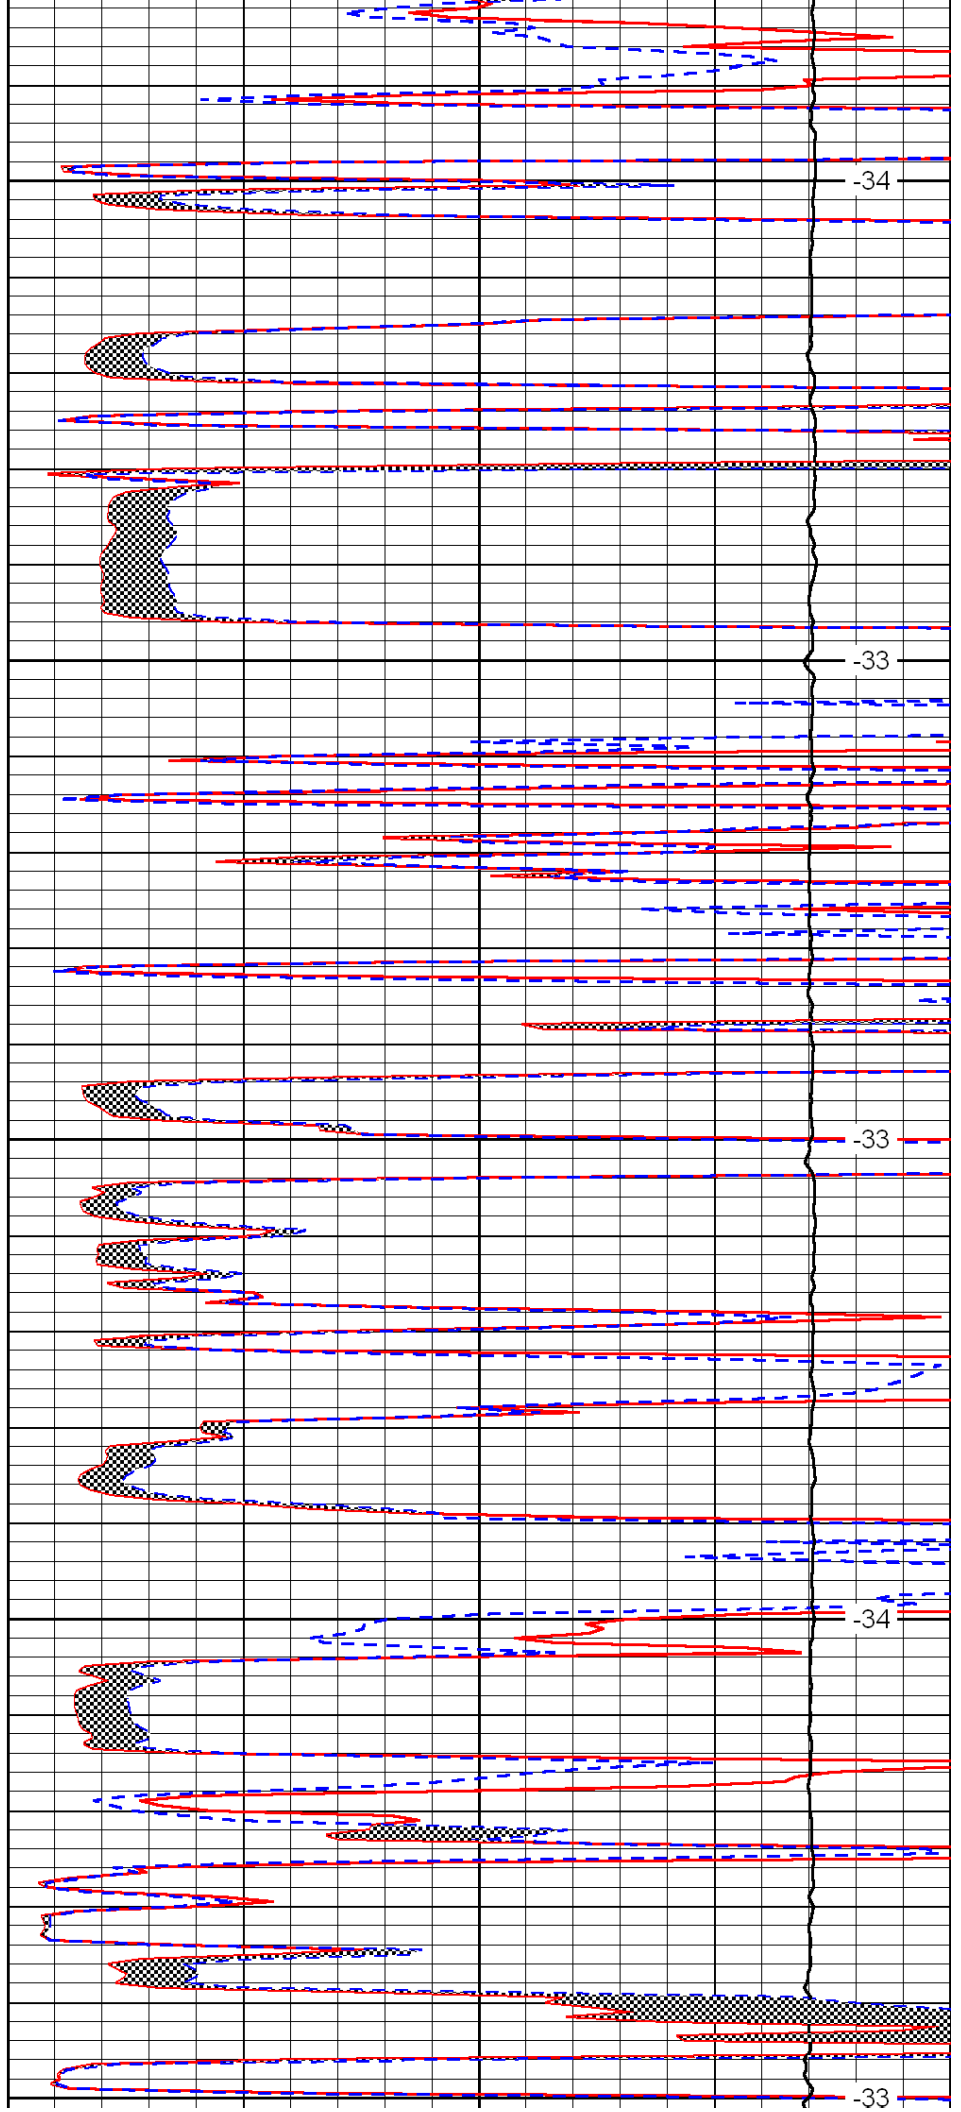

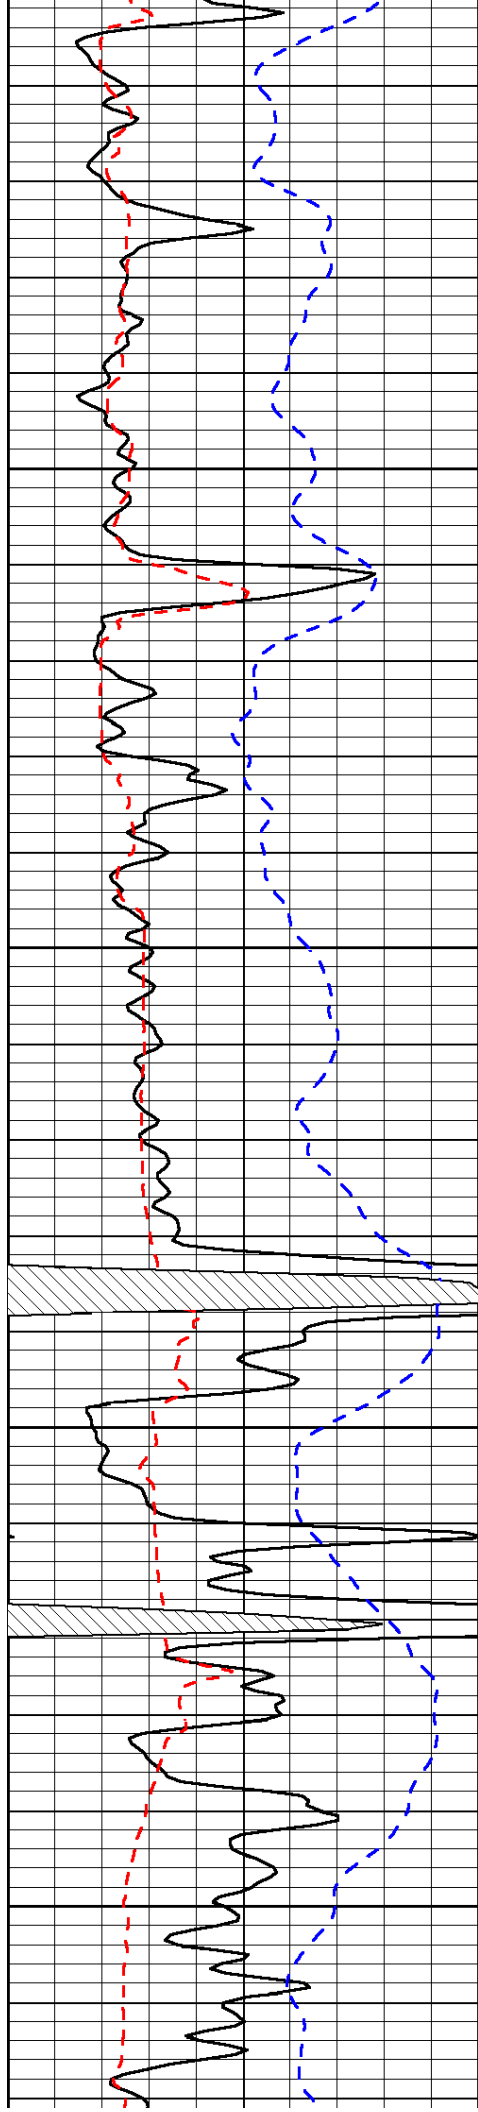



4900

4950

5000

5050

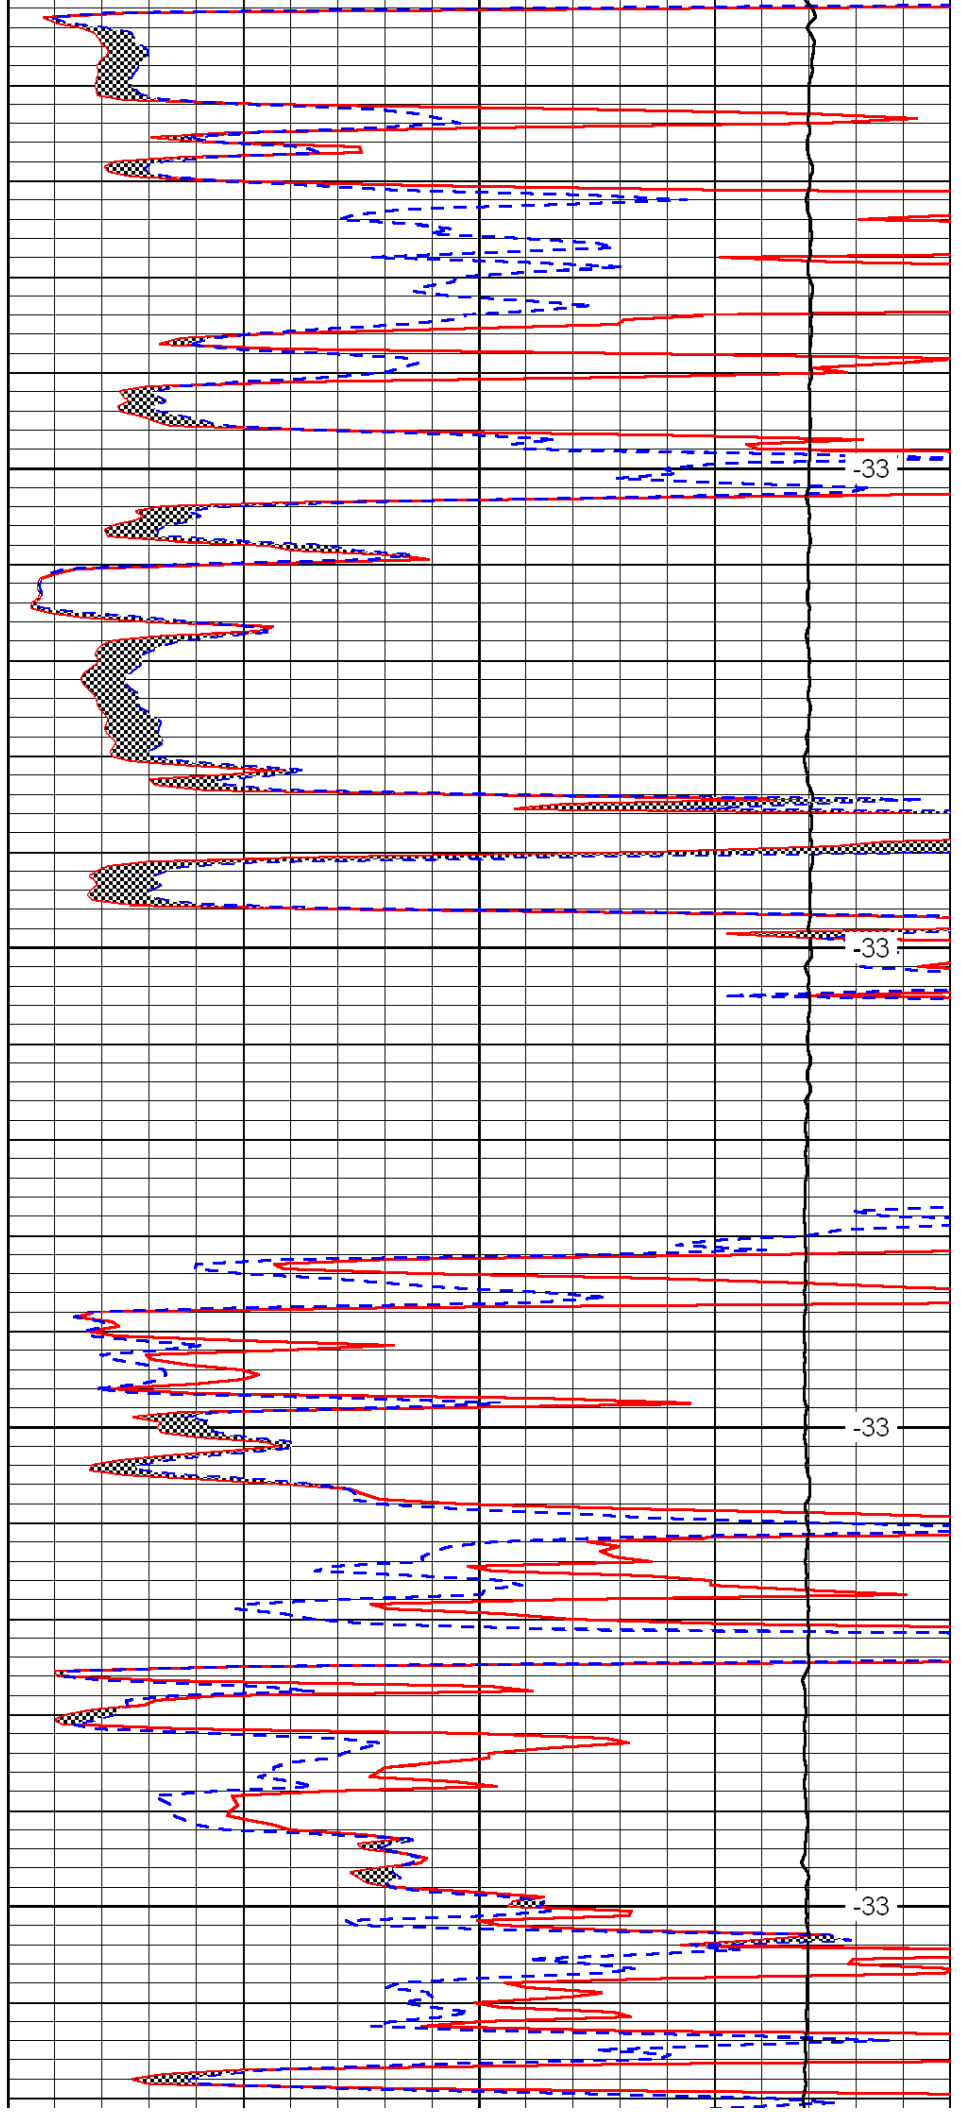

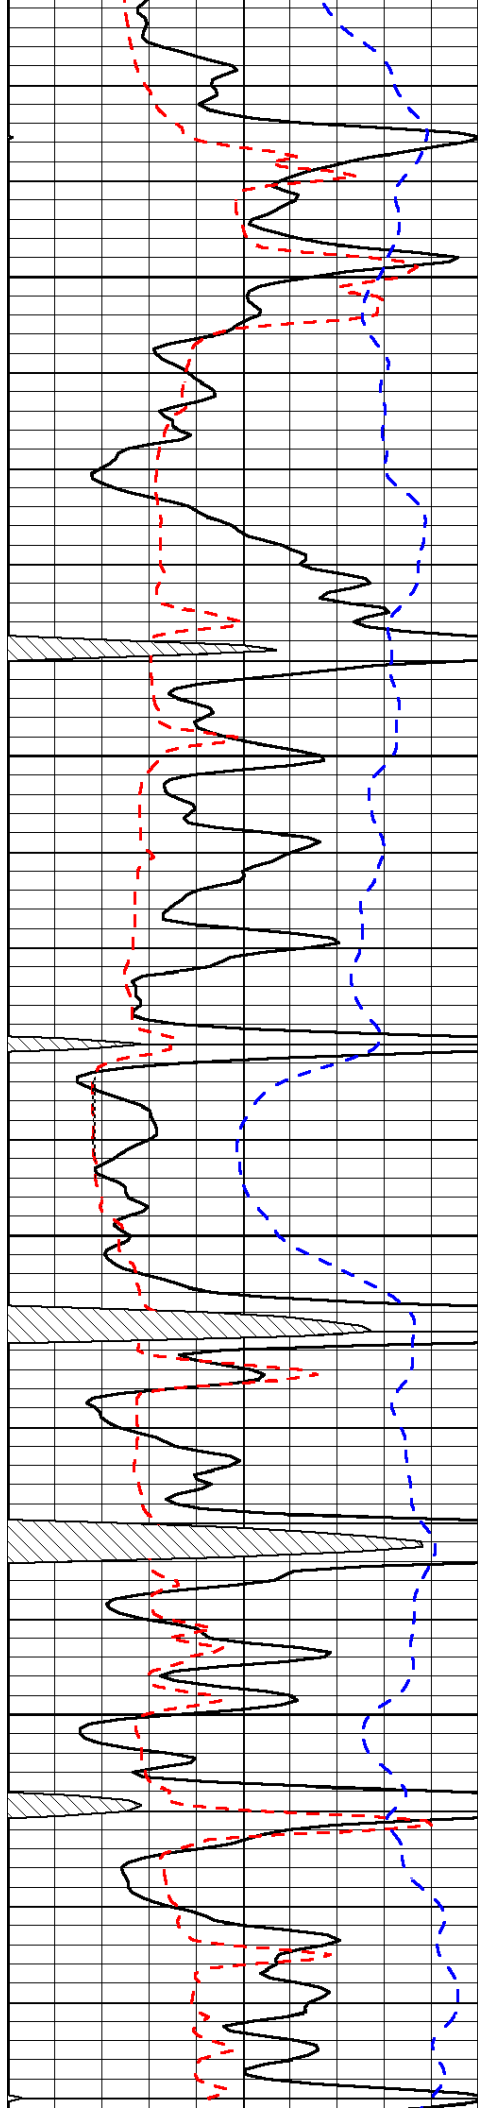


5100

5150

5200

5250

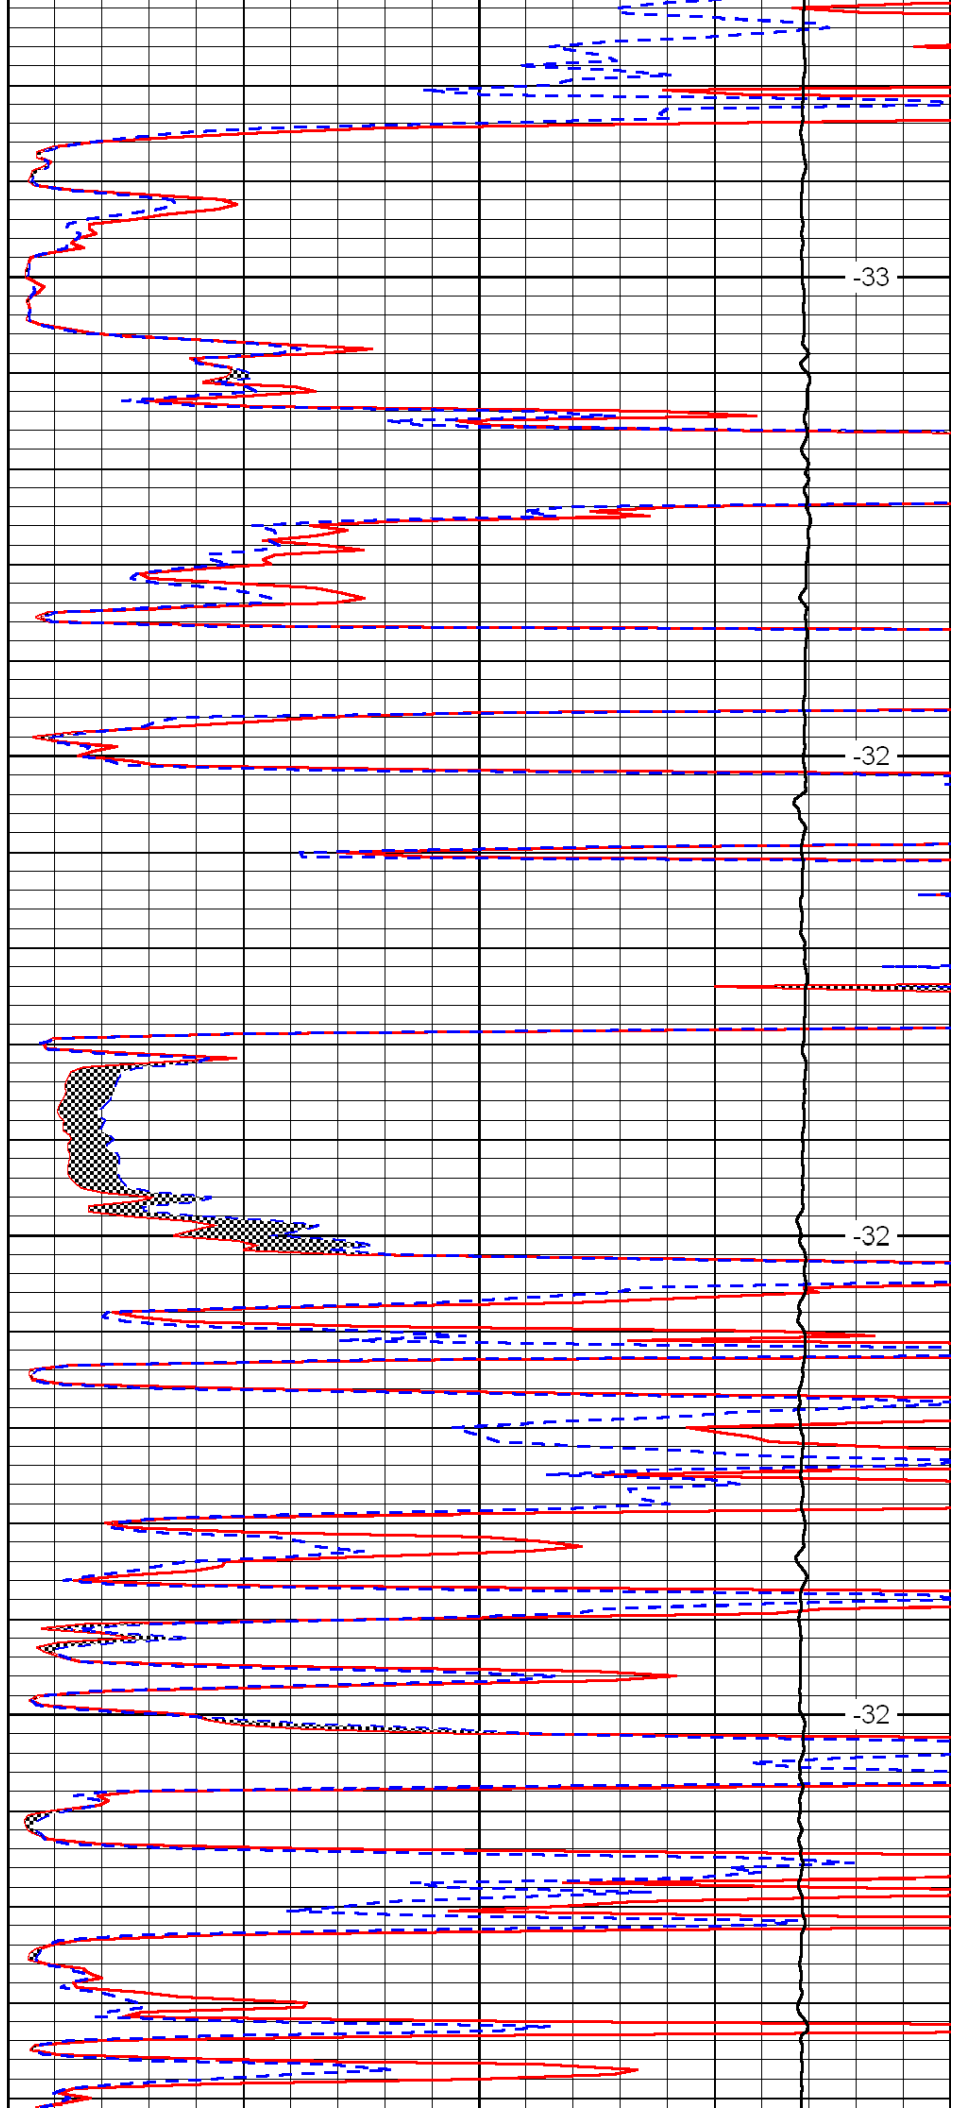


-33

-32

-32

-32

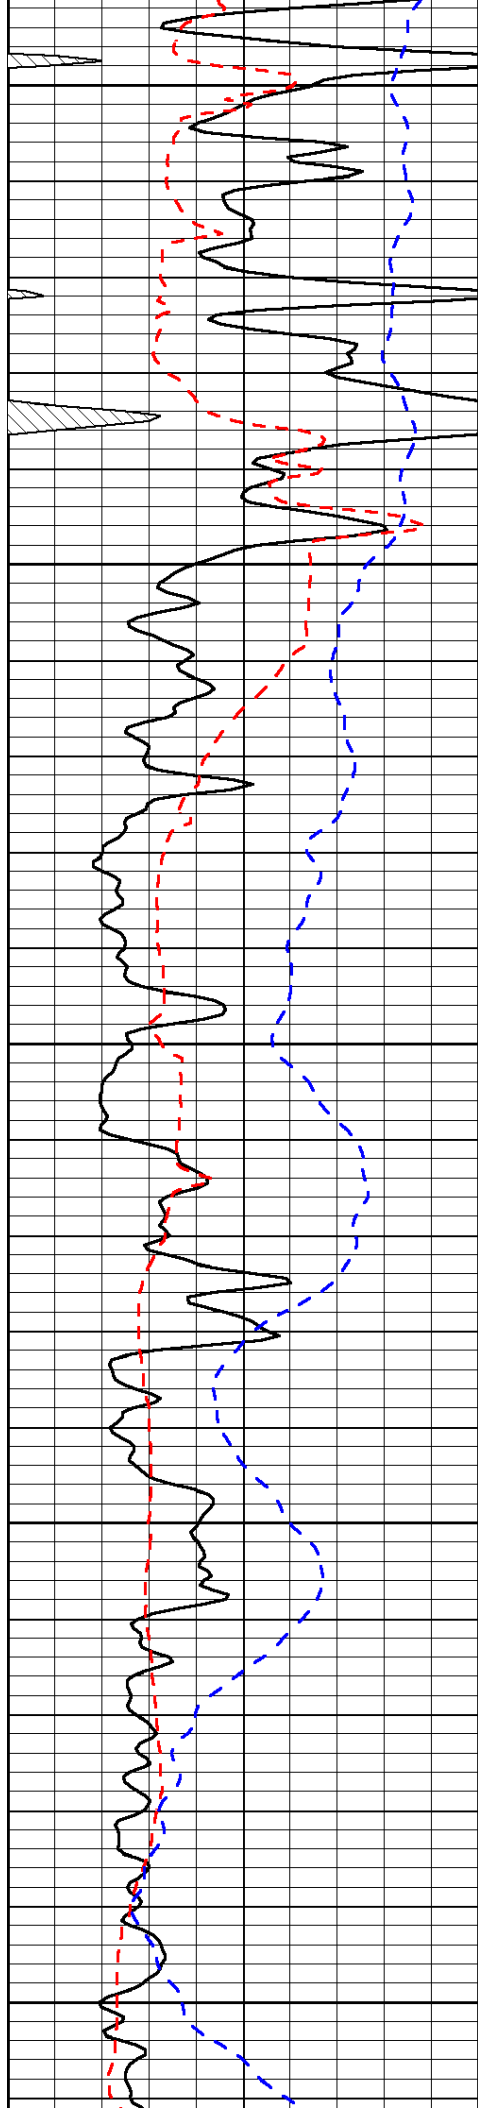


5300


5350

5400

5450

5500

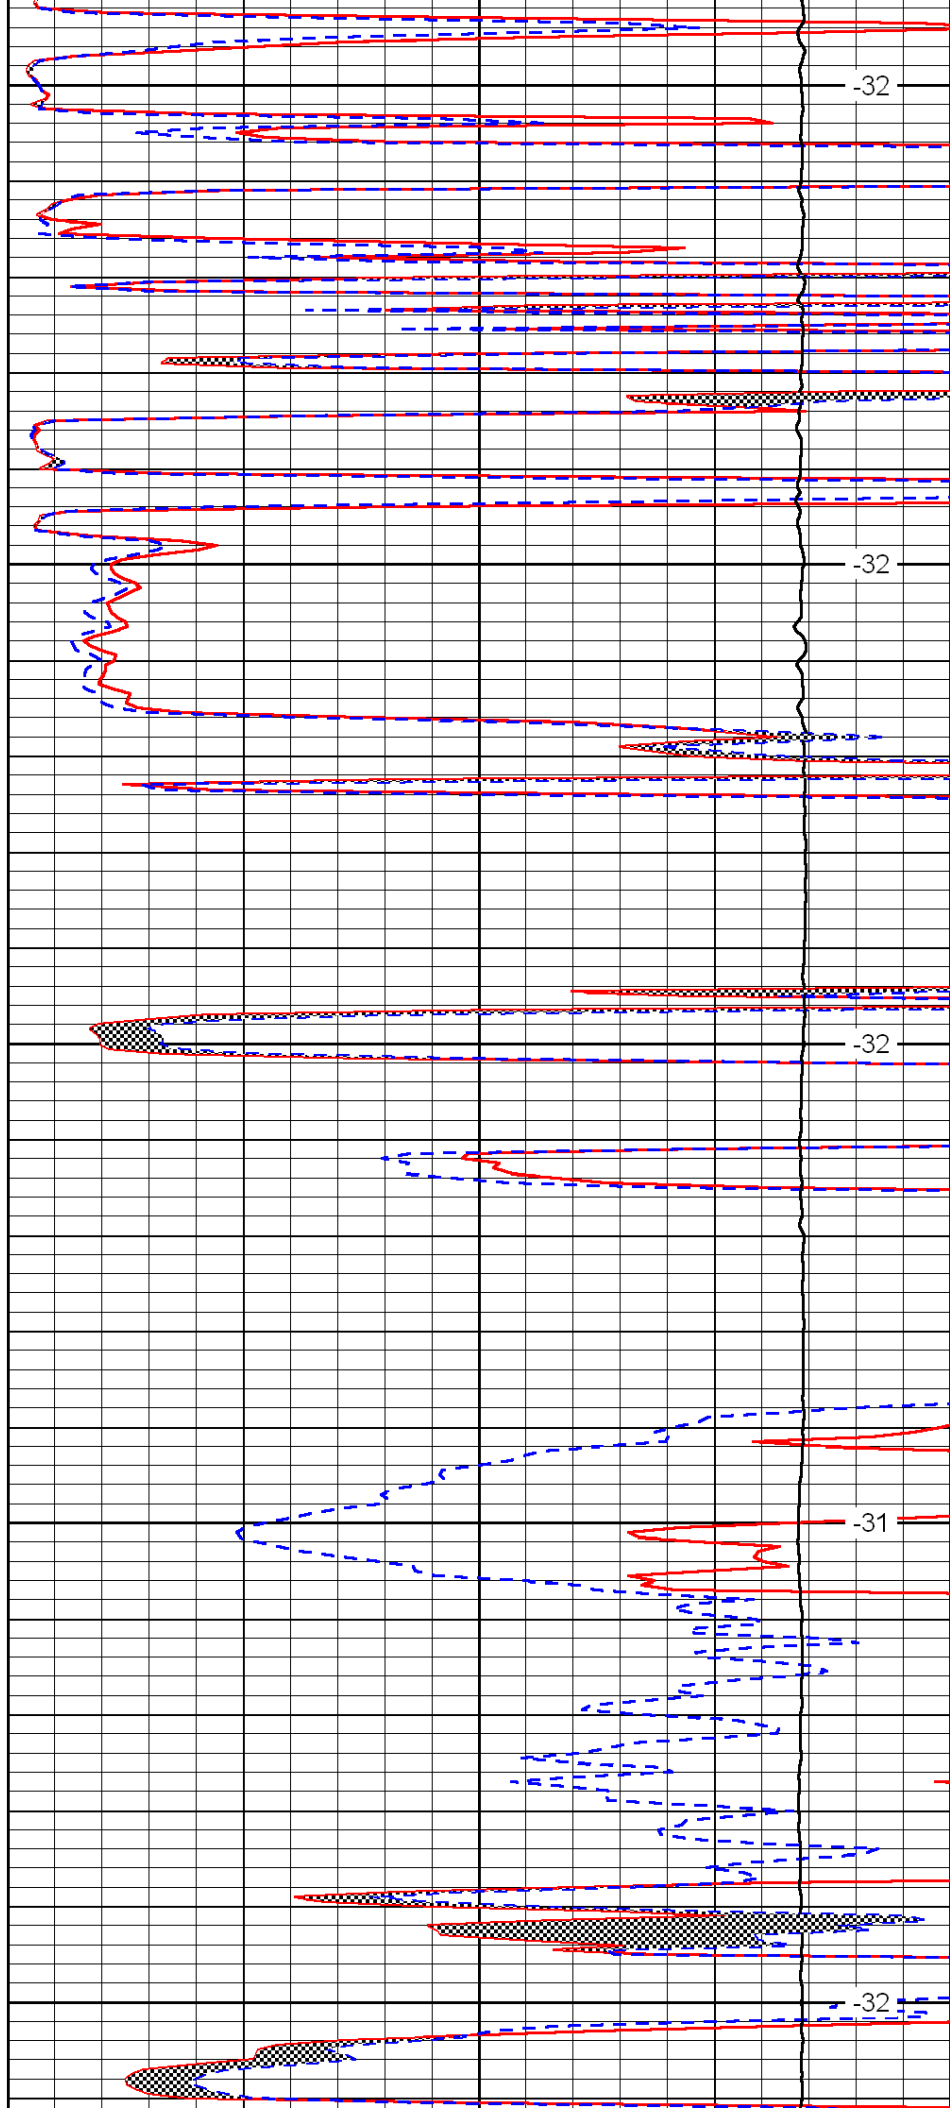

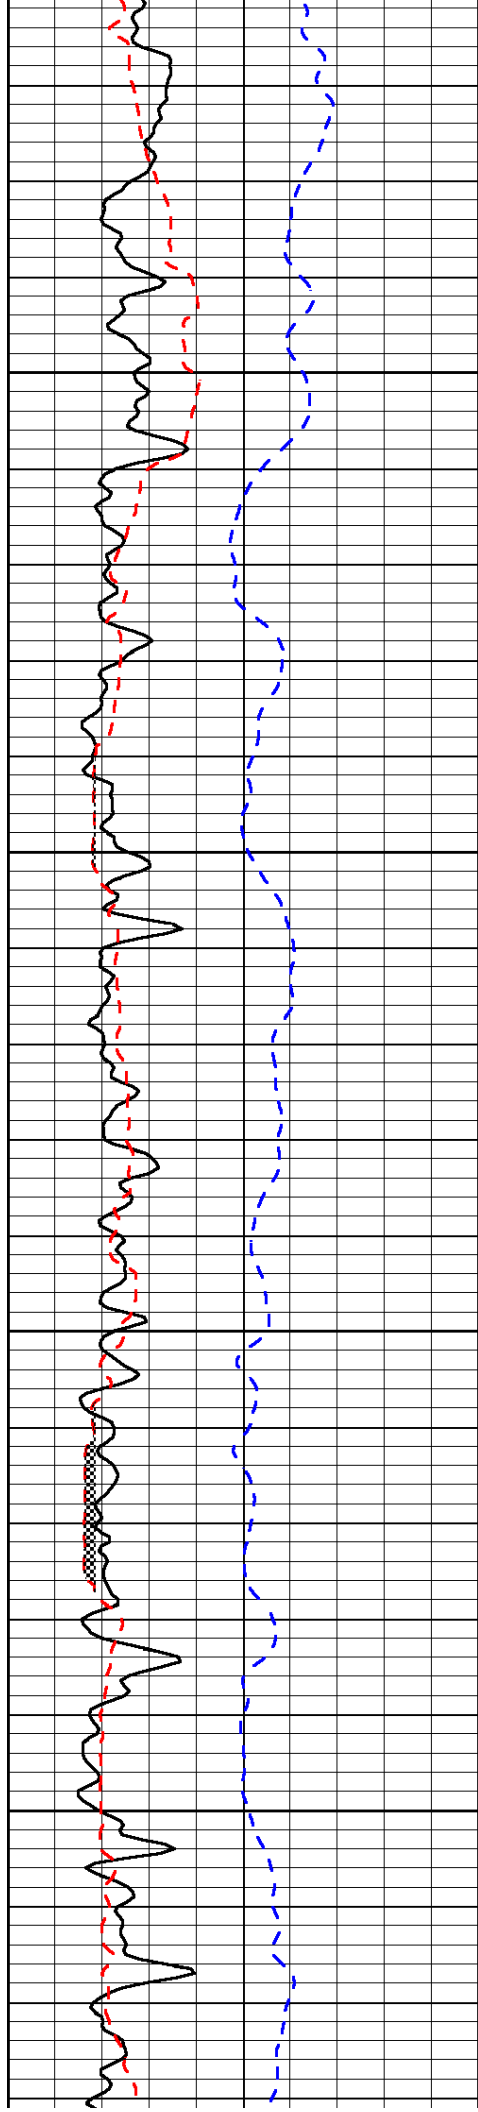



5550

5600

5650

5700

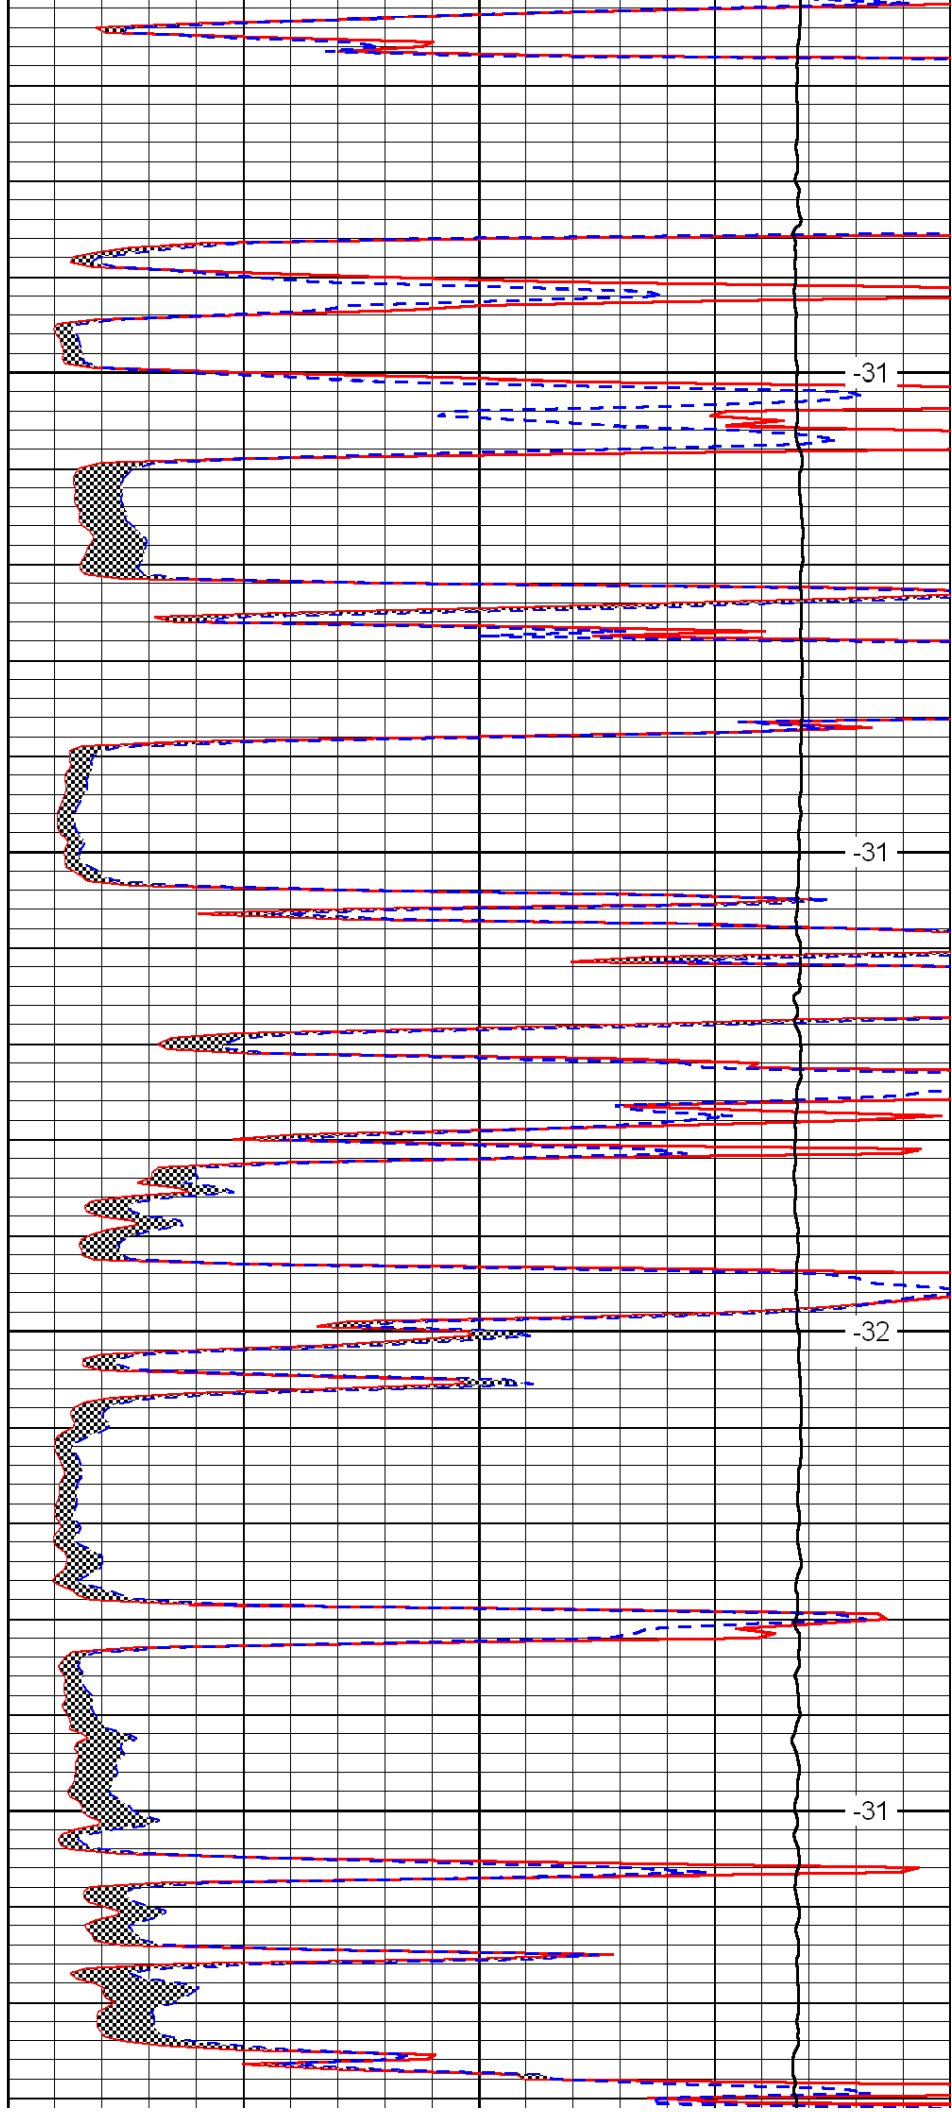

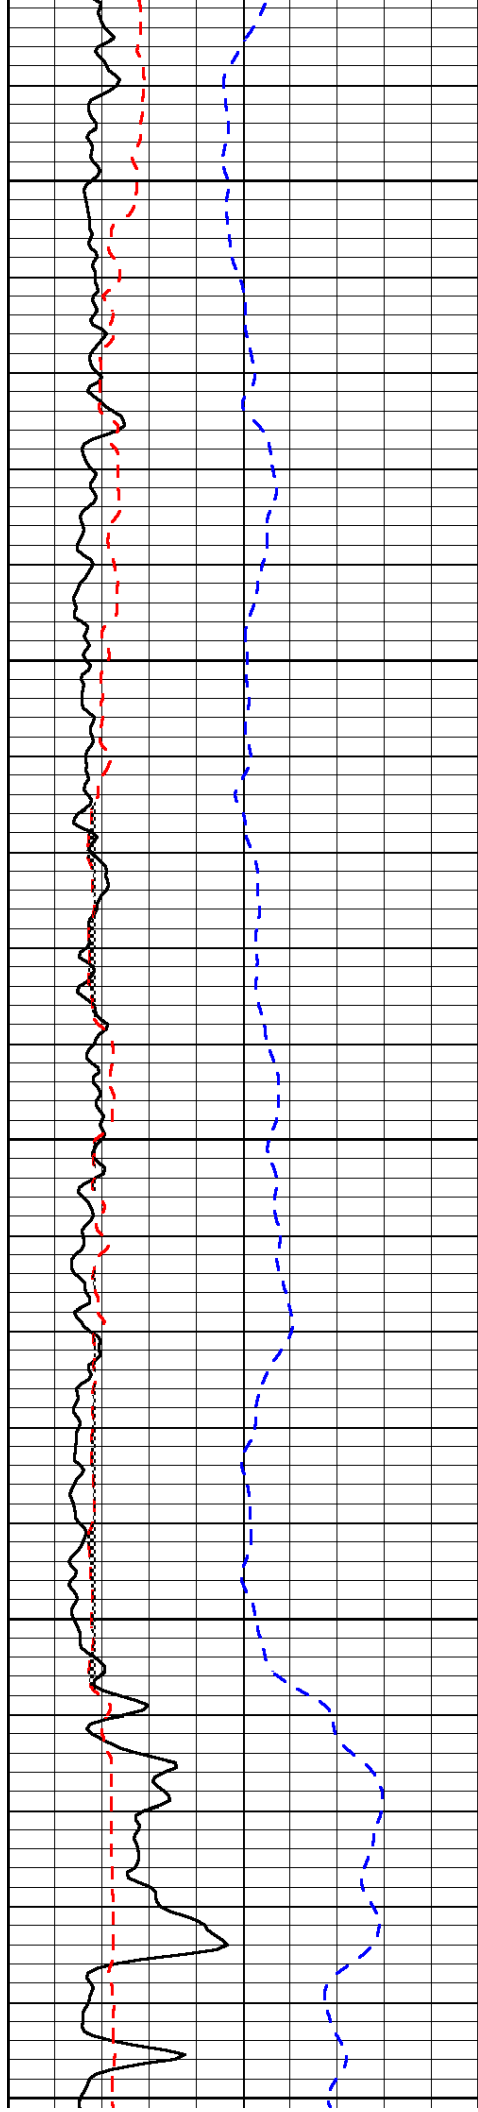


5750

5800

5850

5900

5950

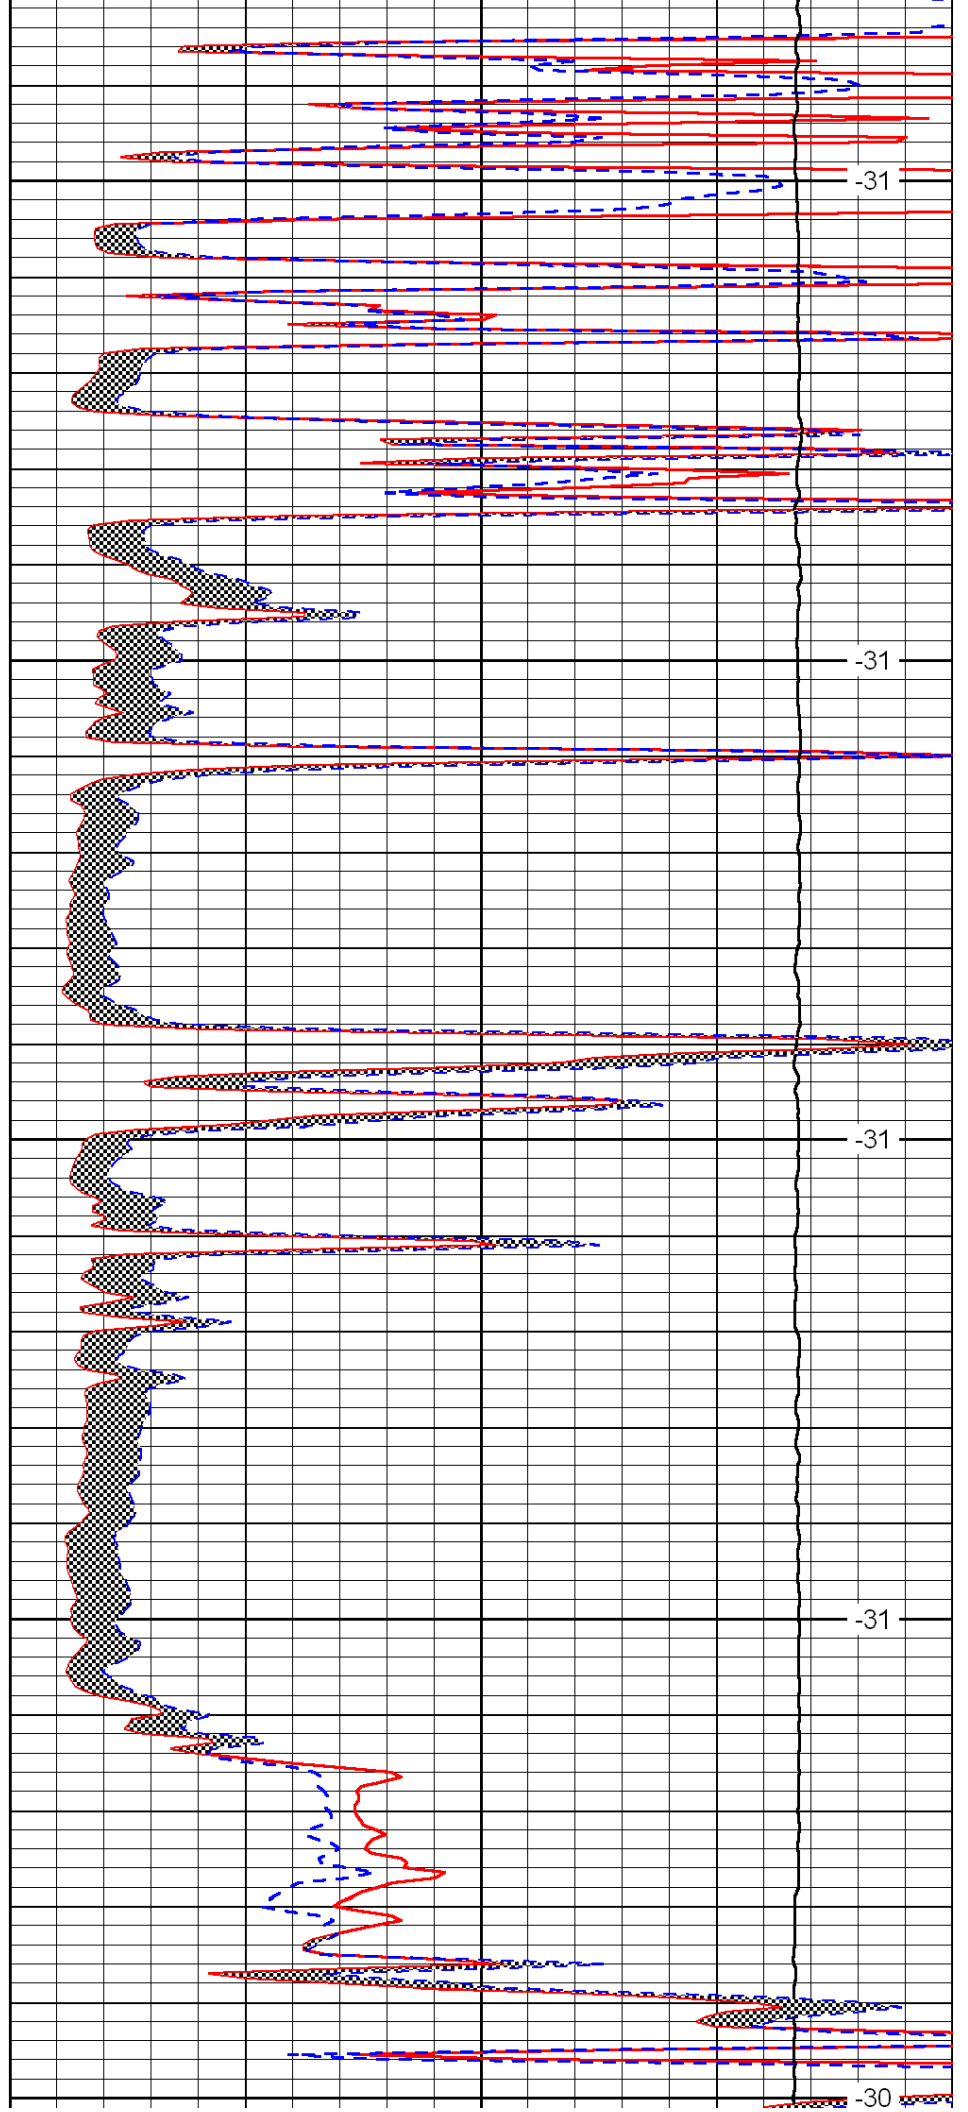



-31

-31

-31

-31

-30

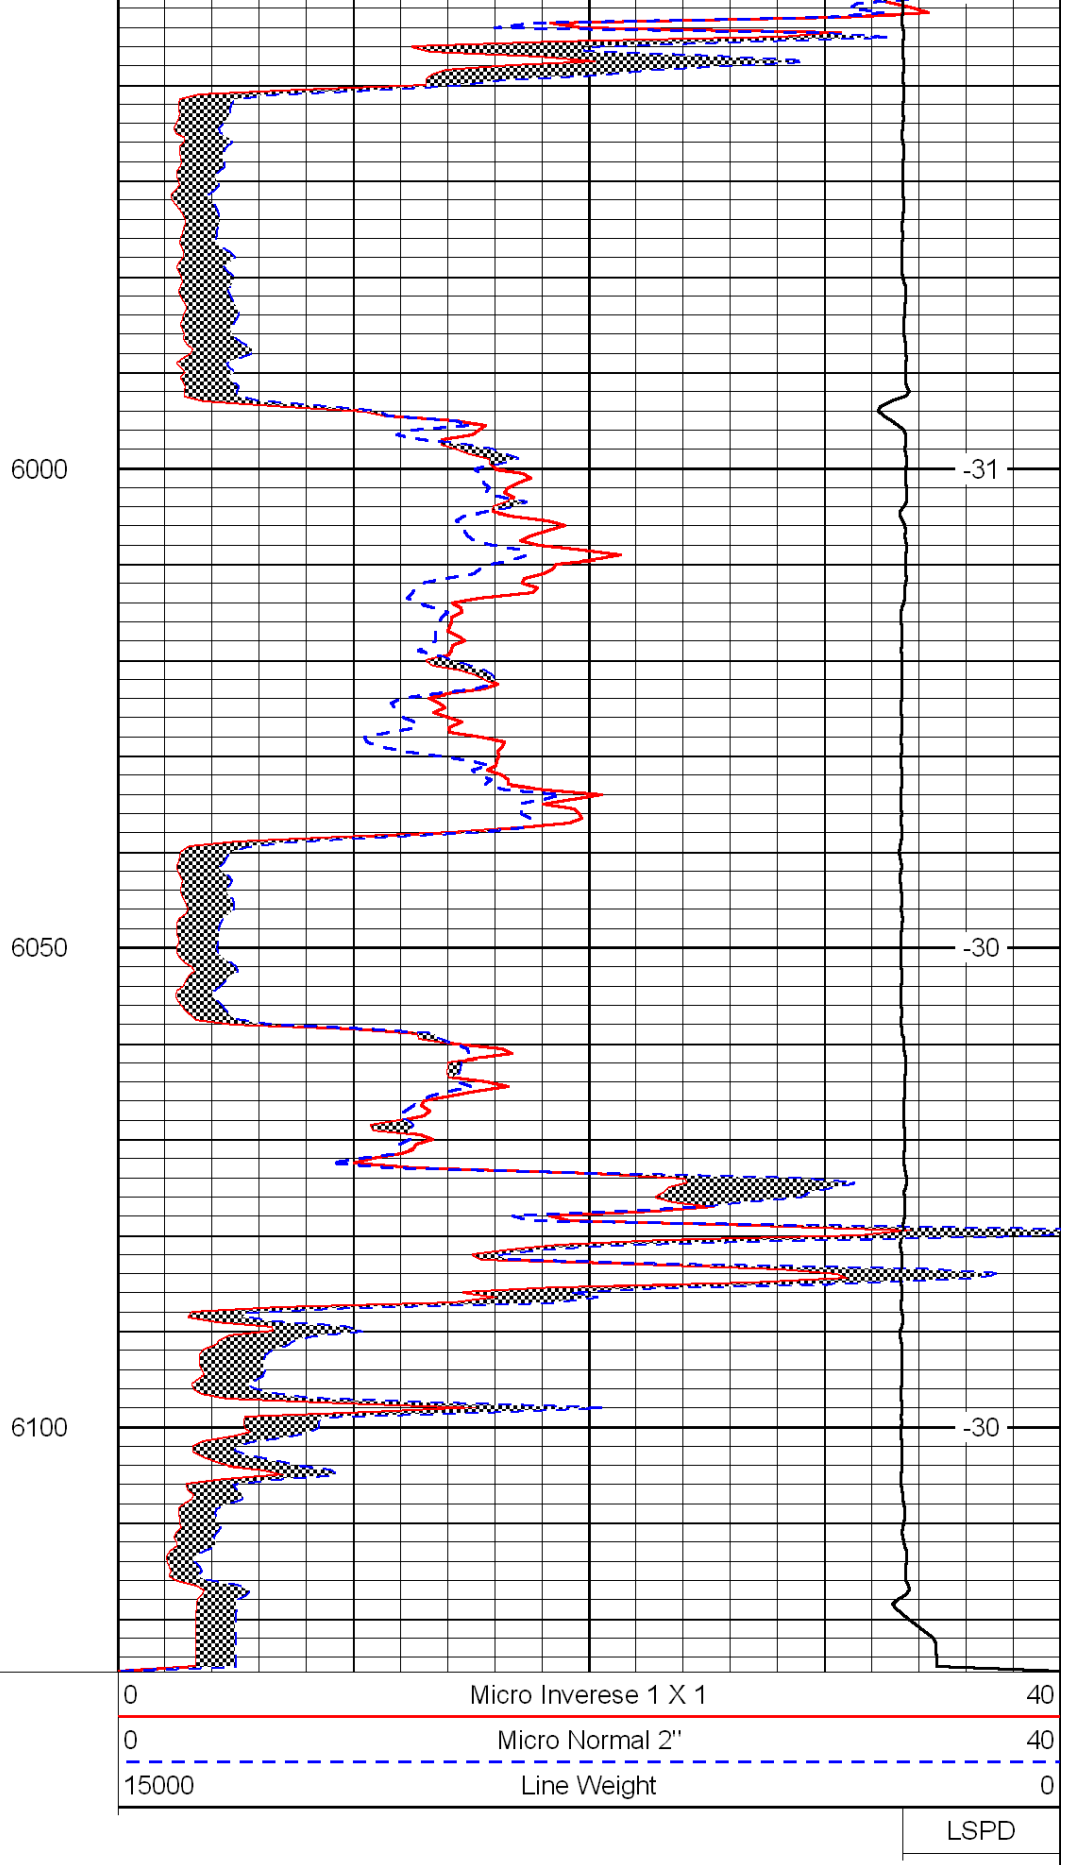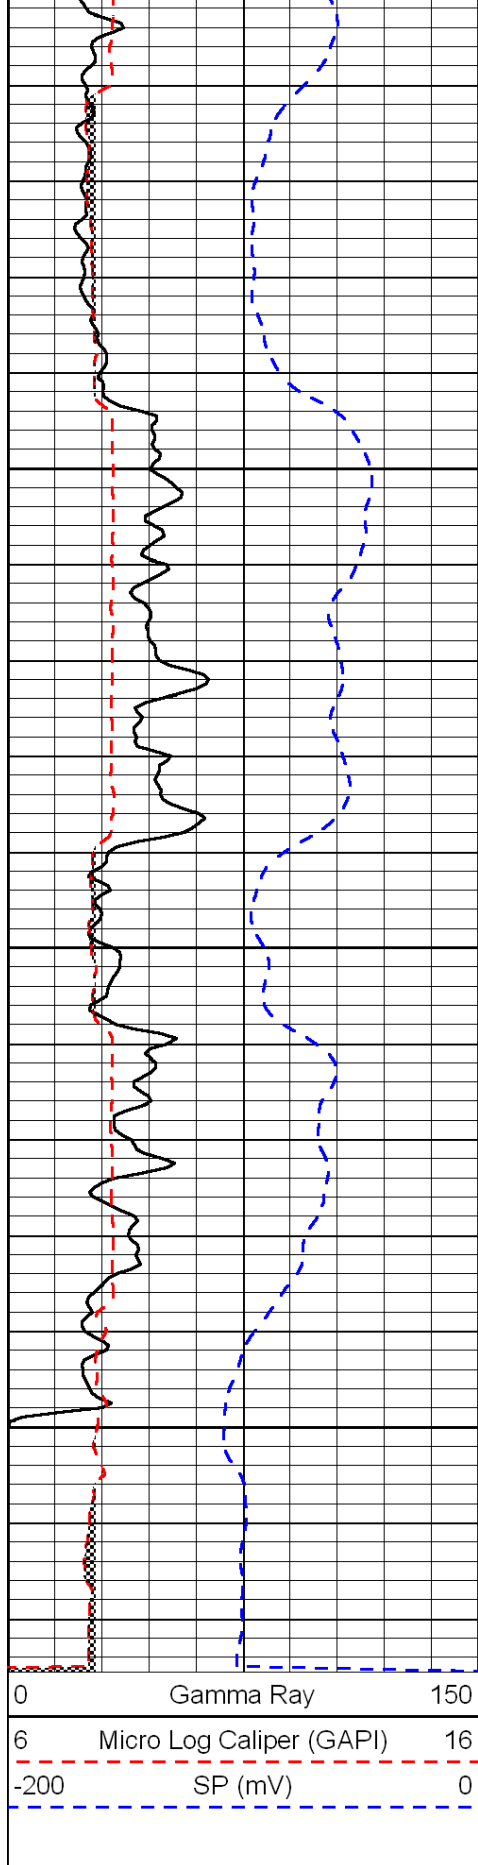

LSPD