



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-007-23900-00-00

Company White Exploration, Inc.

Well Ash #3

Field Medicine Lodge North

County Barber State Kansas

Location 340' FSL / 655' FWL

Sec: 27

Twp: 32S Rge: 12W

Other Services
CNL/CDL
DIL/BHCS

Elevation

Permanent Datum Ground Level Elevation 1619
Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 1627
D.F.
G.L. 1619

Date 7/7/2012

Run Number Two

Depth Driller 4950

Depth Logger 4947

Bottom Logged Interval 4946

Top Log Interval 3000

Casing Driller 8.625 @ 270

Casing Logger 262

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 5000

Density / Viscosity 9.4 57

pH / Fluid Loss 10.0 10.8

Source of Sample Flowline

Rm @ Meas. Temp 0.79 @ 90

Rmf @ Meas. Temp 0.59 @ 90

Rmc @ Meas. Temp 1.07 @ 90

Source of Rmf / Rmc Charts

Rm @ BHT 0.57 @ 126

Operating Rig Time 6 Hours

Max Rec. Temp. F 126

Equipment Number 15

Location Hays

Recorded By R. Barnhart

Witnessed By Bruce Reed

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Medicine Lodge, KS:
2 3/4S, 1 1/2W, thru two CG,
S into

Database File: whiteexplhd.db
Dataset Pathname: dil/whtmain
Presentation Format: micro
Dataset Creation: Sat Jul 07 16:16:48 2012
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

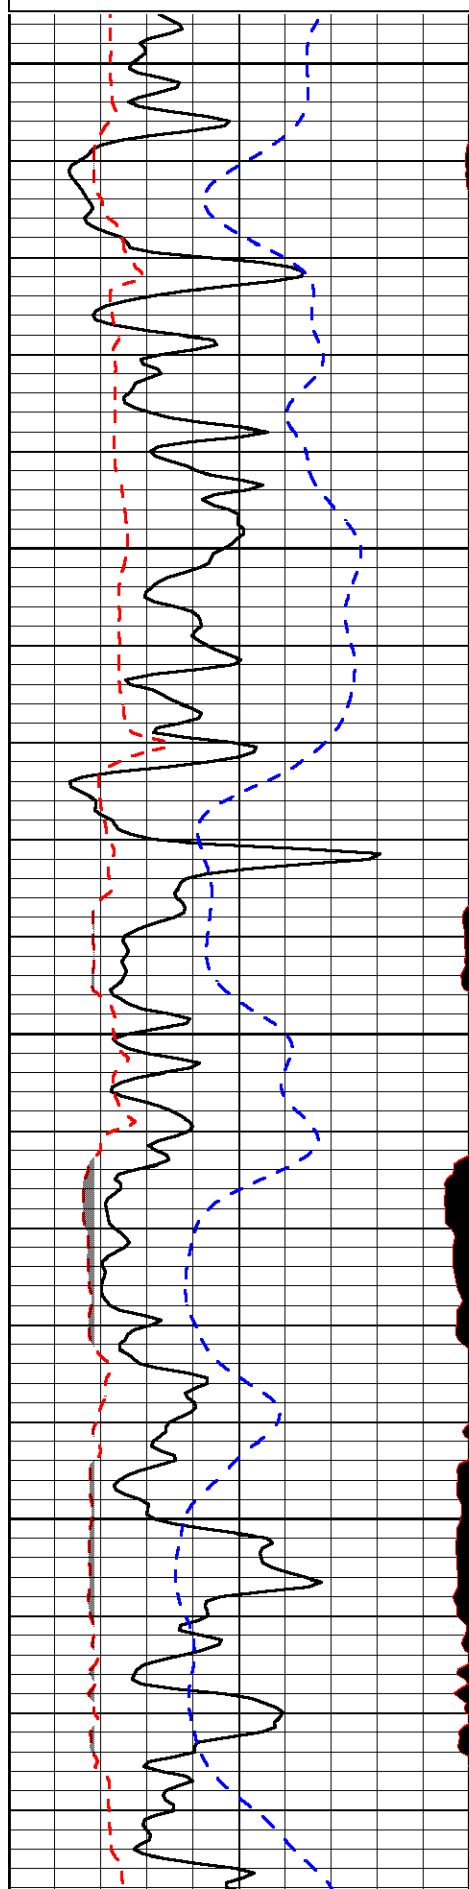

3000


3050

3100

3150

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

LSPD

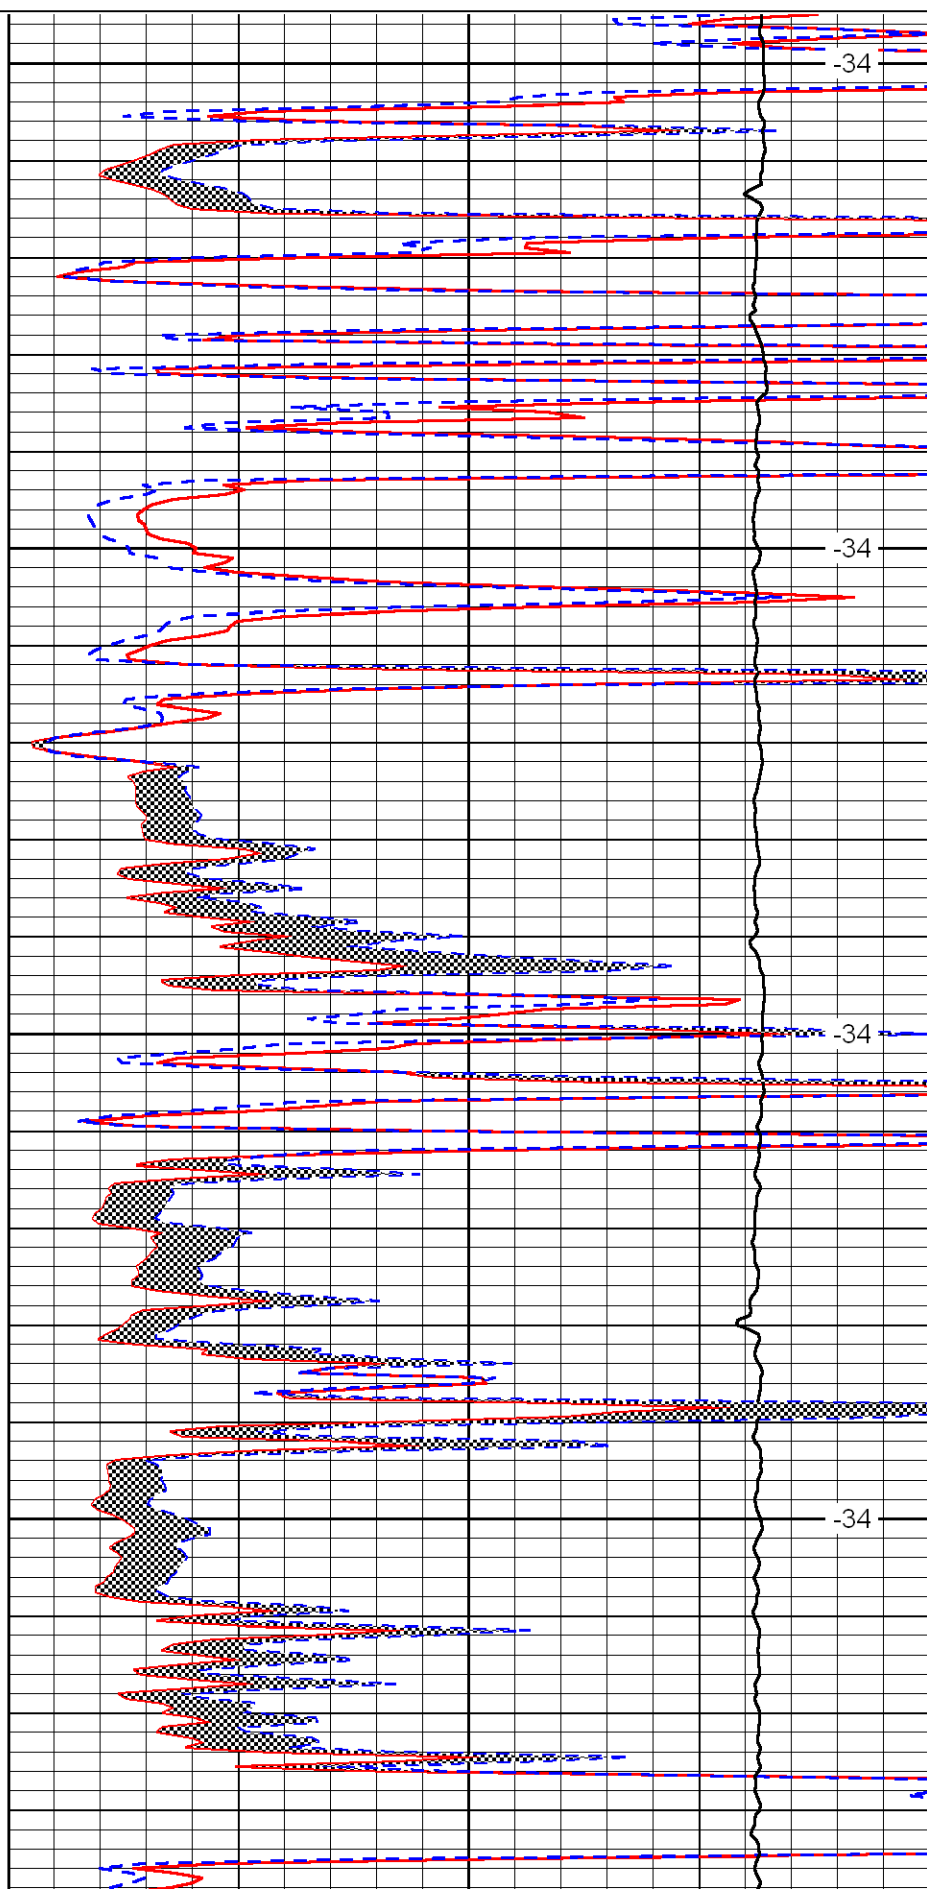


-34

-34

-34

-34

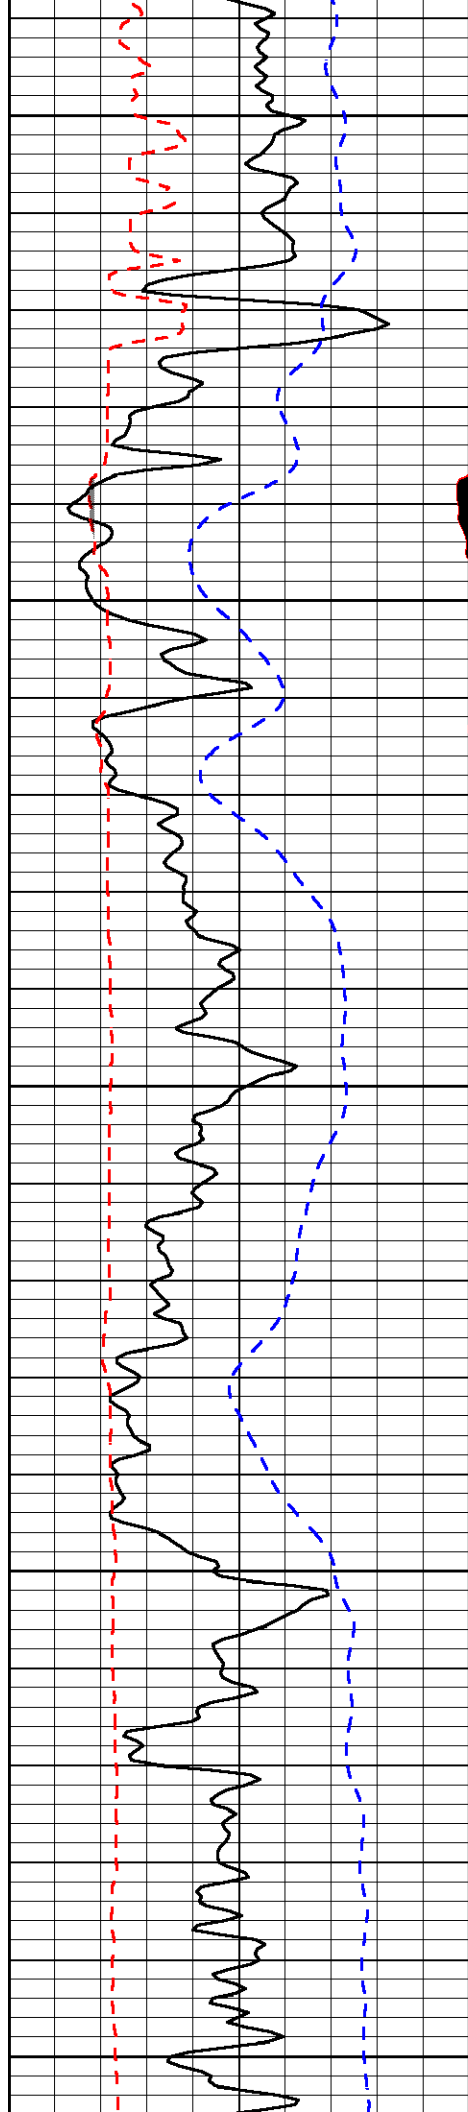


3200

3250

3300

3350

3400

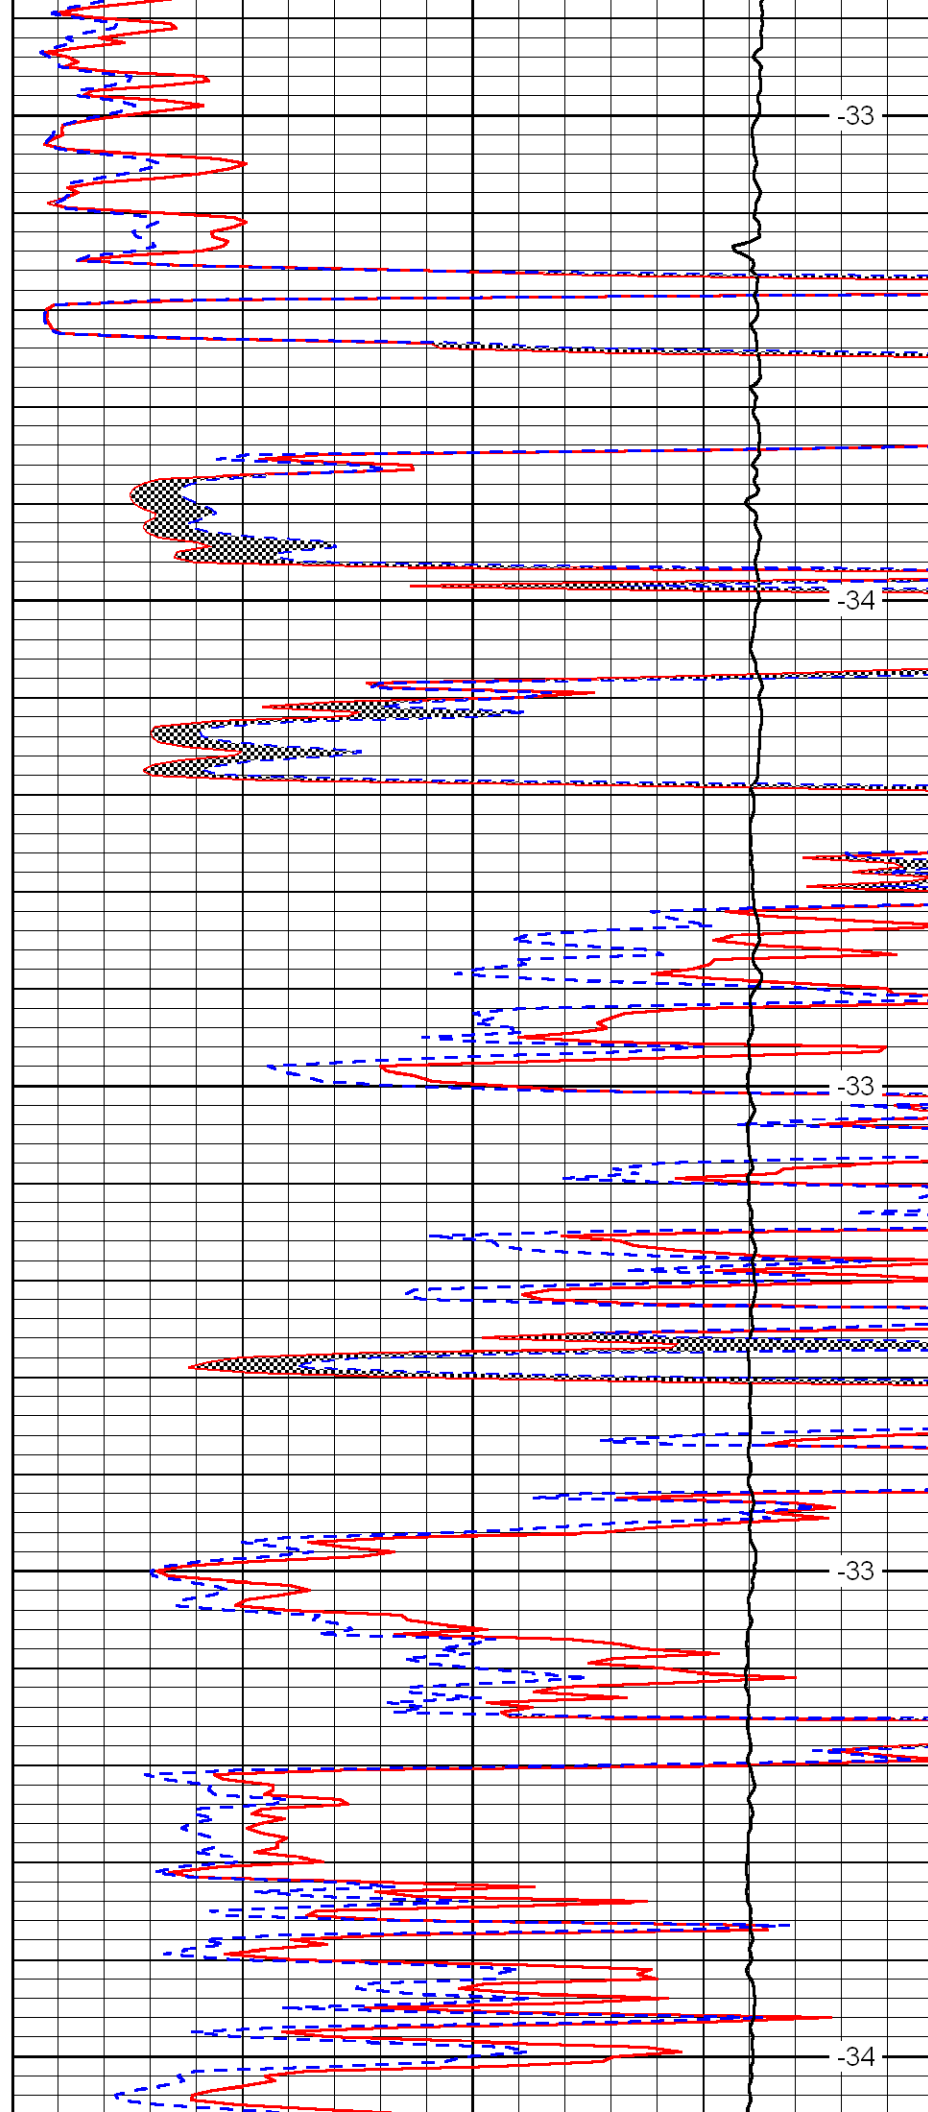


-33

-34

-33

-33

-34

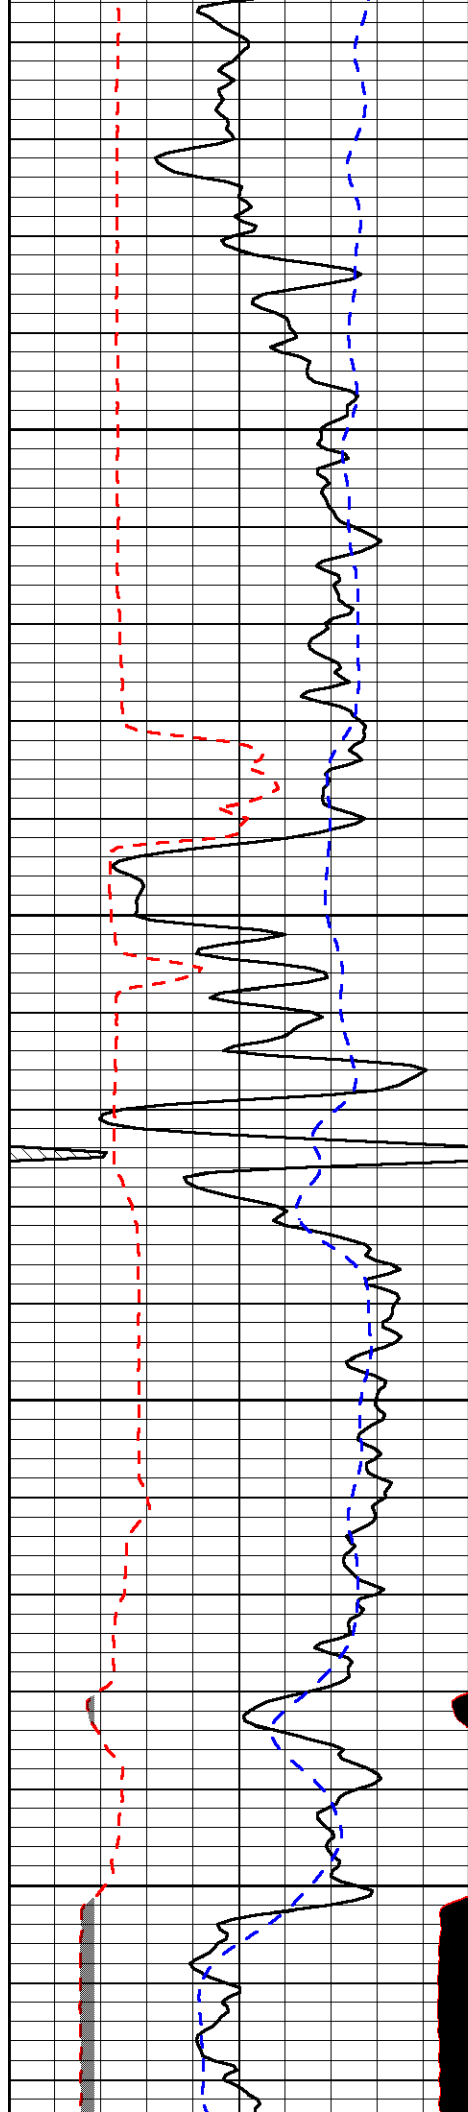


3450

3500

3550

3600

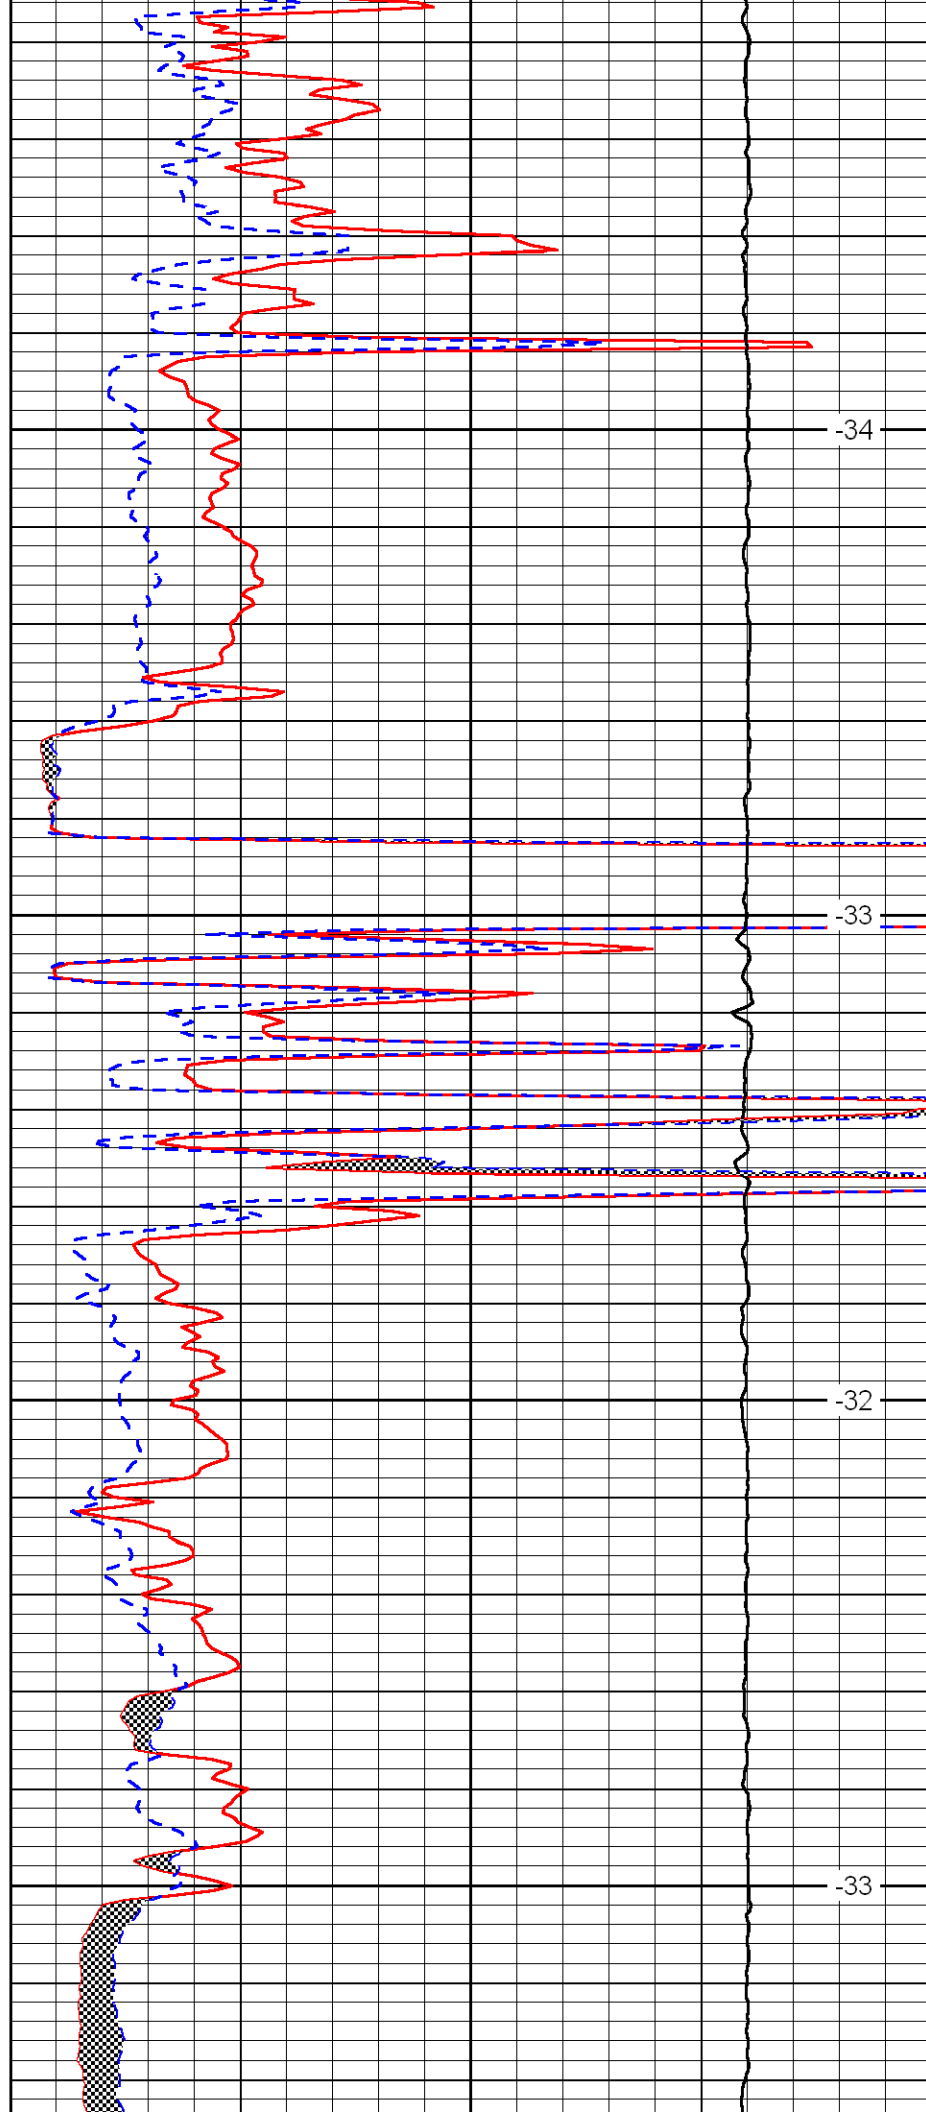


-34

-33

-32

-33

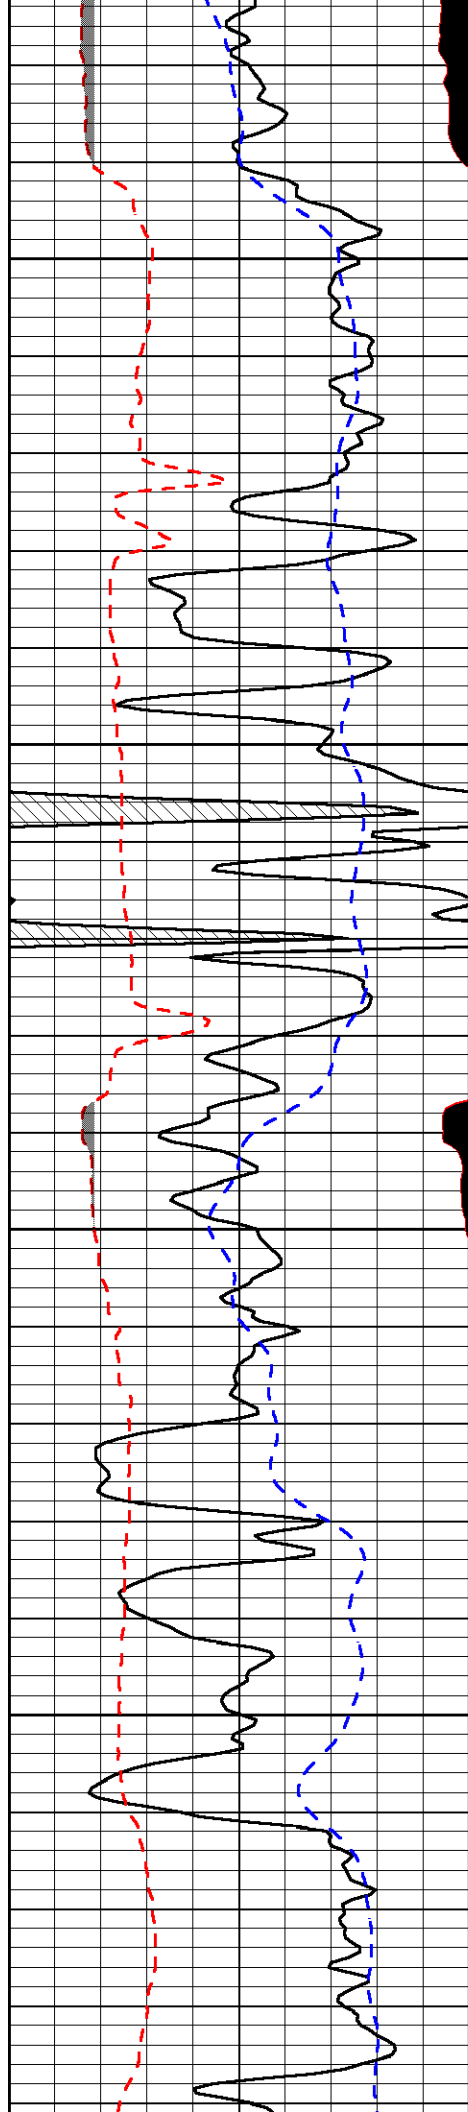


3650

3700

3750

3800

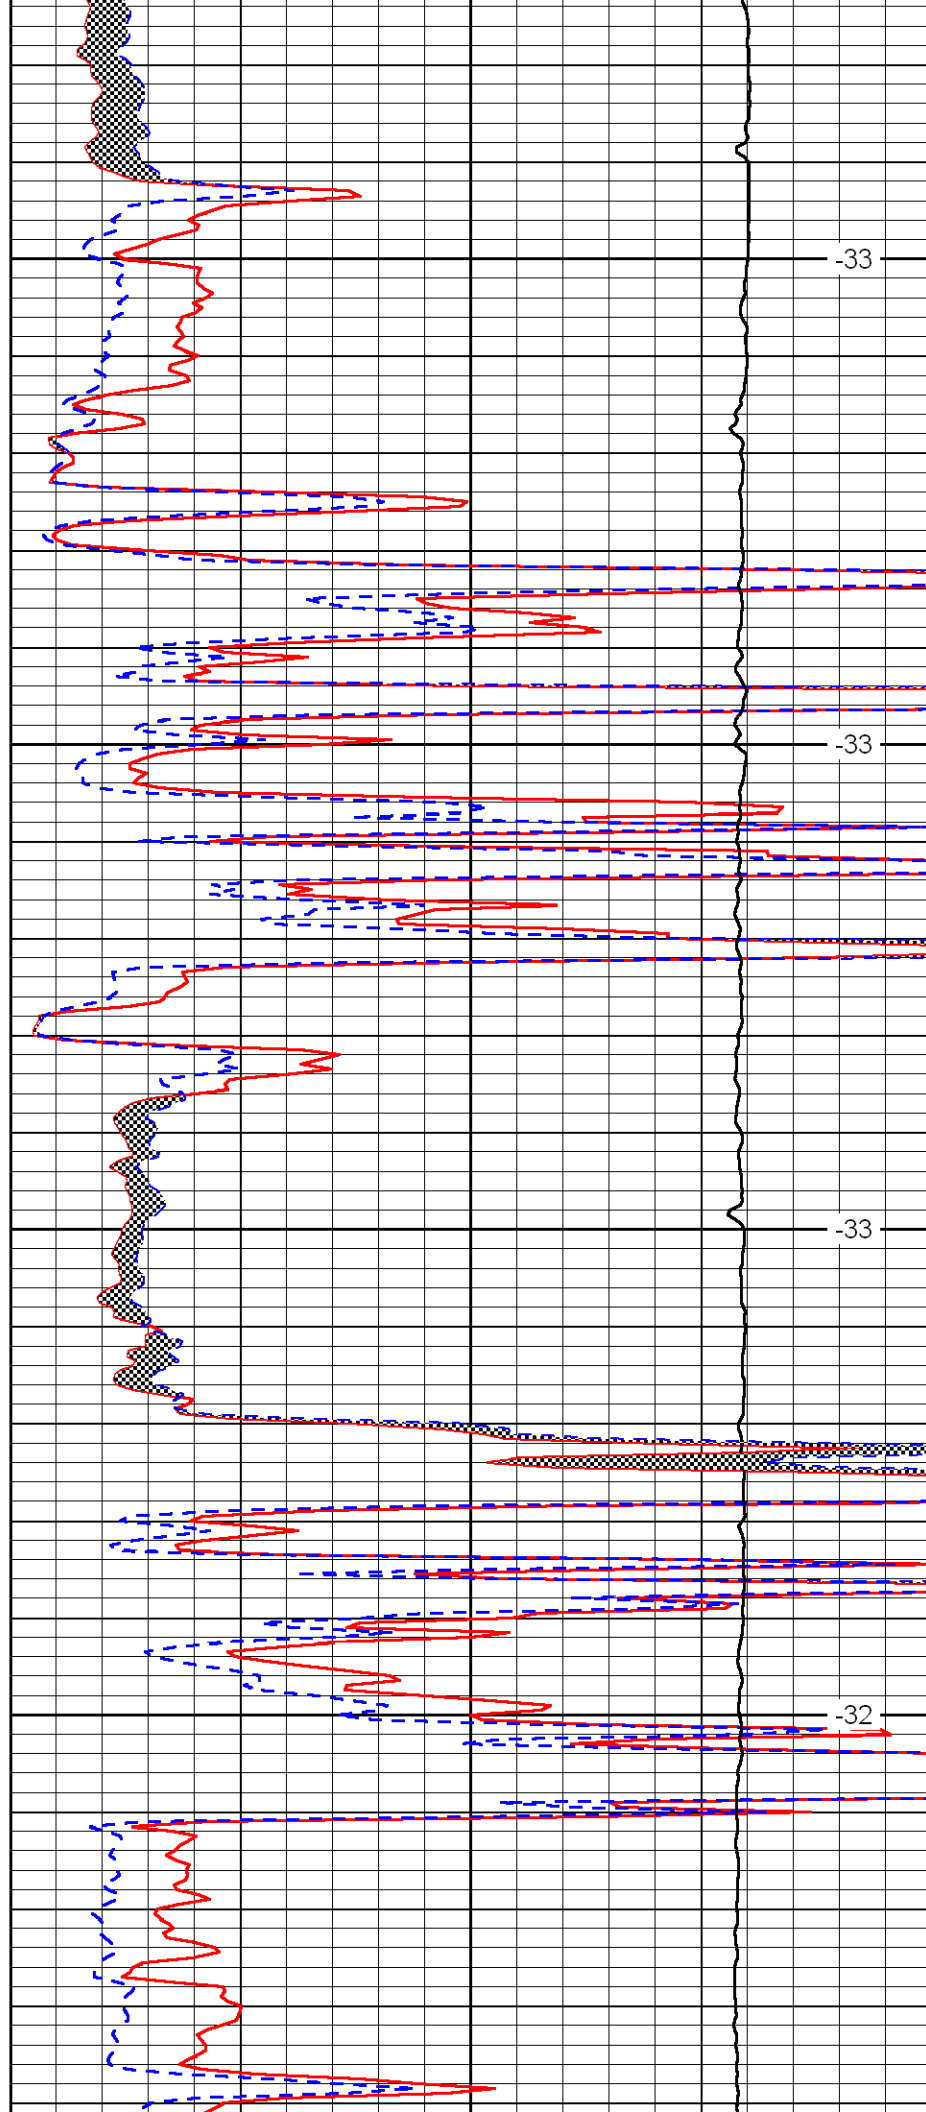


-33

-33

-33

-32

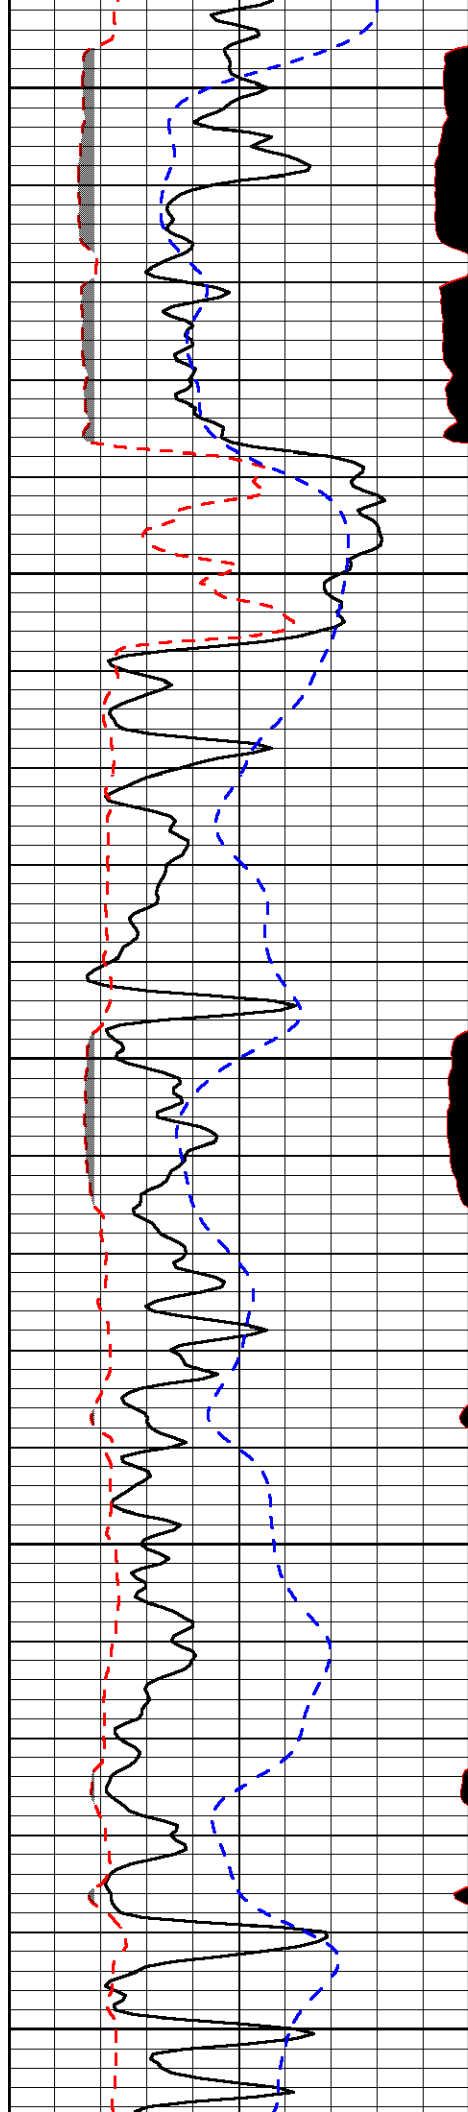


3850

3900

3950

4000

4050

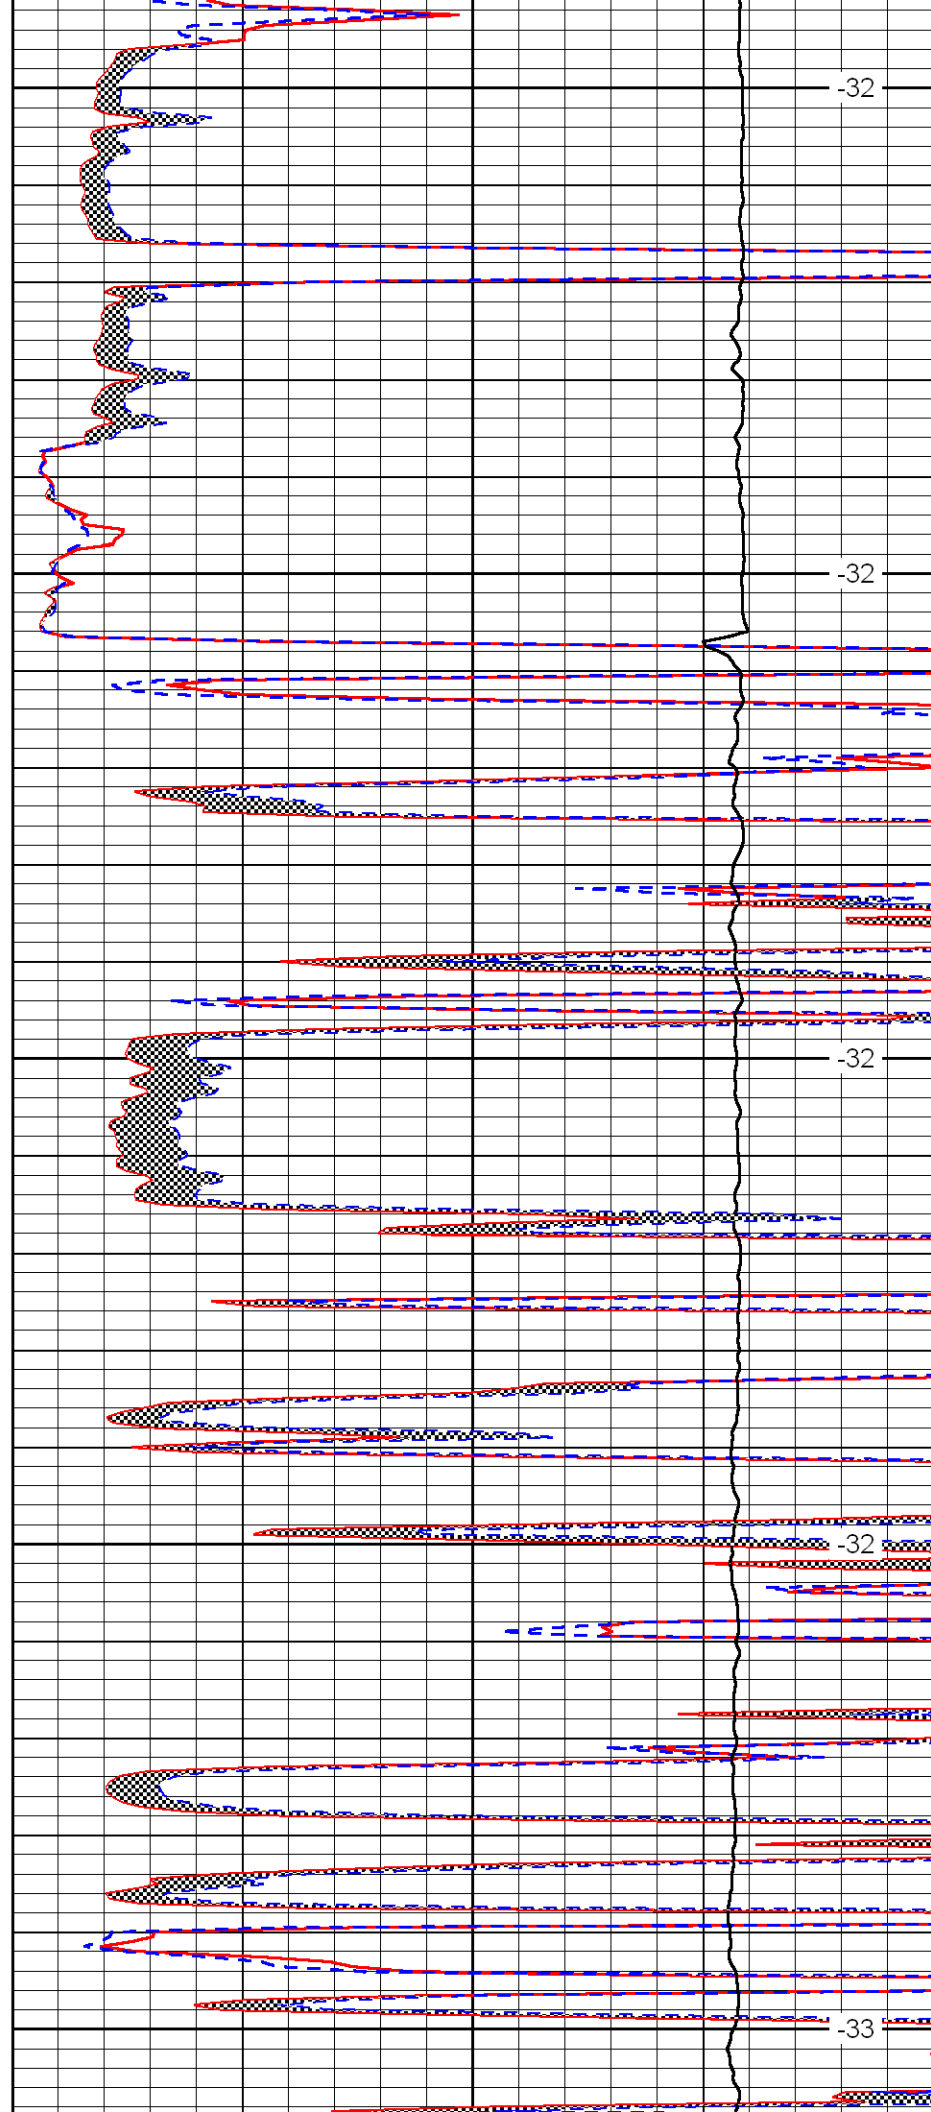


-32

-32

-32

-32

-33

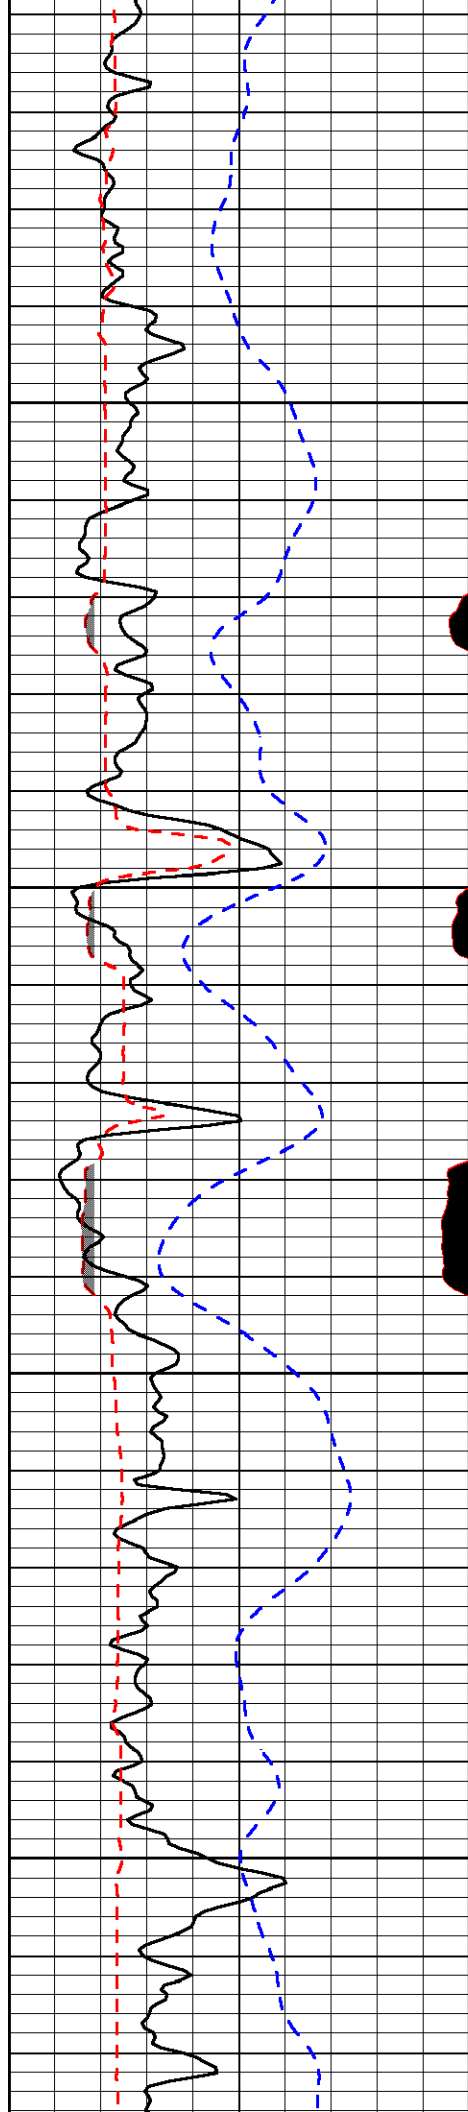


4100

4150

4200

4250

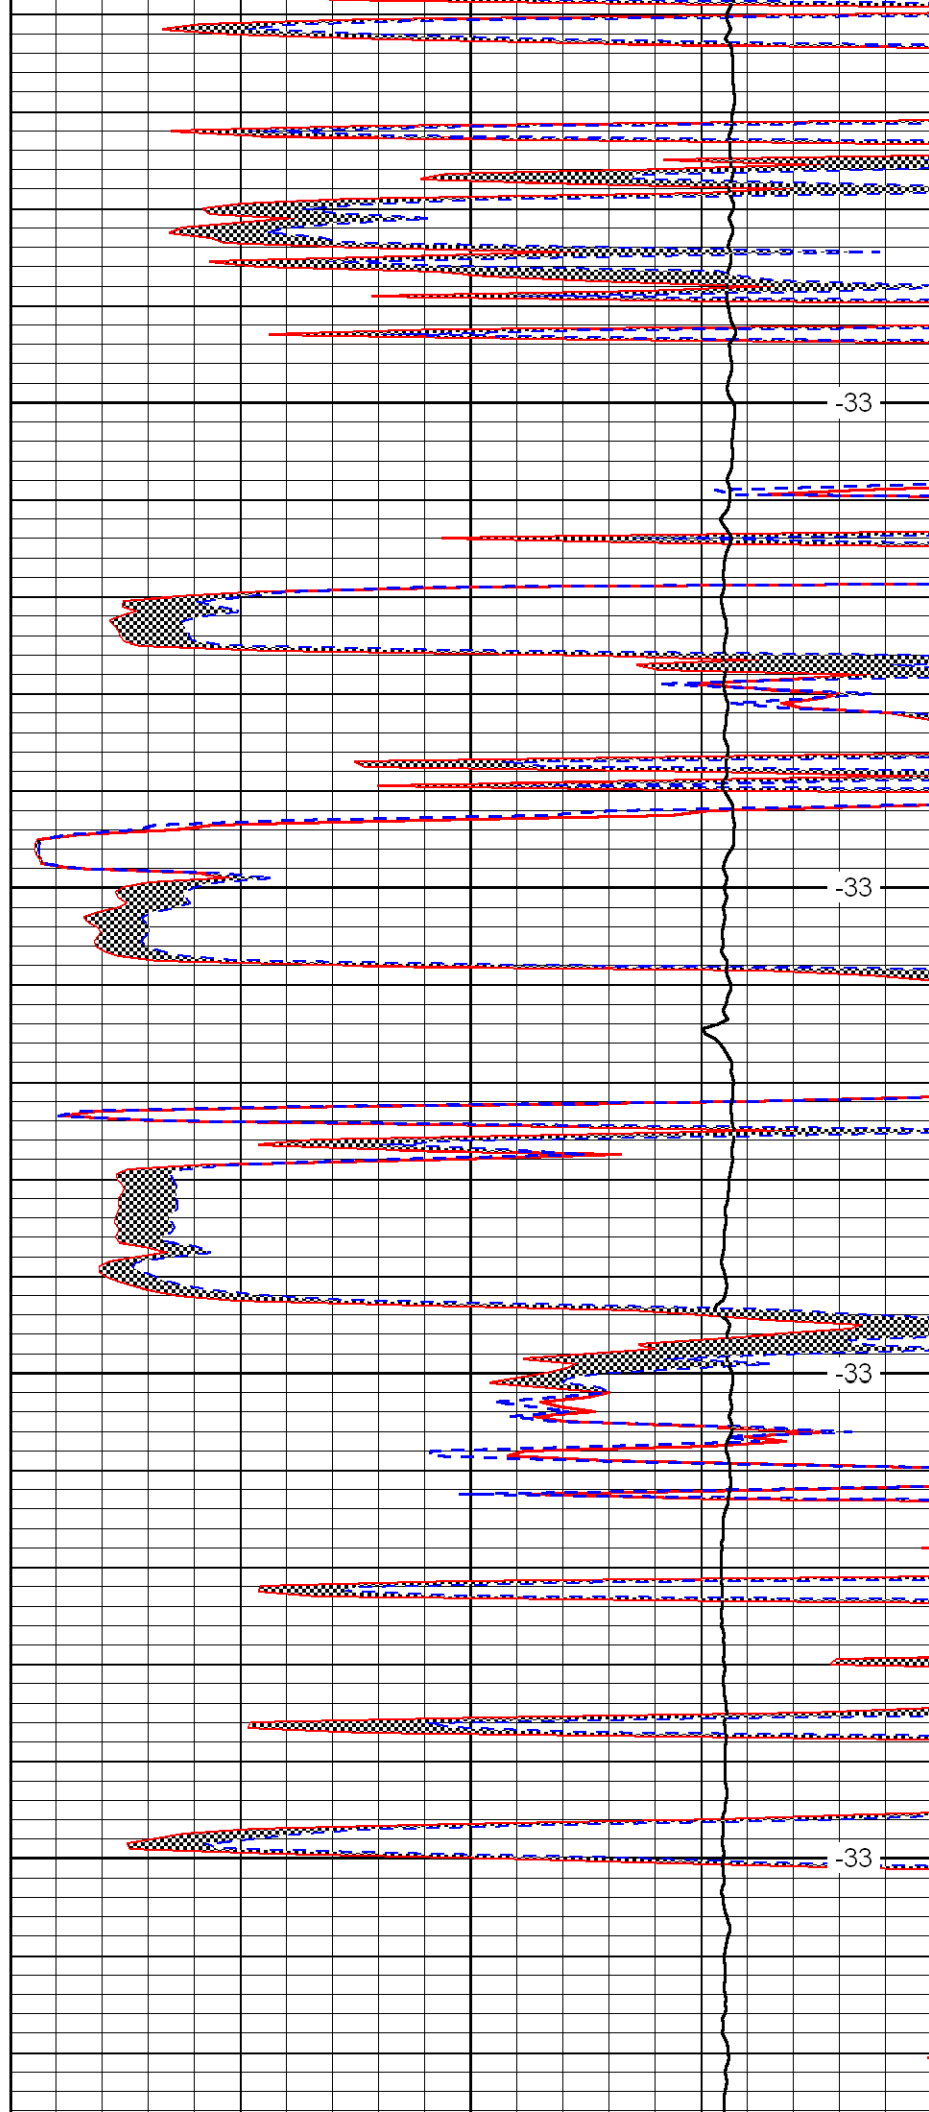


-33

-33

-33

-33

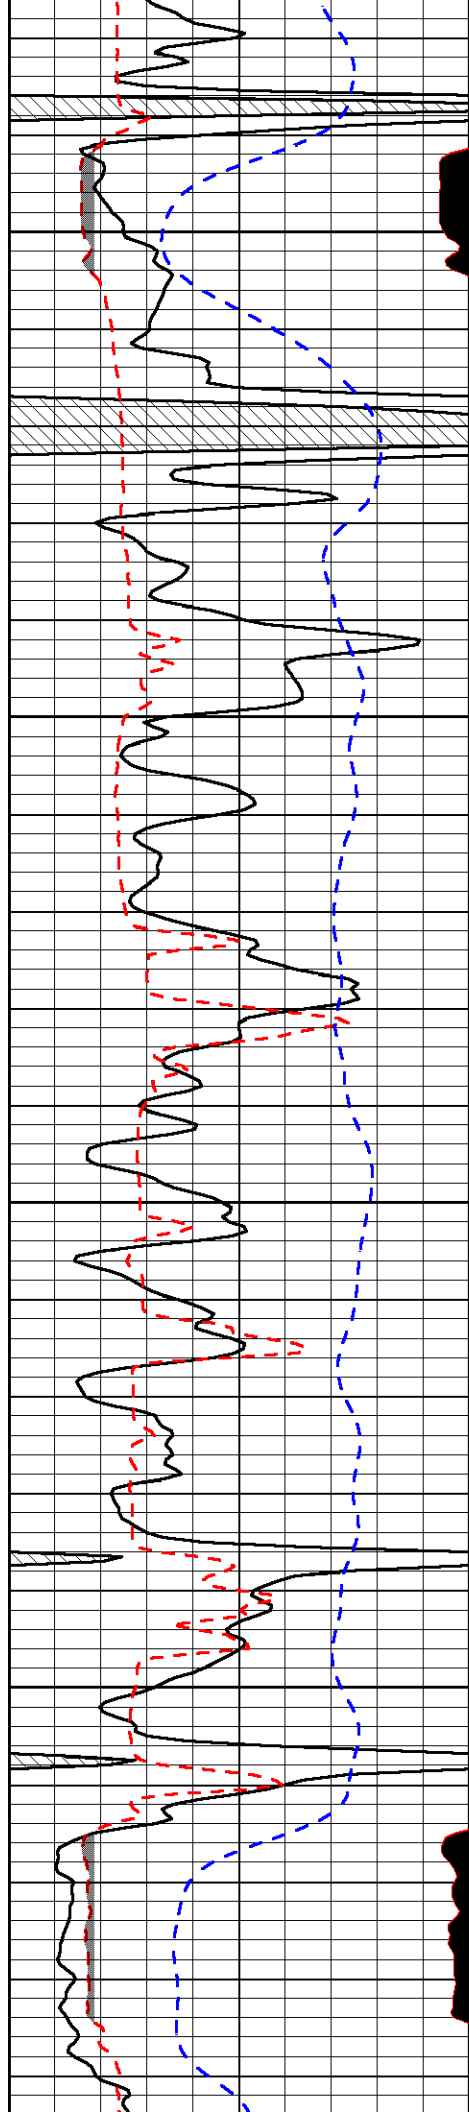



4300

4350

4400

4450

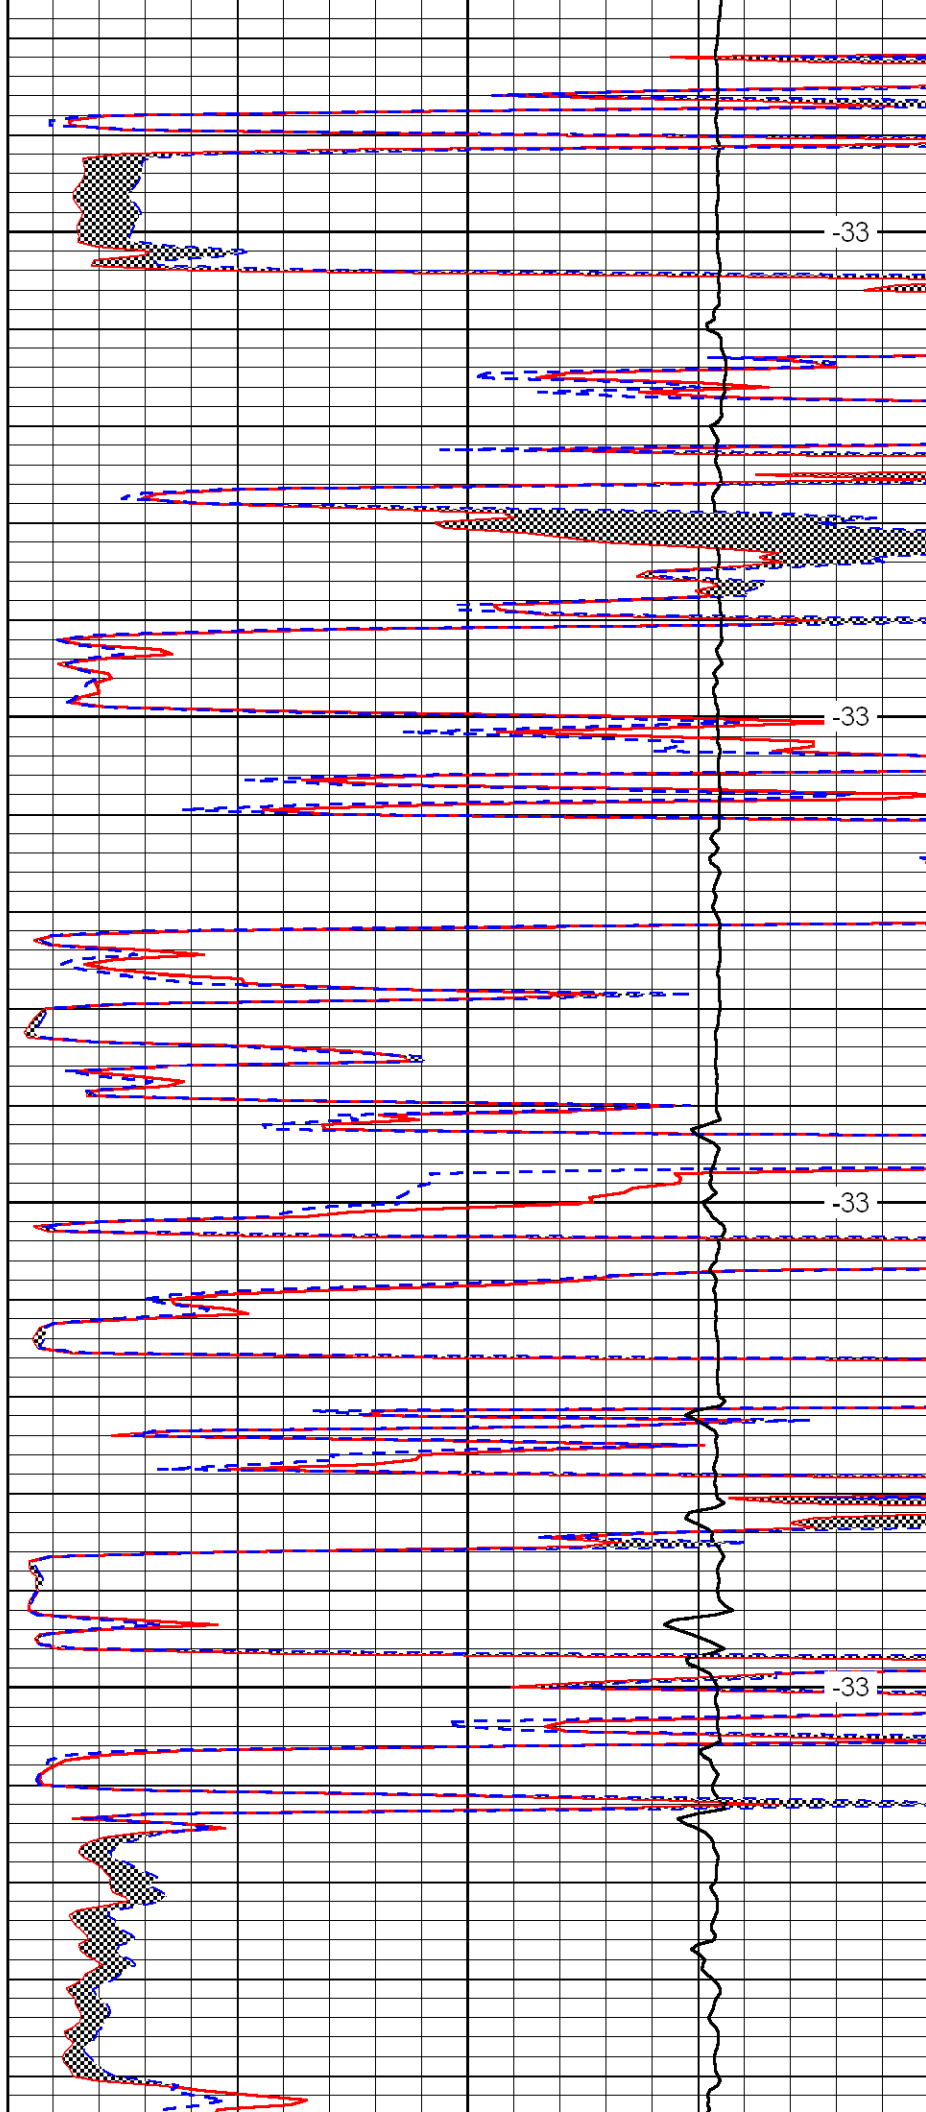

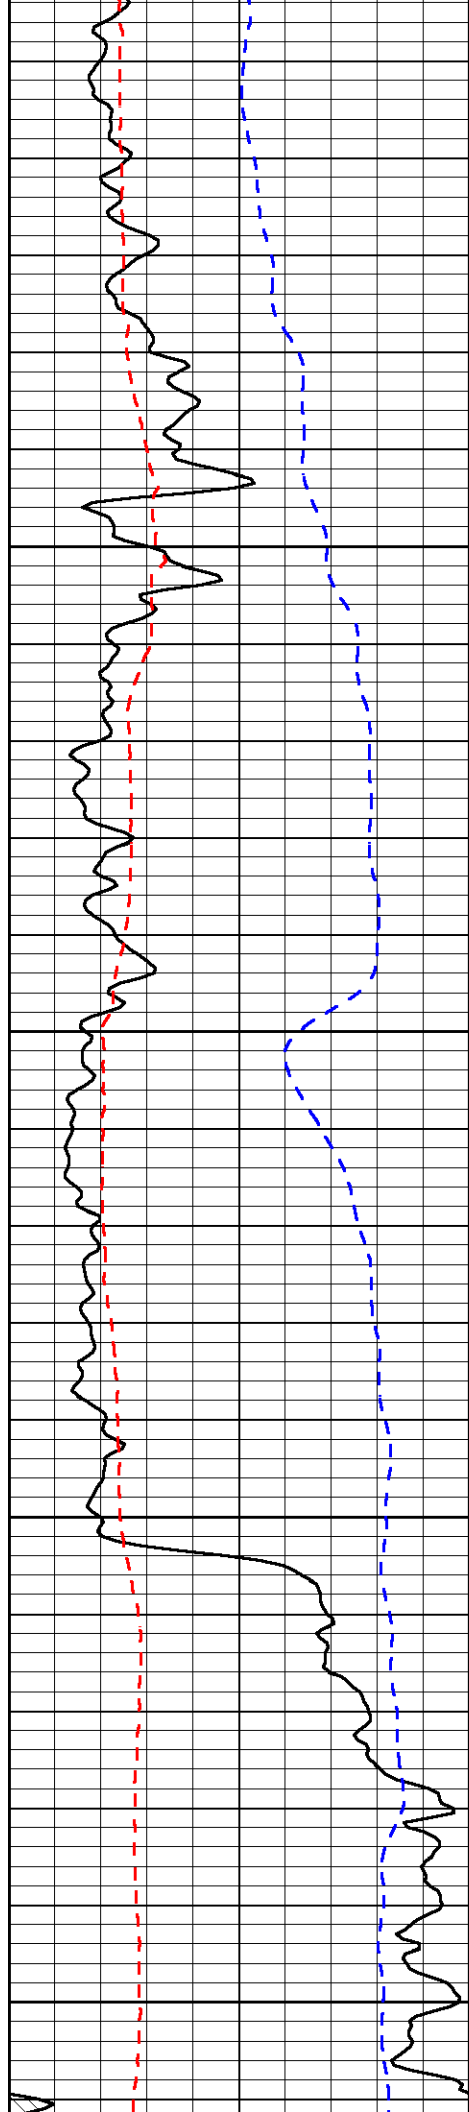


4500

4550

4600

4650

4700

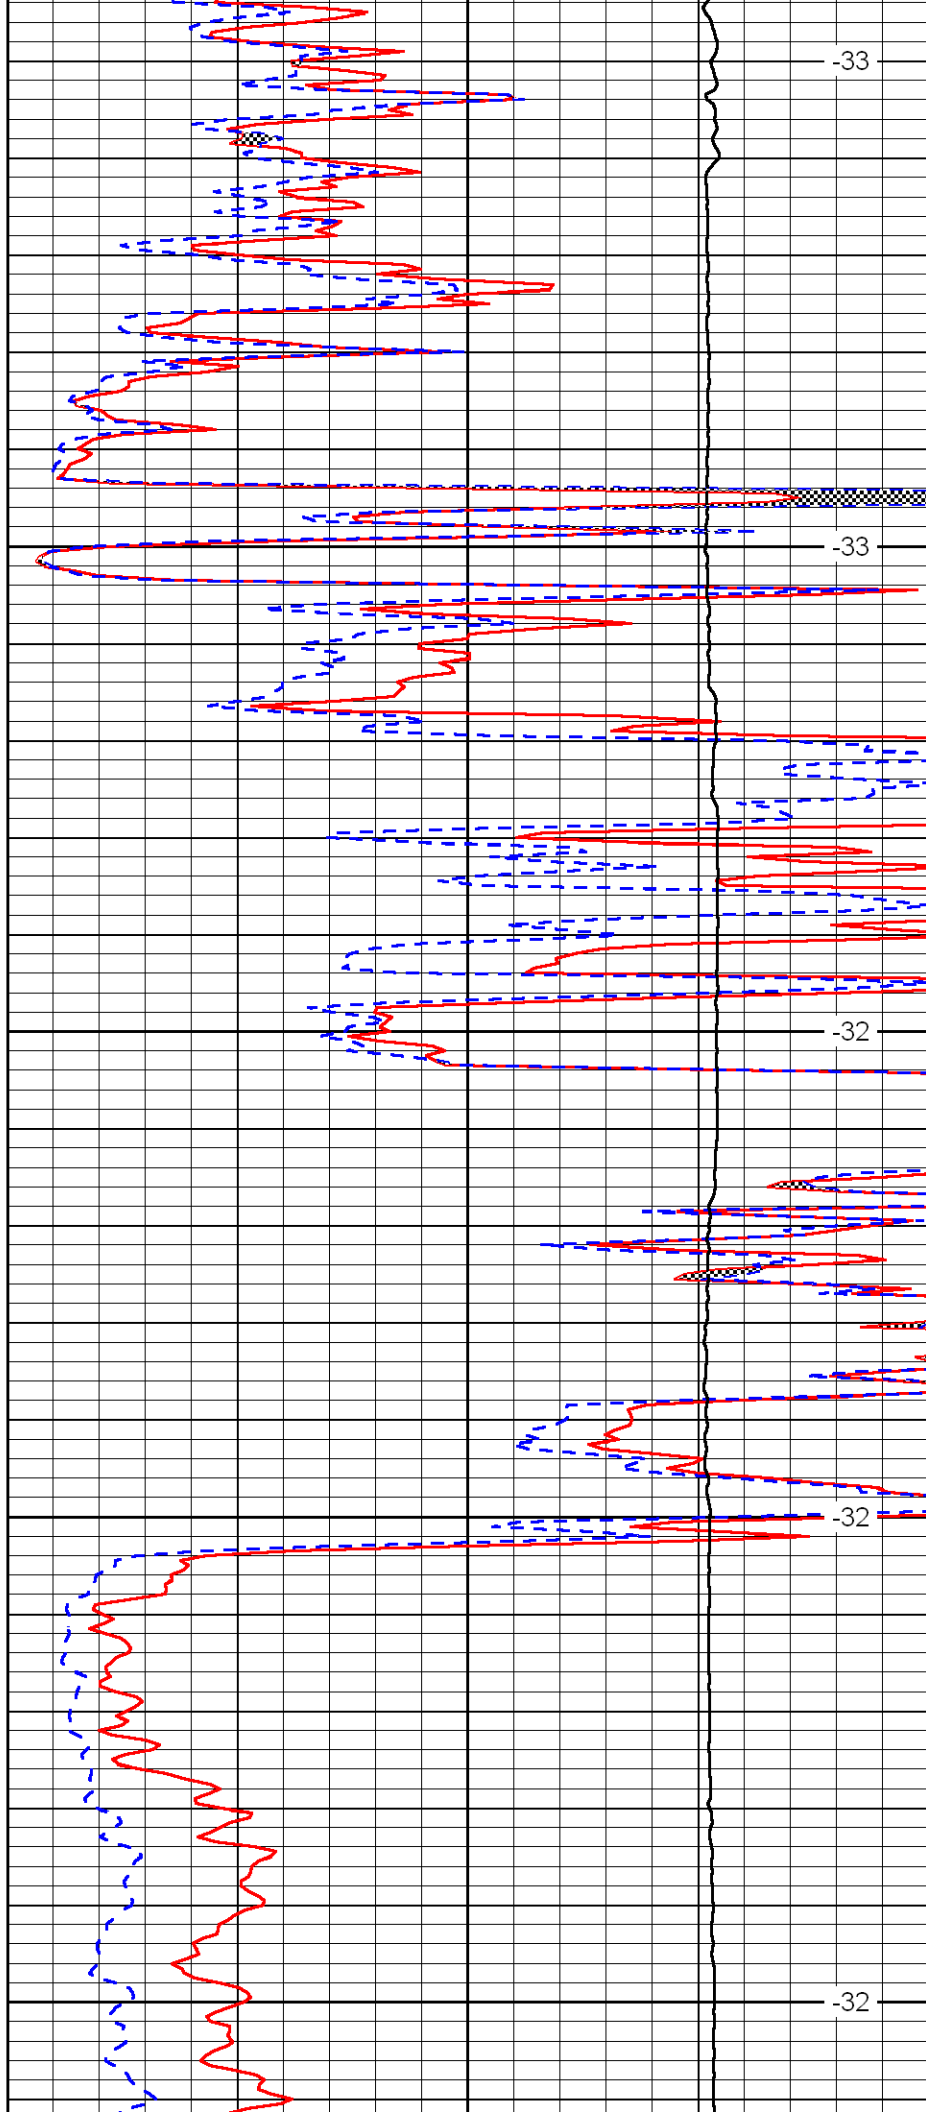


-33

-33

-32

-32

-32

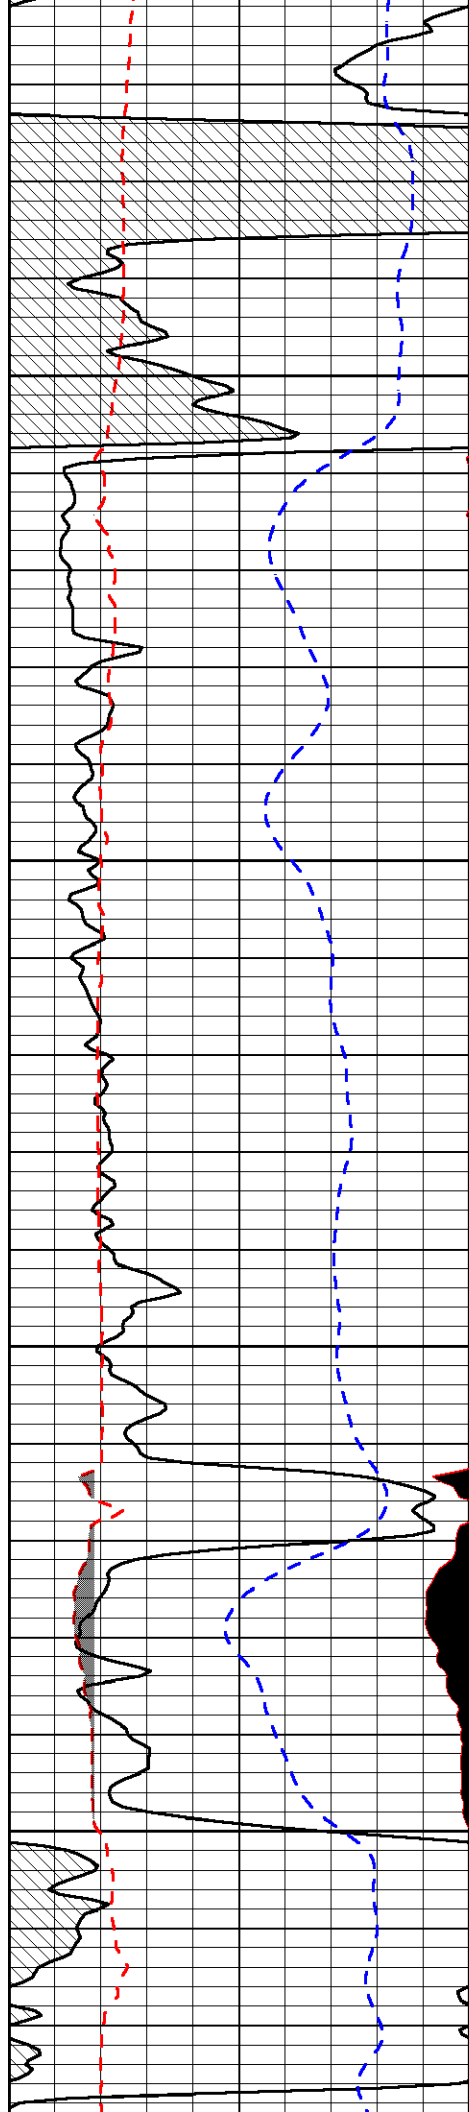


4750

4800

4850

4900

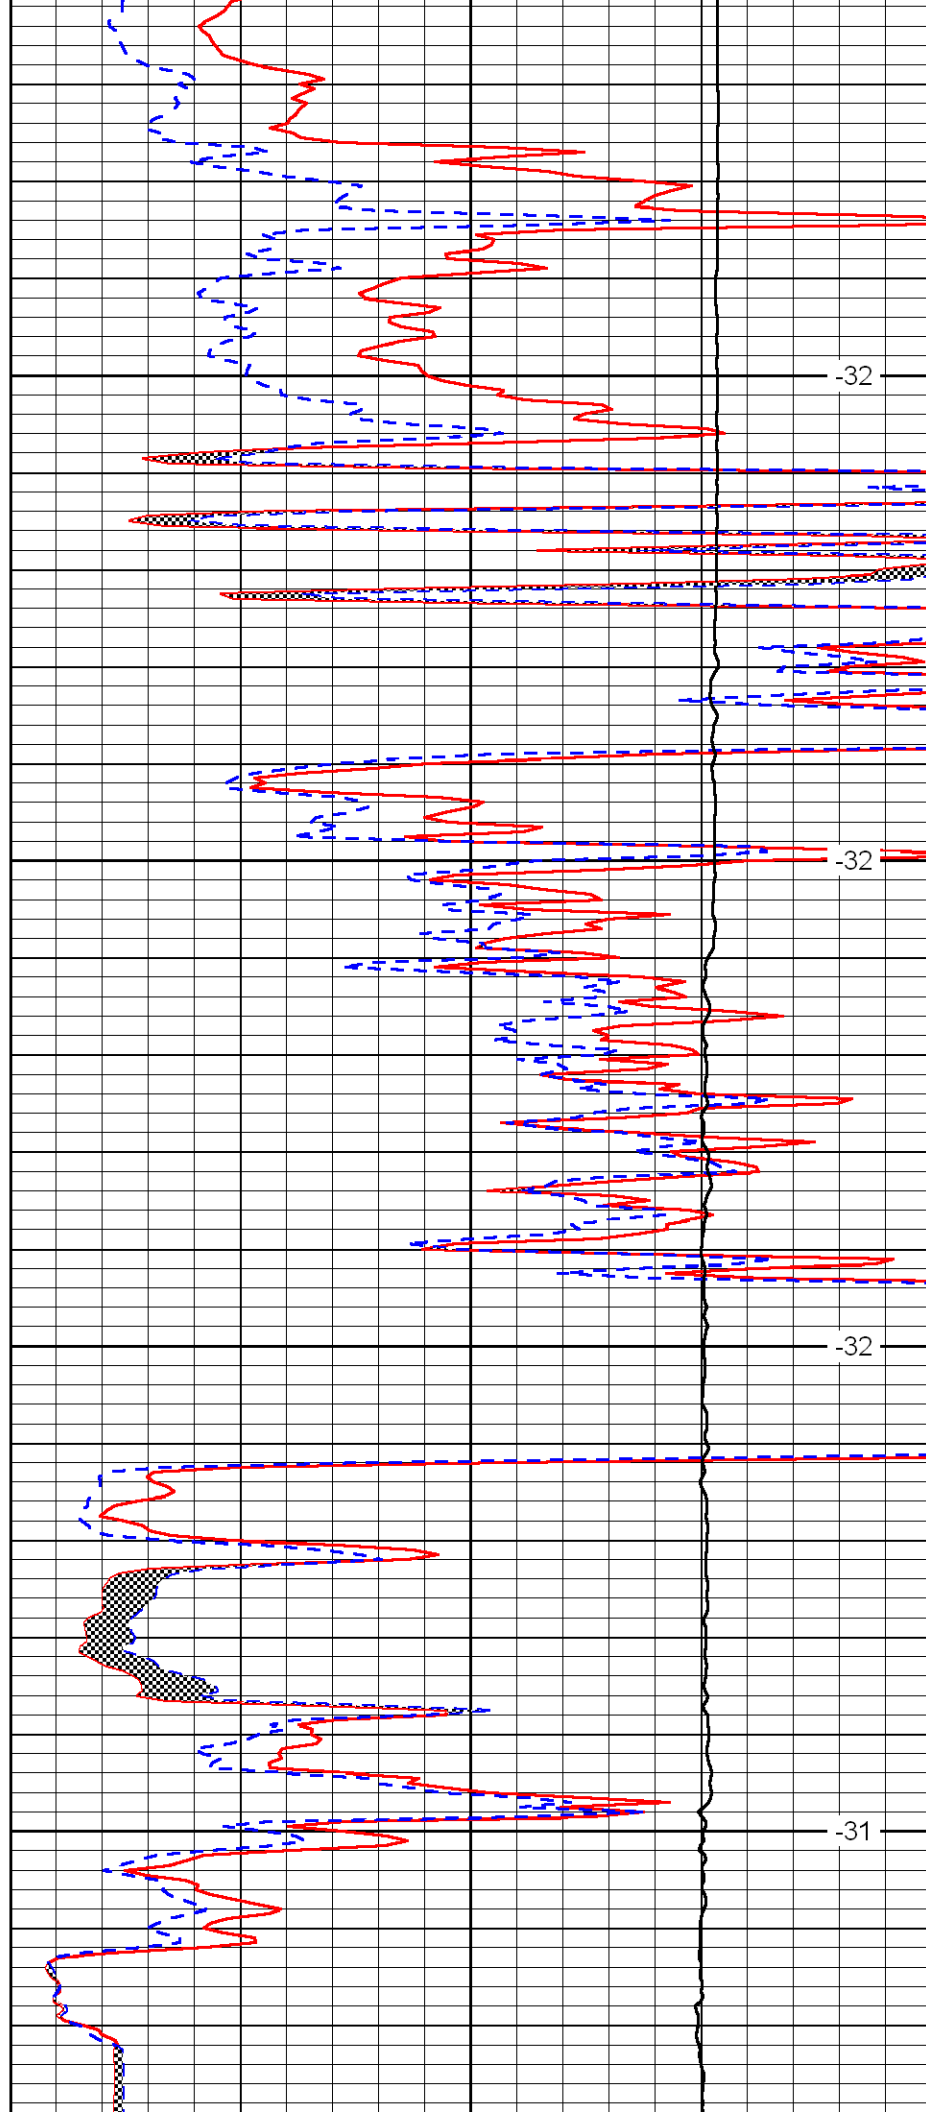


-32

-32

-32

-31

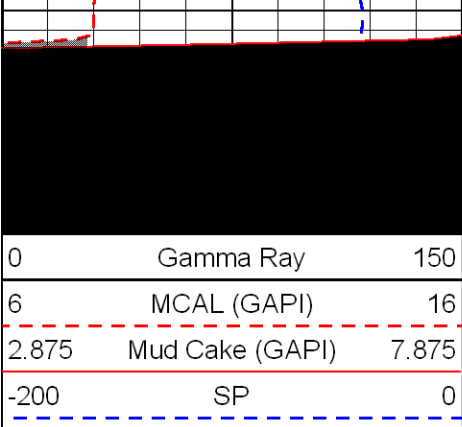

4950

