



Microresistivity
Log

DIGITAL LOG (785) 625-3858

API No.		Company American Warrior, Inc.	
15-135-25,058-00-00		Well Bott #2-23	
Field Wildcat		County Ness State Kansas	
Location SW SE NE SE 1416' FSL & 641' FEL		Other Services CNL / CDL DIL	
Sec: 23 Twp: 18 S Rge: 21 W		Elevation	
Permanent Datum Ground Level		K.B. 2098	
Log Measured From Kelly Bushing		D.F. 2090	
Drilling Measured From Kelly Bushing		G.L. 2090	
Date	6/2/2010		
Run Number	Two		
Depth Driller	4147		
Depth Logger	4147		
Bottom Logged Interval	4146		
Top Log Interval	2000		
Casing Driller	8.625 @ 1315		
Casing Logger	1313		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.800		
Density / Viscosity	9.0 82		
pH / Fluid Loss	10.5 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.85 @ 72		
Rmf @ Meas. Temp	.64 @ 72		
Rmc @ Meas. Temp	1.15 @ 72		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.52 @ 117		
Operating Rig Time	4 1/2 Hours		
Max Rec. Temp. F	117		
Equipment Number	007		
Location	Hays		
Recorded By	T. Martin		
Witnessed By	Jason Alm		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Bazine, W to HH Rd, 1 1/2 N, 1 E, S & E into



Charted by: Depth in Feet scaled 1.2 is		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

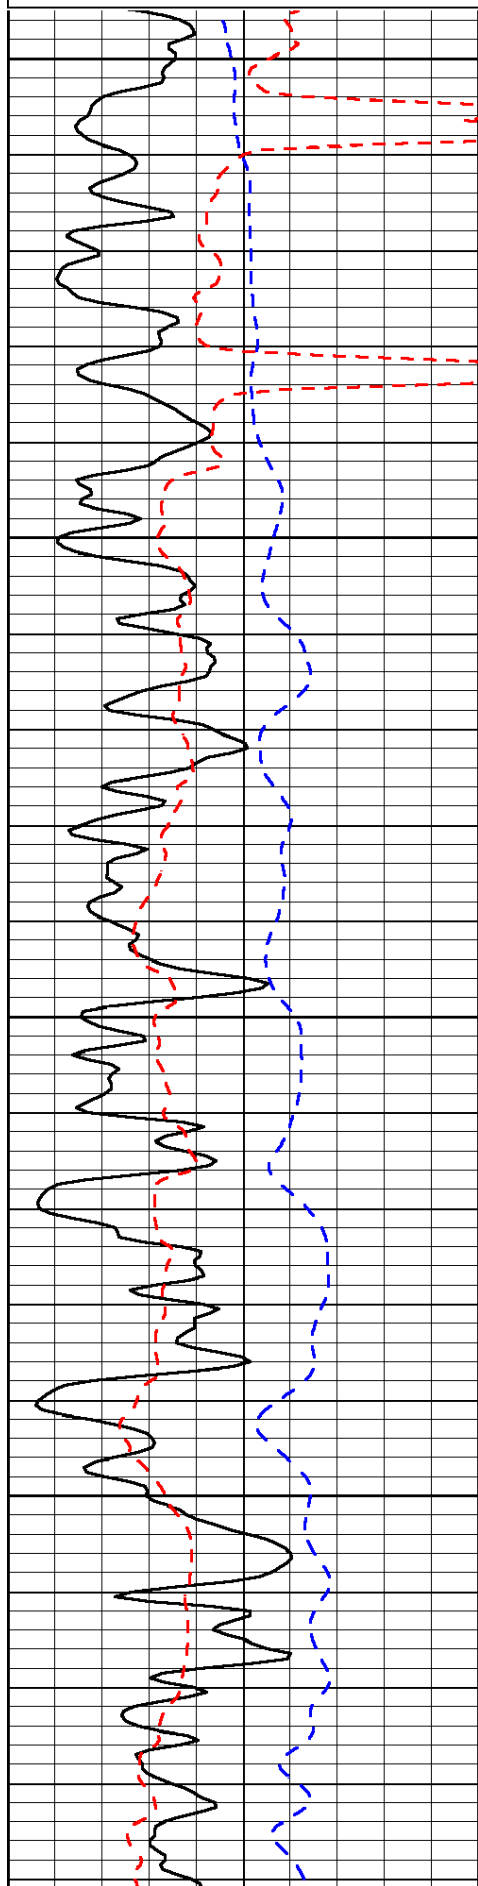


0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

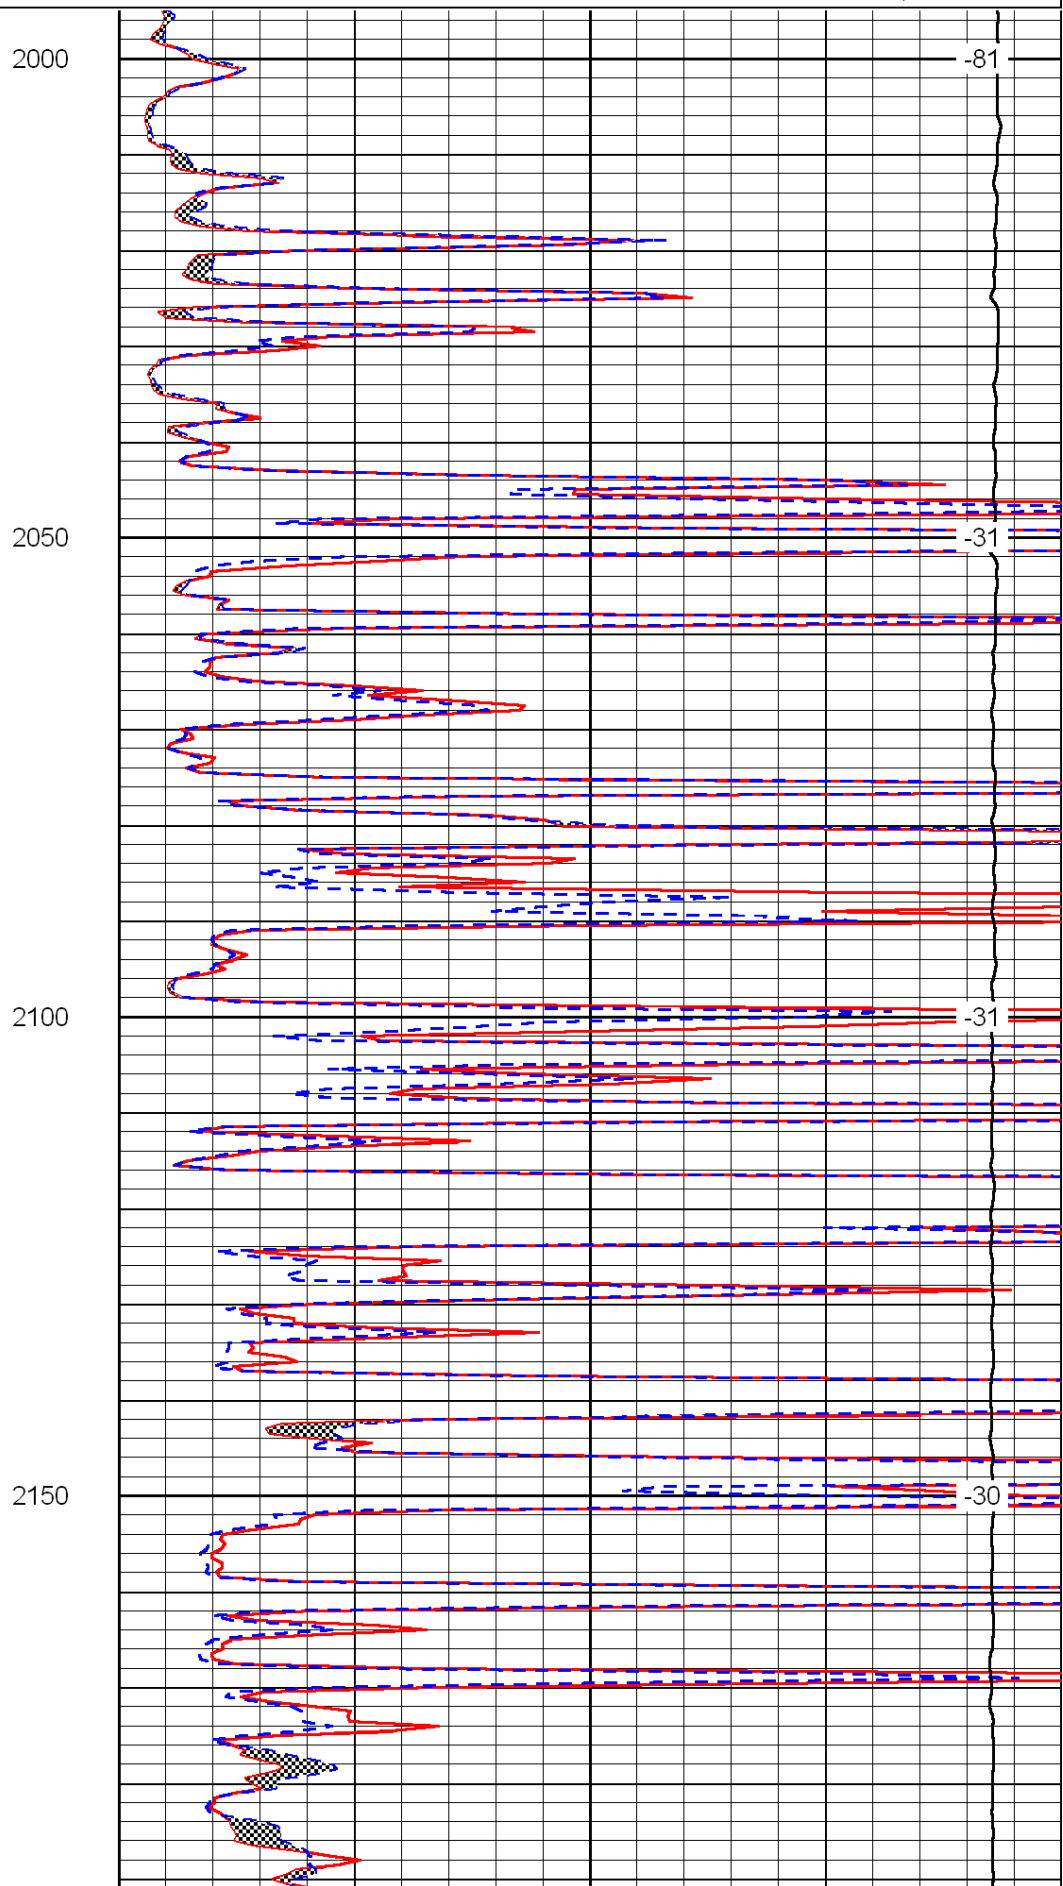

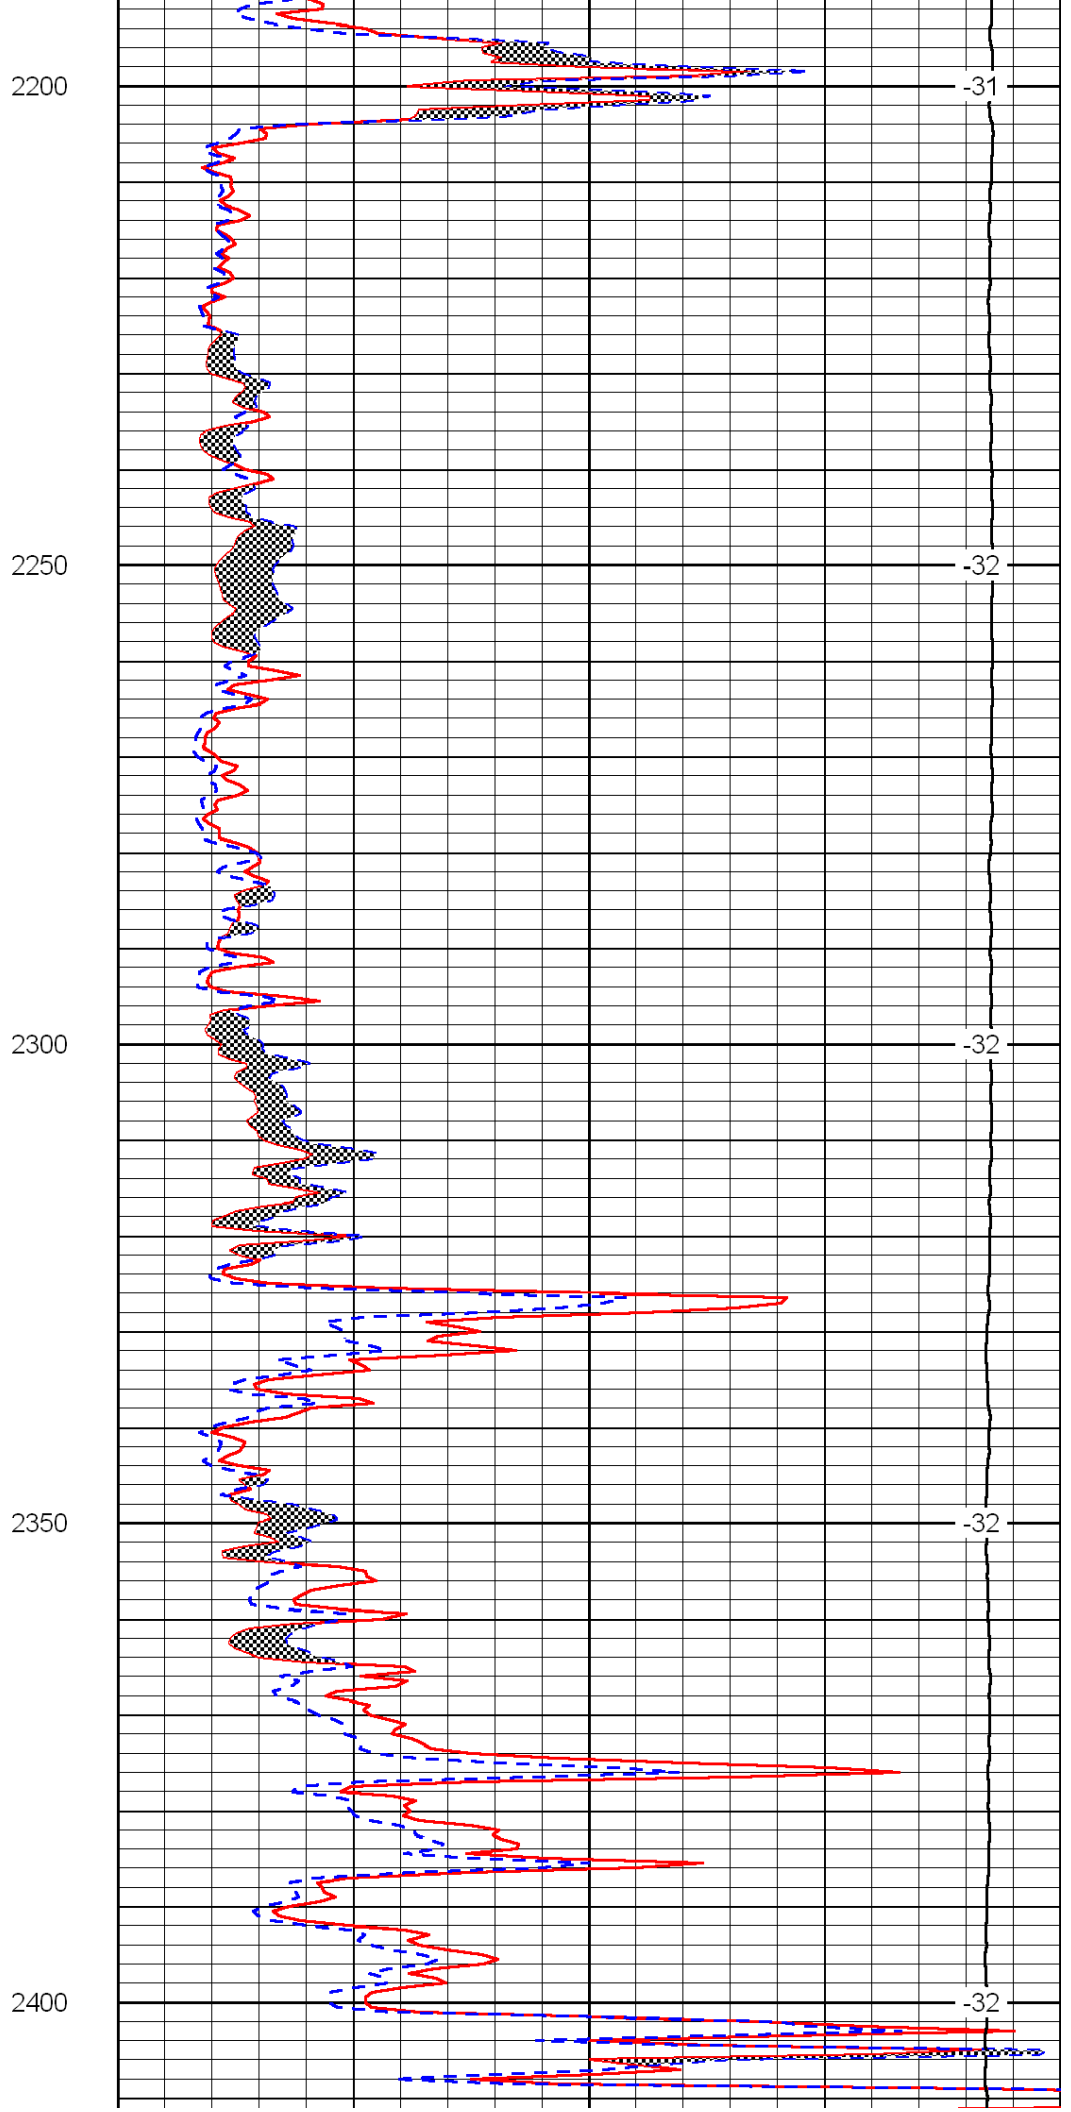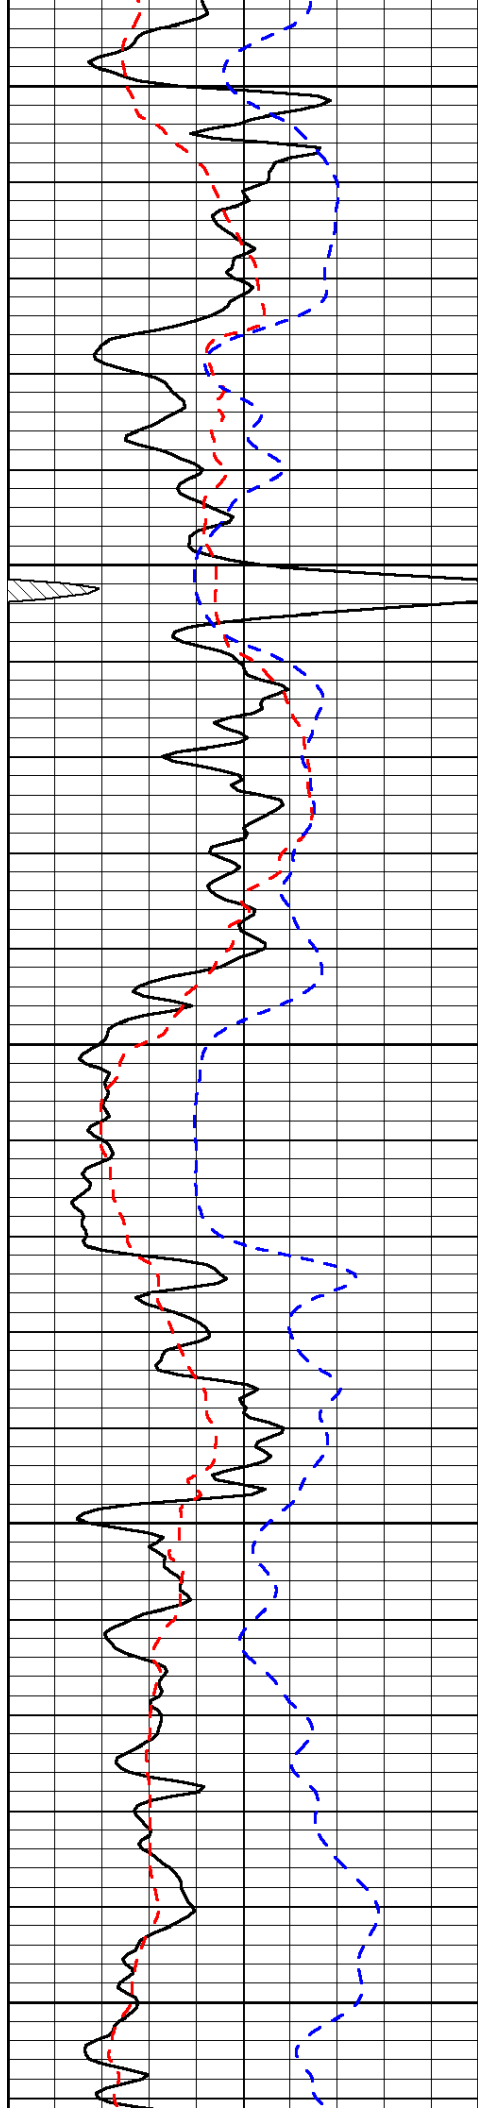

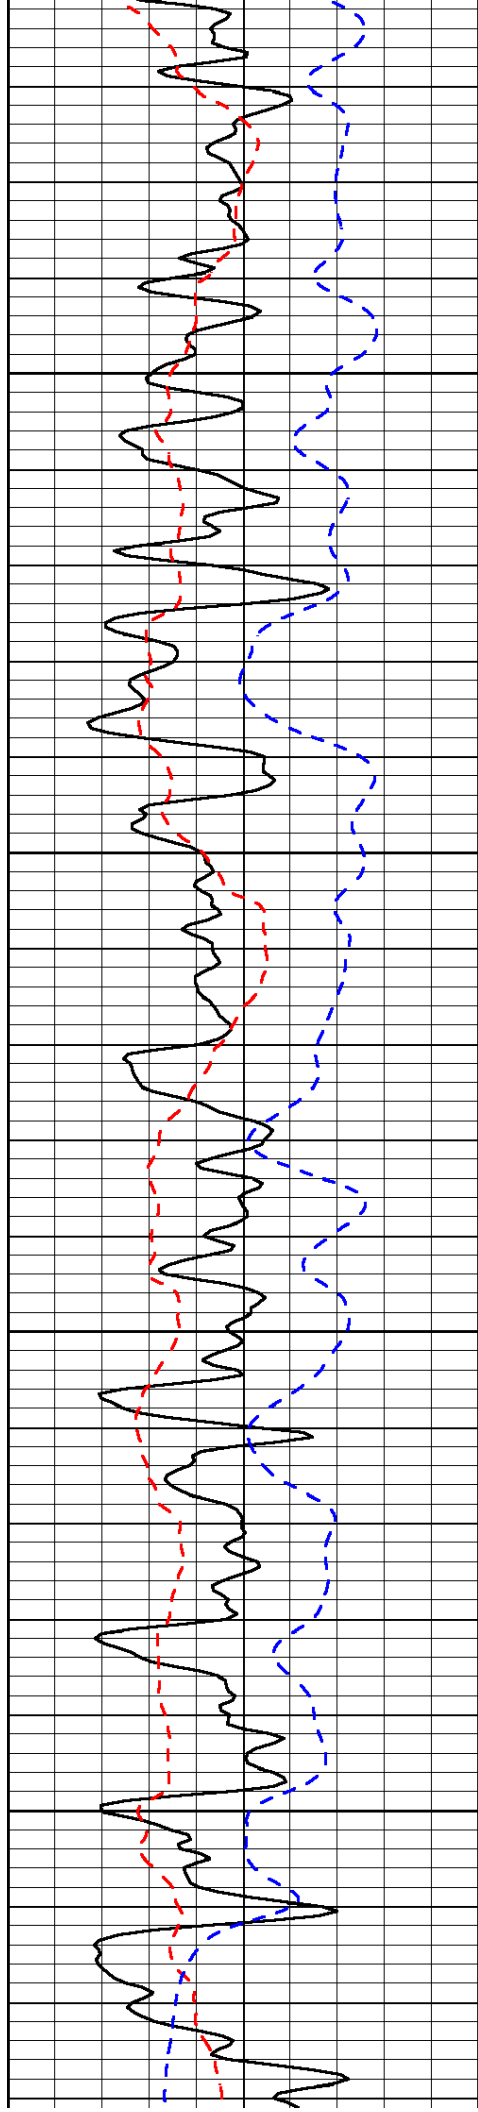


2450

2500

2550

2600


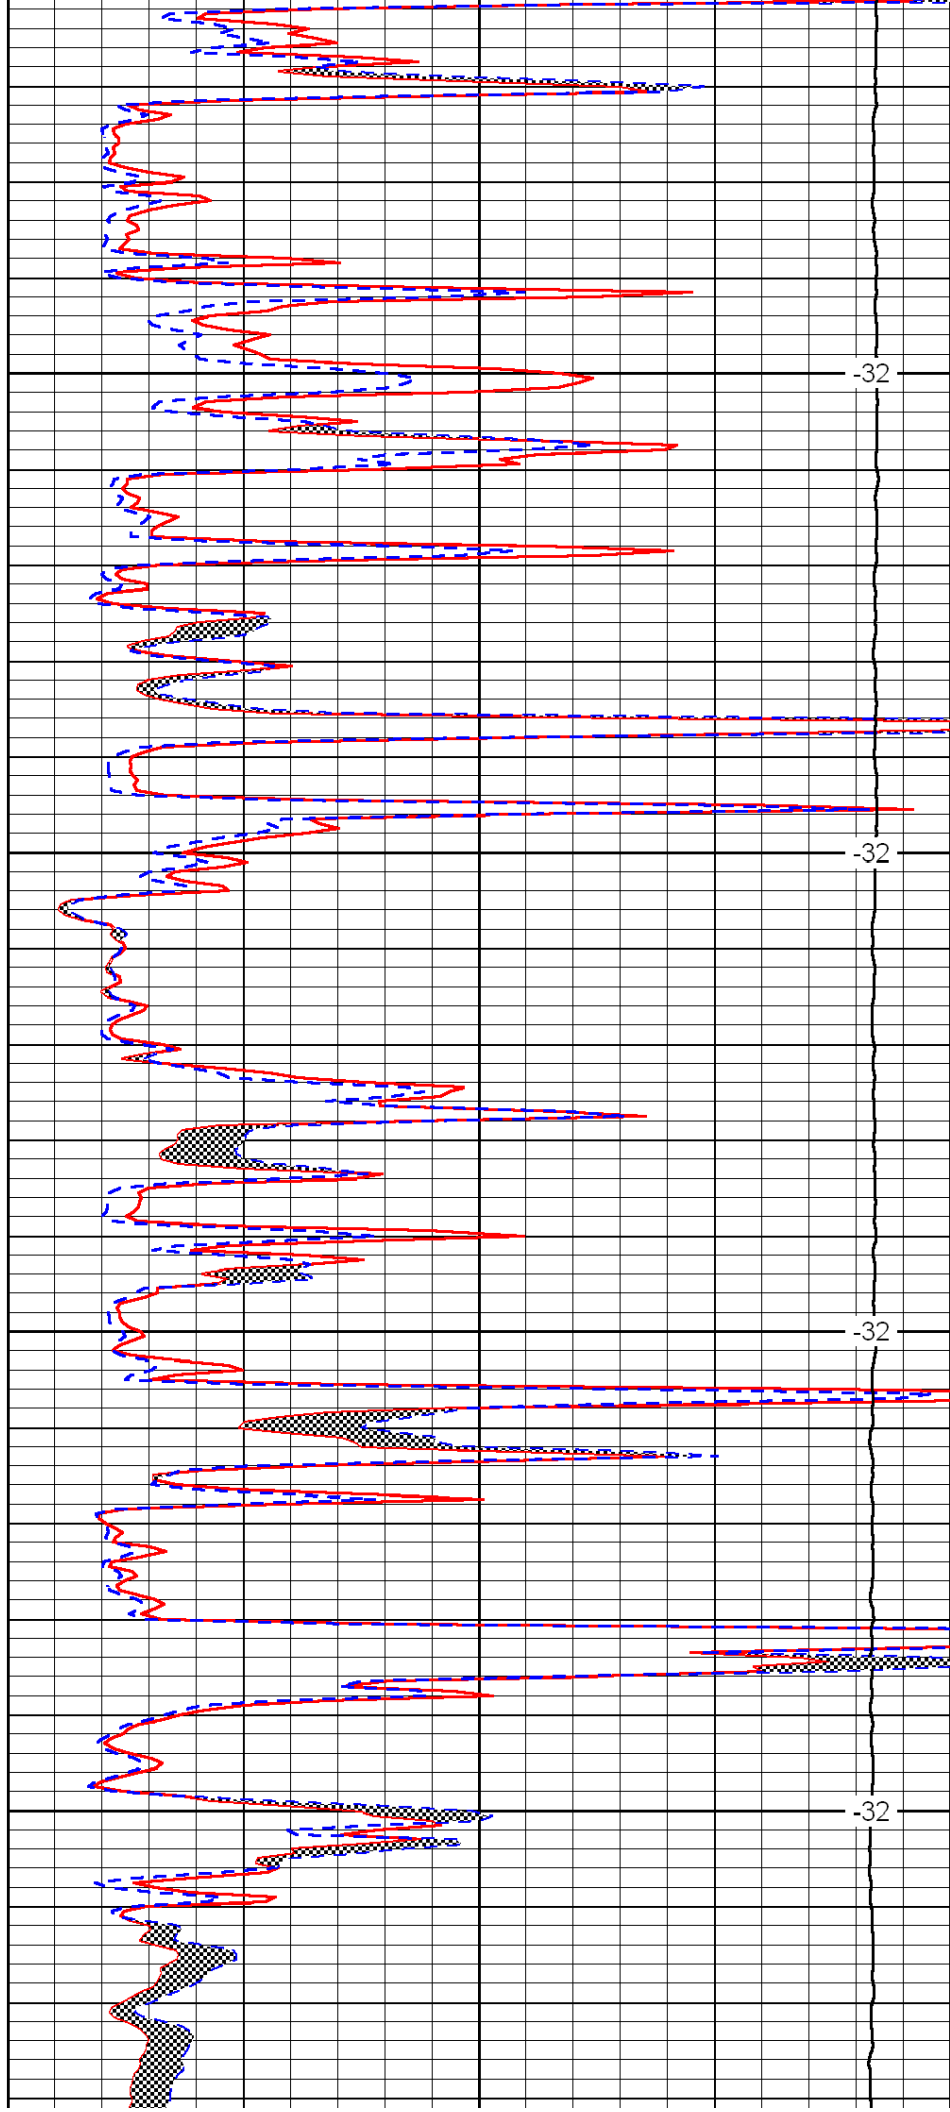



-32

-32

-32

-32

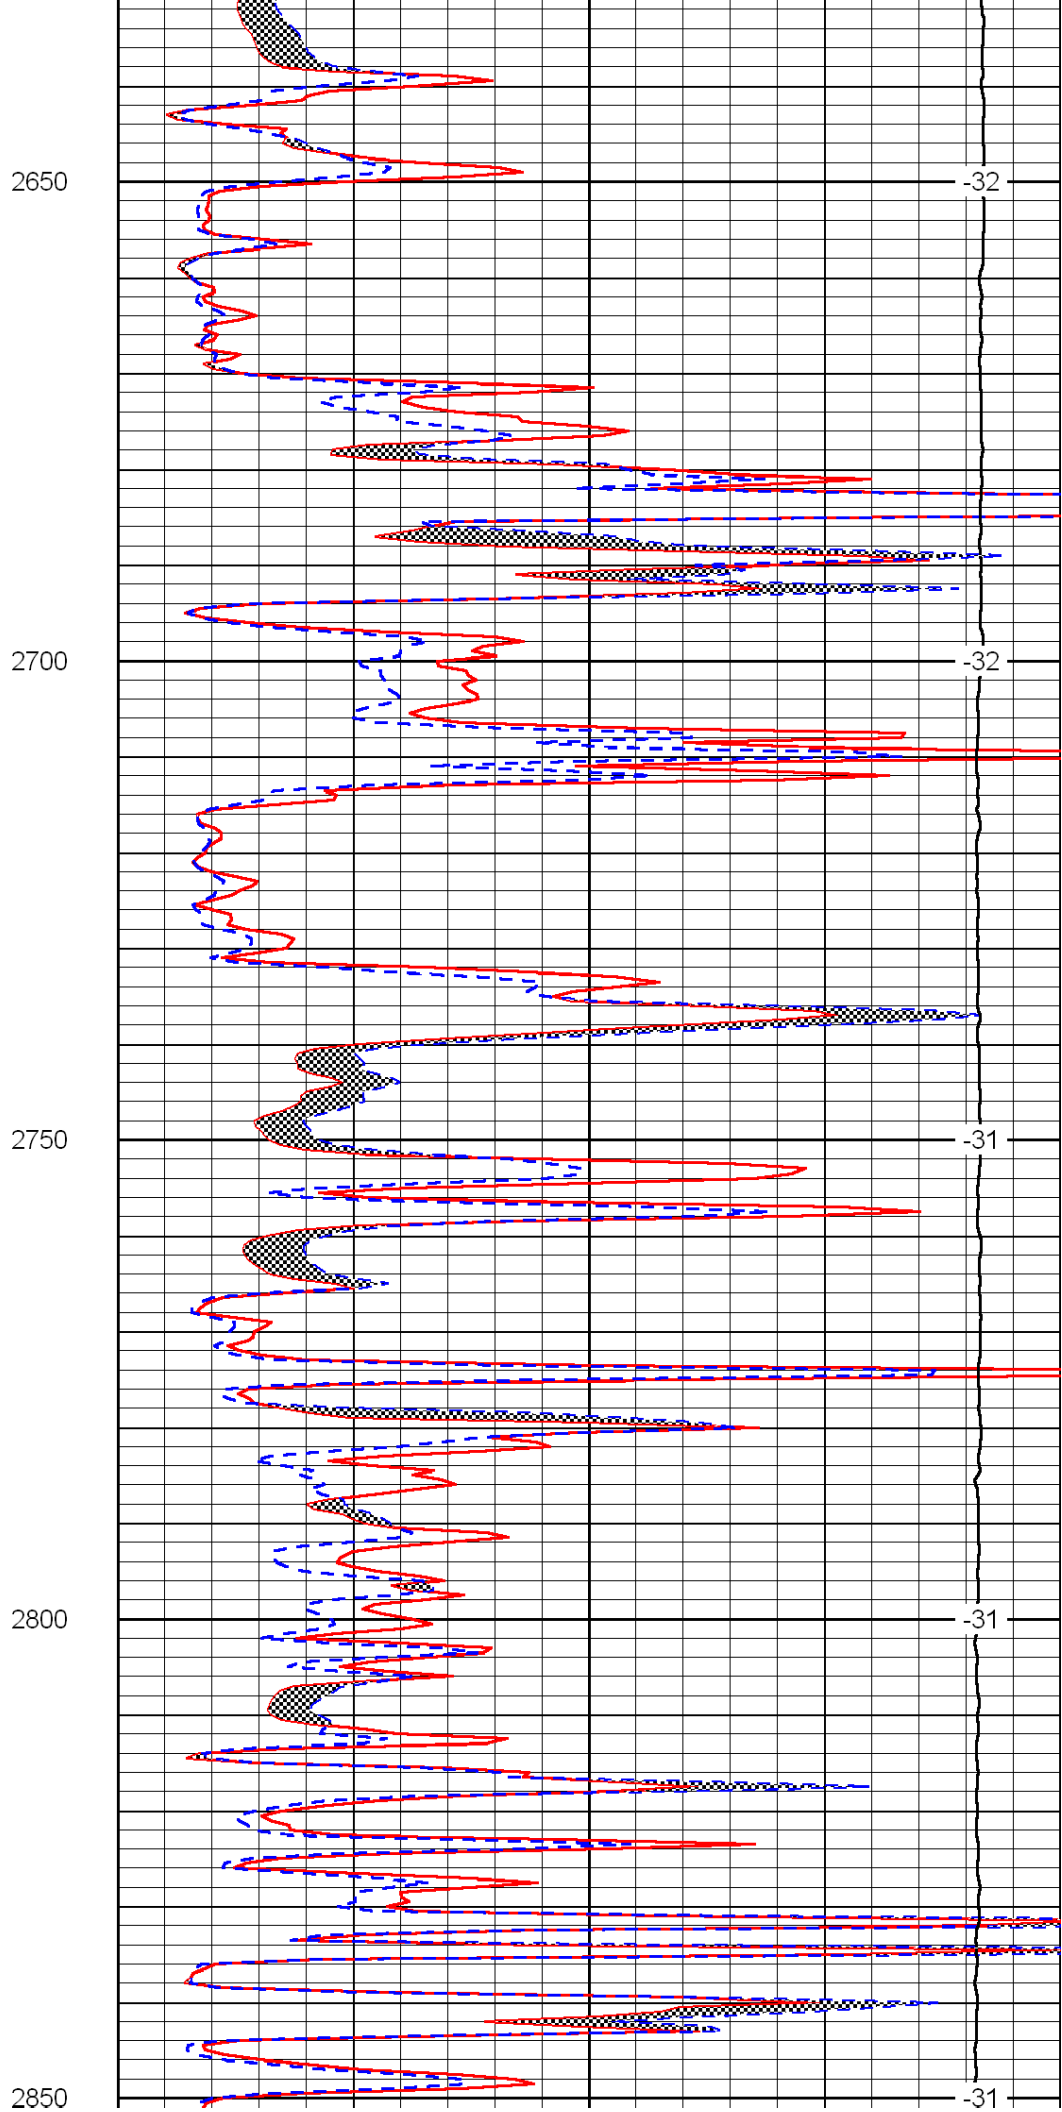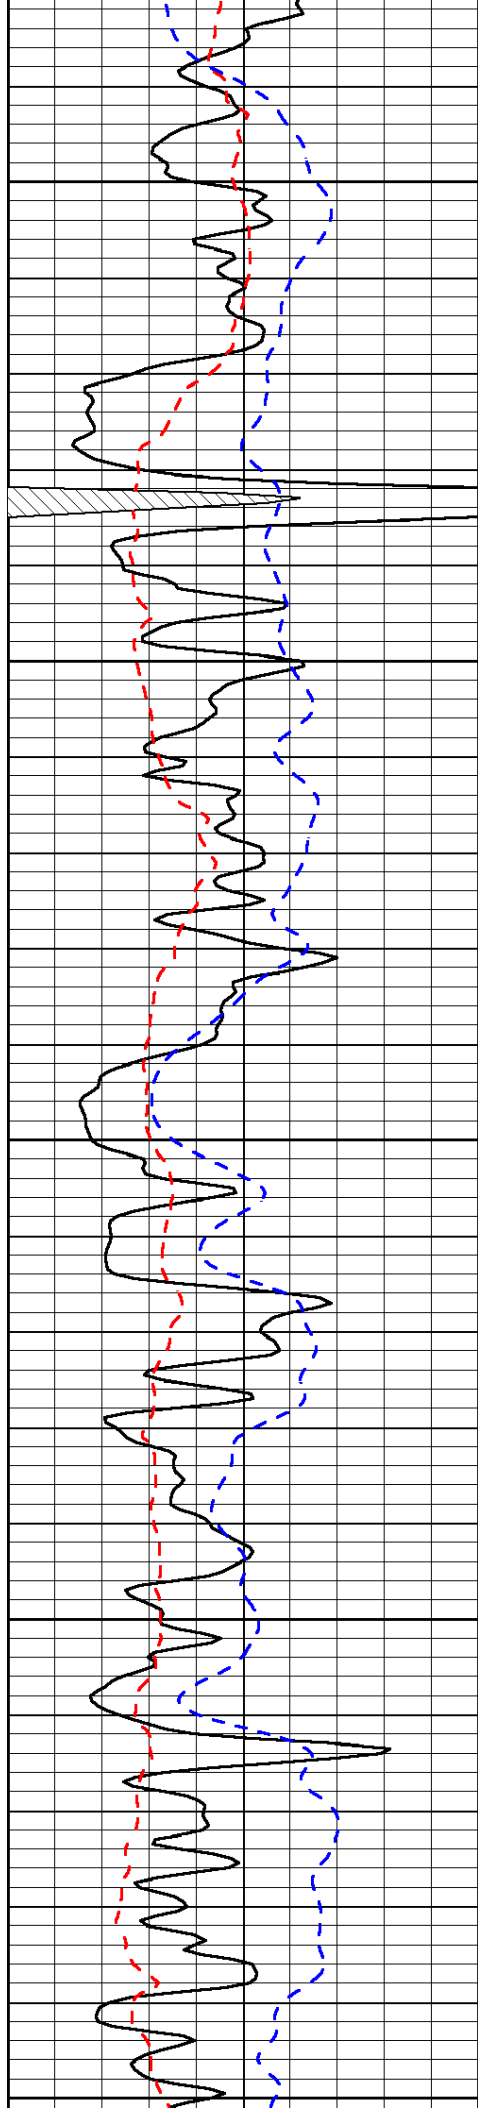

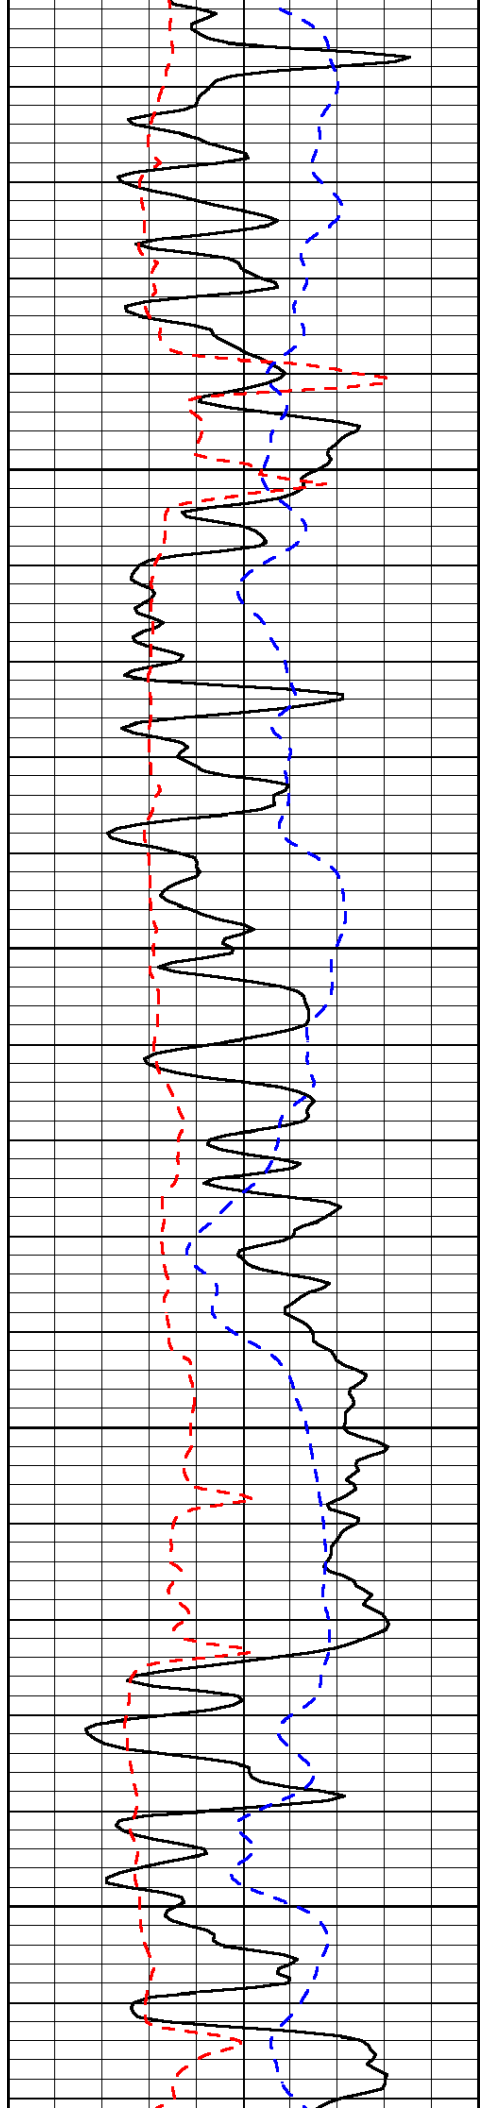


2900

2950

3000

3050

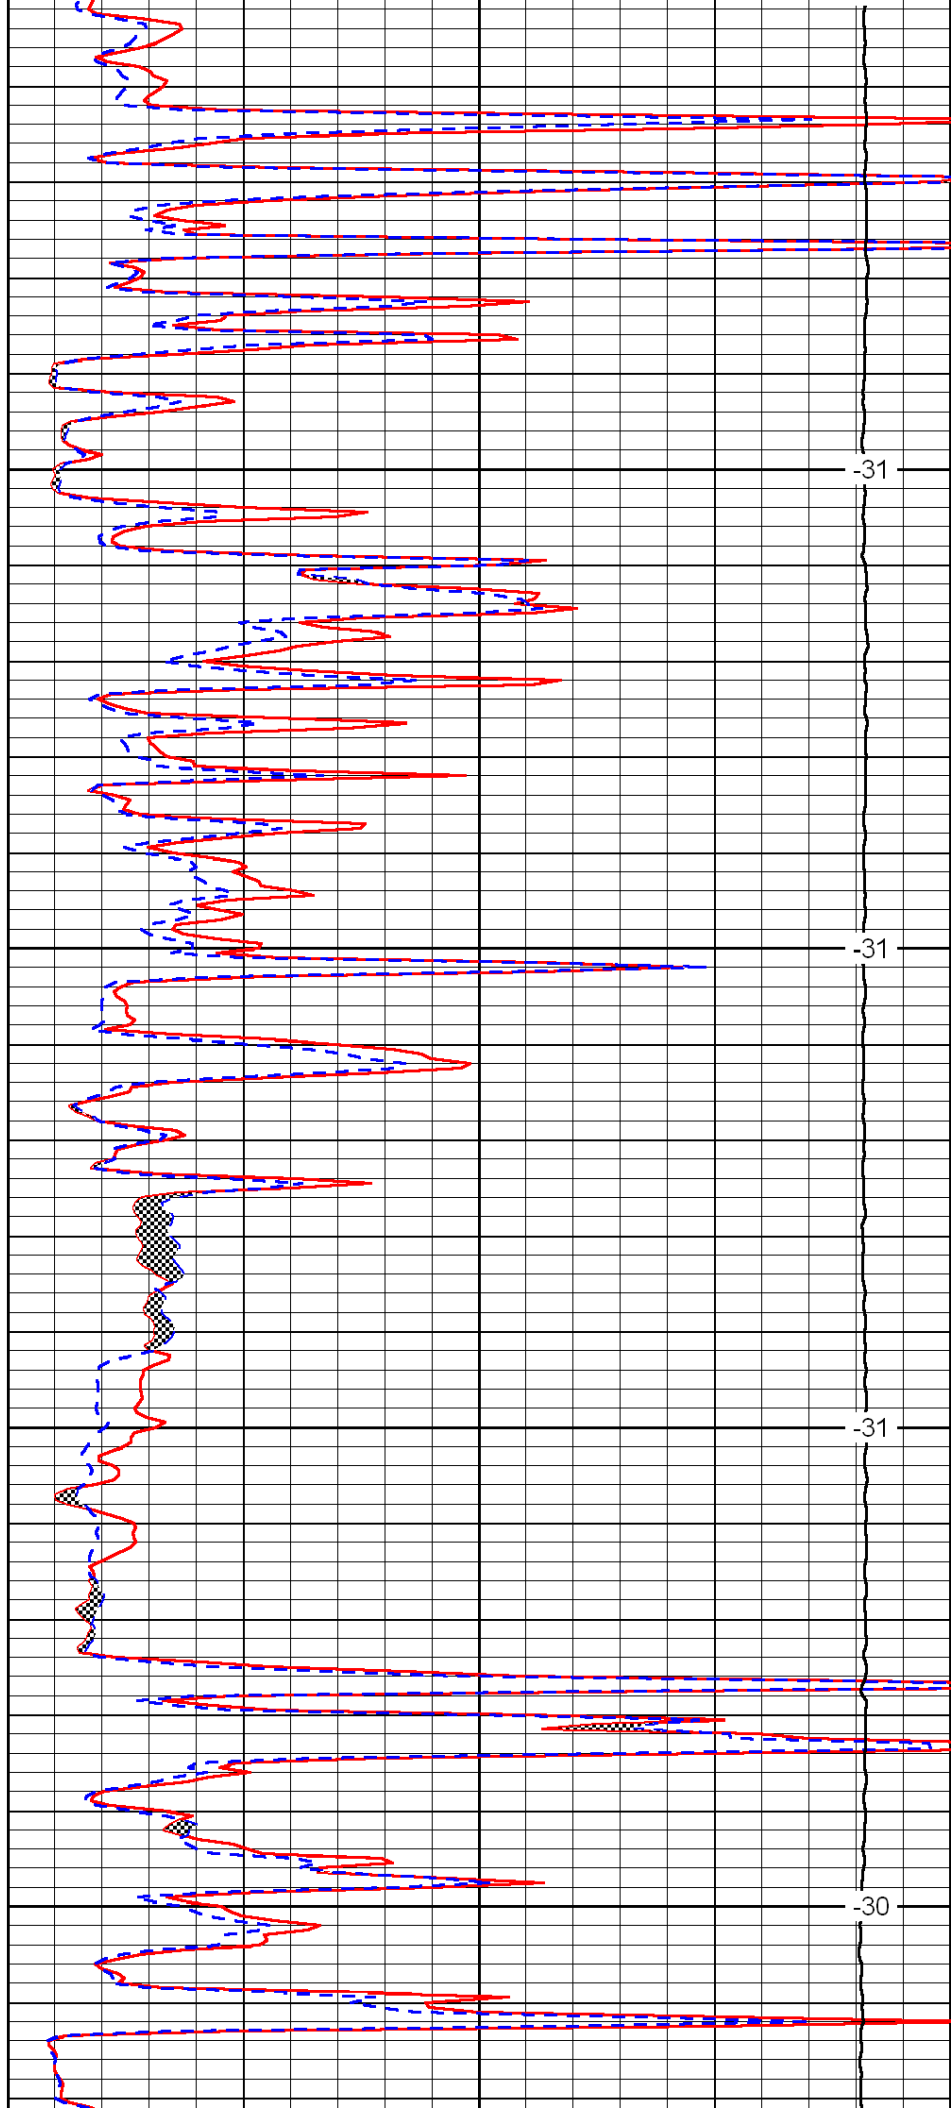


-31

-31

-31

-30

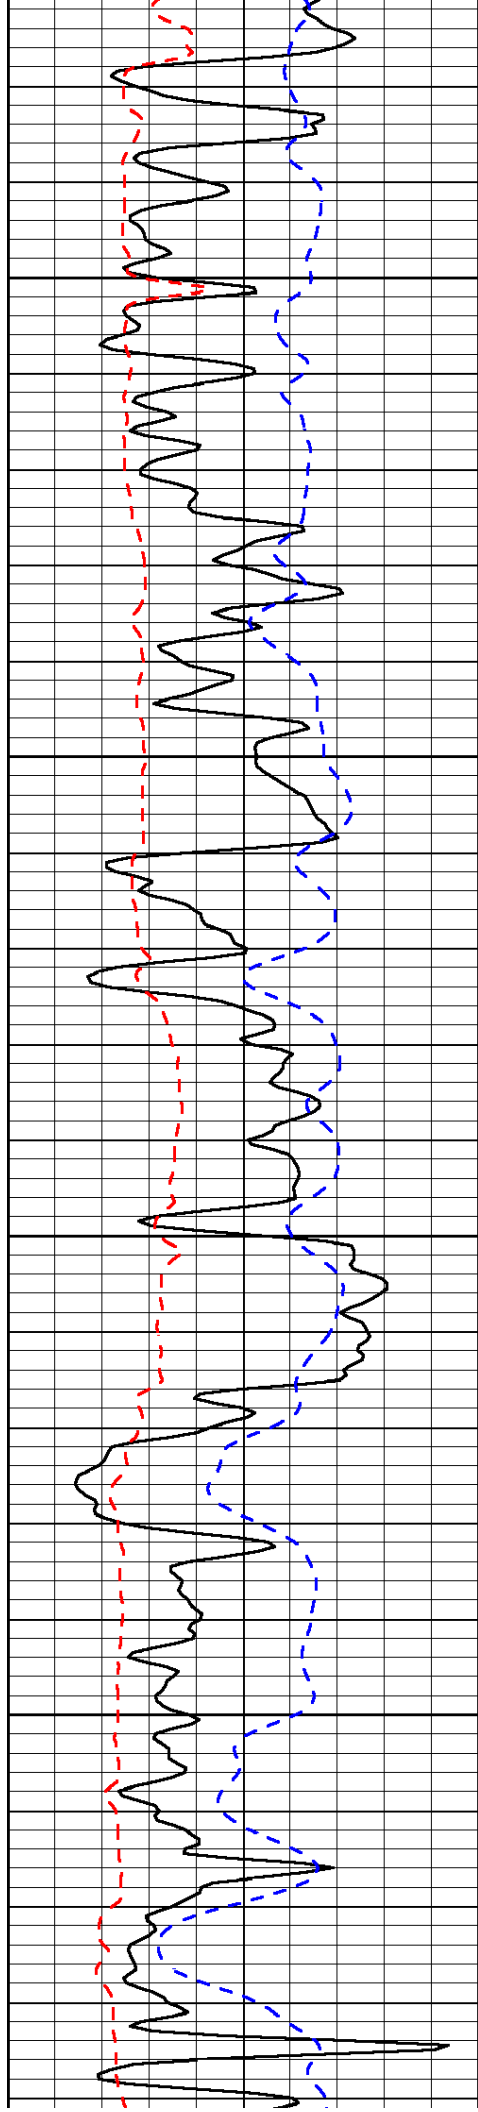



3100

3150

3200

3250

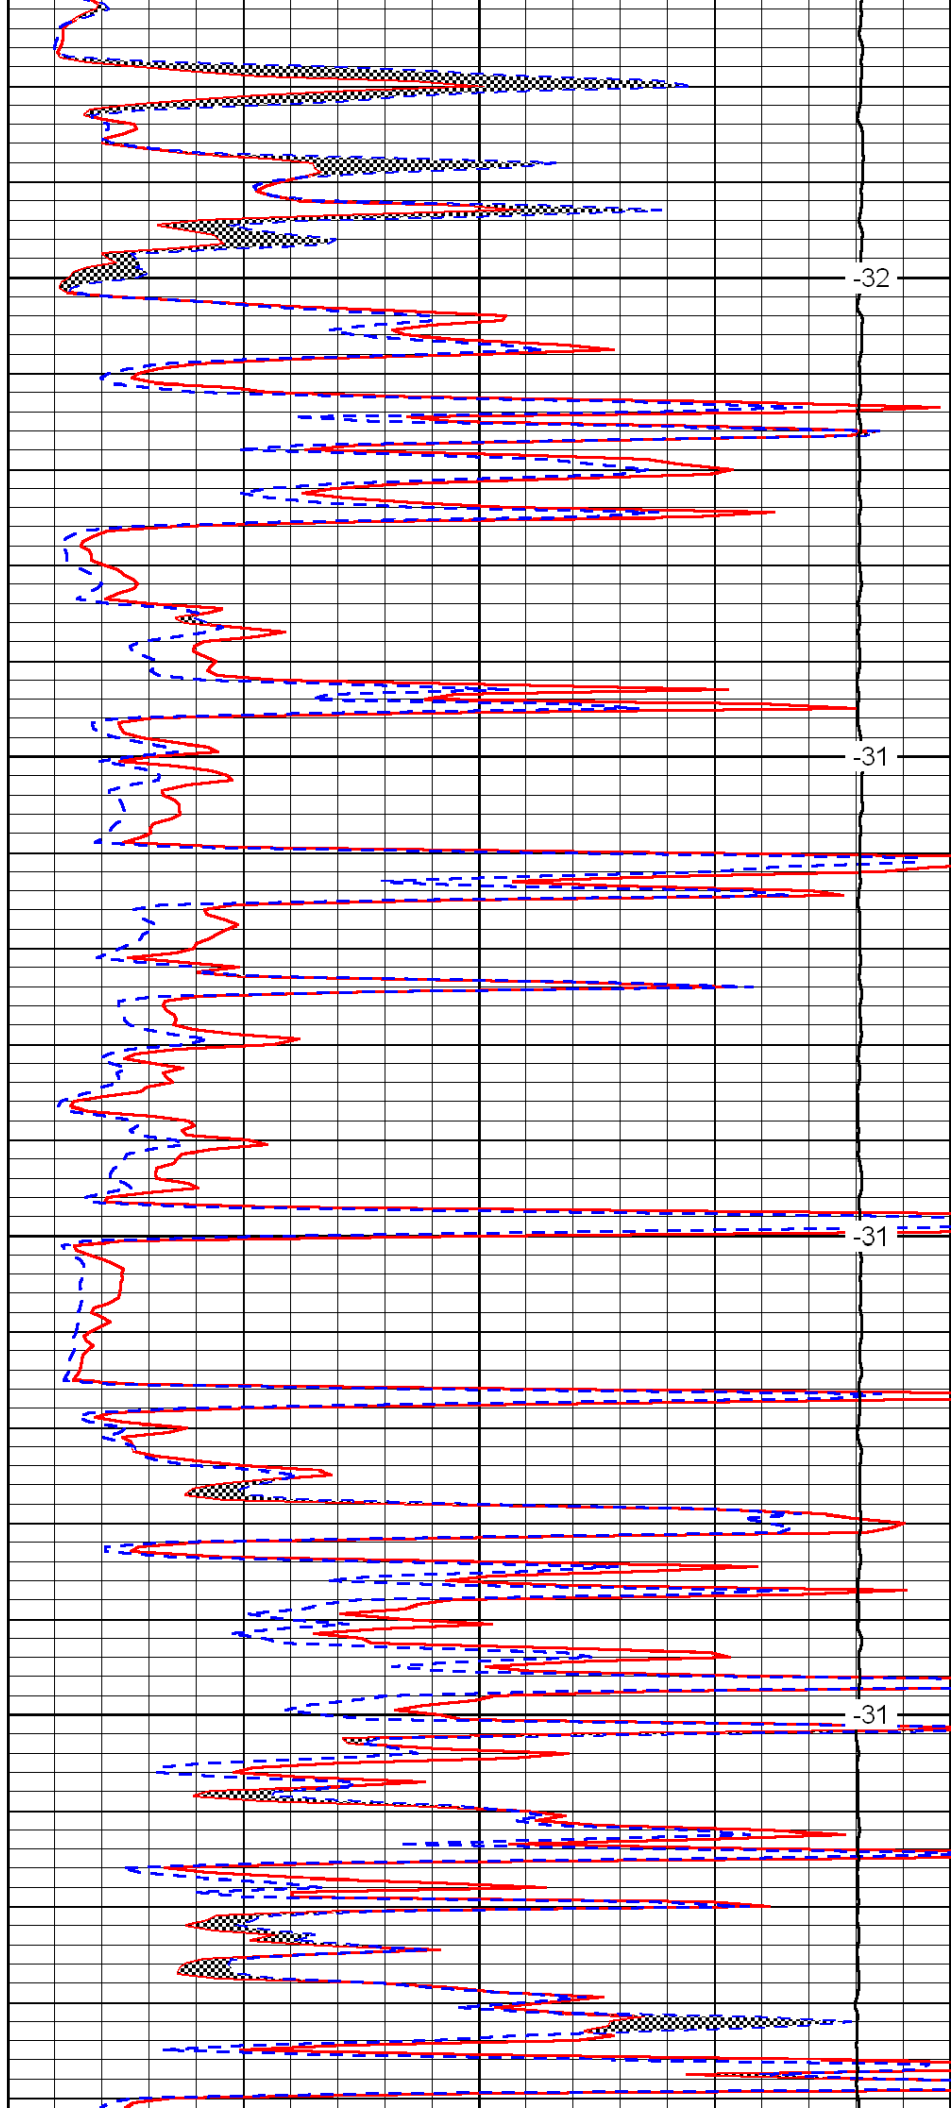

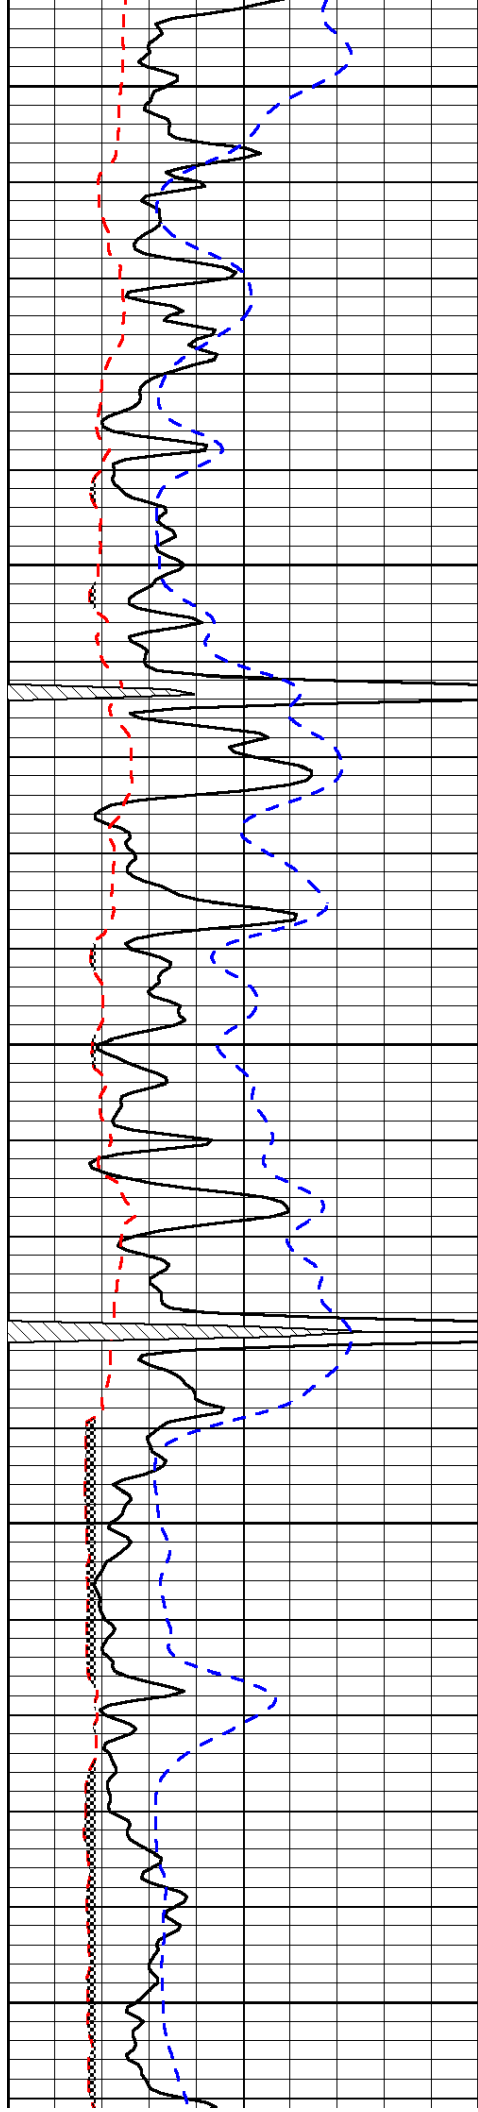


3300

3350

3400

3450

3500

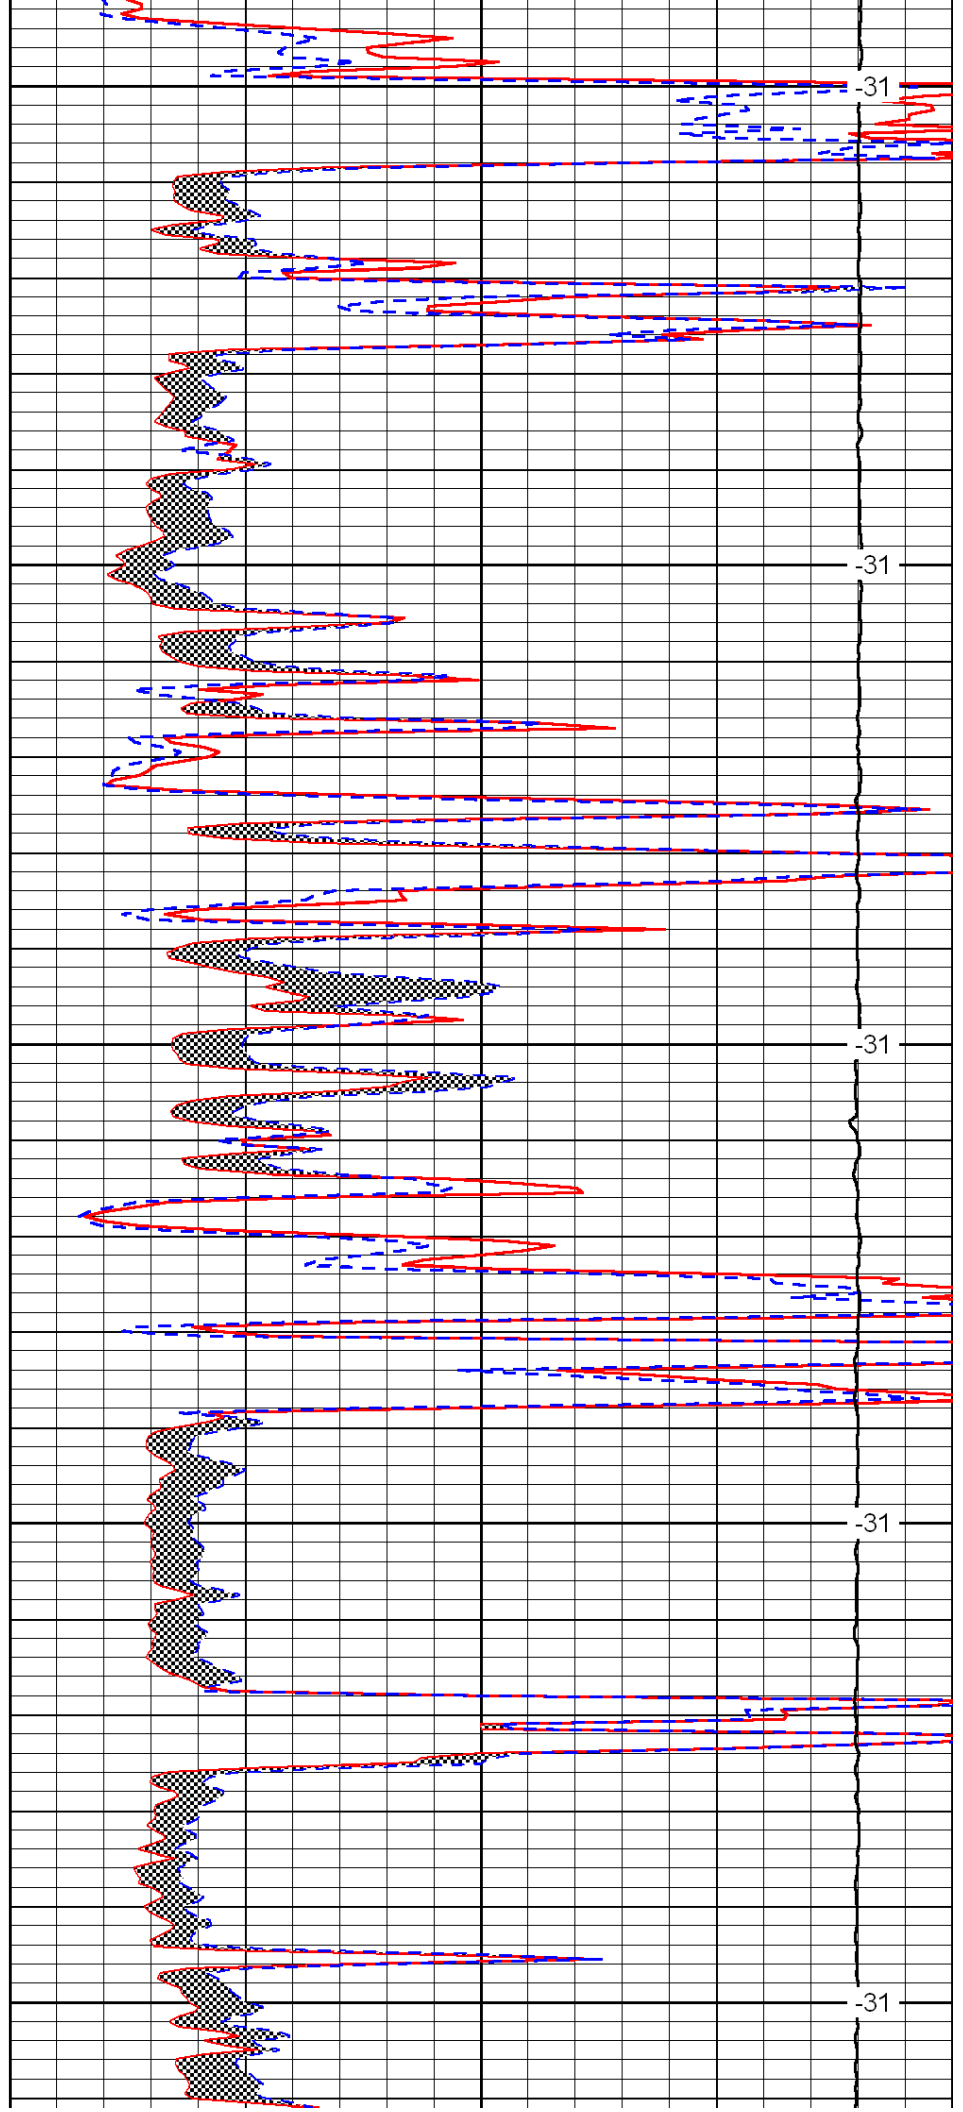


-31

-31

-31

-31

-31

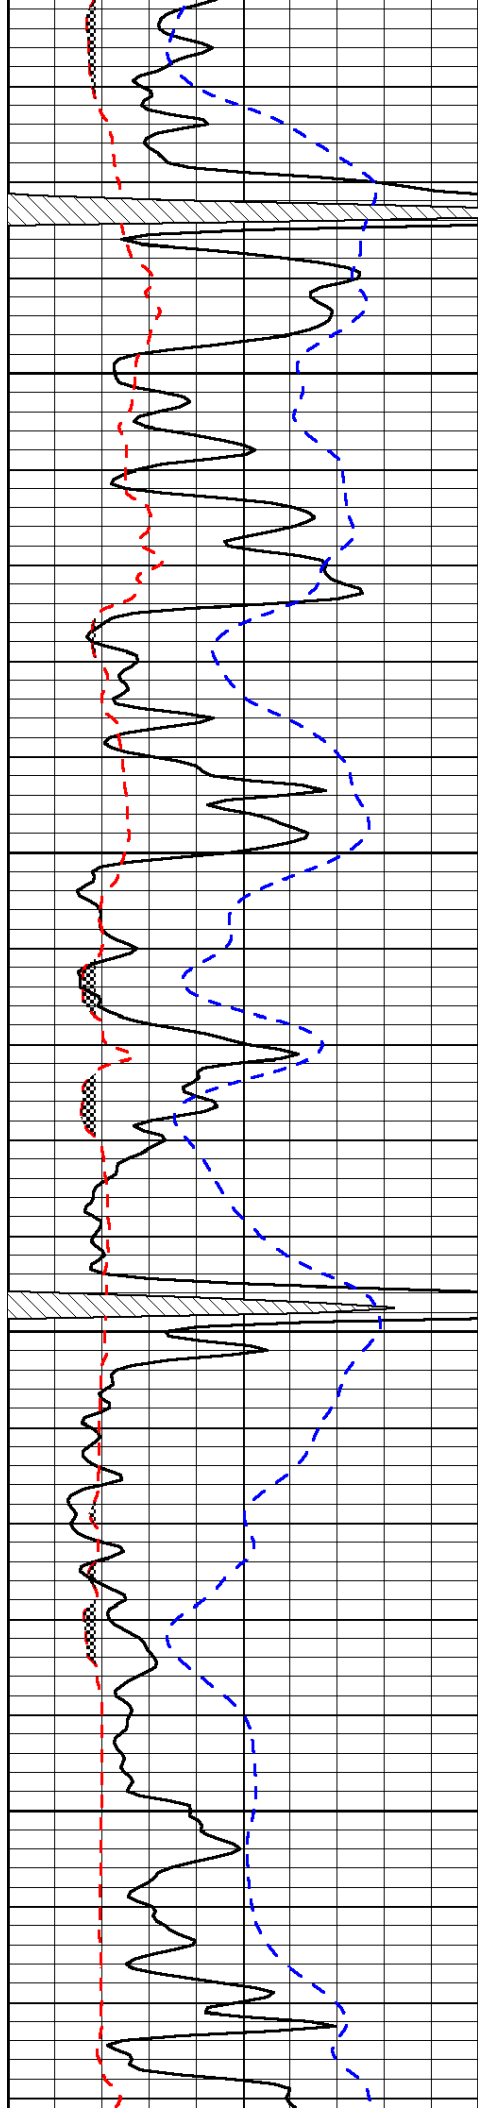


3550

3600

3650

3700

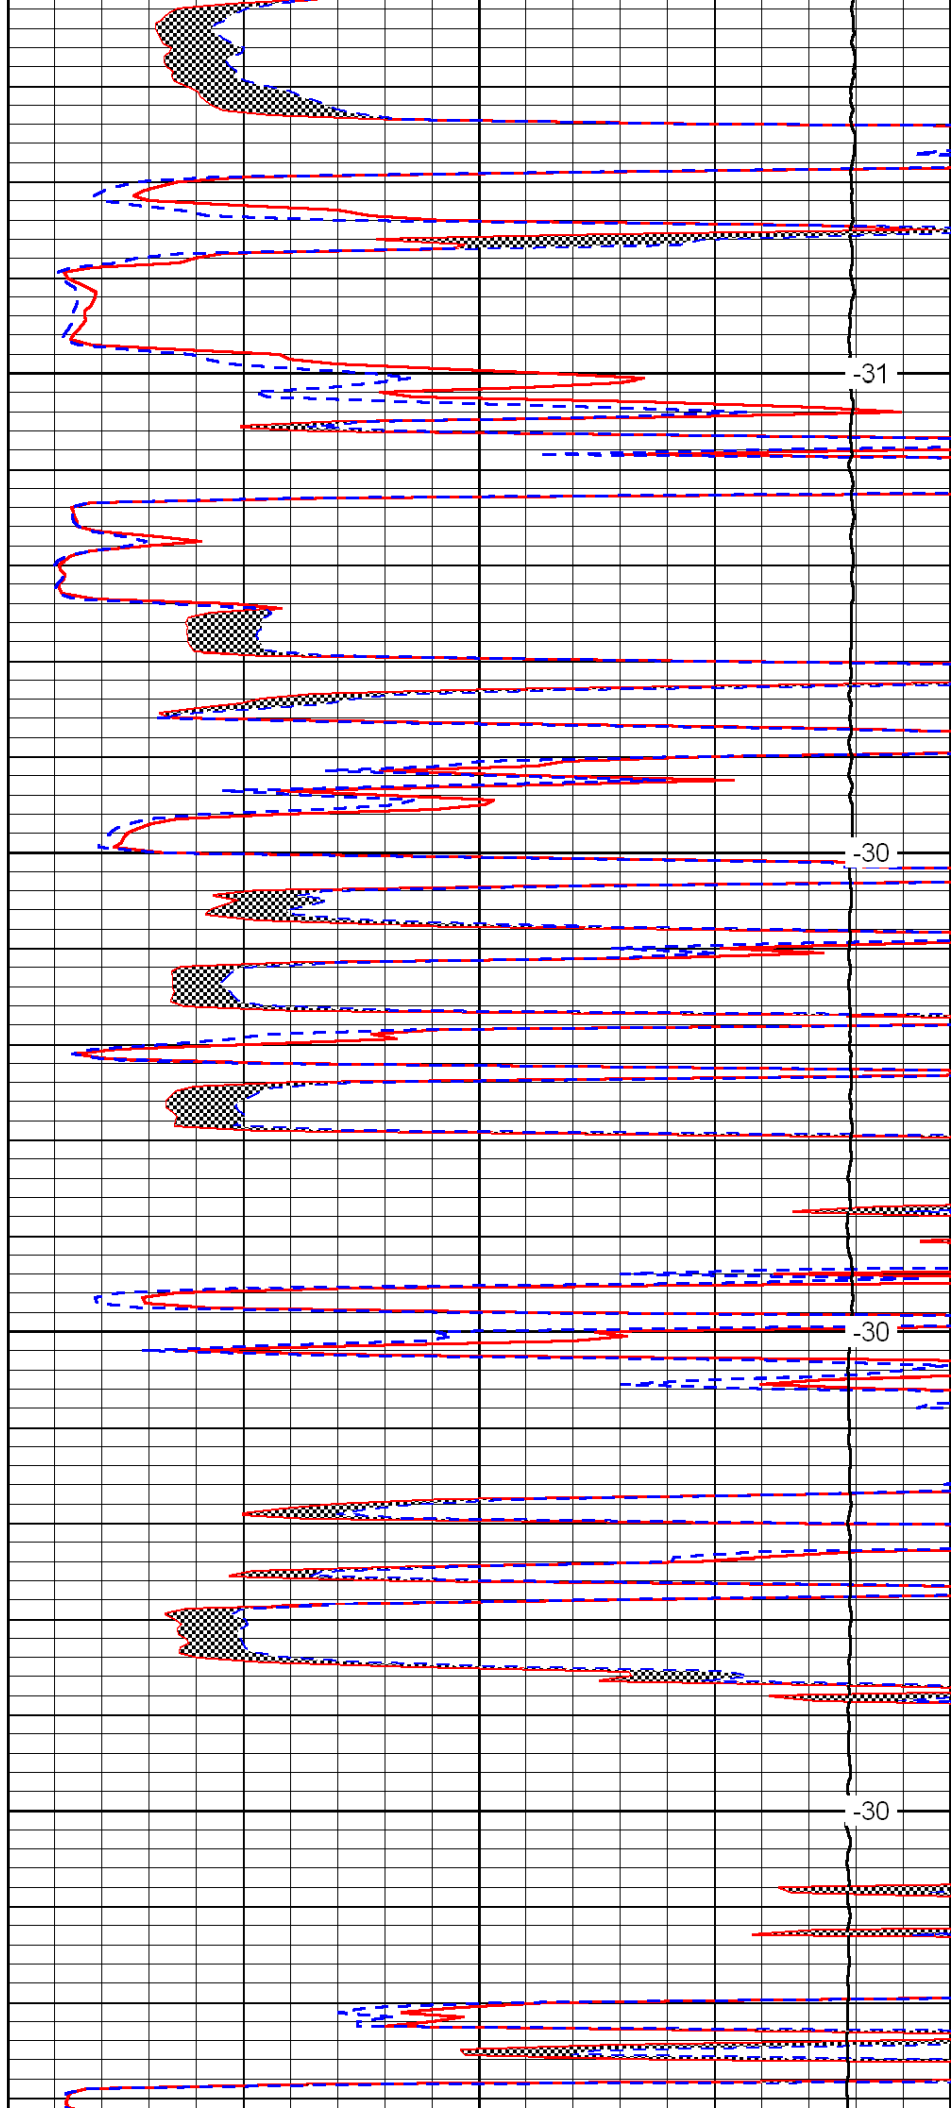


-31

-30

-30

-30

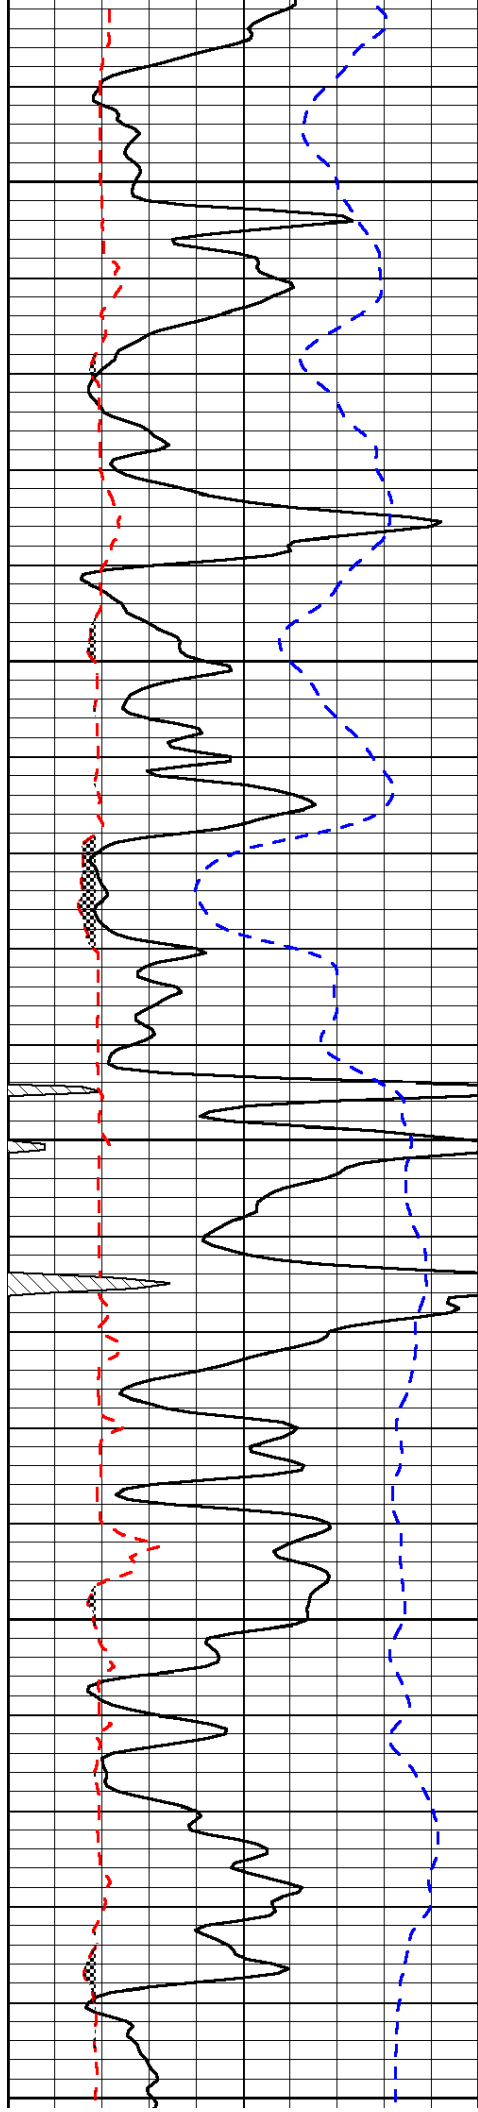


3750

3800

3850

3900

3950

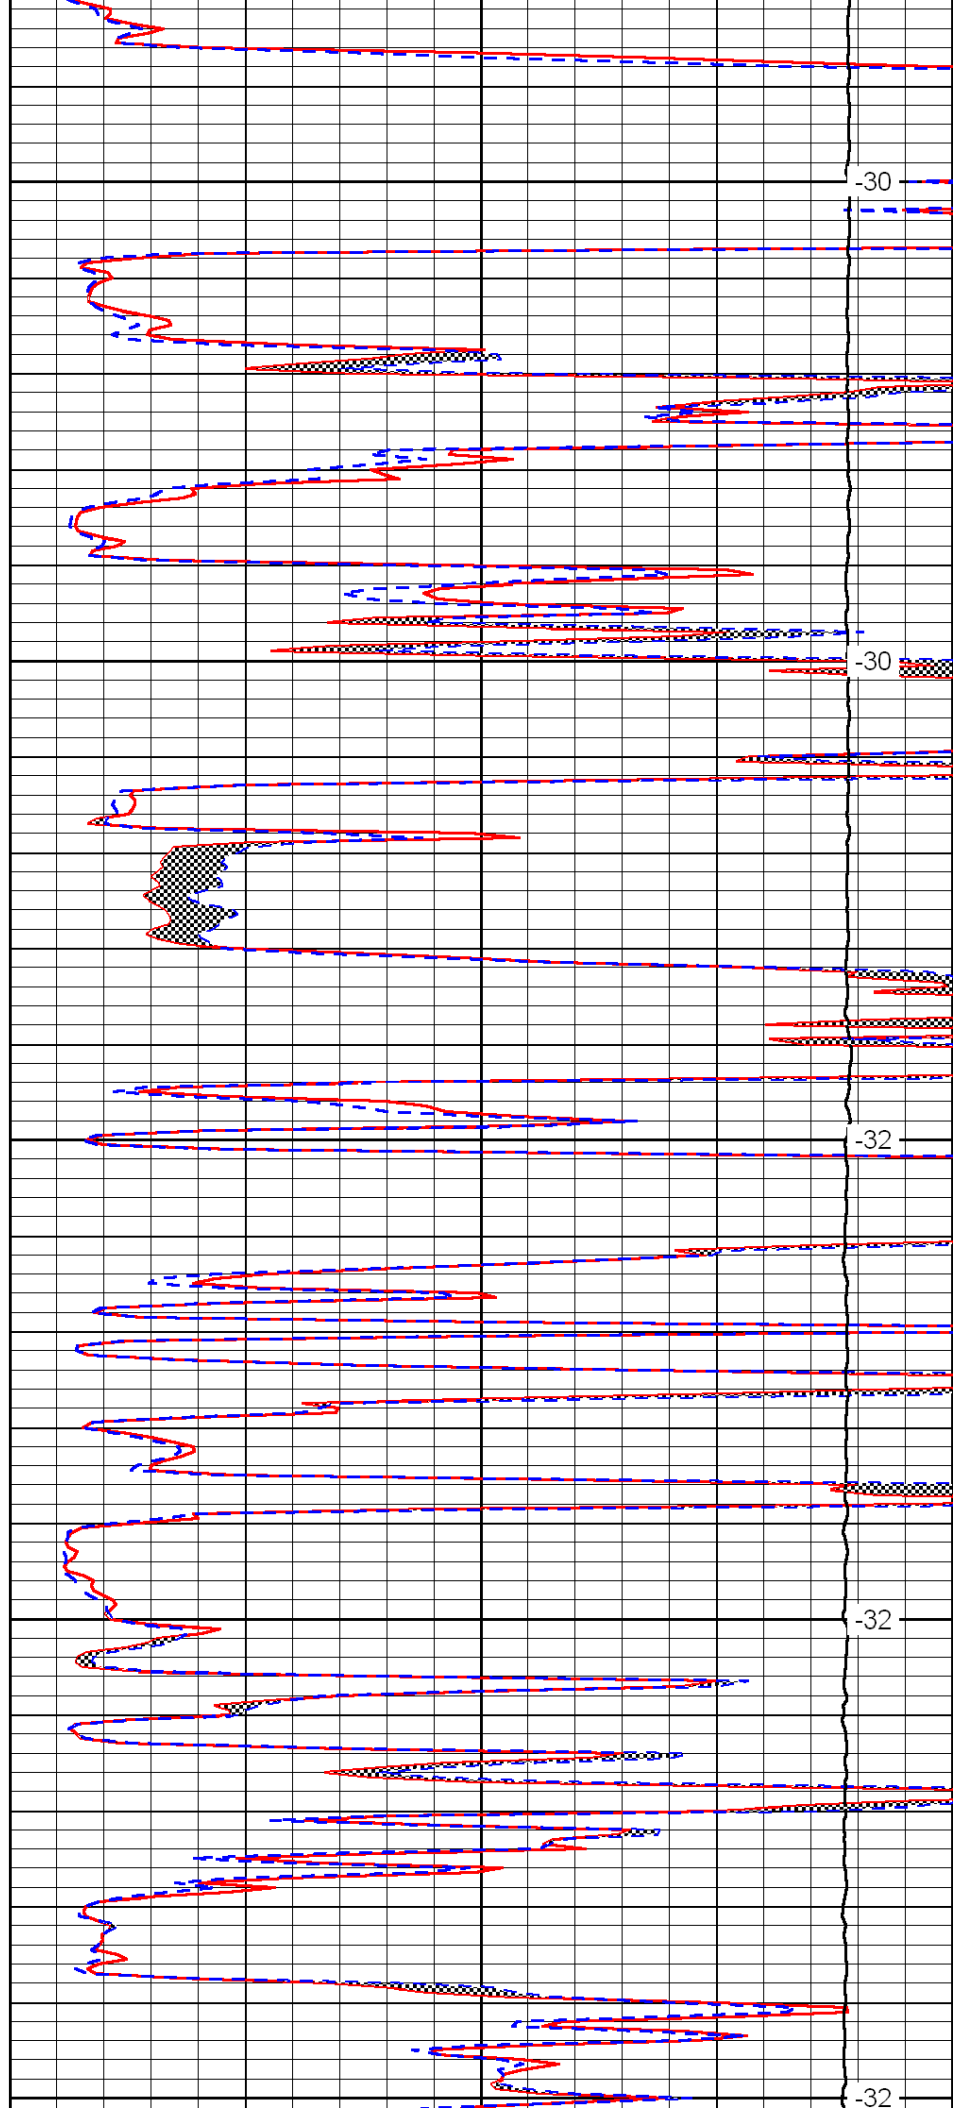

-30

-30

-32

-32

-32

