



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-025-21509-00-00		Company Falcon Exploration, Inc.	
Well Swayze No. 2-17 (SW)		Field Wildcat	
County Clark		State Kansas	
Location SE - NE - NE - SW 2280' FSL & 2420' FWL		Other Services CNL/CDL DIL/BHCS	
Sec: 17 Twp: 30 S Rge: 22 W		Elevation K.B. 2470 D.F. 2460 G.L. 2460	
Permanent Datum Ground Level		Elevation 2460	
Log Measured From Kelly Bushing		10 Ft. Above Perm. Datum	
Drilling Measured From Kelly Bushing			
Date	9/22/2010		
Run Number	Two		
Depth Driller	5507		
Depth Logger	5506		
Bottom Logged Interval	5505		
Top Log Interval	4100		
Casing Driller	13.375 @ 406		
Casing Logger	400		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	10,500		
Density / Viscosity	9.25 53		
pH / Fluid Loss	9.5 15.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.5 @ 78		
Rmf @ Meas. Temp	1.13 @ 78		
Rmc @ Meas. Temp	2.03 @ 78		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.89 @ 131		
Operating Rig Time	6 Hours		
Max Rec. Temp. F	131		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Jim Hall		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Kingsdown, Ks; 6-1/2 South on 94;
East Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

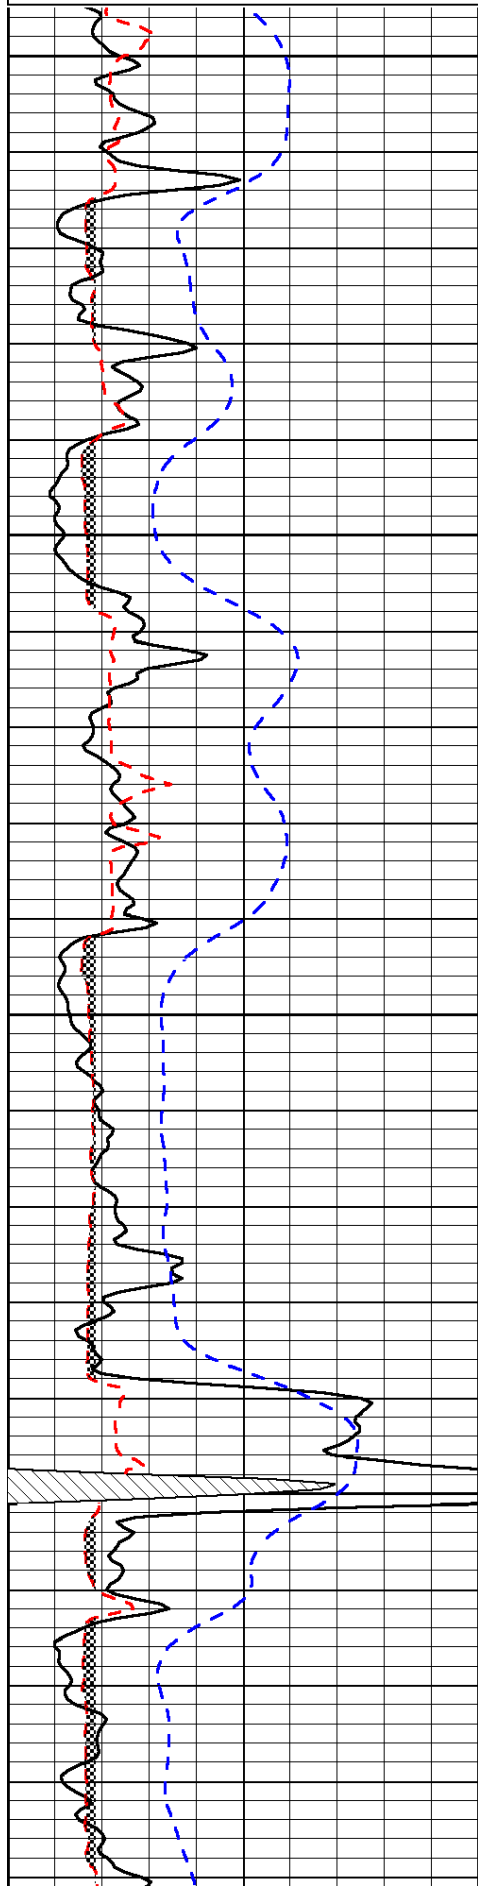


4100

4150

4200

4250

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

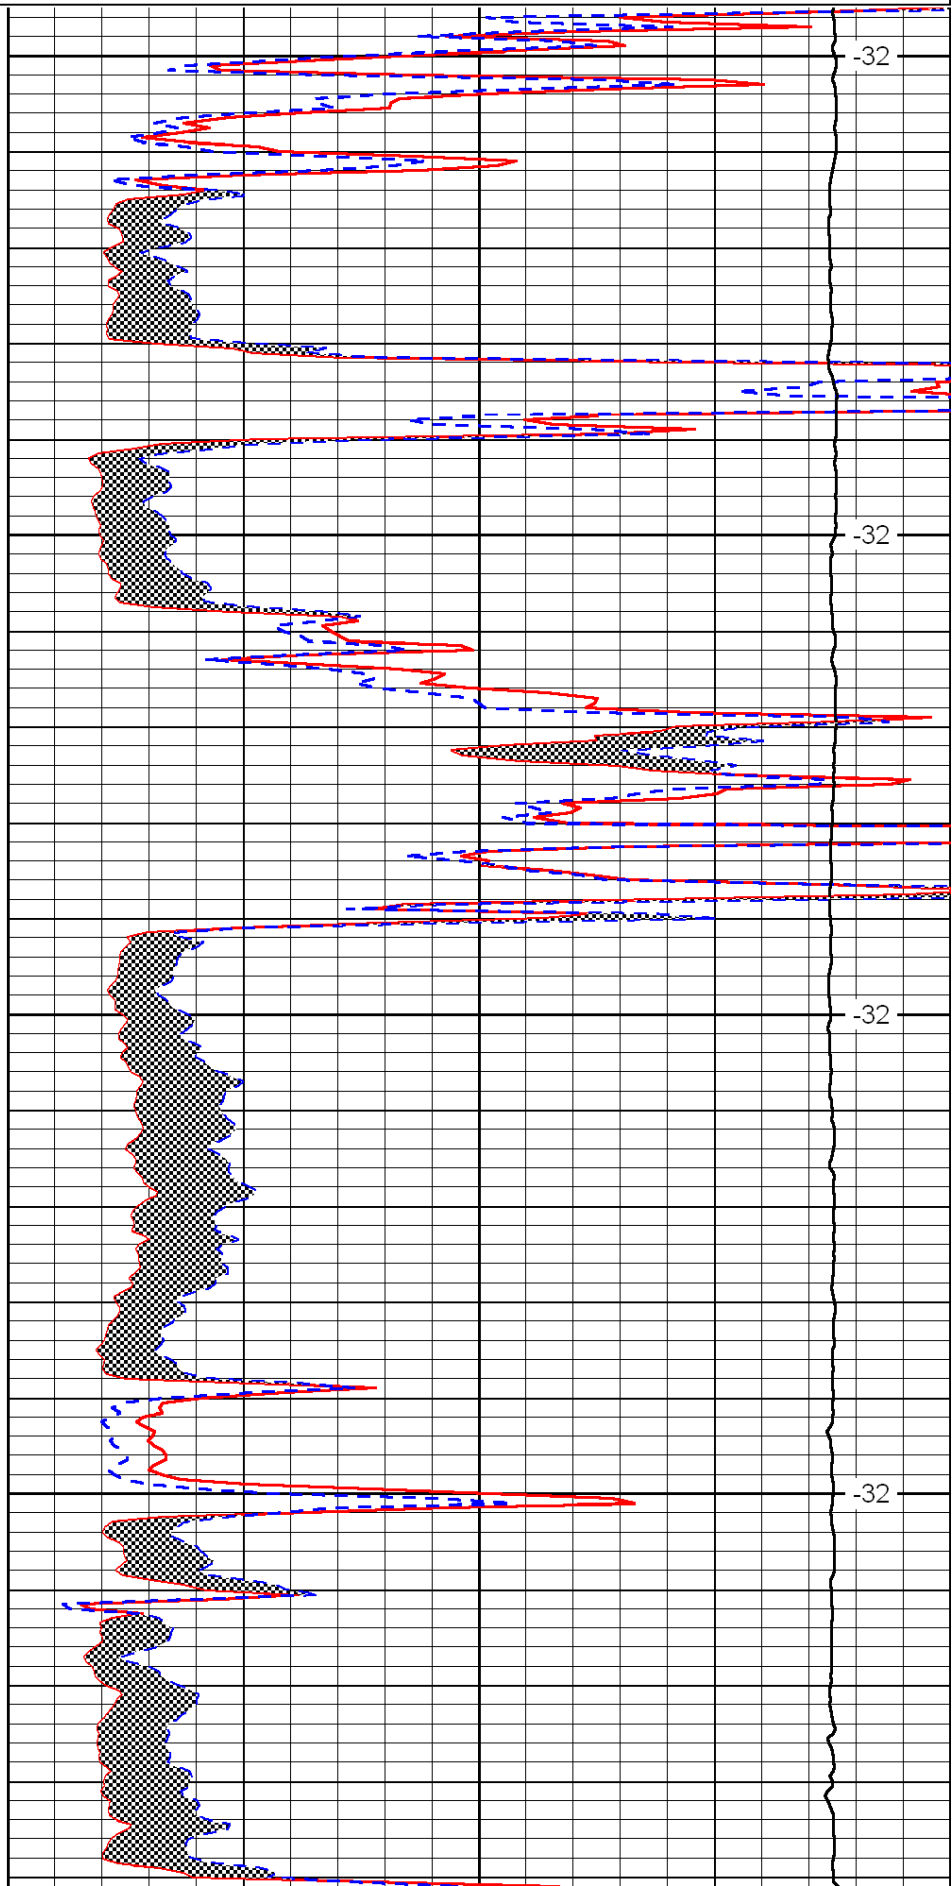


-32

-32

-32

-32

LSPD

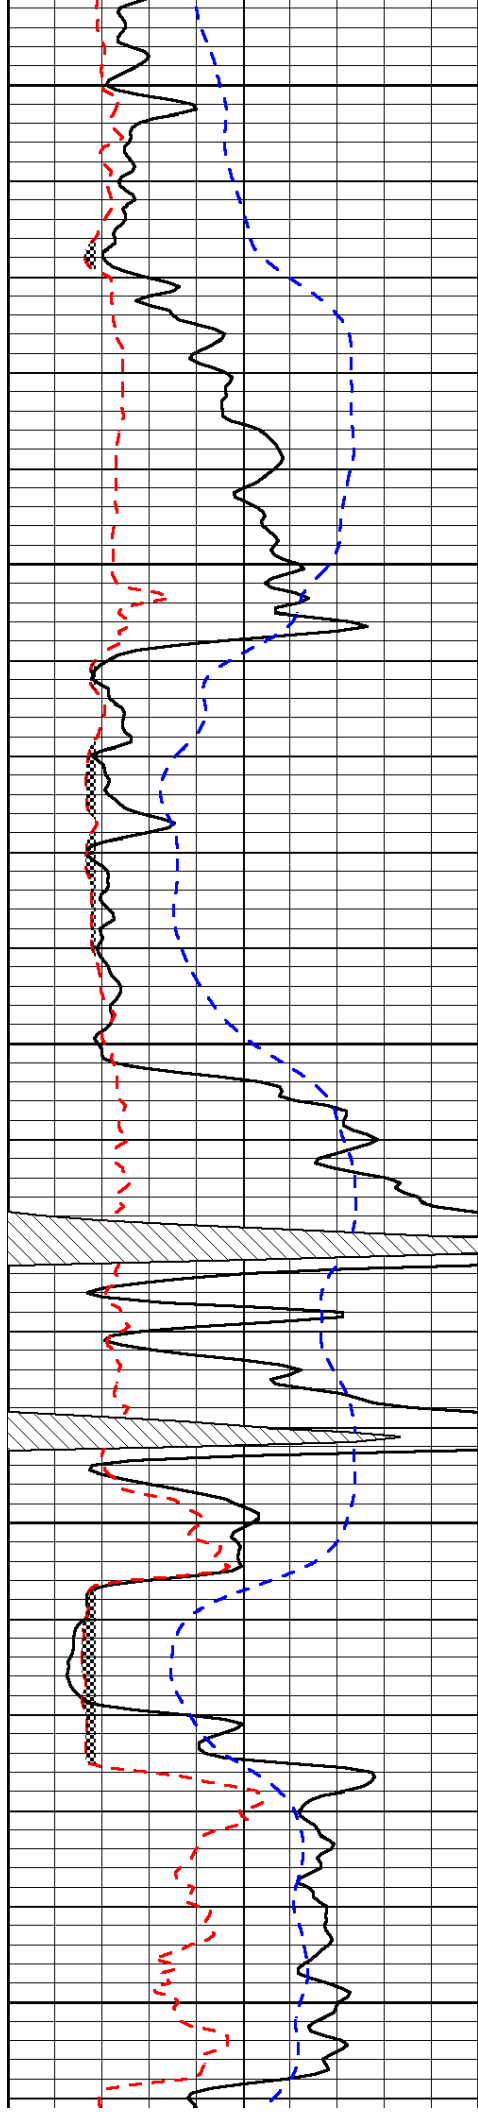


4300

4350

4400

4450

4500

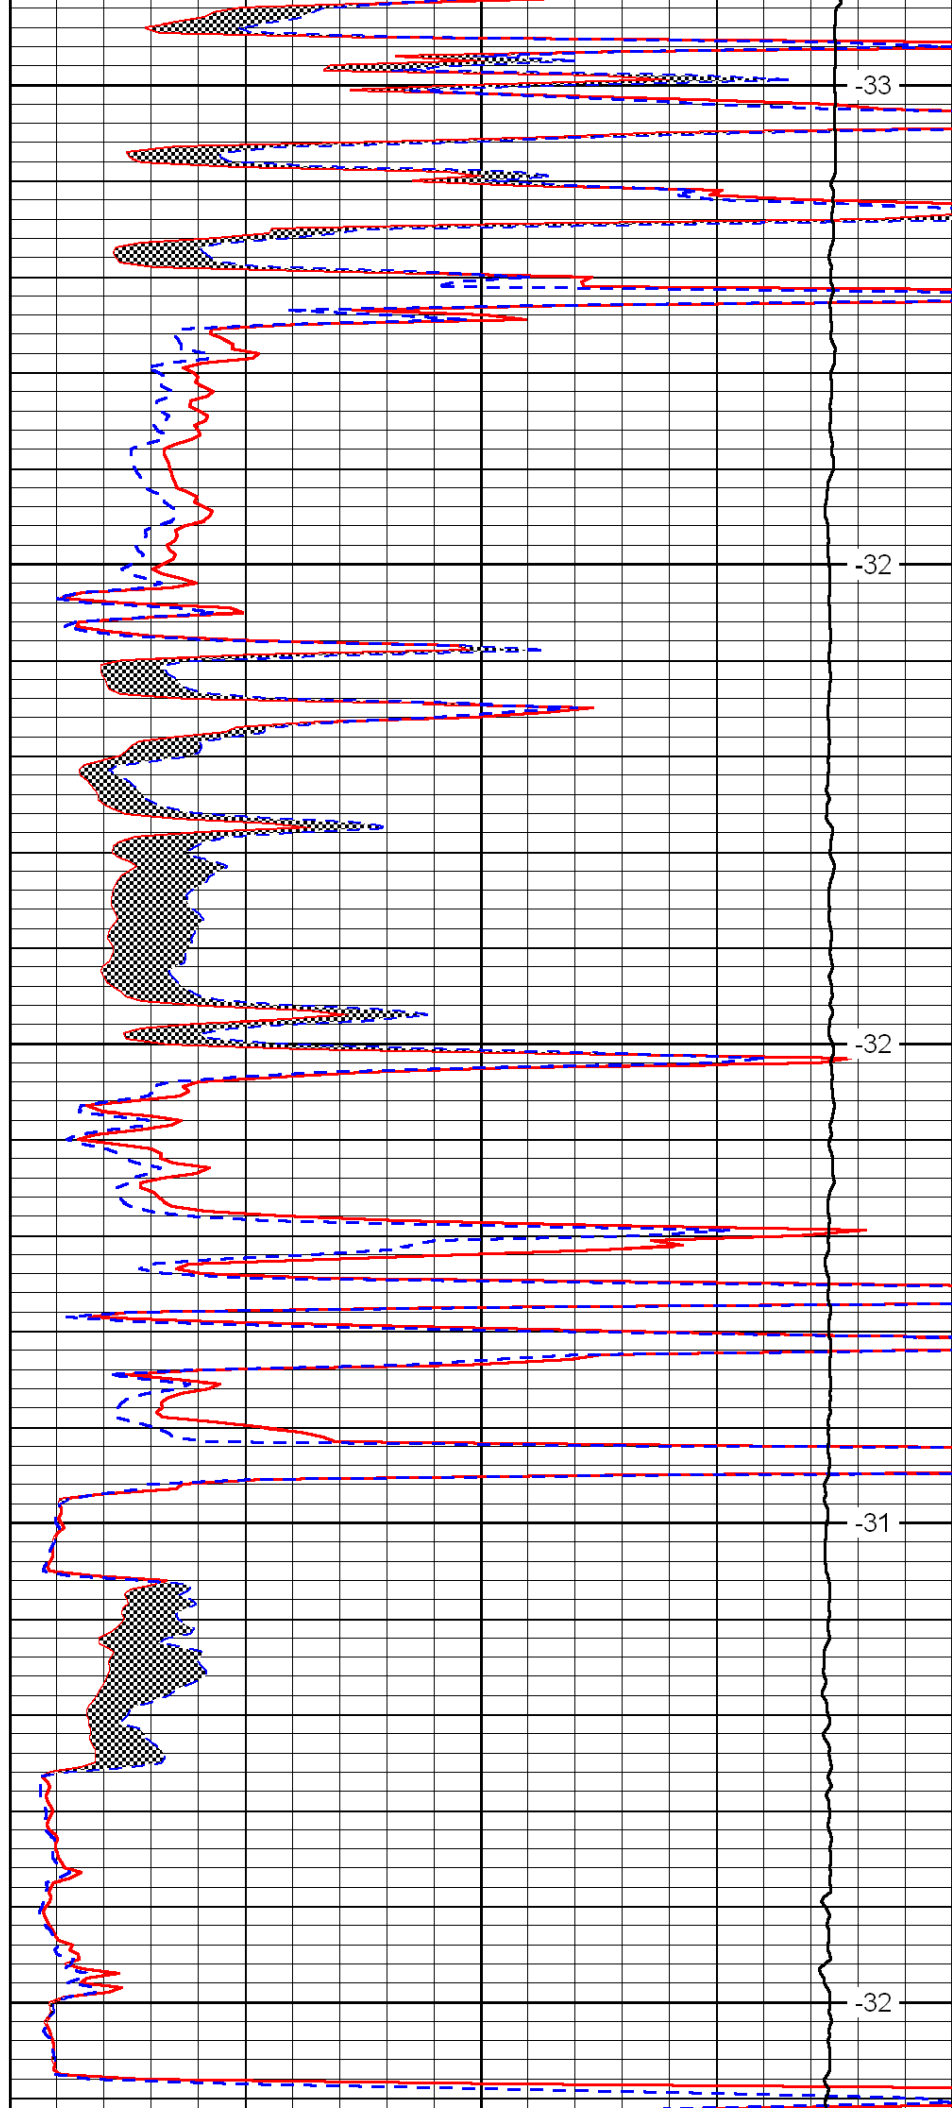


-33

-32

-32

-31

-32

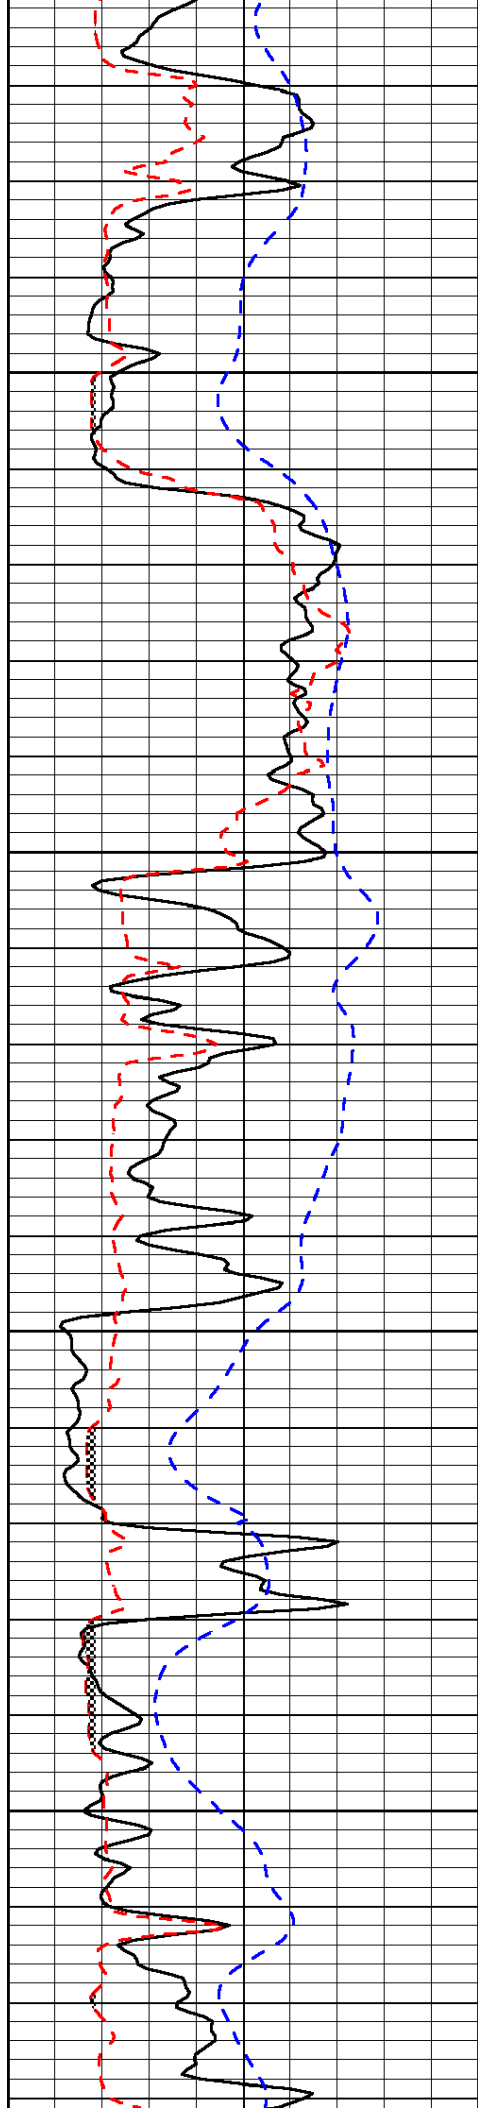


4550

4600

4650

4700

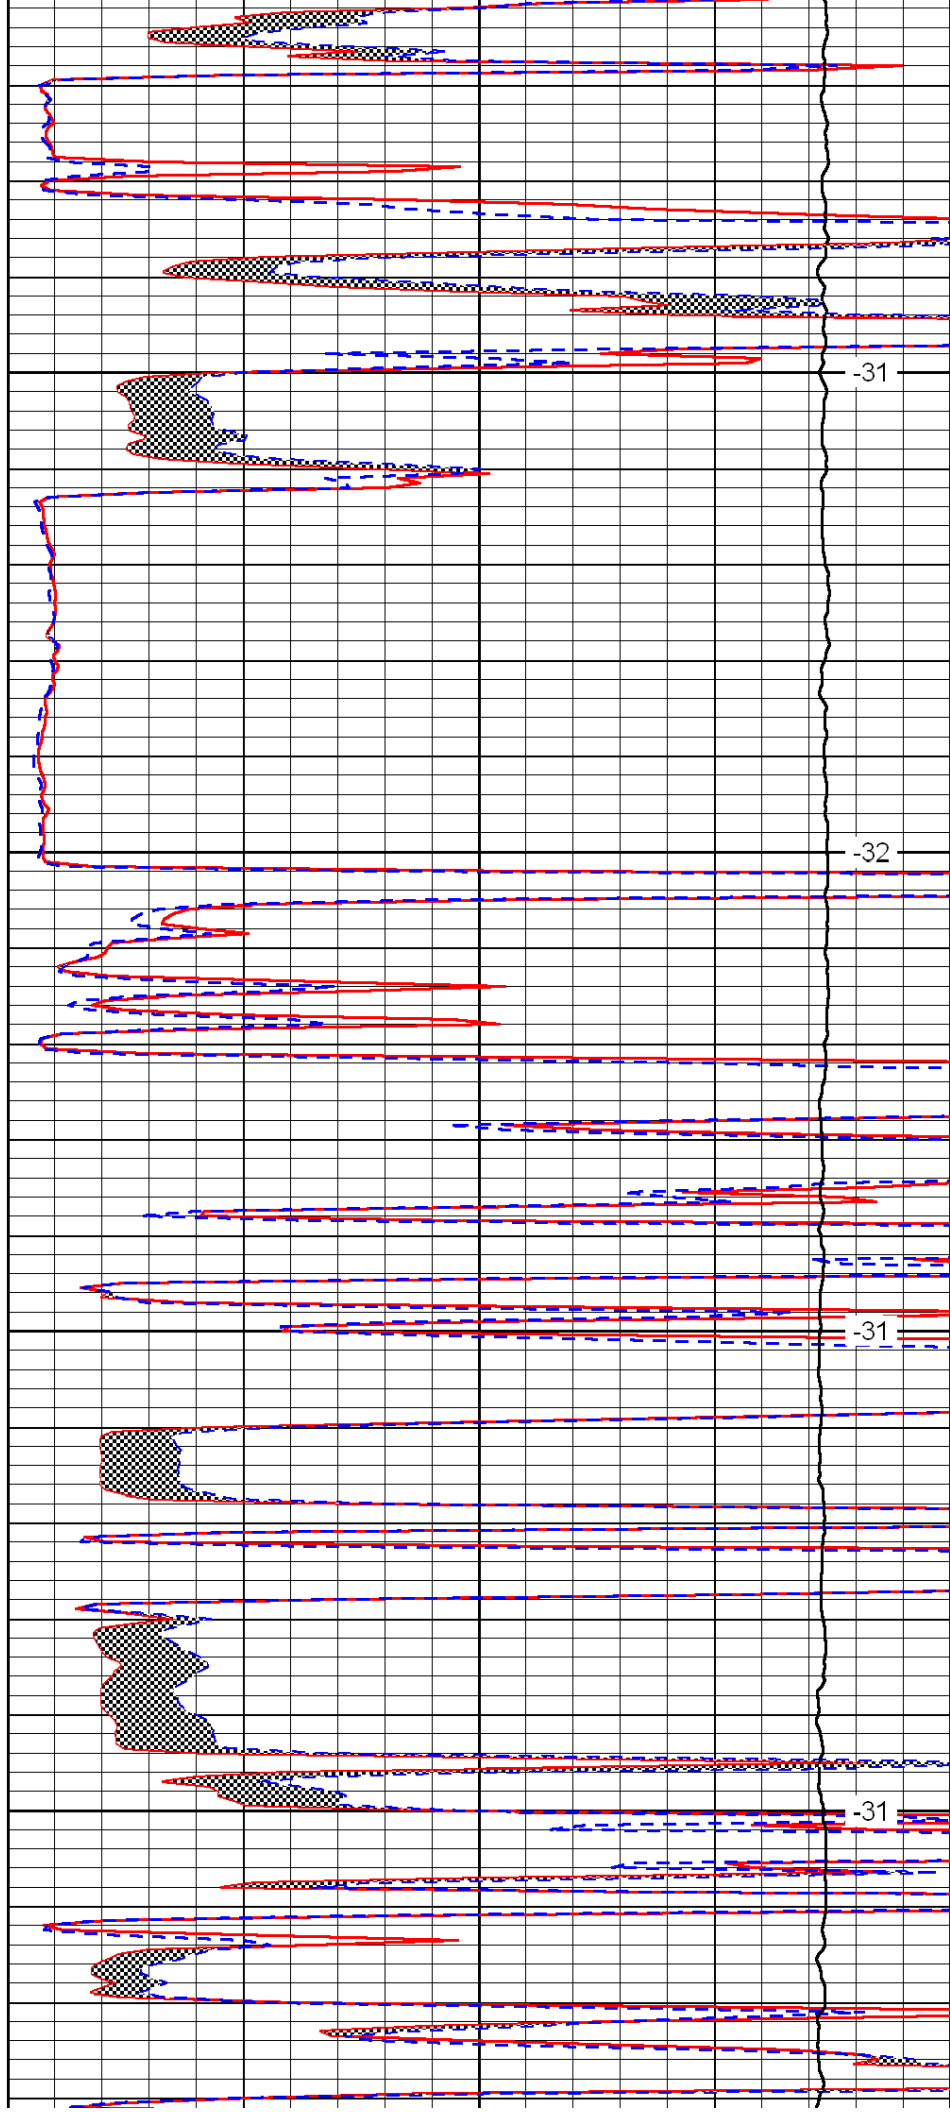


-31

-32

-31

-31

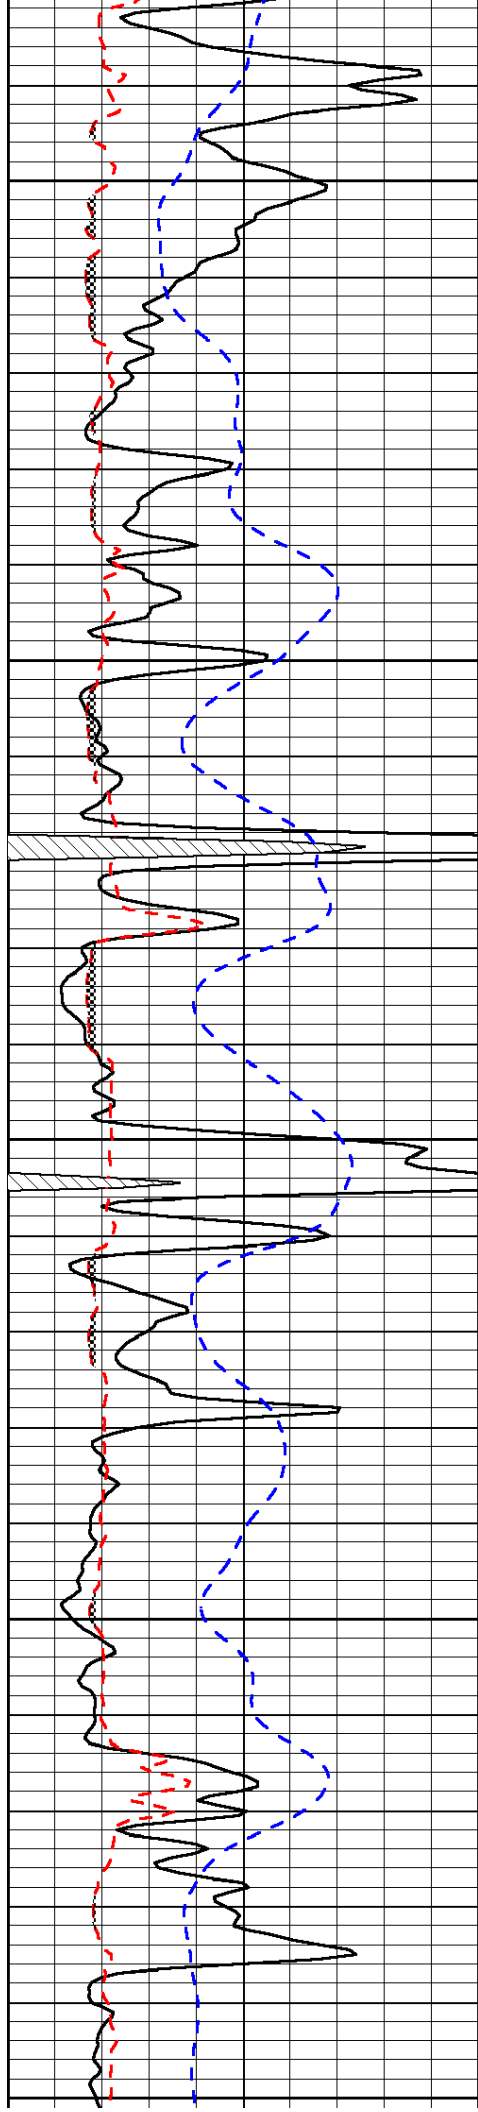


4750

4800

4850

4900

4950

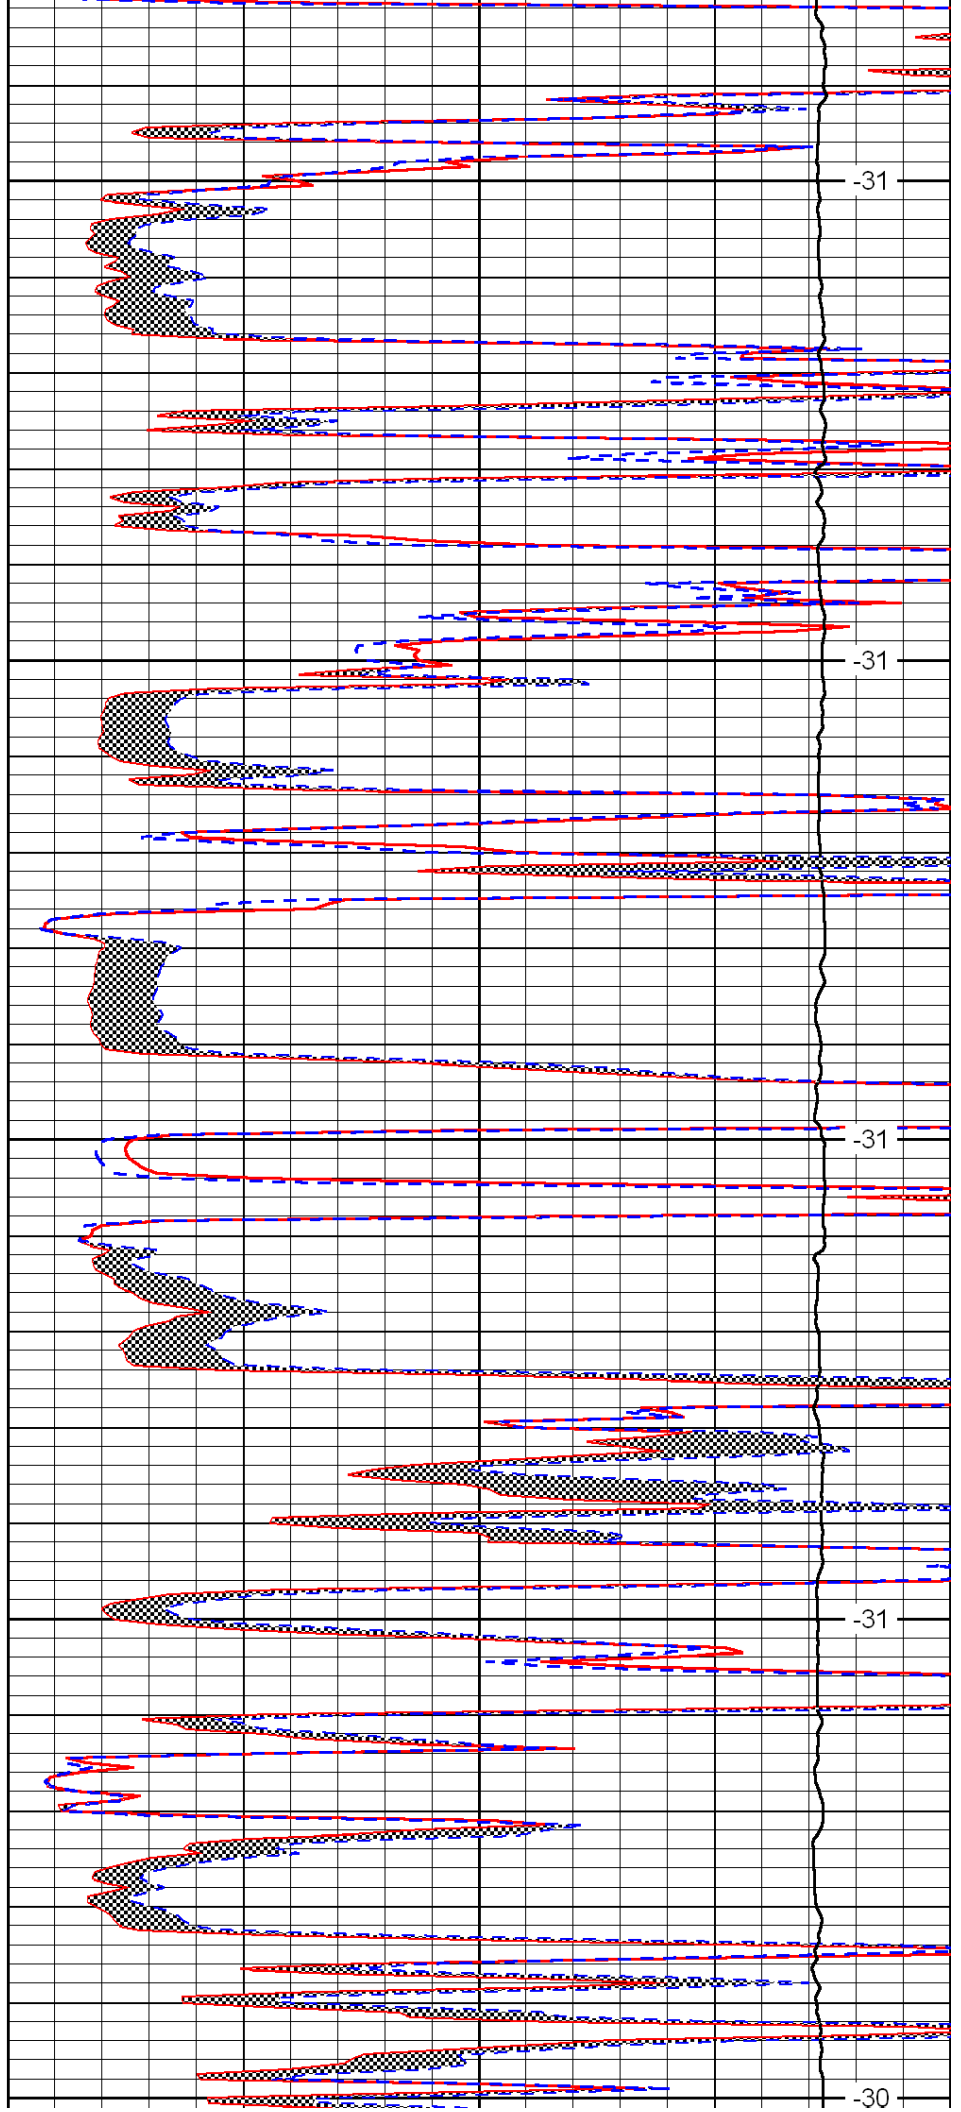


-31

-31

-31

-31

-30

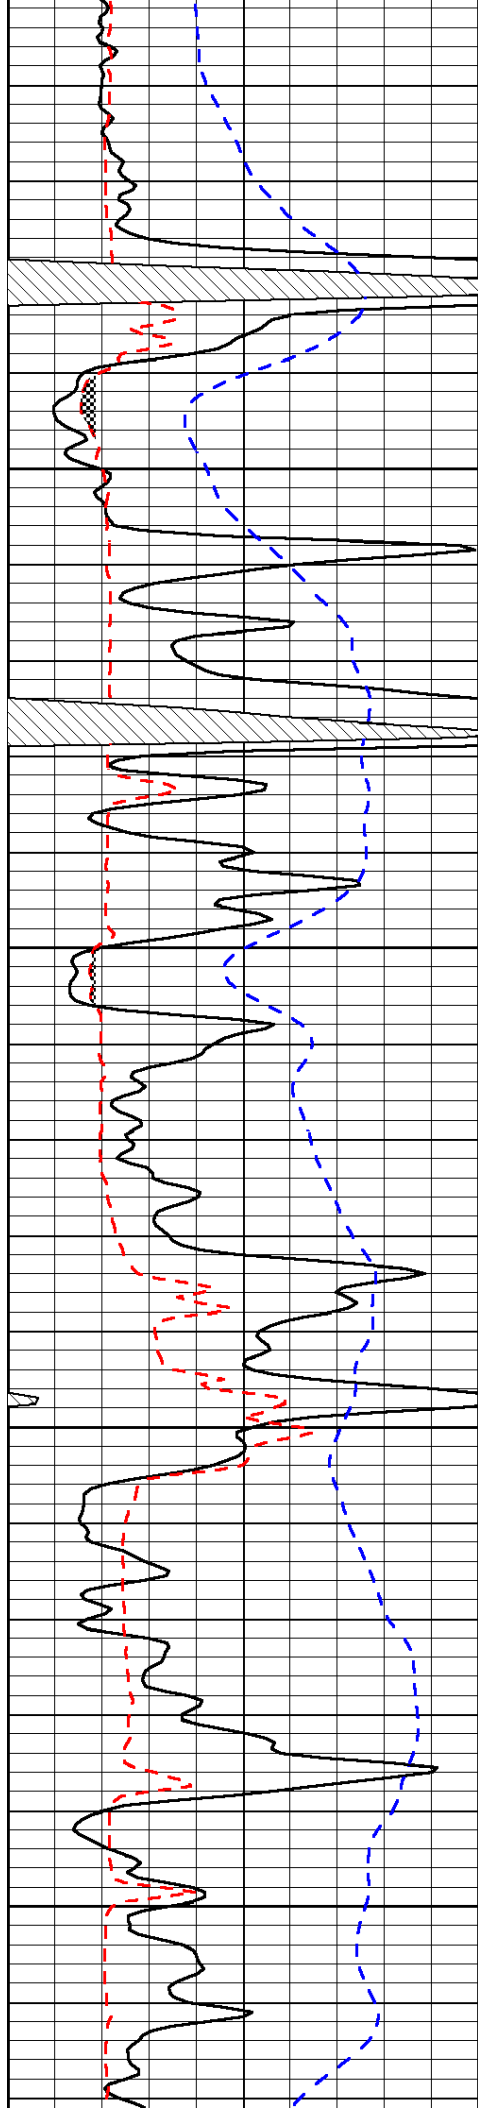



5000

5050

5100

5150

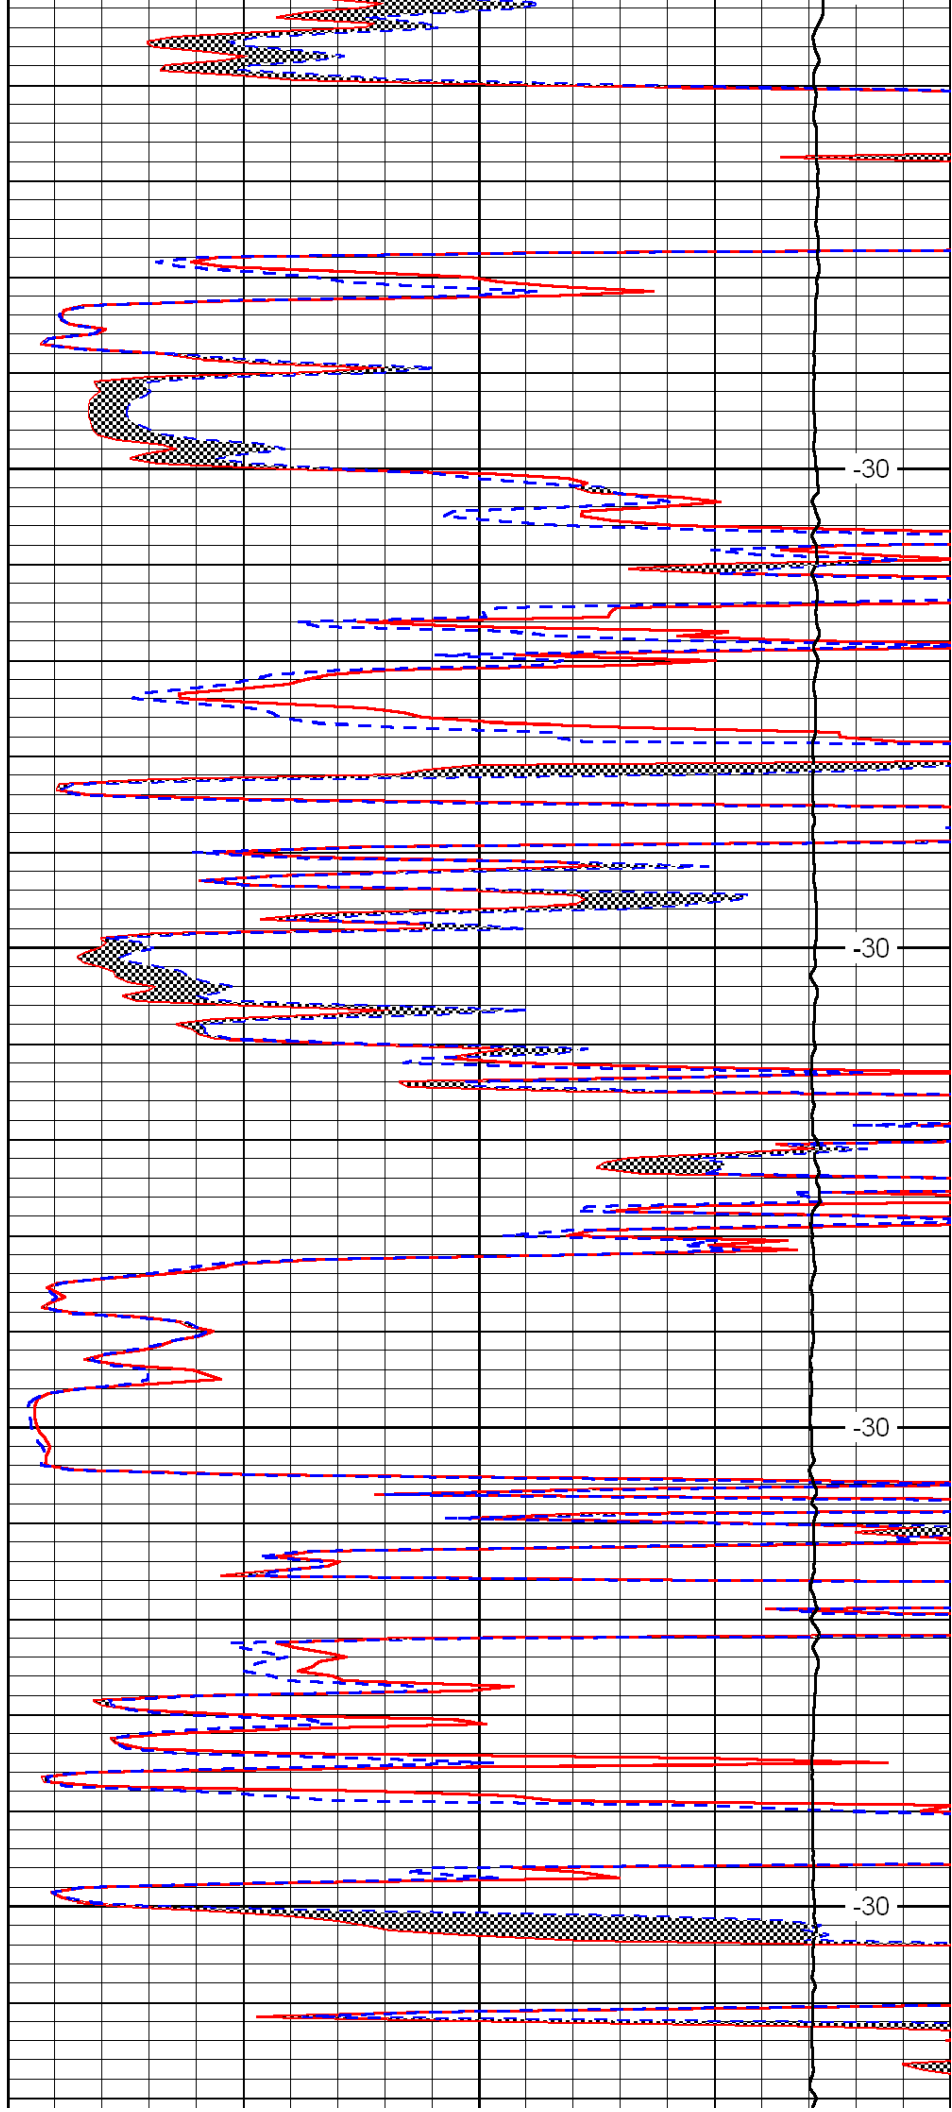

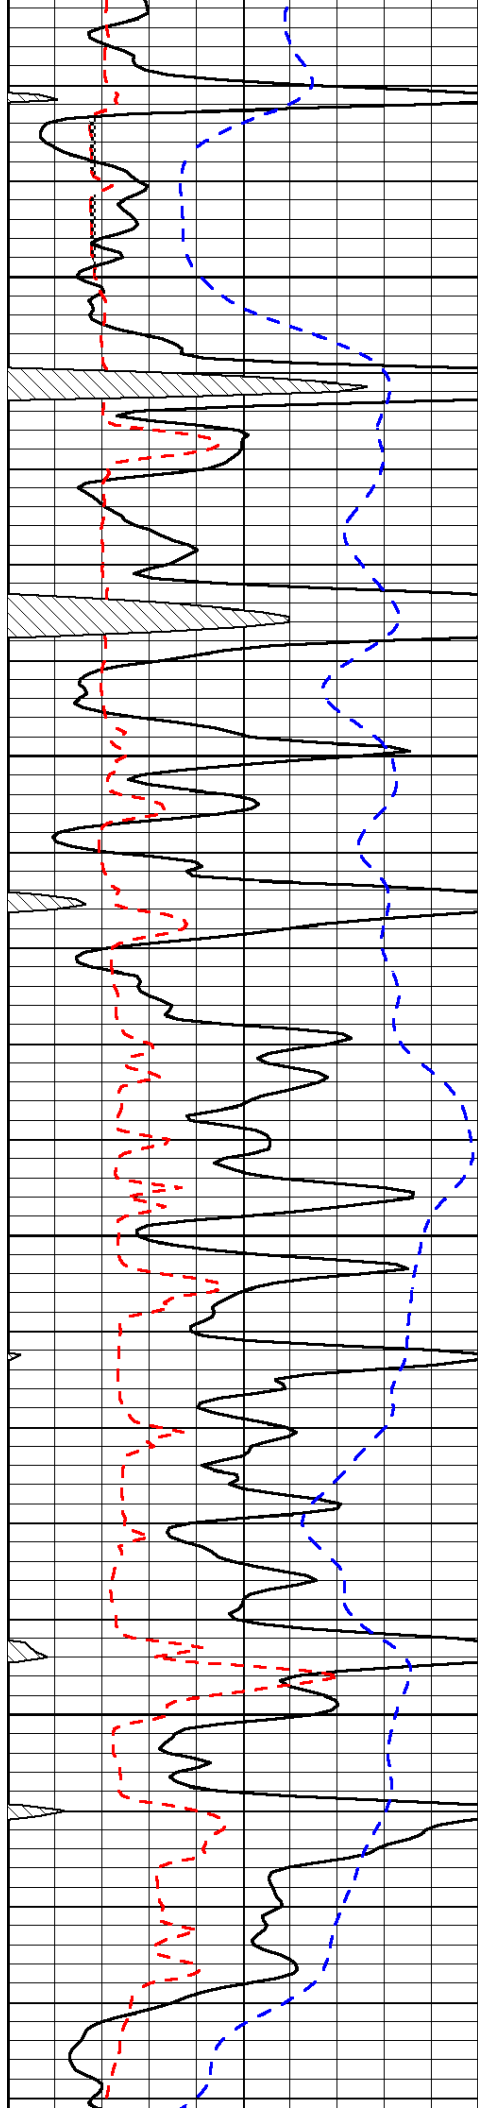

5200

5250

5300

5350

