

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

15-153-00005-00-00

WELL PLUGGING APPLICATION FORM
File One Copy

Lease Owner Jackson, Shear &/ ^{Parker} Address Duncan, Oklahoma
(Applicant)

Lease (Farm Name) Grover Well No. 1

Well Location SW¹/₂-NE¹/₄ Sec. 32 Twp. 5 Rge 33 (E) - (W) W

County Rawlins Field Name (if any) Wildcat

Total Depth 4940 ~~Oil~~ ~~Gas~~ Dry Hole Dry Hole

Was well log filed with application? yes If not, explain: _____

Date and hour plugging is desired to begin 1 A.M., September 13, 1958

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission.

Name of the person on the lease in charge of well for owner _____

Ray Roberts Address Great Bend, Kansas

Plugging Contractor Badger Drillers, Inc.

Plugging Contractor's License No. _____

Address Box 287, Tulsa, Oklahoma

Invoice covering assessment for plugging this well should be sent to _____

Miles Jackson Address Duncan, Oklahoma

and payment will be guaranteed by applicant.

PLUGGING			
FILE	SEC	32 T 5 R	33 W
BOOK	PAGE	131	LINE 33

Fred A. Vail
Applicant or Acting Agent
Date September 13, 1958

RECEIVED
STATE CORPORATION COMMISSION
SEP 26 1958
CONSERVATION DIVISION
Wichita, Kansas

9-26-58

JACKSON, SHEAR and PARKER
 Box 149, Duncan, Oklahoma
 SW $\frac{1}{4}$ of NE $\frac{1}{4}$, Section 32, T-5S, R-33W
 Rawlins County, Kansas
 GROVER NO. I

15-153-00005-00-00

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>	<u>REMARKS</u>
0	140	Shale and Sand	
140	267	Sand	
267	304	Blue Shale	Ran 11JTS 8-5/8" casing, set at 304' w/175 sacks cement
304	1360	Shale	
1360	1500	Shale and Sand	
1500	2310	Shale and Shells	
2310	2465	Shale and Sandy Lime	
2465	2600	Shale and Lime Streaks	
2600	2832	Shale and Lime	
2832	2861	Anahydrite	
2861	2980	Broken Shale	
2980	3905	Lime and Shale	
3905	4040	Lime	
4040	4140	Lime and Shale	
4140	4180	Lime	
4180	4230	Lime and Shale	
4230	4345	Lime	
4345	4420	Lime and Shale	
4420	4505	Lime	
4505	4548	Lime w/Shale streaks	
4548	4620	Lime and Shale	
4620	4685	Shale and Sand	
4685	4709	Lime	
4709	4755	Cherty Lime	
4755	4770	Lime	
4770	4857	Cherty Lime	
4857	4895	Lime	
4895	4915	Lime w/Chert	
4915	4940	Lime	T.D. Dry Hole

I certify the above to be a true and exact copy of the Driller's Log as shown by the Daily Drilling Reports.

BADGER DRILLERS, INC.

J. O. Lawton

Subscribed and sworn to before me this 19th day of September, 1958
 Notary Public. *Martha Maher*

My commission expires 6-26-60

PLUGGING
 FILE SEC 32 T 5 R33W
 BOOK PAGE 131 LINE 33

ED COMMISSION
 SEP 26 1958
 CONSERVATION DIVISION
 Wichita, Kansas
 9-26-58

State of Kansas



15-153-00009-00-00

GEORGE DOCKING Governor
MARION BEATTY Chairman
HARRY G. WILES Commissioner
RICHARD C. BYRD Commissioner
RAYMOND B. HARVEY Secretary
CLYDE E. MILLIGAN Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market
WICHITA, KANSAS
JEWELL M. OGDEN, Director

September 26, 1958

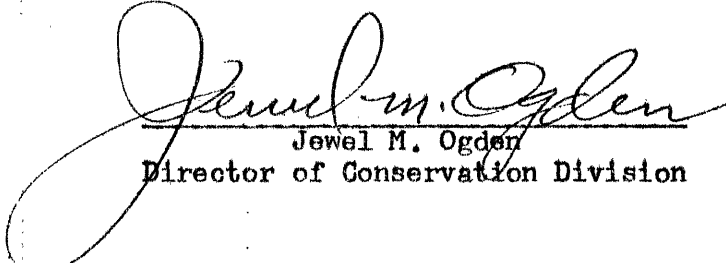
Well No. 1
Lease Grover
Description SW NE 32-5-33W
County Rawlins
File No. 131-33

Jackson, Shear & Parker
Box 149
Duncan, Oklahoma

Gentlemen:

This is your authority to plug the above subject well in accordance with the Rules and Regulations of the State Corporation Commission.

Very truly yours,


Jewel M. Ogden
Director of Conservation Division

Mr. A. D. Fabricius
is hereby assigned to supervise the plugging of the above named well.

In the event you need any further information regarding this well feel free to write or call me at any time.

J. Lewis Brock
Western Kansas Field Supervisor
P. O. Box 569
Great Bend, Kansas
Phone: GL-33022