



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-101-22,252-00-00		
Company	Larson Operating Company		
Well	Marit No. 1-24		
Field	Wildcat		
County	Lane	State	Kansas
Location	880' FNL & 330' FWL		Other Services CNL/CDL DIL
Sec: 24	Twp: 18 S	Rge: 30 W	Elevation K.B. 2854 D.F. 2847 G.L. 2847
Permanent Datum	Ground Level	Elevation 2847	
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing		
Date	9/07/2010		
Run Number	Two		
Depth Driller	4620		
Depth Logger	4622		
Bottom Logged Interval	4621		
Top Log Interval	2600		
Casing Driller	8.625 @ 260		
Casing Logger	255		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.400		
Density / Viscosity	9.3 67		
pH / Fluid Loss	11.5 7.2		
Source of Sample	Flowline		
Rm @ Meas. Temp	.75 @ 70		
Rmf @ Meas. Temp	.56 @ 70		
Rmc @ Meas. Temp	1.01 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.42 @ 124		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	124		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton, 7 W, 1/4 S, E into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

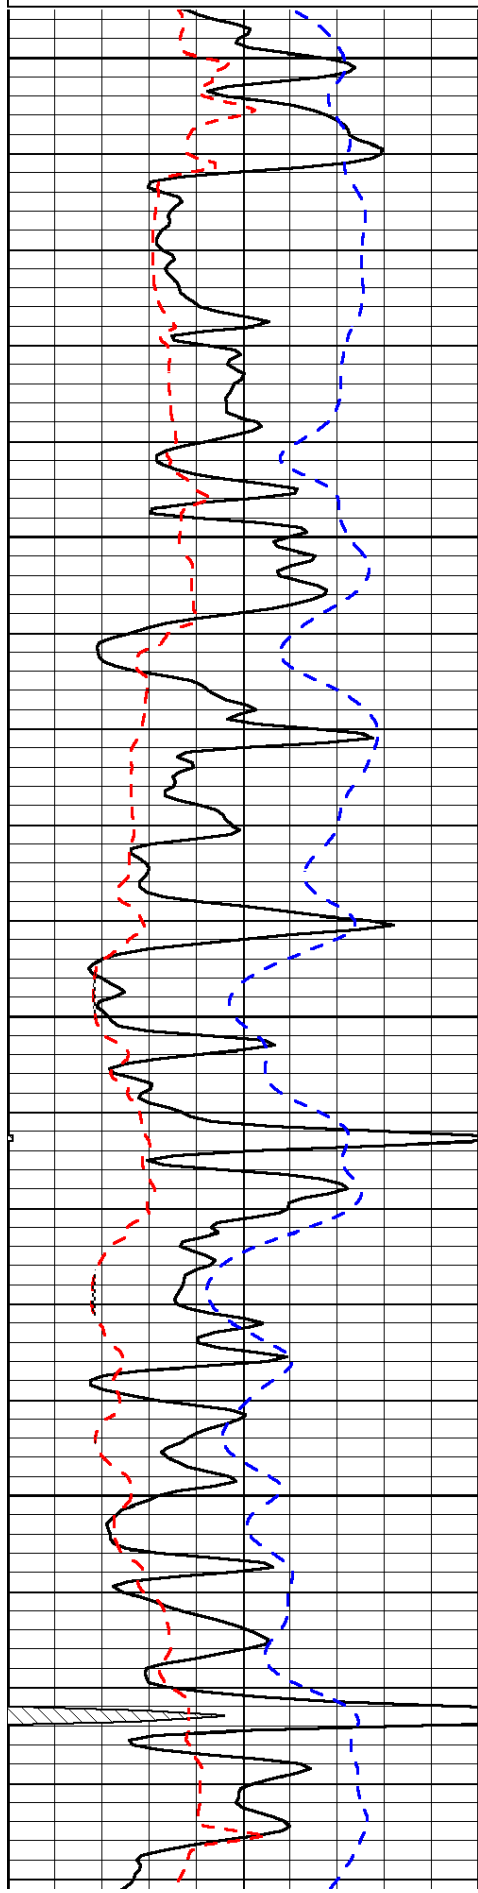


3600

3650

3700

3750

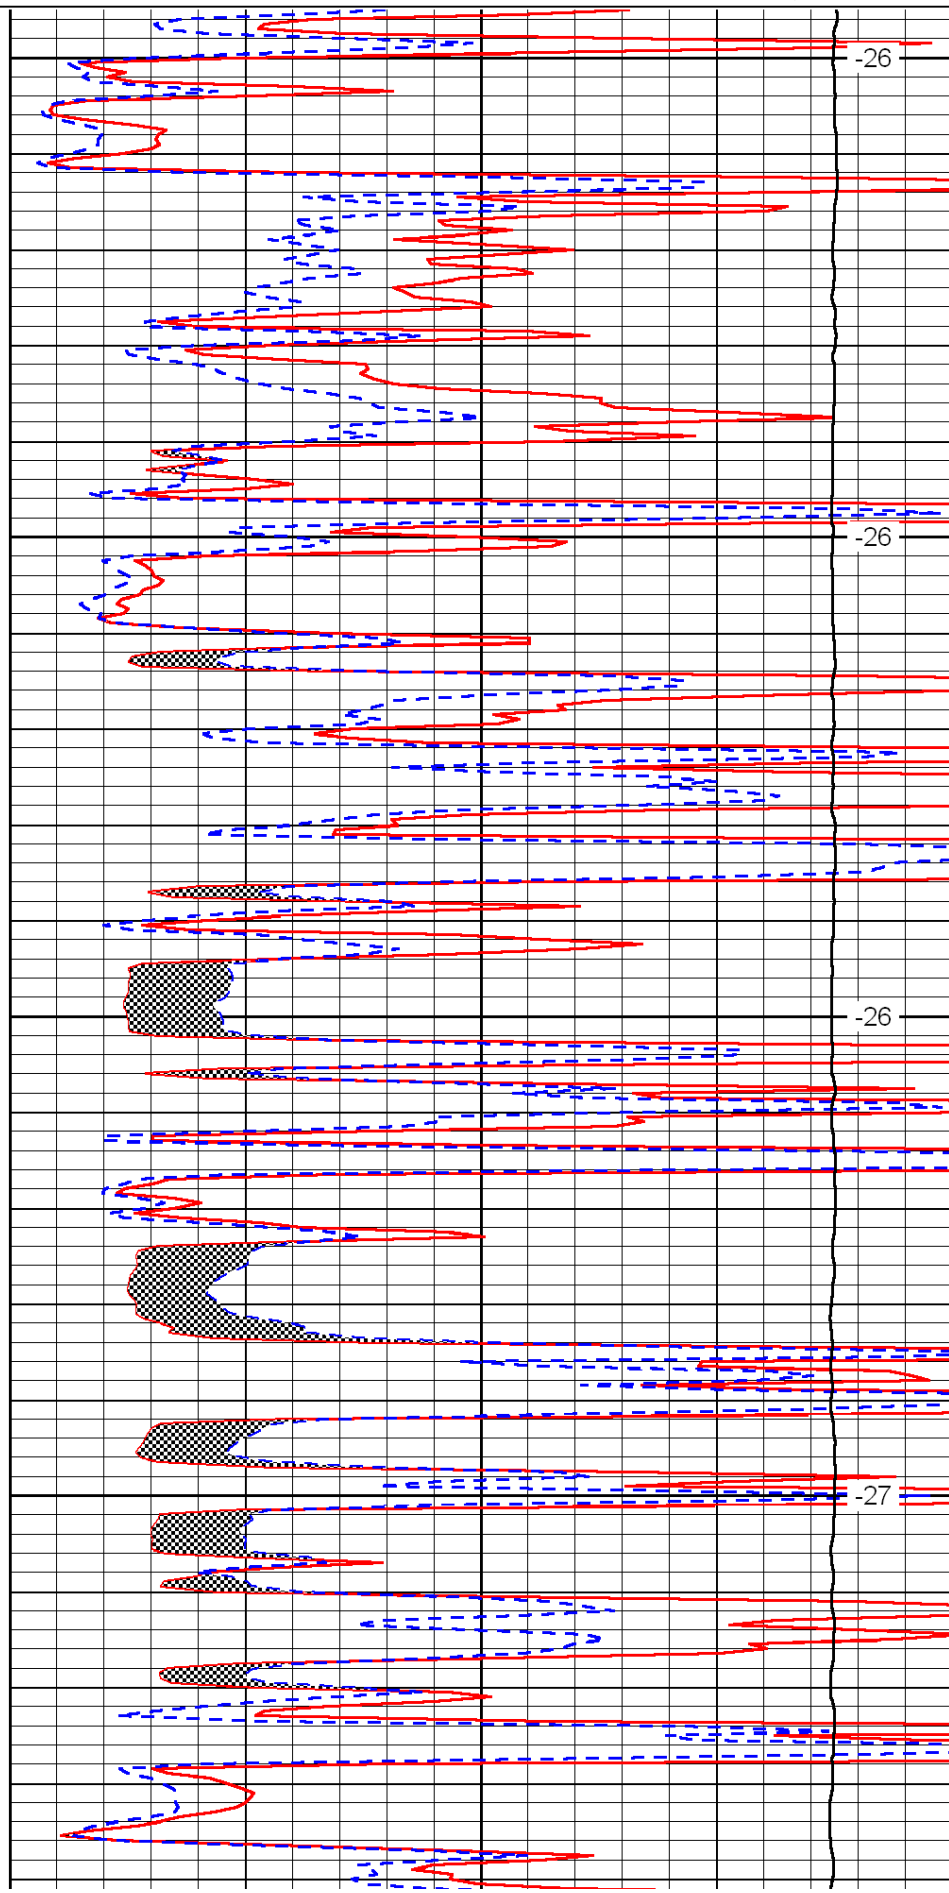


-26

-26

-26

-27

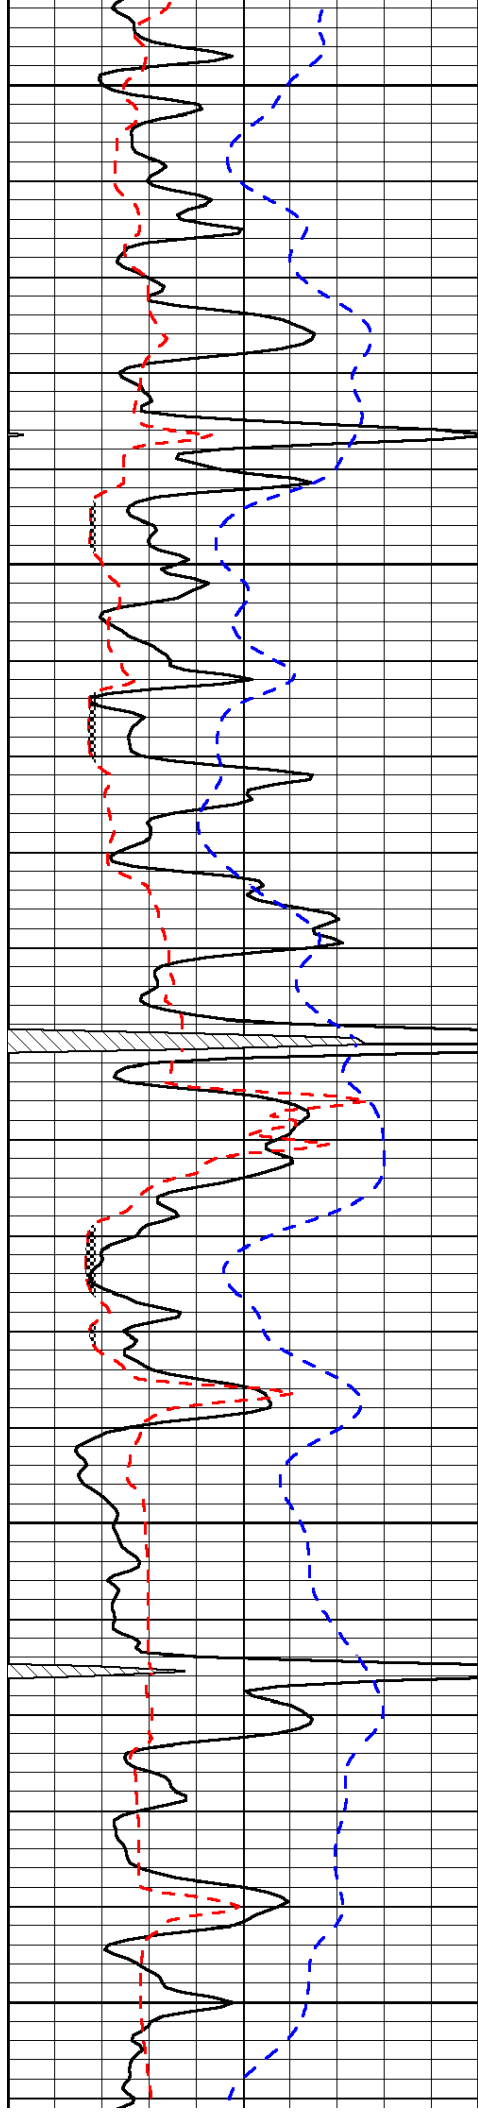


3800

3850

3900

3950

4000

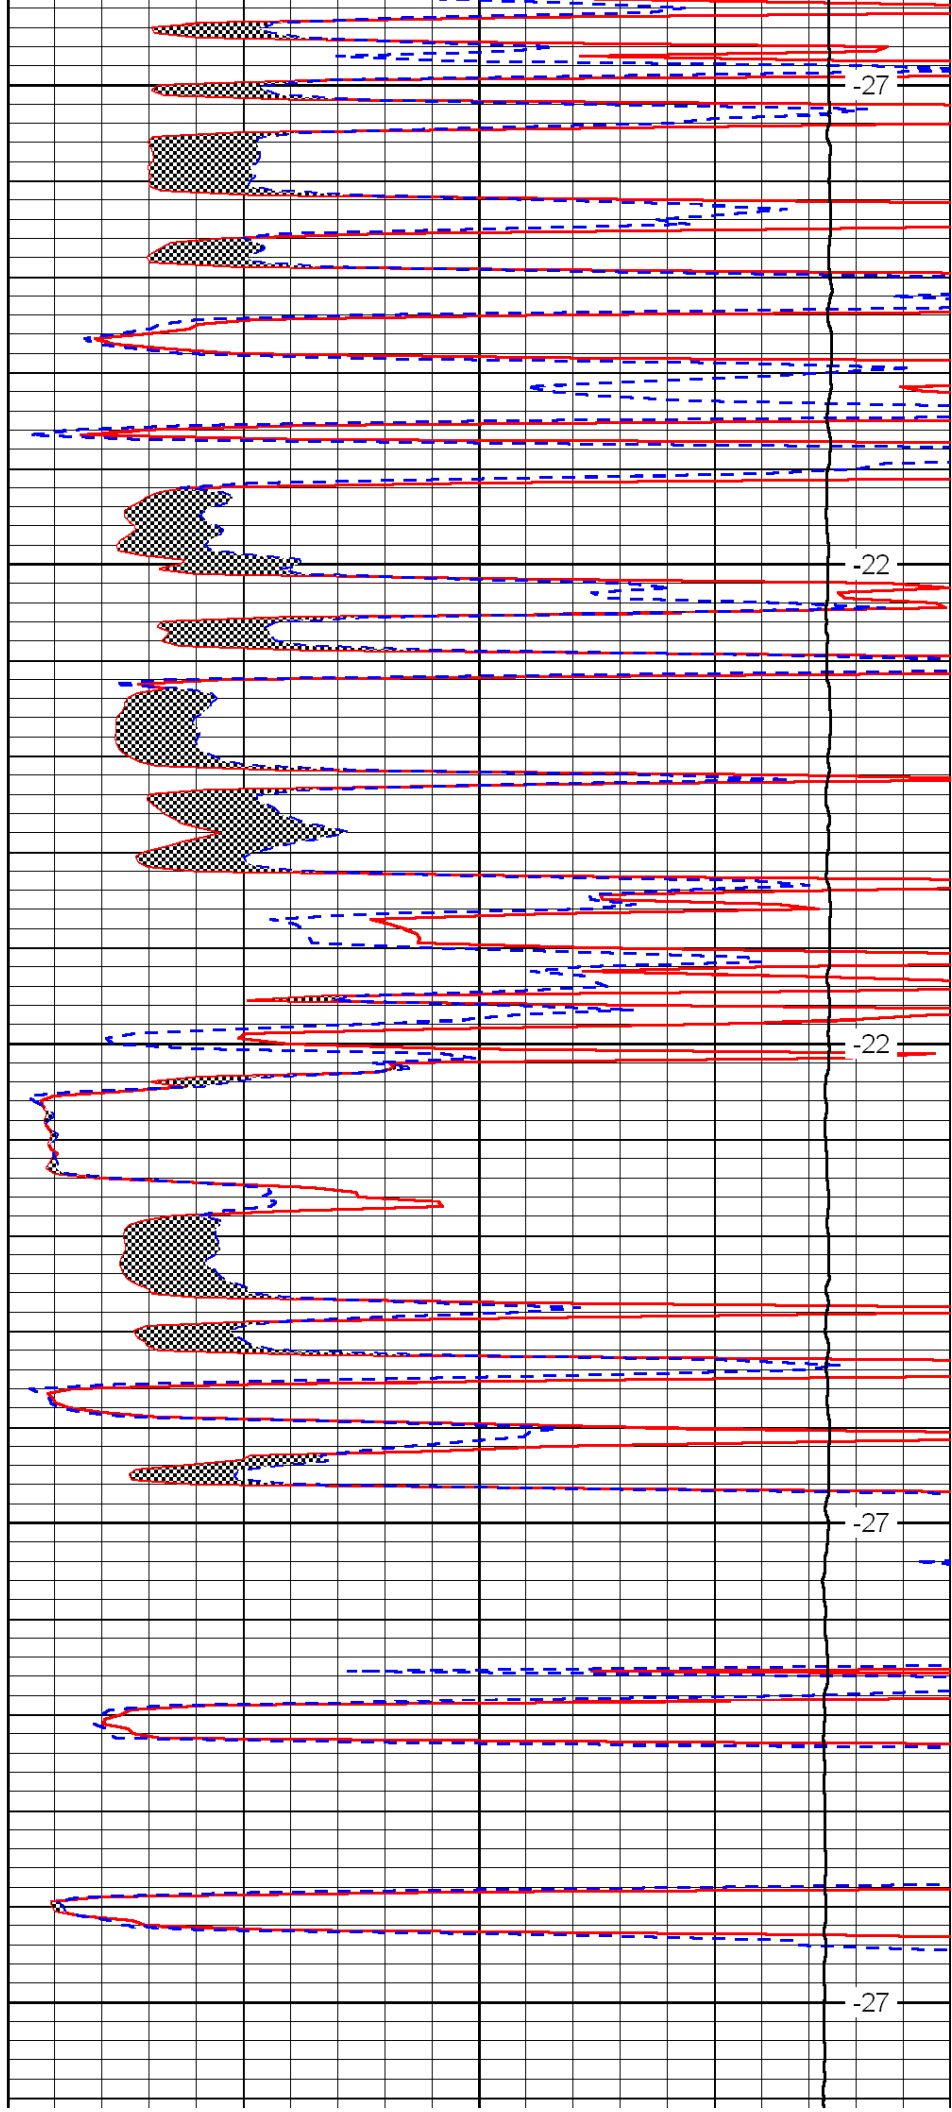


-27

-22

-22

-27

-27

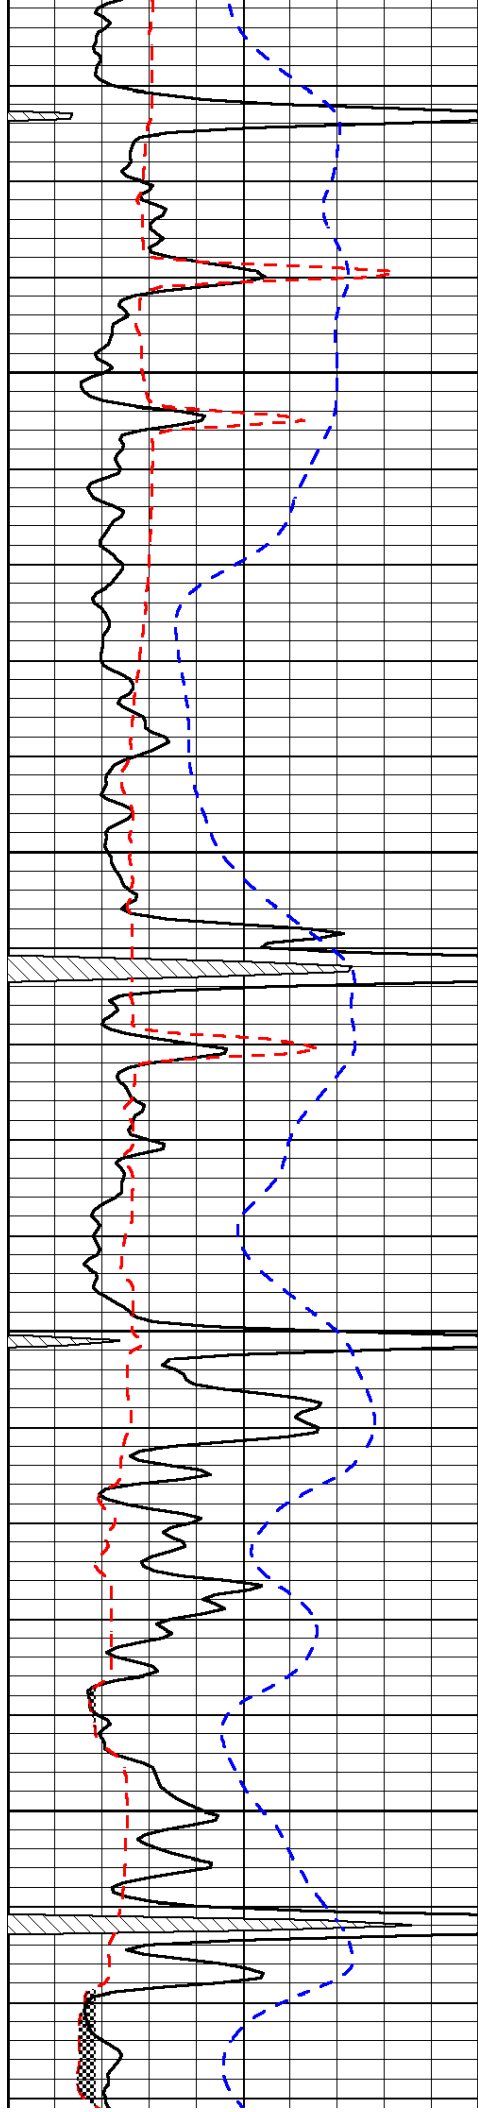


4050

4100

4150

4200

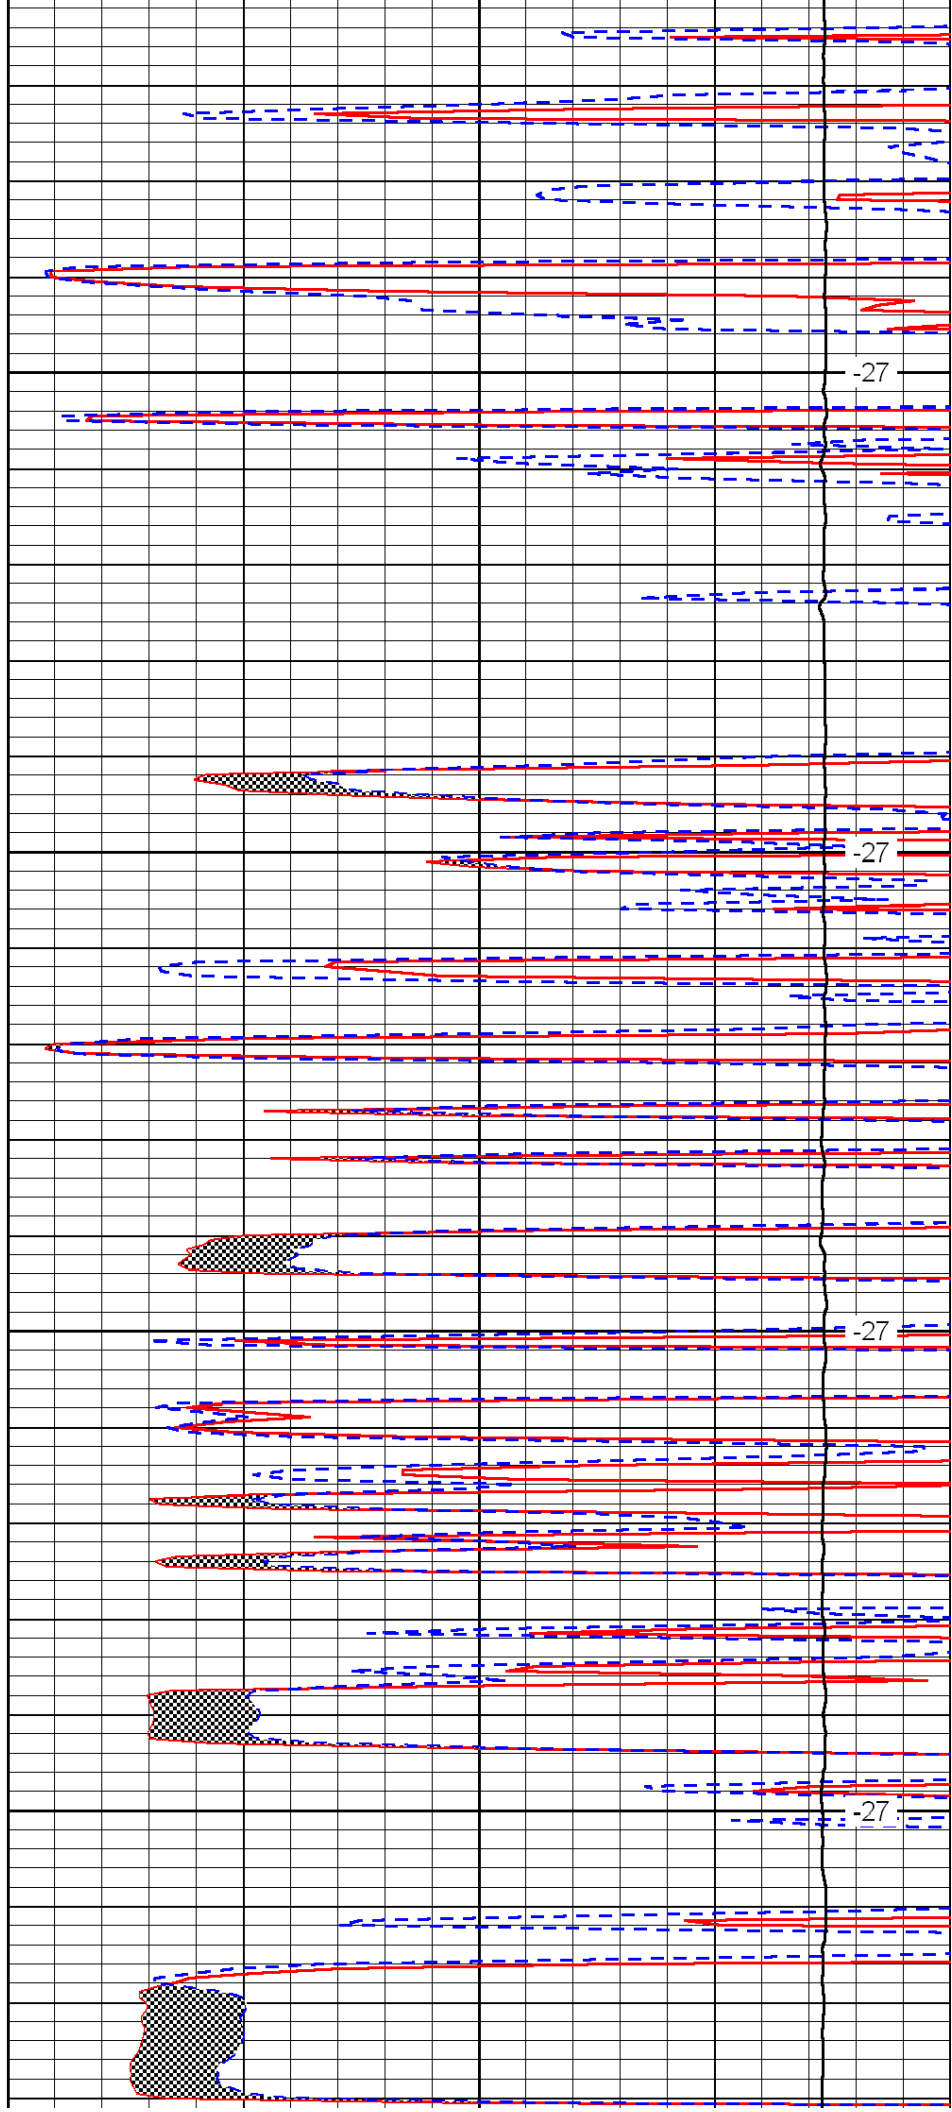


-27

-27

-27

-27

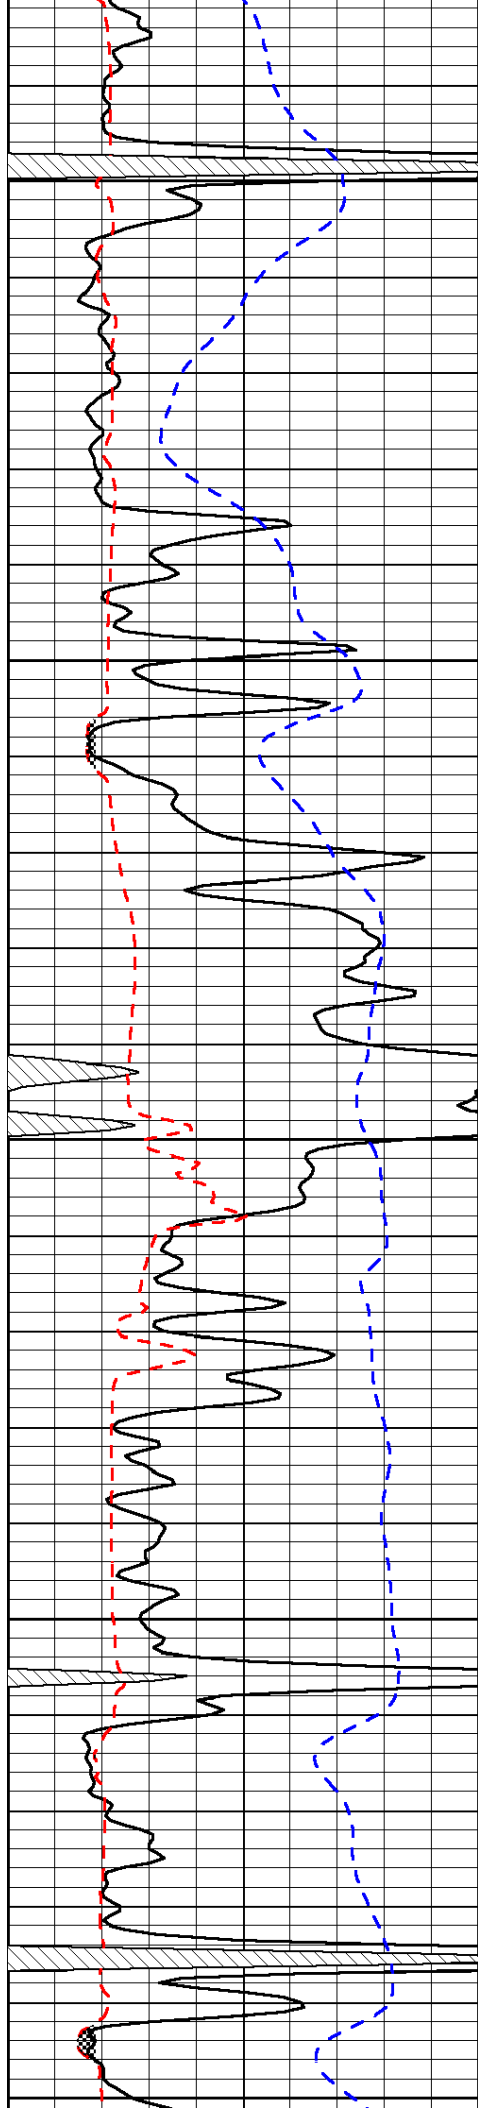


4250

4300

4350

4400

4450

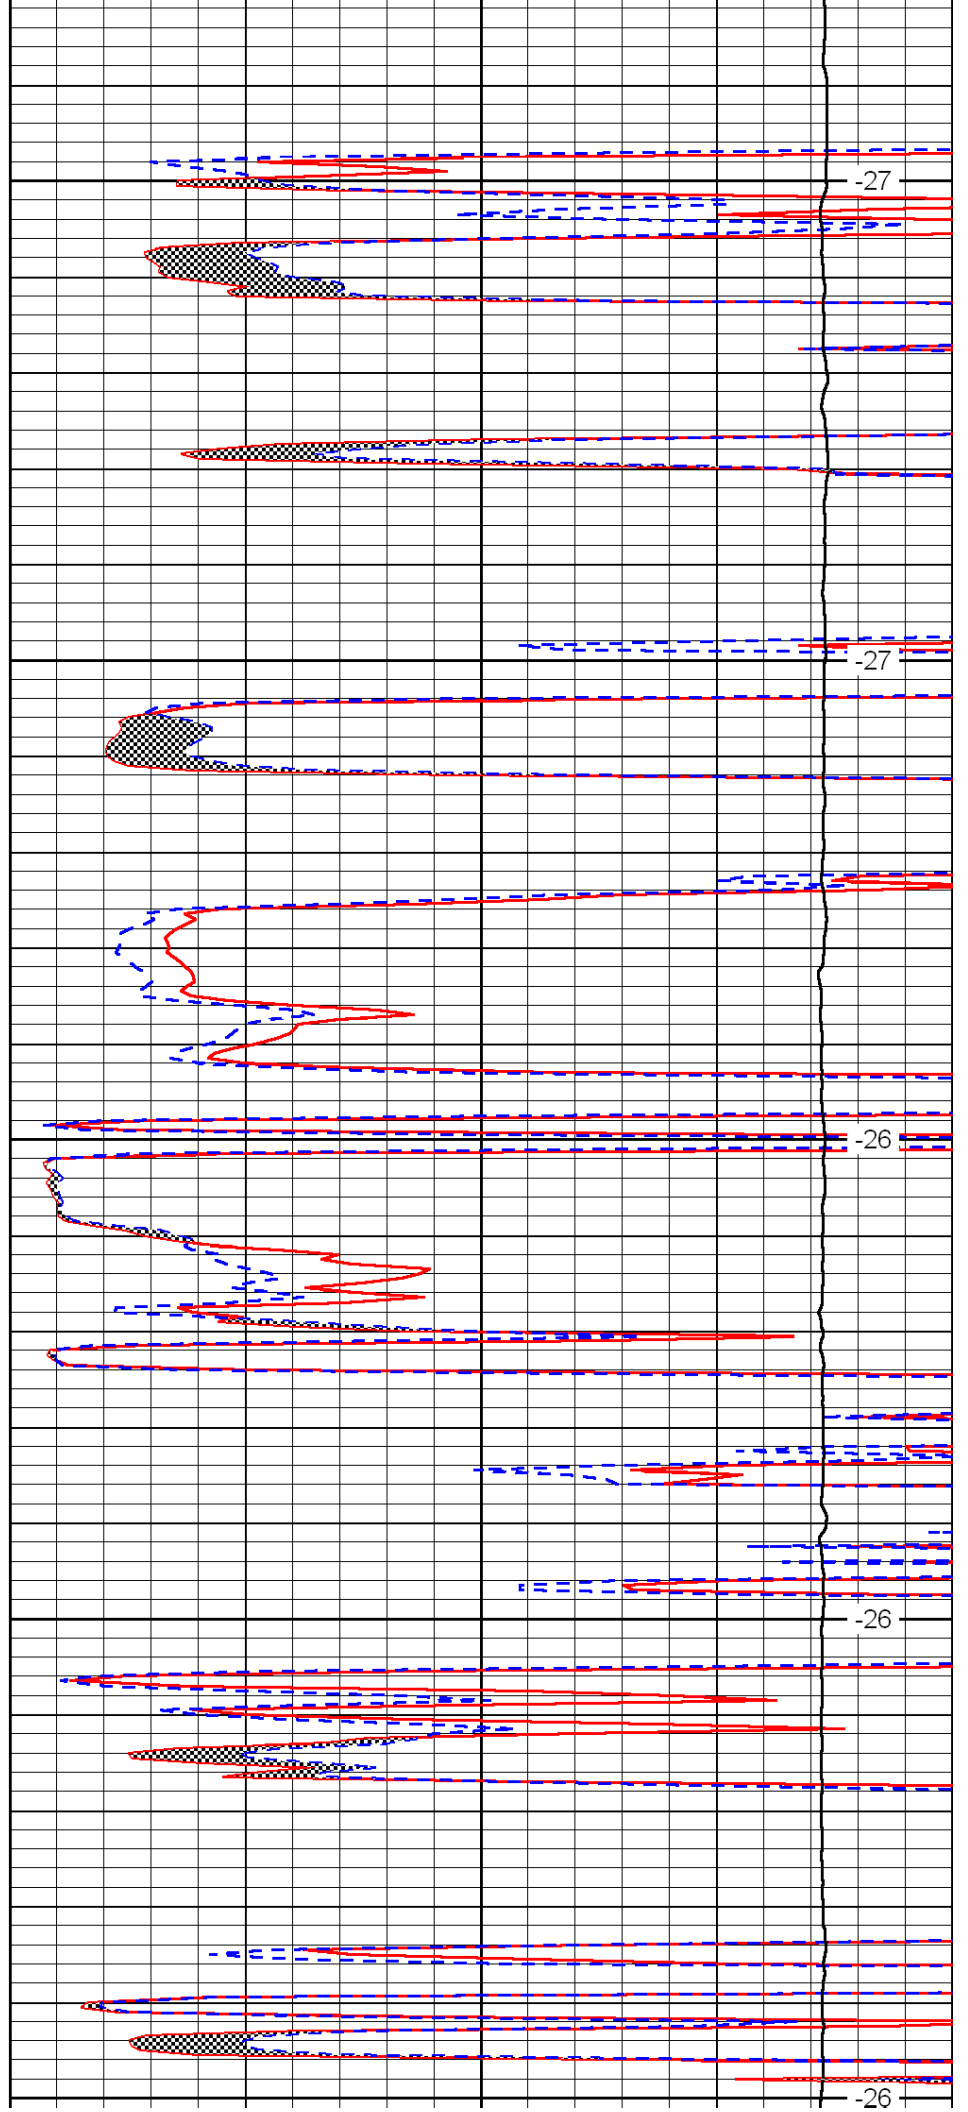



-27

-27

-26

-26

-26

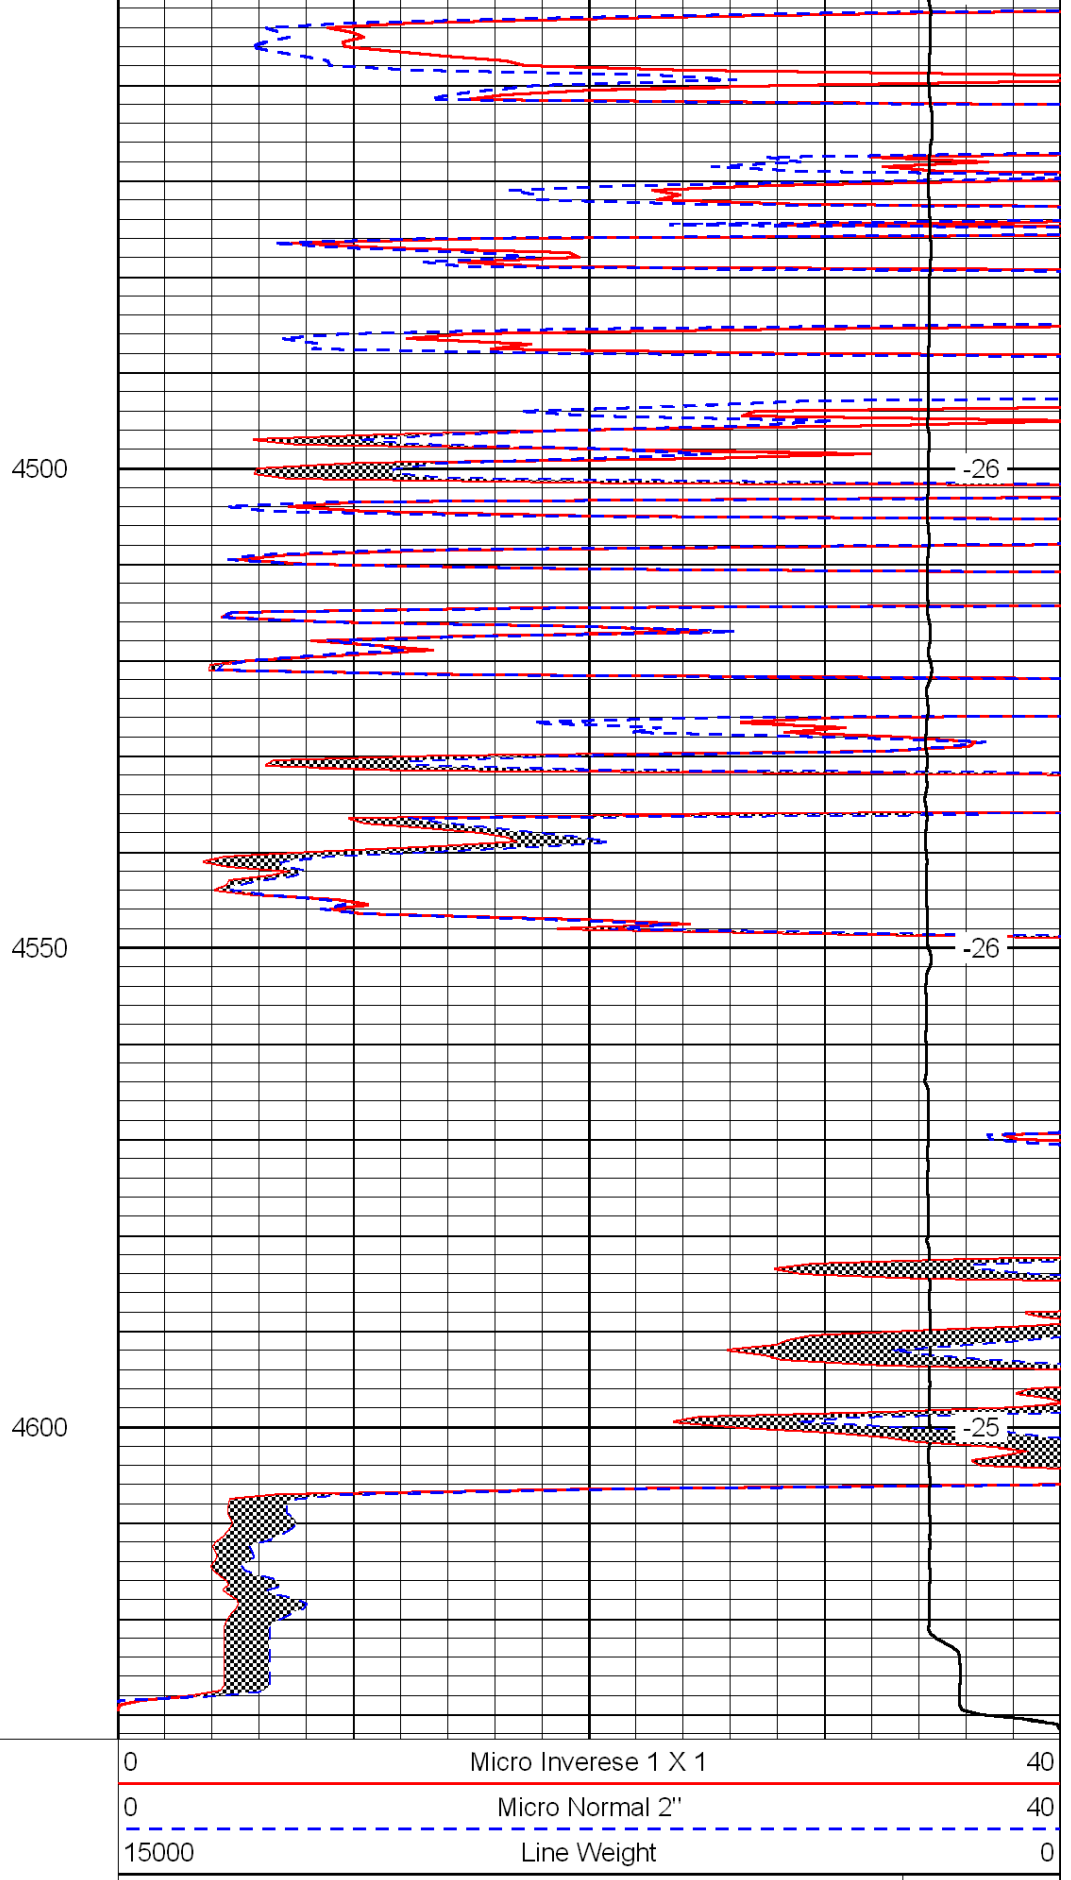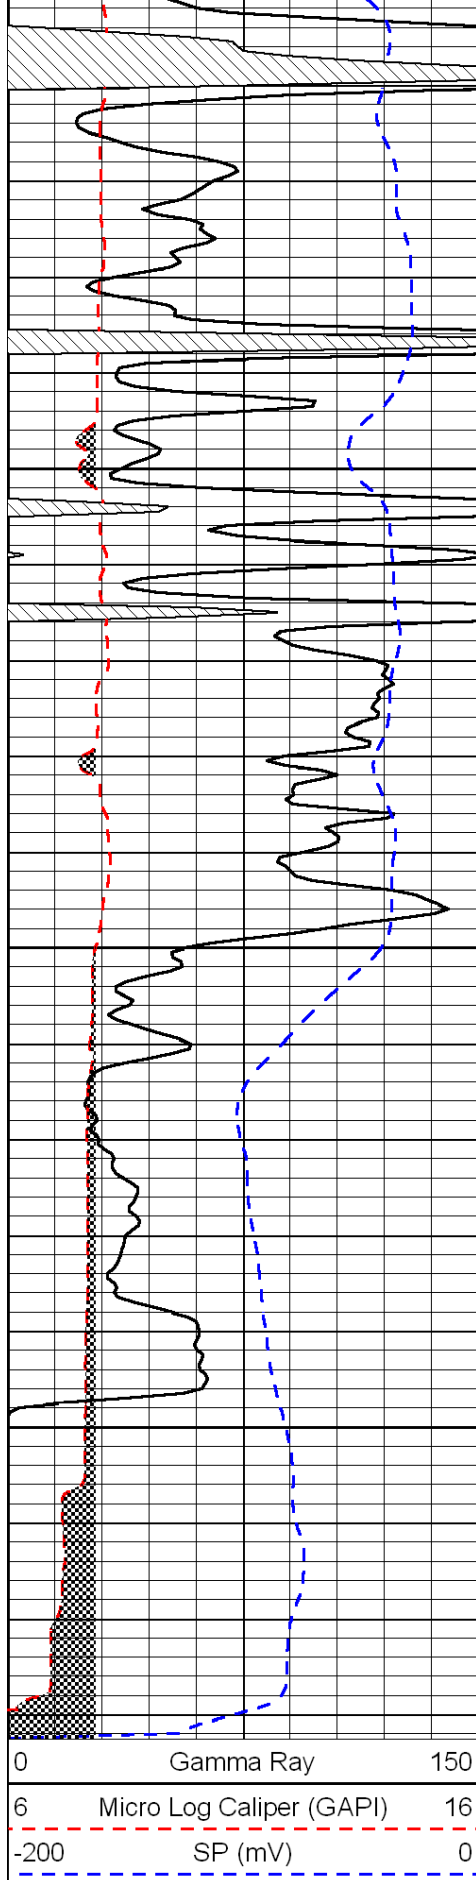

LSPD