



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-051-26,021-00-00

Company Berexco, LLC

Well Henderson A4

Field Bemis-Shutts

County Ellis State

Kansas

Location 1,650' FNL & 2,310' FWL

Sec: 22 Twp: 11S Rge: 18W

Permanent Datum Ground Level Elevation 1936
Log Measured From Kelly Bushing 11 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Other Services
RAG/CDL

Elevation
K.B. 1947
D.F. 1936
G.L. 1936

Date 08/29/2010

Run Number Two

Depth Driller 3555

Depth Logger 3557

Bottom Logged Interval 3556

Top Log Interval 2700

Casing Driller 8,625 @ 1071

Casing Logger 1070

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 5,200

Density / Viscosity 9.0 63

pH / Fluid Loss 11.8 8.4

Source of Sample Flowline

Rm @ Meas. Temp .75 @ 78

Rmf @ Meas. Temp .56 @ 78

Rmc @ Meas. Temp 1.01 @ 78

Source of Rmf / Rmc Charts

Rm @ BHT .52 @ 114

Operating Rig Time 3 Hours

Max Rec. Temp. F 114

Equipment Number 17

Location Hays

Recorded By Mike Garrison

Witnessed By Bryan Bynog

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hays, 16 North, East Into

Database File: c:\warrior\data\berexco_henderson a4\berexco.db
Dataset Pathname: rag/bxcoragcdl
Presentation Format: micro
Dataset Creation: Mon Aug 30 00:47:23 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

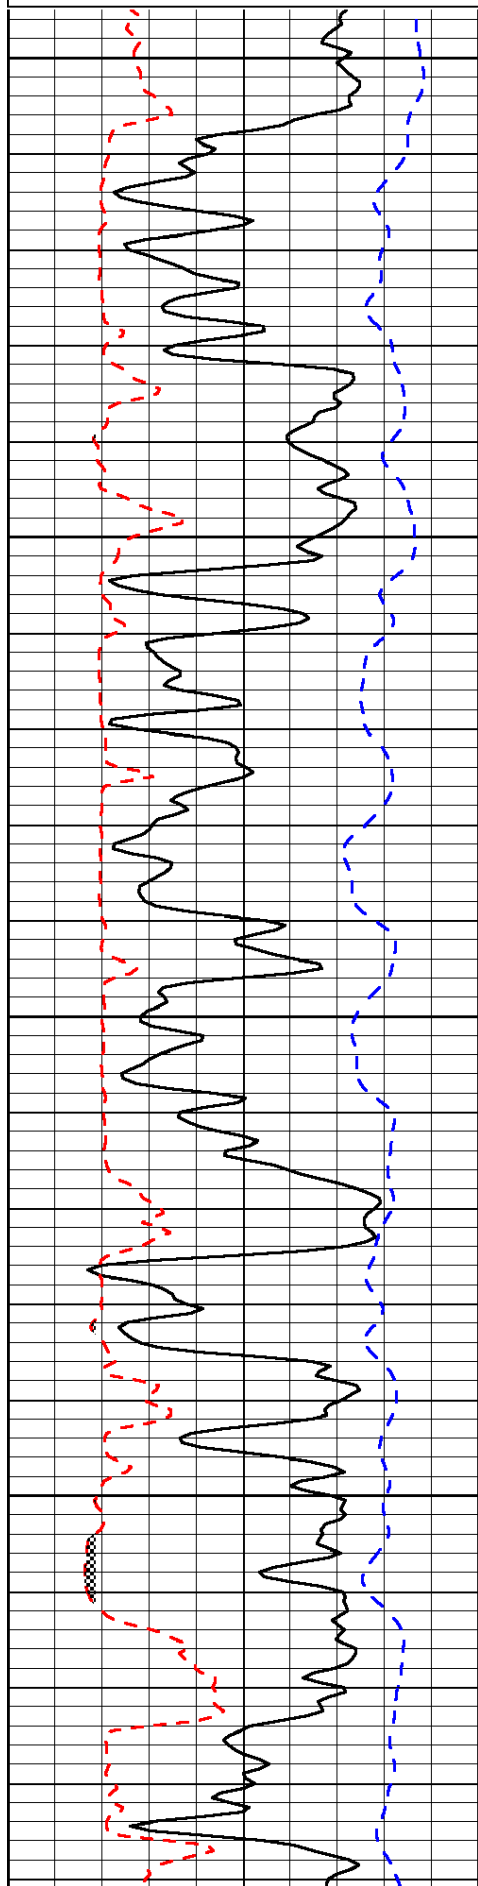

2700


2750

2800

2850

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


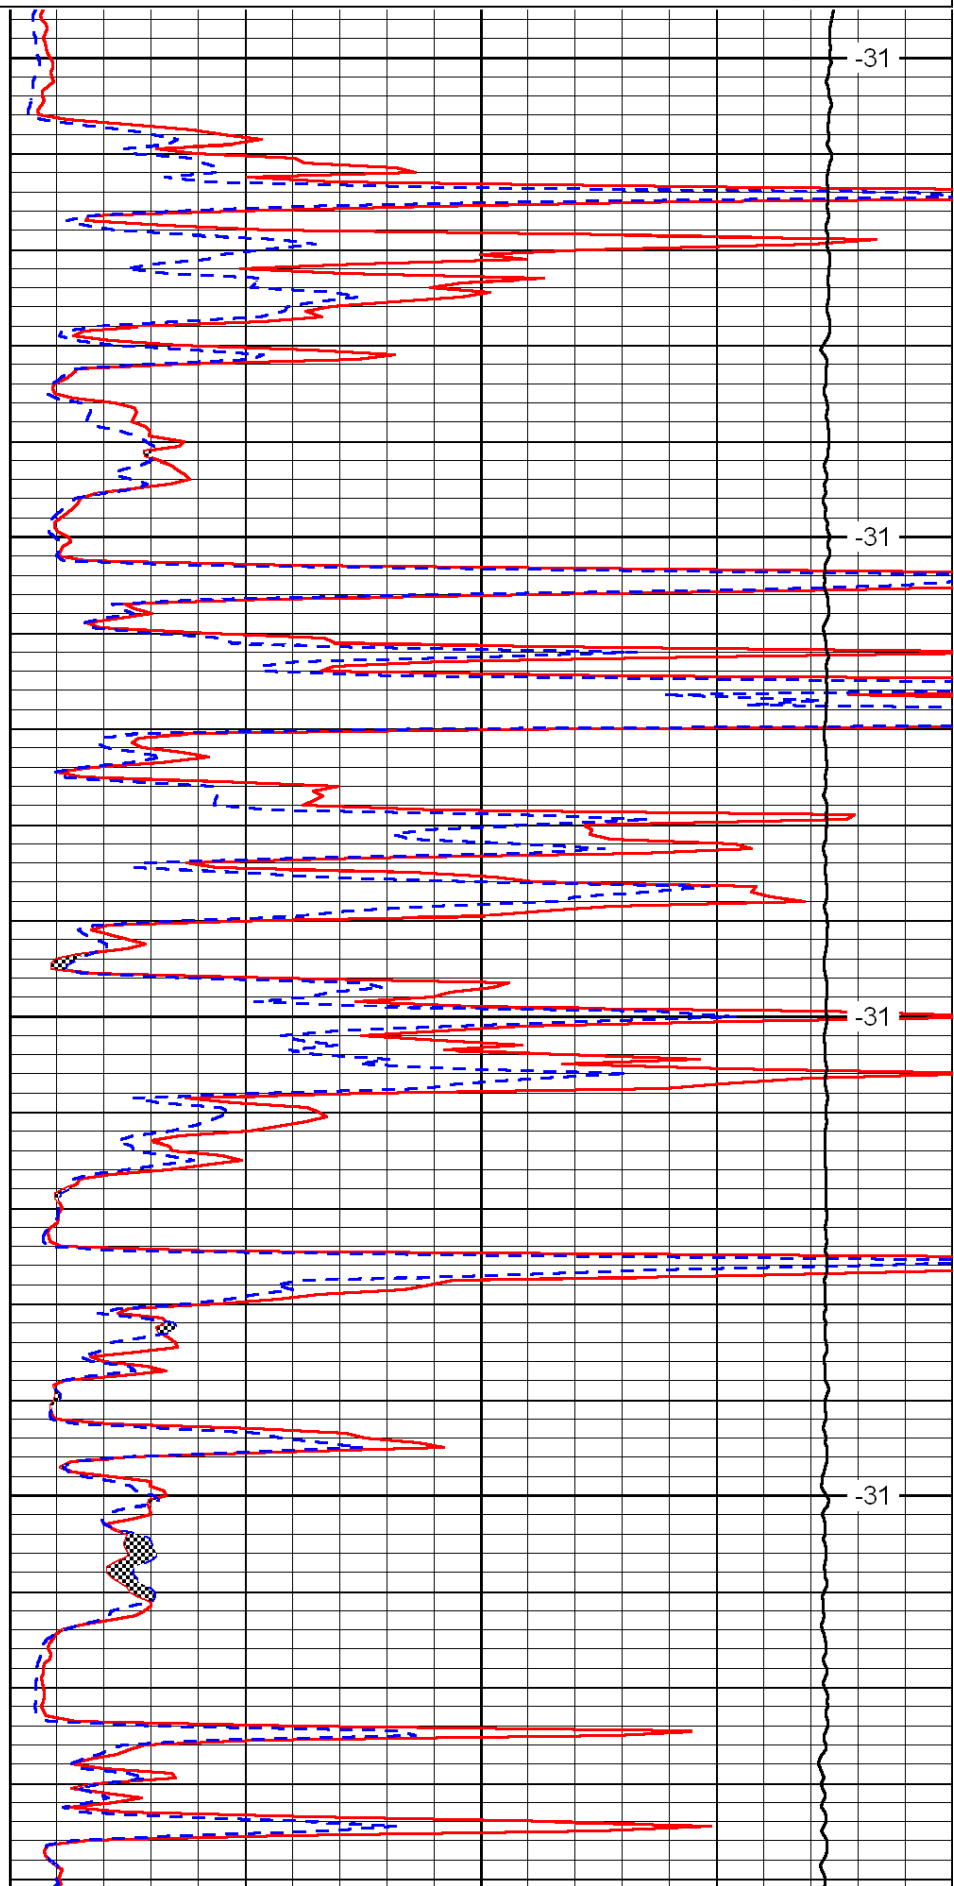



-31

-31

-31

-31

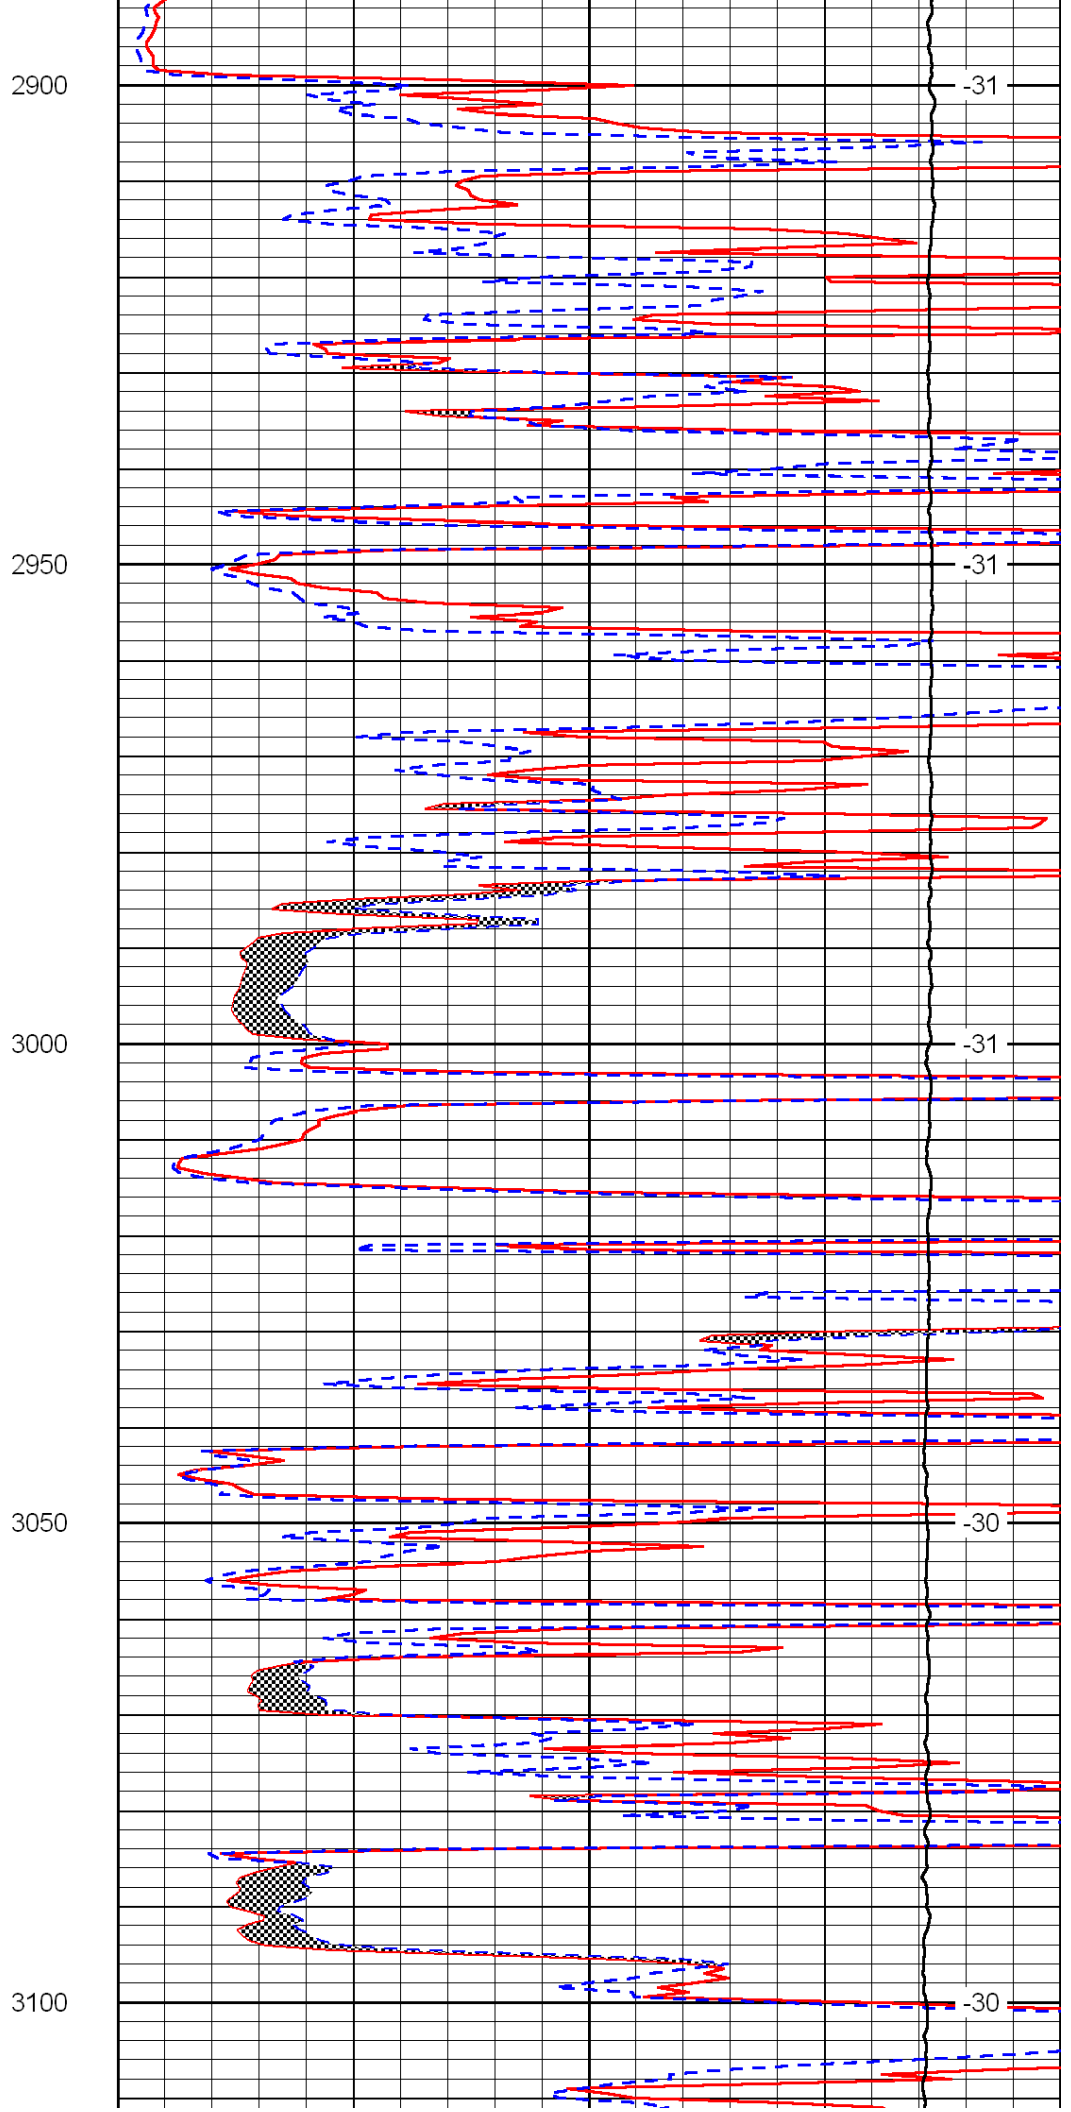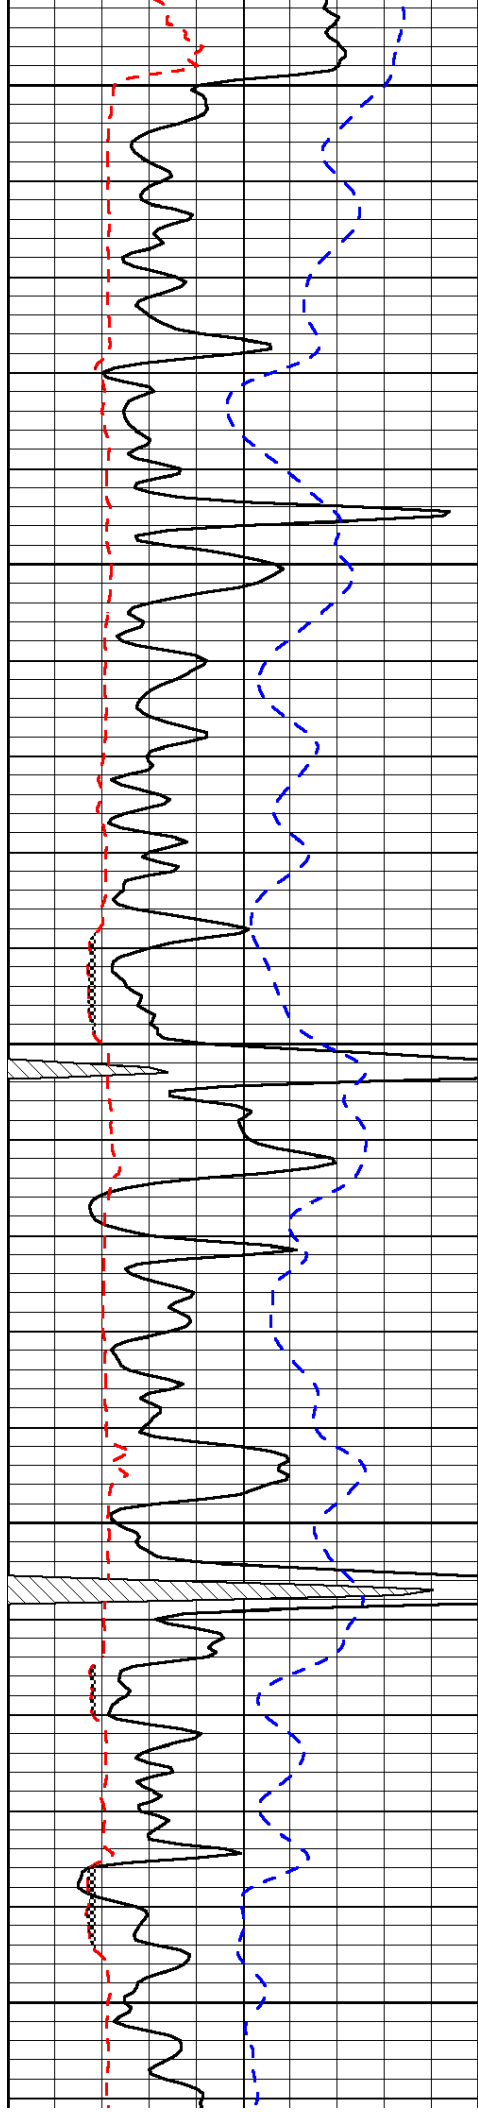

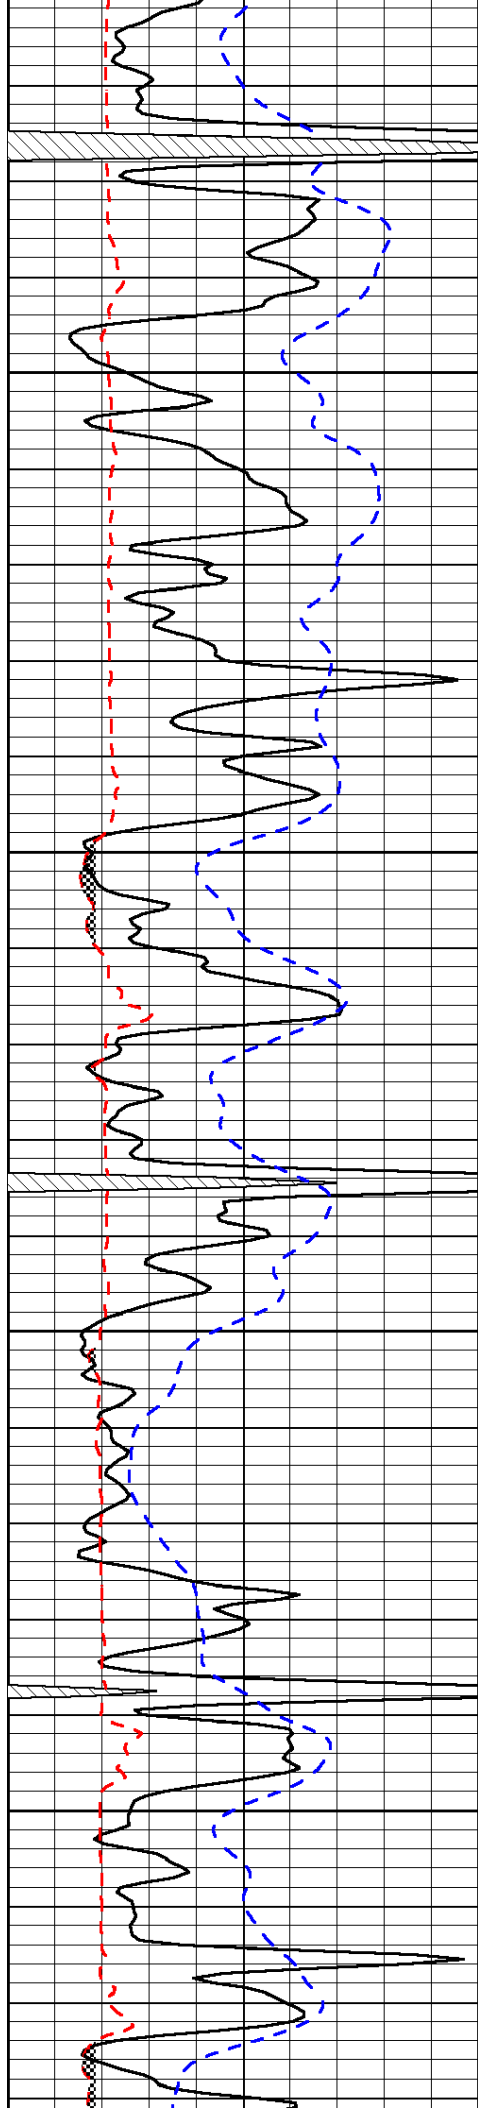



3150

3200

3250

3300

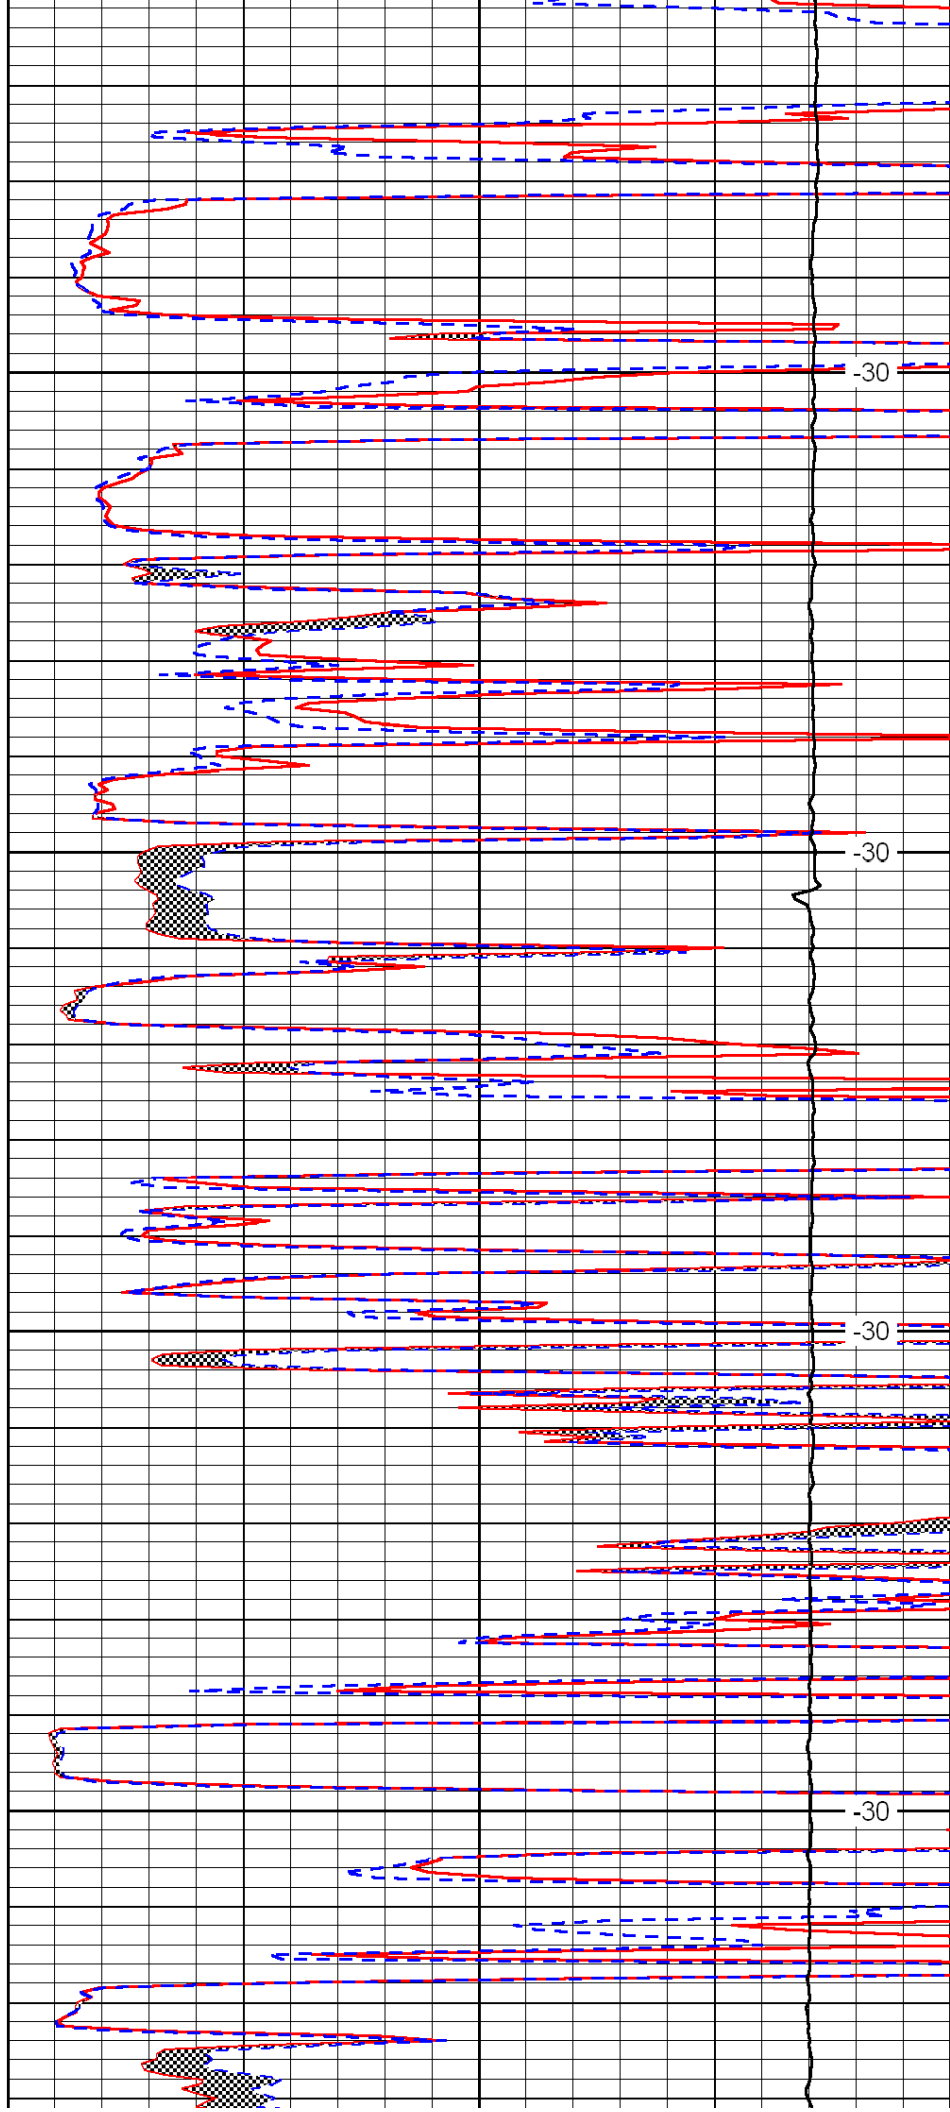

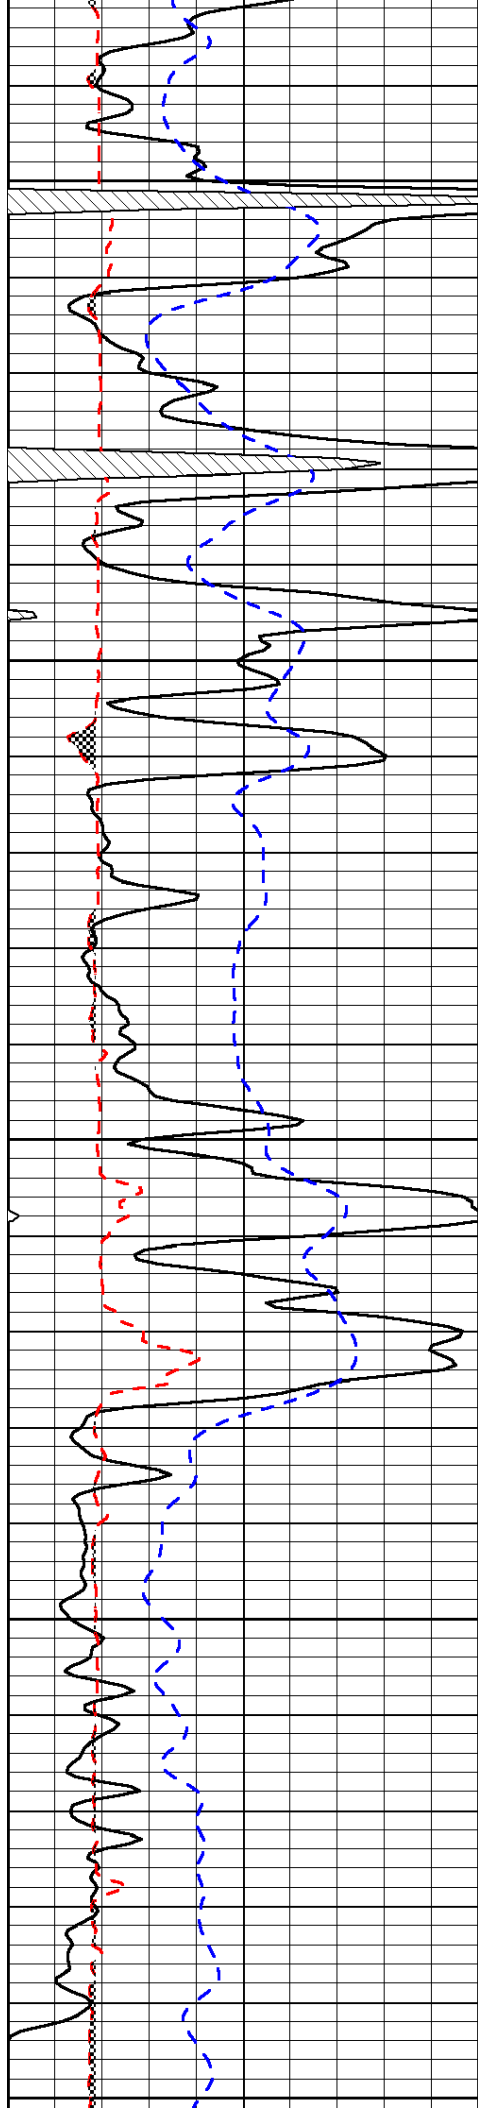


3350

3400

3450

3500

3550

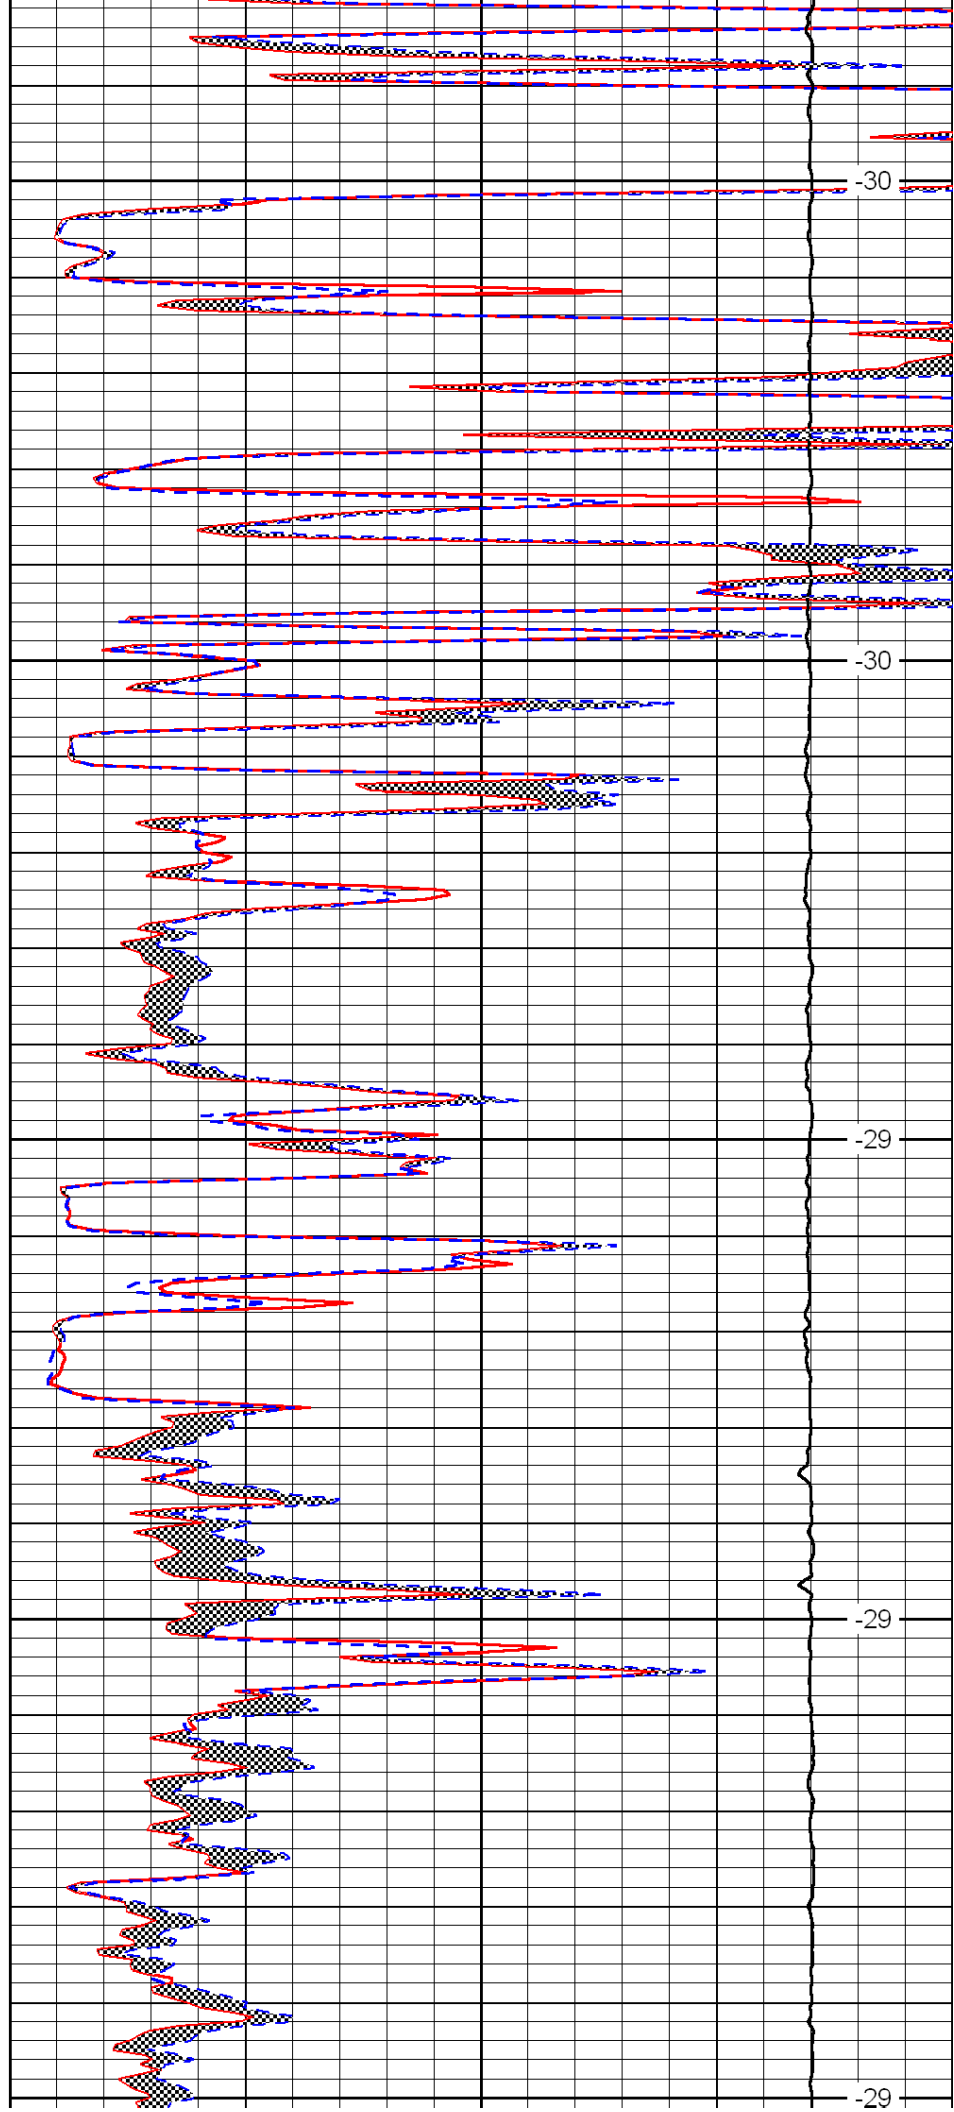



-30

-30

-29

-29

-29

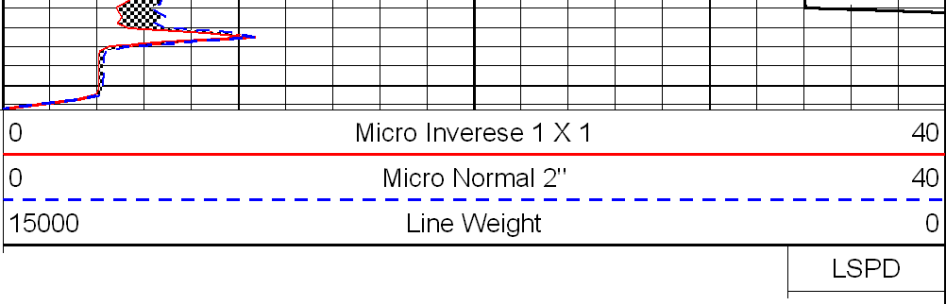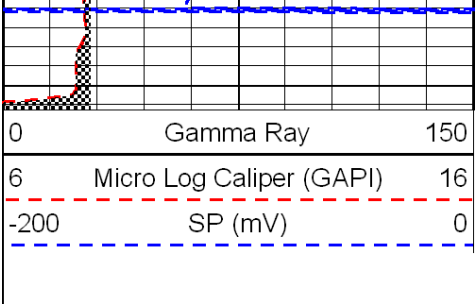

LSPD