



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Brito Oil Company, Inc. Well Weber Trust No. 1-1 Field Wildcat County Logan State Kansas			
15-109-20,935-00-00		Location SW - NE - NW - NE 458' FNL & 1950' FEL		Other Services CNL/CDL DIL/BHCS	
Sec: 1		Twp: 12 S		Rge: 33 W	
Permanent Datum Ground Level		Elevation 3050		Elevation	
Log Measured From Kelly Bushing		5 Ft. Above Perm. Datum		K.B. 3055 D.F. 3055 G.L. 3050	
Drilling Measured From Kelly Bushing					
Date	8/29/2010				
Run Number	Two				
Depth Driller	4700				
Depth Logger	4699				
Bottom Logged Interval	4698				
Top Log Interval	3700				
Casing Driller	8.625 @ 221				
Casing Logger	220				
Bit Size	7.875				
Type Fluid in Hole	Chemical				
Salinity, ppm CL	3.700				
Density / Viscosity	9.2 50				
pH / Fluid Loss	10.5 8.0				
Source of Sample	Flowline				
Rm @ Meas. Temp	0.60 @ 75				
Rmf @ Meas. Temp	0.45 @ 75				
Rmc @ Meas. Temp	0.81 @ 75				
Source of Rmf / Rmc	Charts				
Rm @ BHT	0.37 @ 123				
Operating Rig Time	5 Hours				
Max Rec. Temp. F	123				
Equipment Number	15				
Location	Hays				
Recorded By	B. Becker				
Witnessed By	Brad Rine				

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Oakley, Ks; 4 West;
5 South; 1/4 West;
South Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

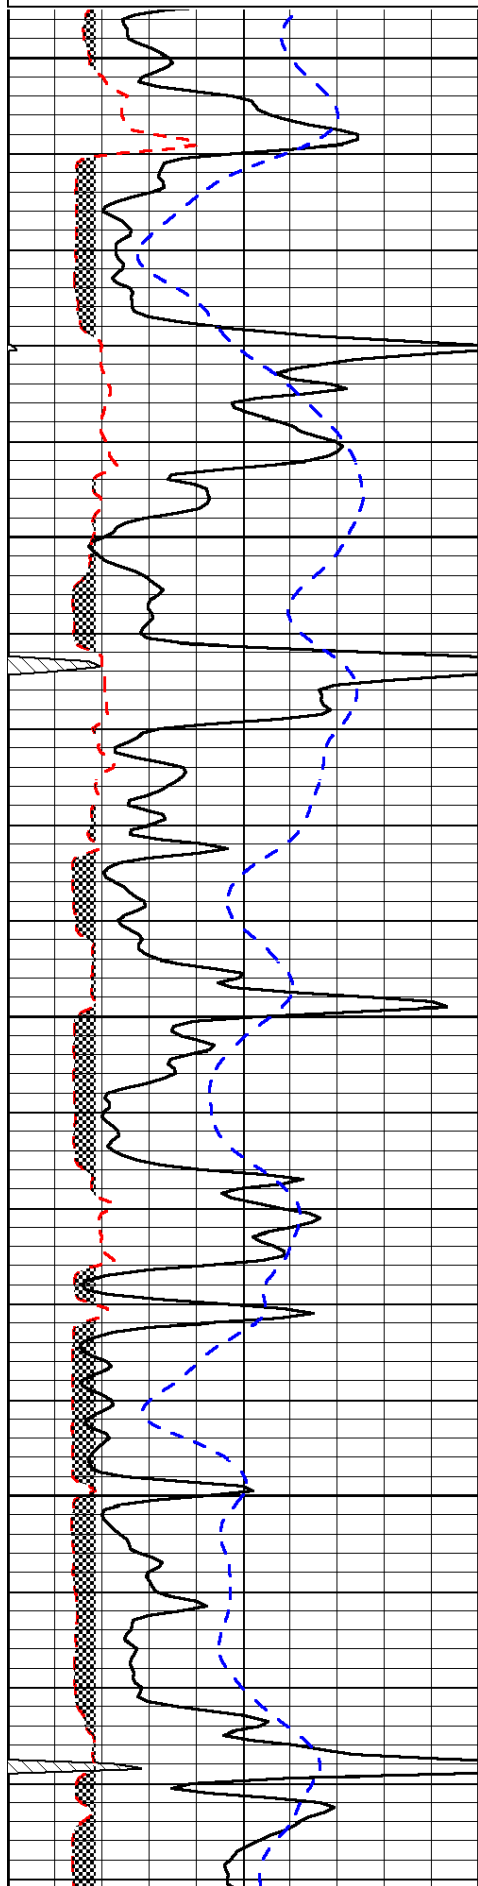

3700


3750

3800

3850

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

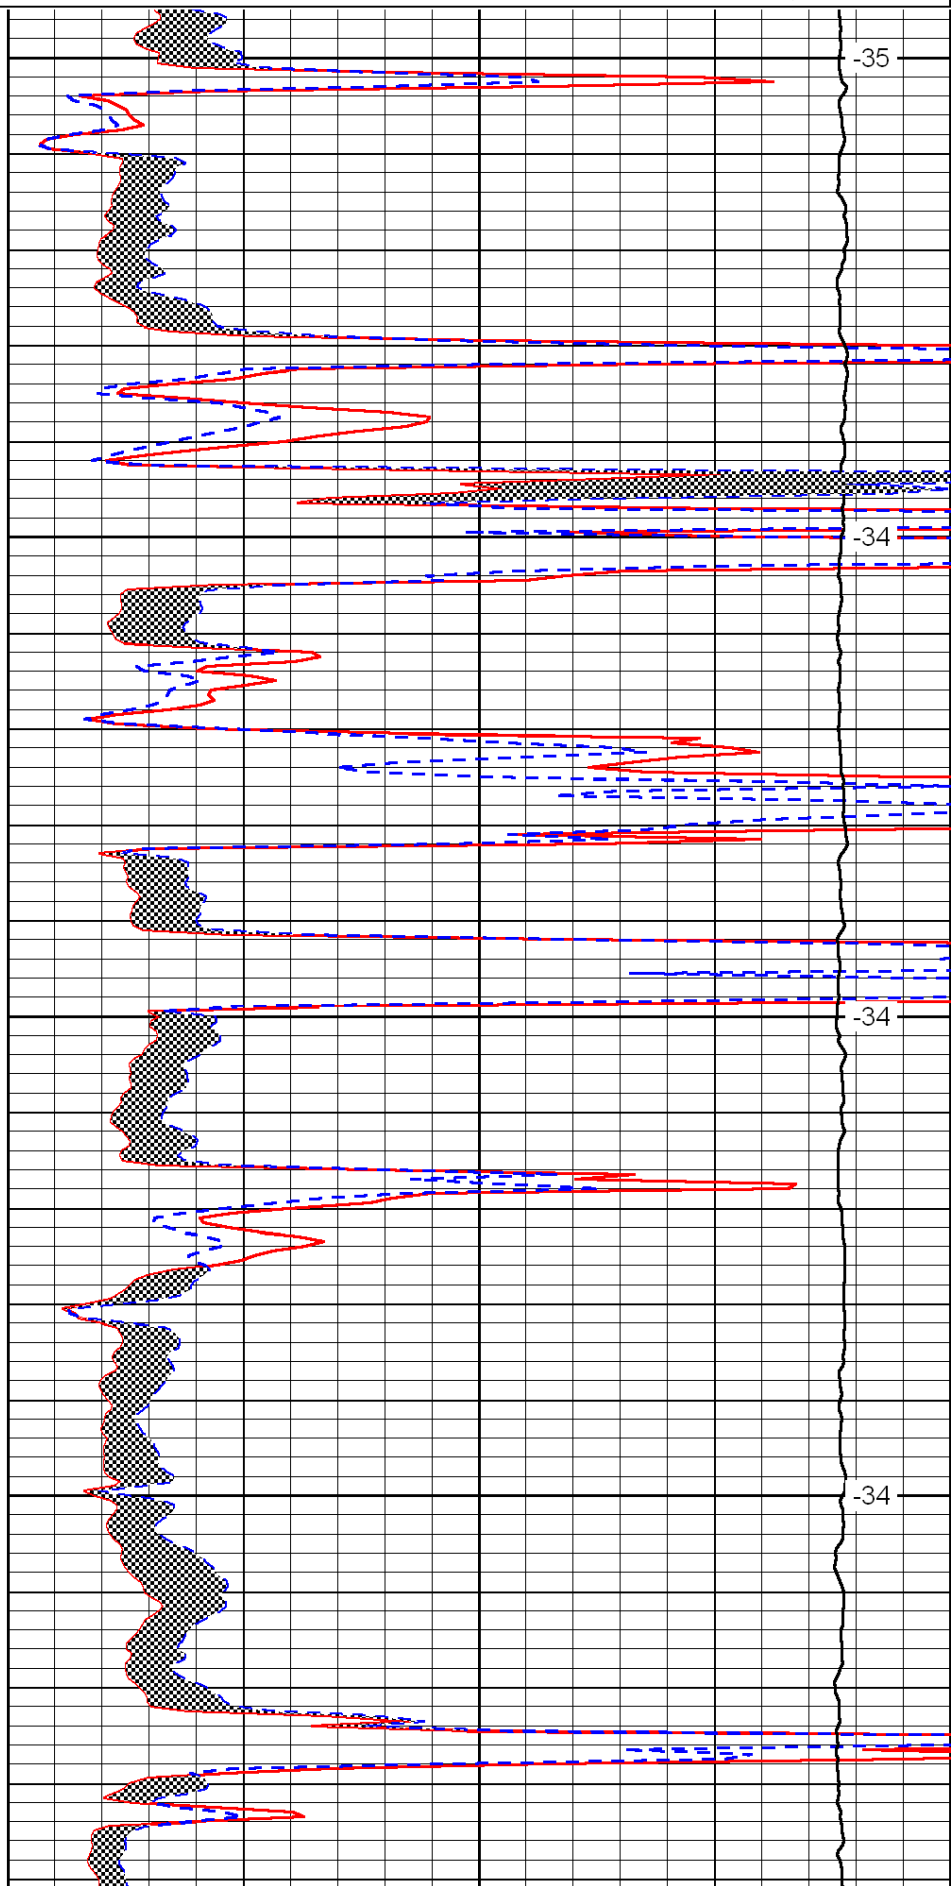


-35

-34

-34

-34

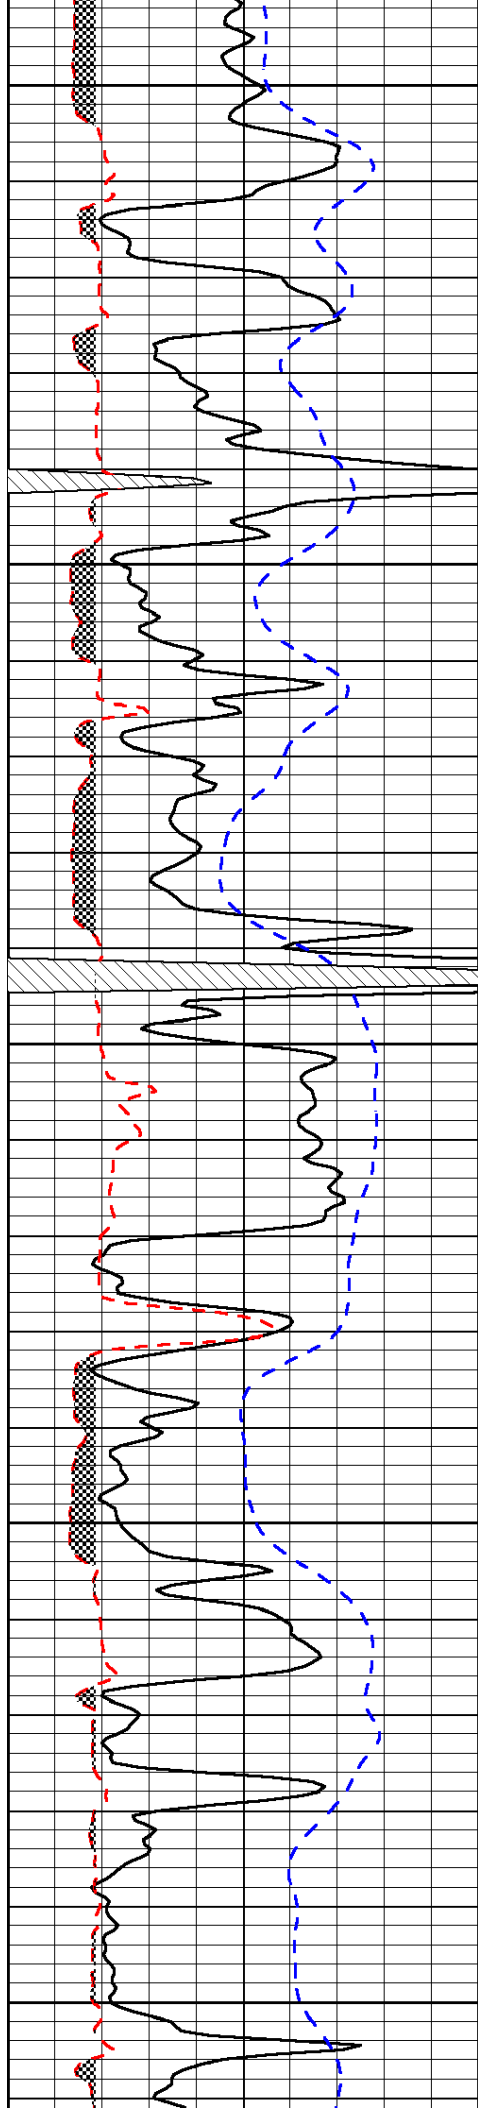


3900


3950

4000

4050

4100

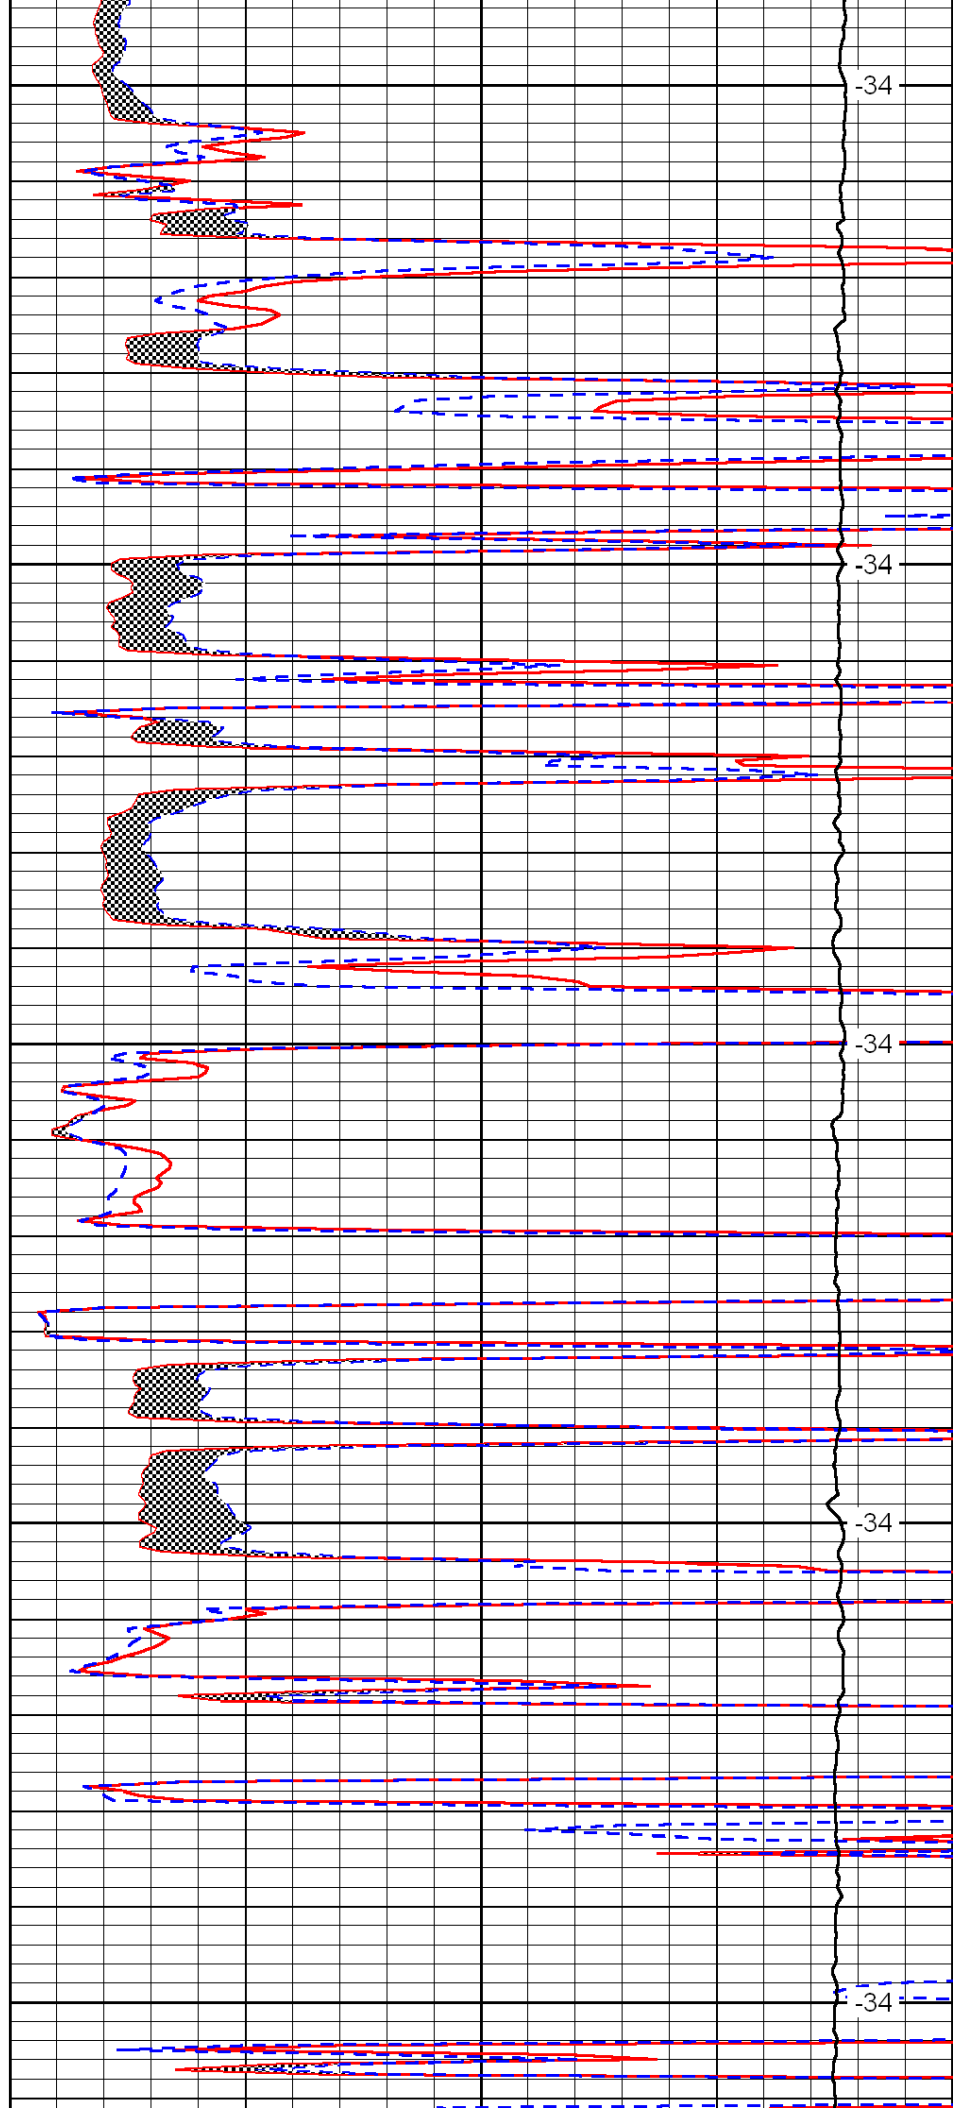

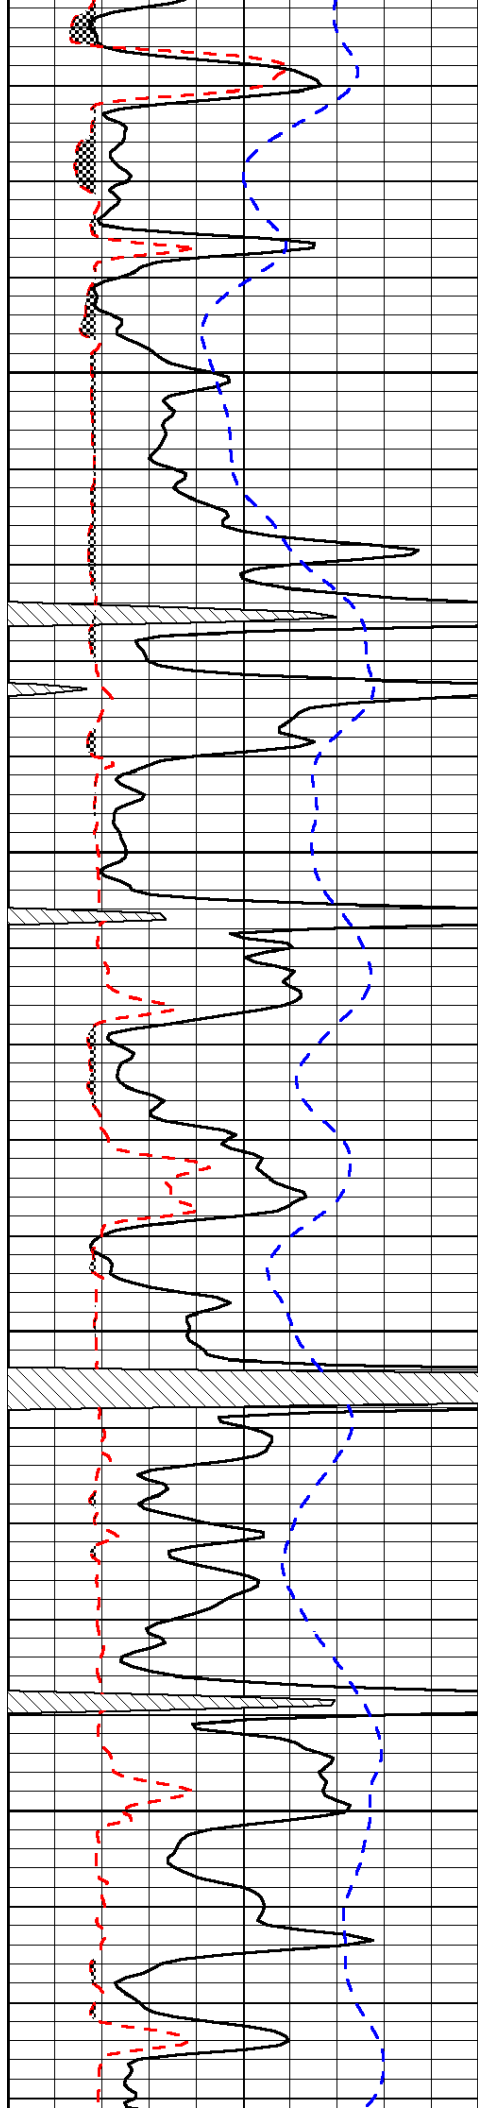


4150

4200

4250

4300

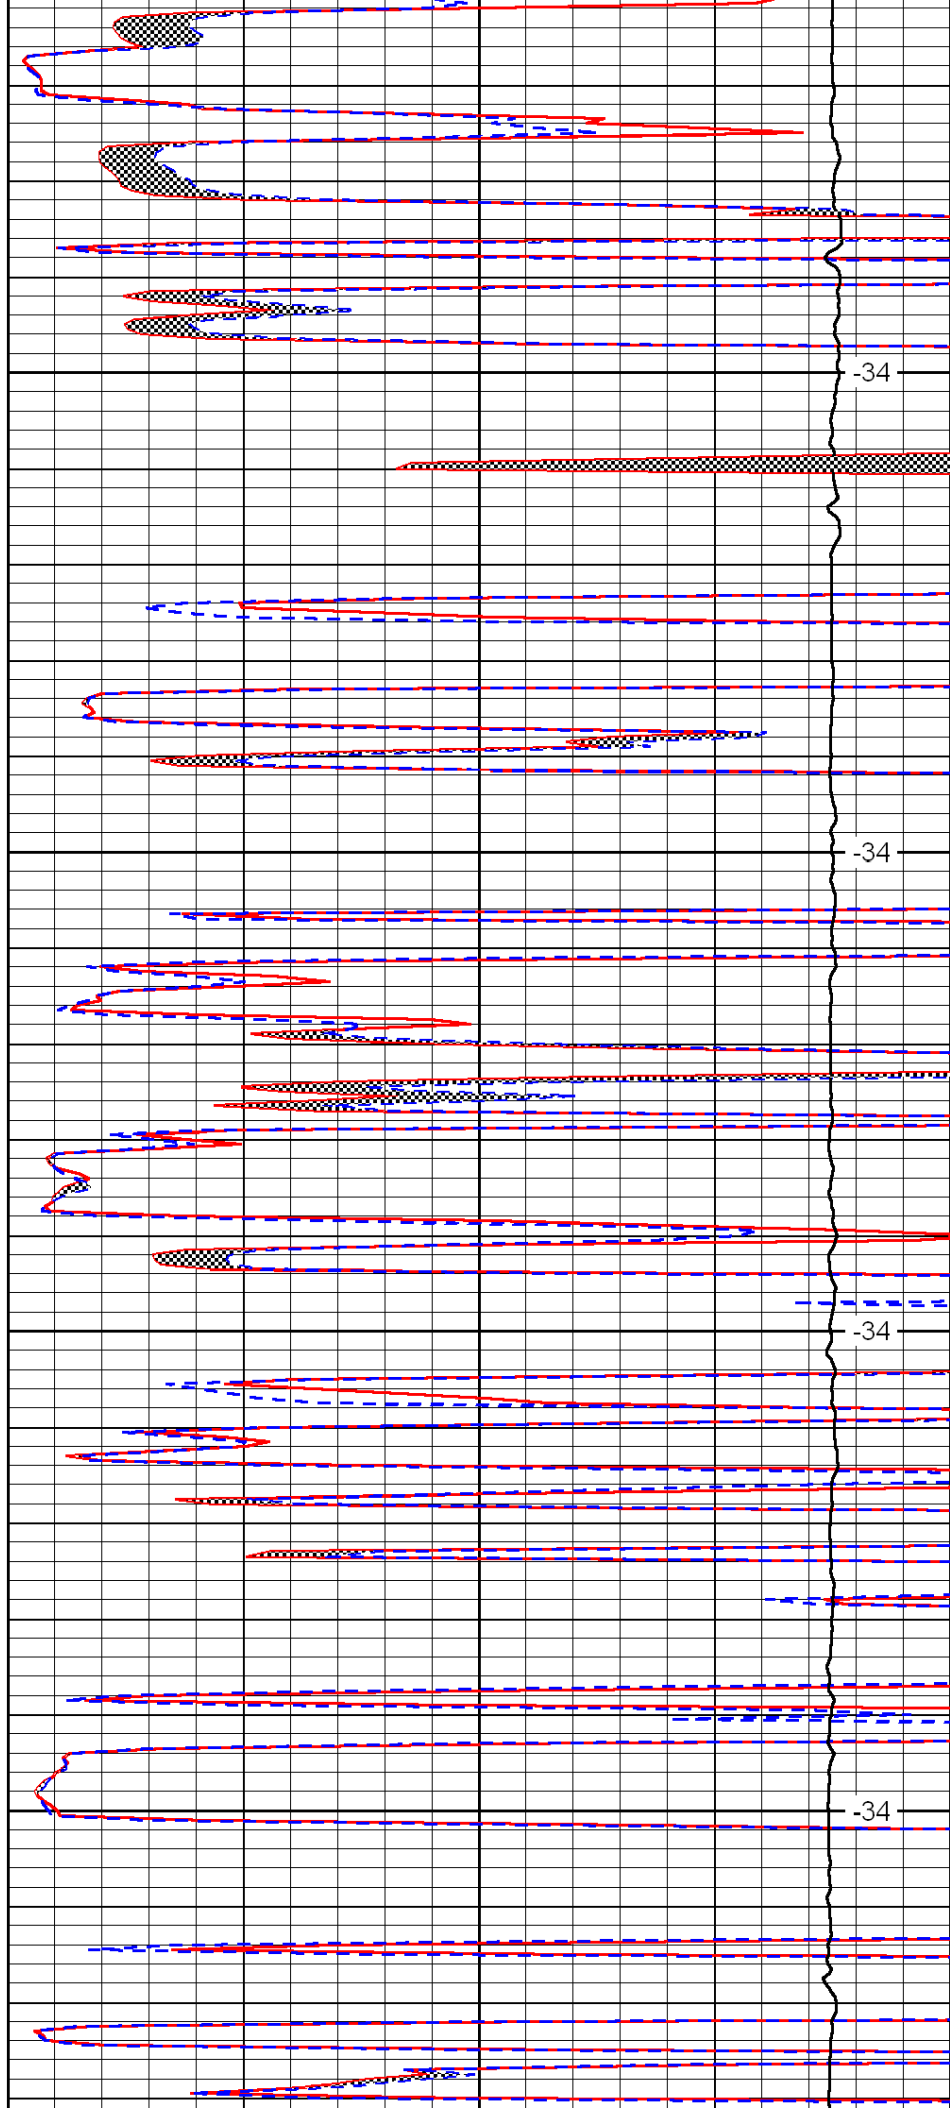


-34

-34

-34

-34

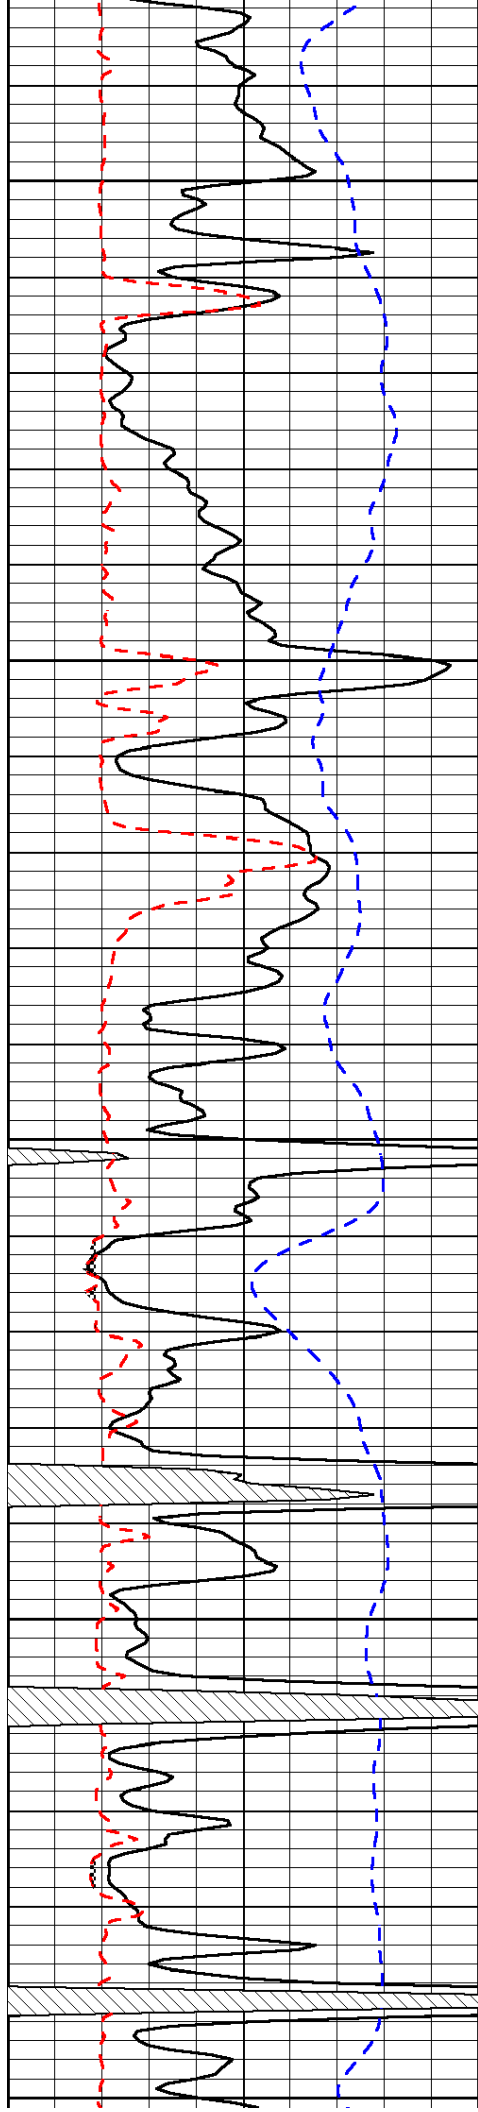


4350

4400

4450

4500

4550

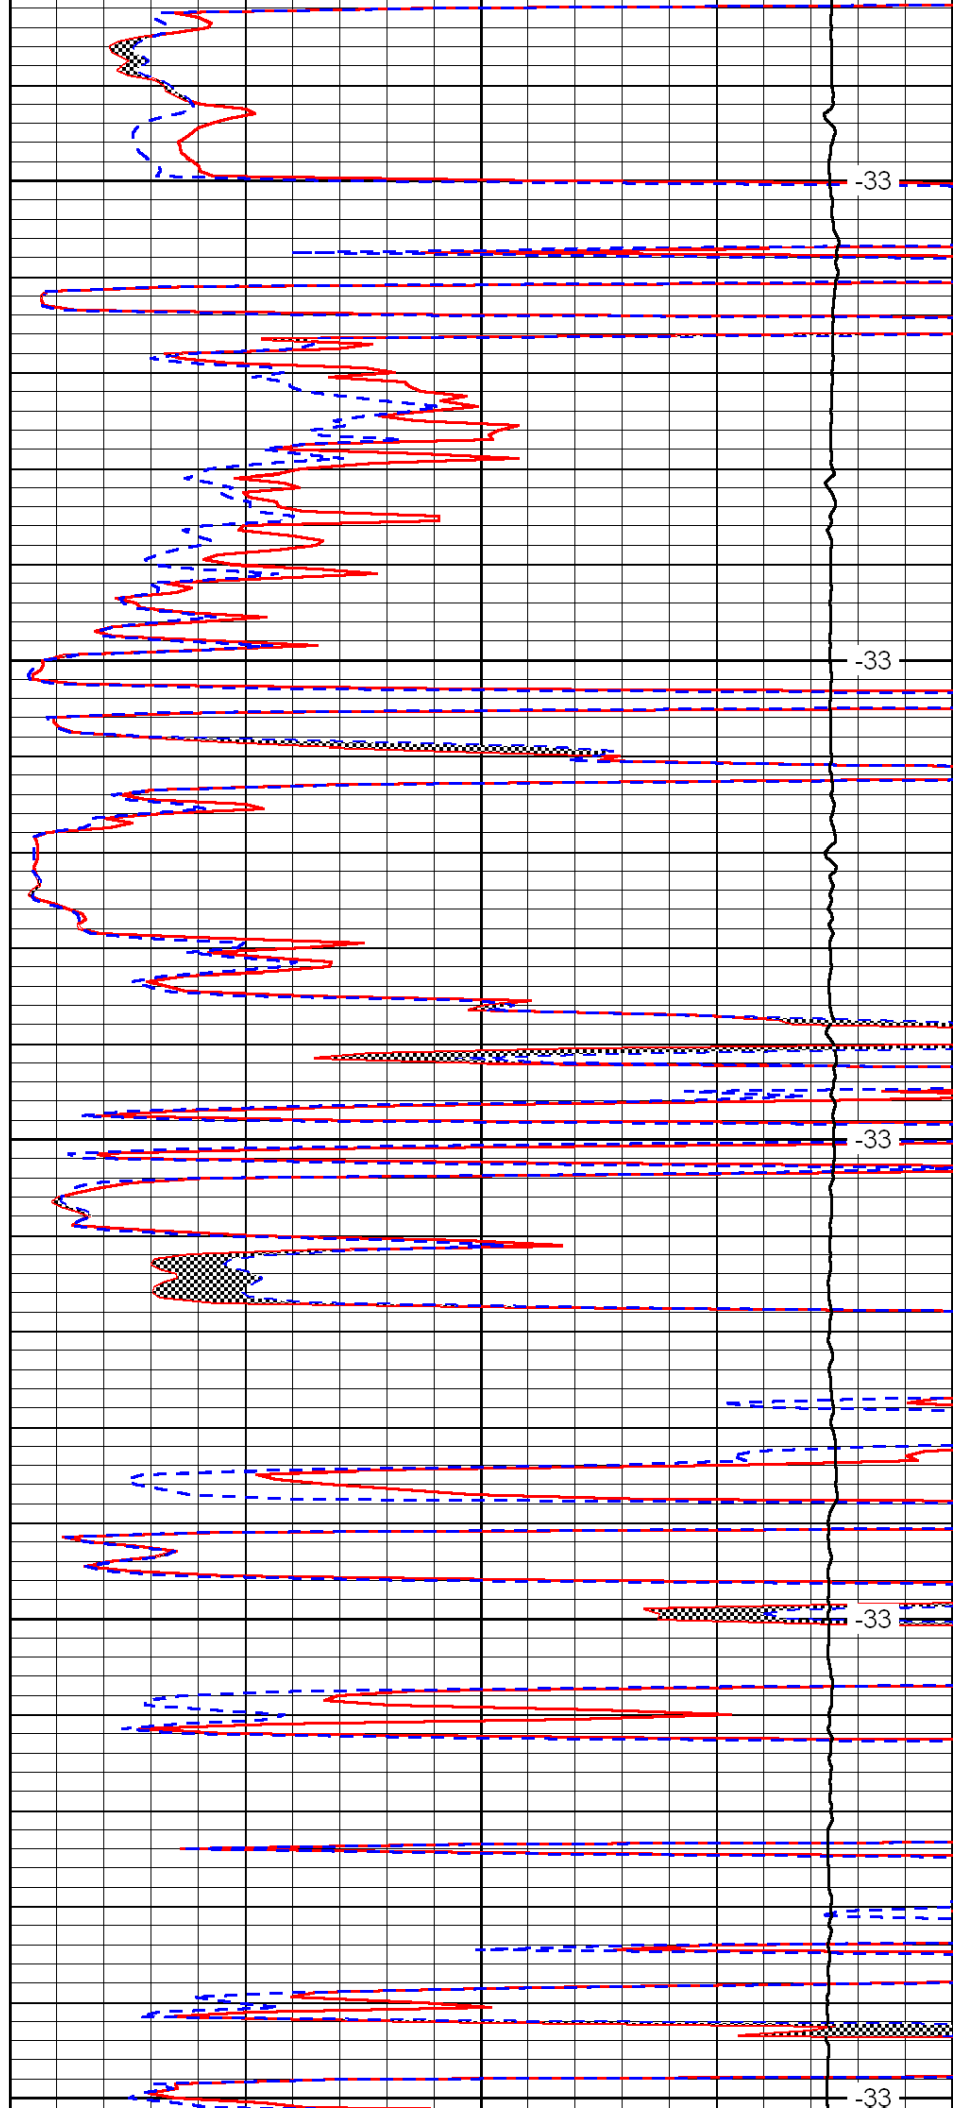



-33

-33

-33

-33

-33

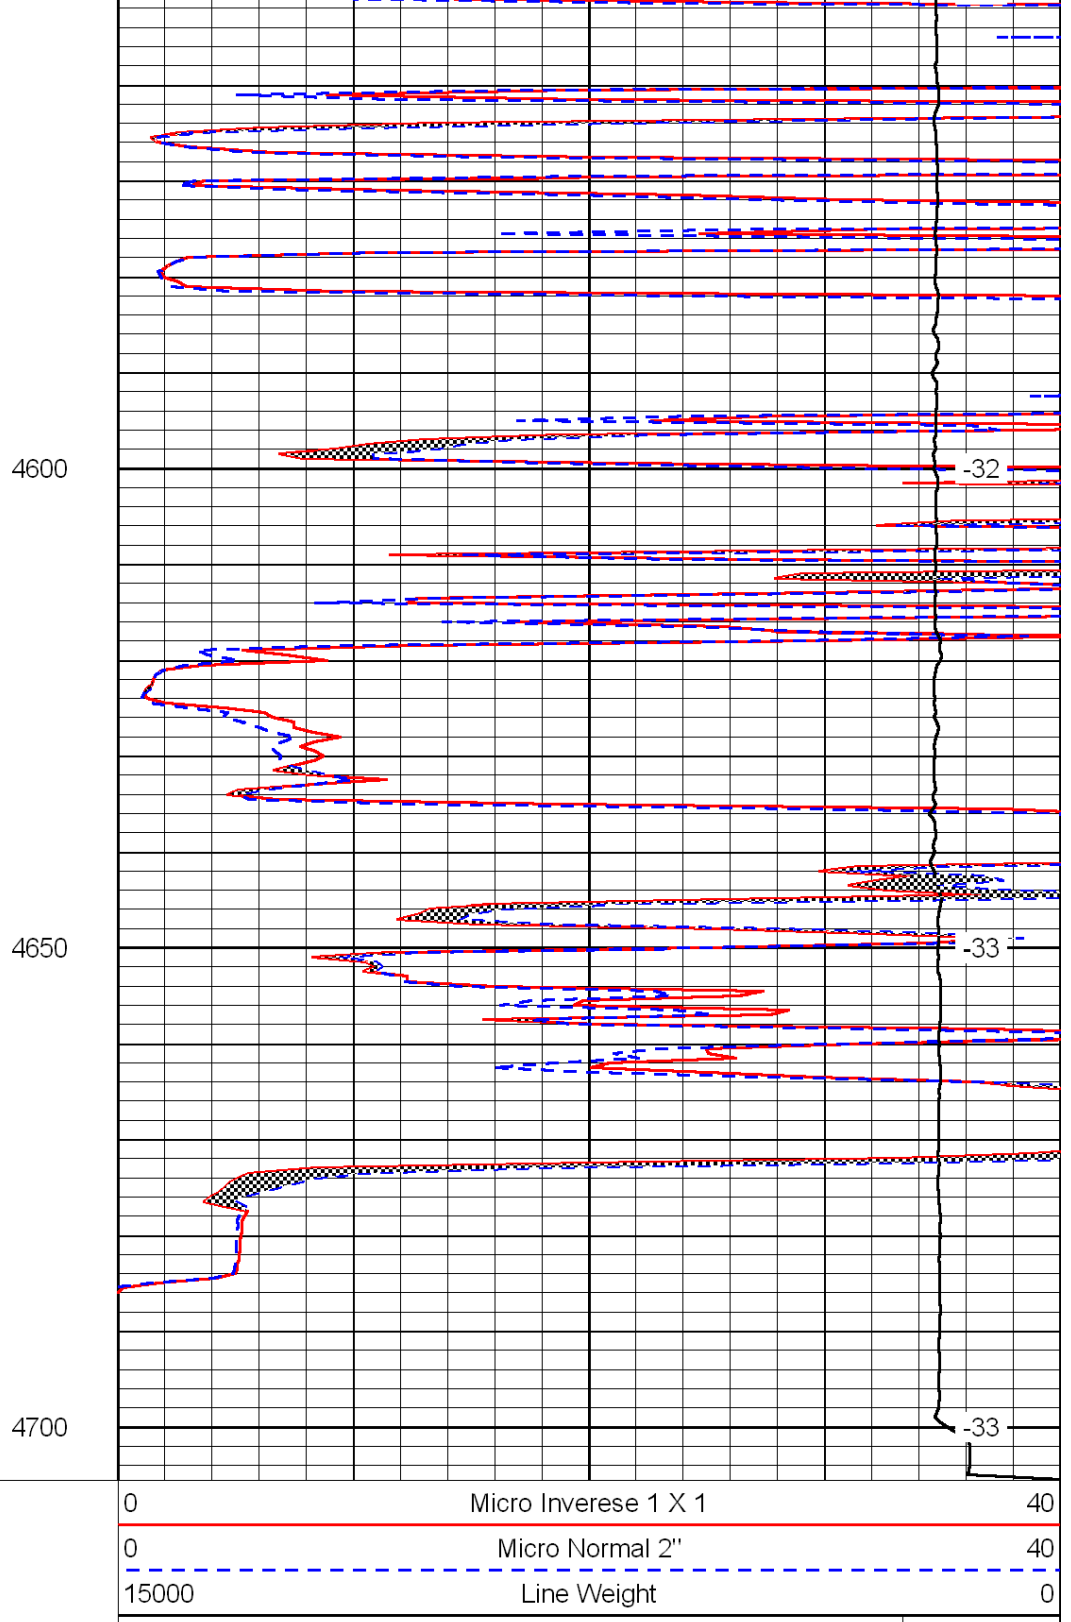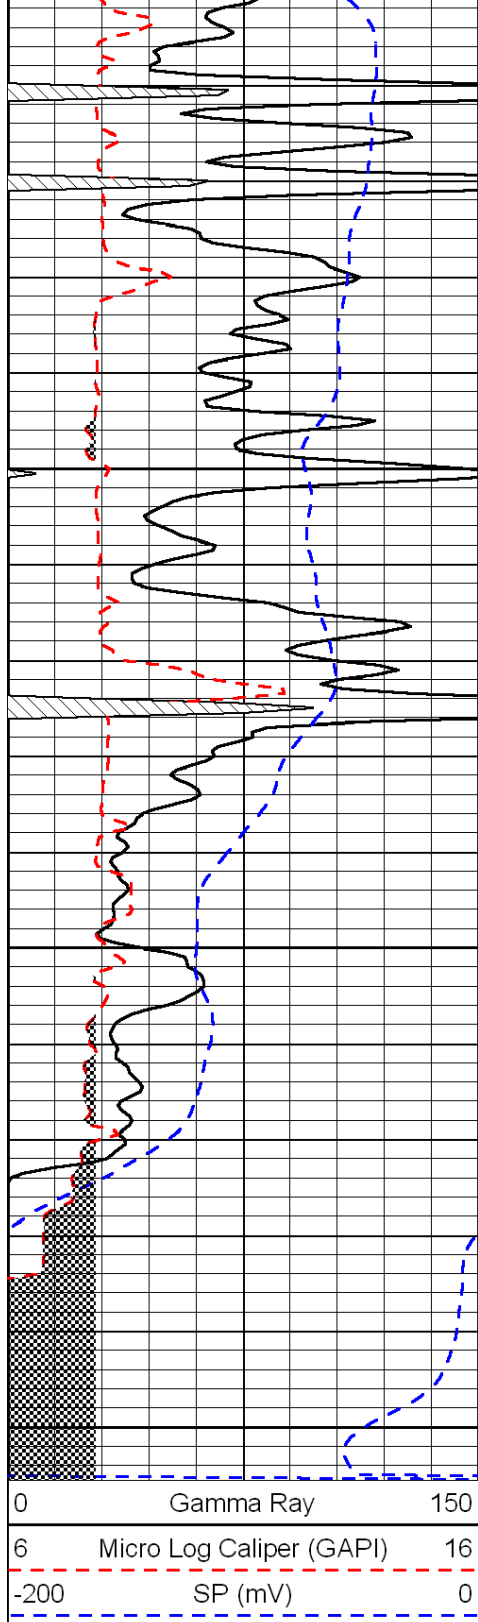

LSPD