LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-077-21,827-00-00

Company	Unit Petroleum Company
Well	Kitts SWD No.1
Field	Wildcat
County	Harper
State	Kansas

Location: 250' FSL & 1320' FEL

Sec: 20 Twp: 34 S Rge: 8 W

Other Services: CNL/CDL, DIL

Elevation: K.B. 1281, D.F., G.L. 1264

Permanent Datum: Ground Level, Elevation 1264
Log Measured From: Kelly Bushing, 17 Ft. Above Perm. Datum
Drilling Measured From: Kelly Bushing

Date	4/14/2012			
Run Number	Two			
Depth Driller	7002			
Depth Logger	6993			
Bottom Logged Interval	6992			
Top Log Interval	5350			
Casing Driller	7 @ 5372			
Casing Logger	5370			
Bit Size	6.5			
Type Fluid in Hole	Chemical			
Salinity,ppm CL	3800			
Density / Viscosity	8.4	99		
pH / Fluid Loss	7.5	N/A		
Source of Sample	Flowline			
Rm @ Meas. Temp	.85 @ 68			
Rmf @ Meas. Temp	.63 @ 68			
Rmc @ Meas. Temp	1.14 @ 68			
Source of Rmf / Rmc	Charts			
Rm @ BHT	.39 @ 148			
Operating Rig Time	5 Hours			
Max Rec. Temp. F	148			
Equipment Number	17			
Location	Hays			
Recorded By	D.Martin			
Witnessed By	Larry Miller			

<<< Fold Here >>>

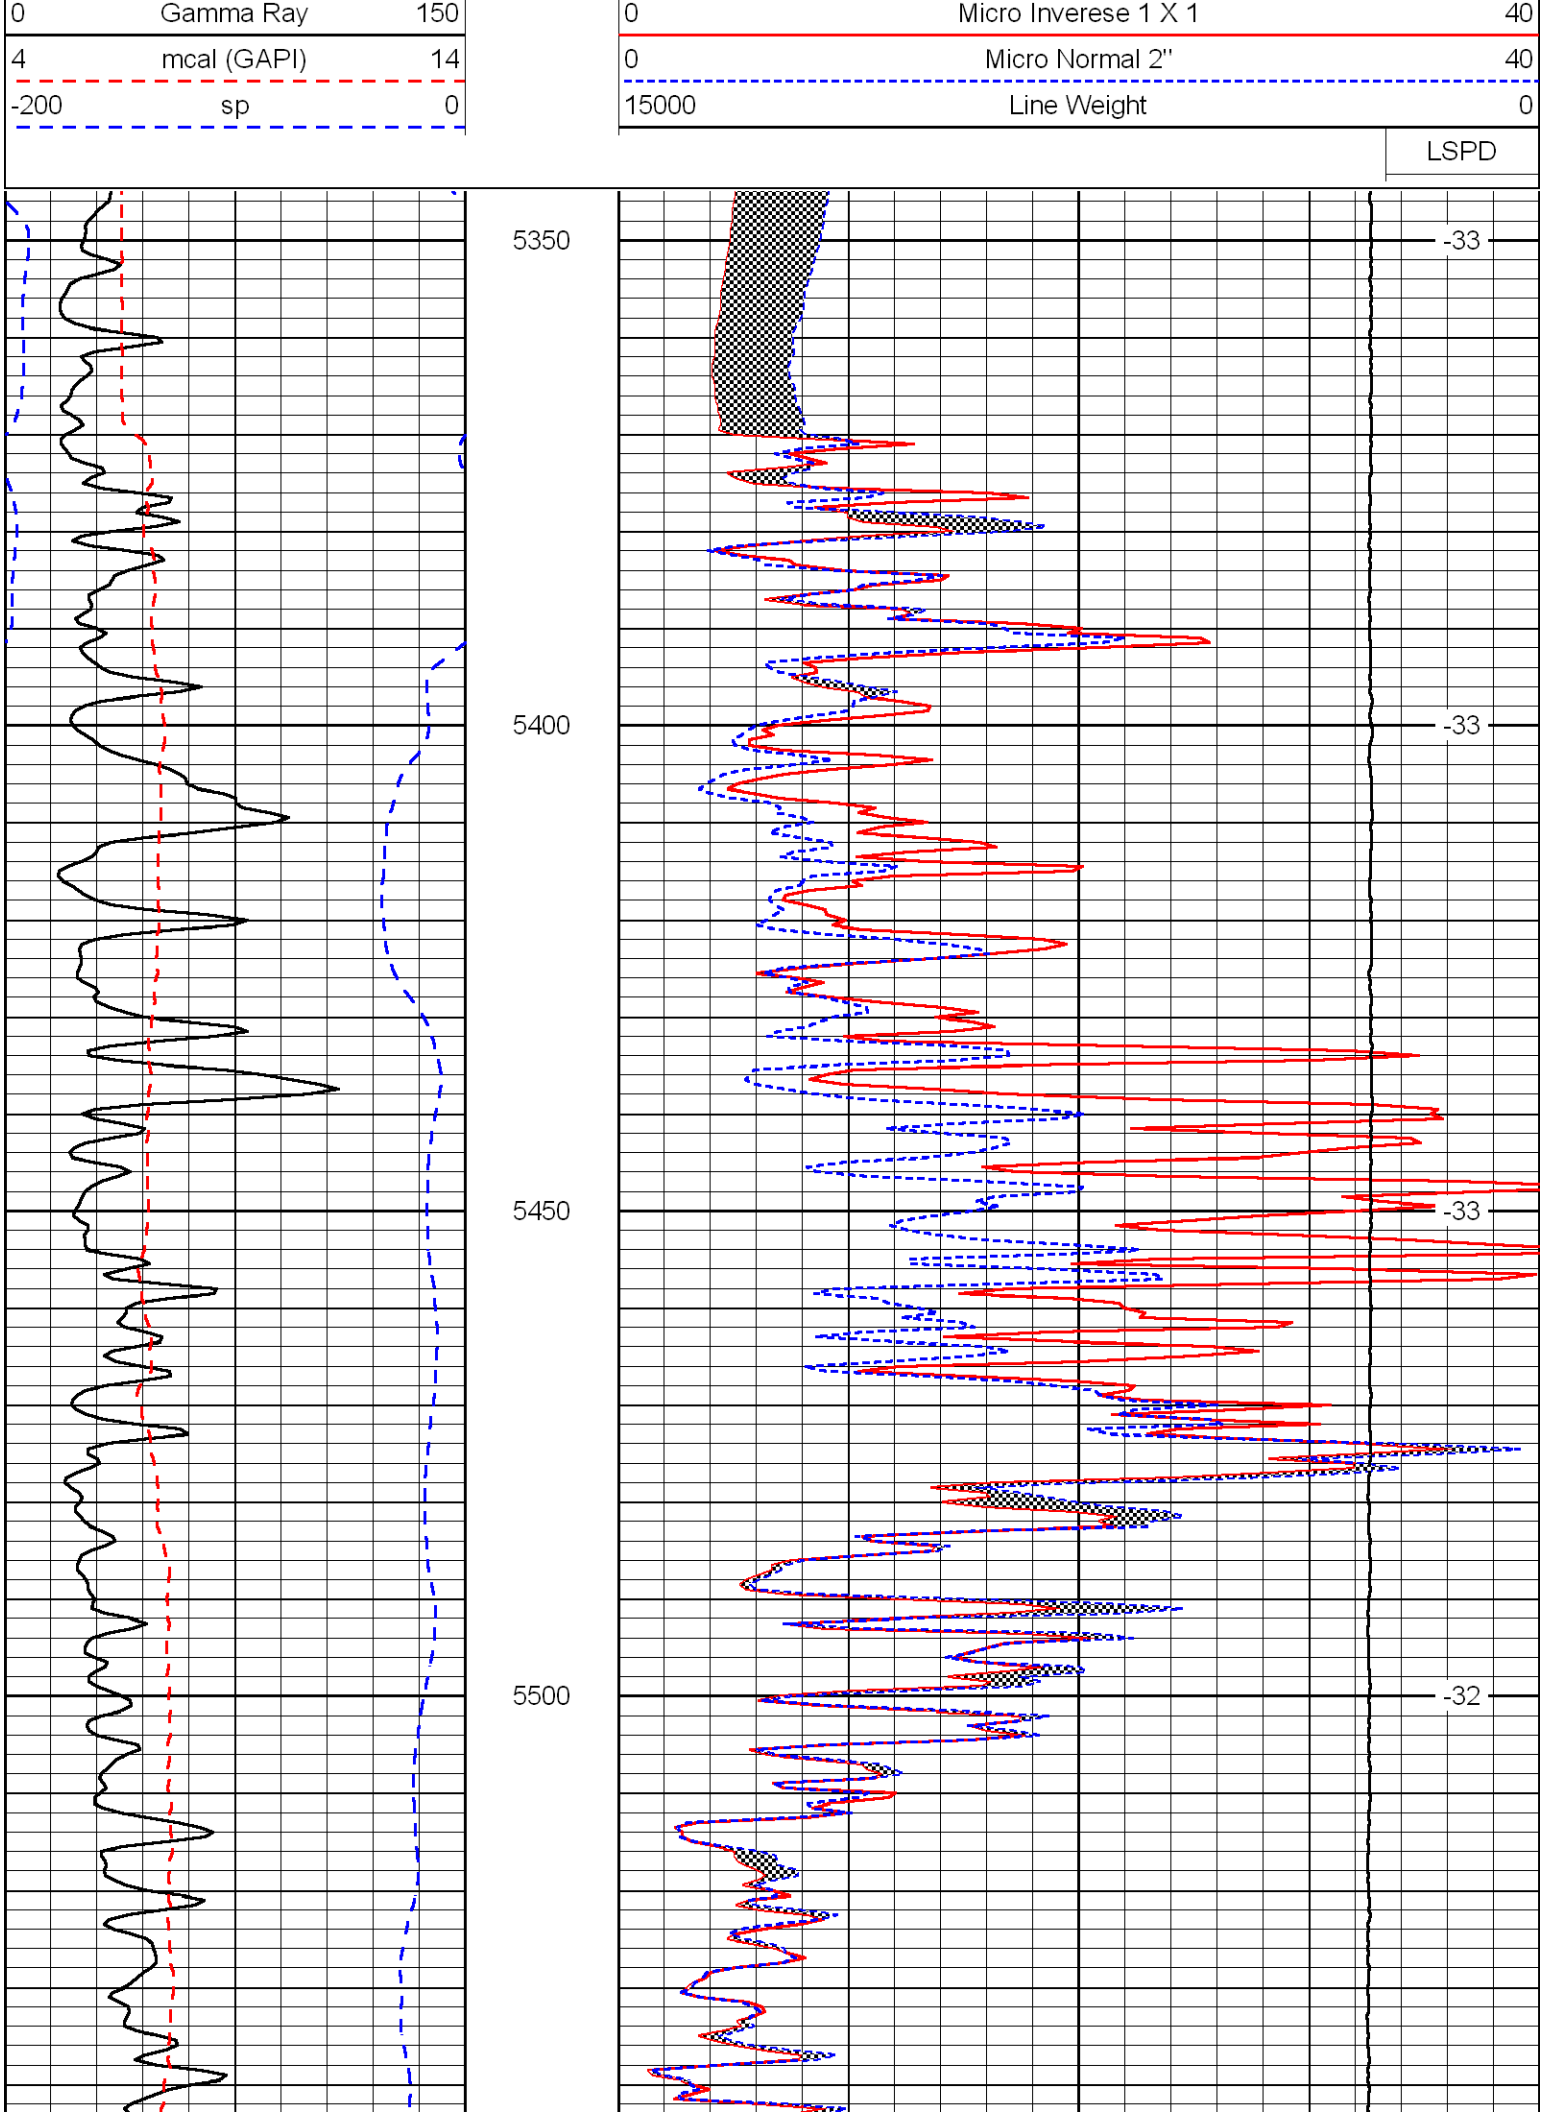
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

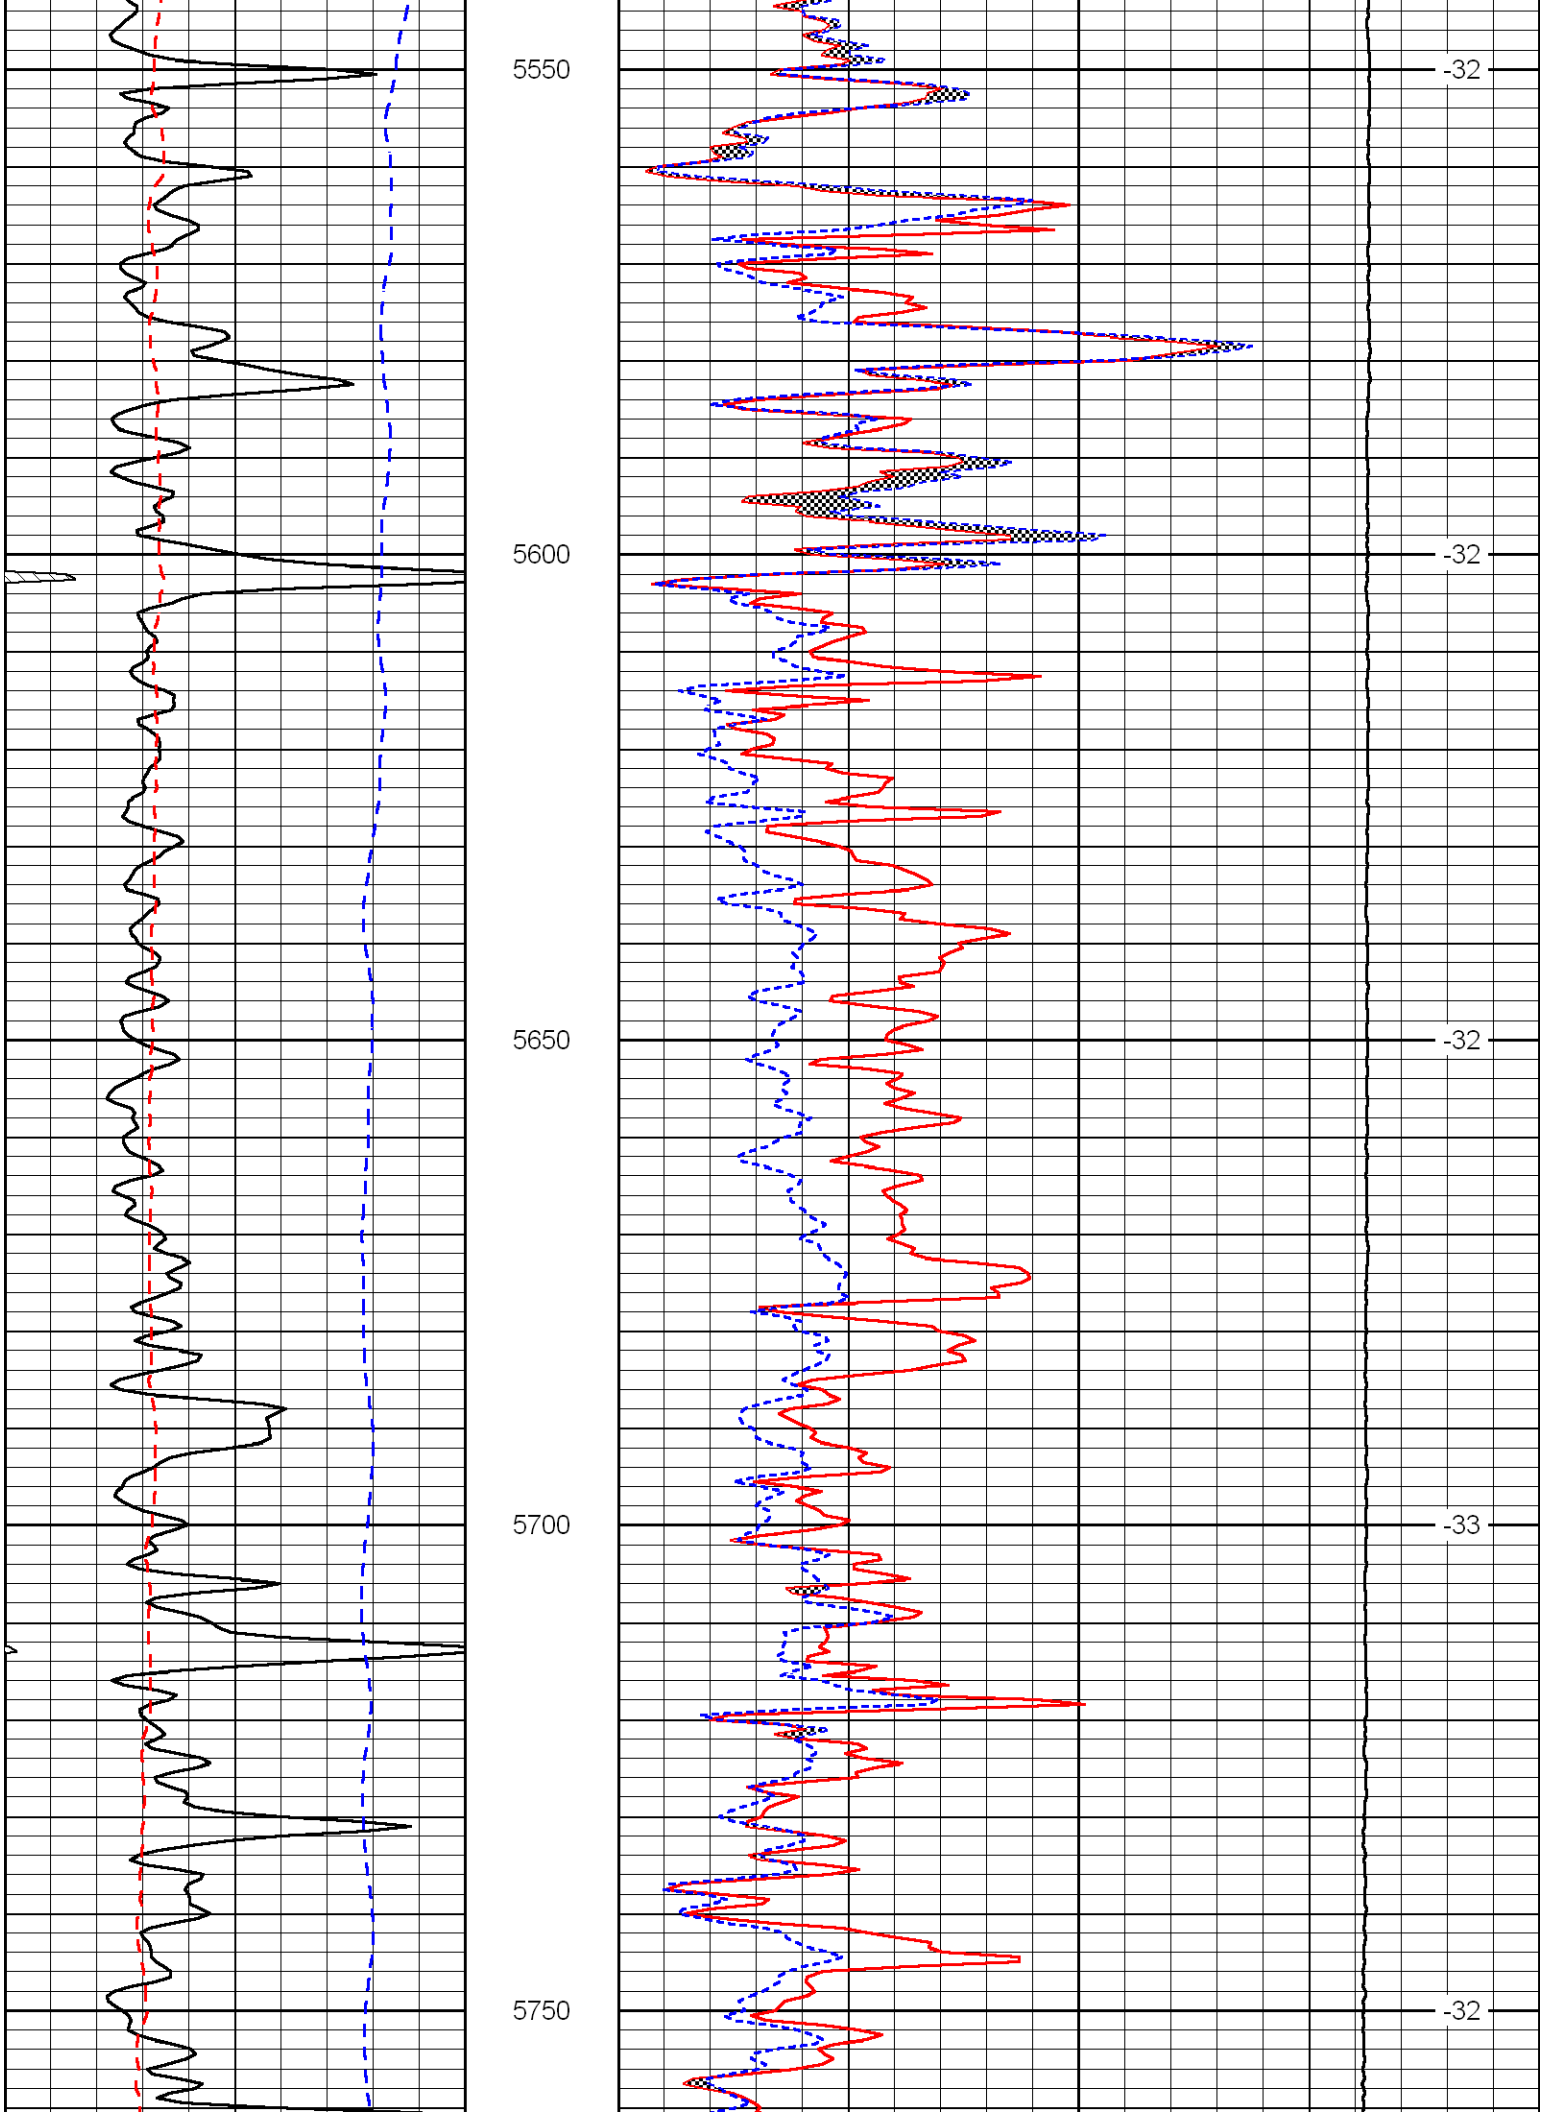
Comments

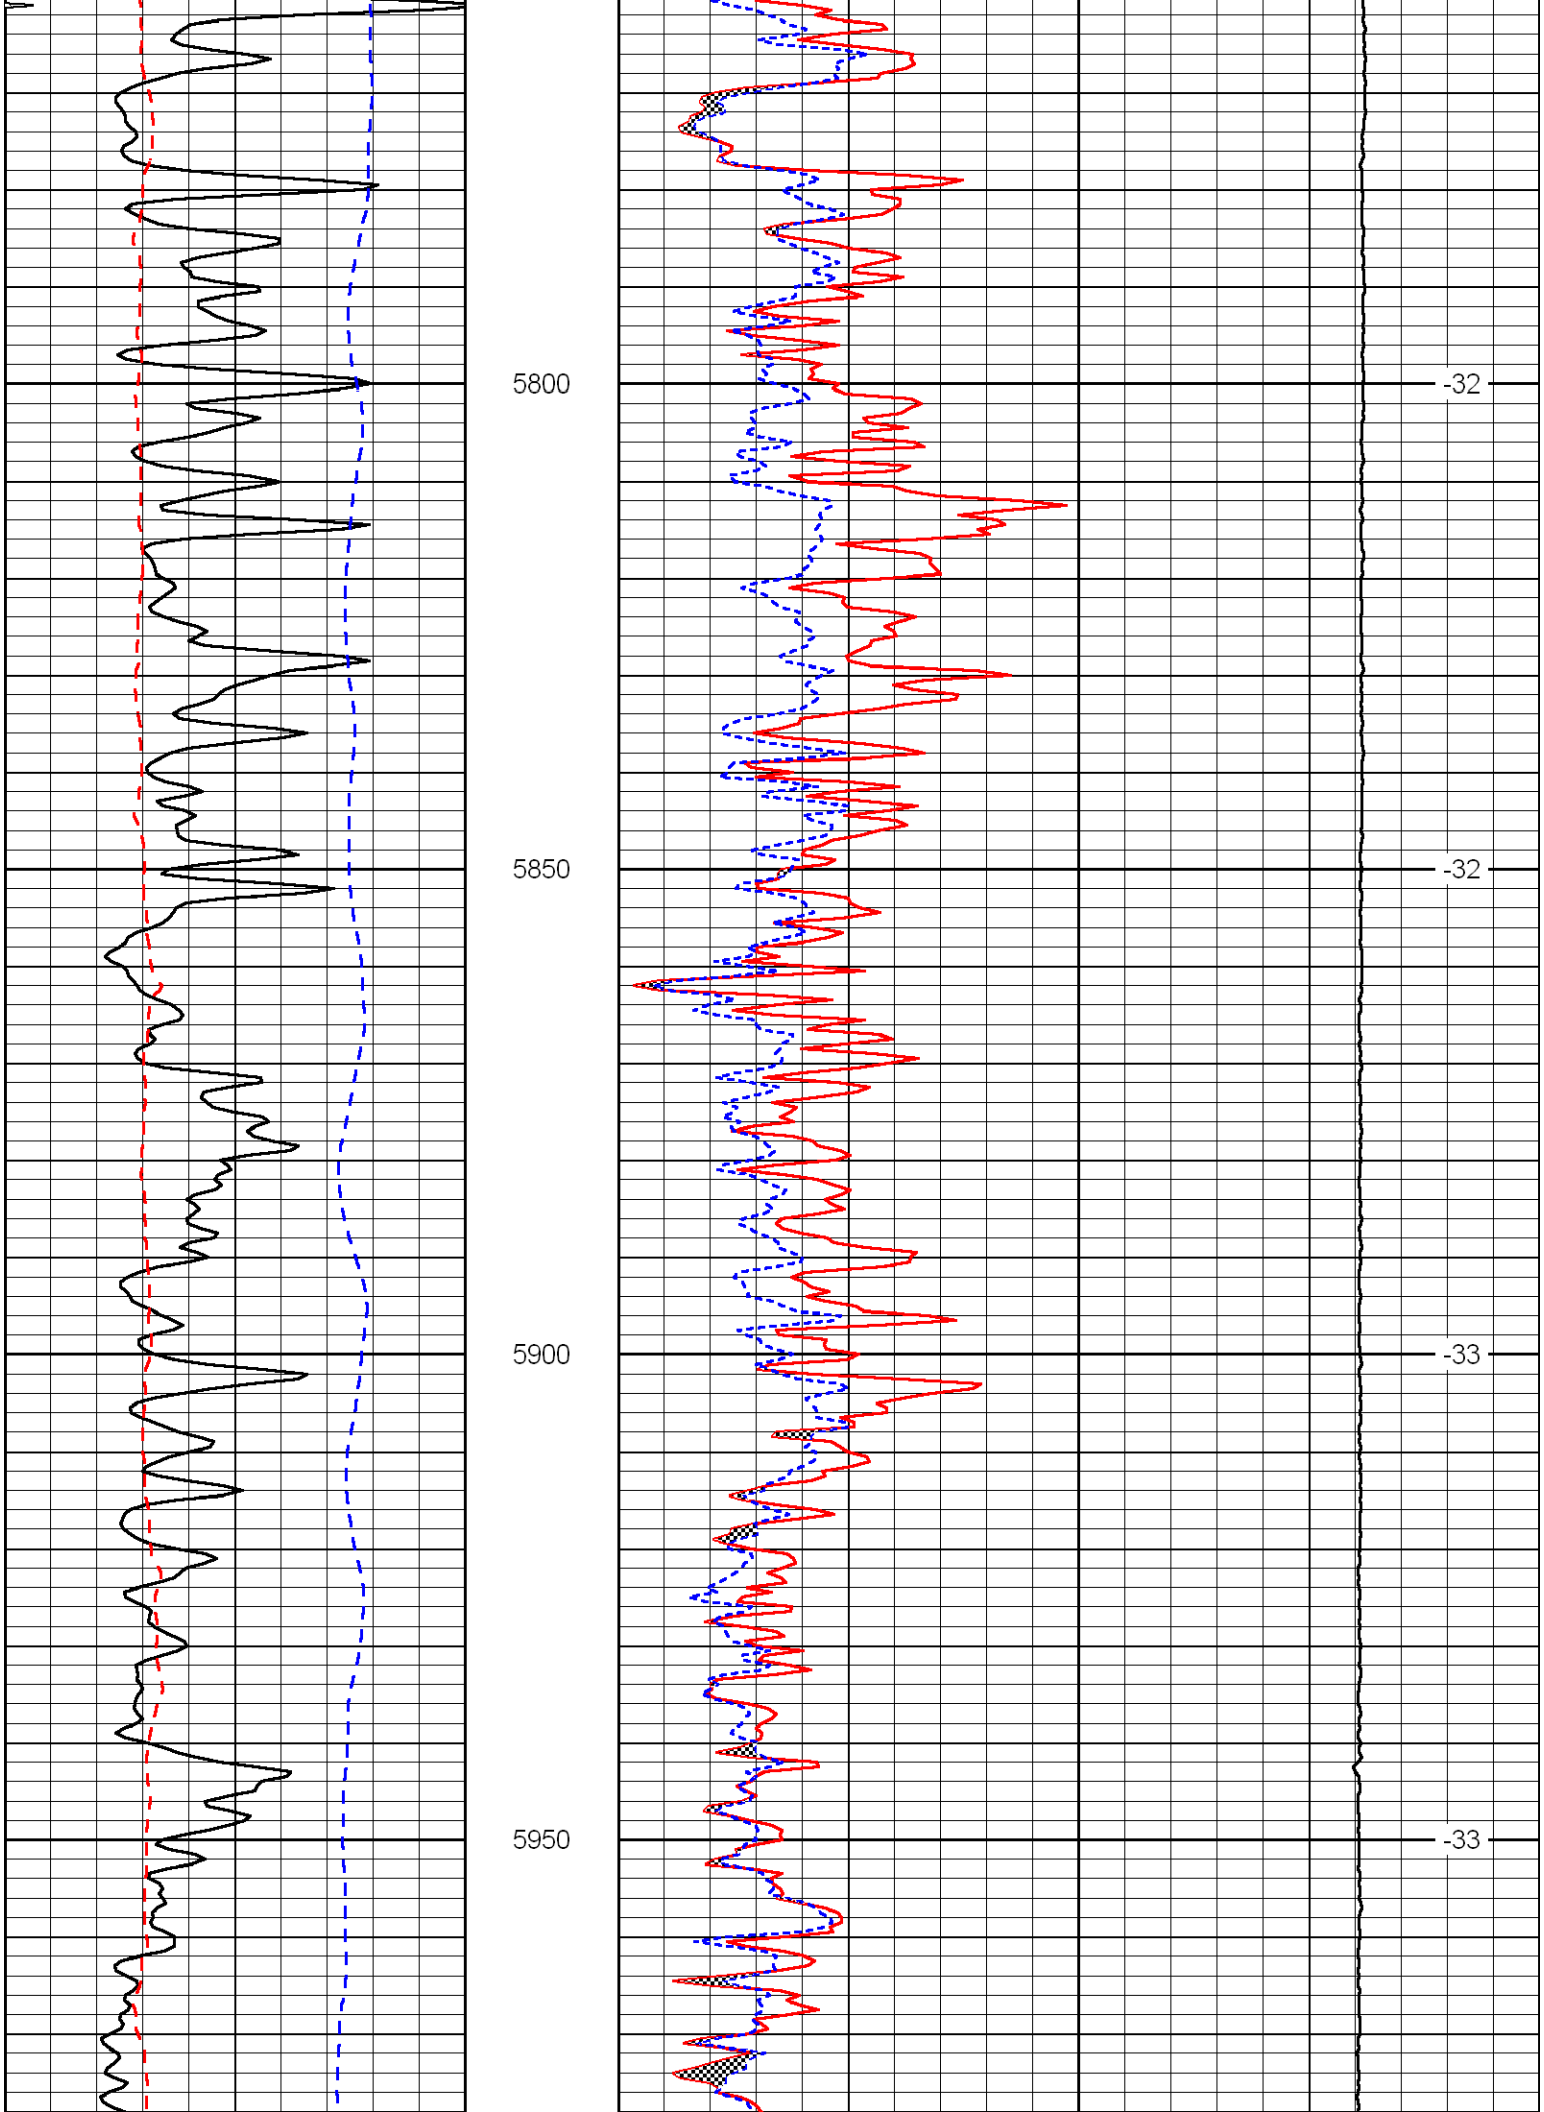
Thank you for using Log-Tech, Inc.
(785) 625-3858

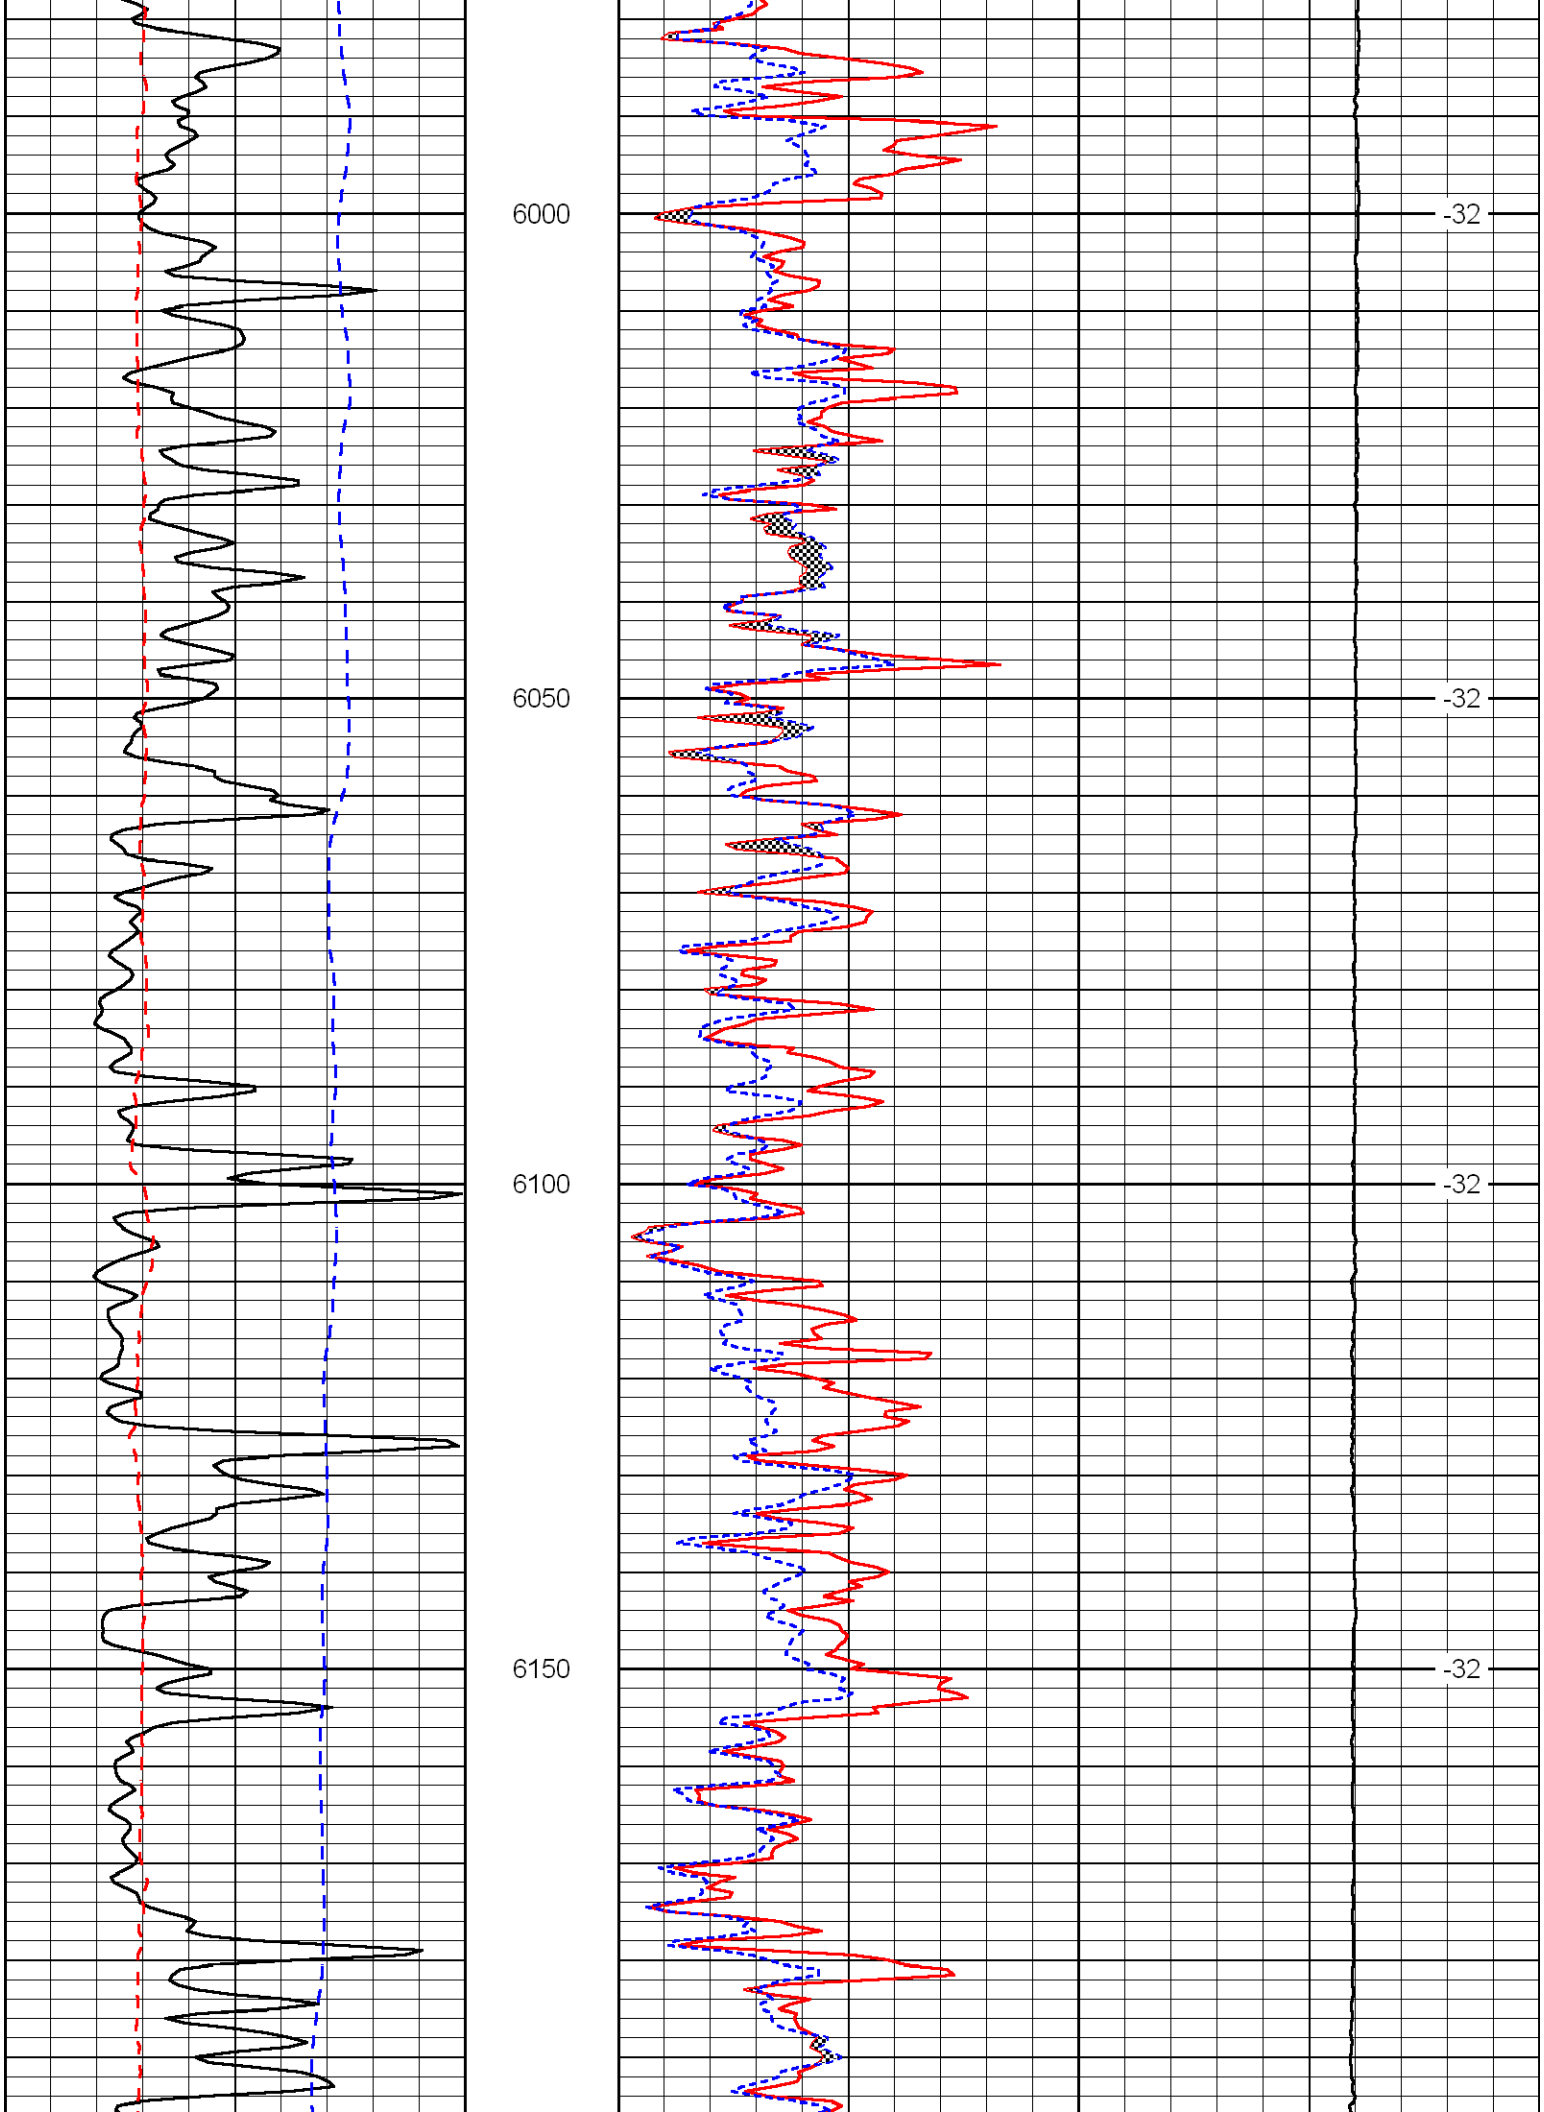
Anthony, KS
8 W, 6 S, 1 3/4 W, N Into

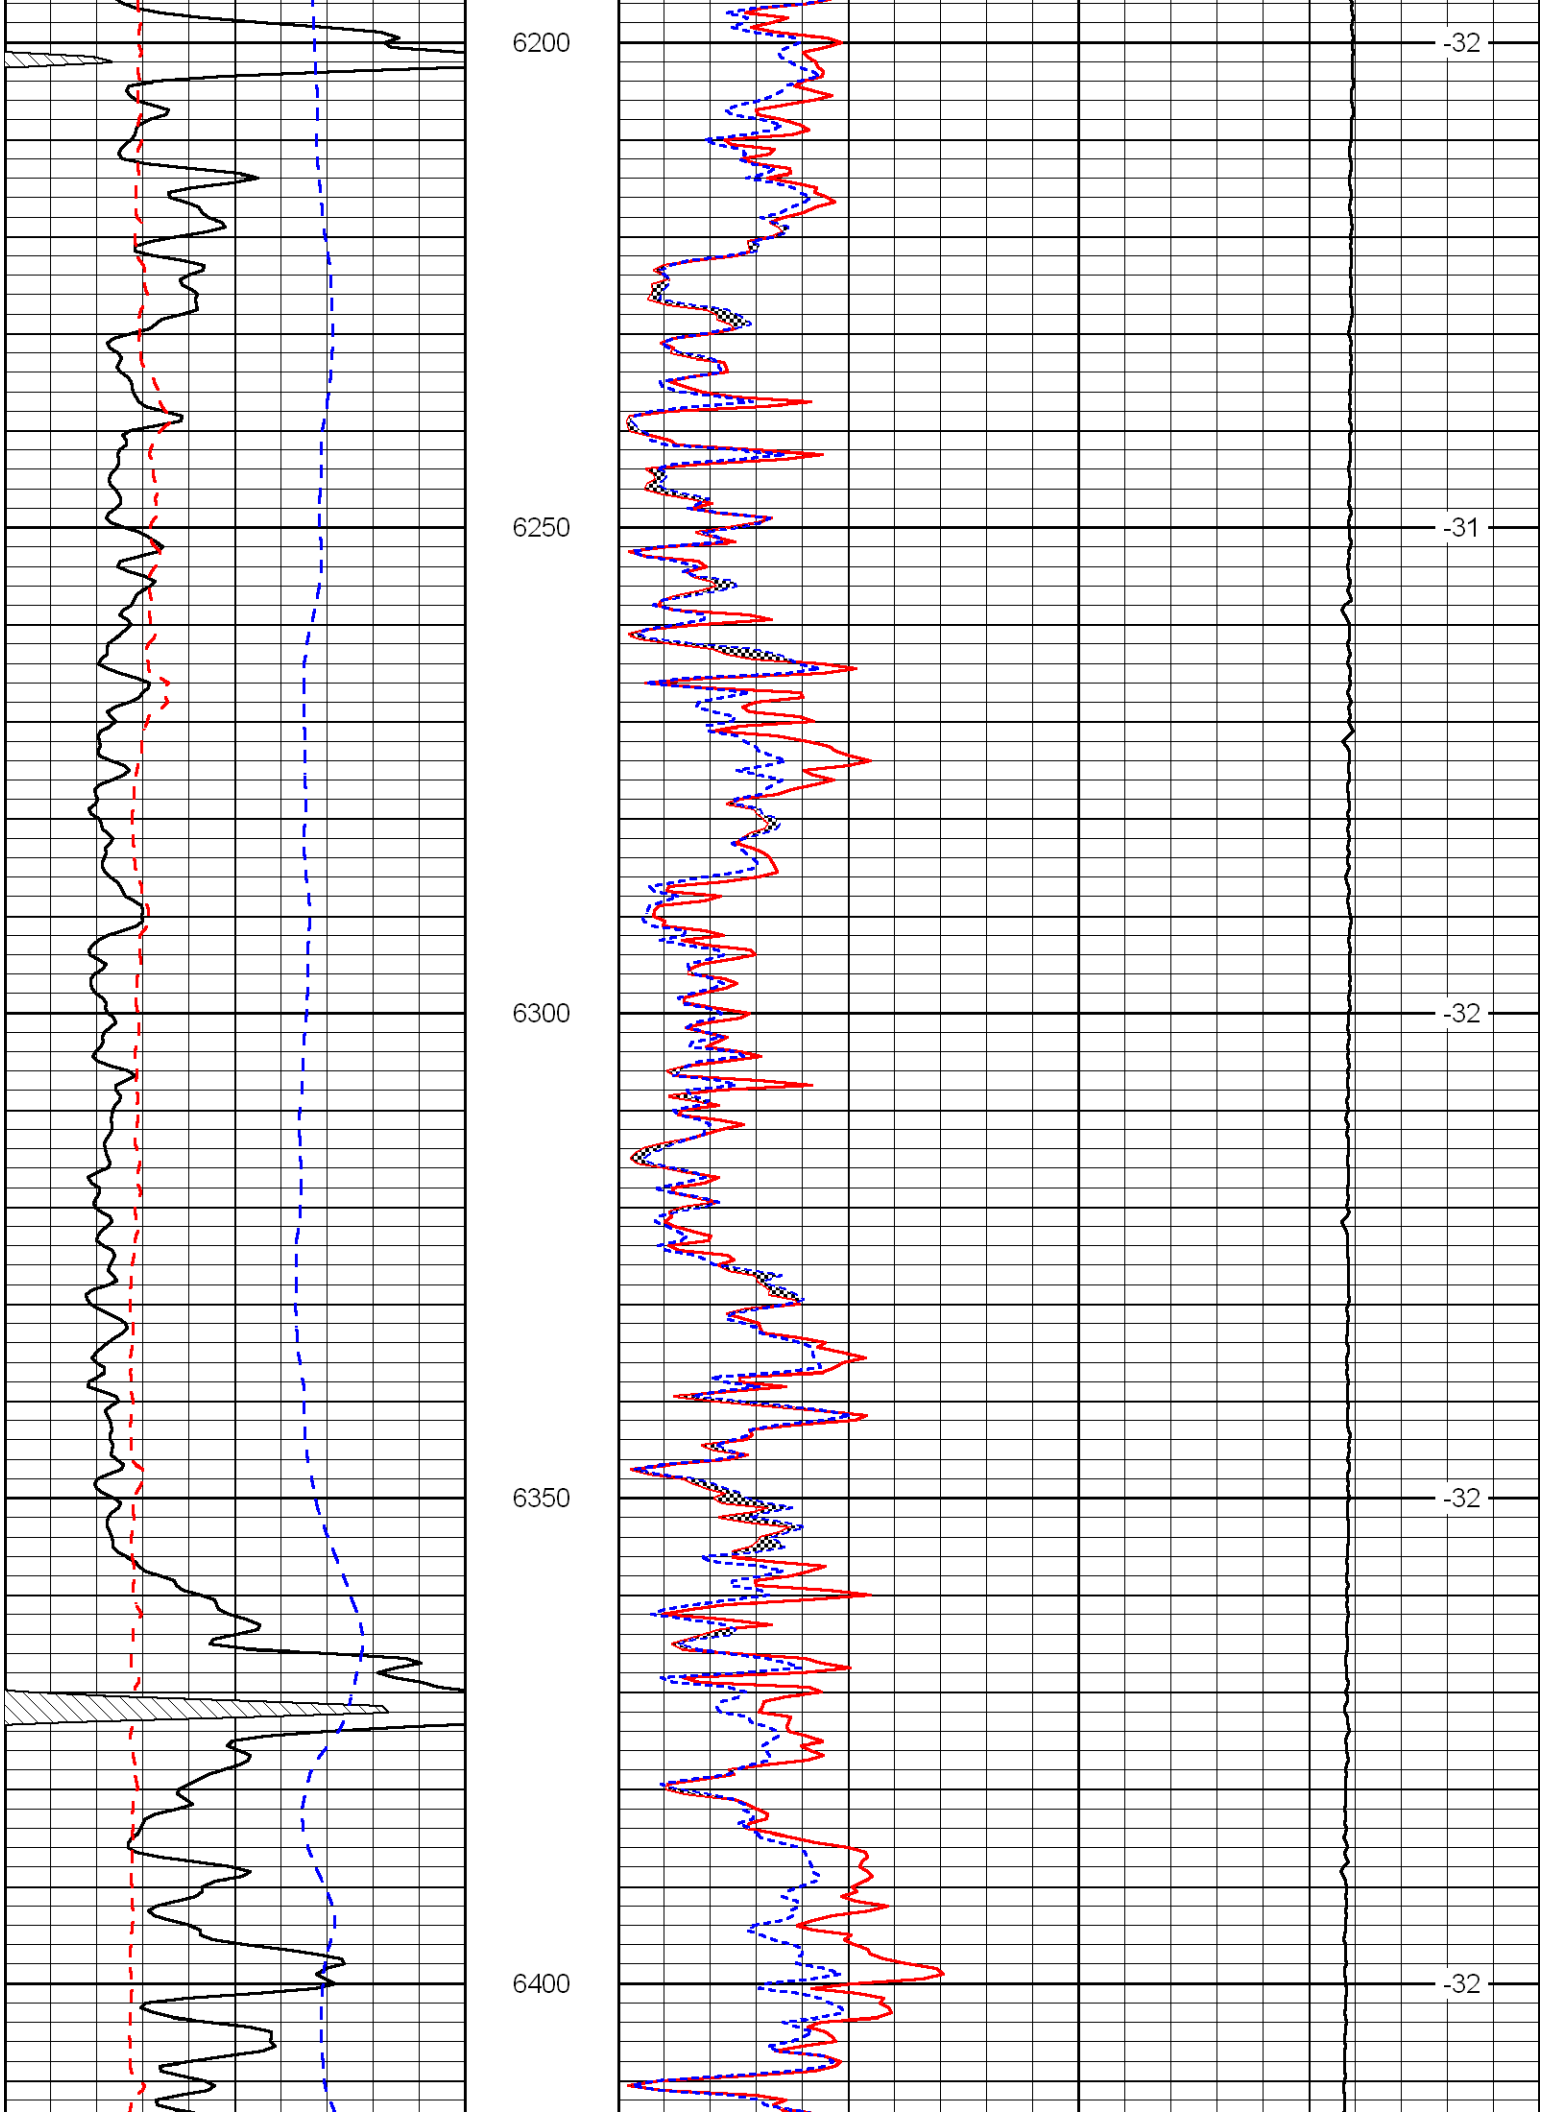
Database File:	unihd.db
Dataset Pathname:	DIL/unistk3
Presentation Format:	ekmicro
Dataset Creation:	Sun Apr 15 10:01:11 2012
Charted by:	Depth in Feet scaled 1:240

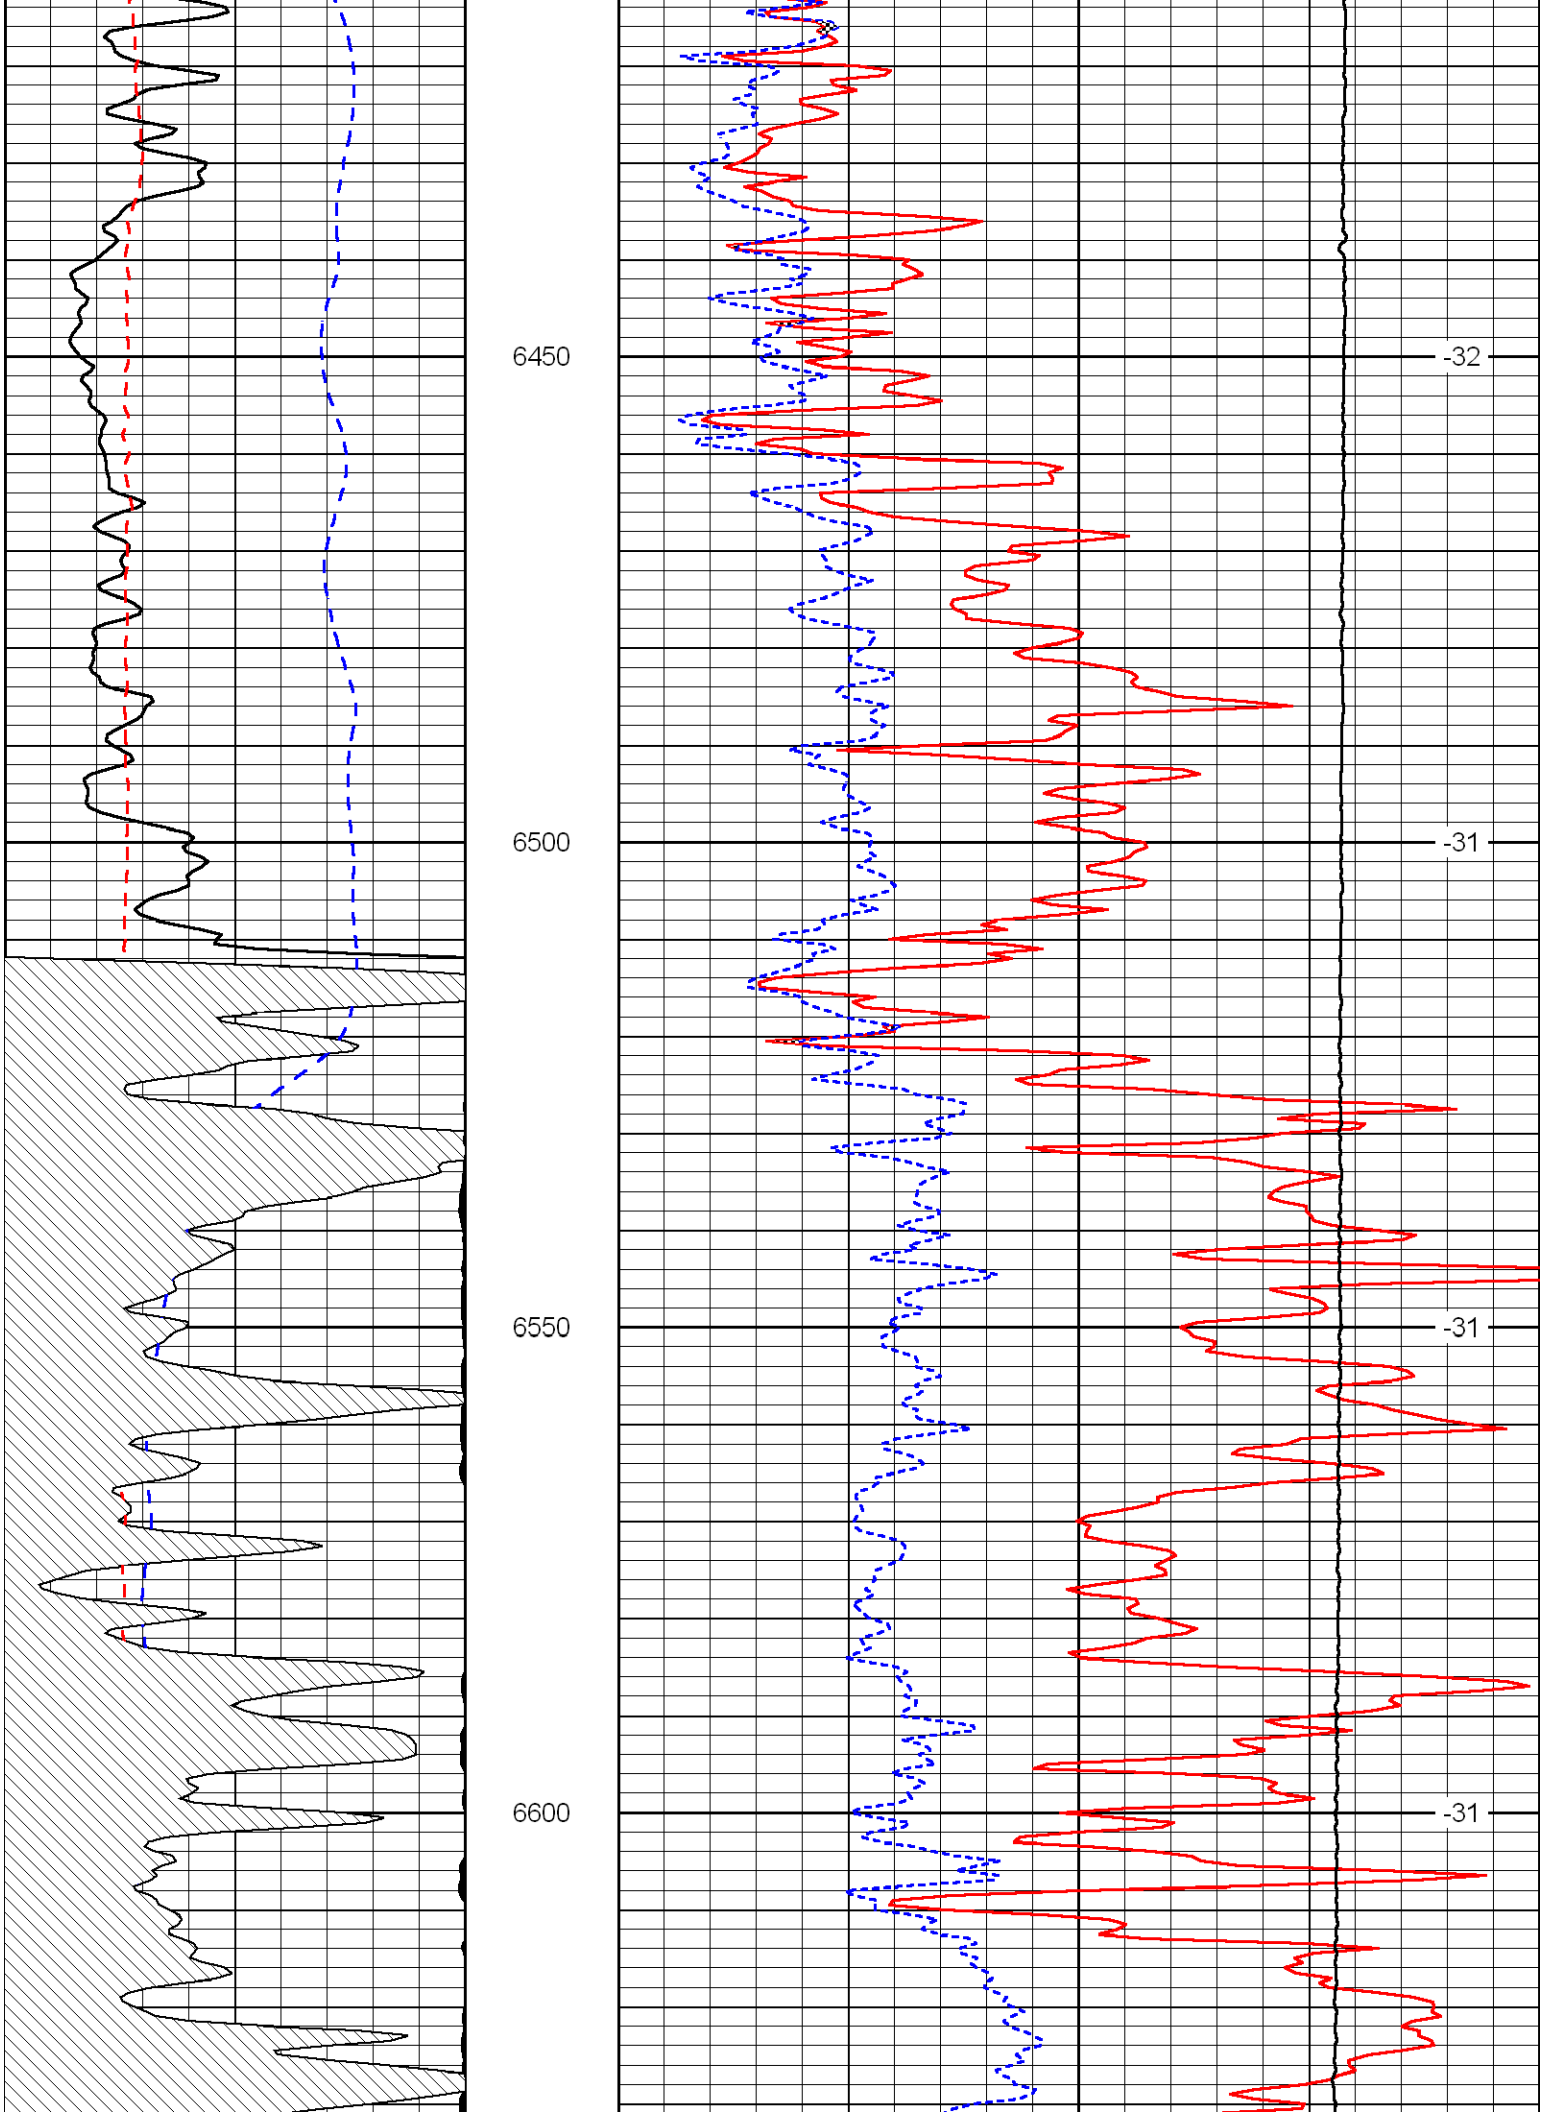

0 Gamma Ray 150
4 mcal (GAPI) 14
-200 sp 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2'' 40
15000 Line Weight 0
LSPD
5350
5400
5450
5500
-33
-33
-33
-32

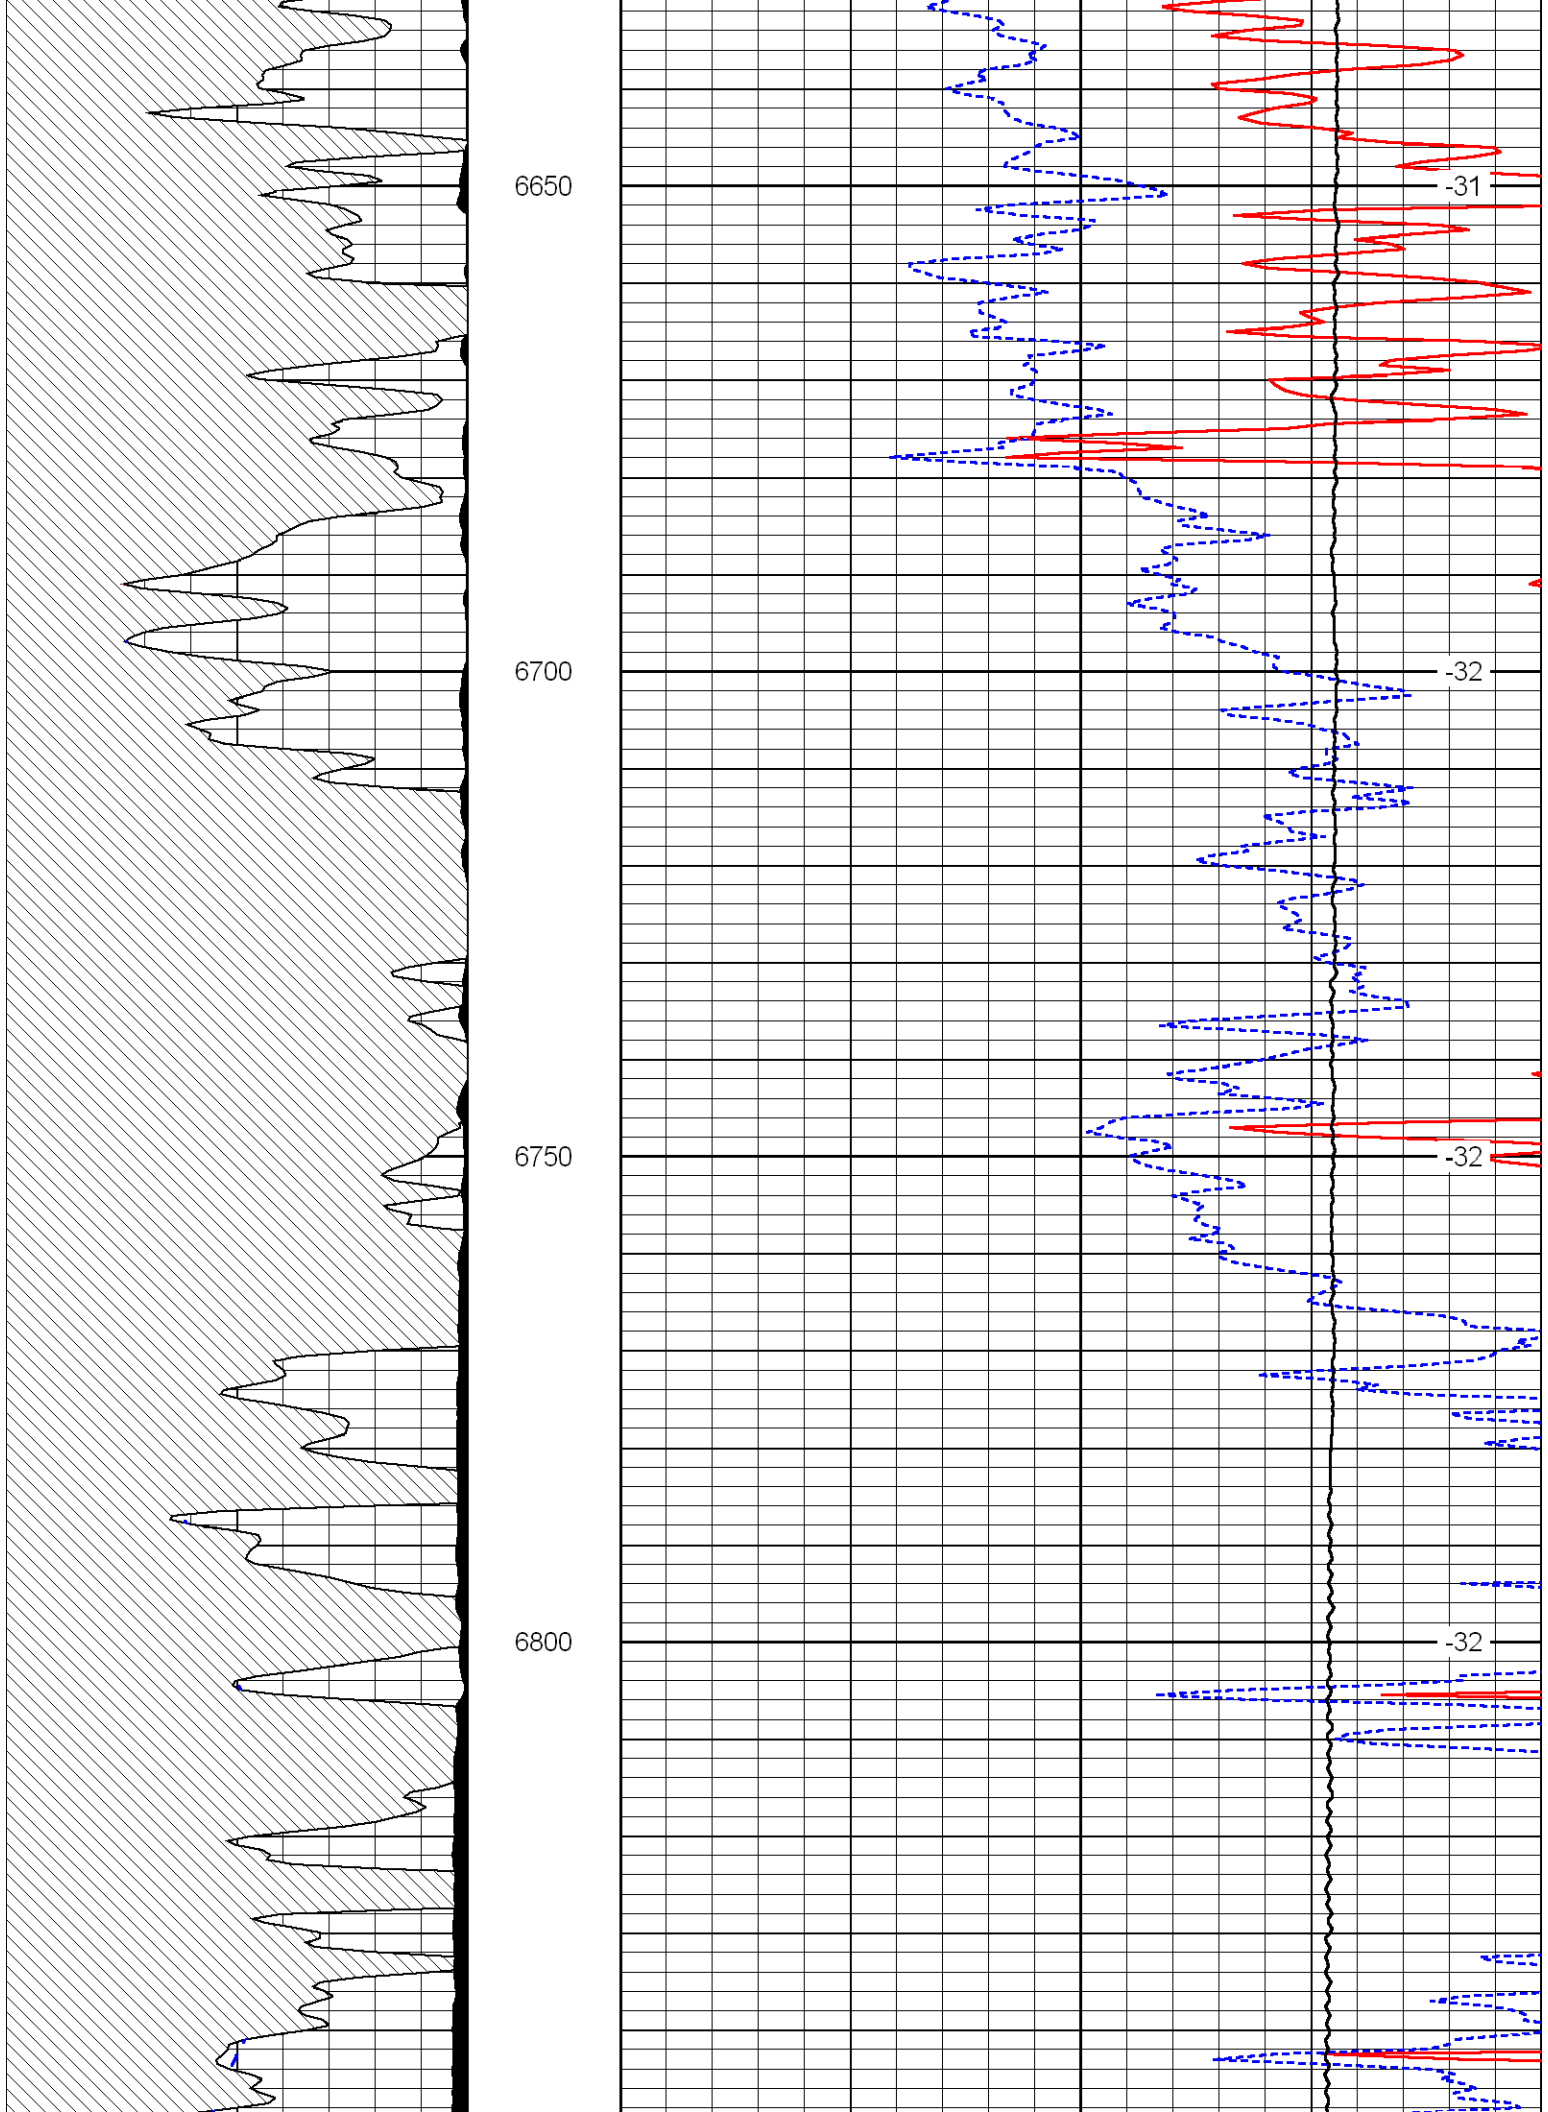

5550
5600
5650
5700
5750
-32
-32
-32
-33
-32

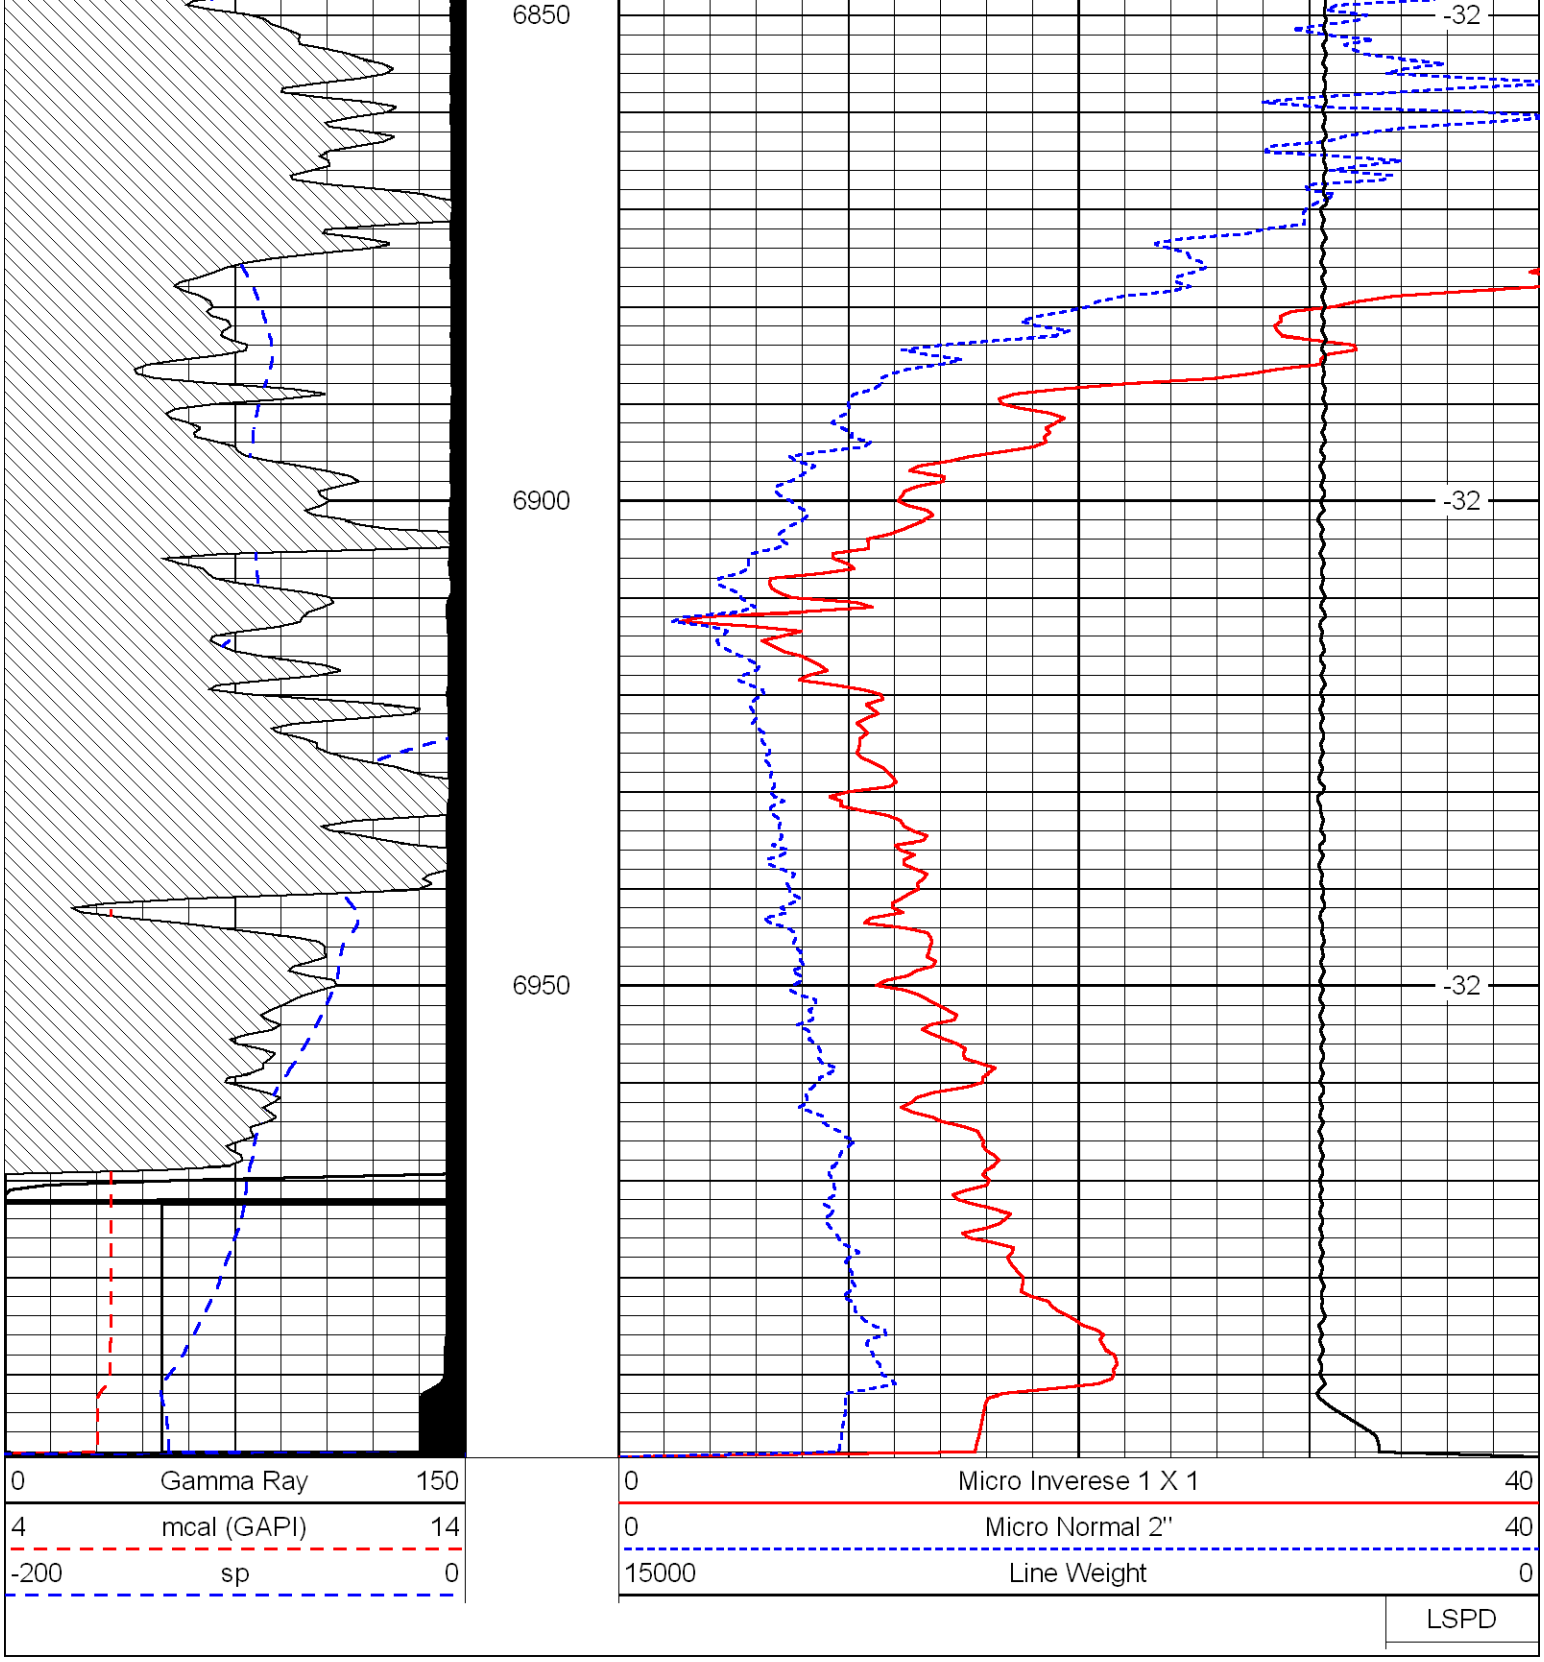

5800
5850
5900
5950
-32
-32
-33
-33


6000
-32
6050
-32
6100
-32
6150
-32


6200
6250
6300
6350
6400
-32
-31
-32
-32
-32


6450
6500
6550
6600
-32
-31
-31
-31


6650
6700
6750
6800
-31
-32
-32
-32


6850
6900
6950
-32
-32
-32
0
Gamma Ray
150
4
mcal (GAPI)
14
-200
sp
0
0
Micro Inverese 1 X 1
40
0
Micro Normal 2"
40
15000
Line Weight
0
LSPD