



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.	
15-101-22,259-00-00		Well Mcleish 'B' No. 3-24	
Field Wildcat		County Lane State Kansas	
Location 930' FSL & 638' FEL		Other Services CNL/CDL DIL	
Sec: 24 Twp: 18 S Rge: 27 W		Elevation	
Permanent Datum Ground Level		K.B. 2645	
Log Measured From Kelly Bushing		D.F. 2638	
Drilling Measured From Kelly Bushing		G.L. 2638	
Date	10/18/2010		
Run Number	Two		
Depth Driller	4660		
Depth Logger	4660		
Bottom Logged Interval	4659		
Top Log Interval	3600		
Casing Driller	8.625 @ 256		
Casing Logger	252		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	5200		
Density / Viscosity	9.4 51		
pH / Fluid Loss	10.0 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.30 @ 70		
Rmf @ Meas. Temp	0.98 @ 70		
Rmc @ Meas. Temp	1.76 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.74 @ 123		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	123		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton, Ks; 12 E;
South Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

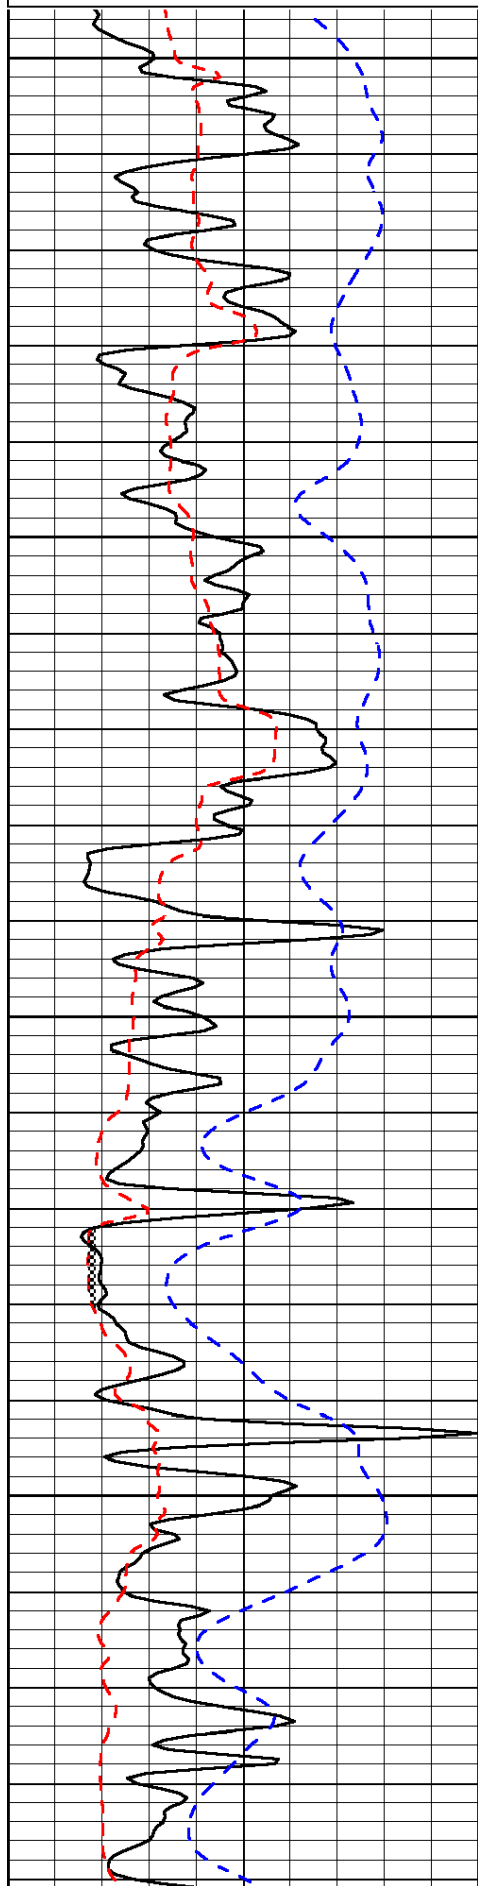


3600

3650

3700

3750


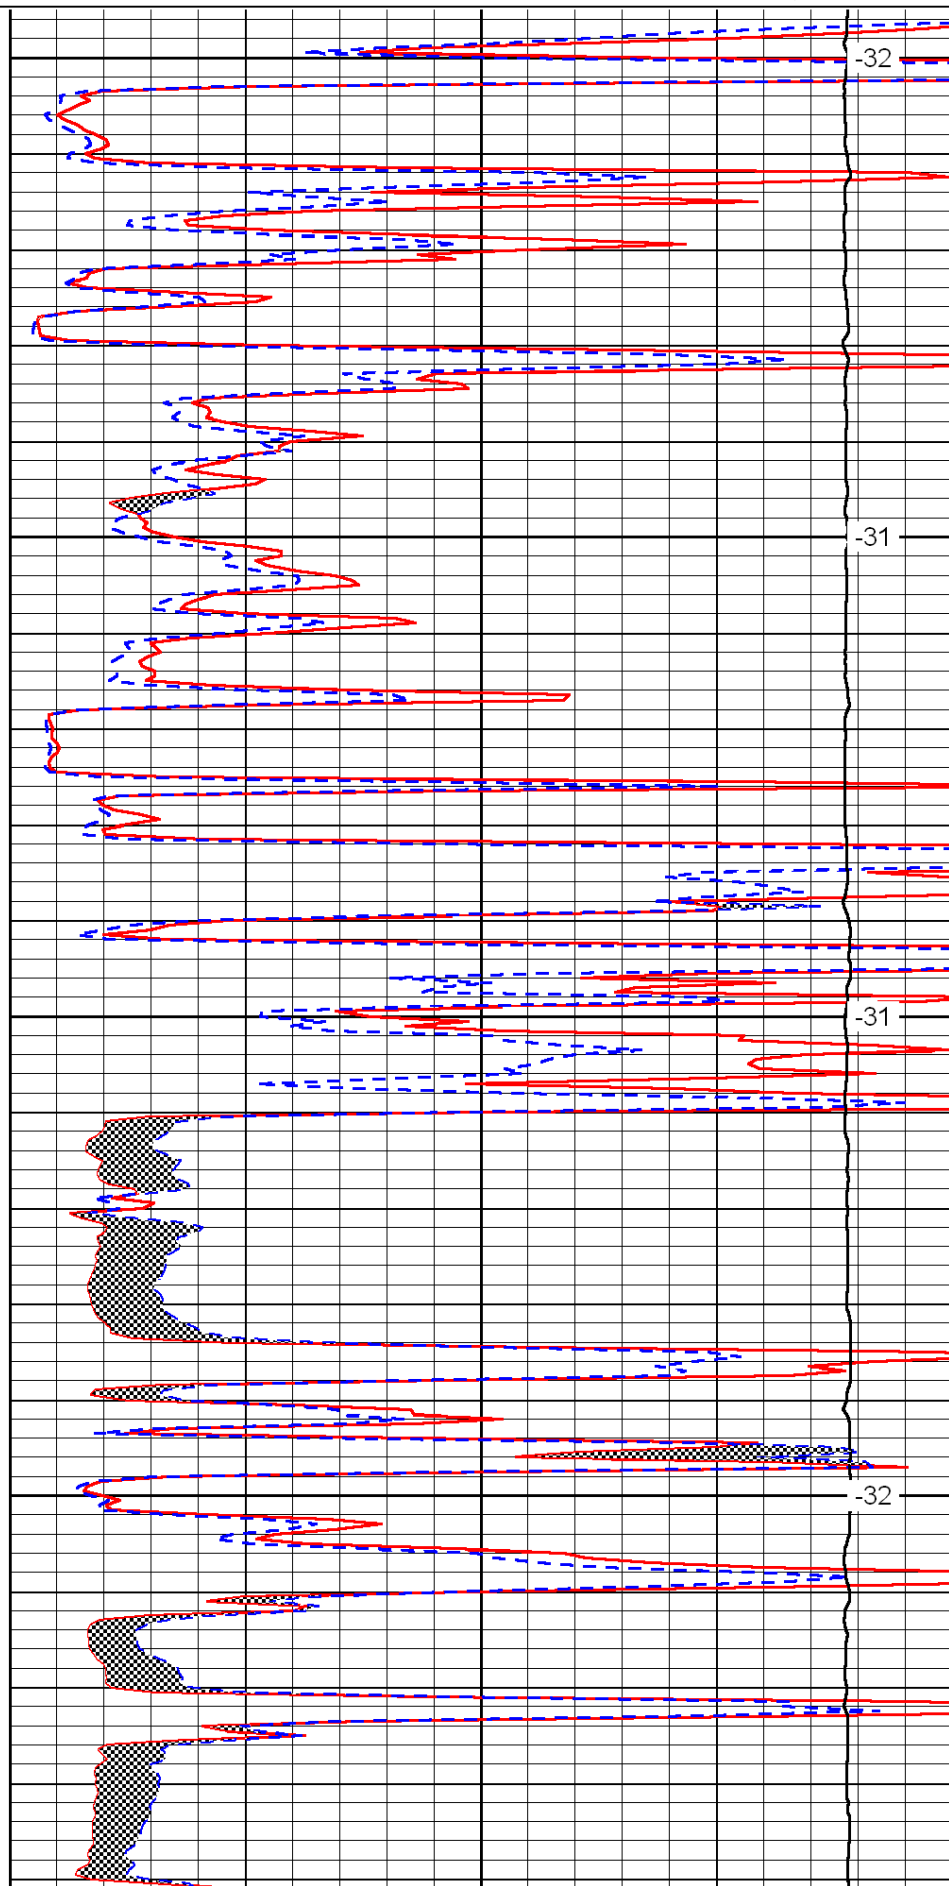



-32

-31

-31

-32

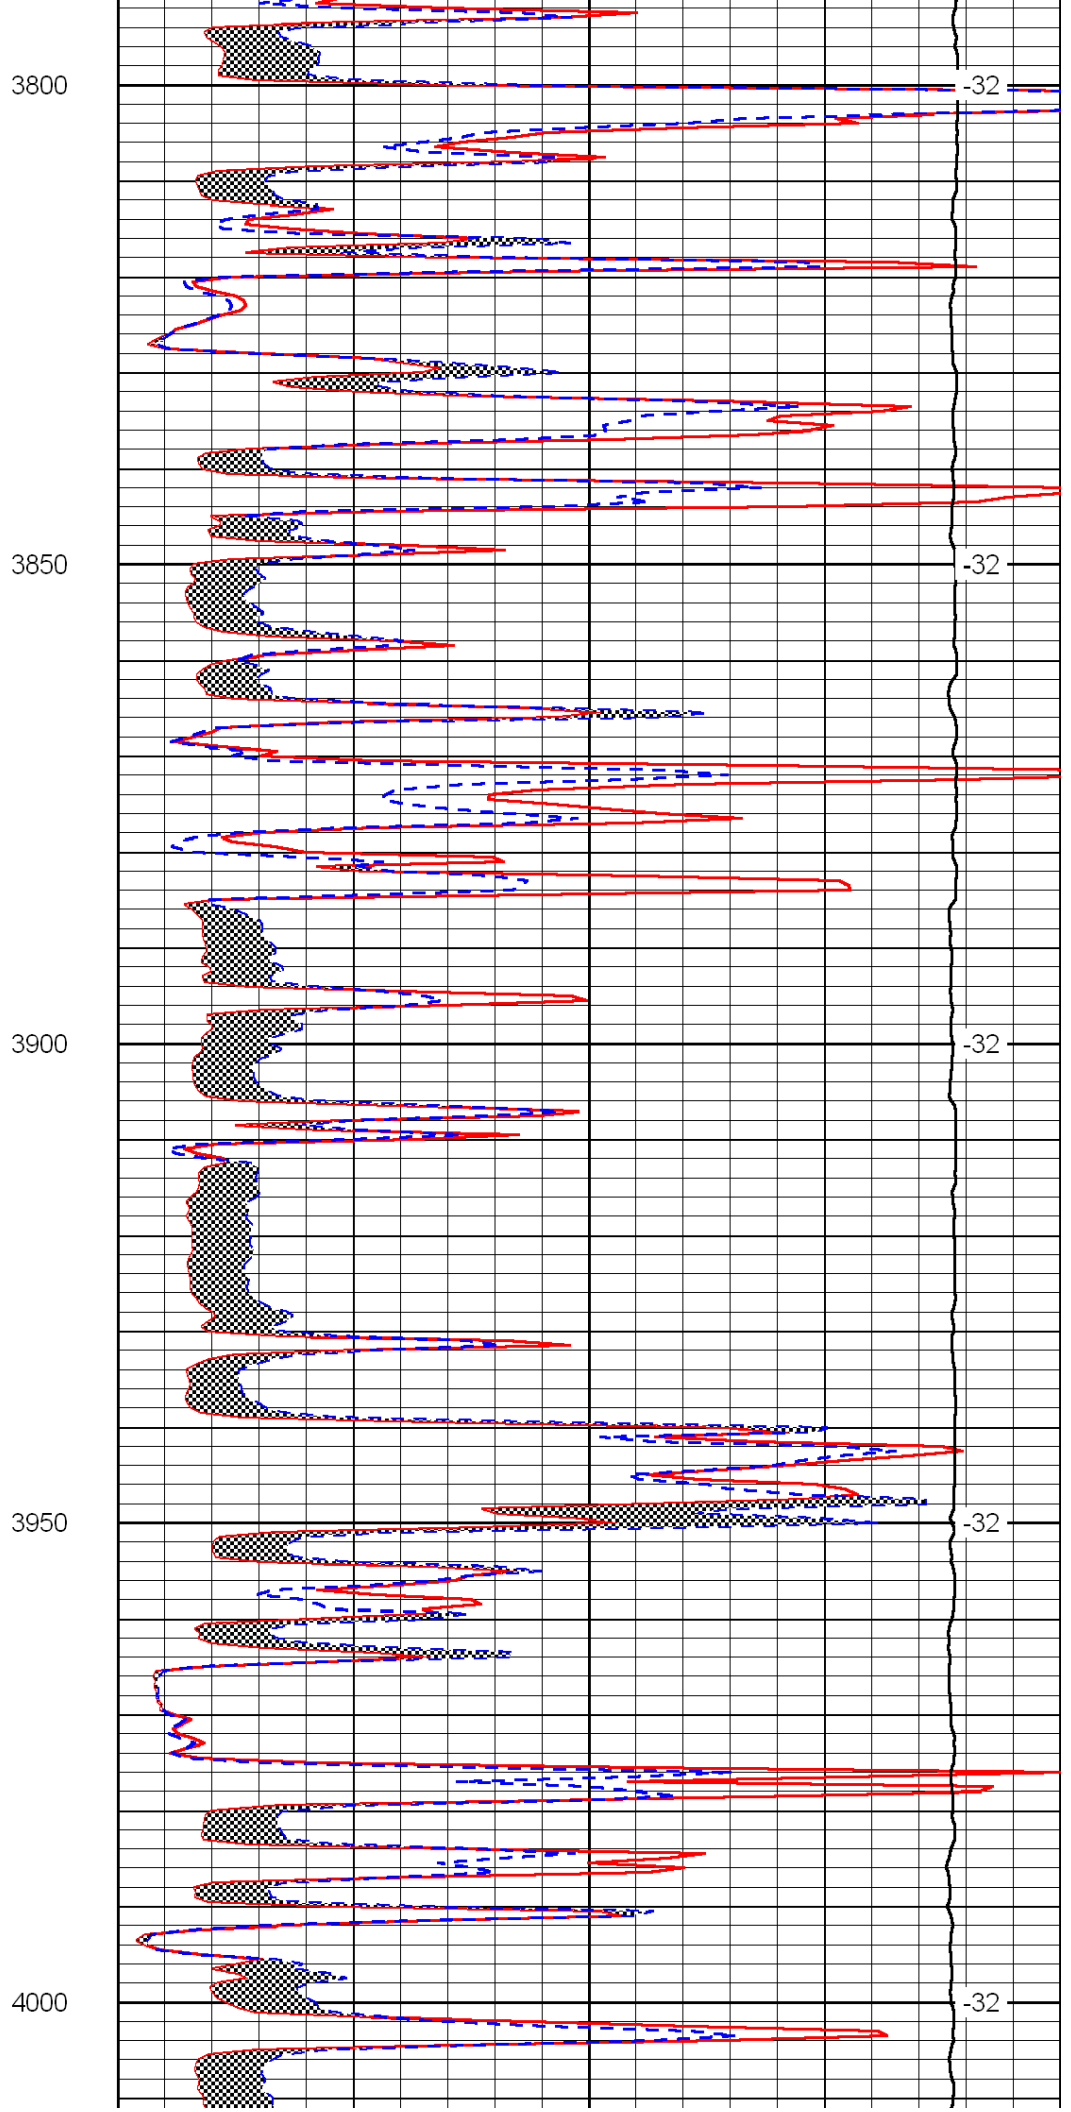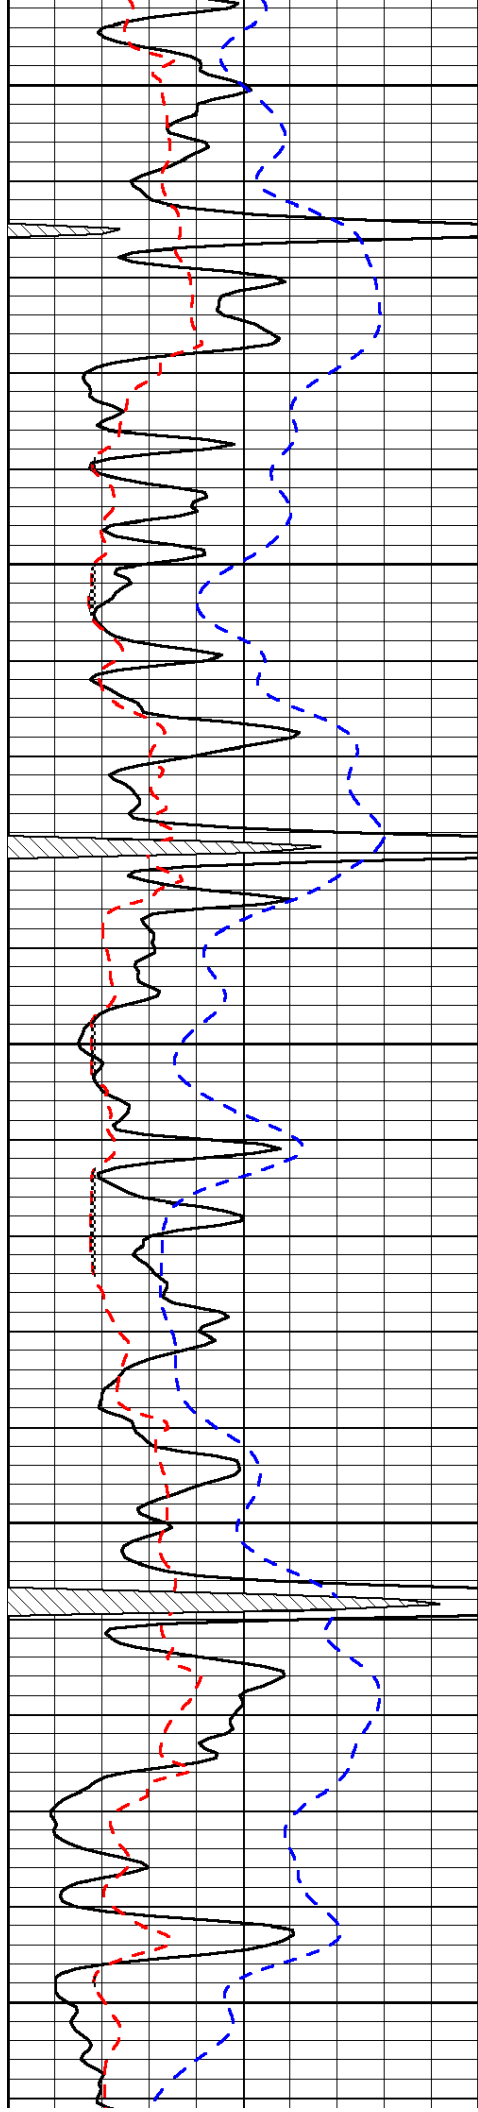

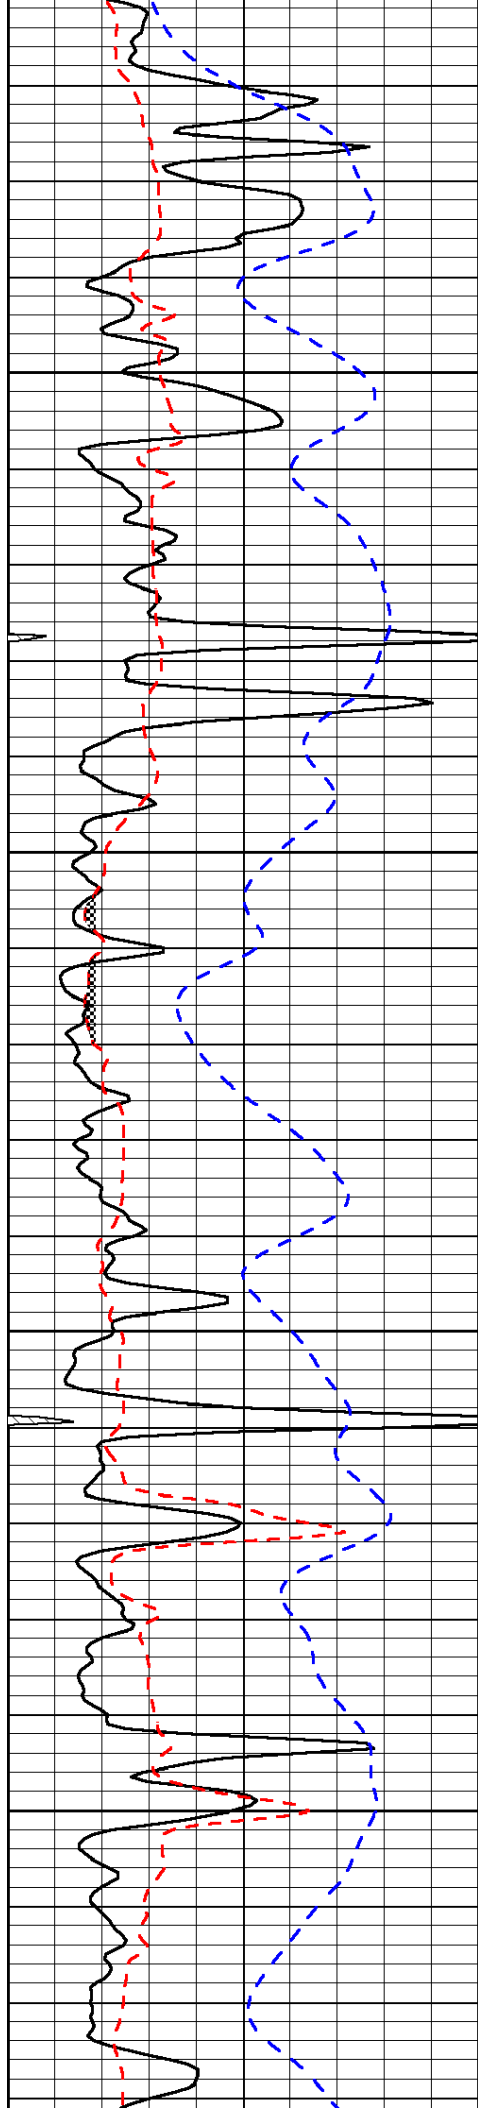


4050

4100

4150

4200

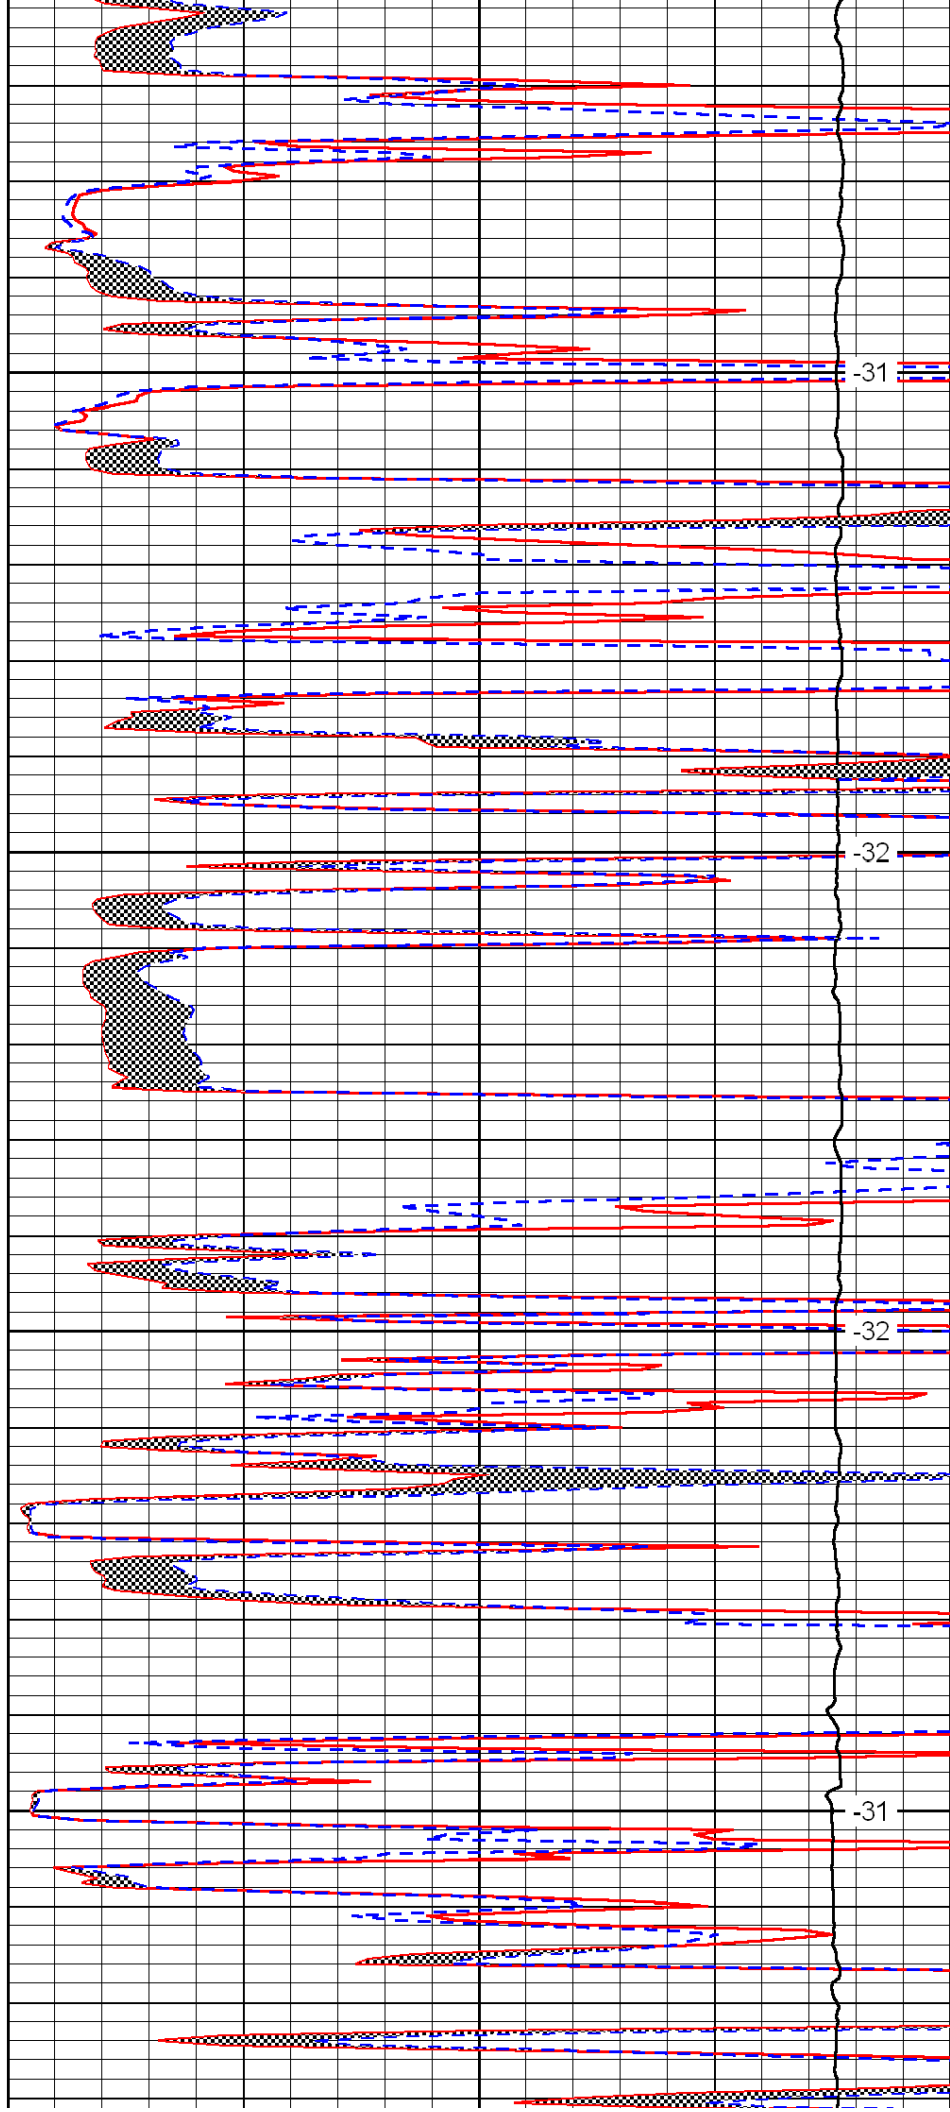


-31

-32

-32

-31

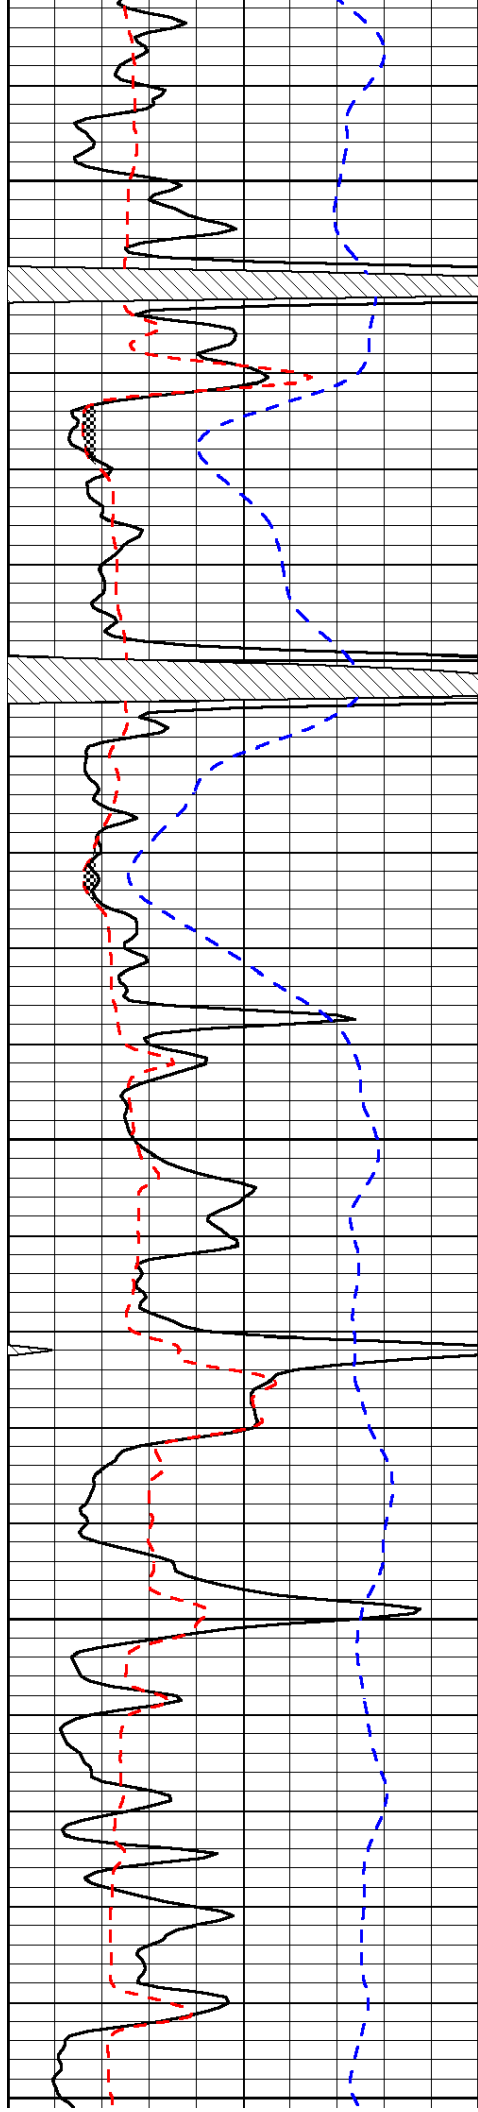


4250

4300

4350

4400

4450

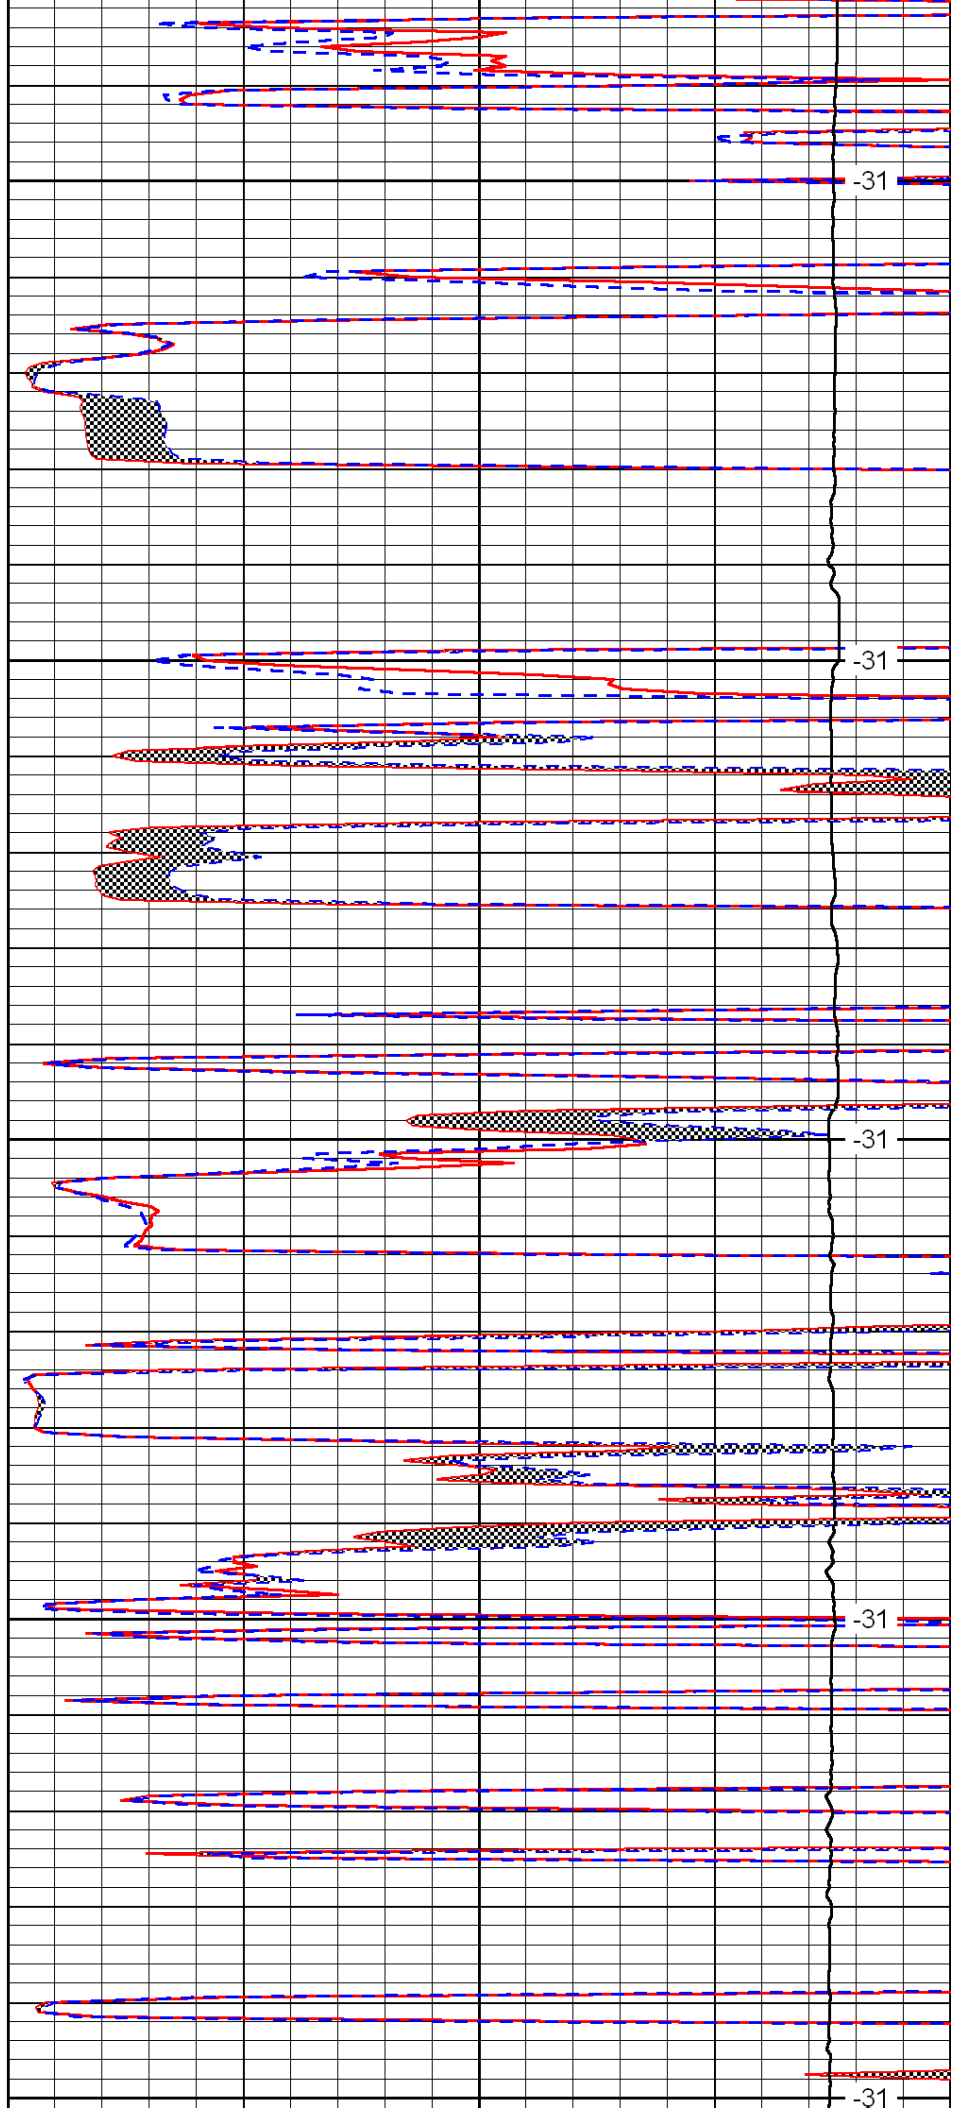



-31

-31

-31

-31

-31

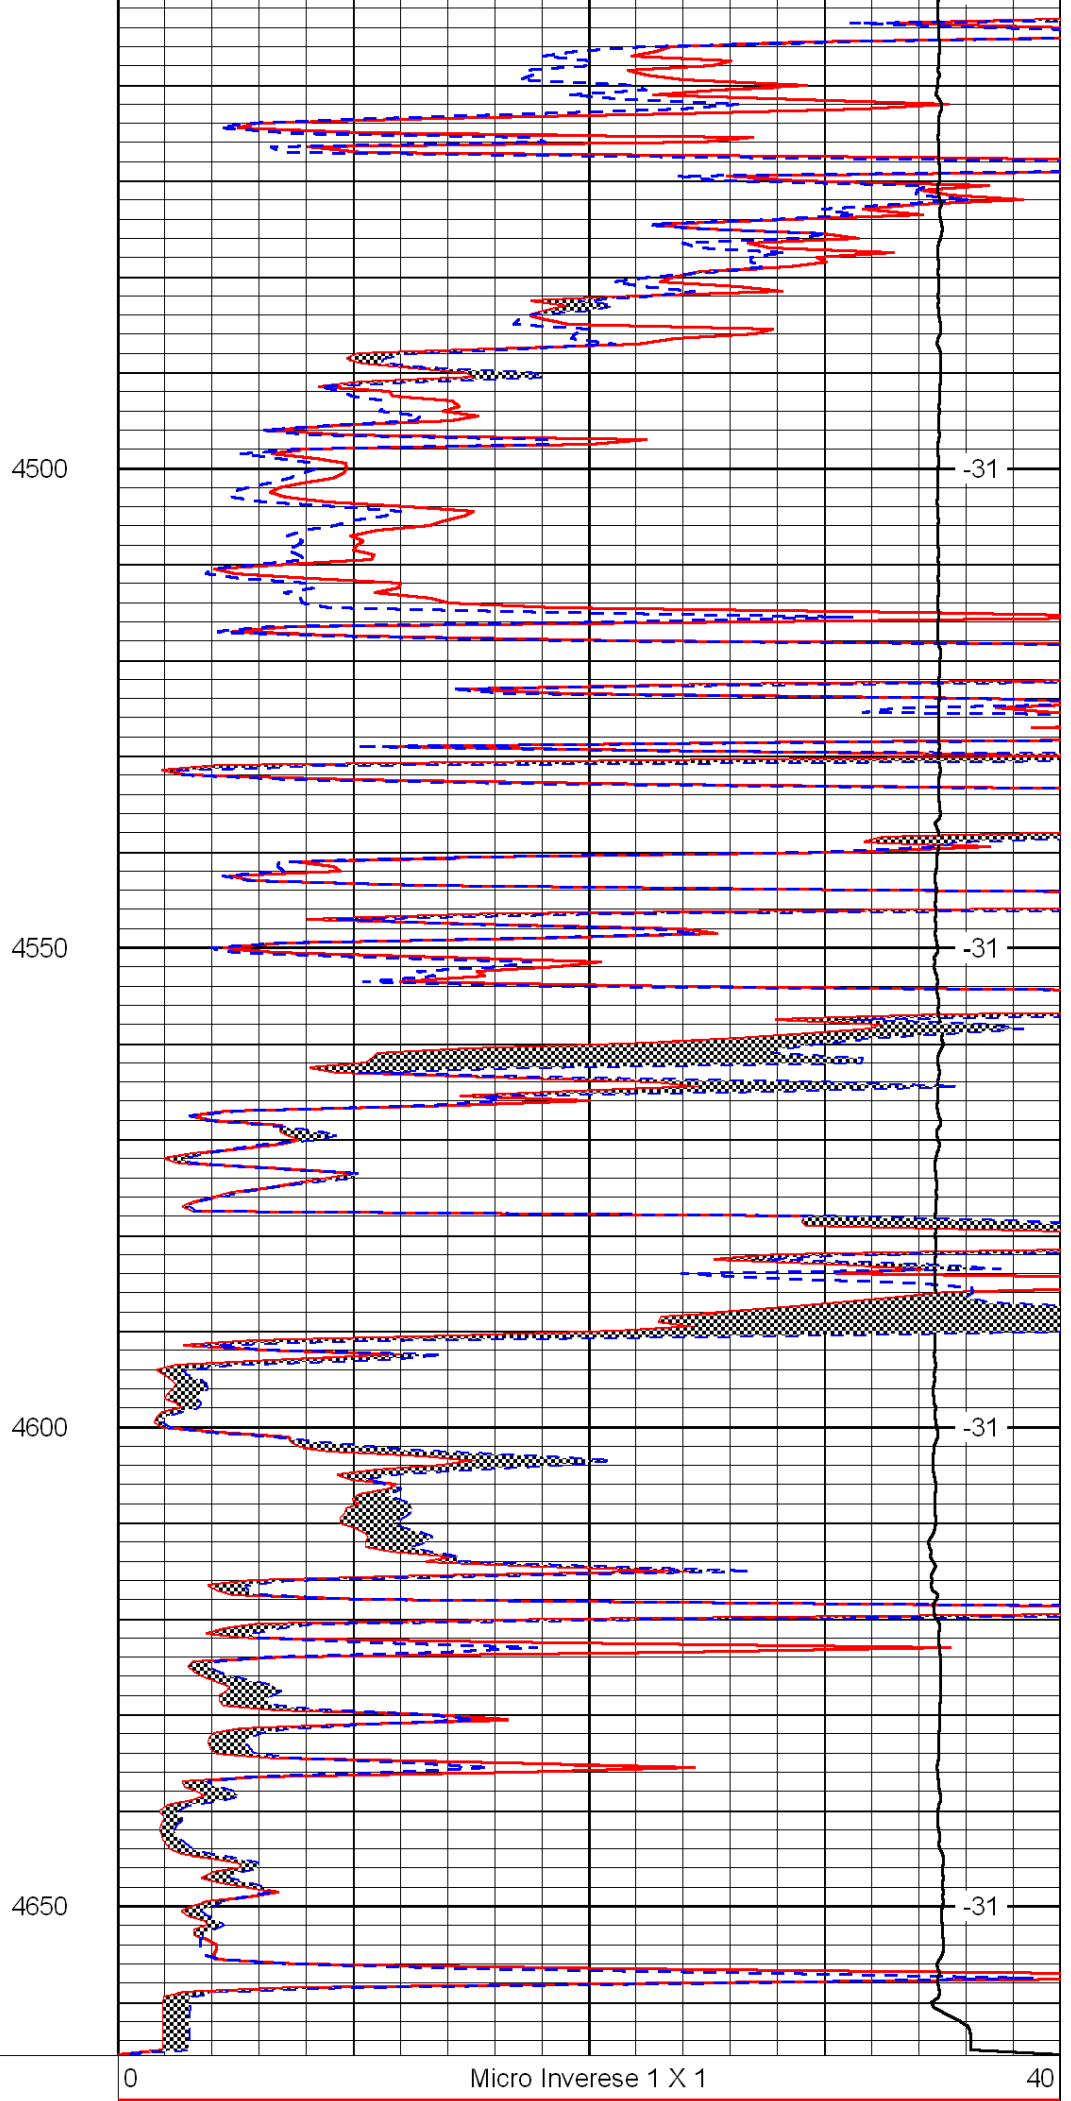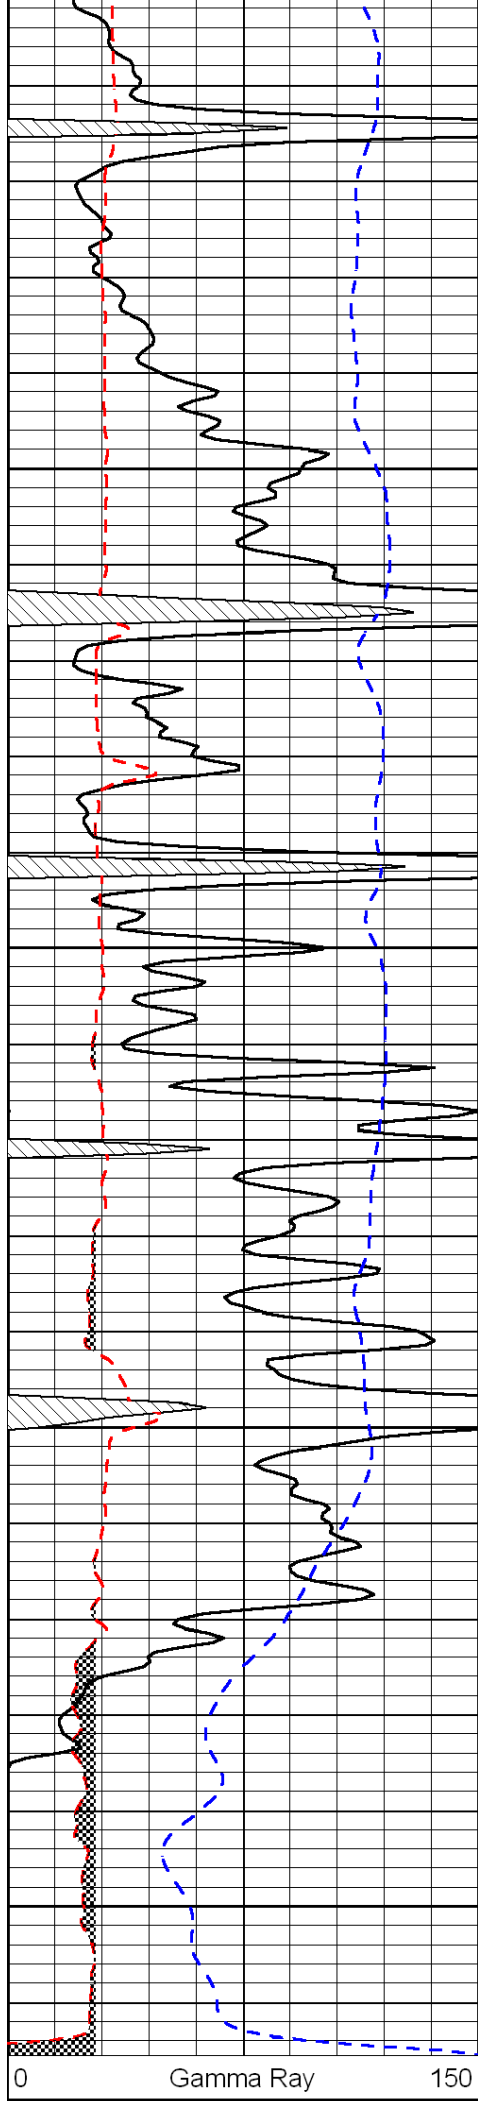

6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Normal 2"	40
15000	Line Weight	0
		LSPD