



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Berexco LLC		
	Well Saturin Unit No. 1		
	Field Toulon		
	County Ellis	State	Kansas
15-051-26038-00-00	Location	E2 W2 E2 2640' FSL & 1650' FEL	
	Sec: 9	Twp: 14S	Rge: 17W
	Permanent Datum Ground Level		Elevation 2023
	Log Measured From Kelly Bushing	11 Ft. Above Perm. Datum	K.B. 2034
	Drilling Measured From Kelly Bushing		D.F. 2023
Date	10/20/2010		
Run Number	Two		
Depth Driller	3656		
Depth Logger	3656		
Bottom Logged Interval	3655		
Top Log Interval	2700		
Casing Driller	8.625 @ 1146		
Casing Logger	1145		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	6500		
Density / Viscosity	9.1 52		
pH / Fluid Loss	9.0 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.48 @ 74		
Rmf @ Meas. Temp	.36 @ 74		
Rmc @ Meas. Temp	.65 @ 74		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.32 @ 113		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	113		
Equipment Number	10		
Location	Hays		
Recorded By	R. Barnhart		
Witnessed By	Bryan Bynog		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Toulon and Old 40,
2E, 1/4N, W into

Database File: c:\warrior\data\berexco_saturin unit no. 1\berexco.db
Dataset Pathname: rag/berexrag
Presentation Format: micro
Dataset Creation: Wed Oct 20 22:05:24 2010
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

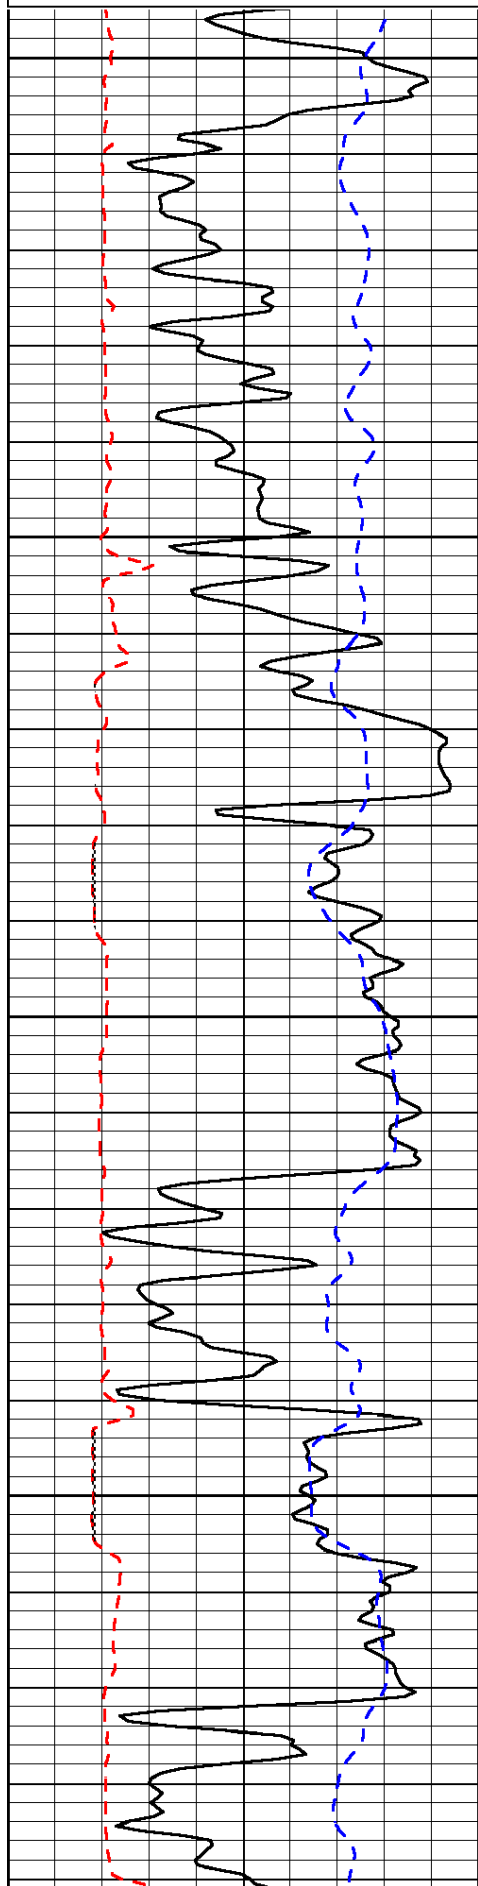


2700

2750

2800

2850

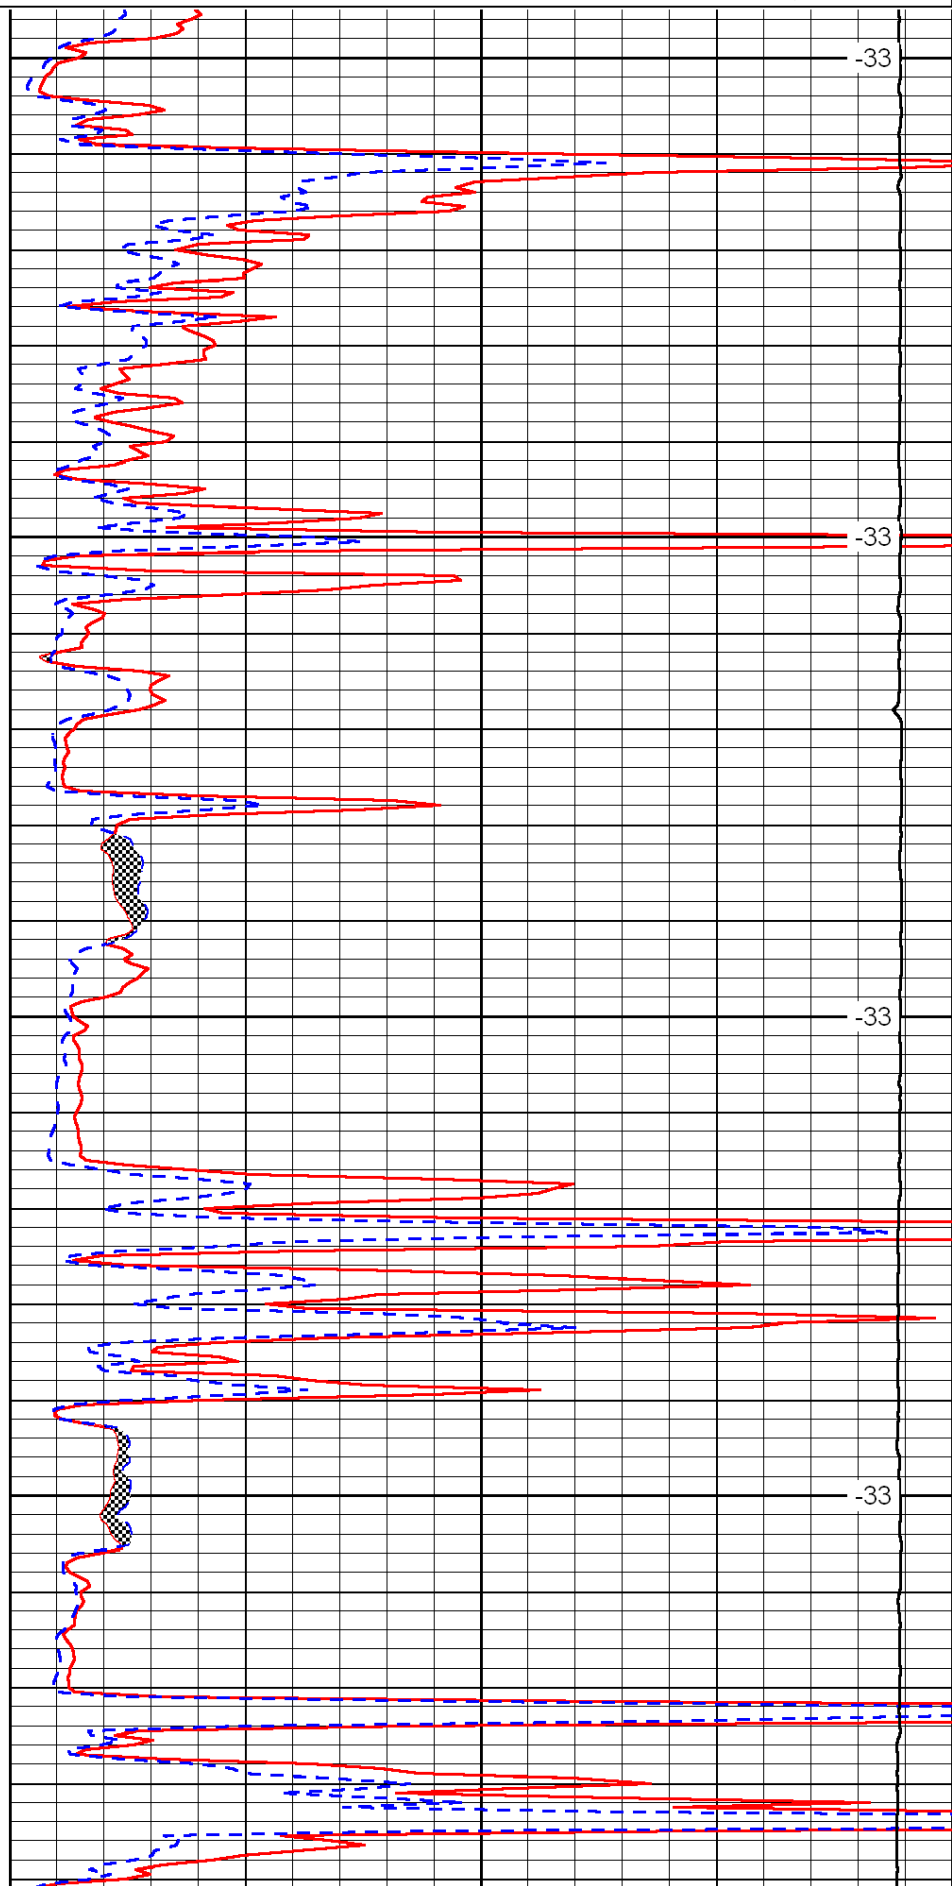


-33

-33

-33

-33

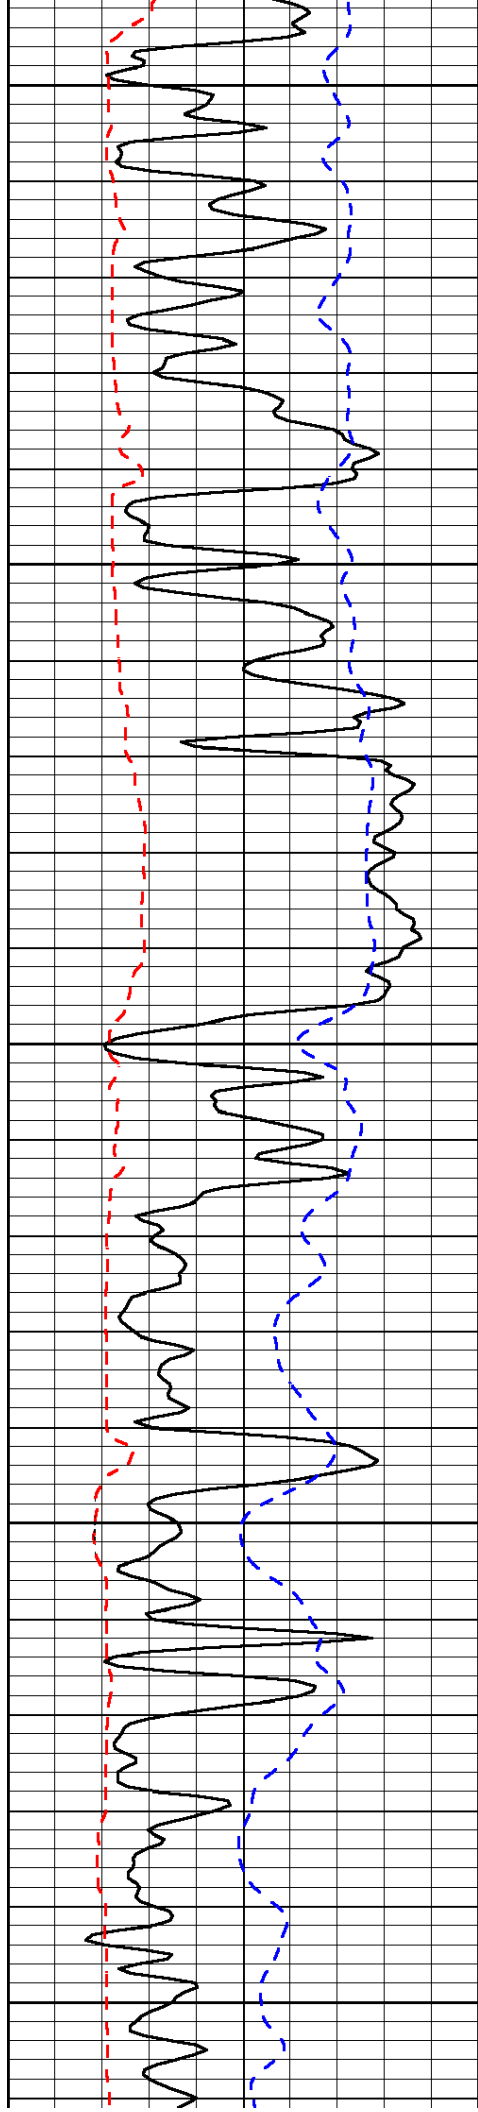


2900


2950

3000

3050

3100

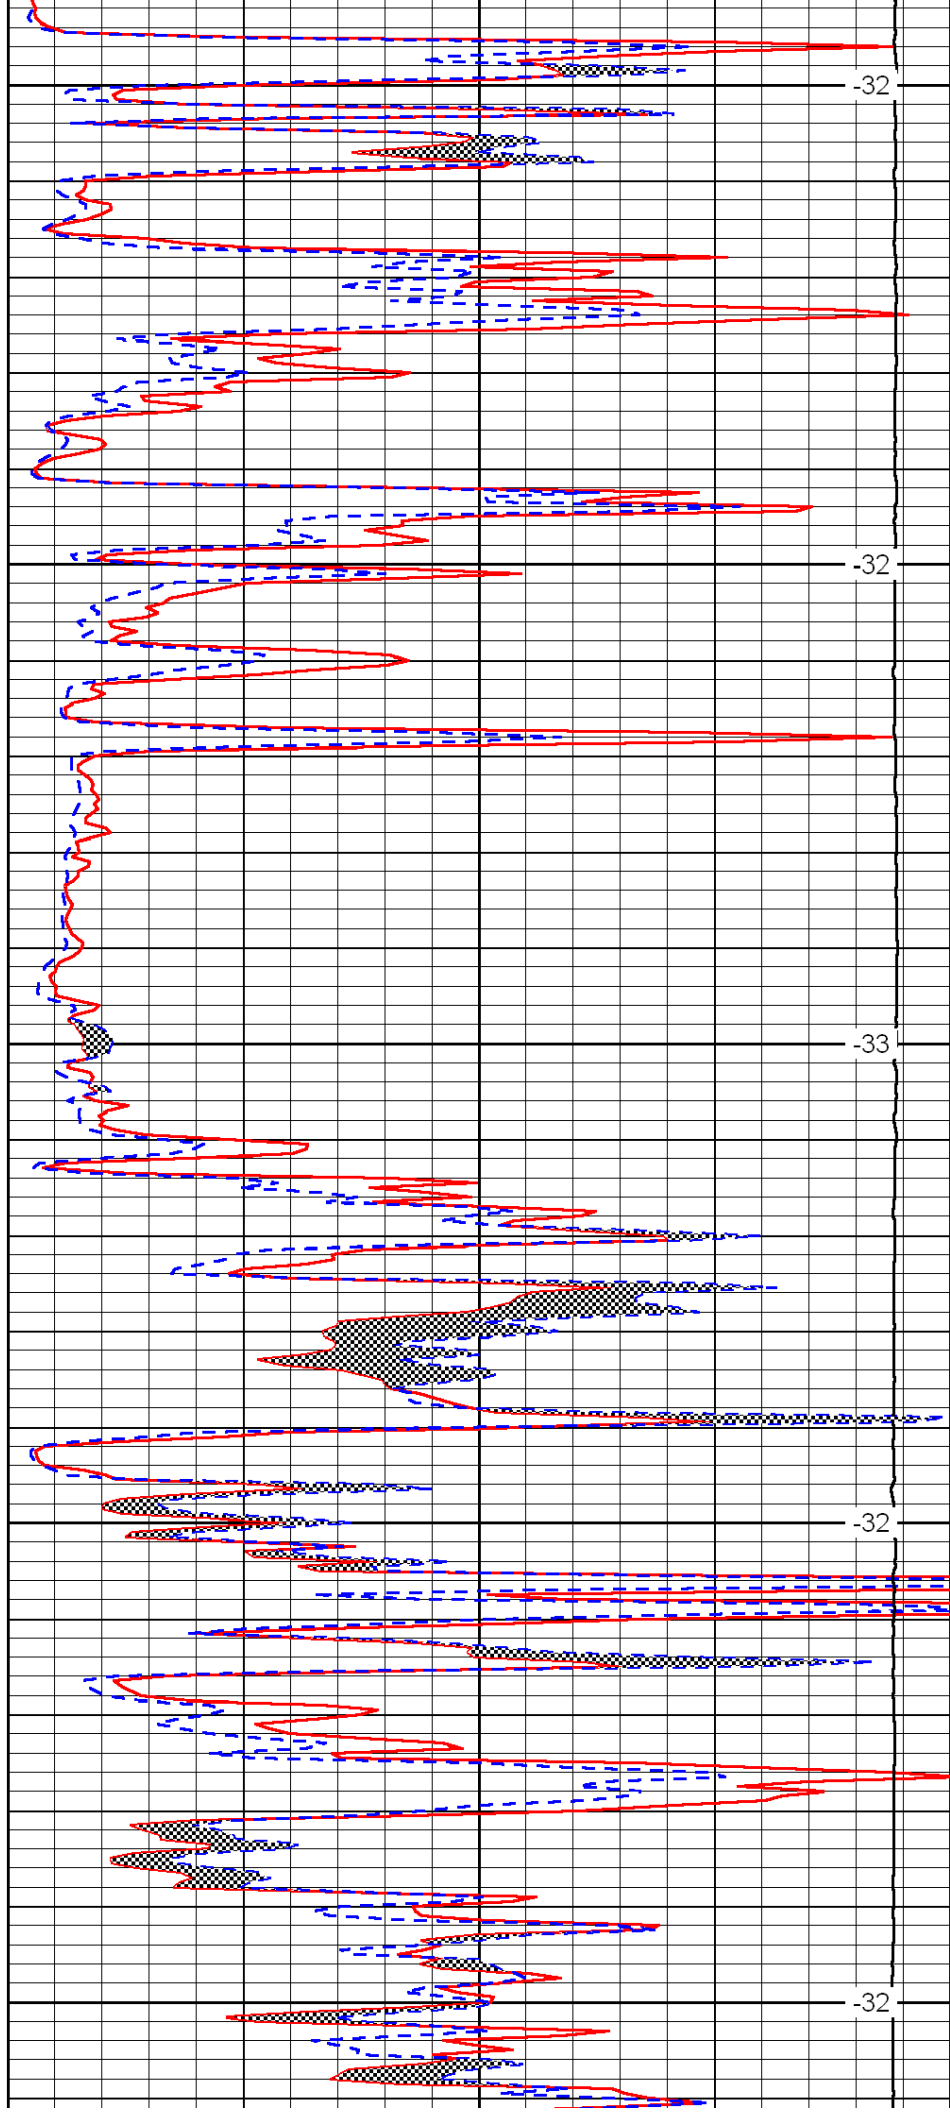

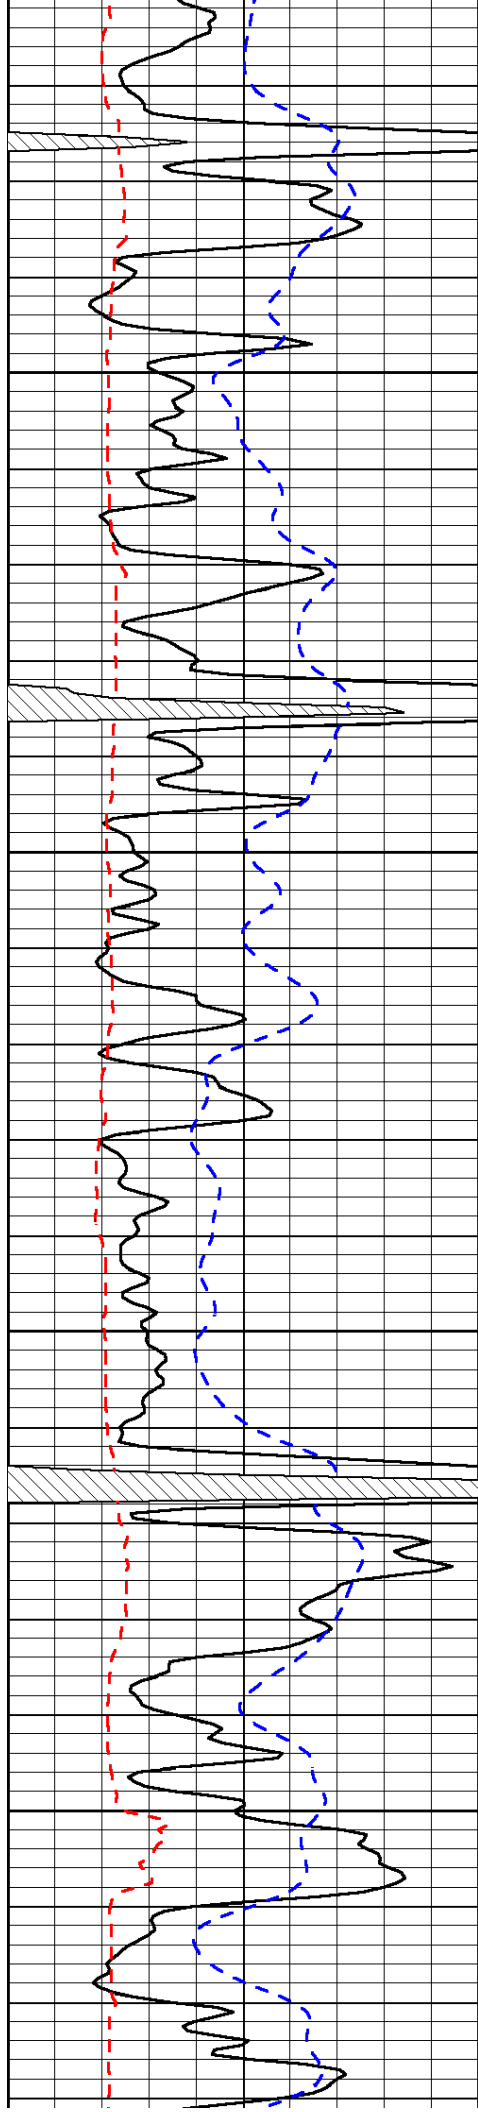



3150

3200

3250

3300

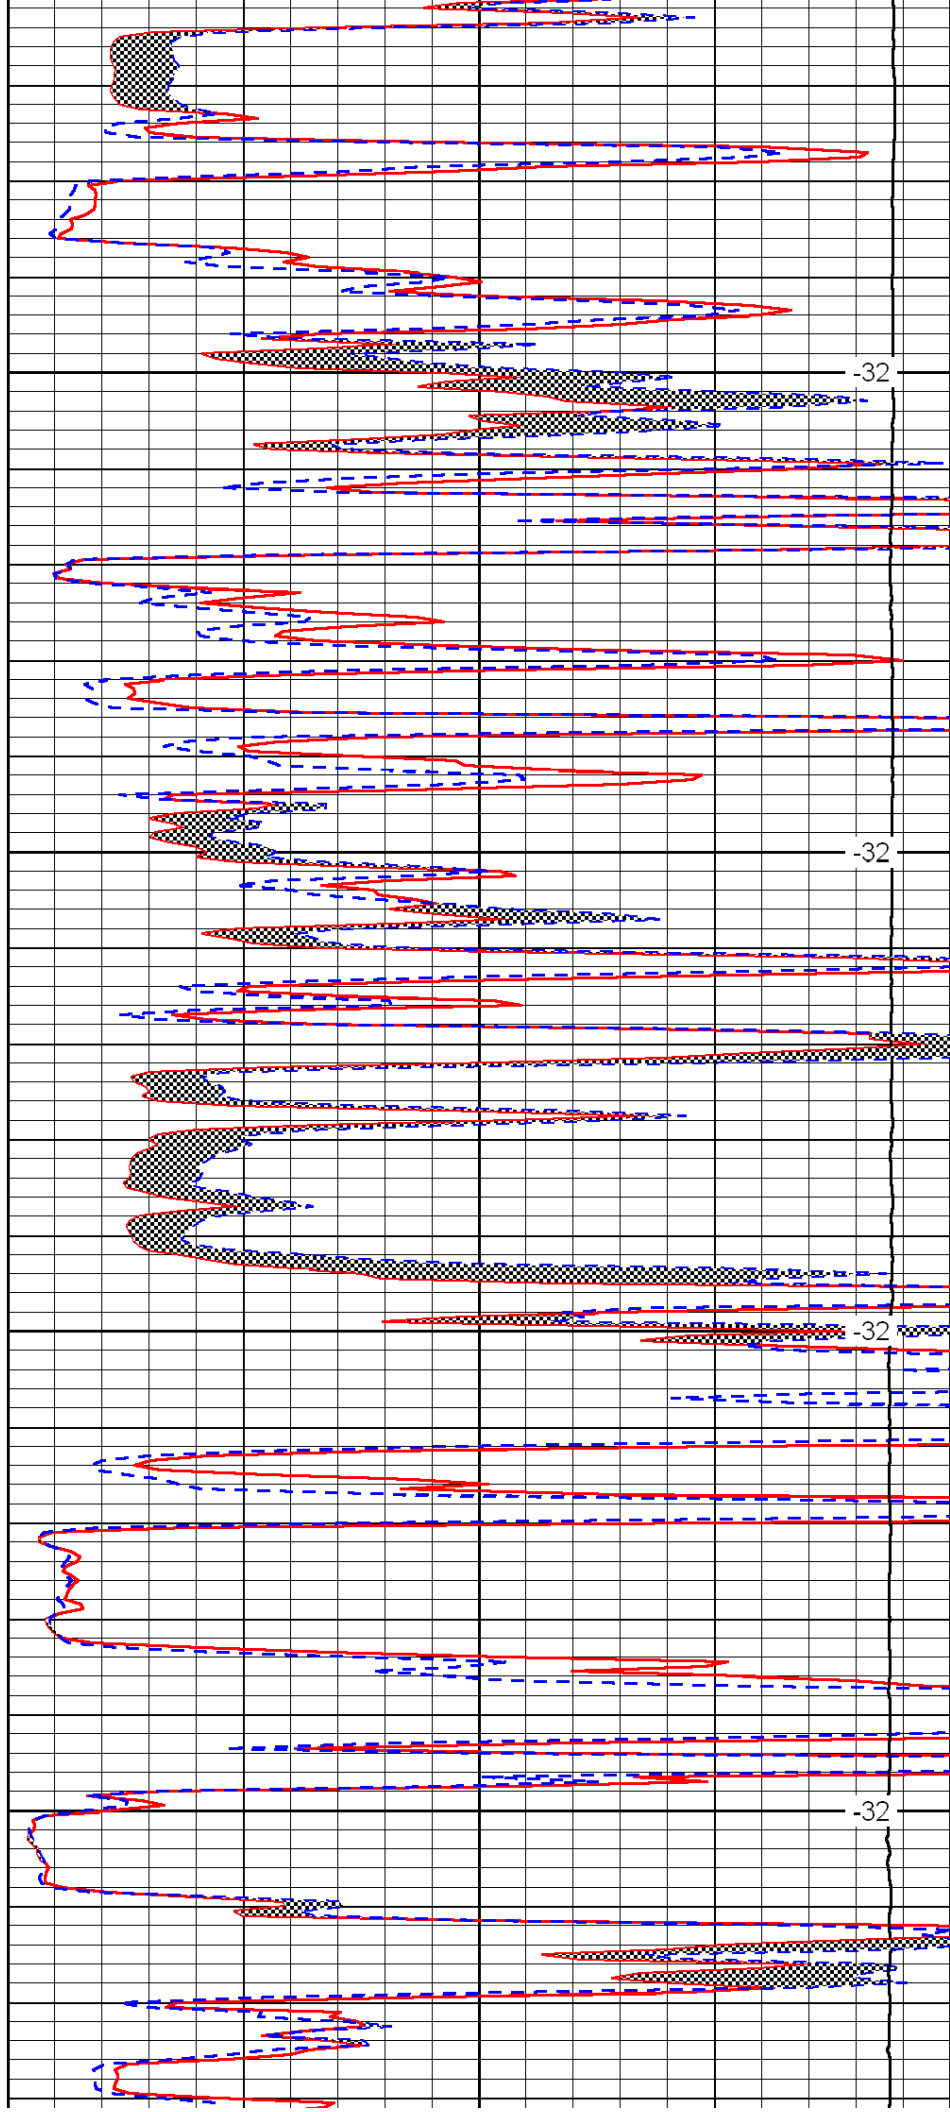

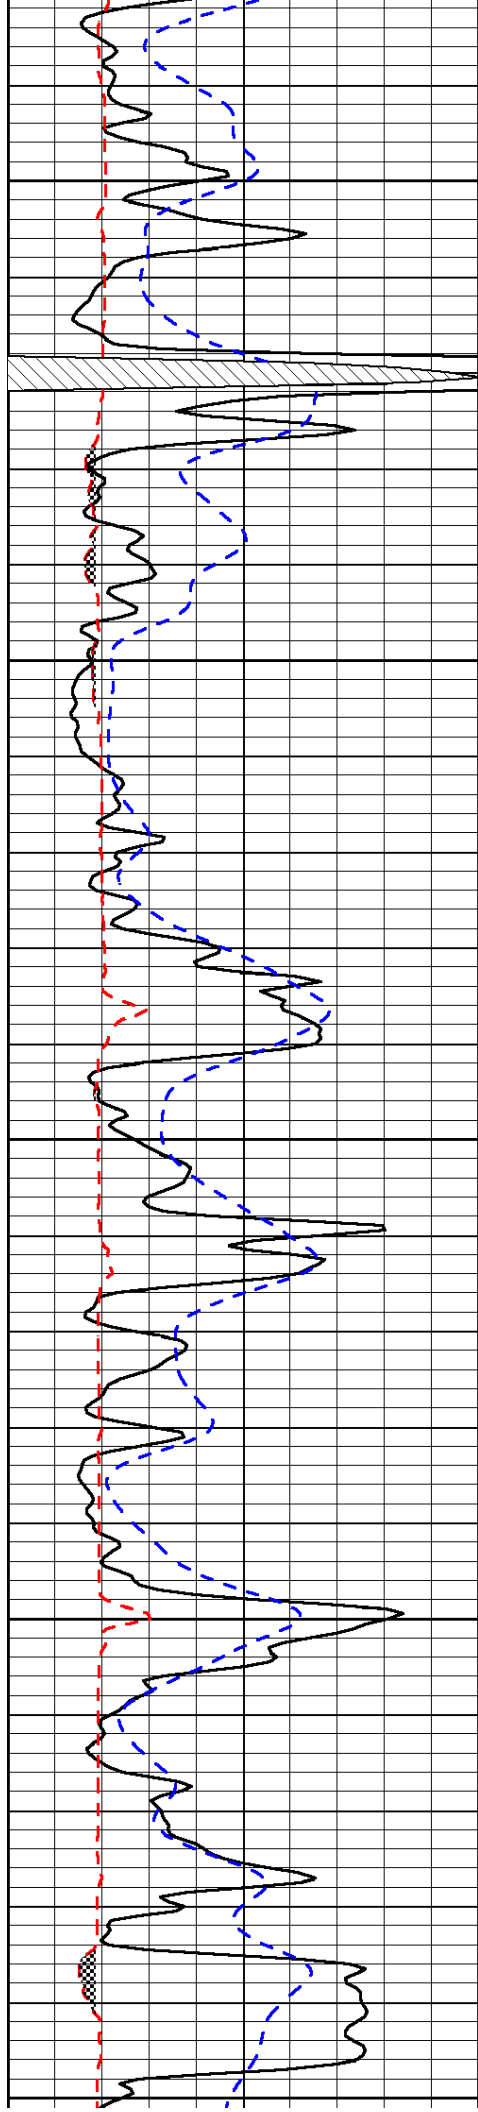


3350

3400

3450

3500

3550

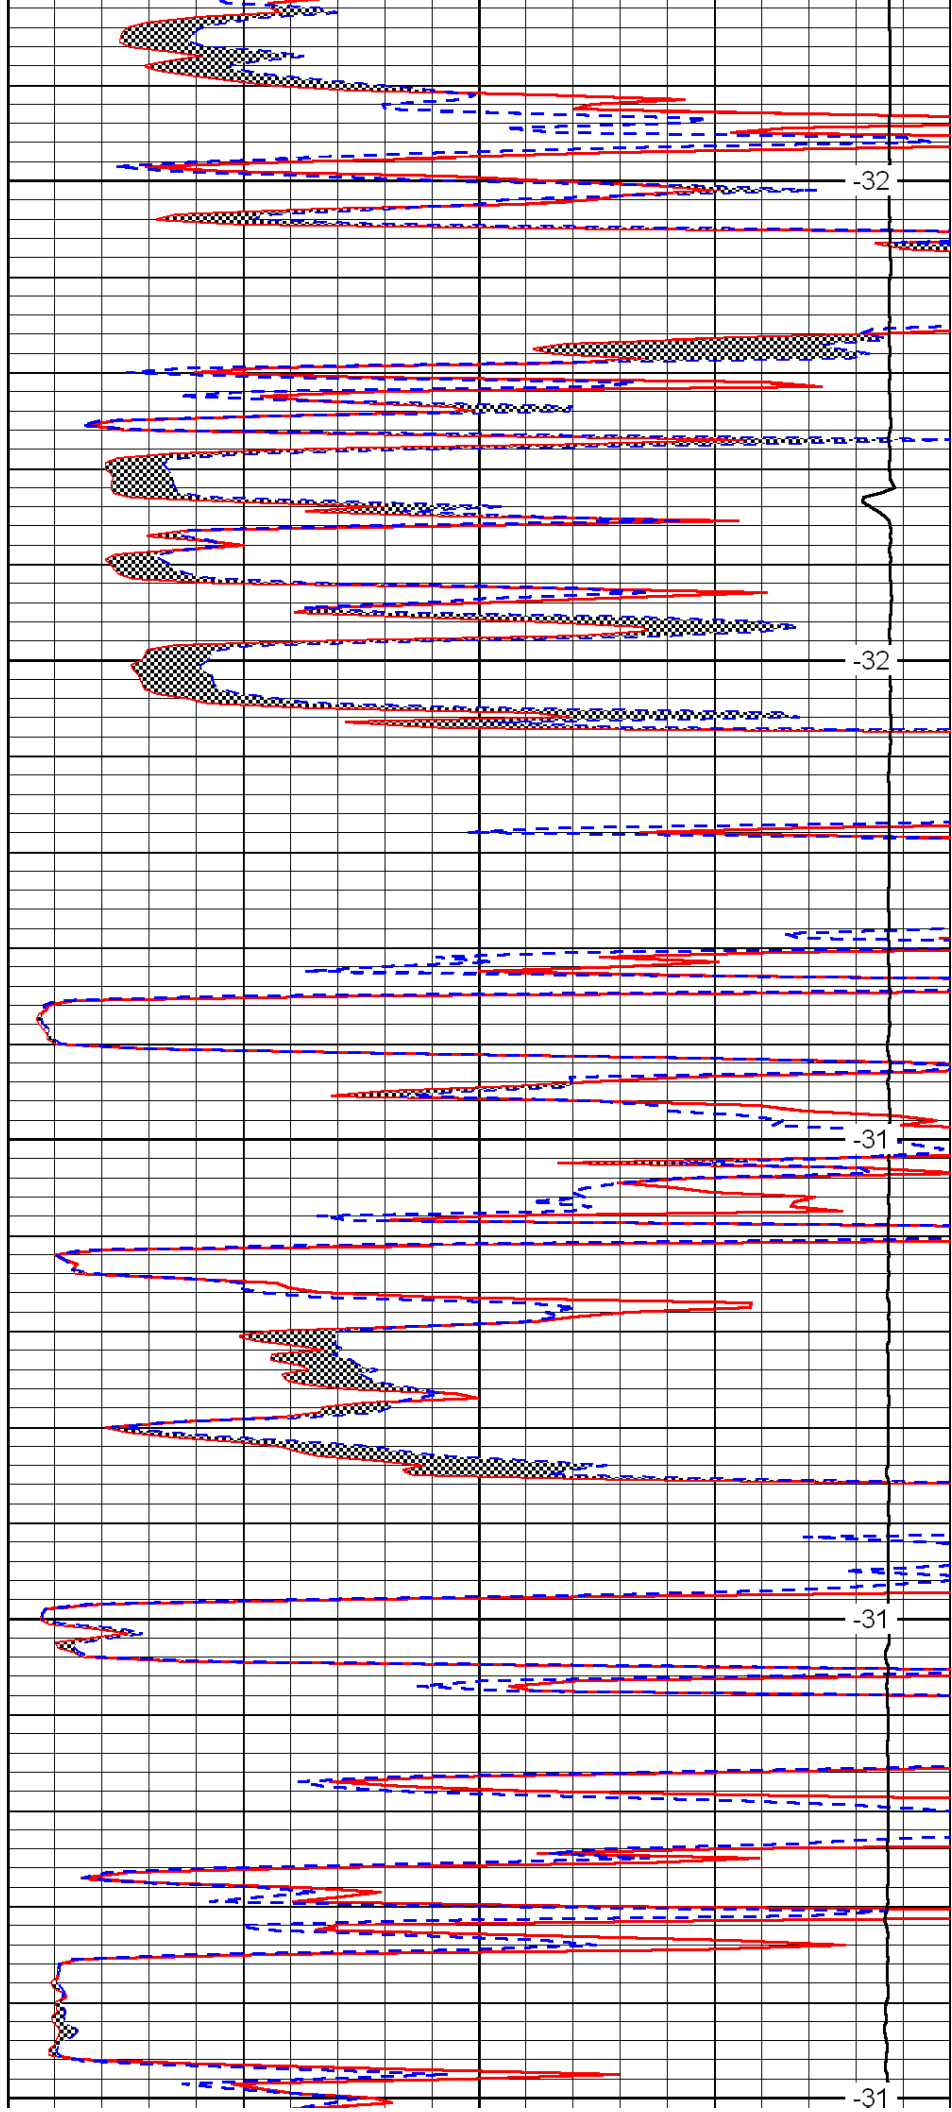


-32

-32

-31


-31

-31

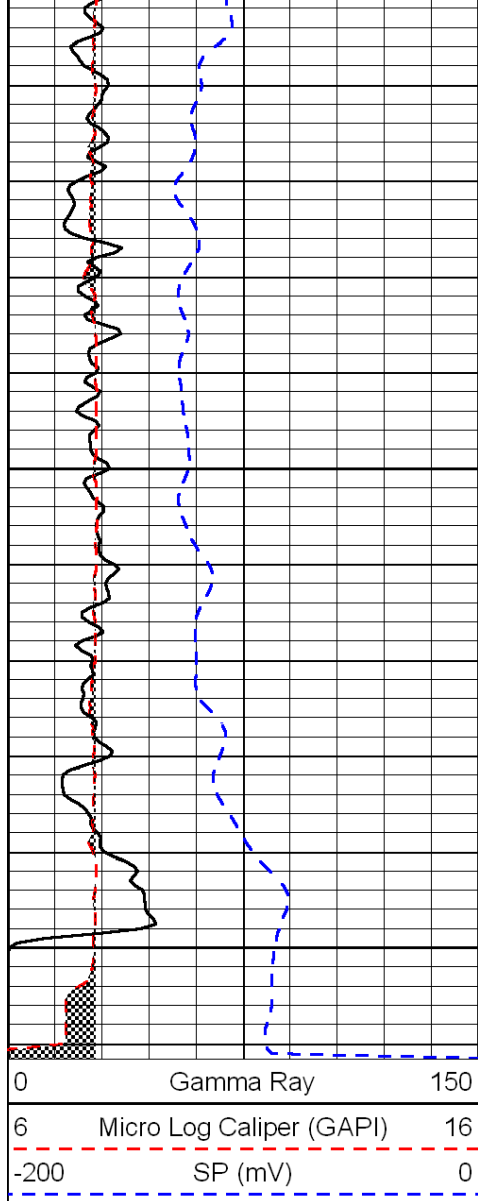

3600

3650

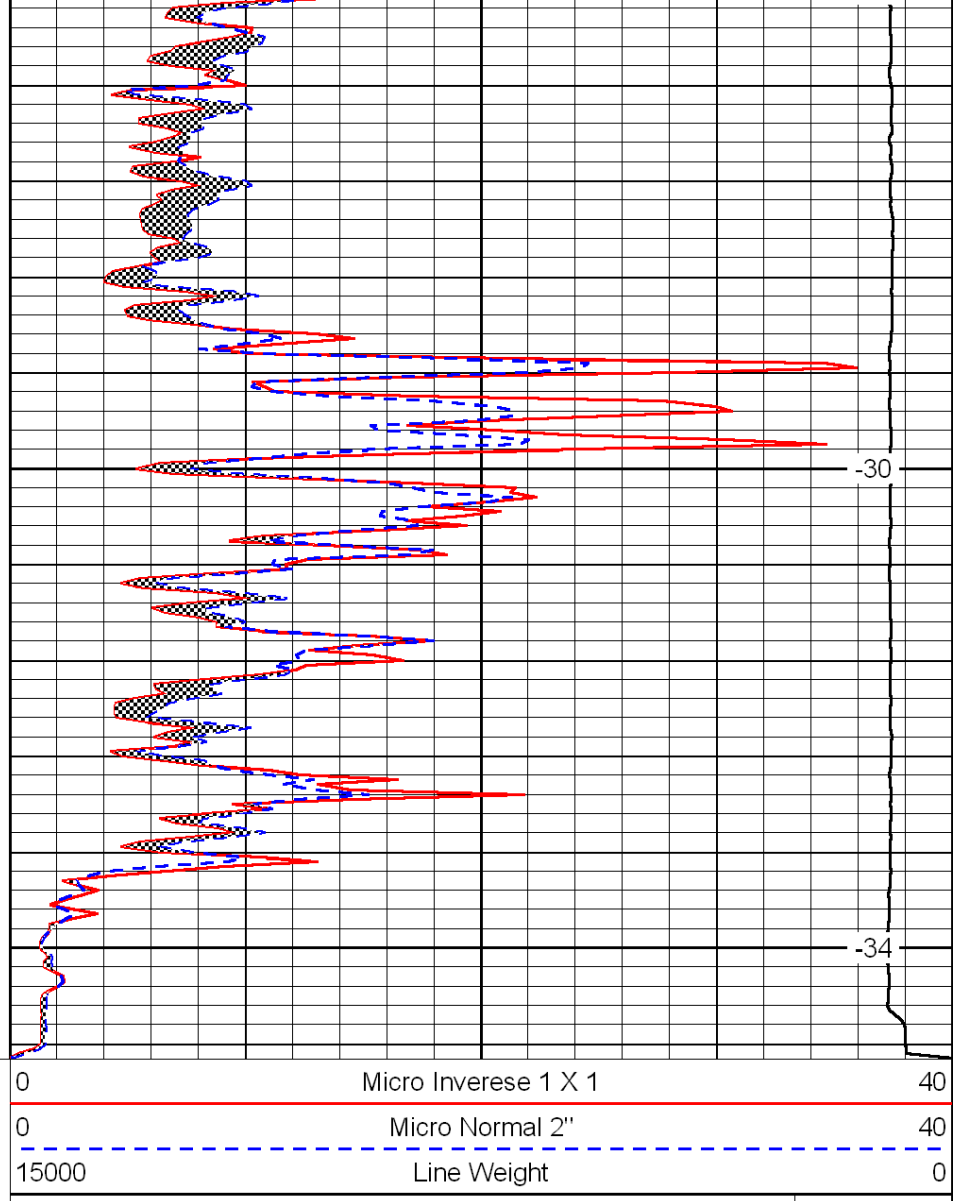

-30

-34

LSPD