



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Kaiser-Francis Oil Company			
		Well Friess No 1			
		Field Conway West			
		County Sumner	State	Kansas	
15-191-22,584-00-00		Location 2310' FSL & 1980' FWL		Other Services CNL/CDL DIL/BHCS	
Permanent Datum		Ground Level	Elevation 1355	Elevation	
Log Measured From		Kelly Bushing	9 Ft. Above Perm. Datum	K.B. 1364	
Drilling Measured From		Kelly Bushing		D.F. 1355	
Date		09/21/2010			
Run Number		Two			
Depth Driller		4420			
Depth Logger		4423			
Bottom Logged Interval		4422			
Top Log Interval		2000			
Casing Driller		8.625 @ 252			
Casing Logger		262			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity,ppm CL		7,300			
Density / Viscosity		9.0	44		
pH / Fluid Loss		9.0	12.8		
Source of Sample		Flowline			
Rm @ Meas. Temp		.8 @ 84			
Rmf @ Meas. Temp		.60 @ 84			
Rmc @ Meas. Temp		1.08 @ 84			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.55 @ 122			
Operating Rig Time		5 Hours			
Max Rec. Temp. F		122			
Equipment Number		17			
Location		Hays			
Recorded By		Mike Garrison			
Witnessed By		Tim Priest			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Conway Springs, 1/2 North to 100th Rd, 1 1/2 West, North Into


Database File: c:\warrior\data\kaiser francis_friess no 1\kaiserhd.db
Dataset Pathname: dil/kaistck
Presentation Format: micro
Dataset Creation: Tue Sep 21 17:43:45 2010
Charted by: Depth in Feet scaled 1:240



Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

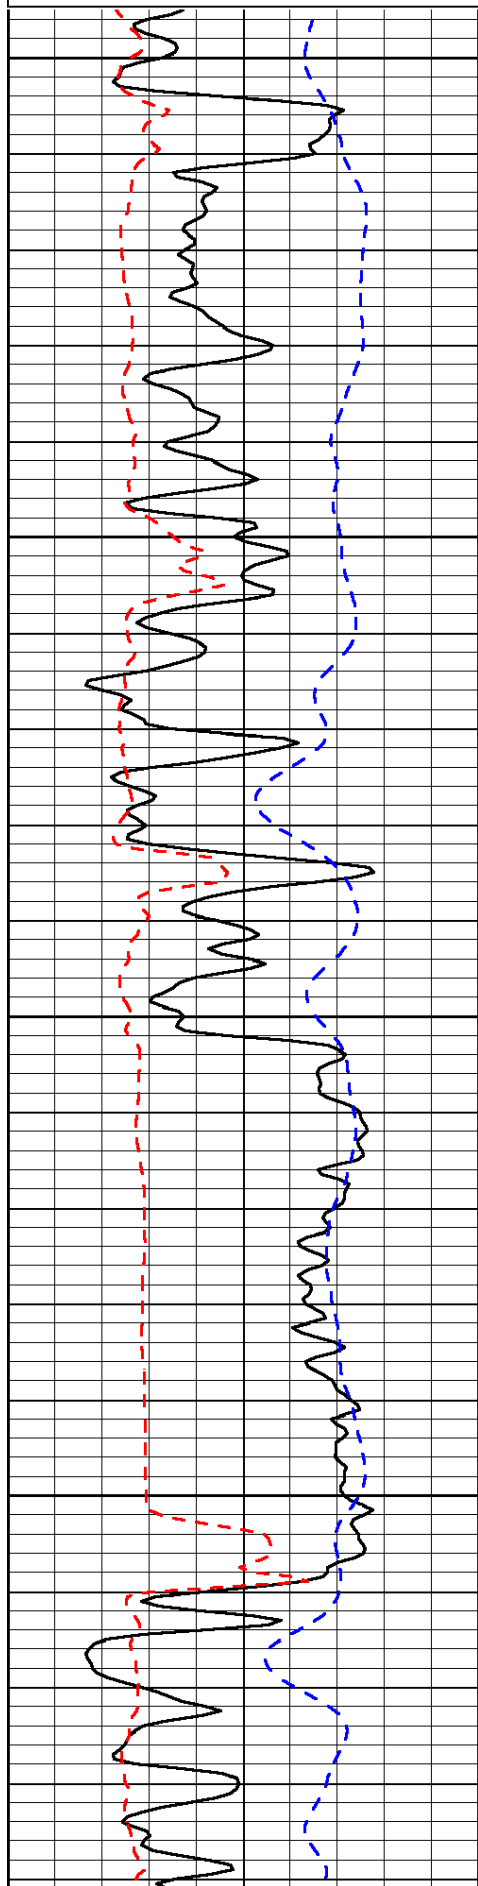


2000
2050
2100
2150

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

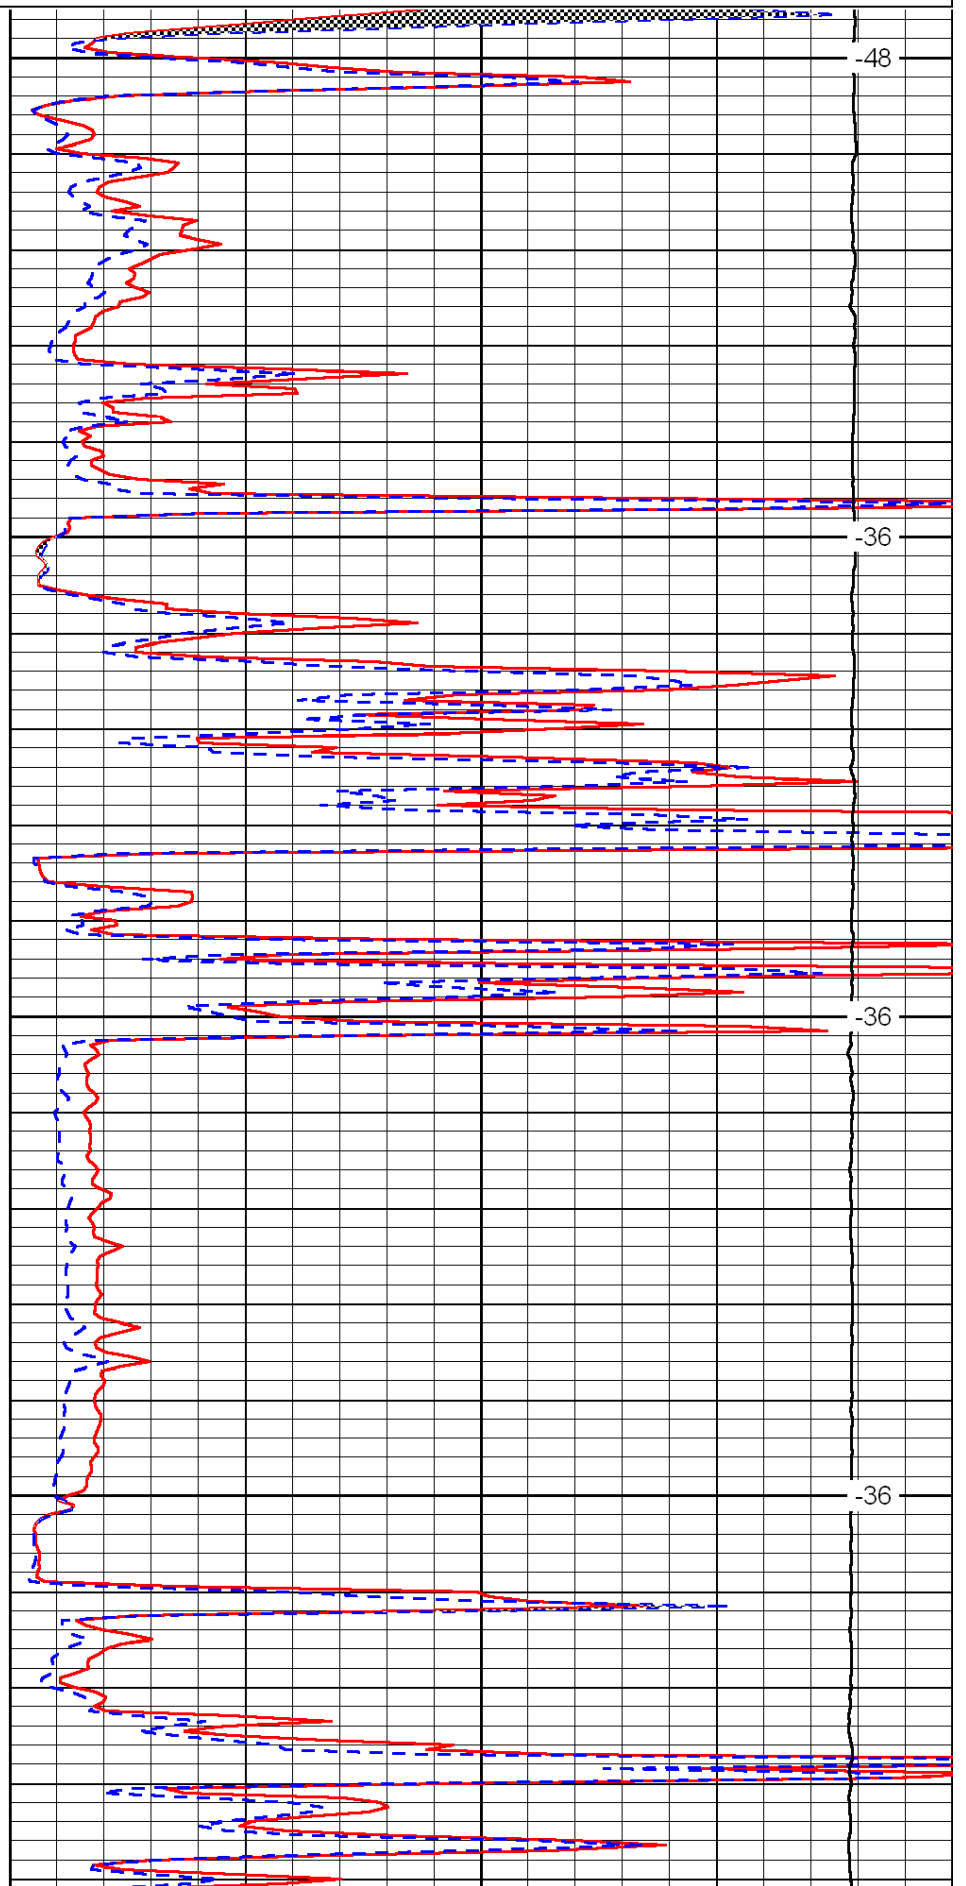

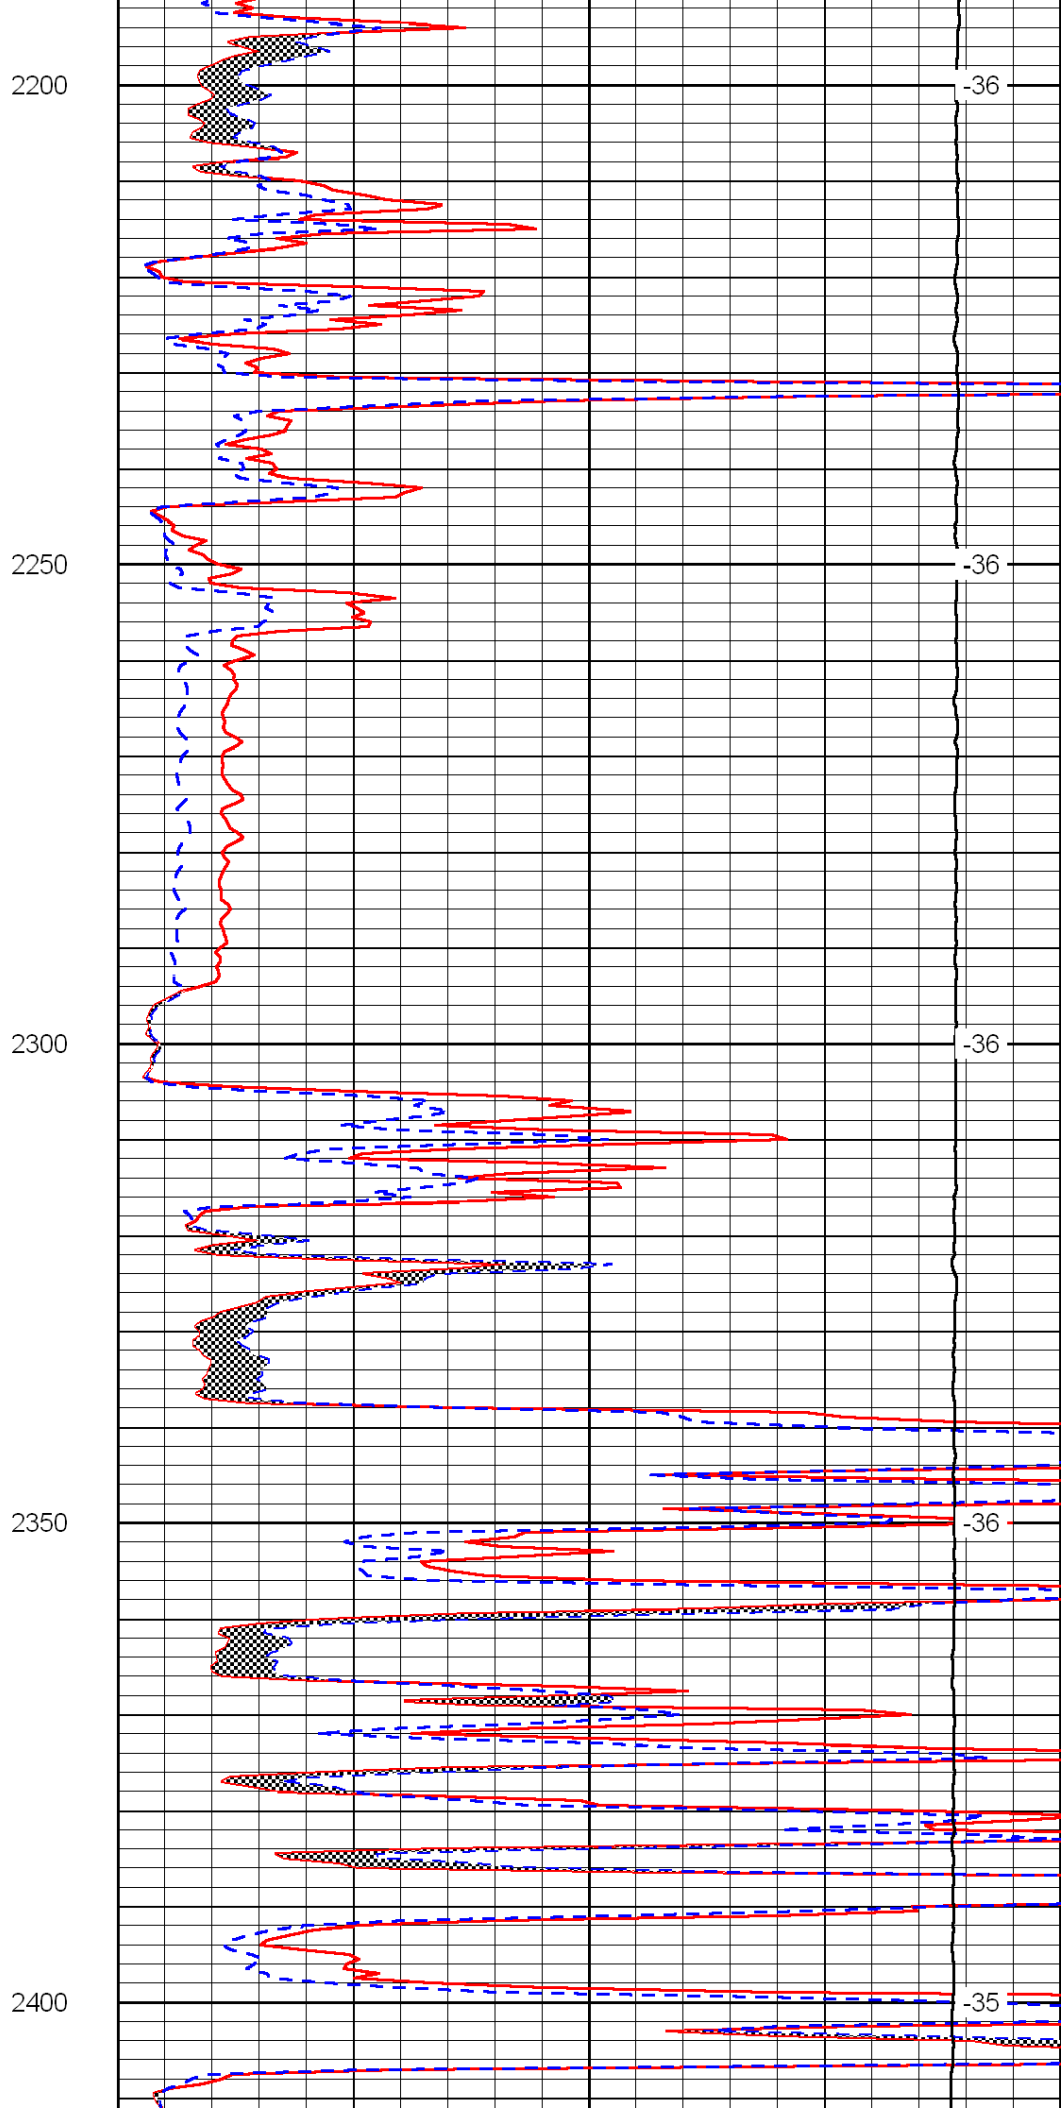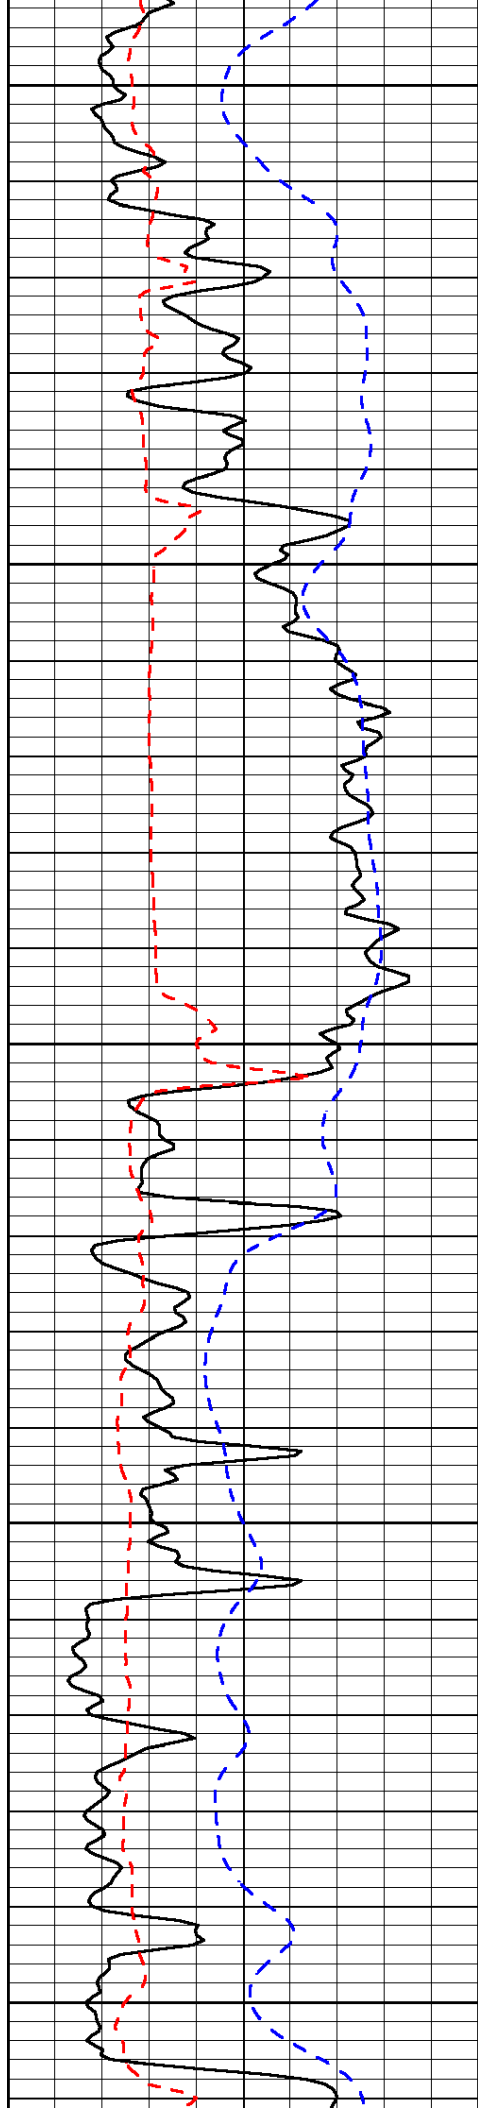

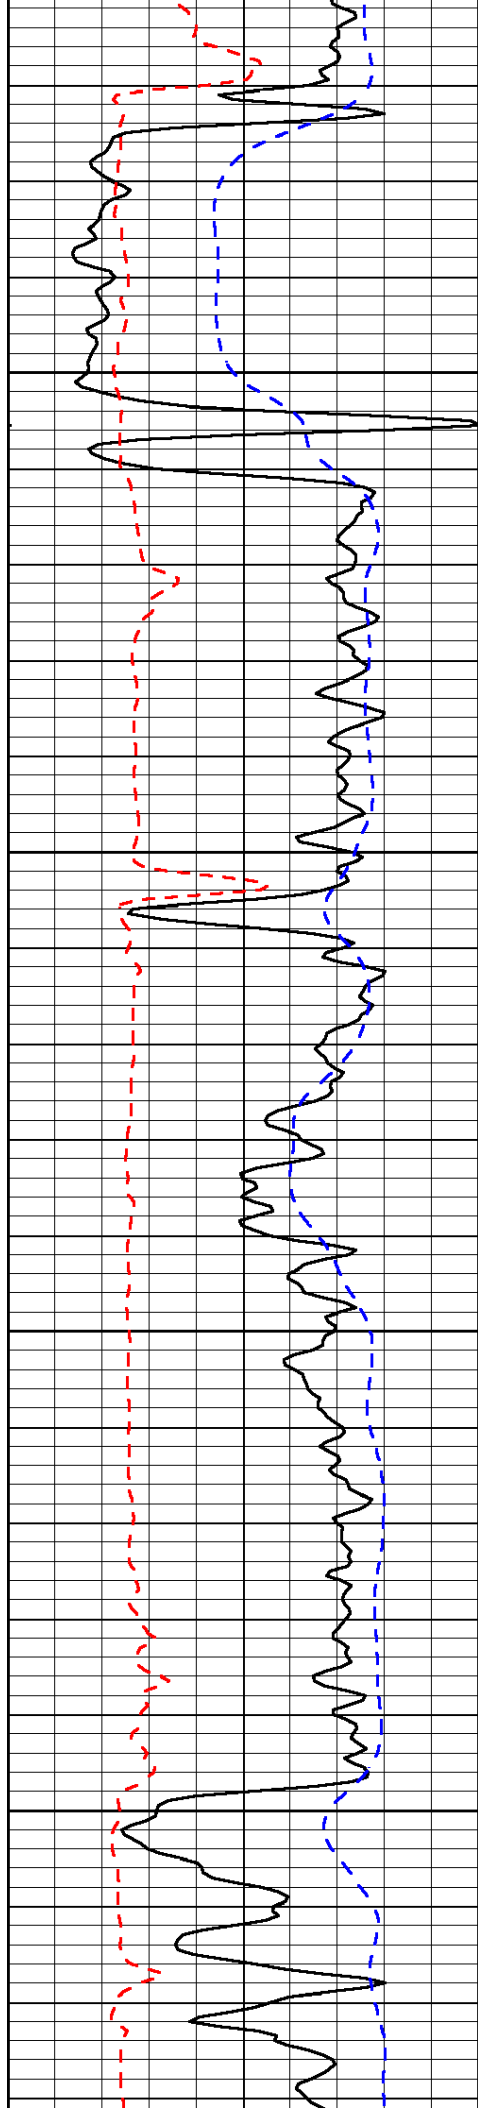


2450

2500

2550

2600

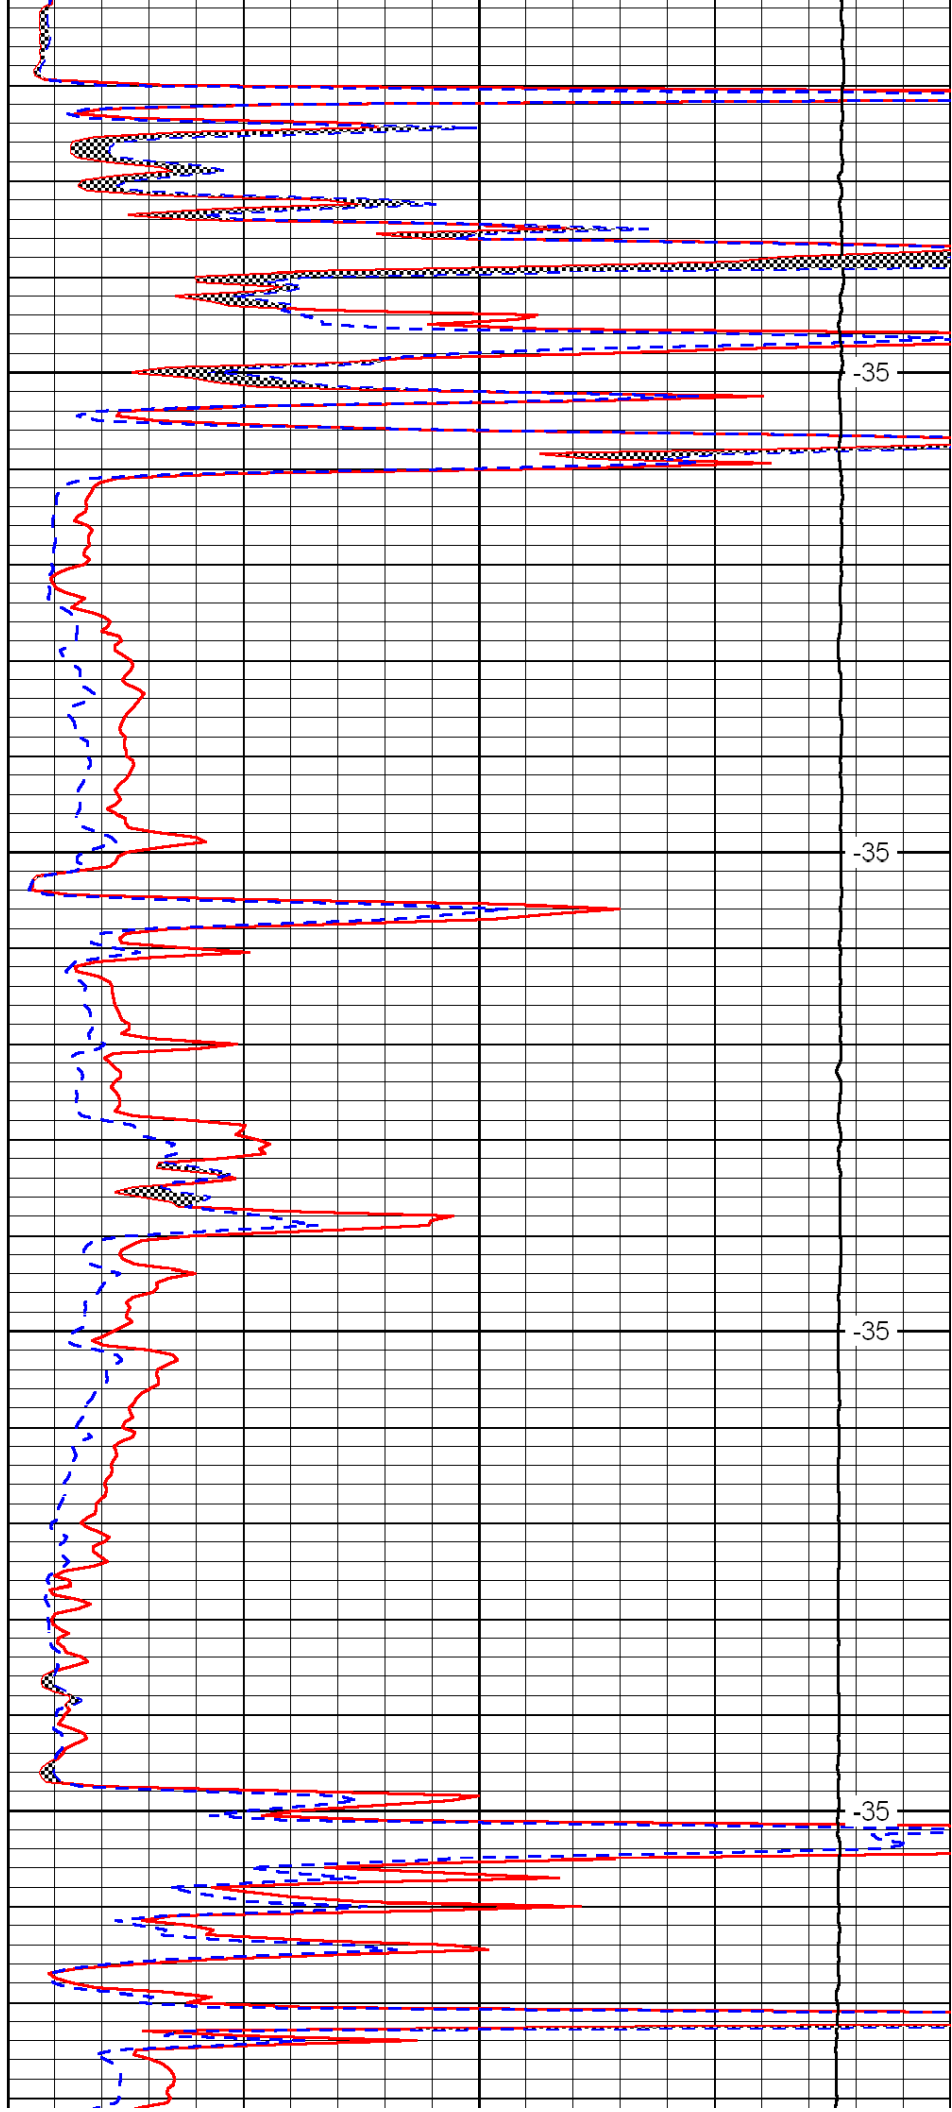


-35

-35

-35

-35

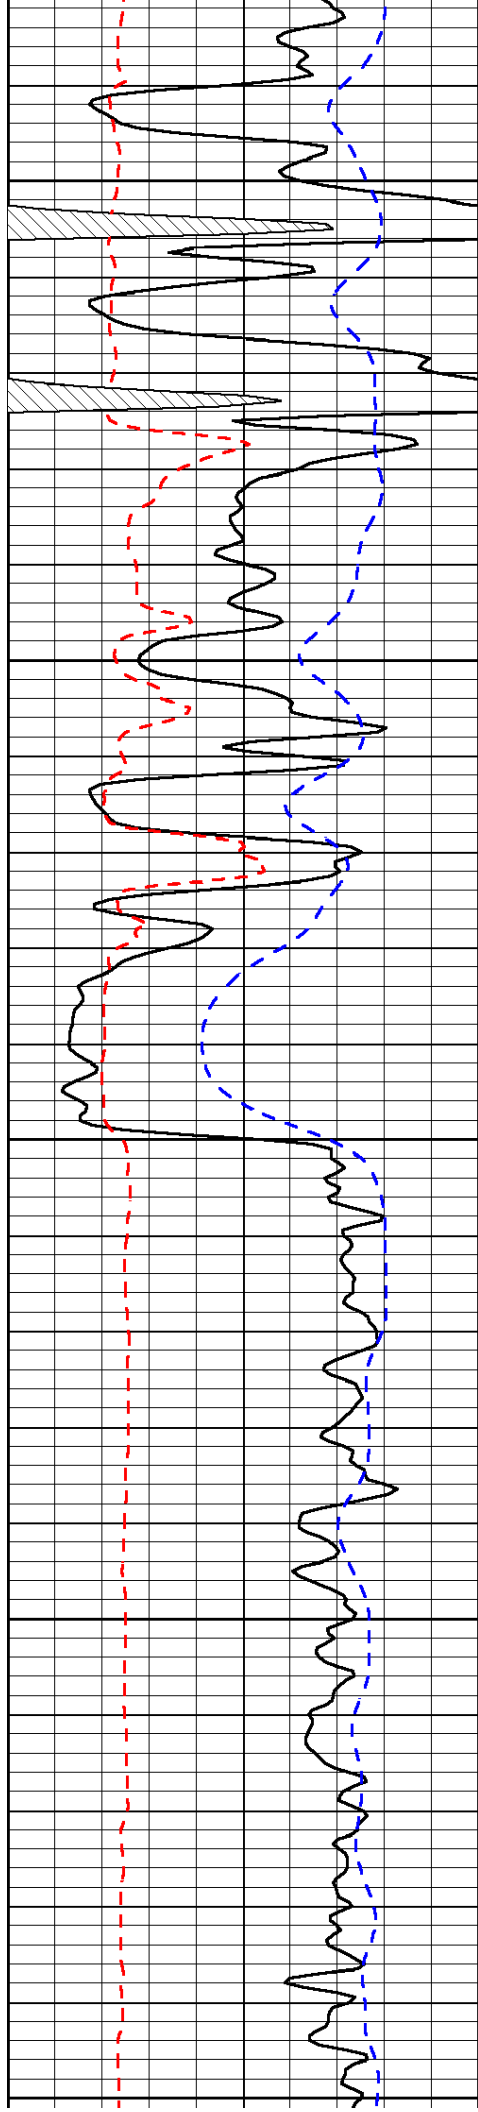


2650

2700

2750

2800

2850

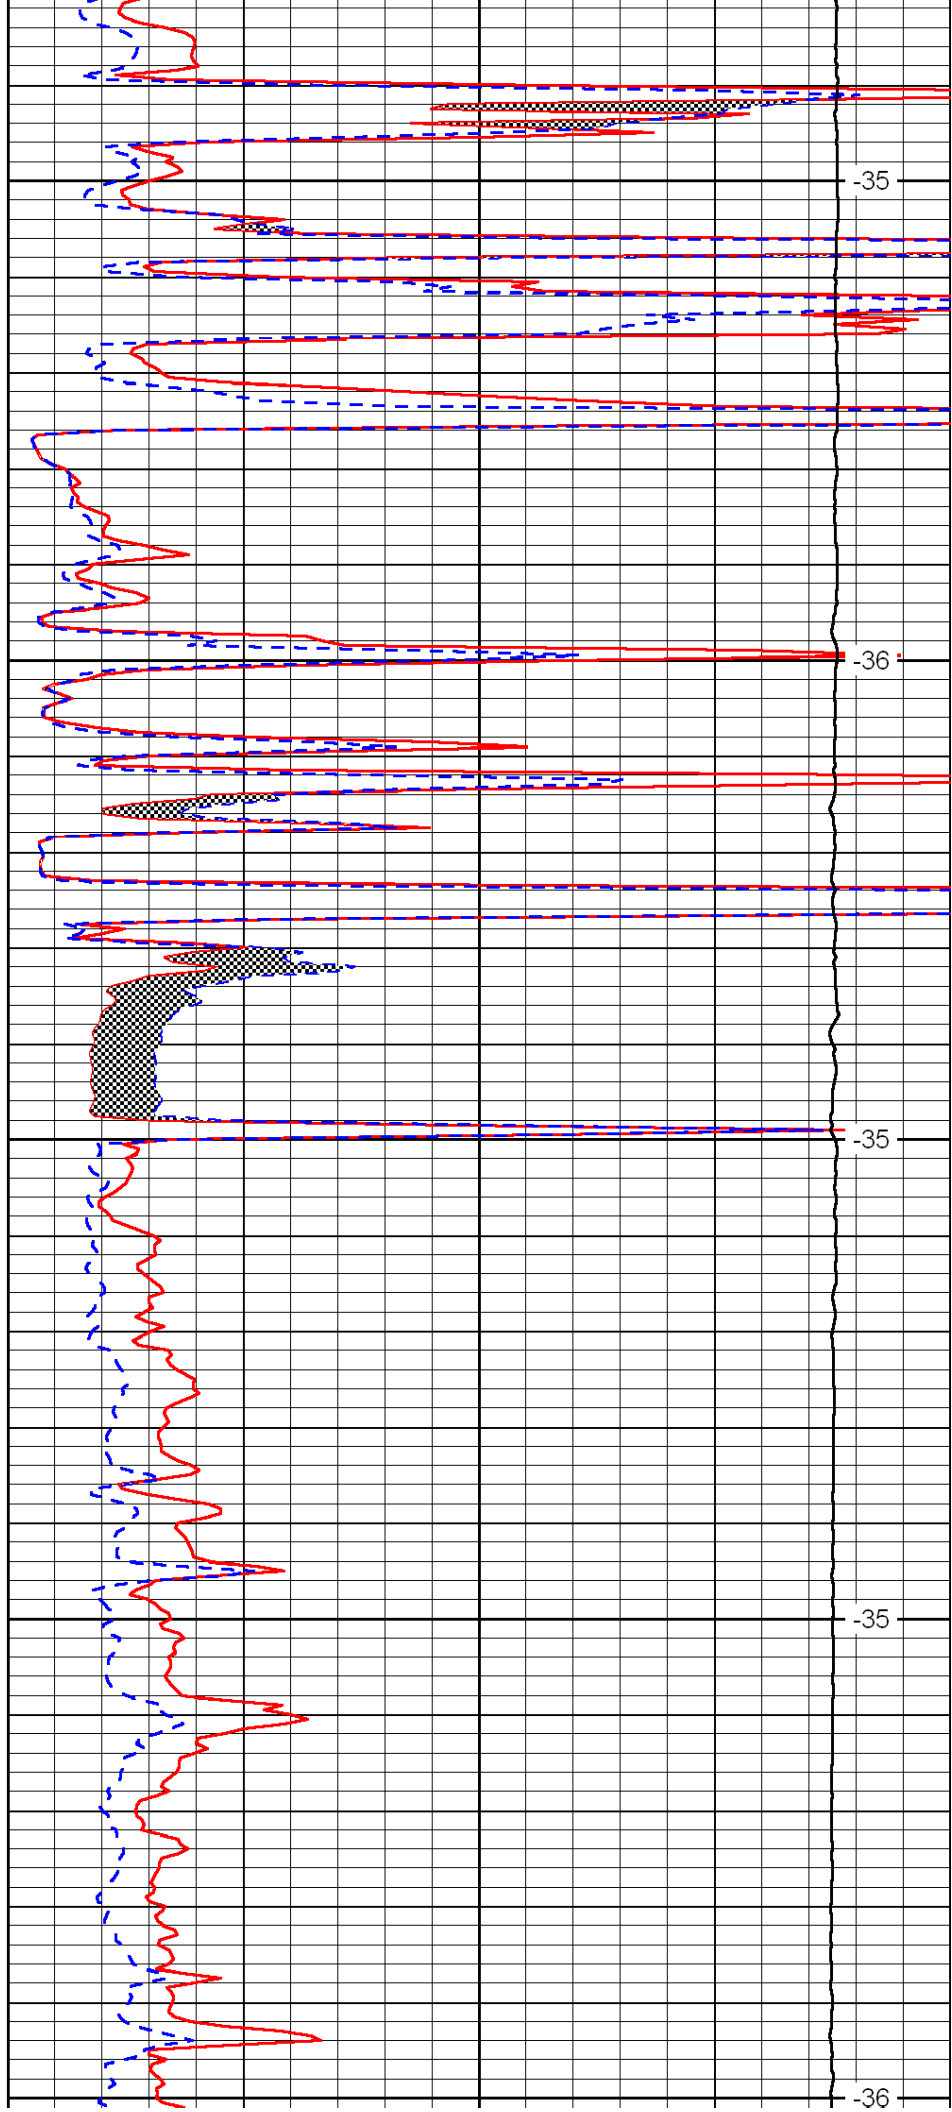


-35

-36

-35

-35

-36

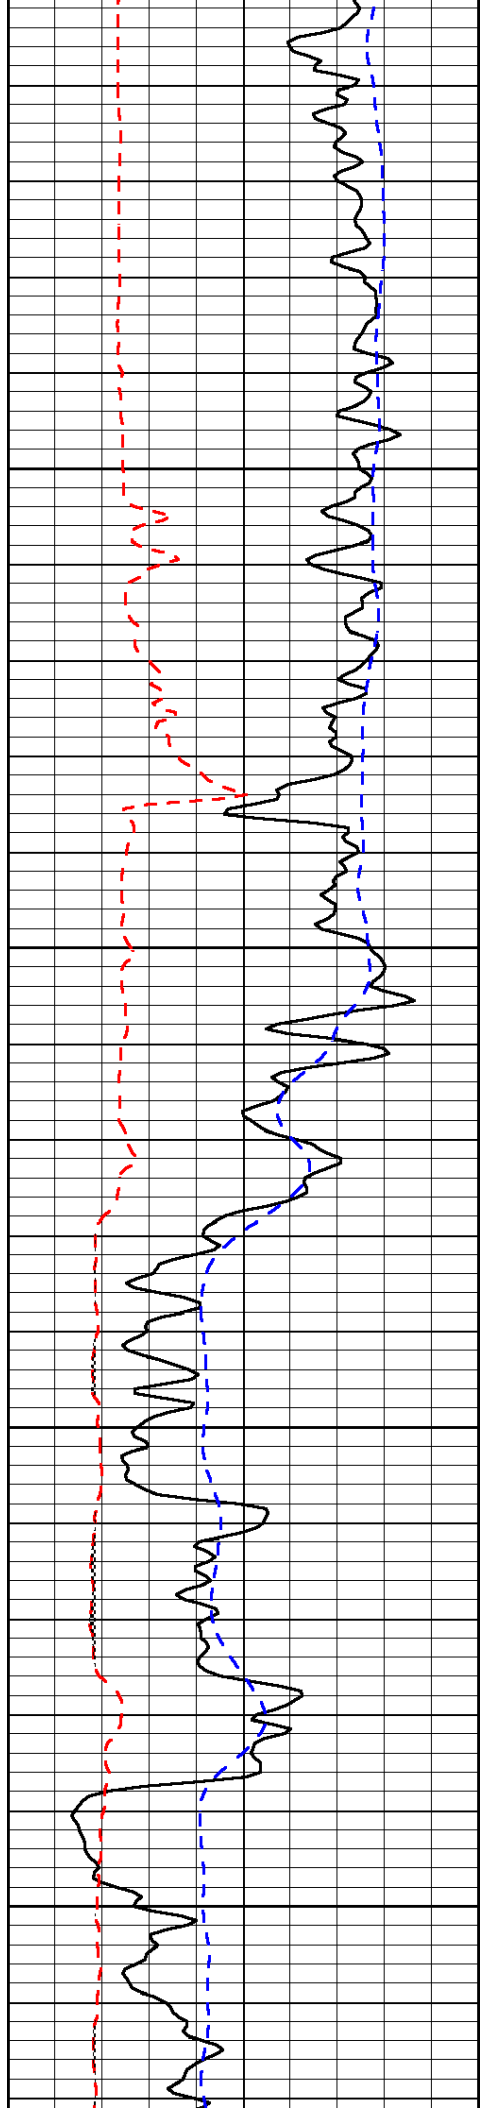


2900

2950

3000

3050

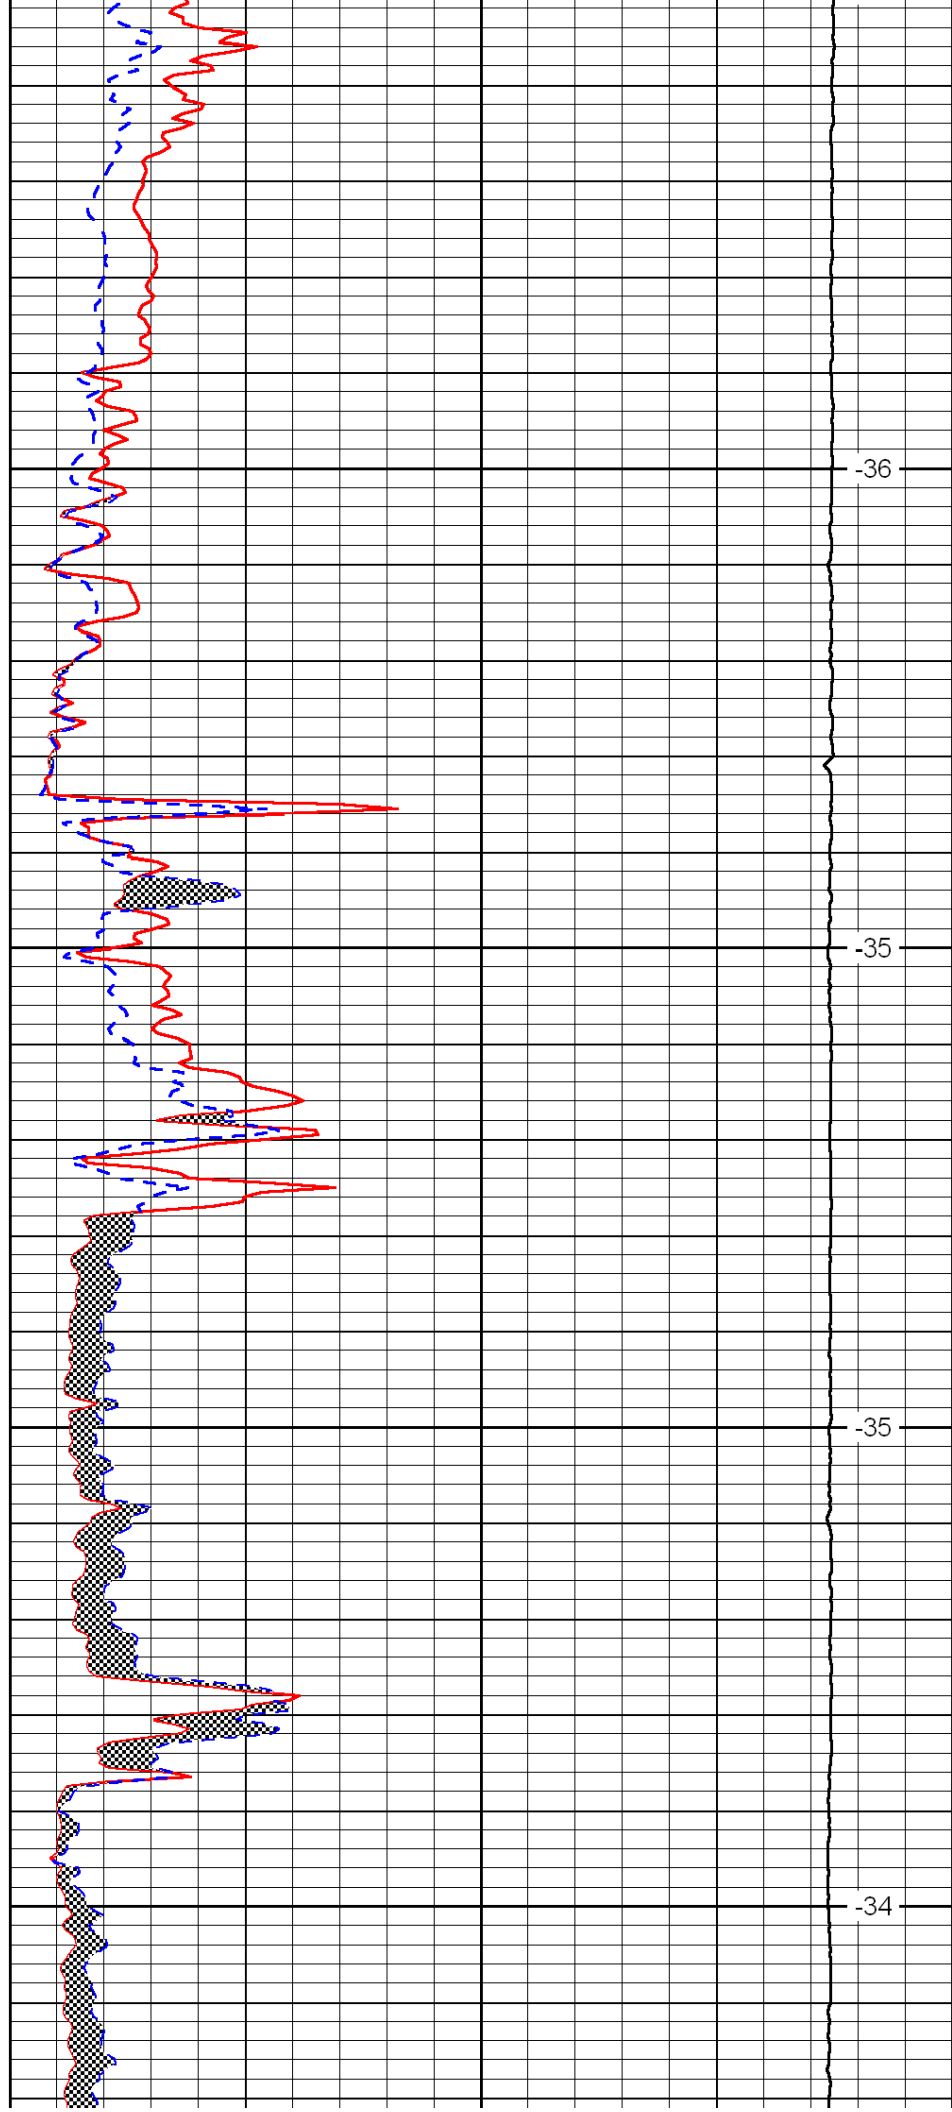


-36

-35

-35

-34

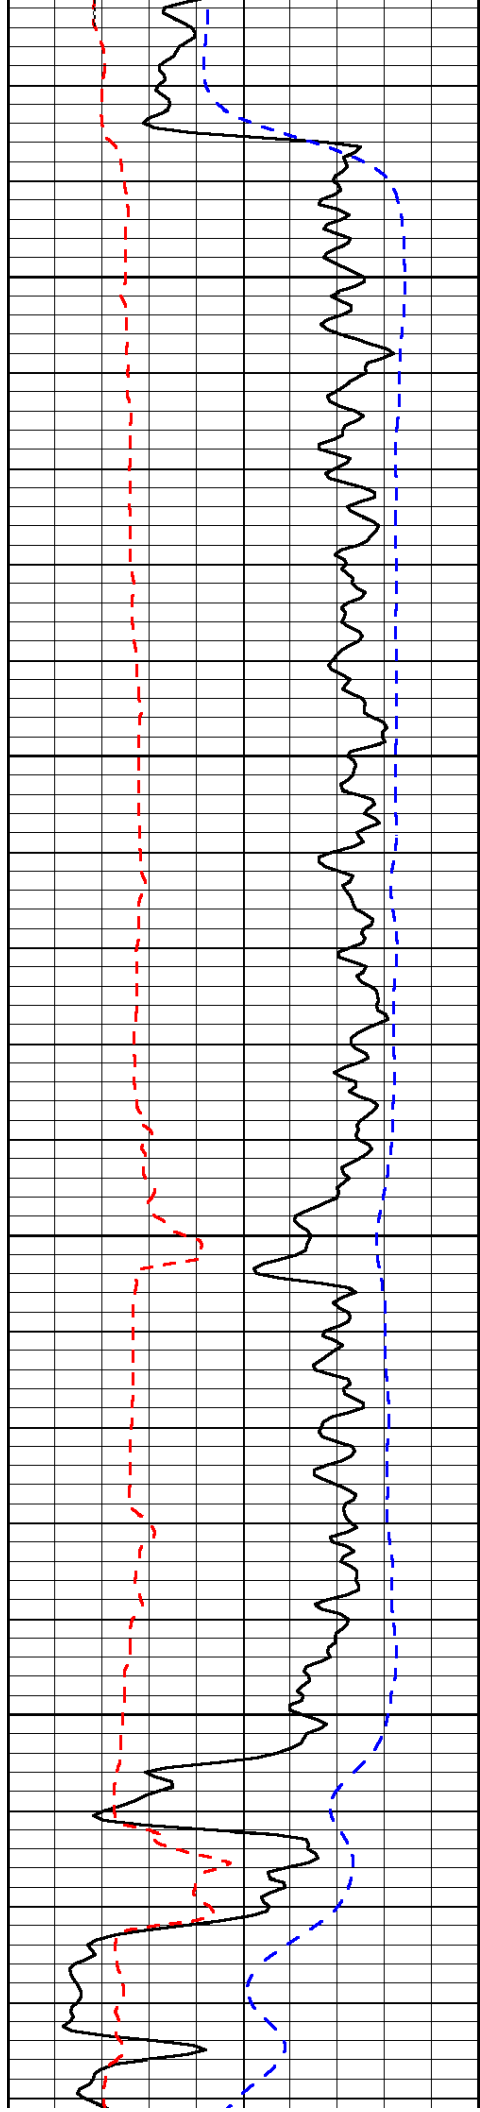


3100

3150

3200

3250

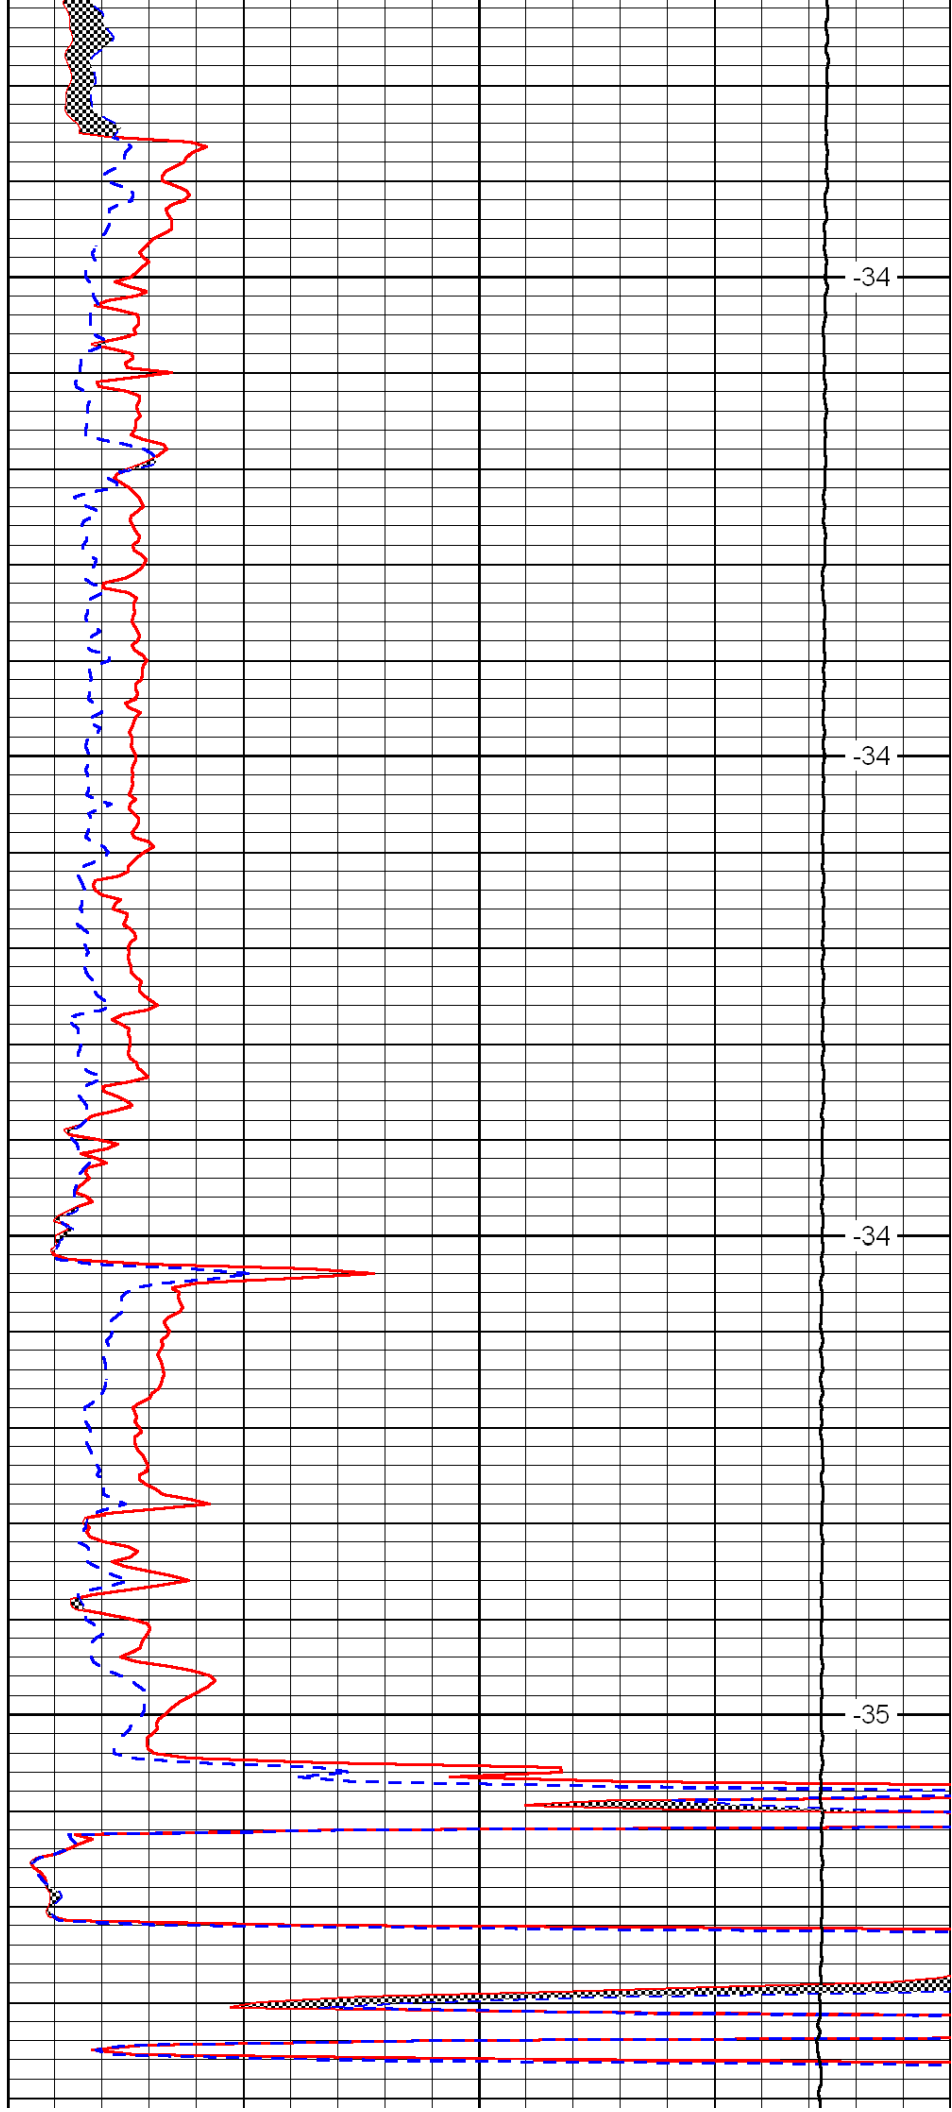


-34

-34

-34

-35

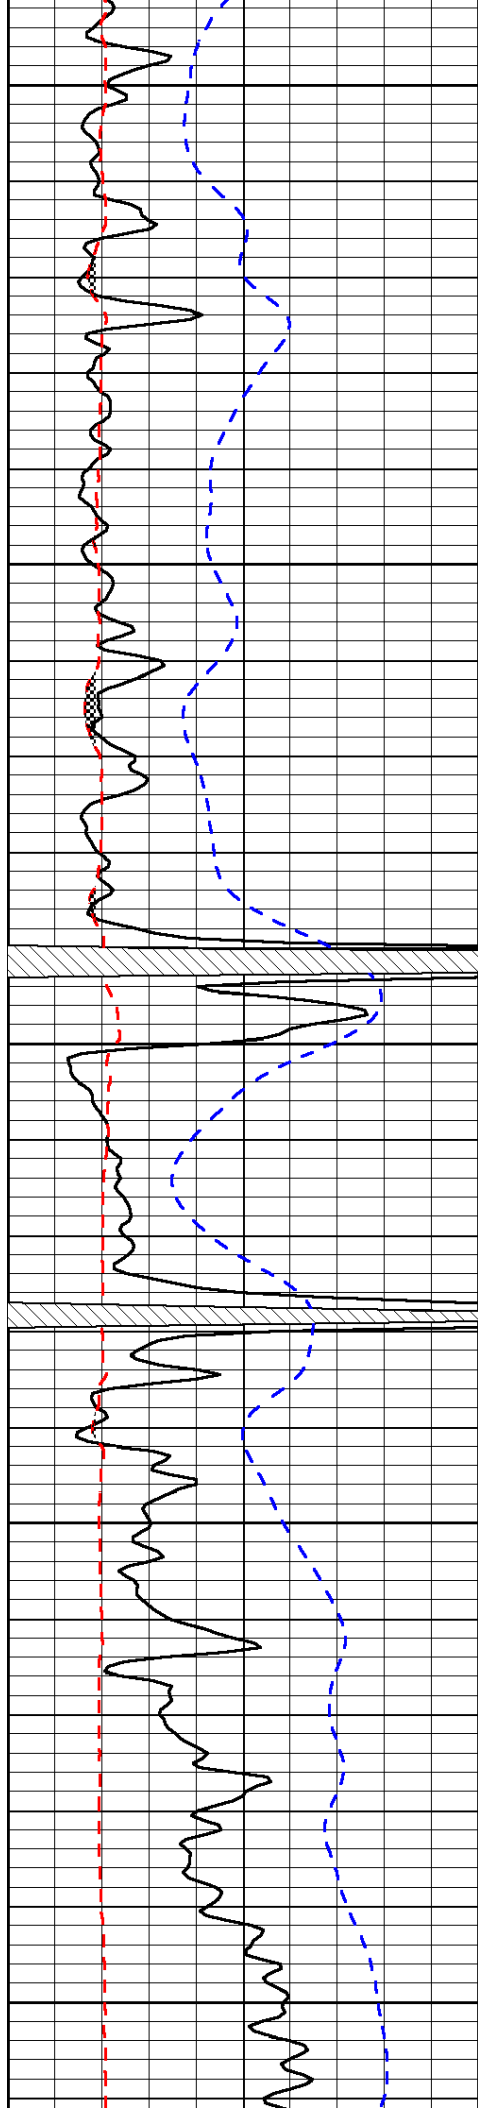


3300

3350

3400

3450

3500

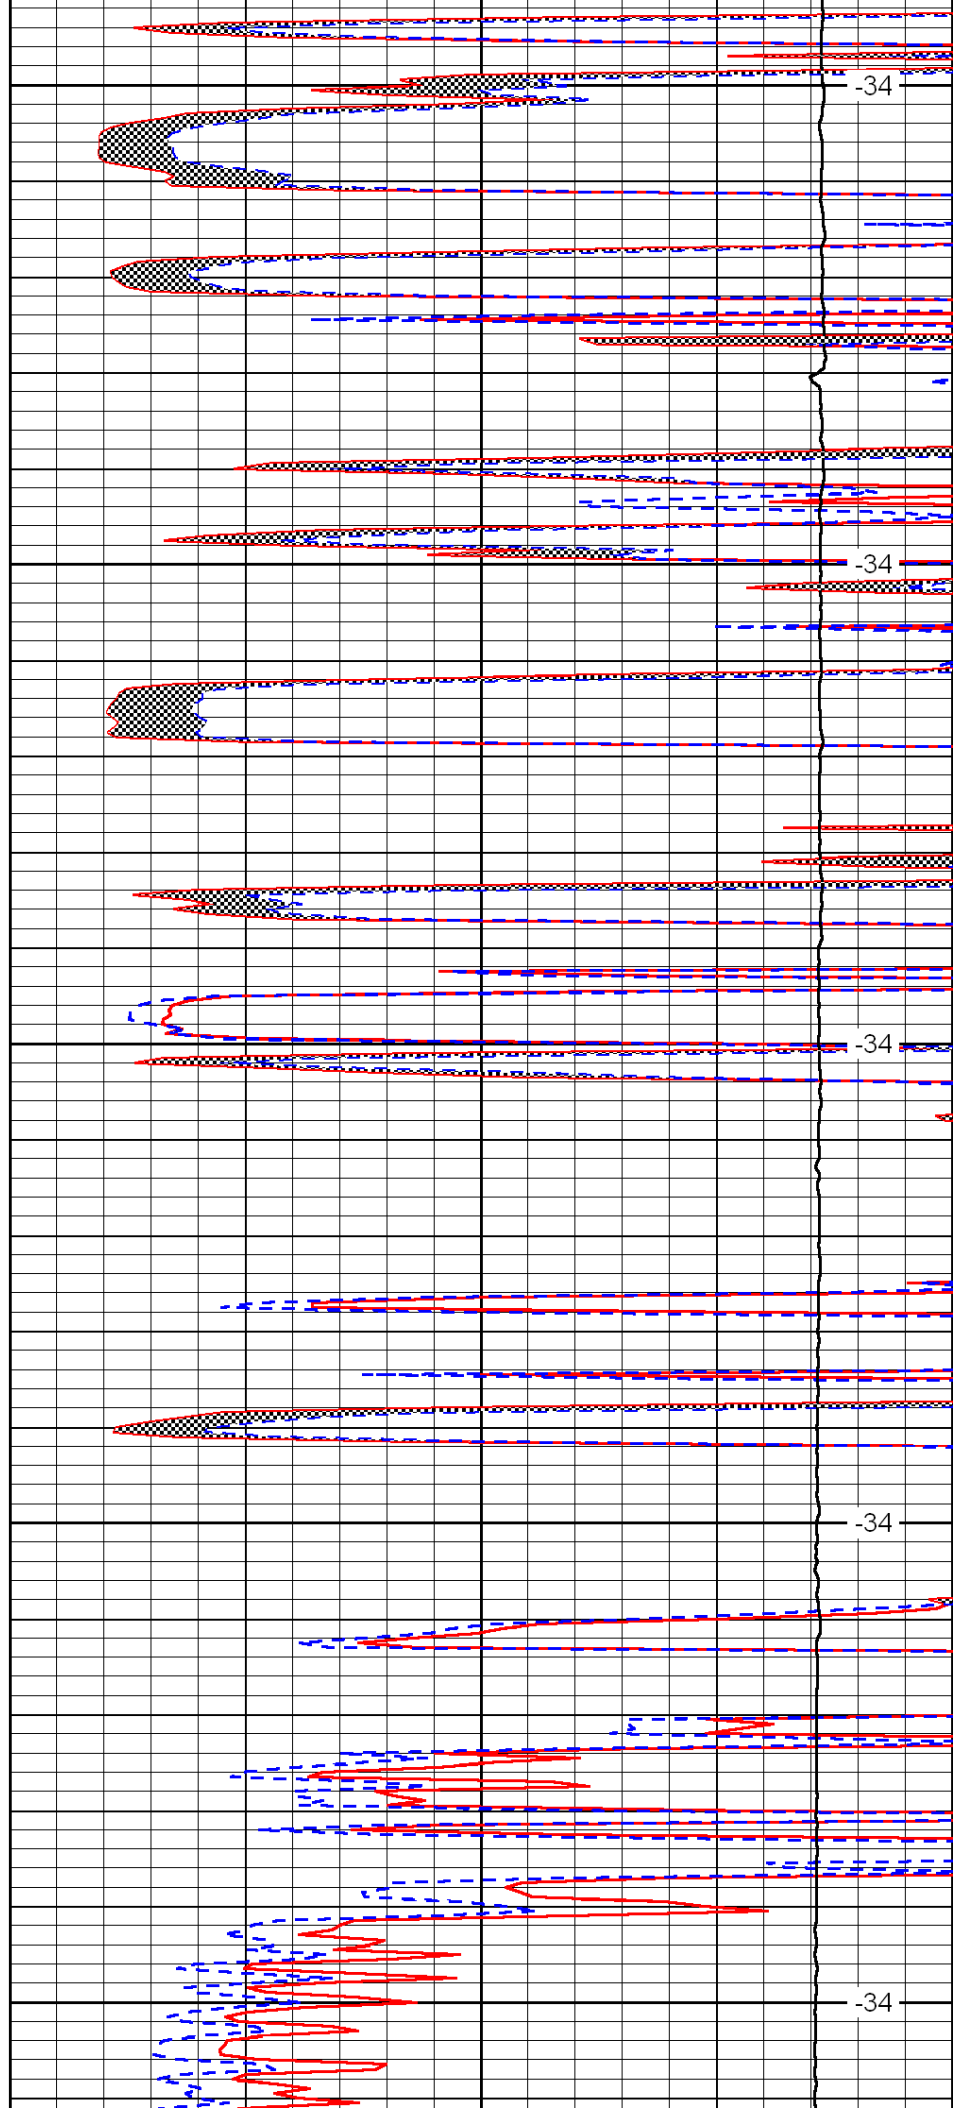


-34

-34

-34

-34

-34

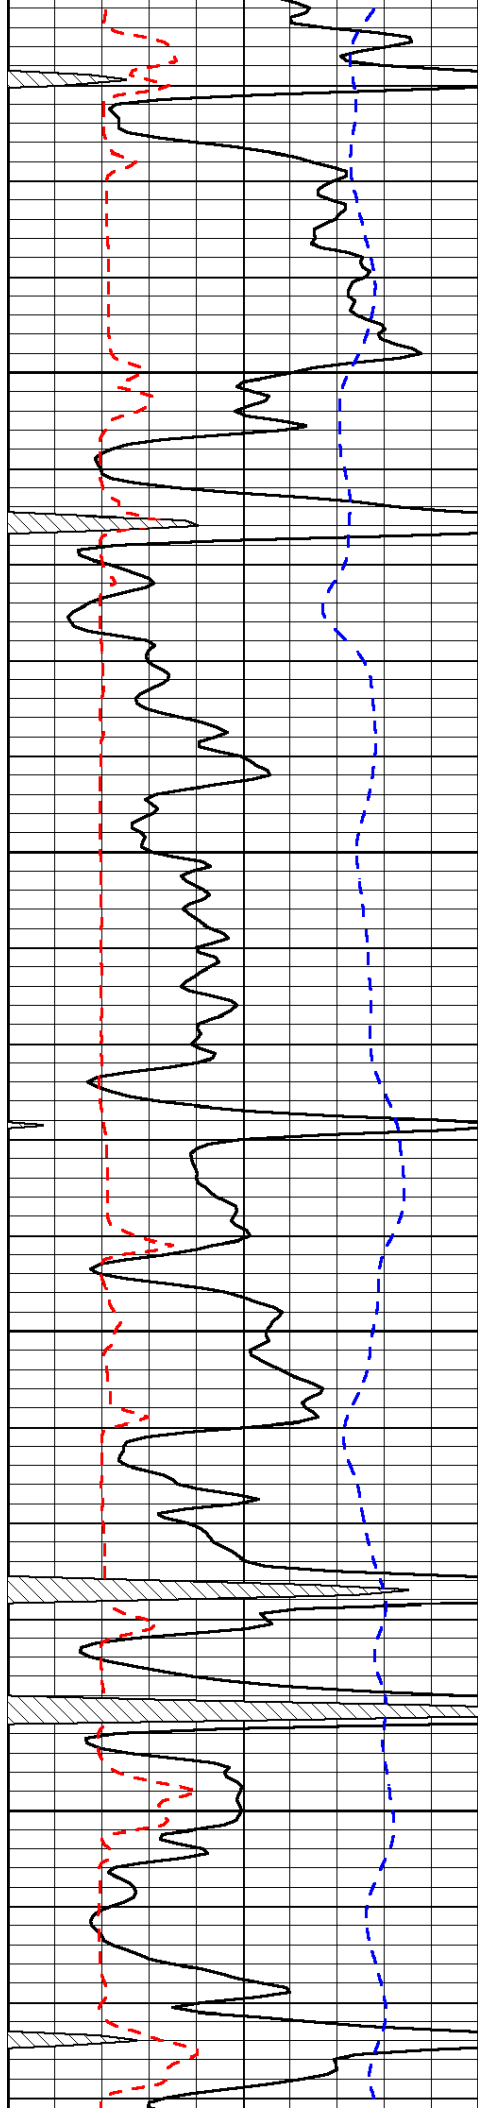



3550

3600

3650

3700

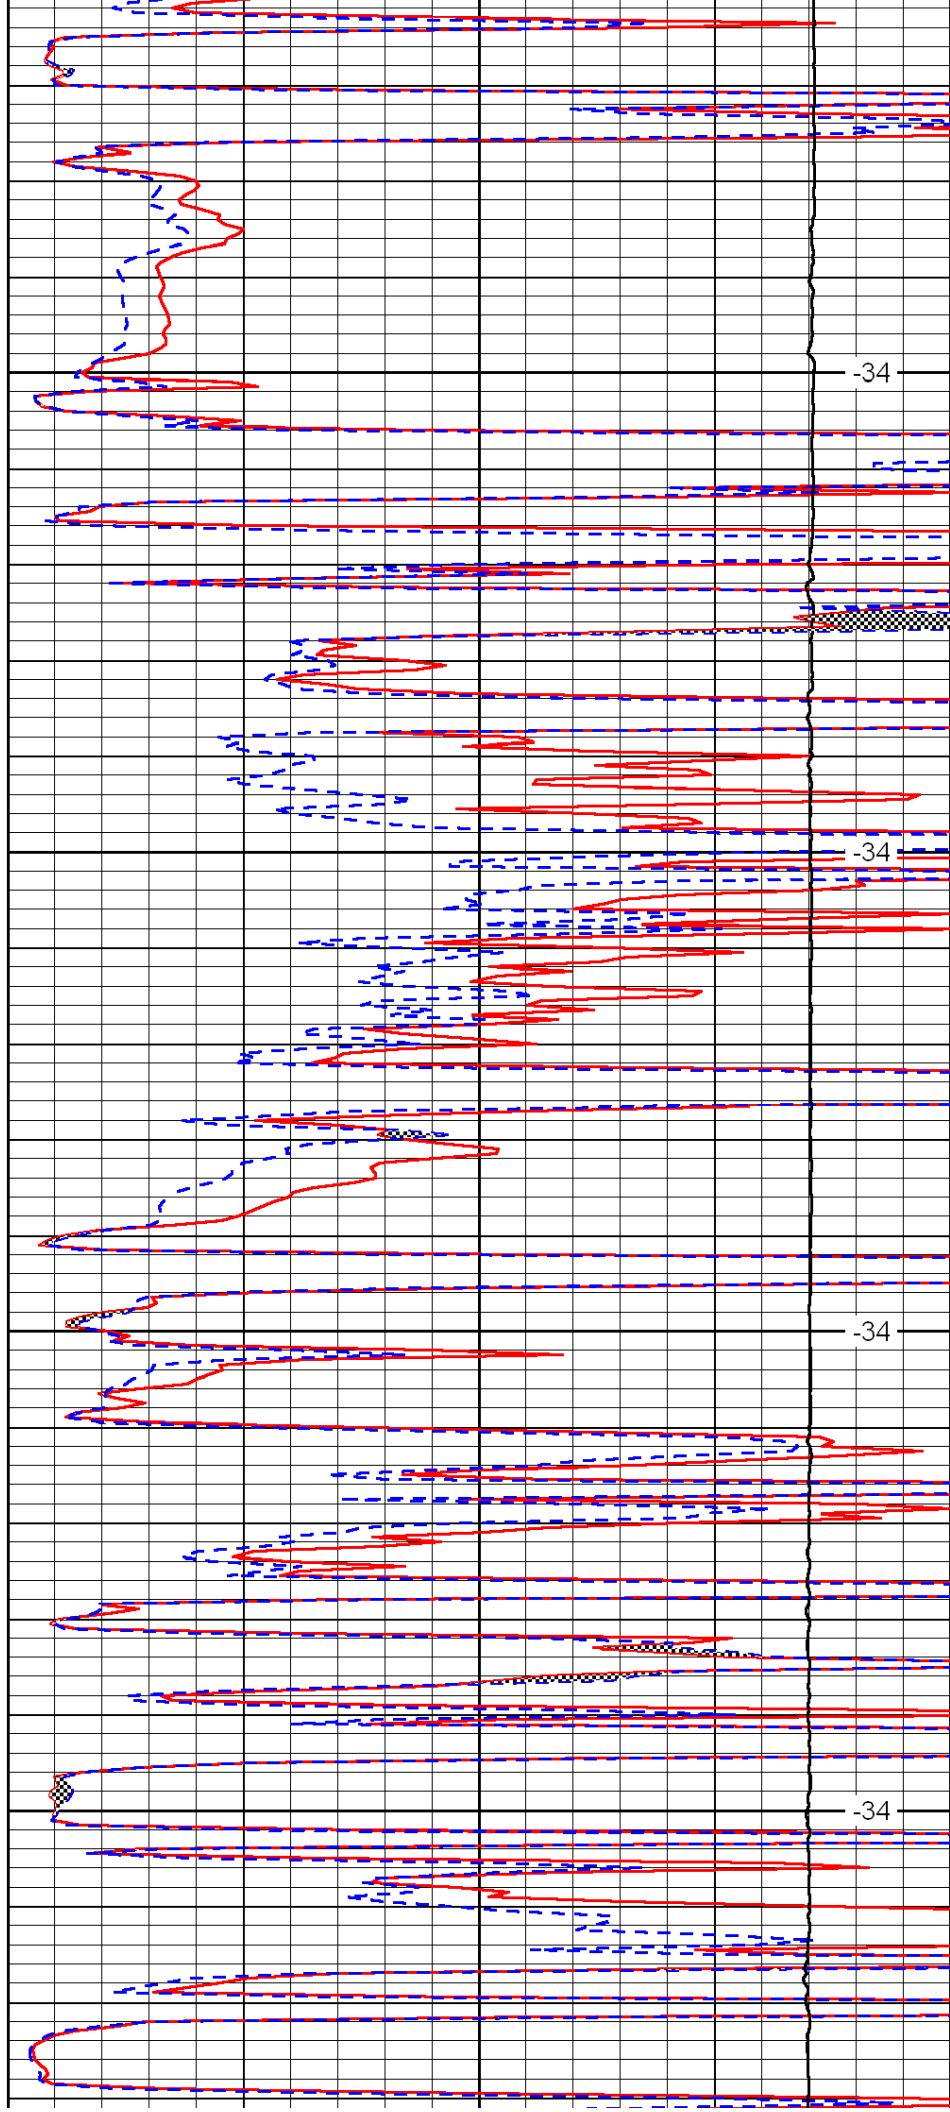

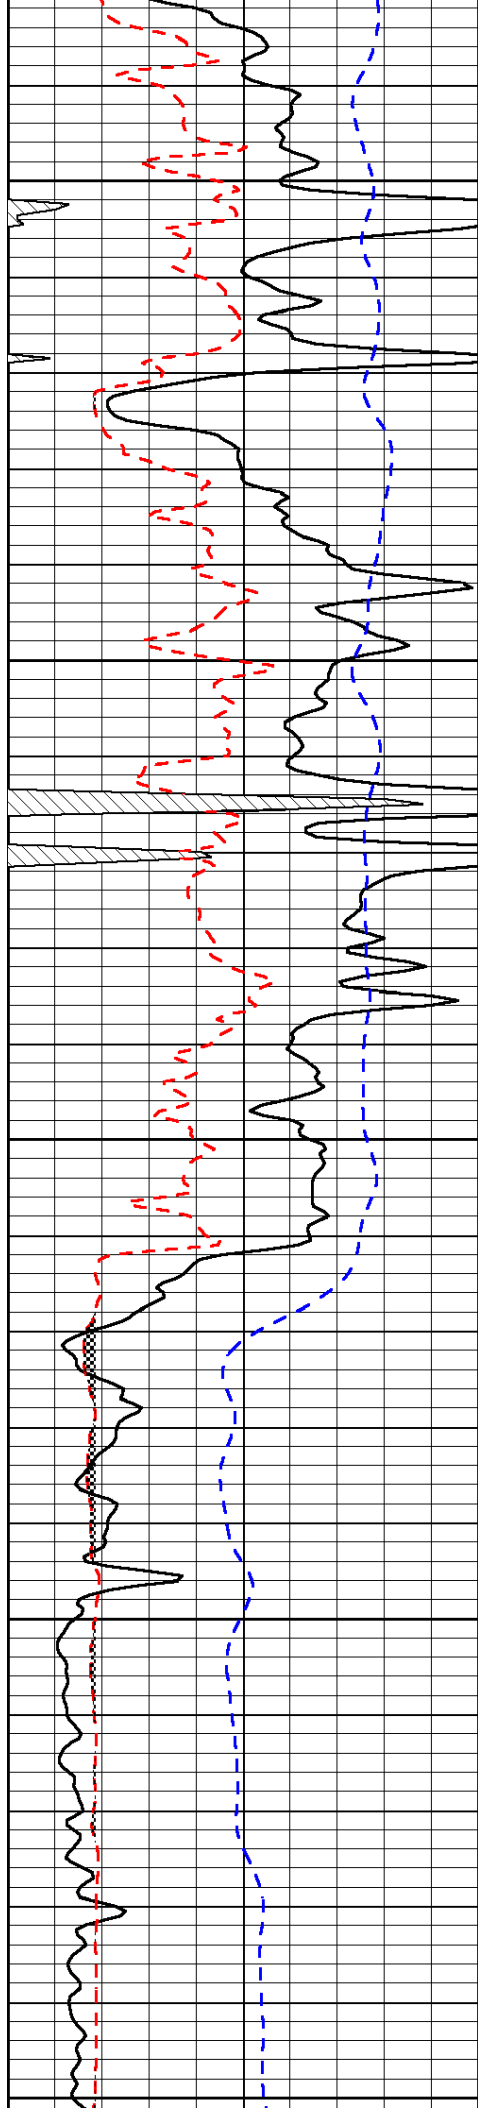


3750

3800

3850

3900

3950

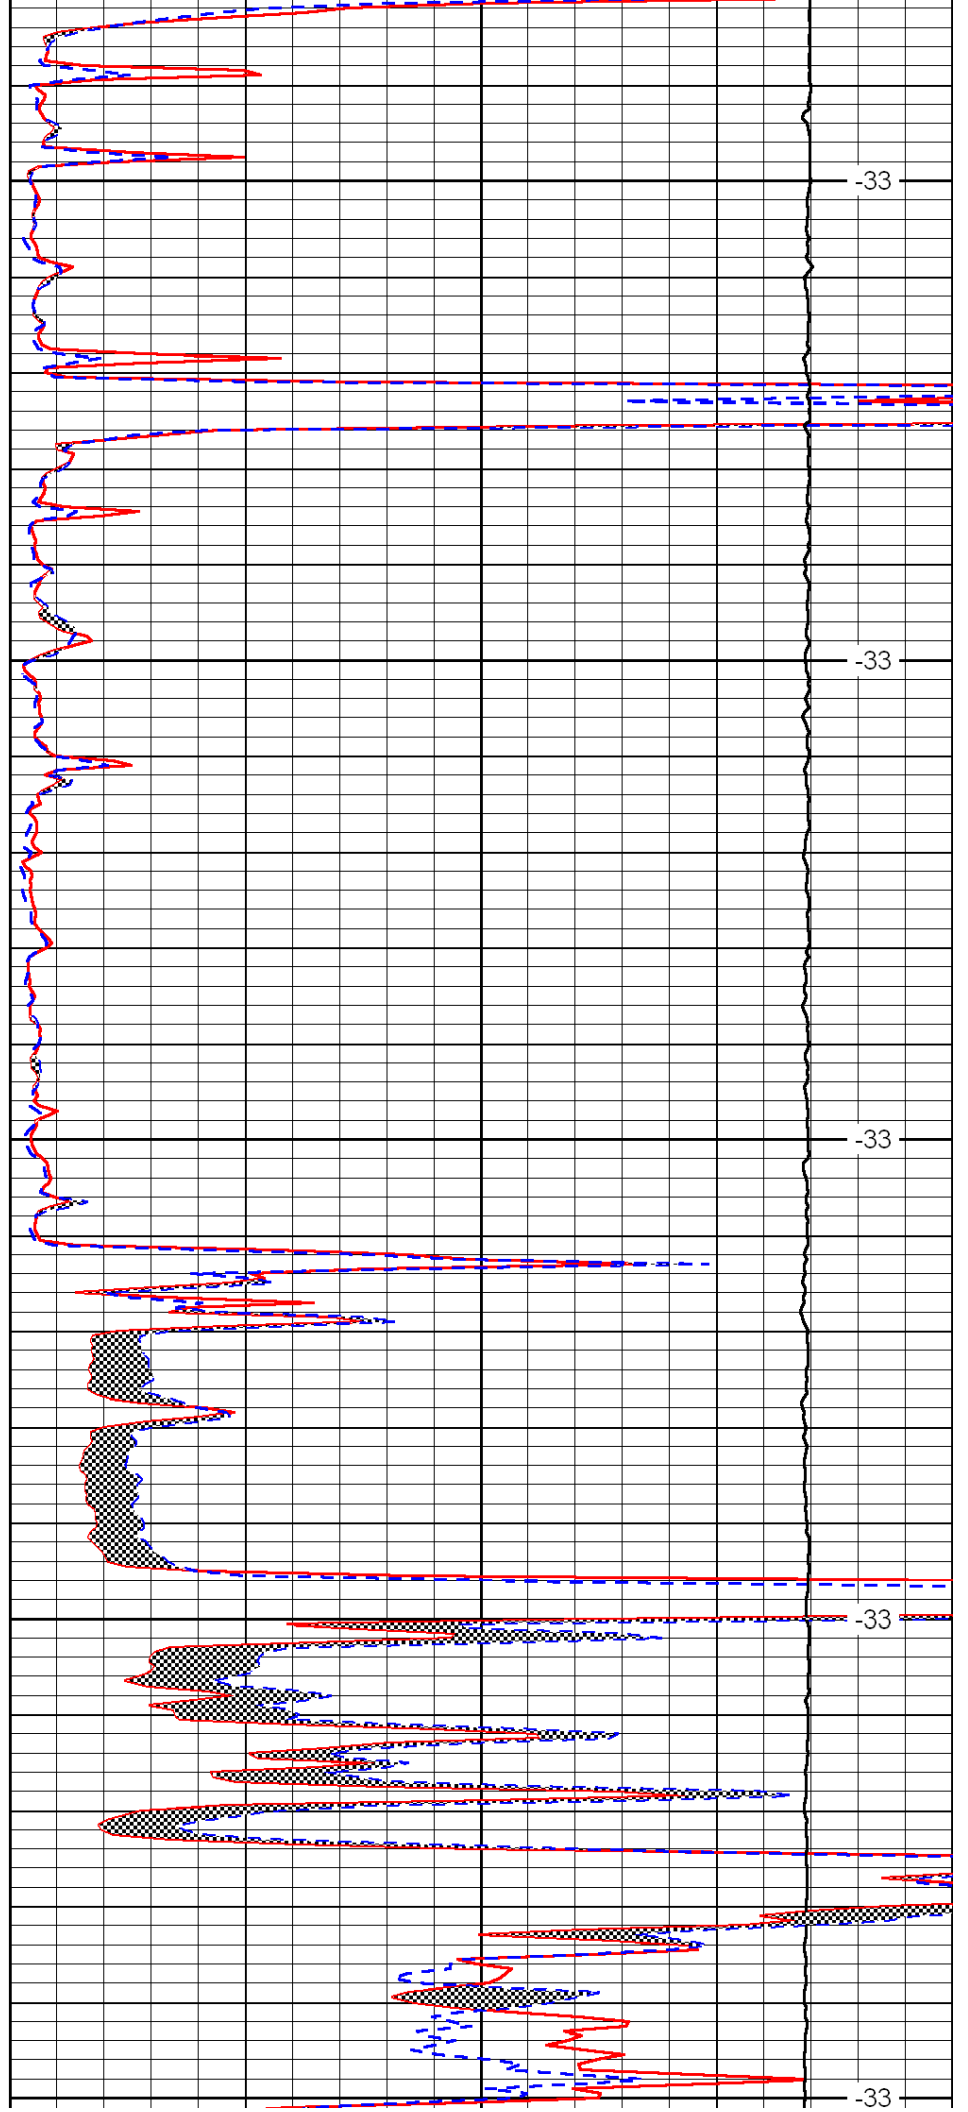


-33

-33

-33

-33

-33

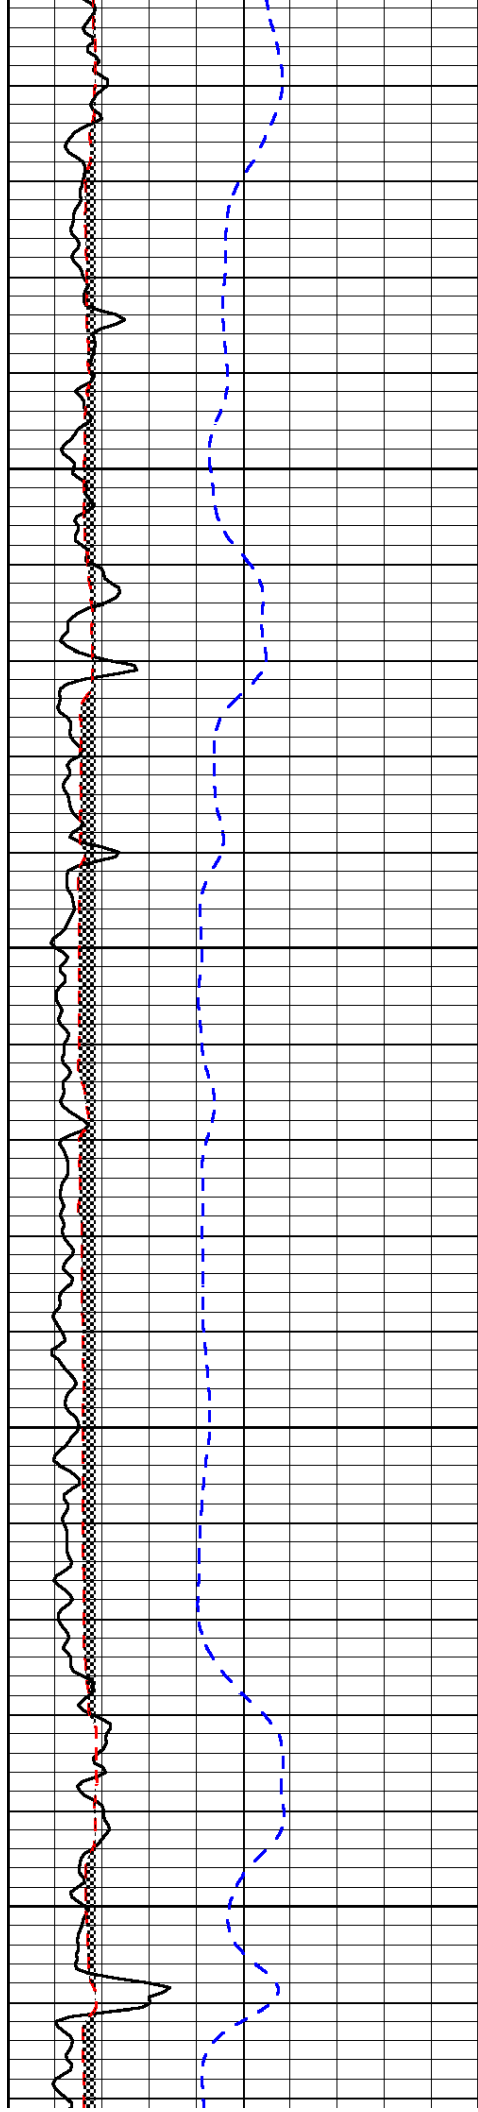


4000

4050

4100

4150

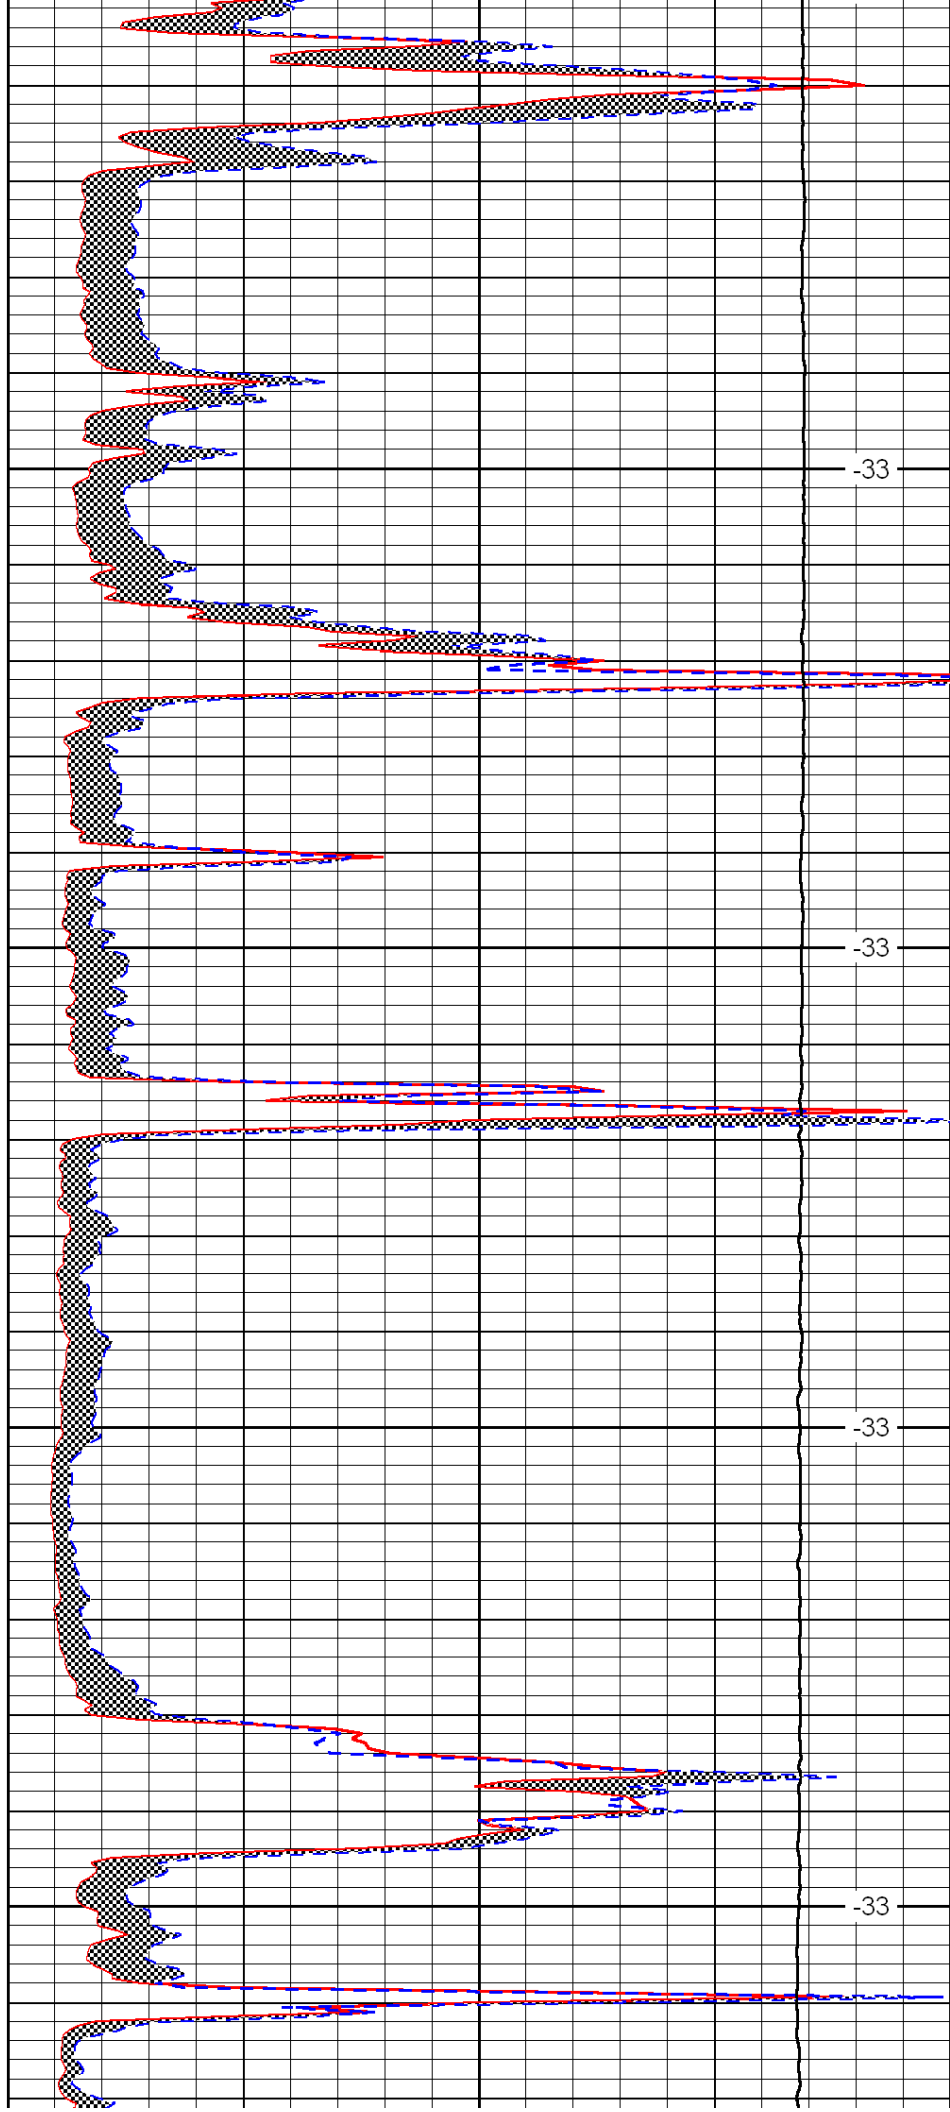


-33

-33

-33

-33

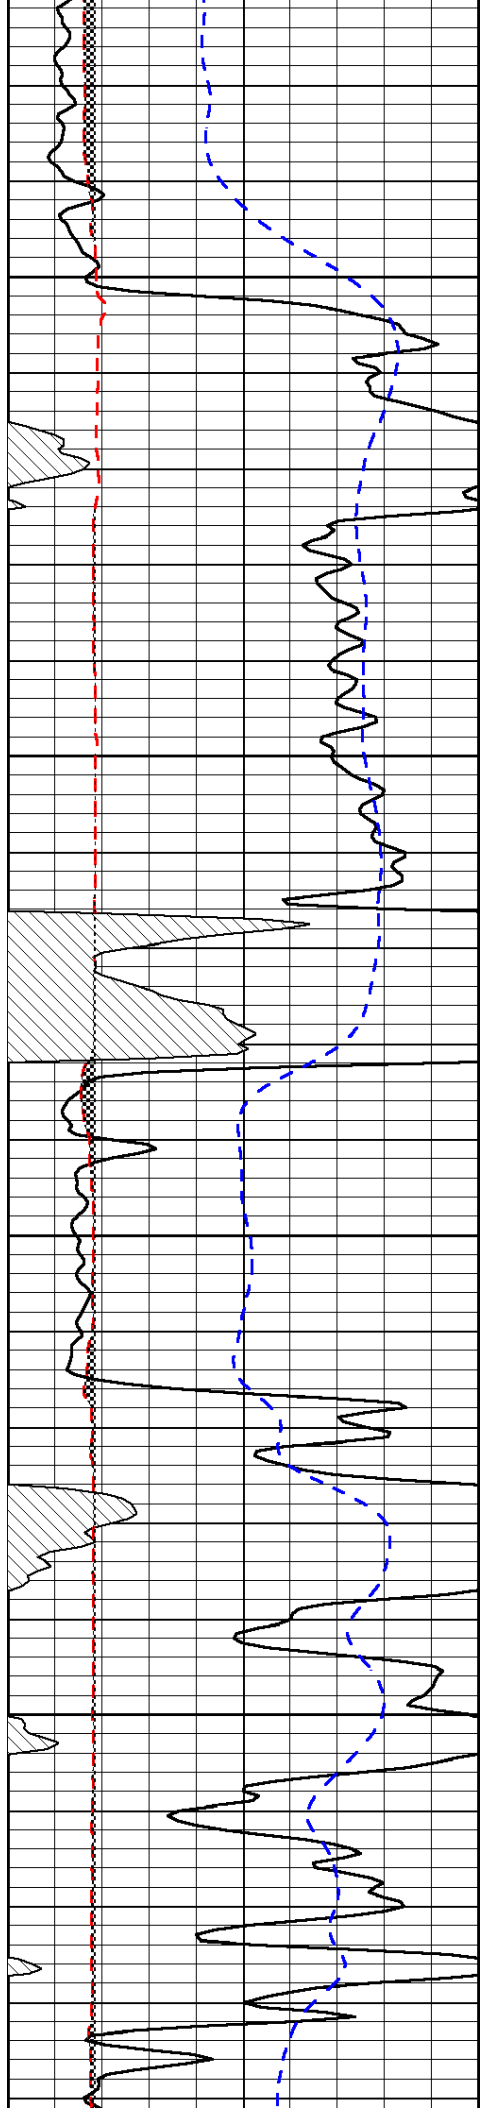


4200

4250

4300

4350

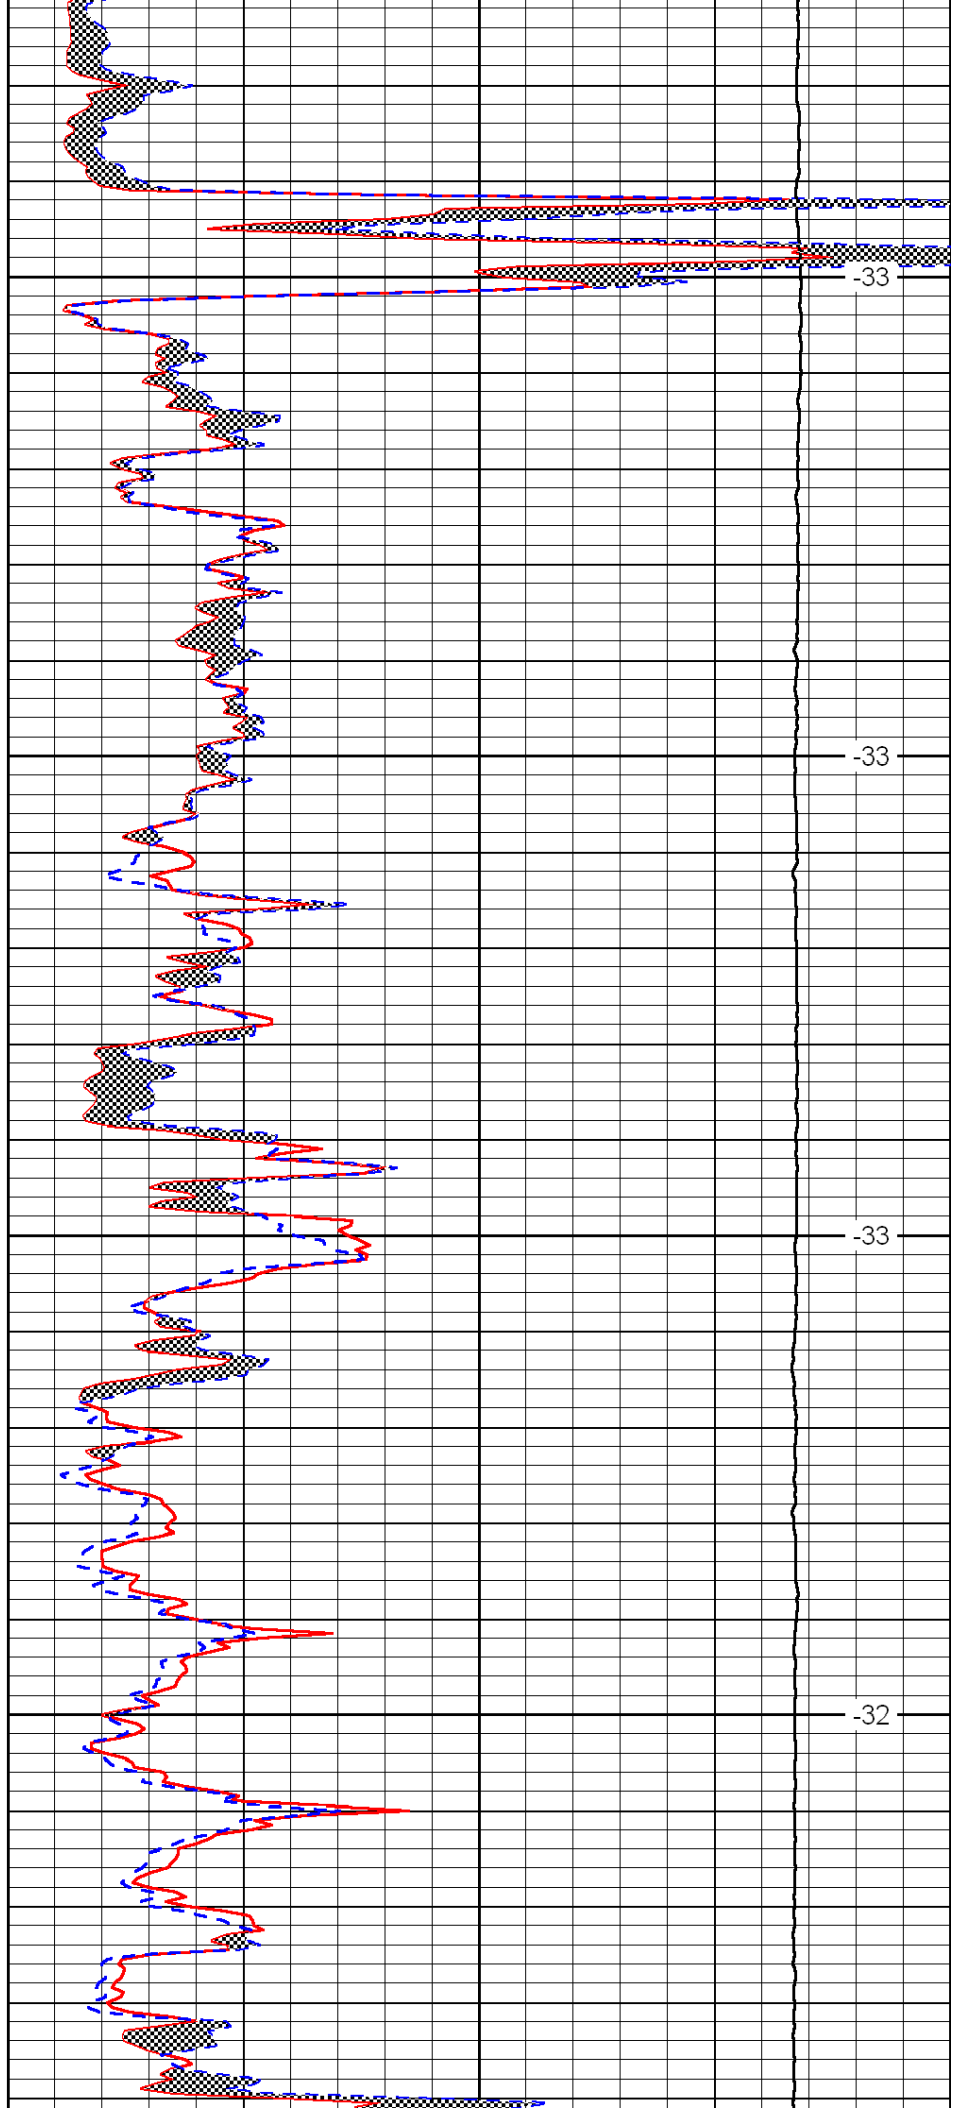


-33

-33


-33

-32

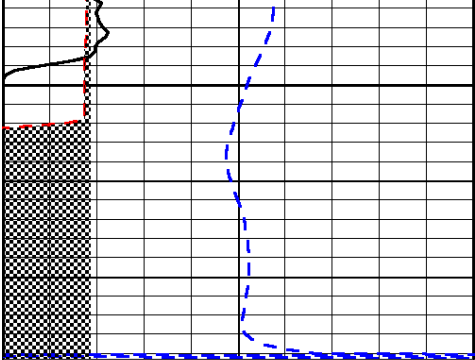

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

4400

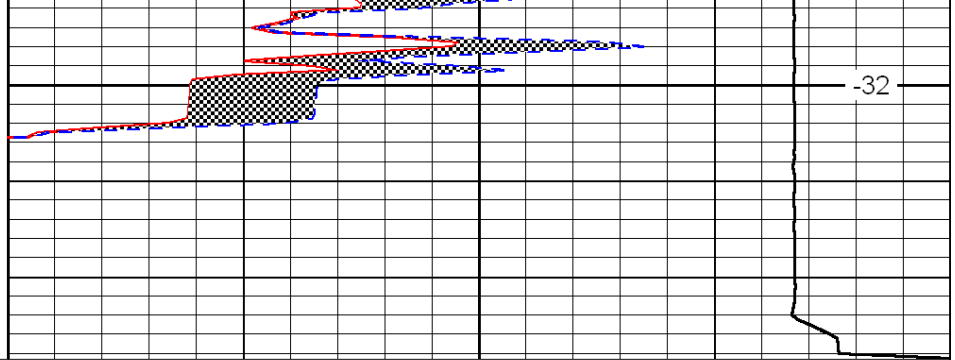

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD