



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company McCoy Petroleum Corporation		
	Well Shaw 'C' No. 1-10		
	Field Wildcat		
	County Sheridan	State	Kansas
	Location	NW - NW - NE 465' FNL & 2310' FEL	
	Sec: 10	Twp: 6 S	Rge: 30 W
Permanent Datum	Ground Level	Elevation 2790	Other Services CNL/CDL DIL
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	K.B. 2795
Drilling Measured From	Kelly Bushing		D.F. 2790
Date	9/15/2010		
Run Number	Two		
Depth Driller	4170		
Depth Logger	4173		
Bottom Logged Interval	4172		
Top Log Interval	3600		
Casing Driller	8.625 @ 218		
Casing Logger	219		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1900		
Density / Viscosity	9.0 64		
pH / Fluid Loss	9.5 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	2.90 @ 75		
Rmf @ Meas. Temp	2.18 @ 75		
Rmc @ Meas. Temp	3.92 @ 75		
Source of Rmf / Rmc	Charts		
Rm @ BHT	1.85 @ 118		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	118		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Robert Hendrix		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Selden, Ks; 1/2 Southwest to 130W Rd;
3 West to 110N Rd; 1 North; West Into (bottom of hill)

Database File: c:\warrior\data\mccoy_shaw 'c' no. 1-10\mccoyhd.db
Dataset Pathname: DIL\mcstk
Presentation Format: micro
Dataset Creation: Wed Sep 15 10:54:56 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

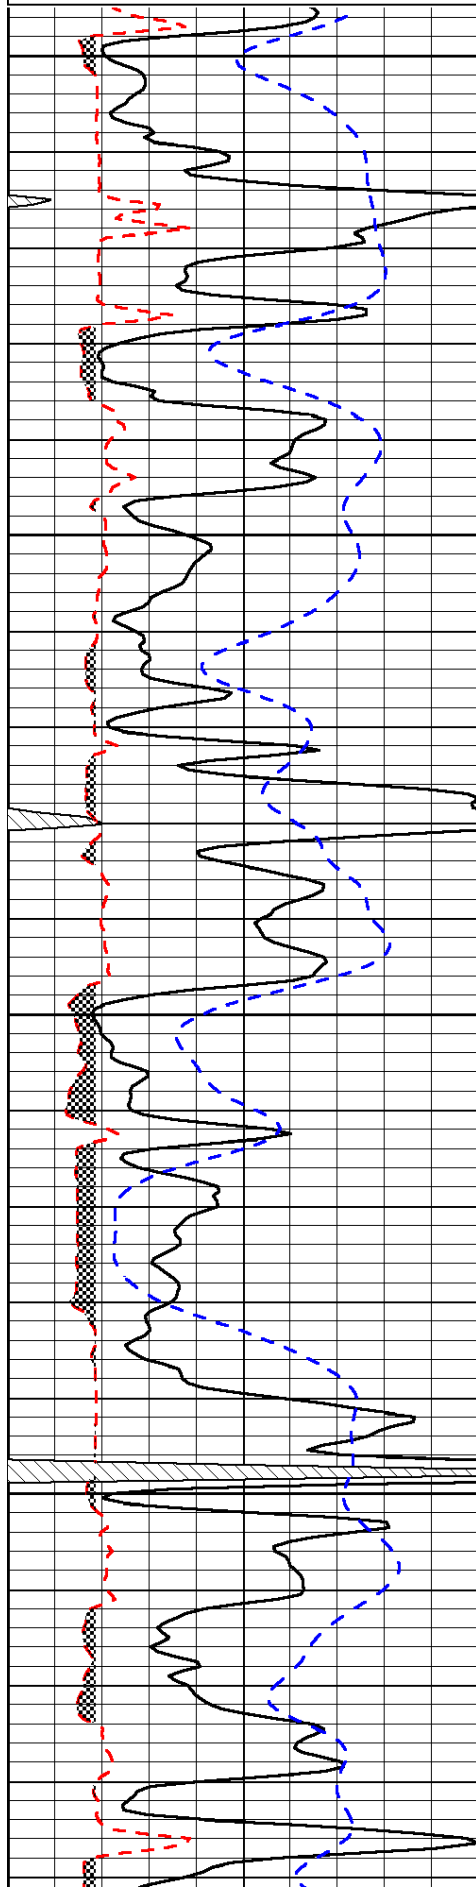


3600

3650

3700

3750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

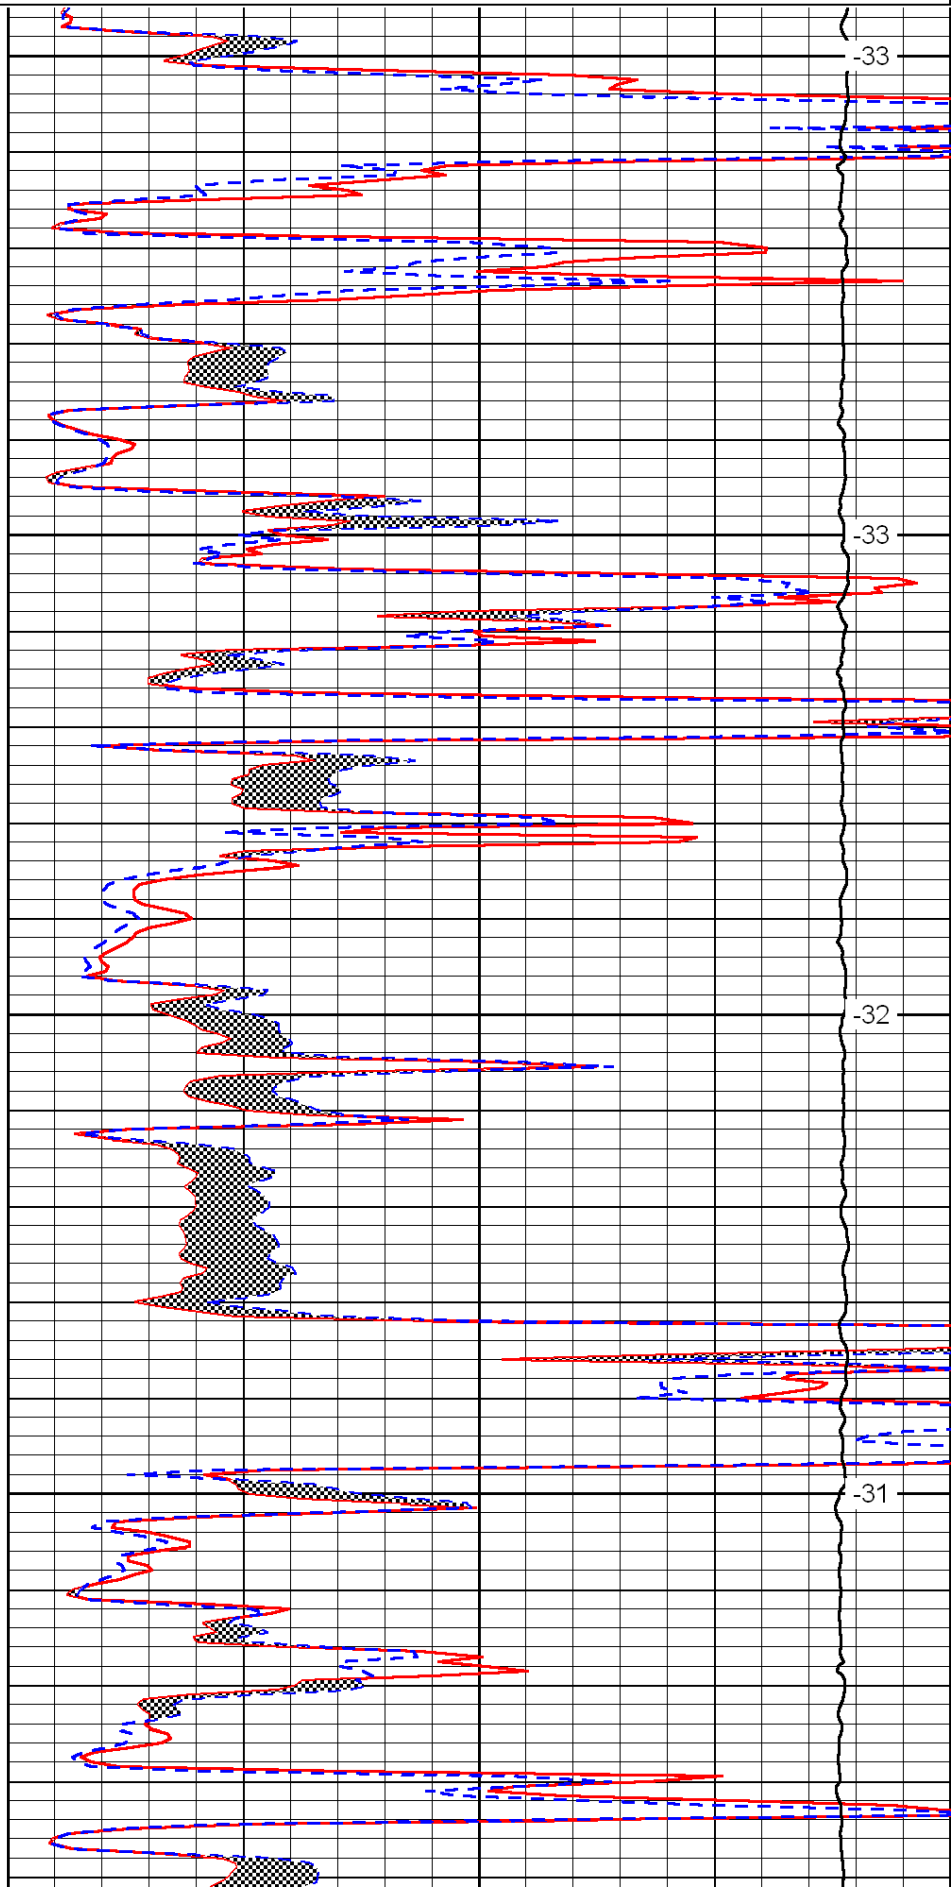



-33


-33

-32

-31

LSPD

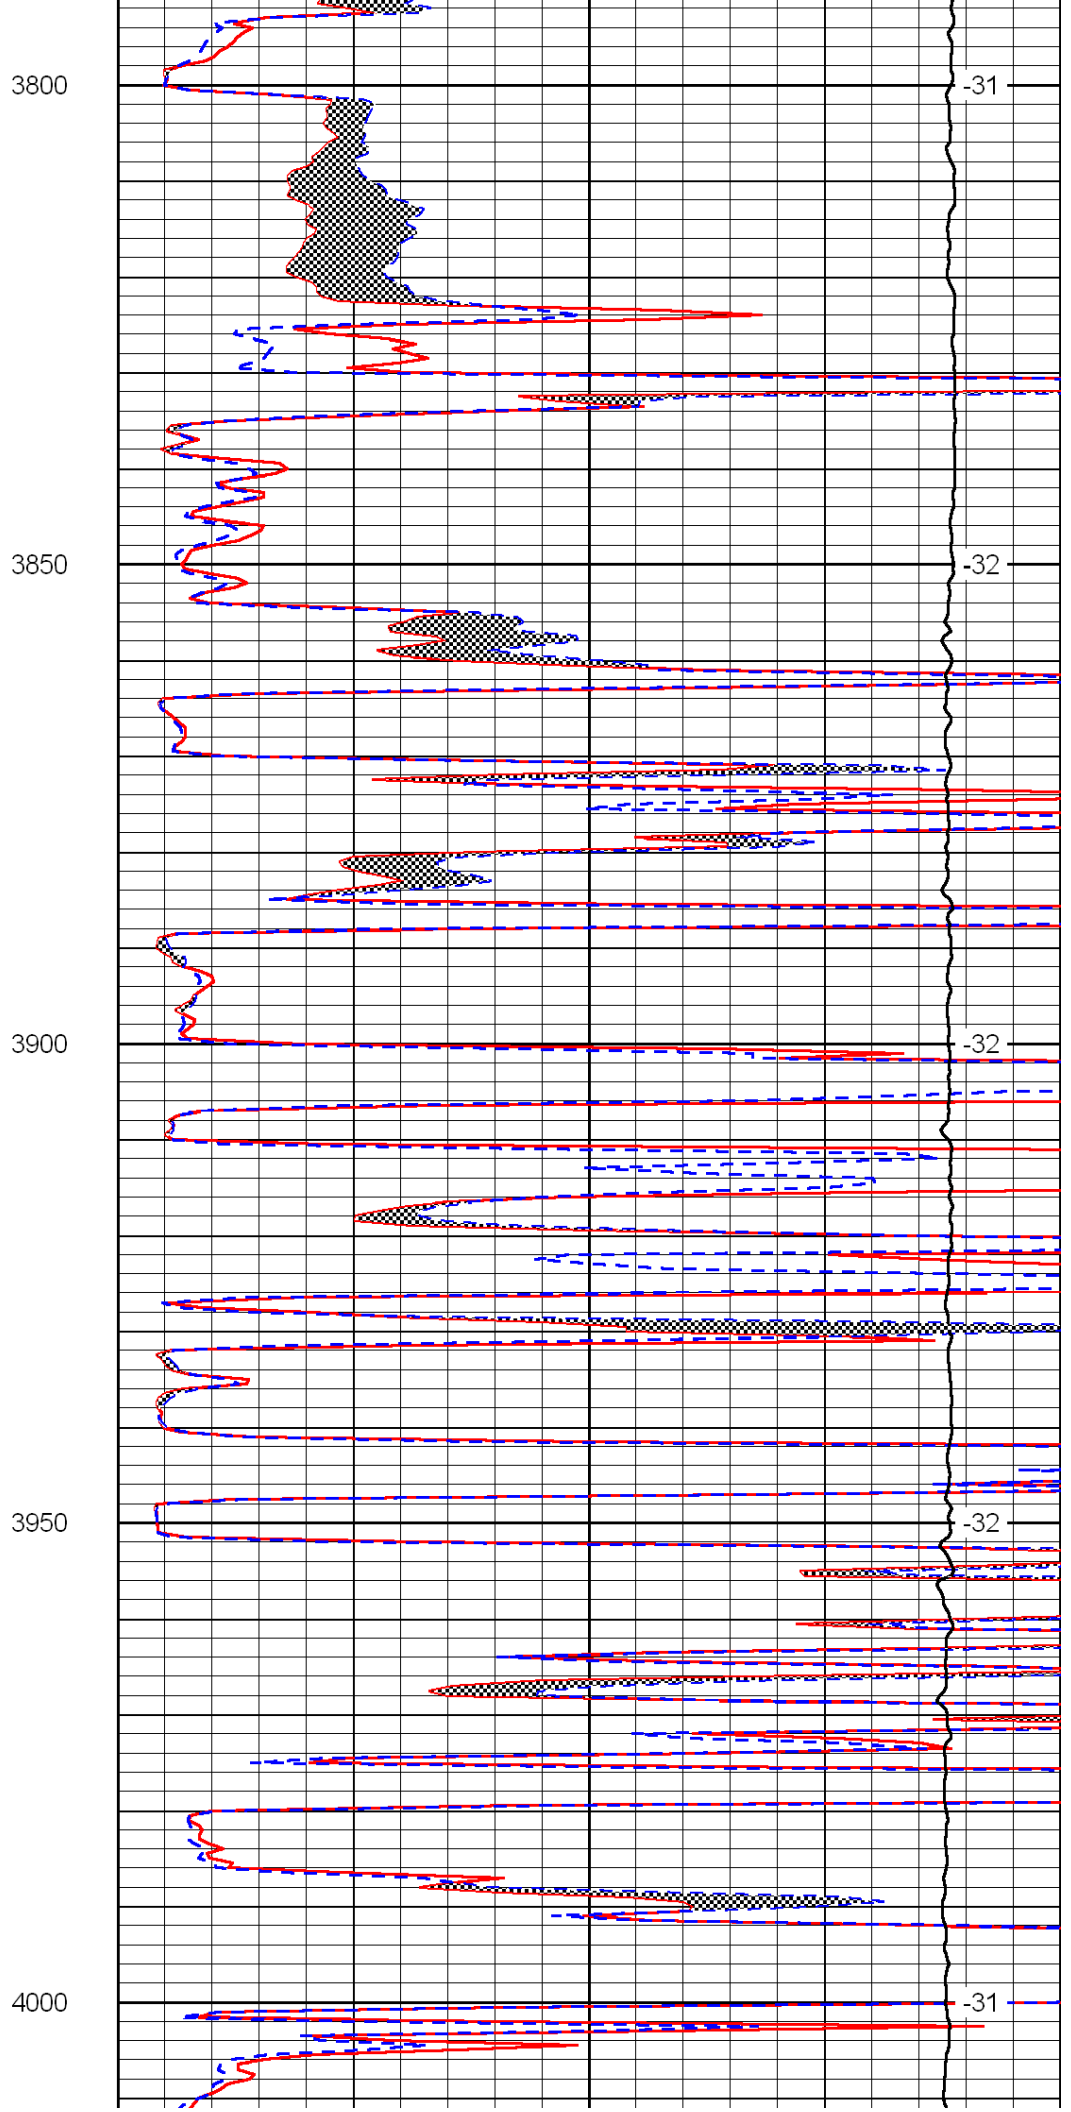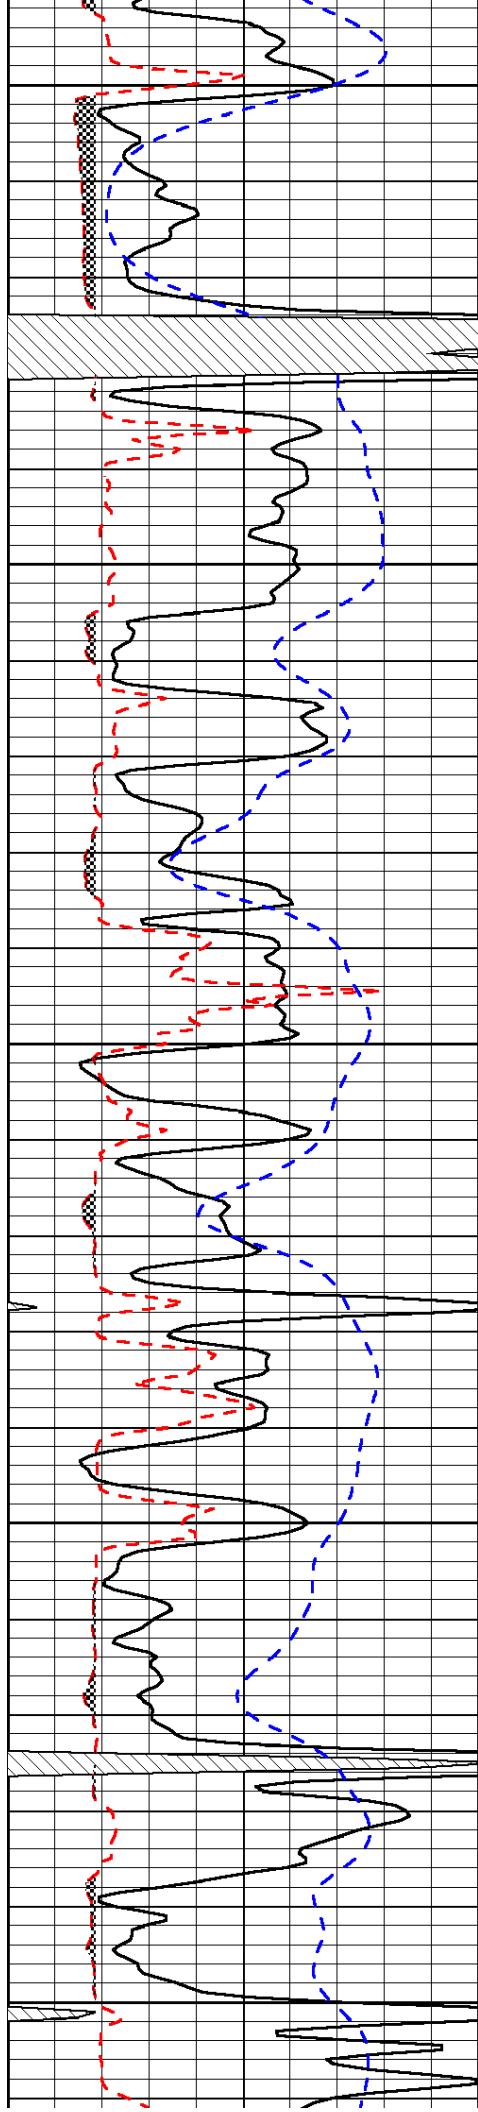


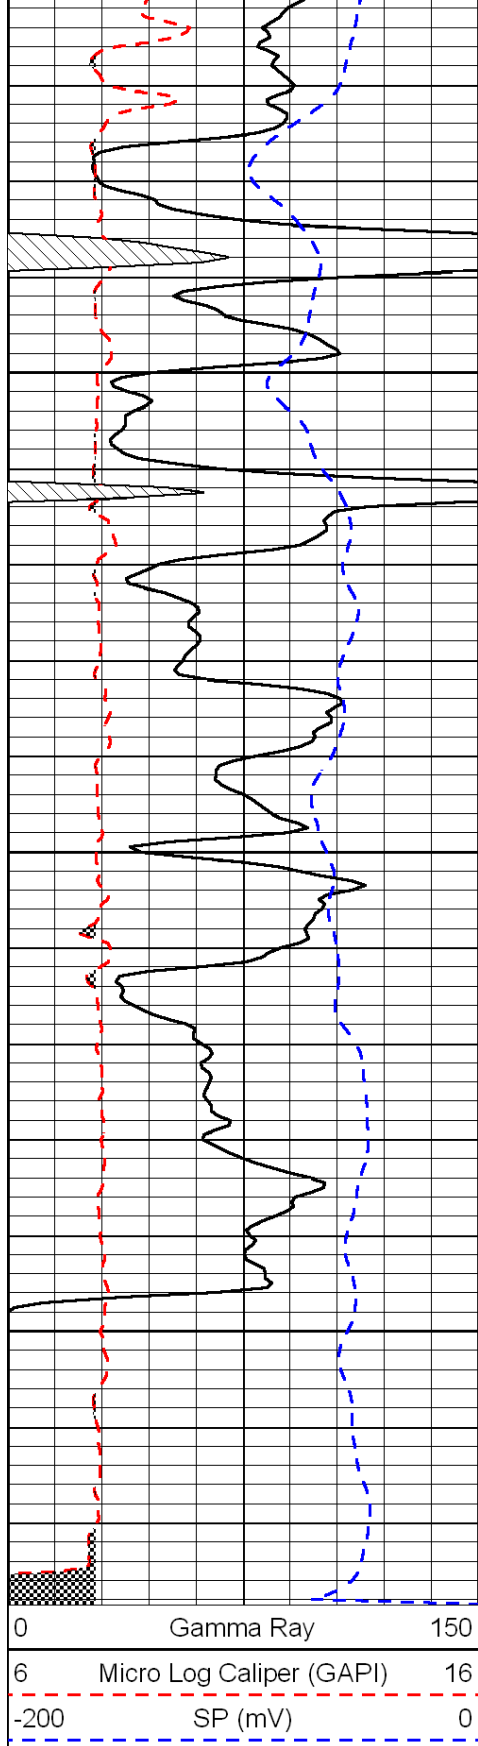

4050

4100

4150

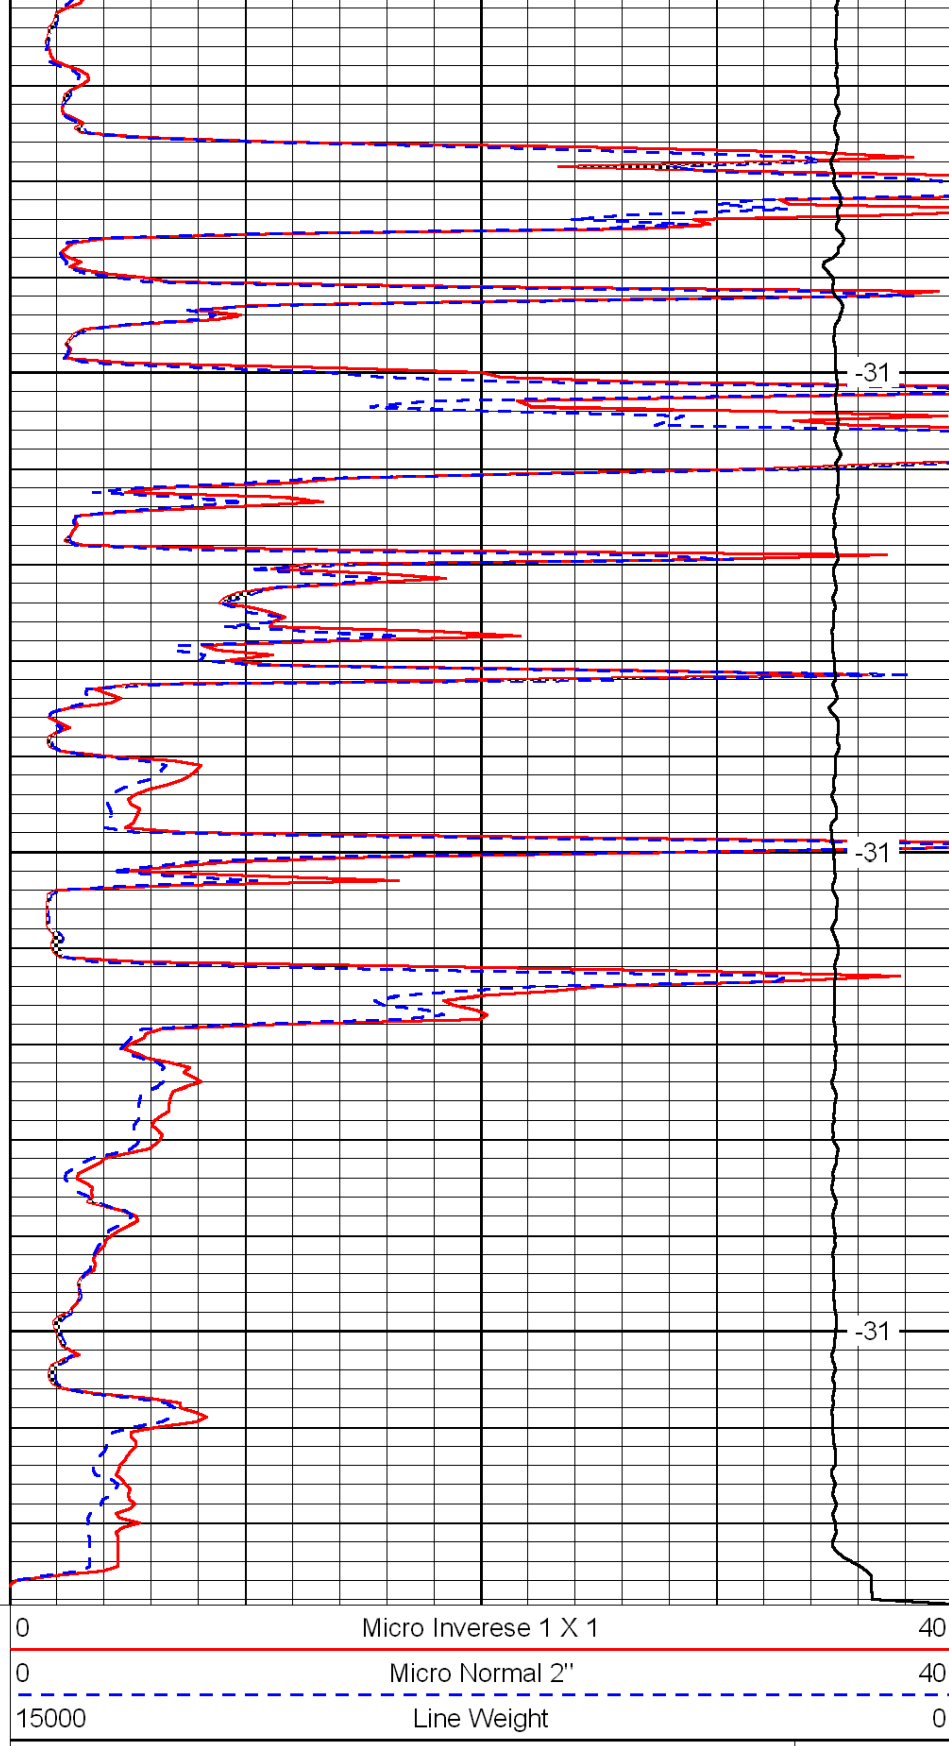

LSPD