


15-163-20231-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

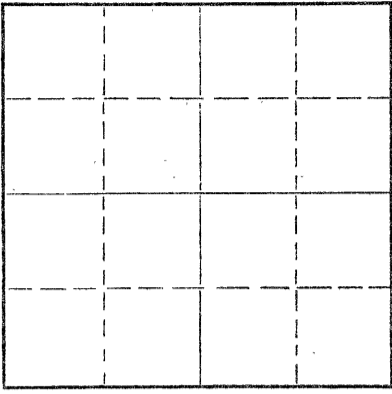

Locate well correctly on above
Section Plat

Rooks _____ County. Sec. 25 Twp. 6S Rge. (E) 18 (W)
Location as "NE/CNW/SW" or footage from lines NE NE NW
Lease Owner Solar Oil Co.
Lease Name Calhoon Well No. 1
Office Address 1117 Union Natl. Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed July 21, 1969
Application for plugging filed (Letter 7/24/69) July 21, 1969
Application for plugging approved July 21, 1969
Plugging commenced July 21, 1969
Plugging completed July 21, 1969
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3540 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	255'	8-5/8"	255'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 660 feet. Set first plug @ 660 feet w/70 sacks cement.
Filled hole with heavy mud to 240 feet. Set second plug @ 240 feet w/20 sacks cement.
Filled hole with heavy mud to 40 feet. Set third plug @ 40 feet w/10 sacks cement.
Cement pumped through drill pipe by Halliburton pump truck. Job complete @ 6:00 PM,
July 21, 1969


RECEIVED
STATE CORPORATION COMMISSION
JUL 25 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
James S. Sutton 11 (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James S. Sutton
830 Sutton Place, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 24 day of July, 19 69



Barbara J. Layton
Barbara J. Layton
Notary Public.

15-163-20231-0000

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG


CALHOON #1
NE NE NW Section 25-6S-18W
Rooks County, Kansas

Commenced: July 12, 1969
Completed: July 21, 1969

OPERATOR - Solar Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	255	Surface soil and shale	Ran 8 joints 8-5/8" casing, set @ 255' w/165 sacks cement.
255	650	Shale and sand	
650	880	Shale and sand	
880	1060	Dakota sand	
1060	1110	Shale and sand	
1110	1270	Shale and shells	
1270	1396	Shale	
1396	1428	Anhydrite	
1428	1907	Shale and shells	
1907	3020	Lime and shale	
3020	3100	Lime	
3100	3109	Lime and shale	
3109	3145	Heebner	
3145	3540	Lime	
3540	TD		Dry and abandoned.

I, JAMES S. SUTTON II, certify this is a correct copy of the Drillers' Log for the well drilled in the NE NE NW Section 25-6S-18W, Rooks County, Kansas, to the best of my knowledge and belief.

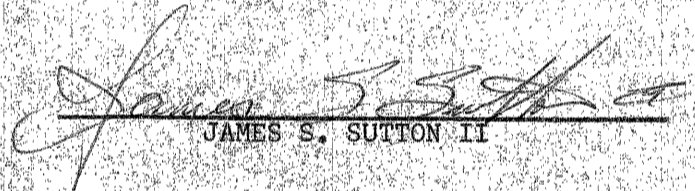

JAMES S. SUTTON II


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 24 day of July, 1969, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.


Barbara J. Layton, Notary Public



RECEIVED
STATE CORPORATION COMMISSION
JUL 25 1969
CONSERVATION DIVISION
Wichita, Kansas

7-25-69