



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-057-20,708-00-00

Company American Warrior, Inc.

Well Burke No.1-27

Field Wildcat

County Ford State Kansas

Location 175' FSL & 1100' FEL

Sec: 27 Twp: 25S Rge: 21W

Permanent Datum Ground Level Elevation 2324
Log Measured From Kelly Bushing 11 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Elevation

K.B. 2335
D.F. 2324
G.L. 2324

Other Services
CNL/CDL
DIL

Date 12/7/2010

Run Number Two

Depth Driller 4900

Depth Logger 4905

Bottom Logged Interval 4904

Top Log Interval 3800

Casing Driller 8.625 @ 276

Casing Logger 277

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity,ppm CL 8.800

Density / Viscosity 9.55 59

pH / Fluid Loss 10.0 15.6

Source of Sample Flowline

Rm @ Meas. Temp .42 @ 54

Rmf @ Meas. Temp .32 @ 54

Rmc @ Meas. Temp .57 @ 54

Source of Rmf / Rmc Charts

Rm @ BHT .18 @ 125

Operating Rig Time 4 Hours

Max Rec. Temp. F 125

Equipment Number 15

Location Hays

Recorded By C. Desaire

Witnessed By Harley Sayles

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858



Offerle, 2 1/2 W,
3 S, 1/4 W, N Into


Charted by: Depth in Feet scaled 1:2.15

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

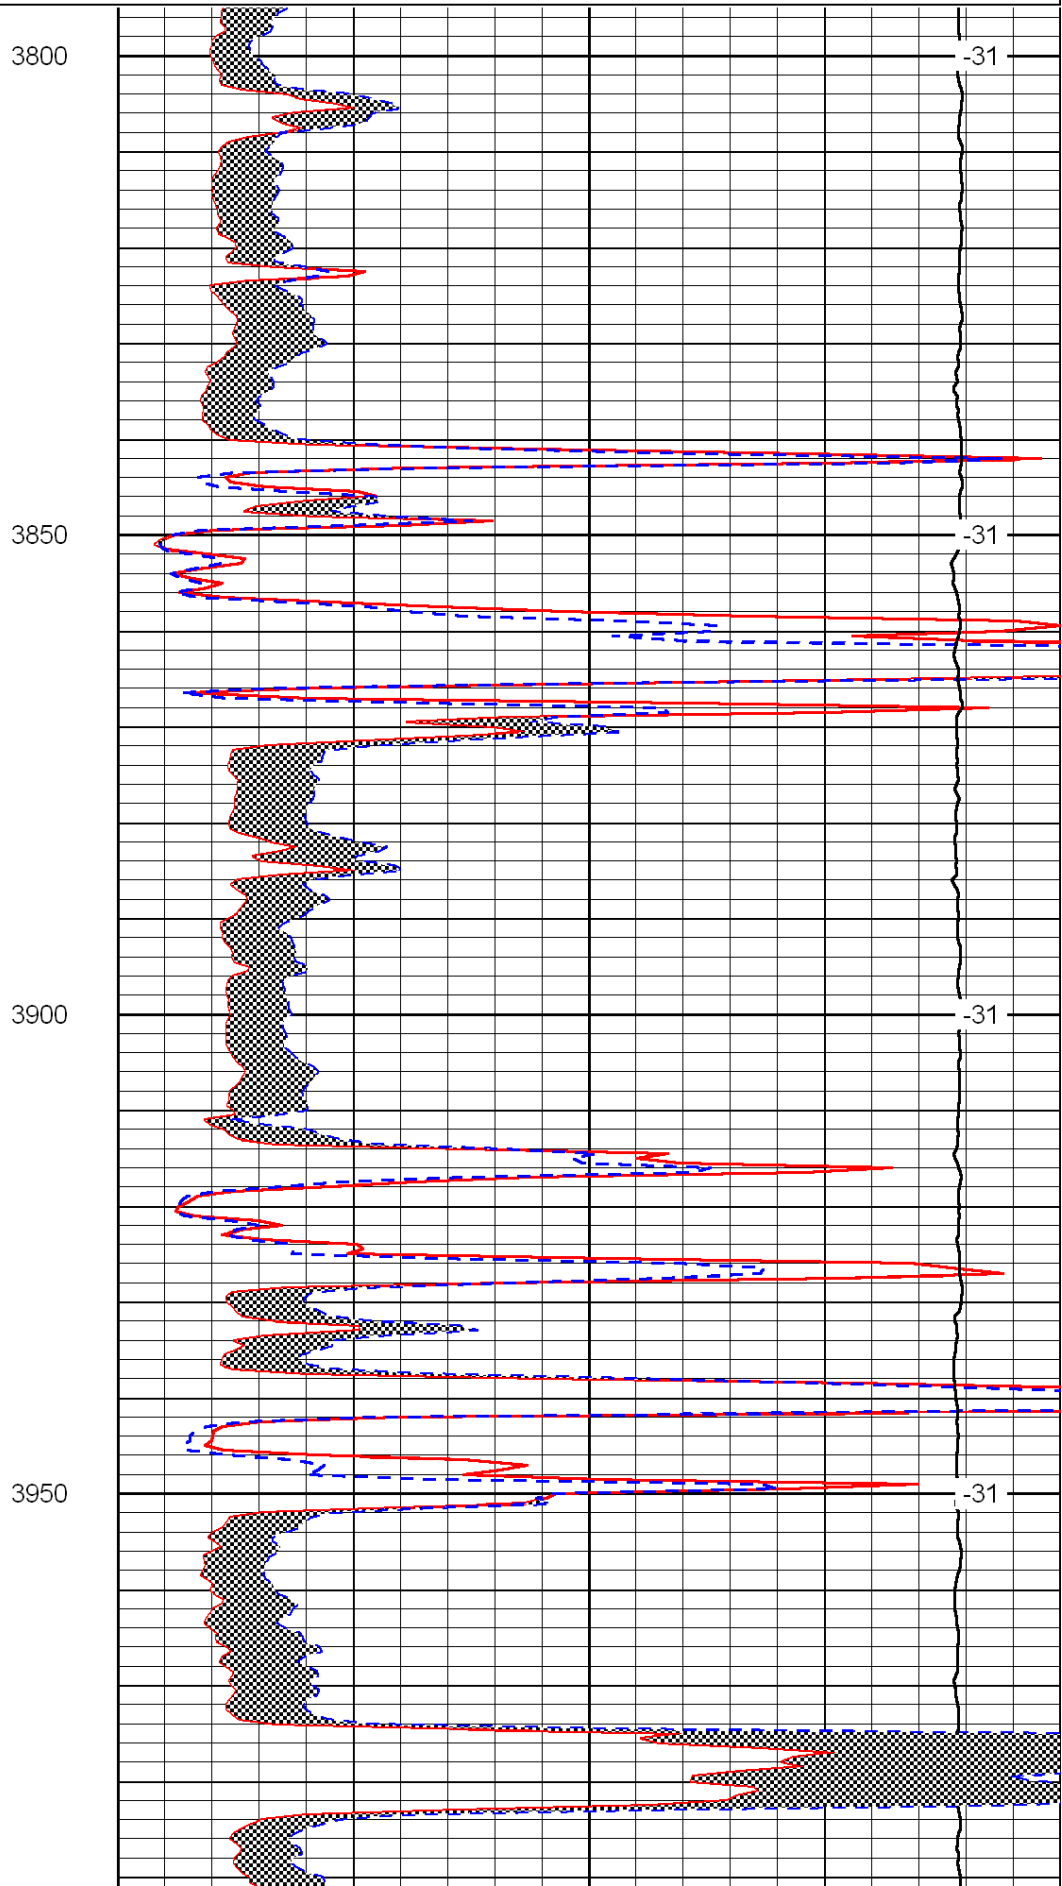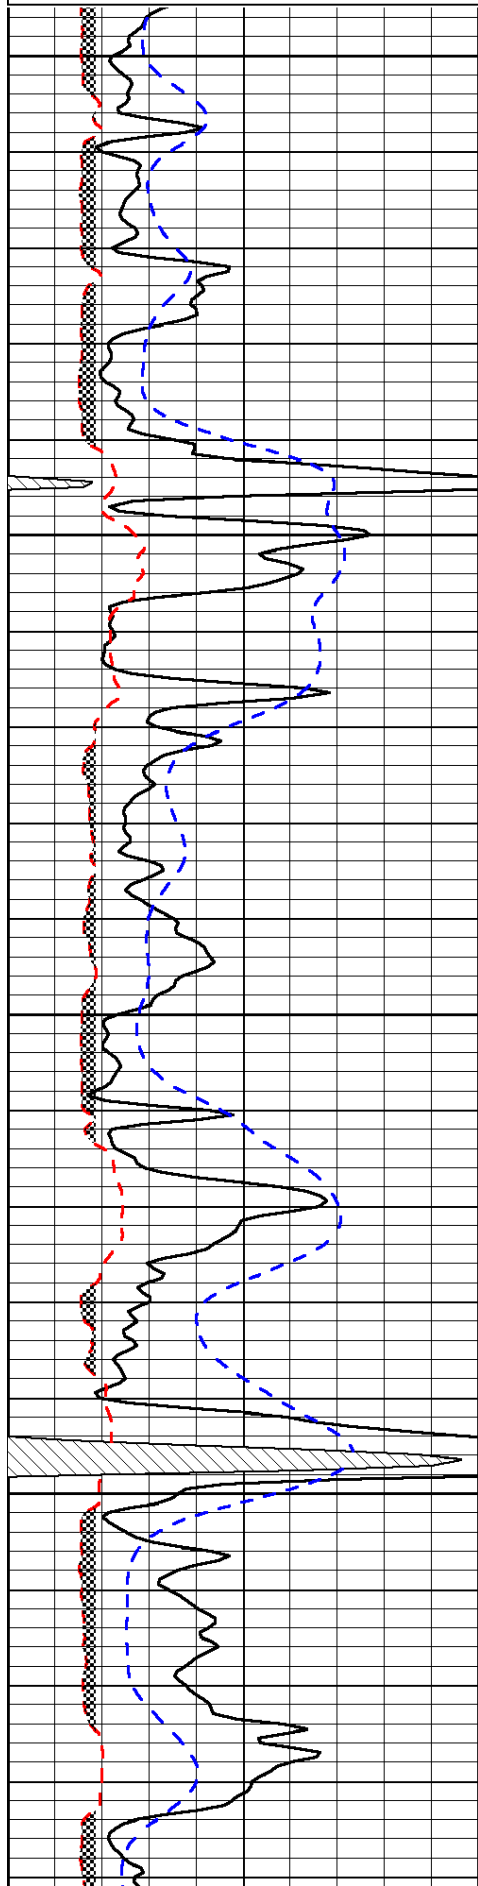

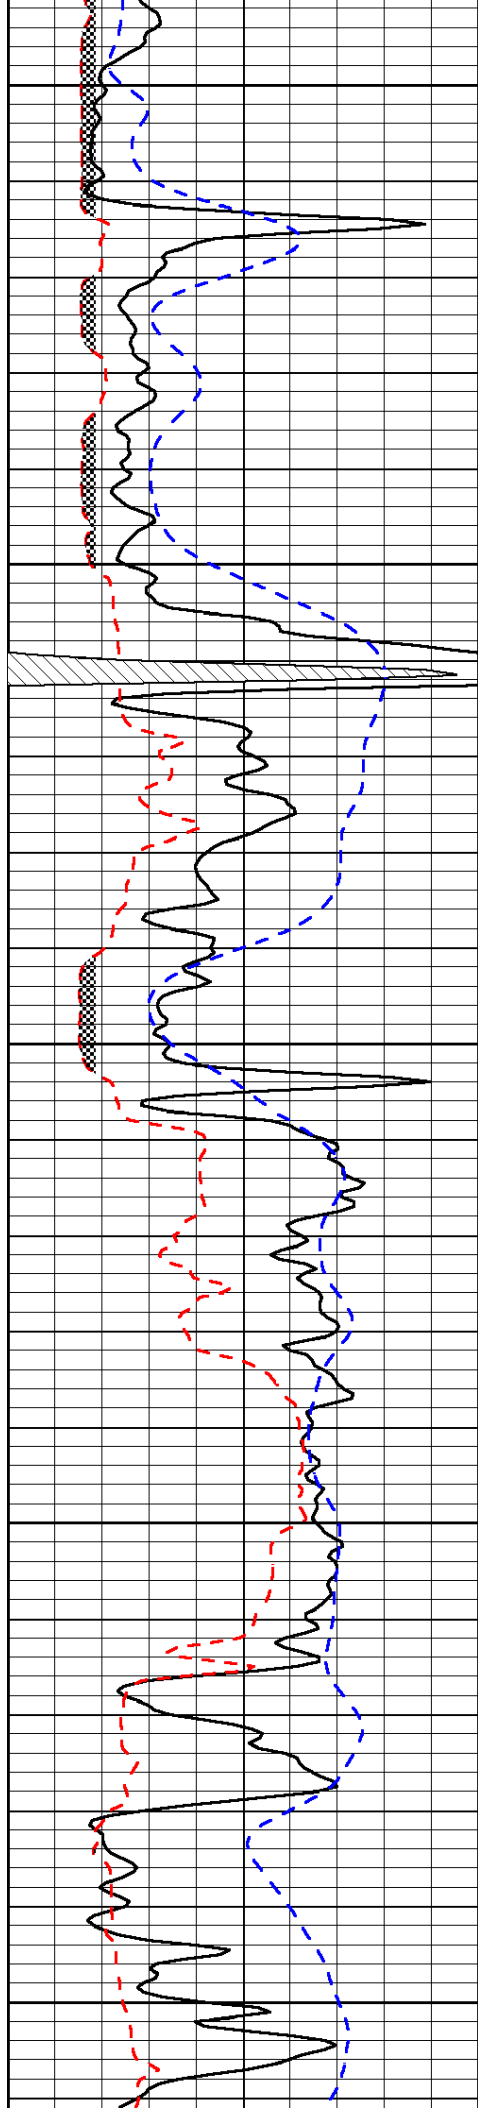


4000

4050

4100

4150

4200

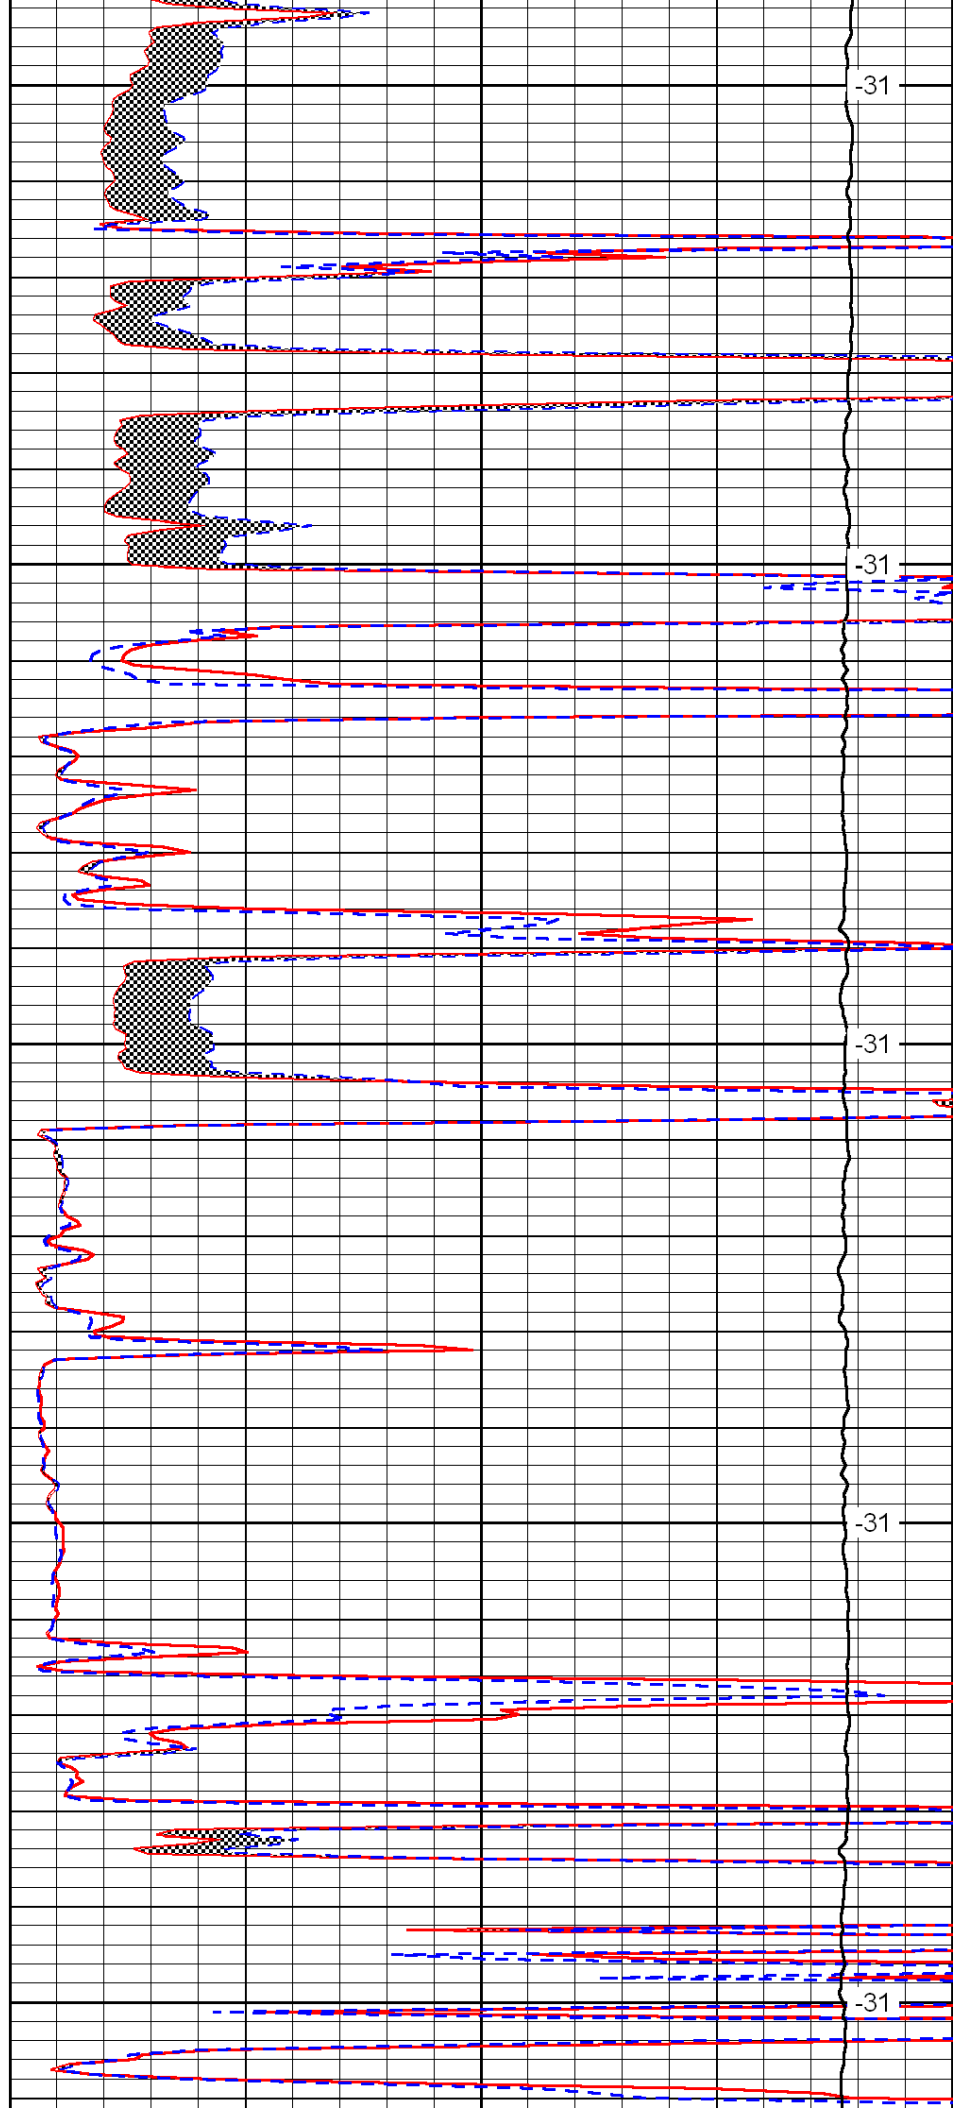


-31

-31

-31

-31

-31

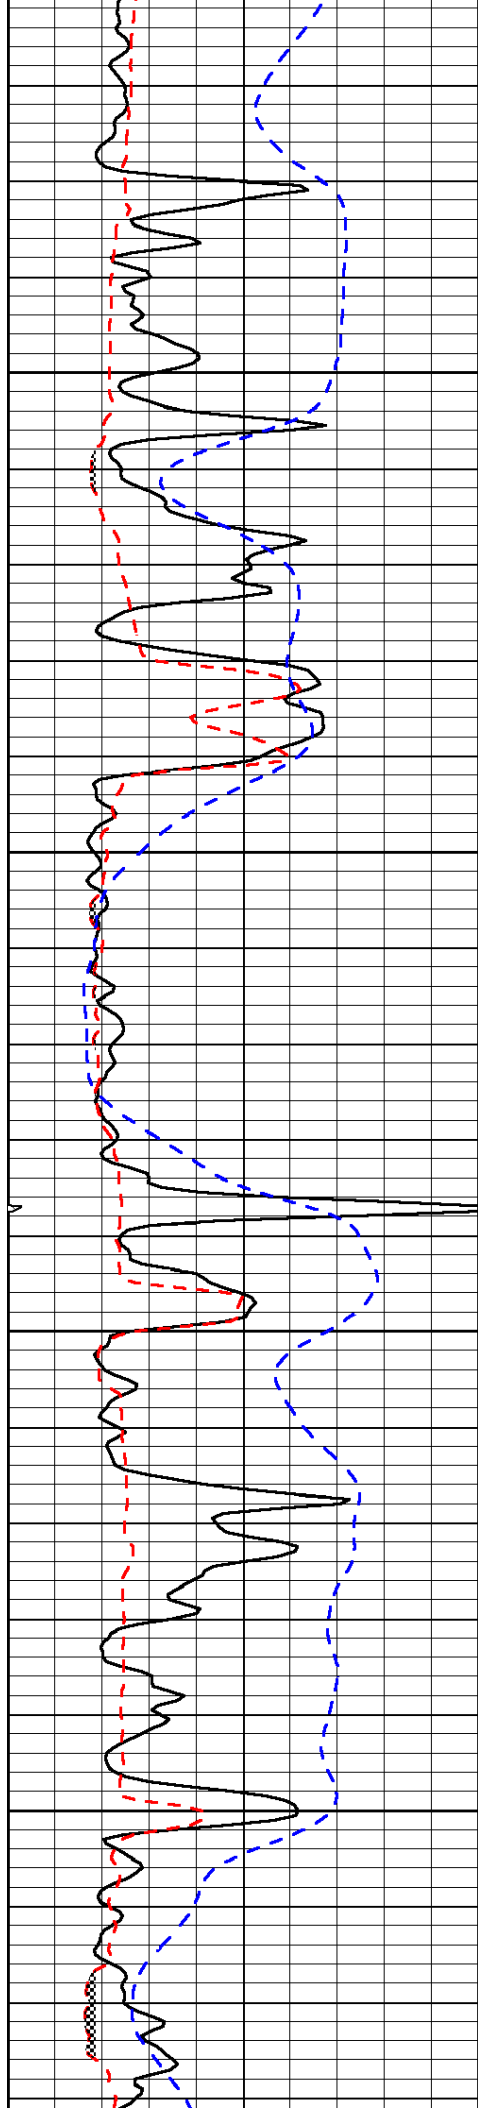



4250

4300

4350

4400

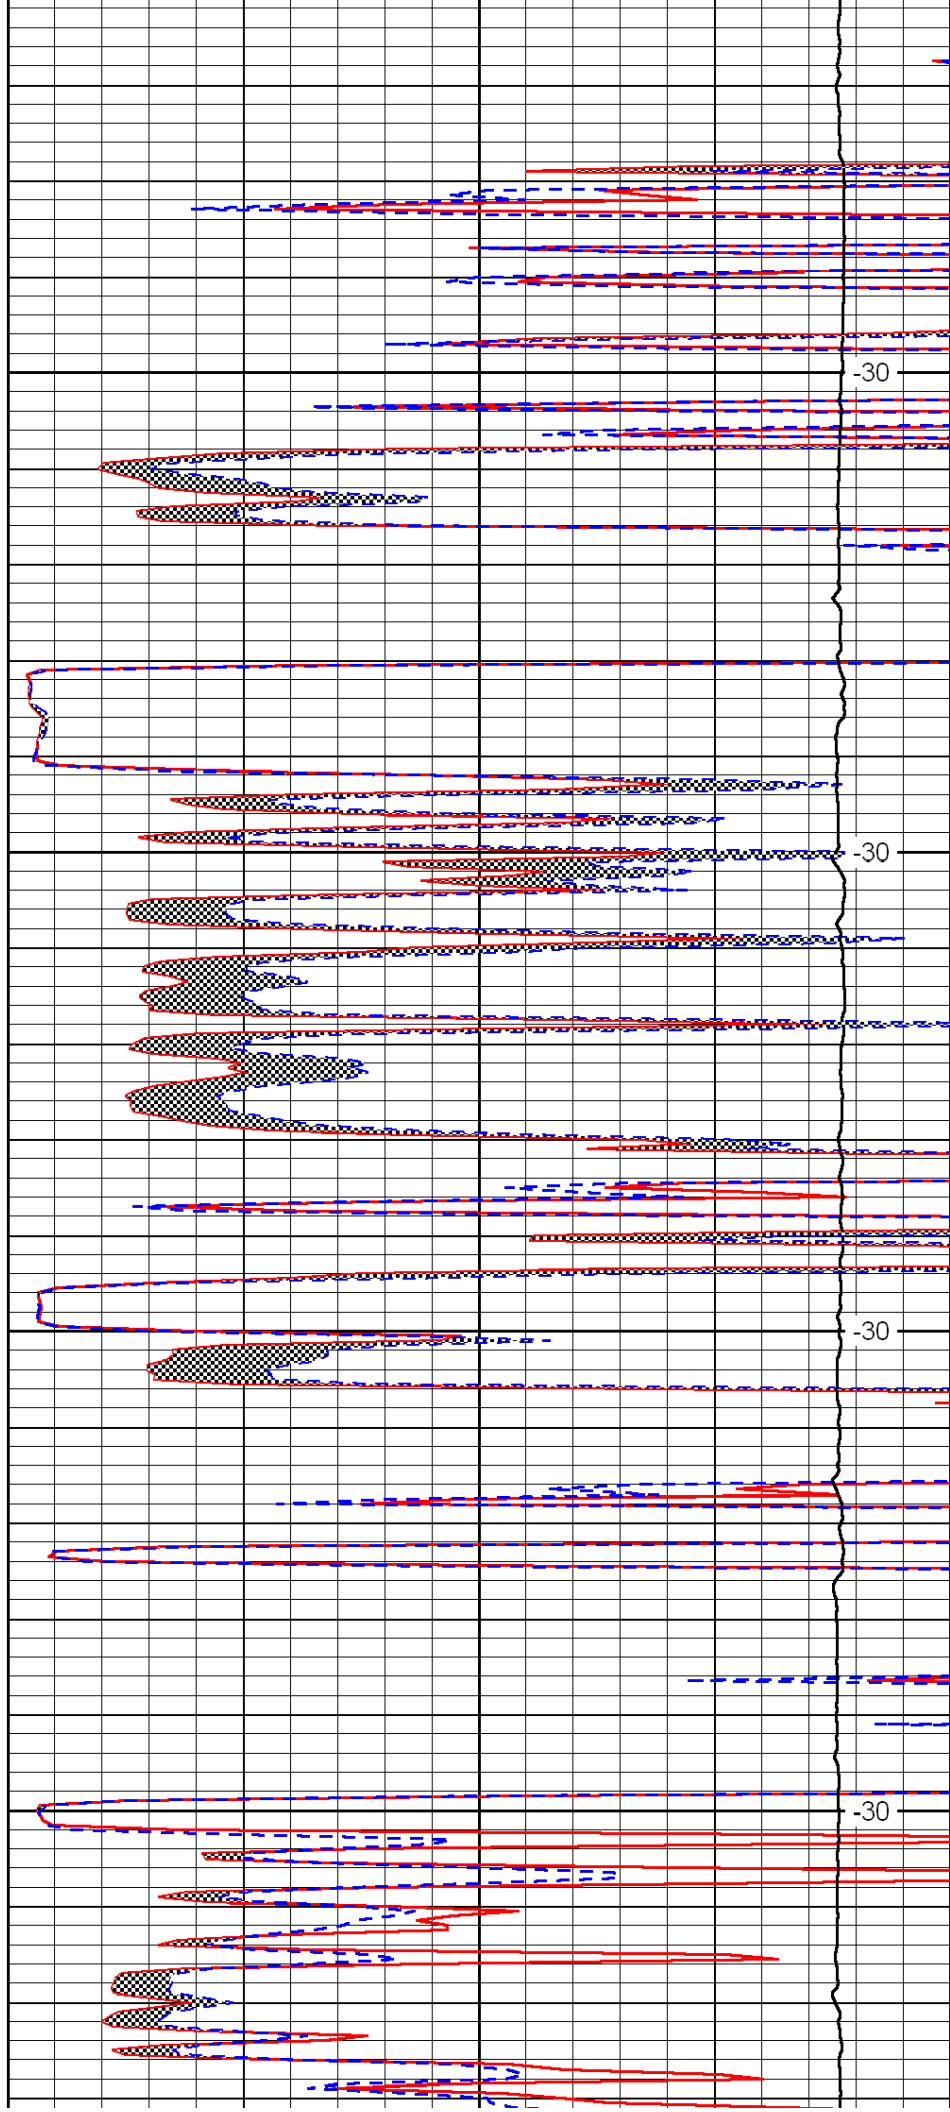

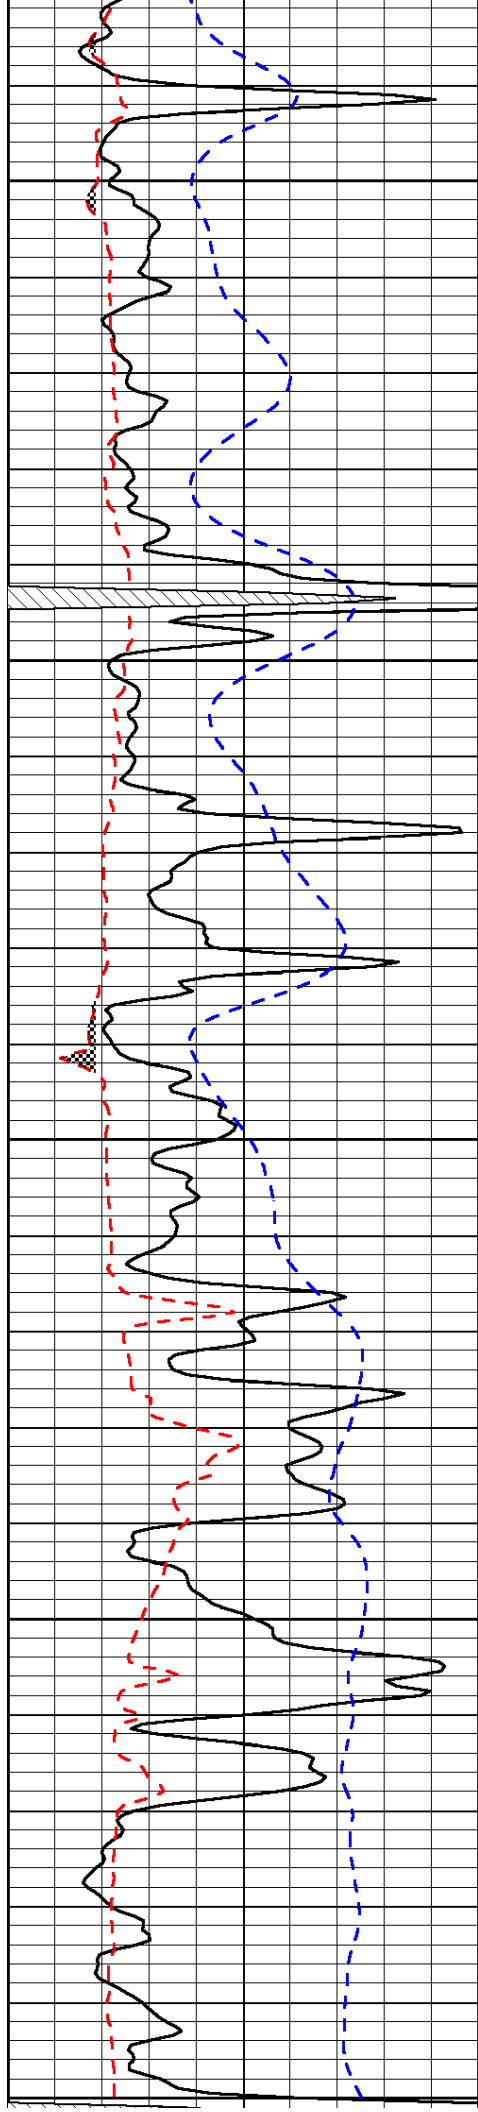


4450

4500

4550

4600

4650

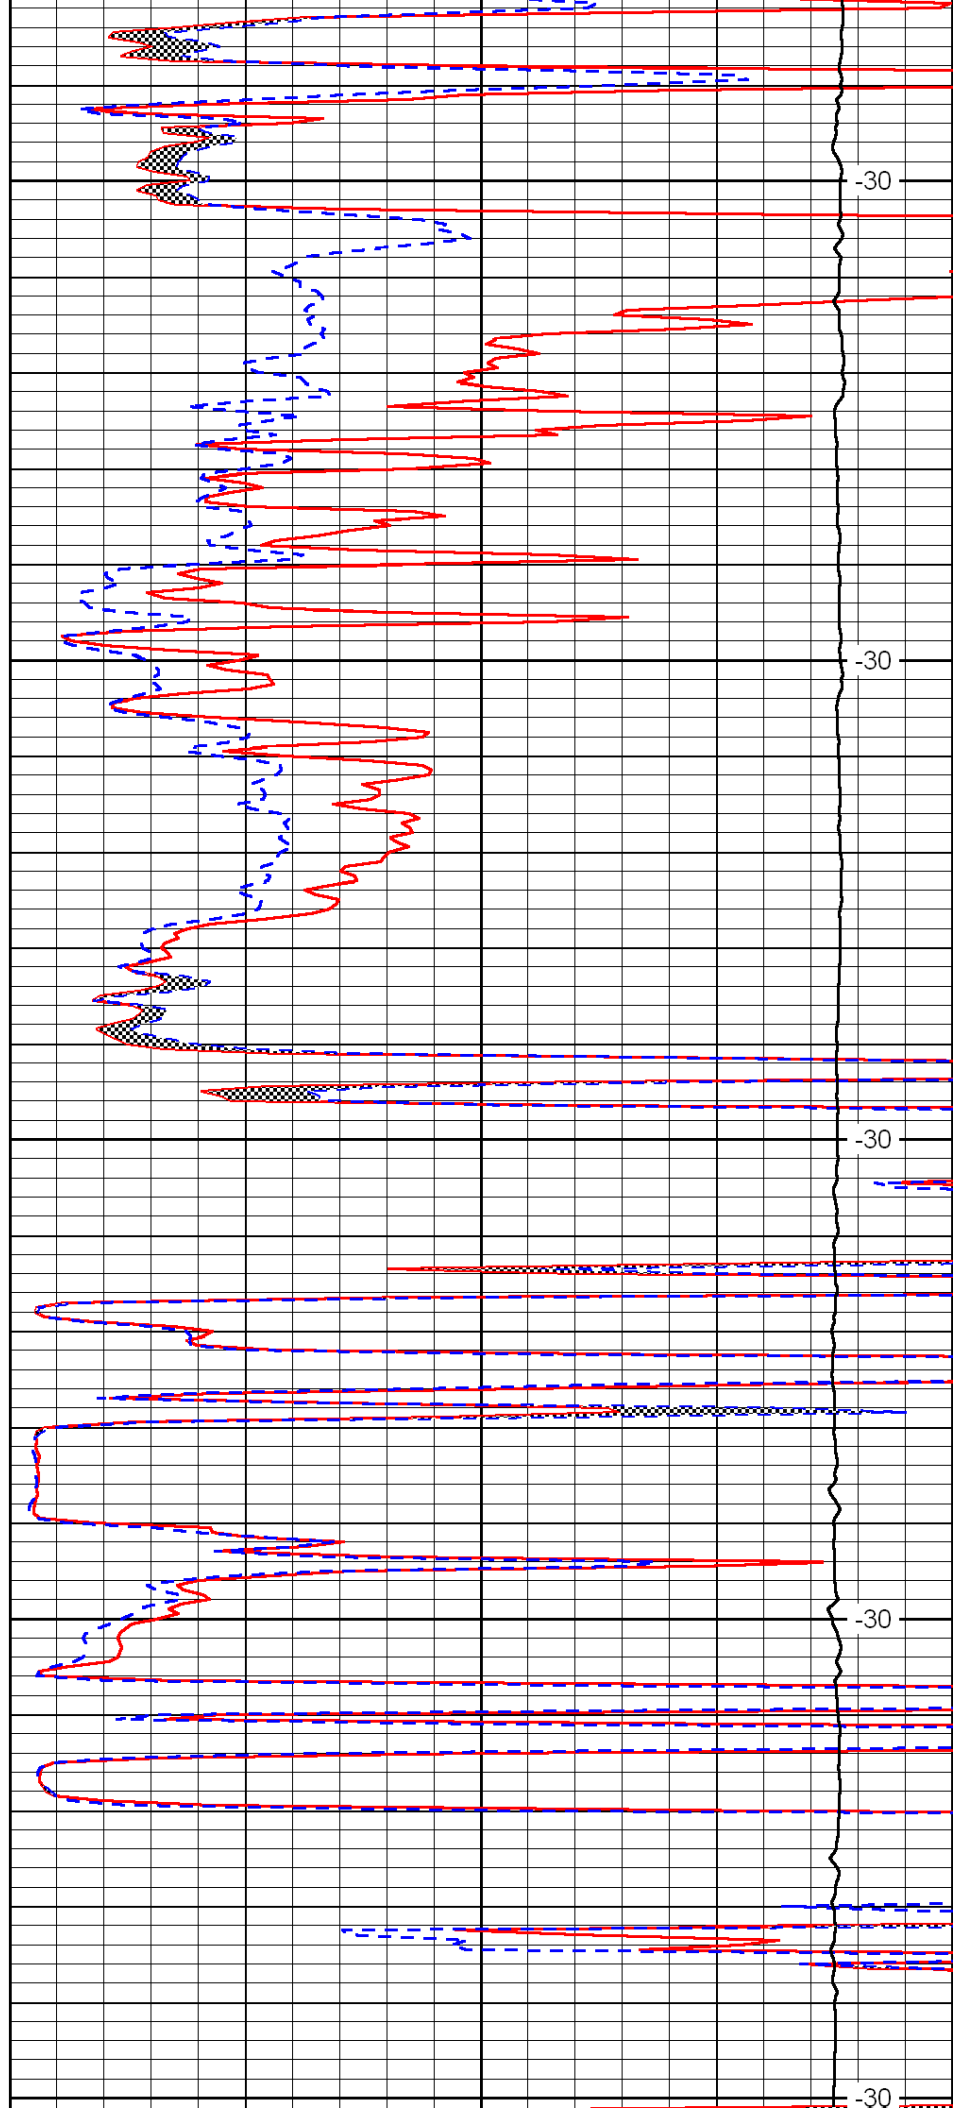


-30

-30

-30

-30

-30

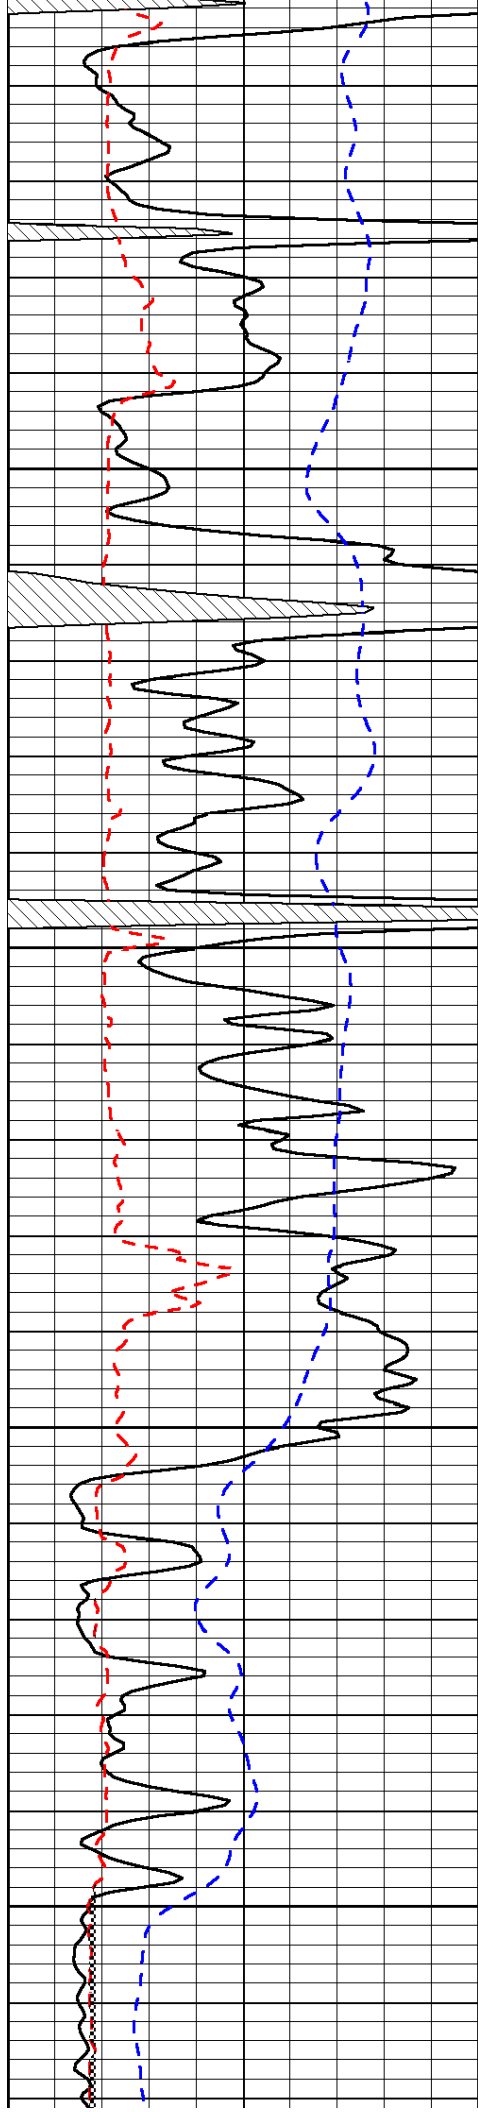


4700

4750

4800

4850

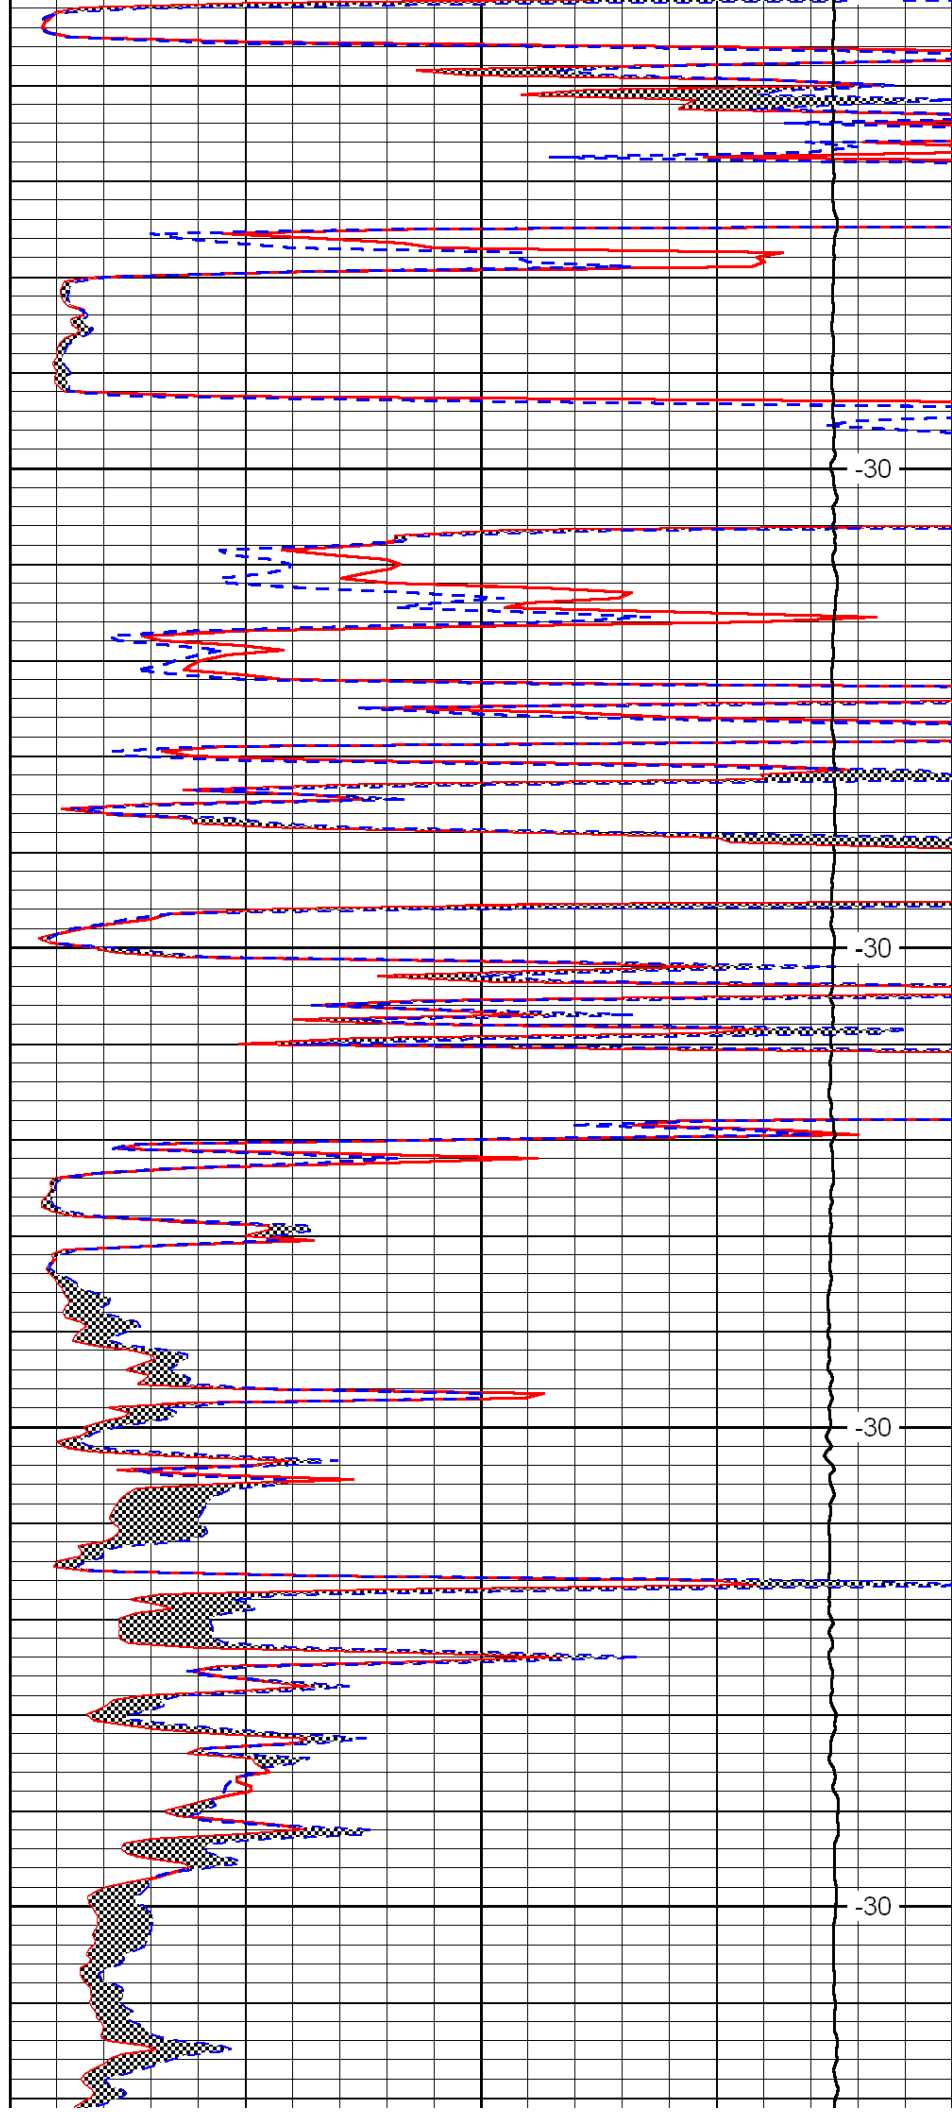

-30

-30

-30

-30

