

LOG-TECH



Microresistivity Log

DIGITAL LOG

(785) 625-3858

15-135-25,190-00-00

Company F.G. Holl Company, L.L.C.

Well Walker No.1-28

Field Wildcat

County Ness State Kansas

Location NW SE NW
1650' FNL & 1650' FWL

Sec: 28 Twp: 16S Rge: 22W

Permanent Datum Ground Level Elevation 2391

Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum

Dilling Measured From Kelly Bushing

Other Services
CNL/CDL
DIL/BHCS
Elevation
K.B. 2399
D.F.
G.L. 2391

Date 11/28/2010

Run Number Two

Depth Driller 4750

Depth Logger 4754

Bottom Logged Interval 4753

Top Log Interval 2450

Casing Driller 8.625 @ 280

Casing Logger 280

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 4.900

Density / Viscosity 9.3 52

pH / Fluid Loss 10.0 7.6

Source of Sample Flowline

Rm @ Meas. Temp .6 @ 50

Rmf @ Meas. Temp .45 @ 50

Rmc @ Meas. Temp .81 @ 50

Source of Rmf / Rmc Charts

Rm @ BHT .24 @ 124

Operating Rig Time 6 Hours

Max Rec. Temp. F 124

Equipment Number 4

Location Hays

Recorded By C. Desaire

Witnessed By Rene Husted

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Brownell, 1 1/2 W, 1/2 S, E Into

Database File: fghd.db
Dataset Pathname: dil/fgstk
Presentation Format: micro
Dataset Creation: Sun Nov 28 06:29:24 2010
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

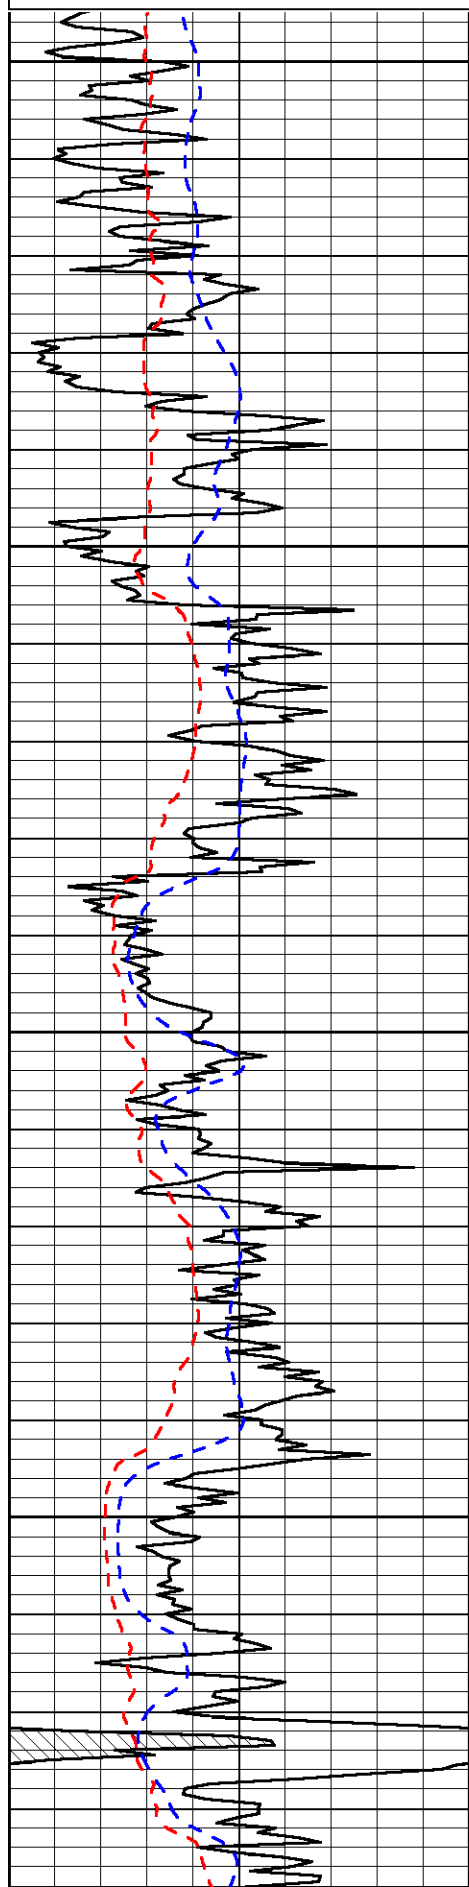


2450

2500

2550

2600

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0
		LSPD


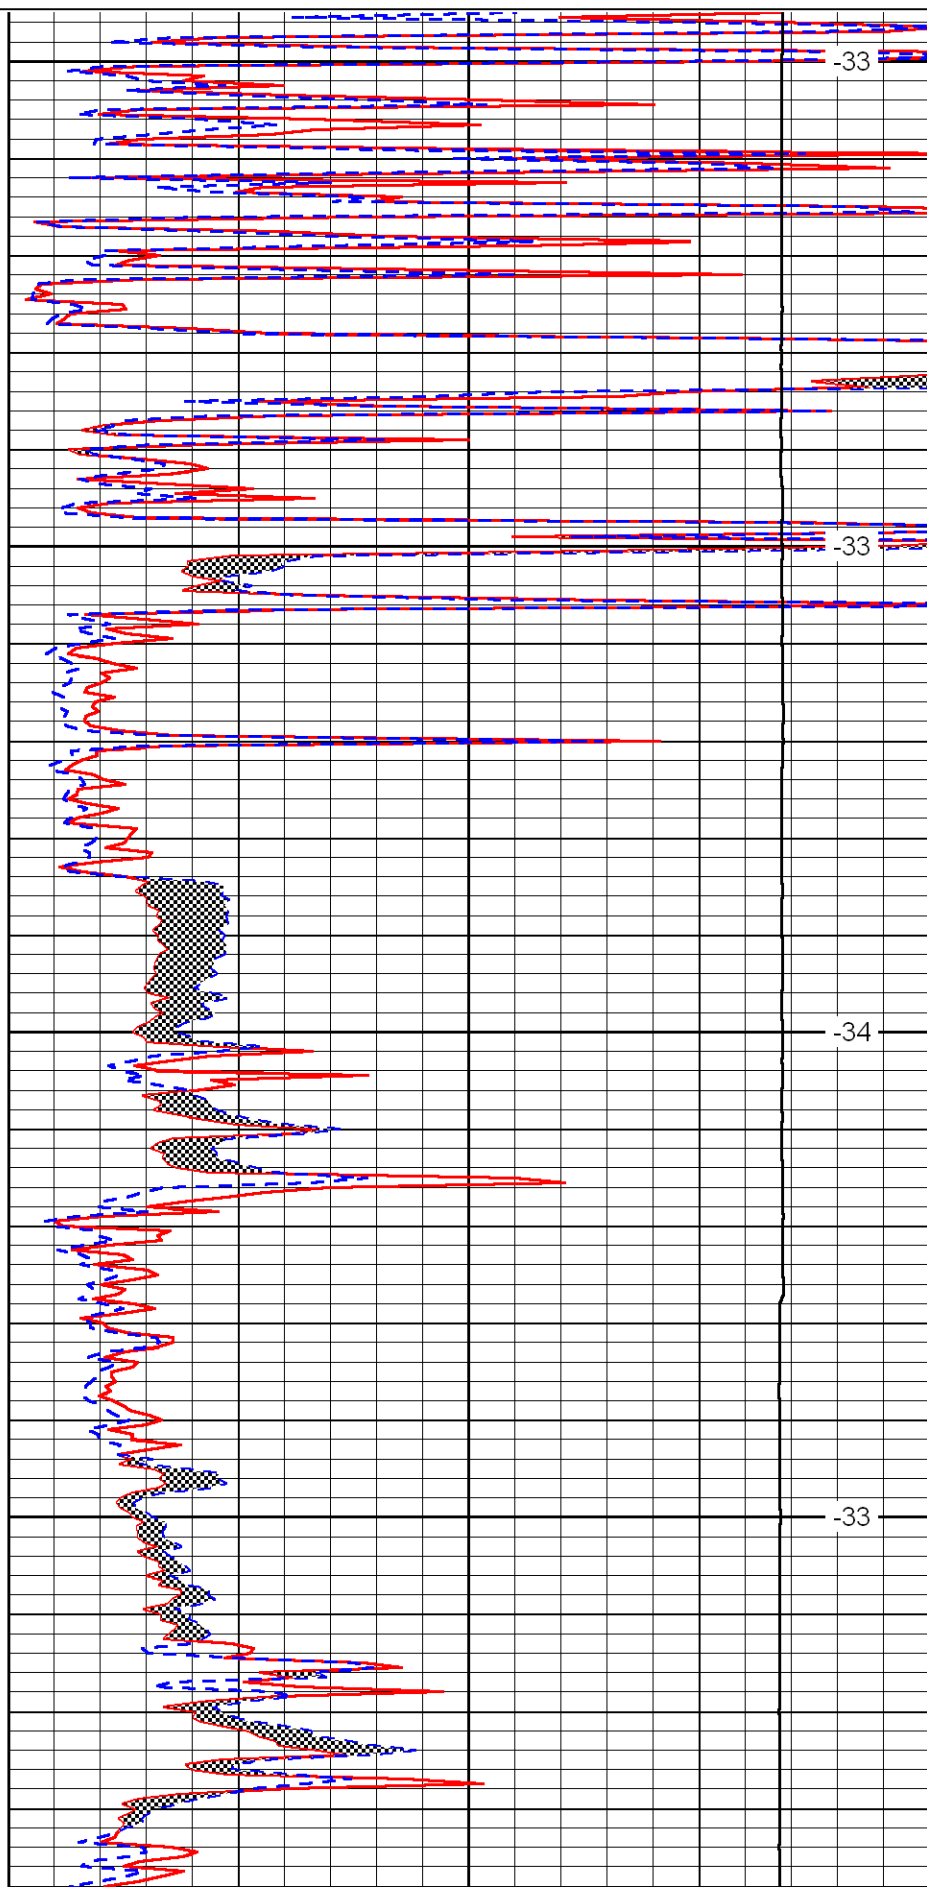




-33


-33

-34

-33

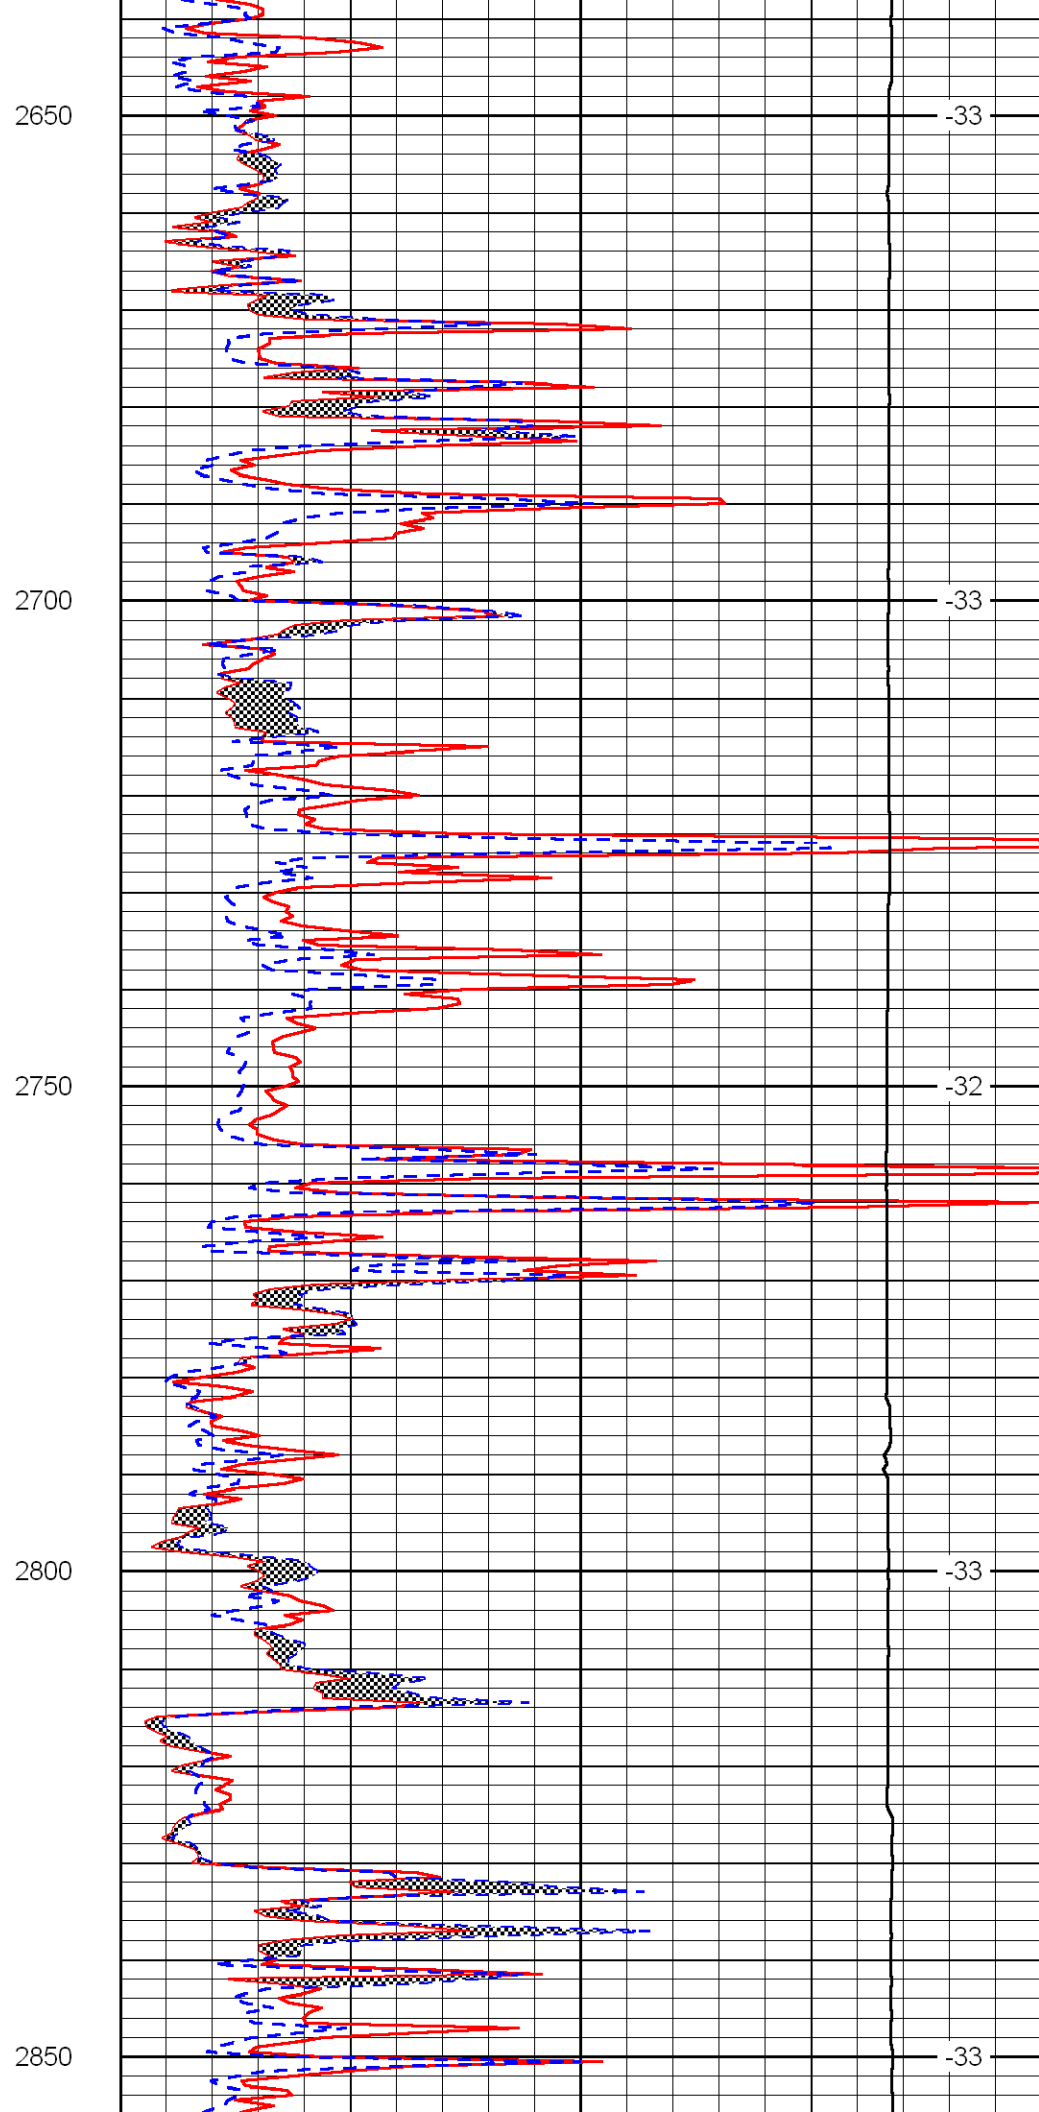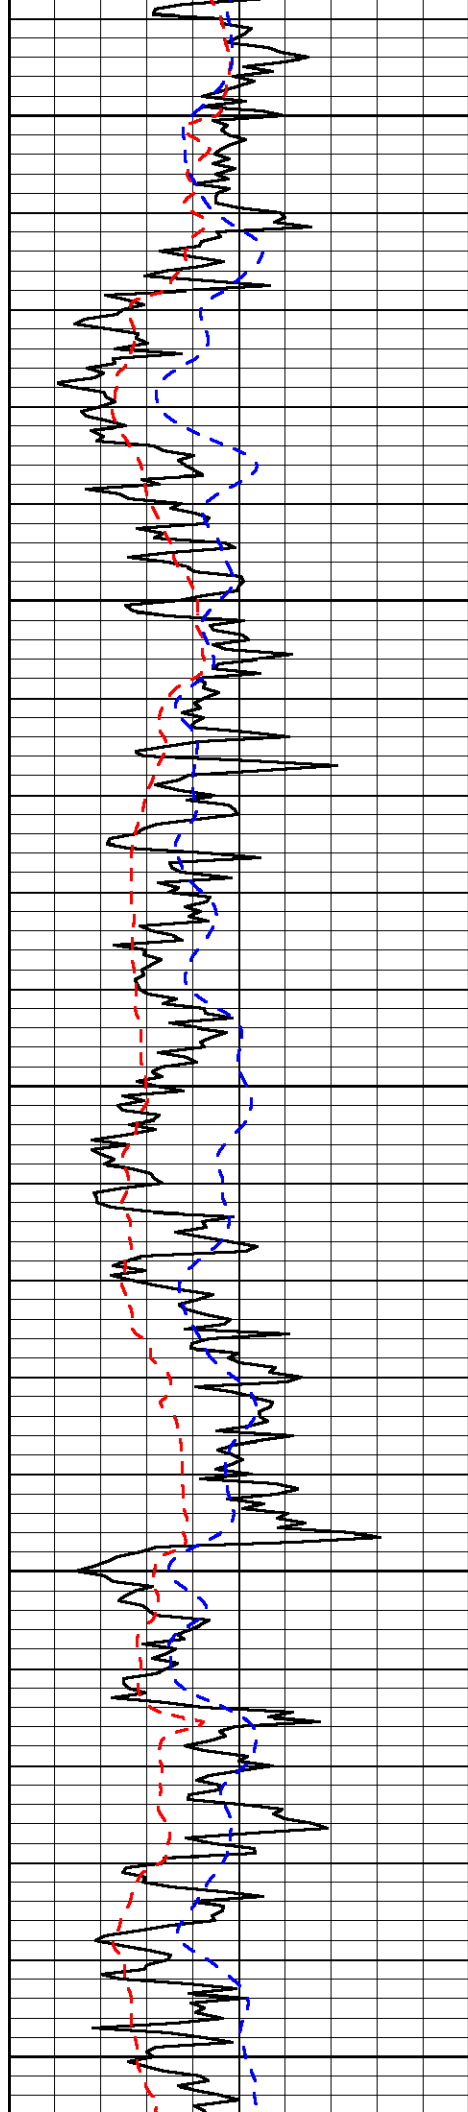

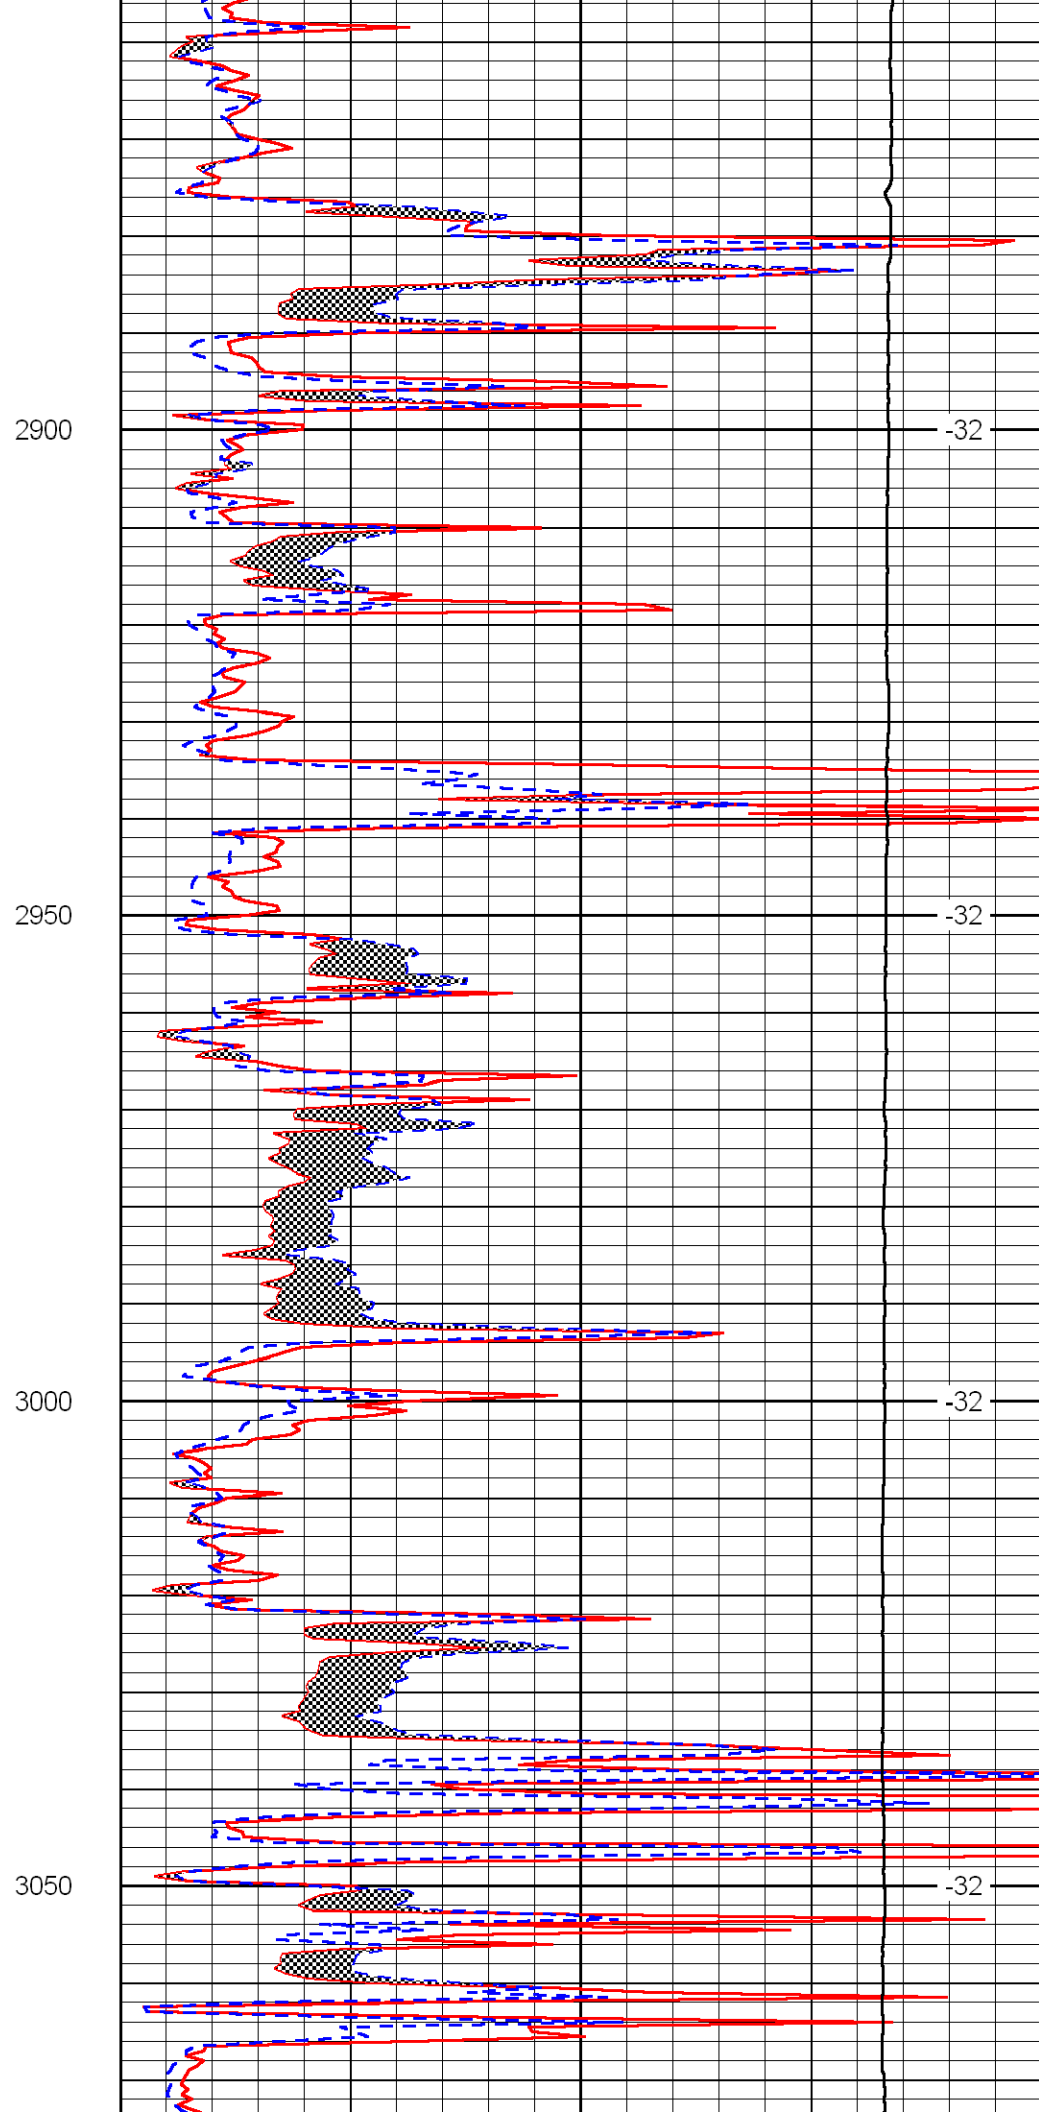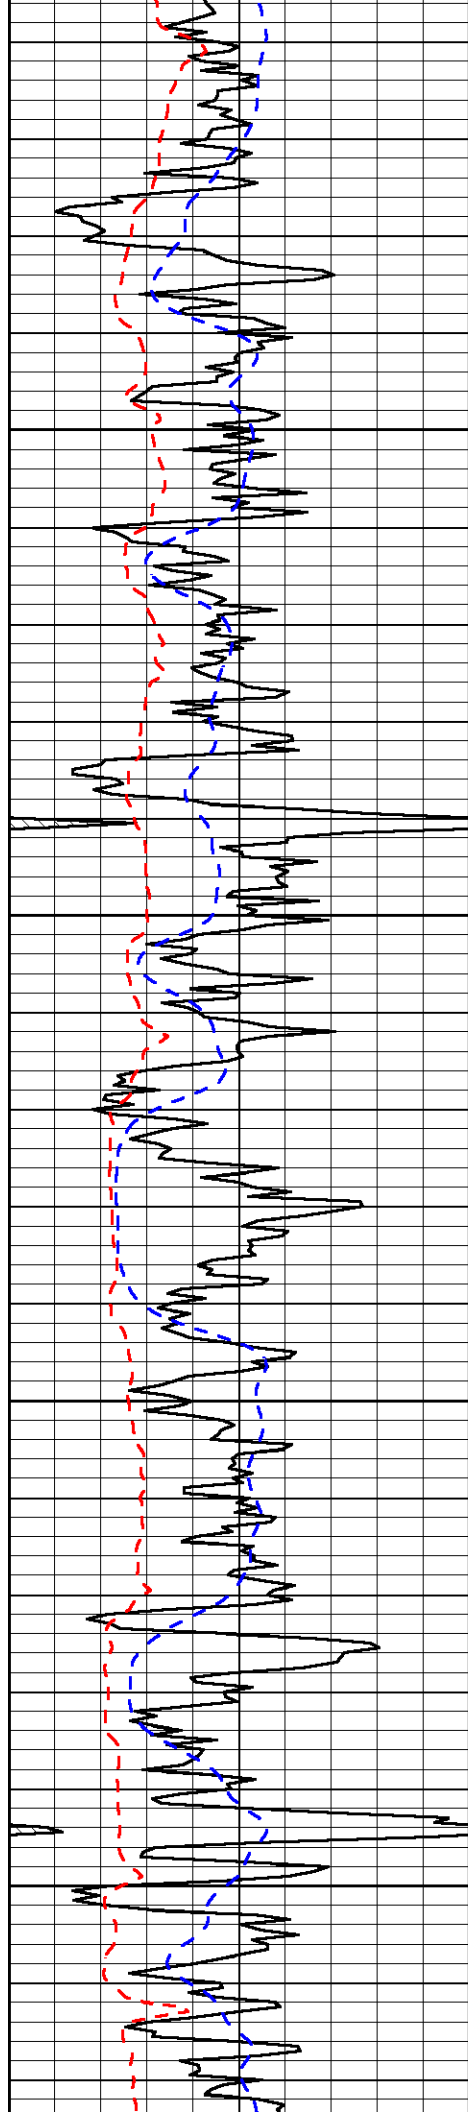

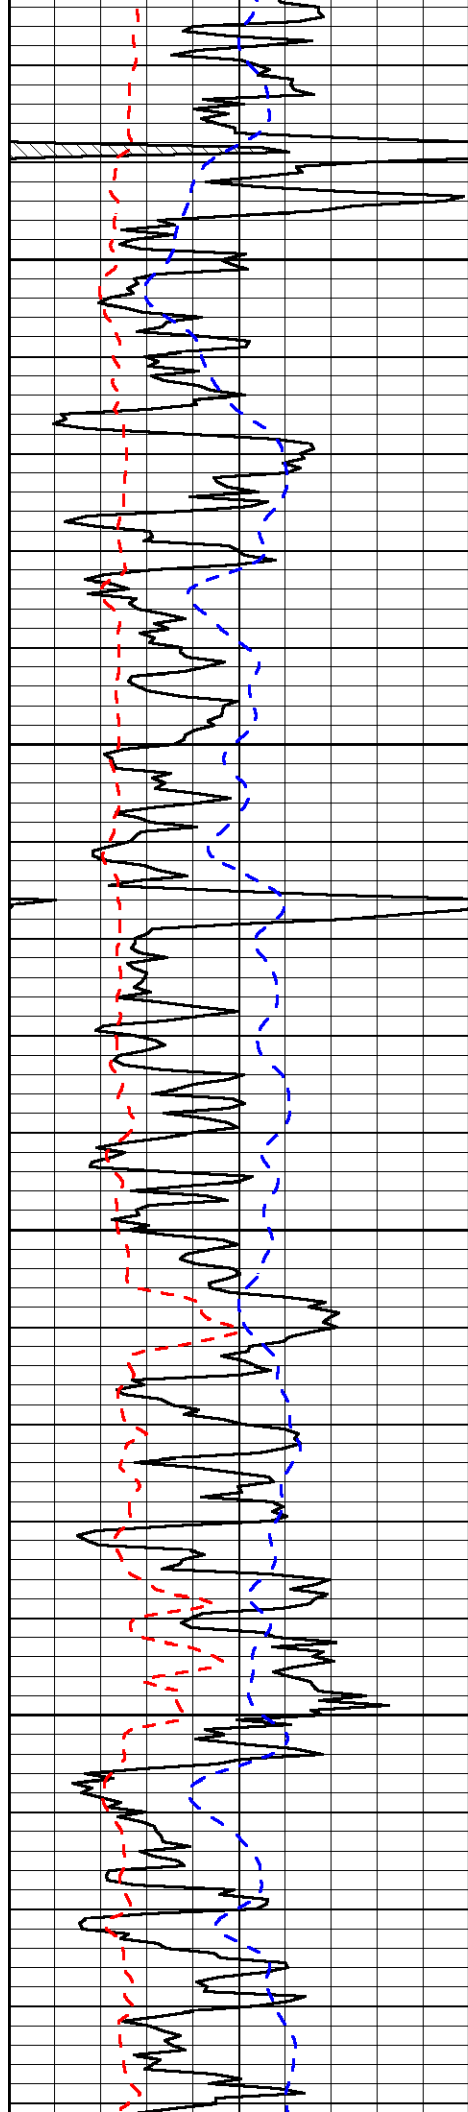


3100

3150

3200

3250


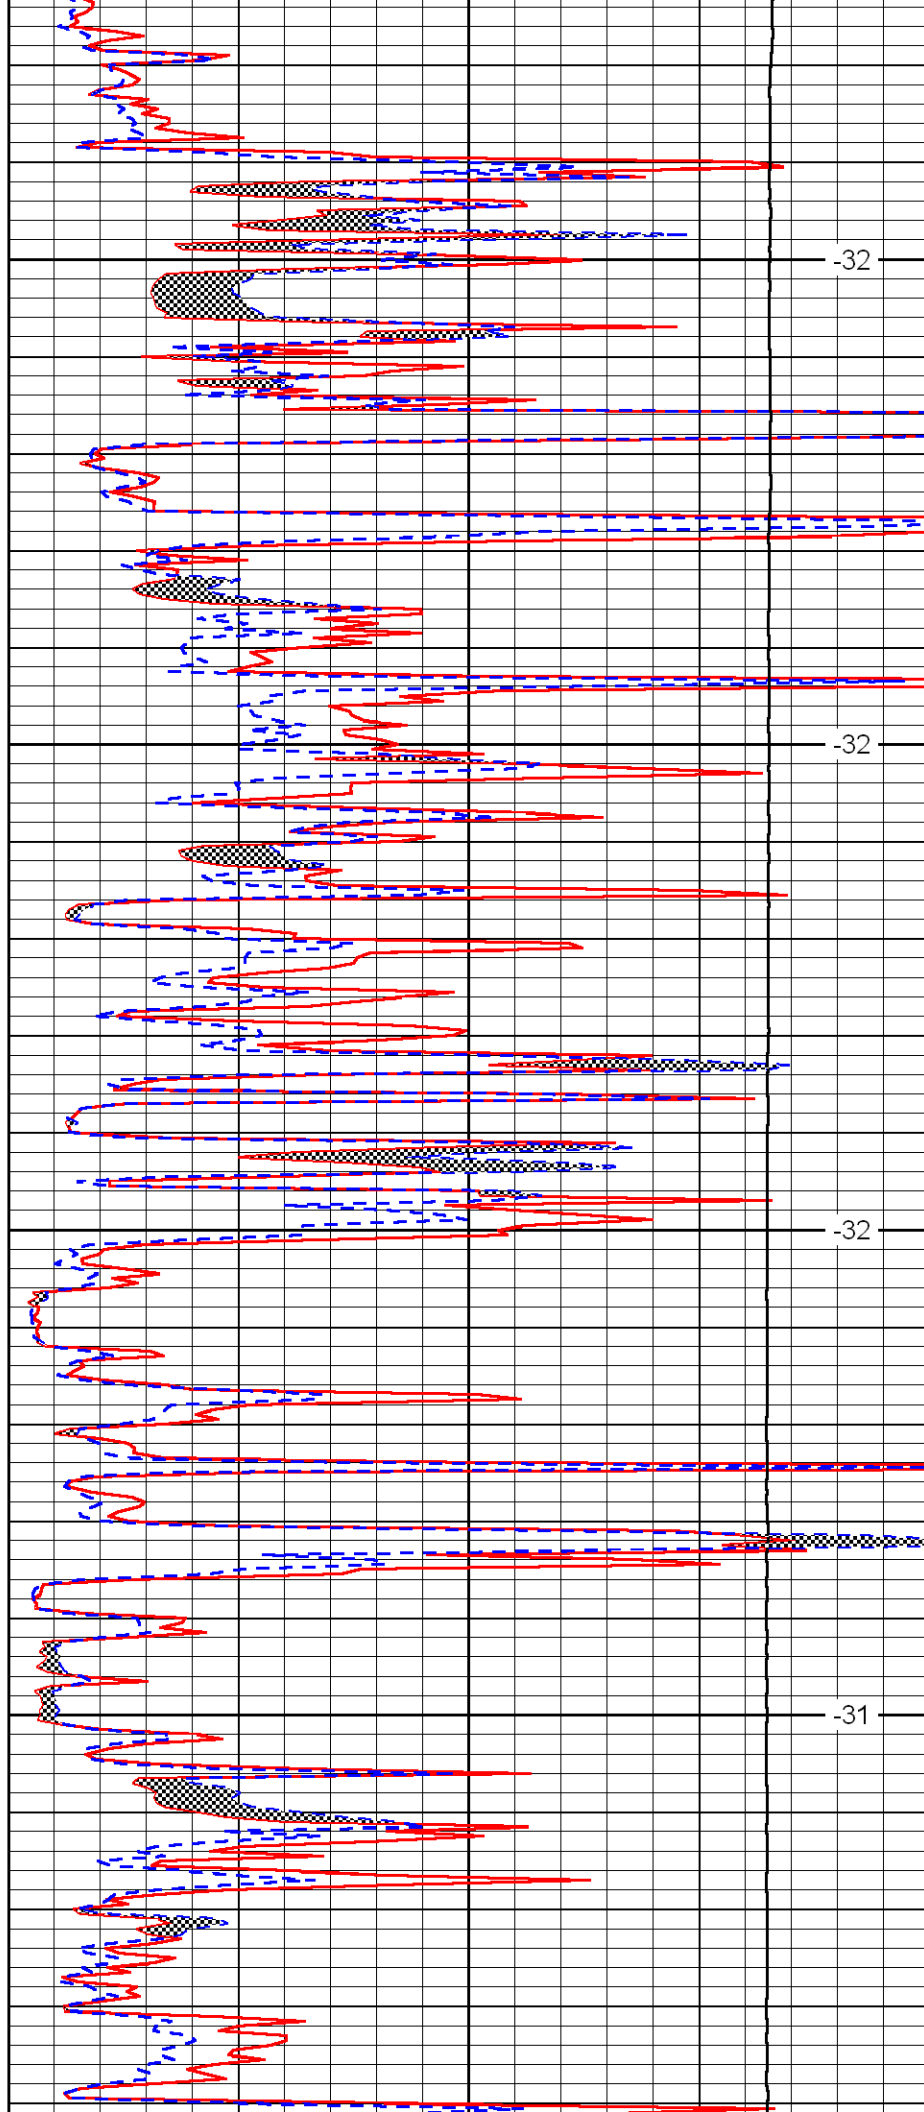



-32

-32

-32

-31

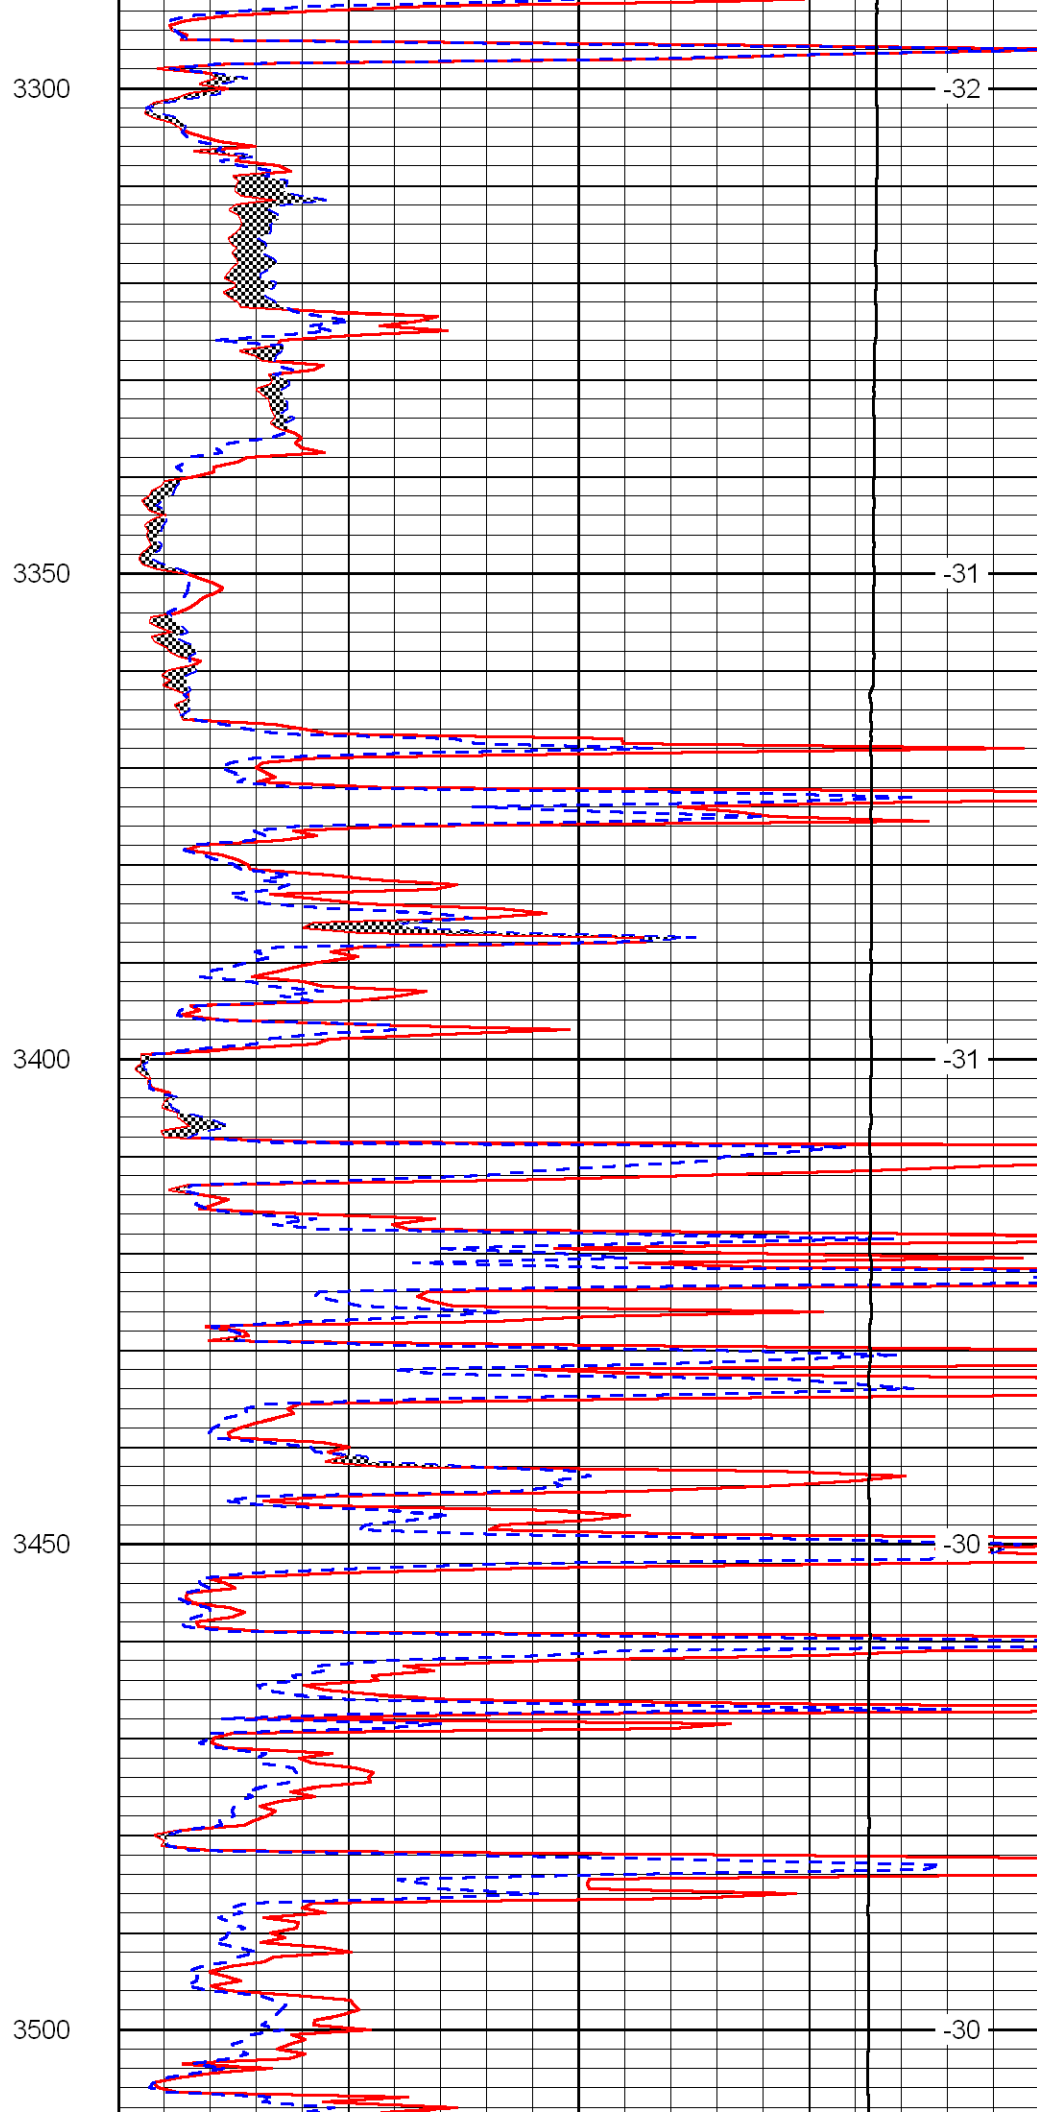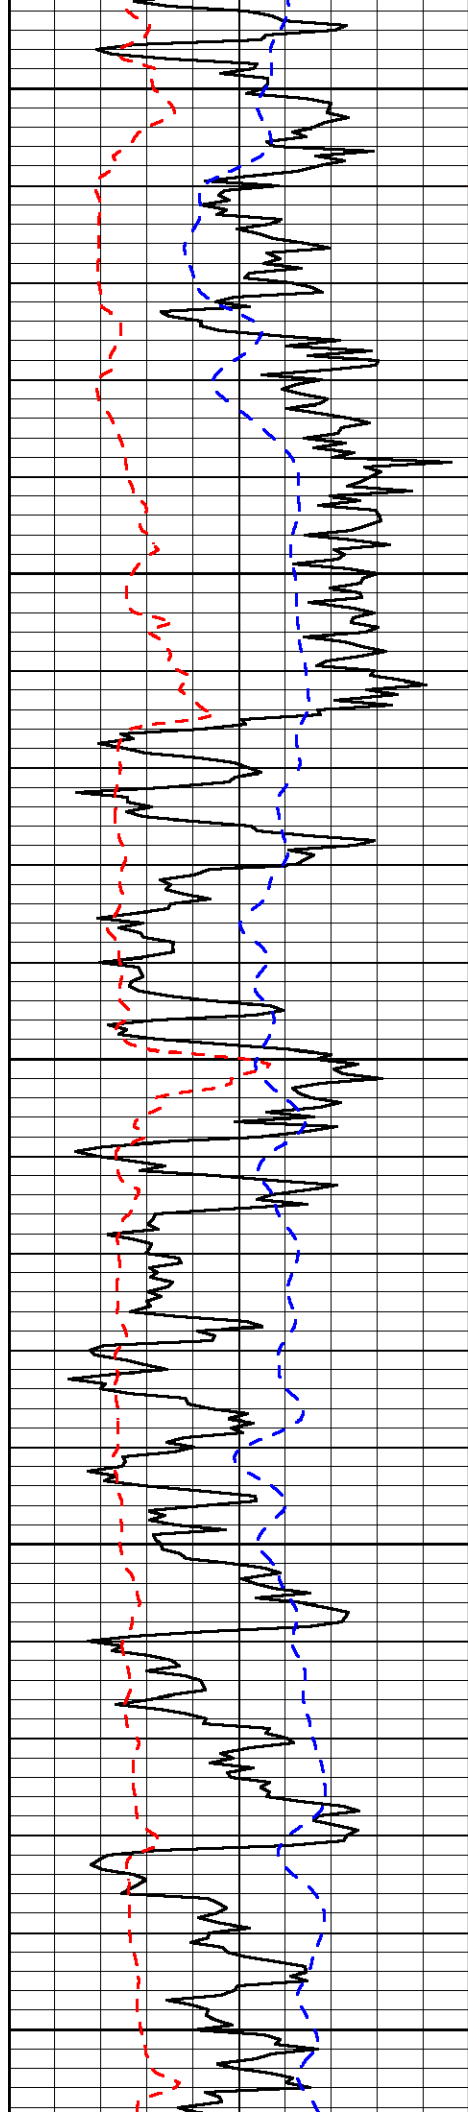

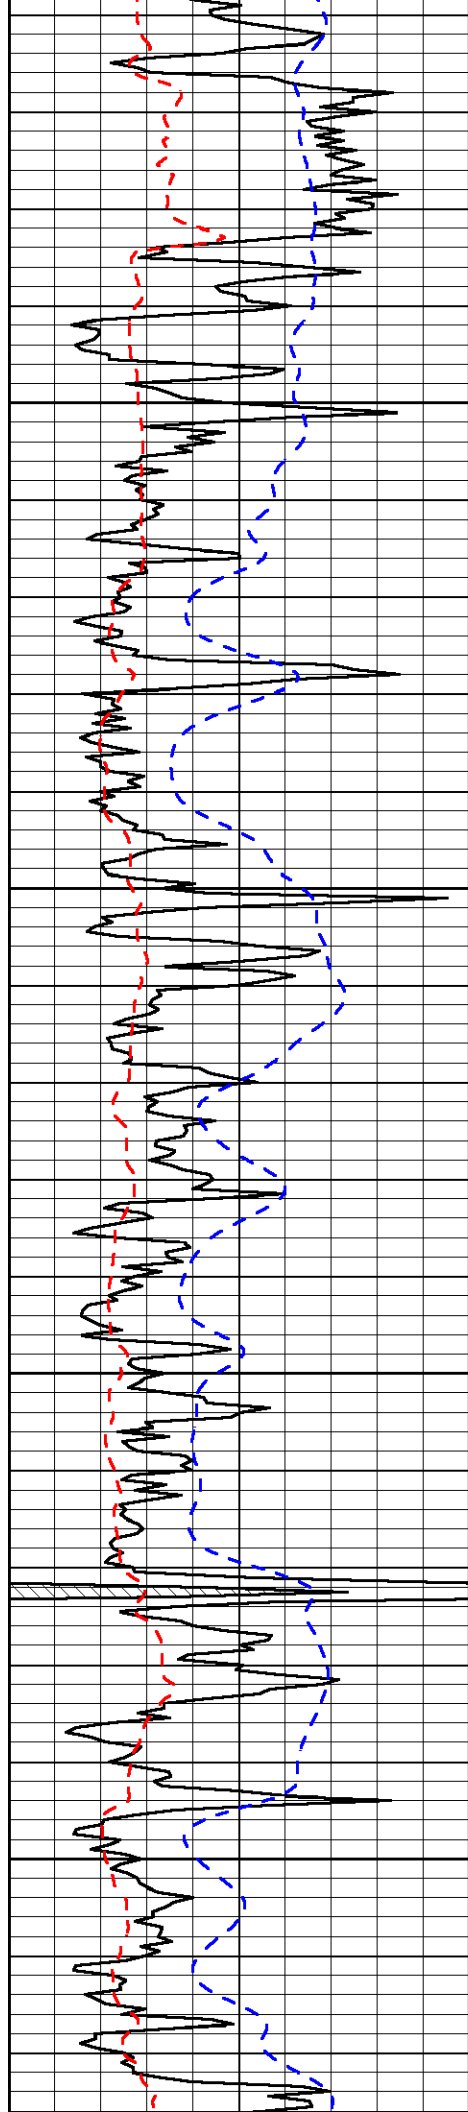



3550

3600

3650

3700

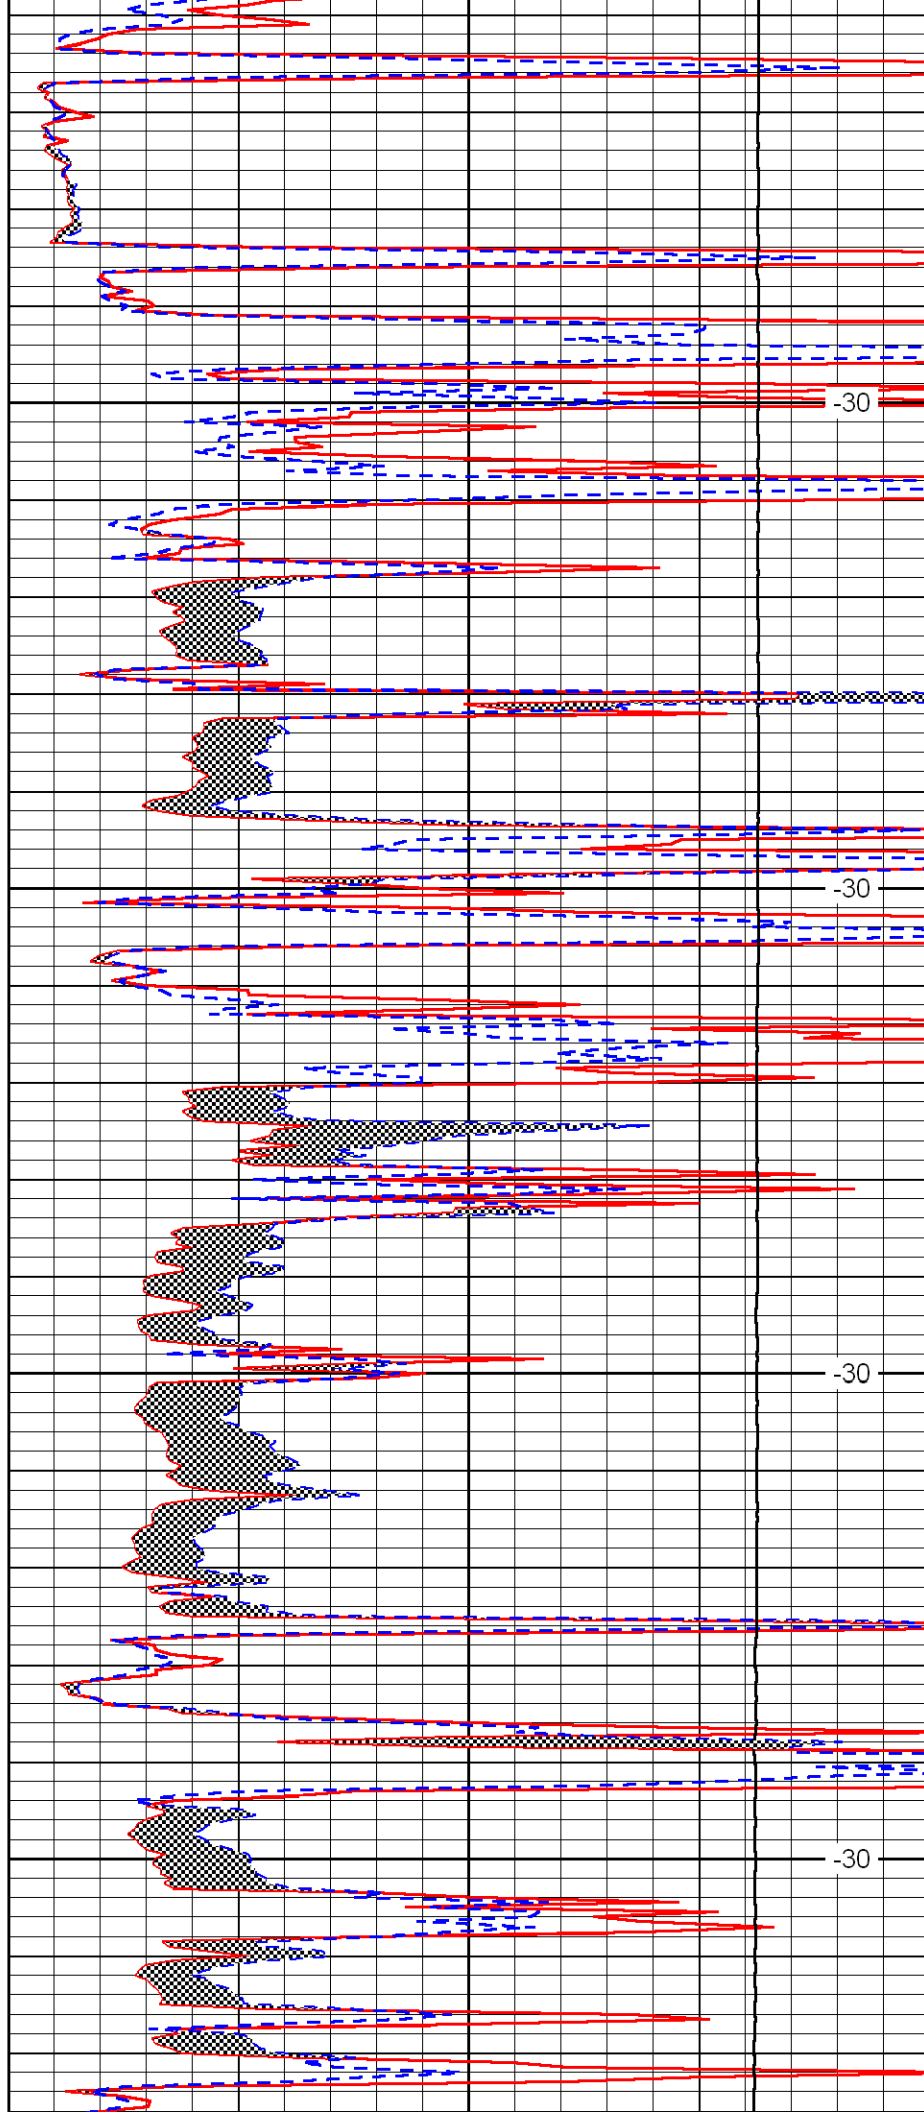

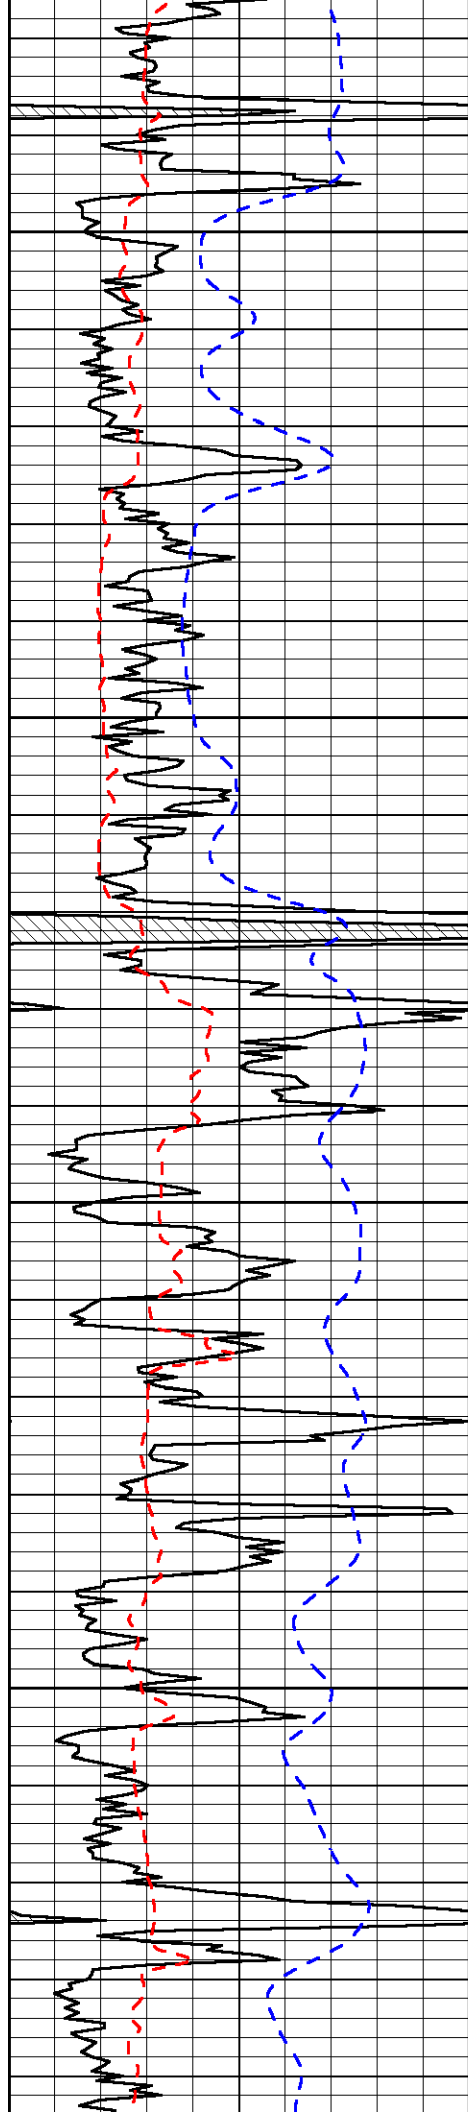


3750

3800

3850

3900

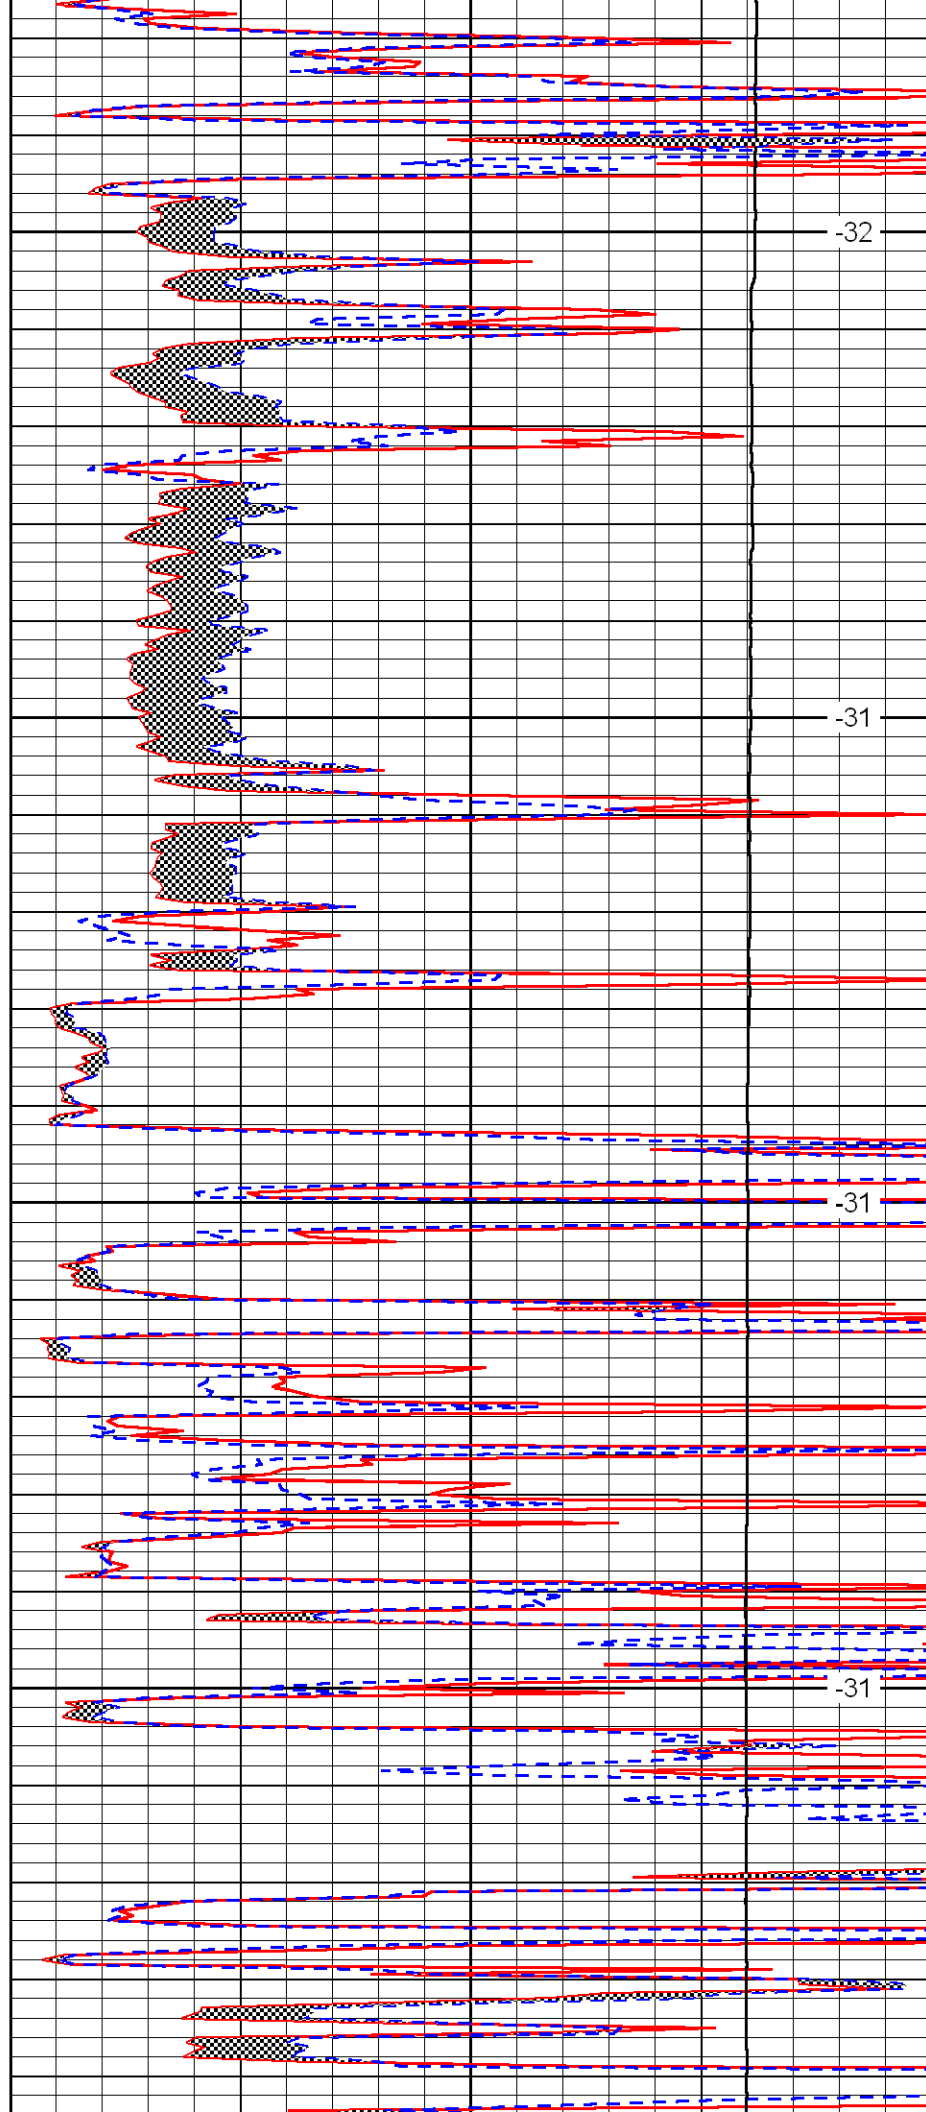


-32

-31

-31

-31

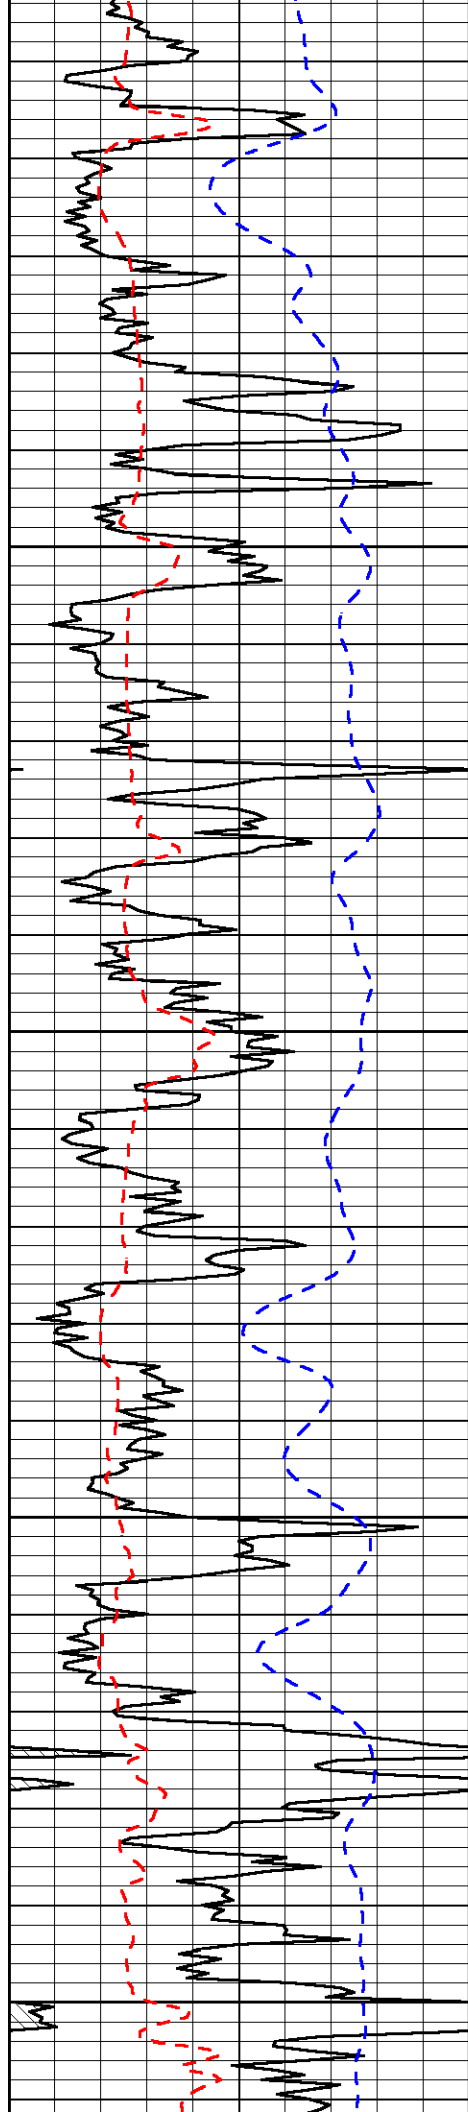


3950

4000

4050

4100

4150

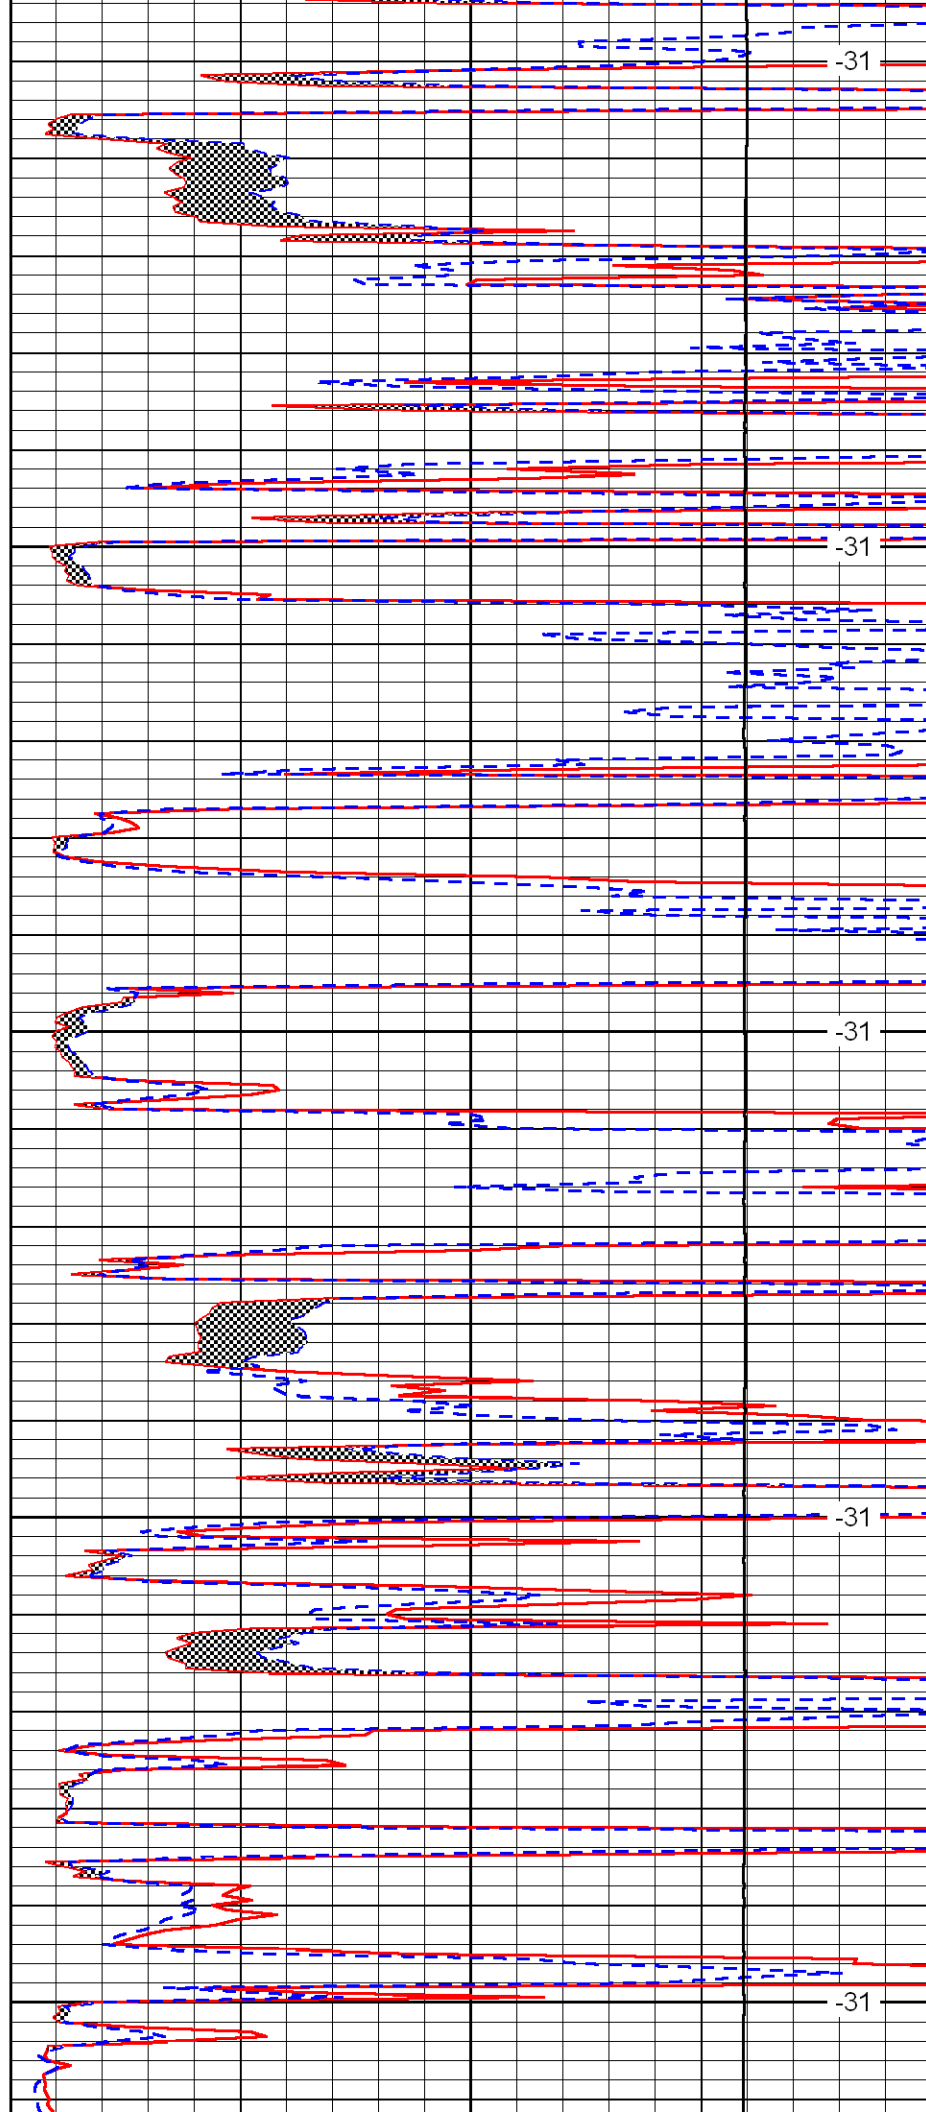


-31

-31

-31

-31

-31

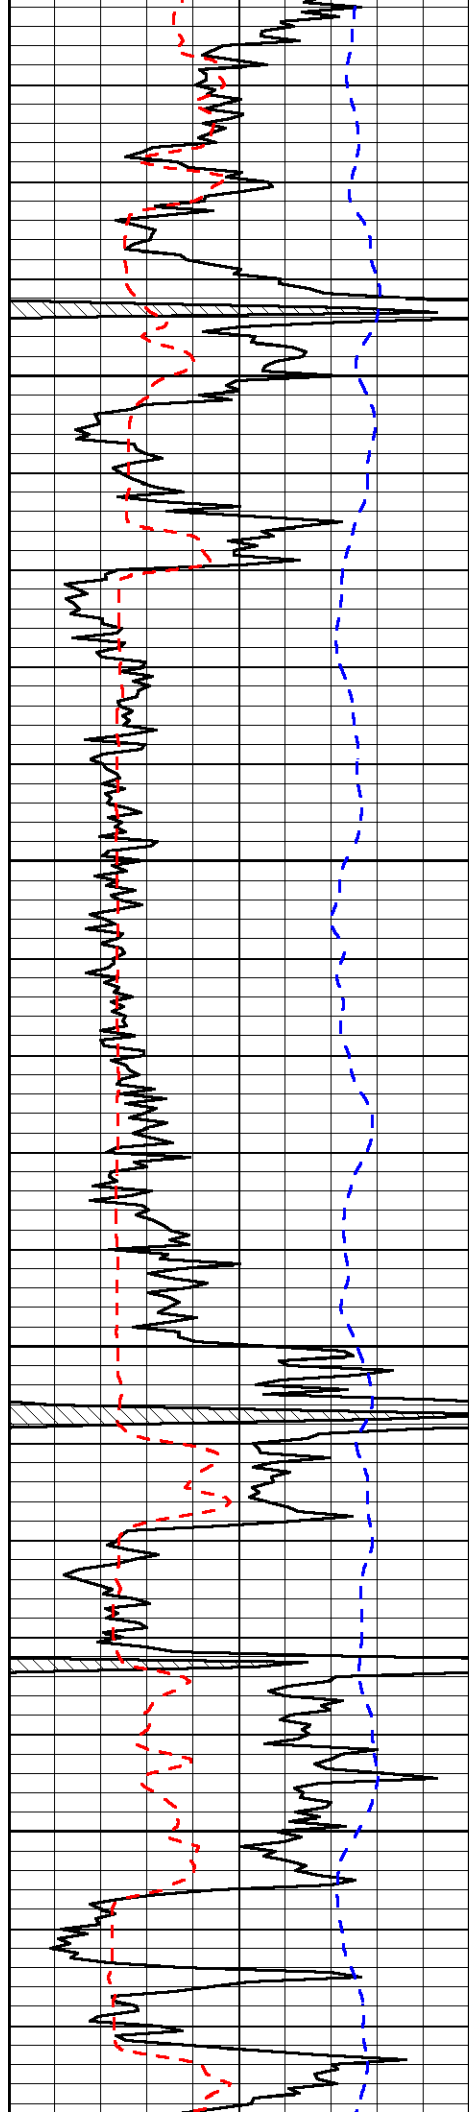


4200

4250

4300

4350

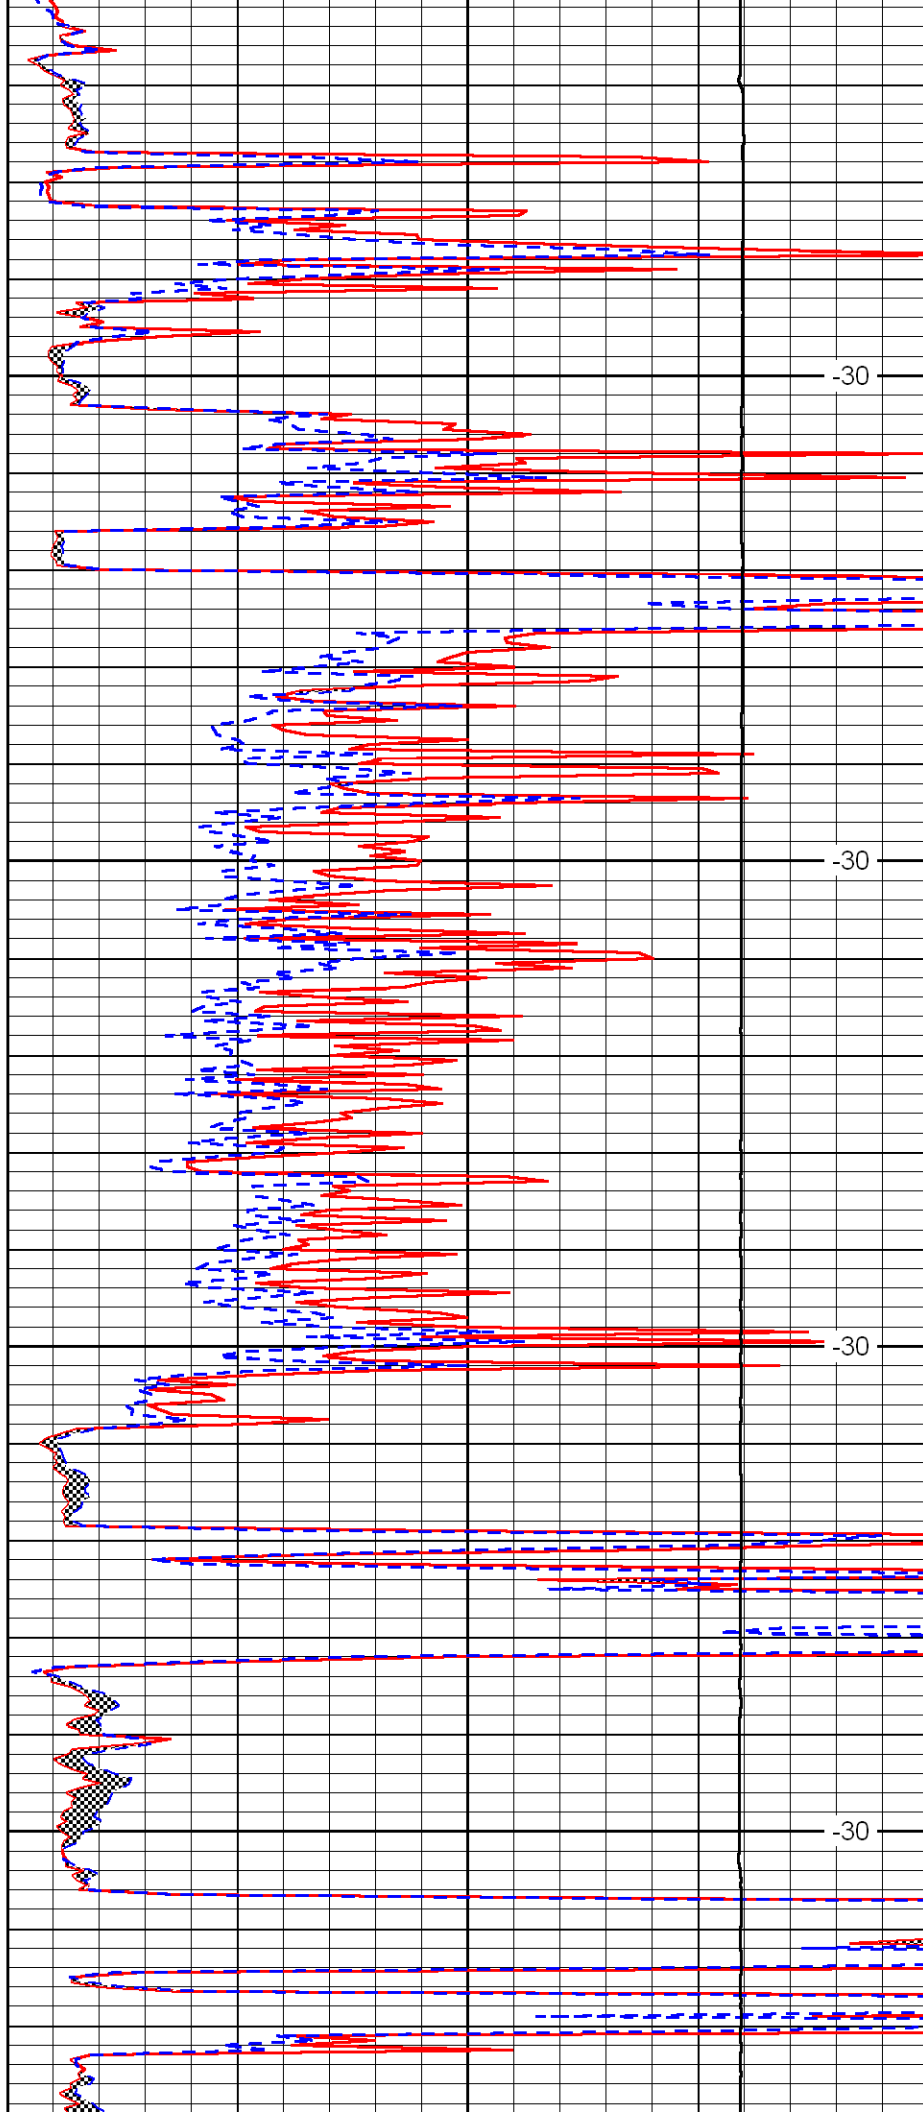


-30

-30

-30

-30

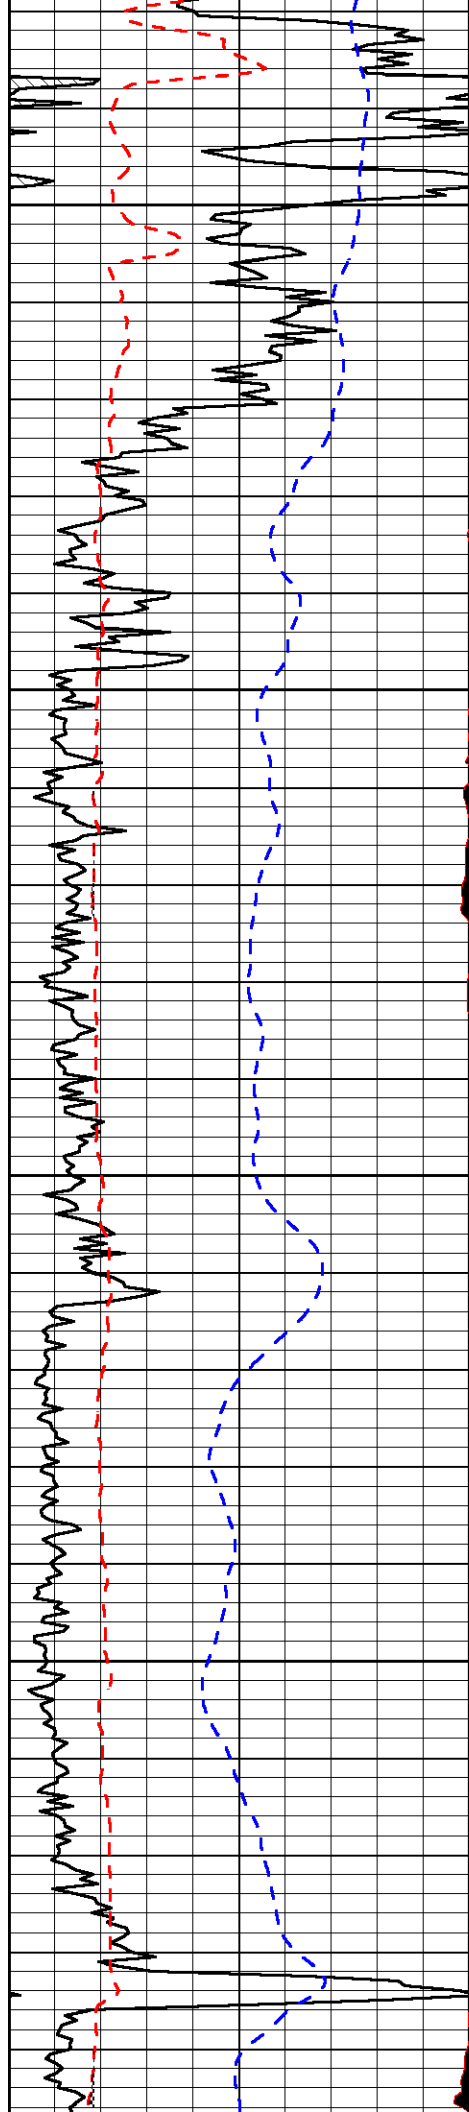


4400

4450

4500

4550

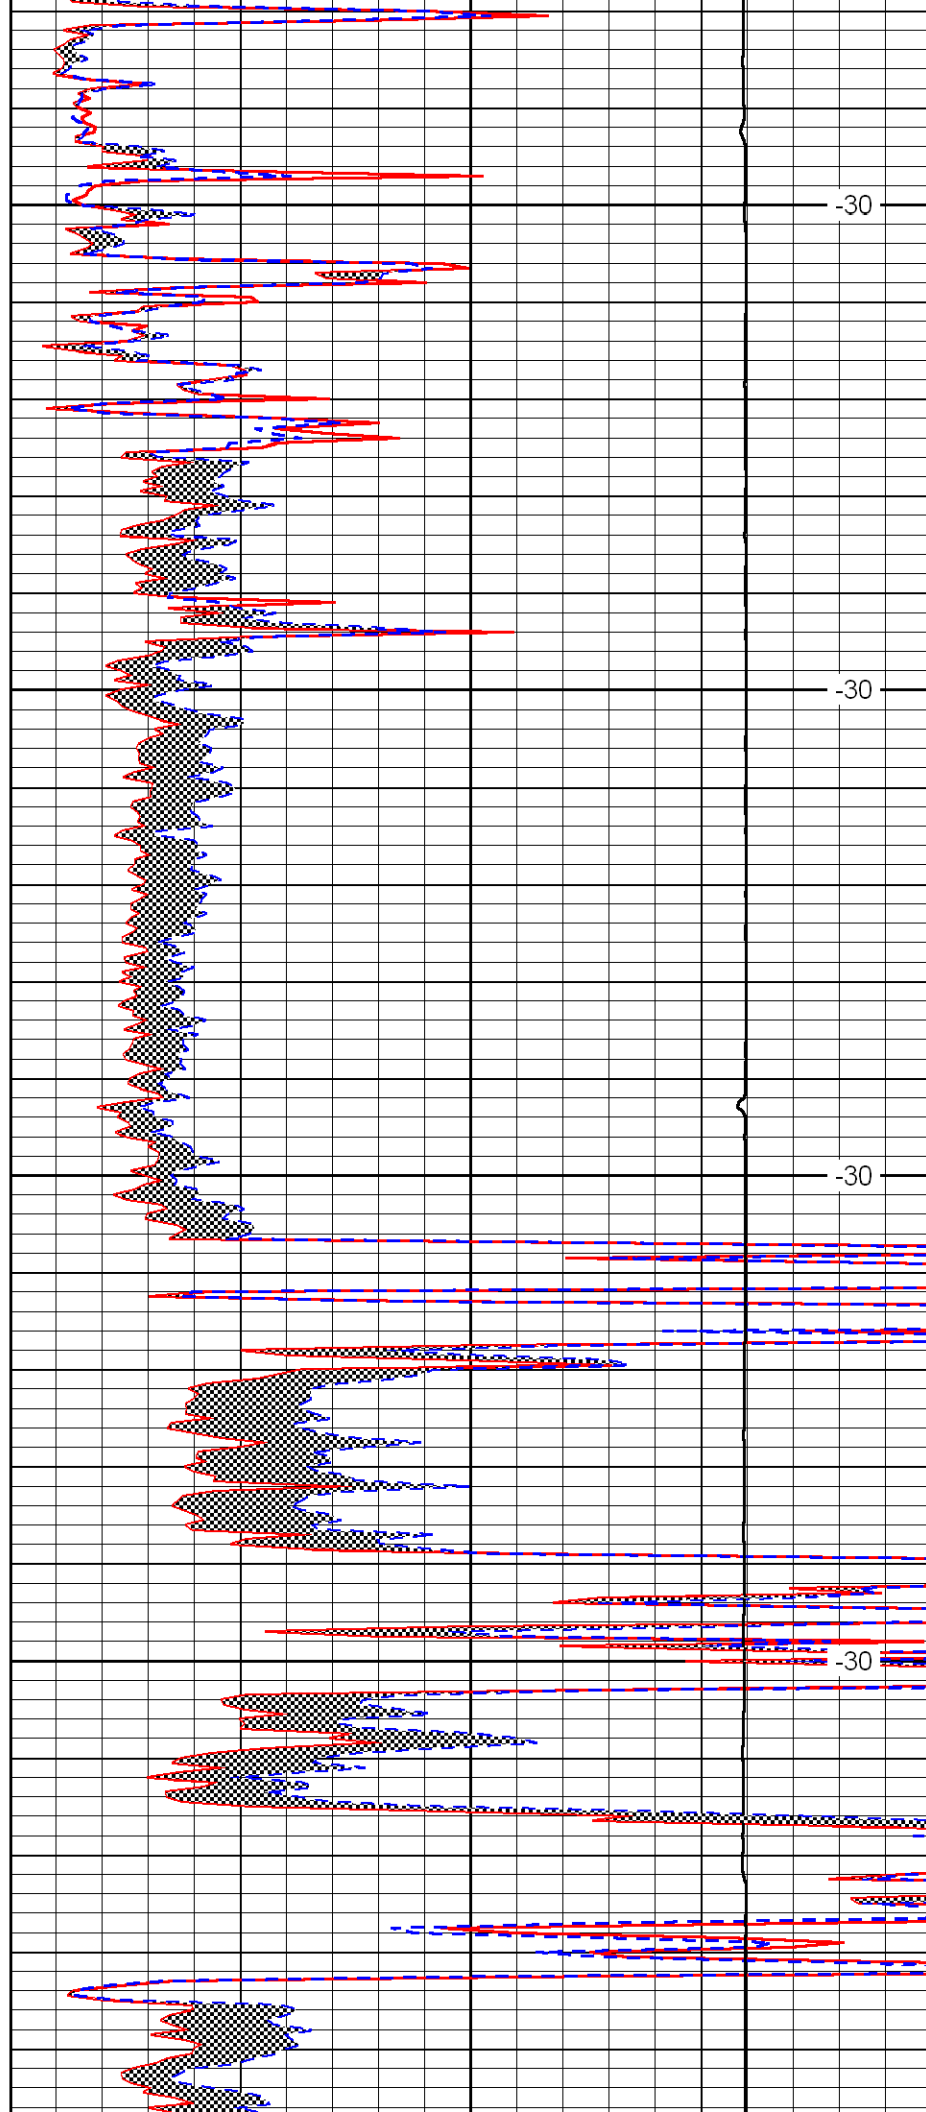


-30


-30

-30

-30

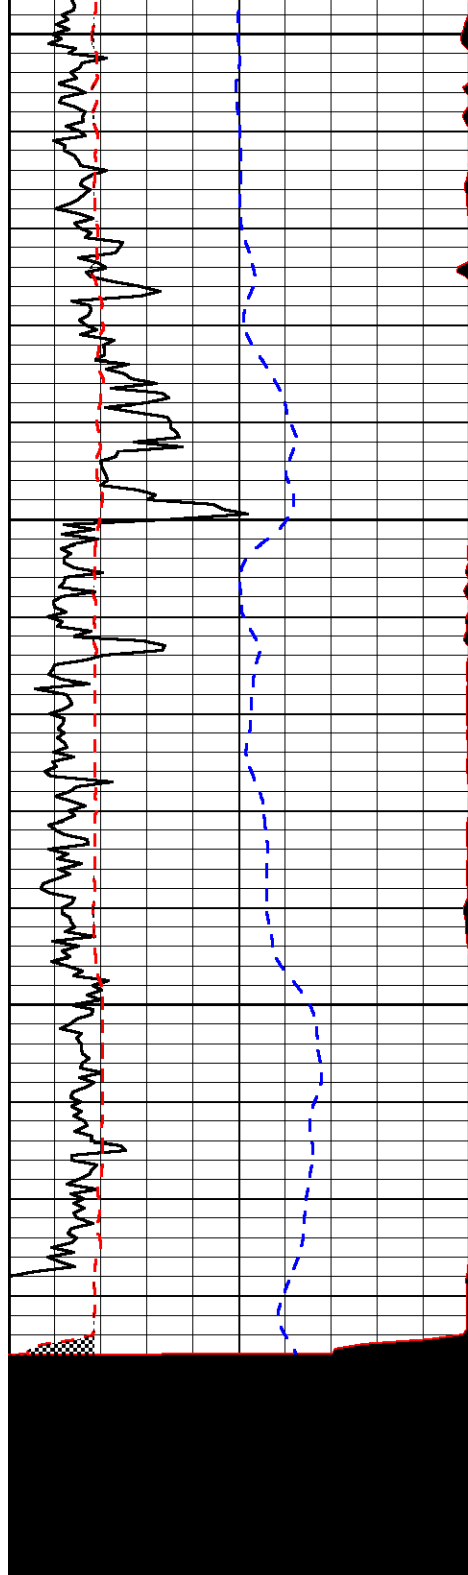

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

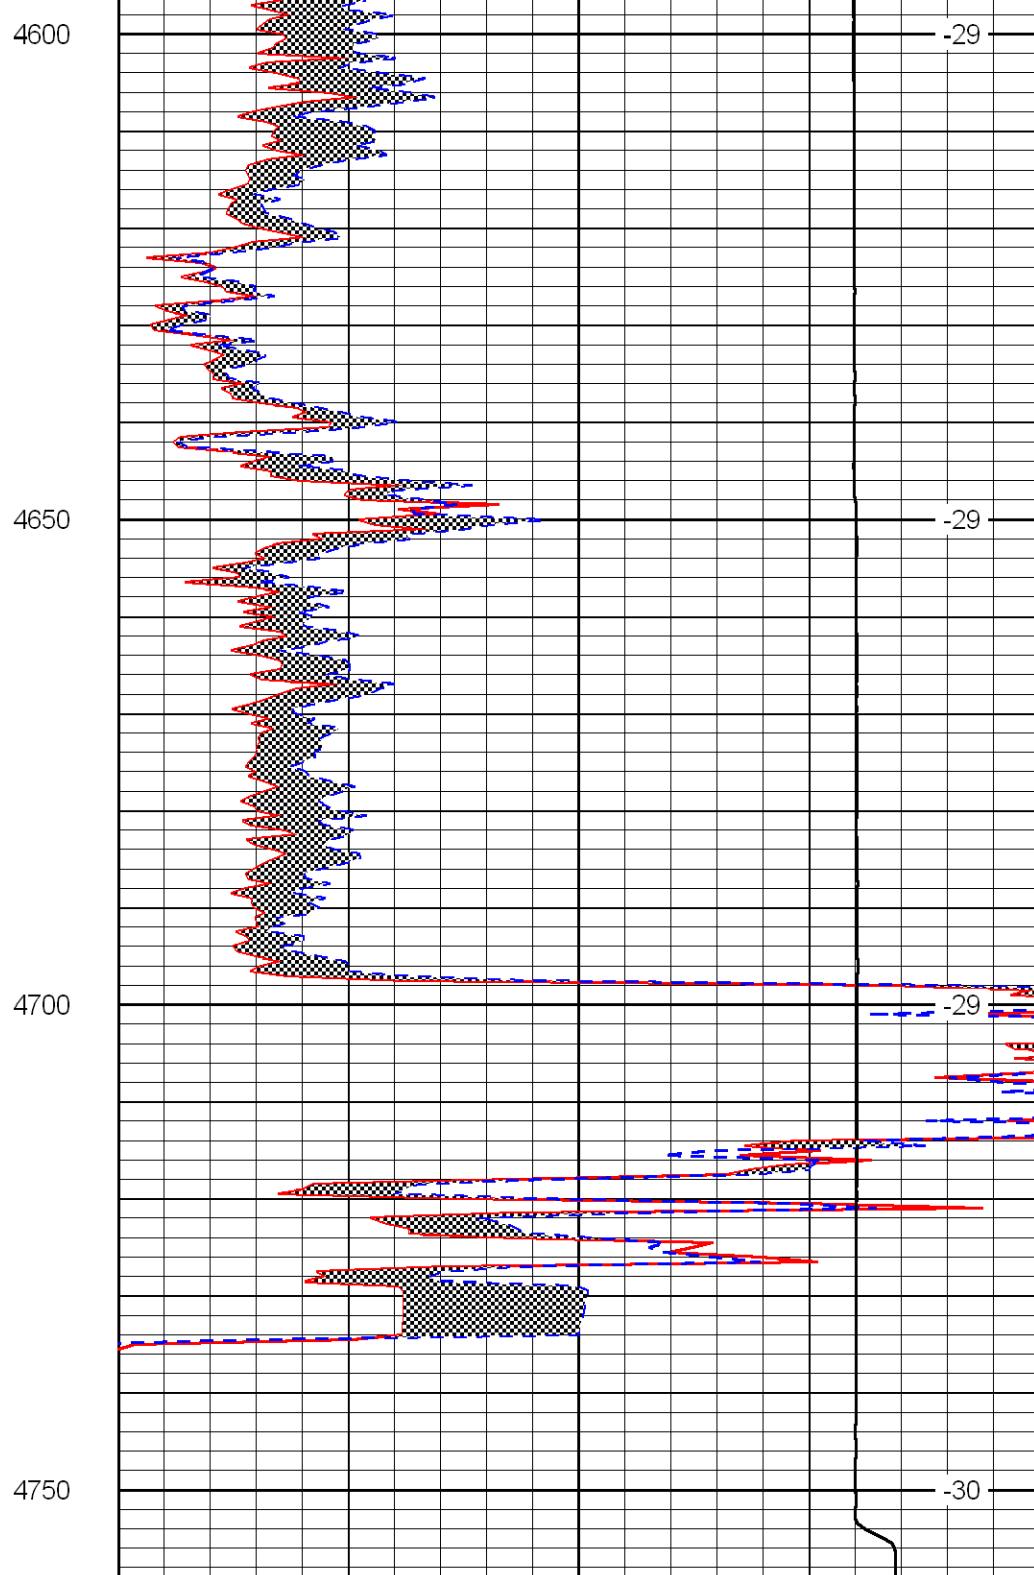

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0
		LSPD