

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-101-22251-00-00

Company Larson Operating Company

Well Cramer No. 2-22

Field Wildcat

County Lane State Kansas

Location E2 SW SW SW
330' FSL & 420' FWL

Sec: 20 Twp: 17S Rge: 30W

Permanent Datum Ground Level Elevation 2860

Log Measured From Kelly Bushing 7 Ft. Above Perm. Datum

Drilling Measured From Kelly Bushing

Other Services

CNL / CDL
MEL

Elevation
K.B. 2867
D.F. 2860
G.L. 2860

Date 9/19/2010

Run Number One

Depth Driller 4615

Depth Logger 4618

Bottom Logged Interval 4617

Top Log Interval 200

Casing Driller 8.625 @ 257

Casing Logger 258

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 2500

Density / Viscosity 9.4 50

pH / Fluid Loss 11.0 8.0

Source of Sample Flowline

Rm @ Meas. Temp .9 @ 72

Rmf @ Meas. Temp .68 @ 72

Rmc @ Meas. Temp 1.22 @ 72

Source of Rmf / Rmc Charts

Rm @ BHT .52 @ 124

Operating Rig Time 4 Hours

Max Rec. Temp. F 124

Equipment Number 17

Location Hays

Recorded By R. Barnhart

Witnessed By Vern Schrag

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858




Dighton, KS:
8 W to Dodge Rd., 5N to Rd. 200,
1W, 1/10N, E into



Database File: laron_cramer2-22hd.db
Dataset Pathname: dil/laron3
Presentation Format: dil2in
Dataset Creation: Sun Sep 19 18:04:26 2010
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500


LSPD

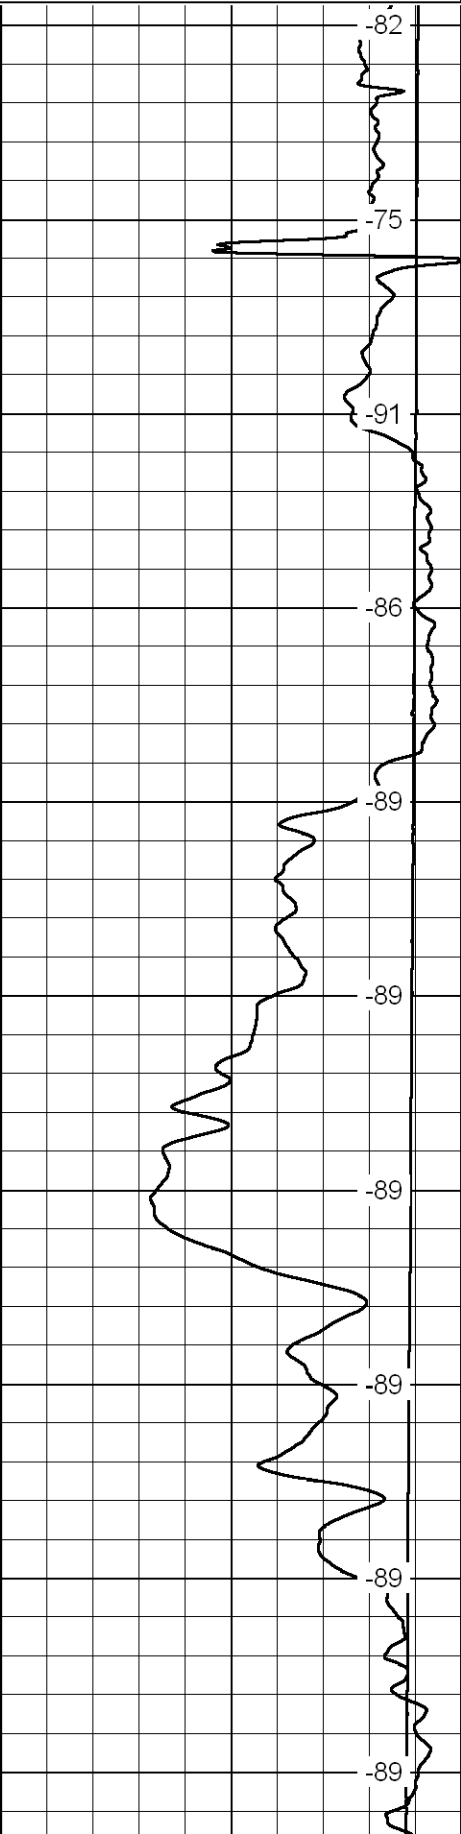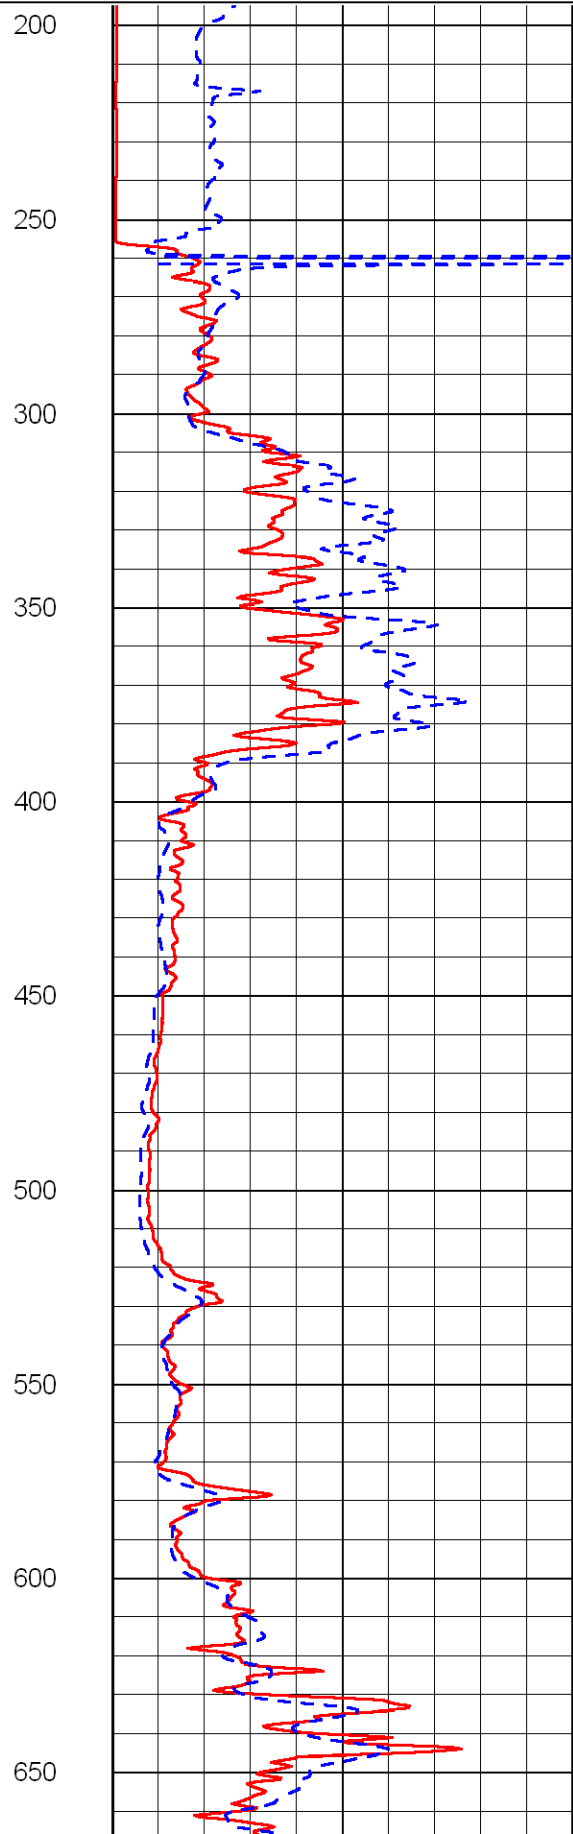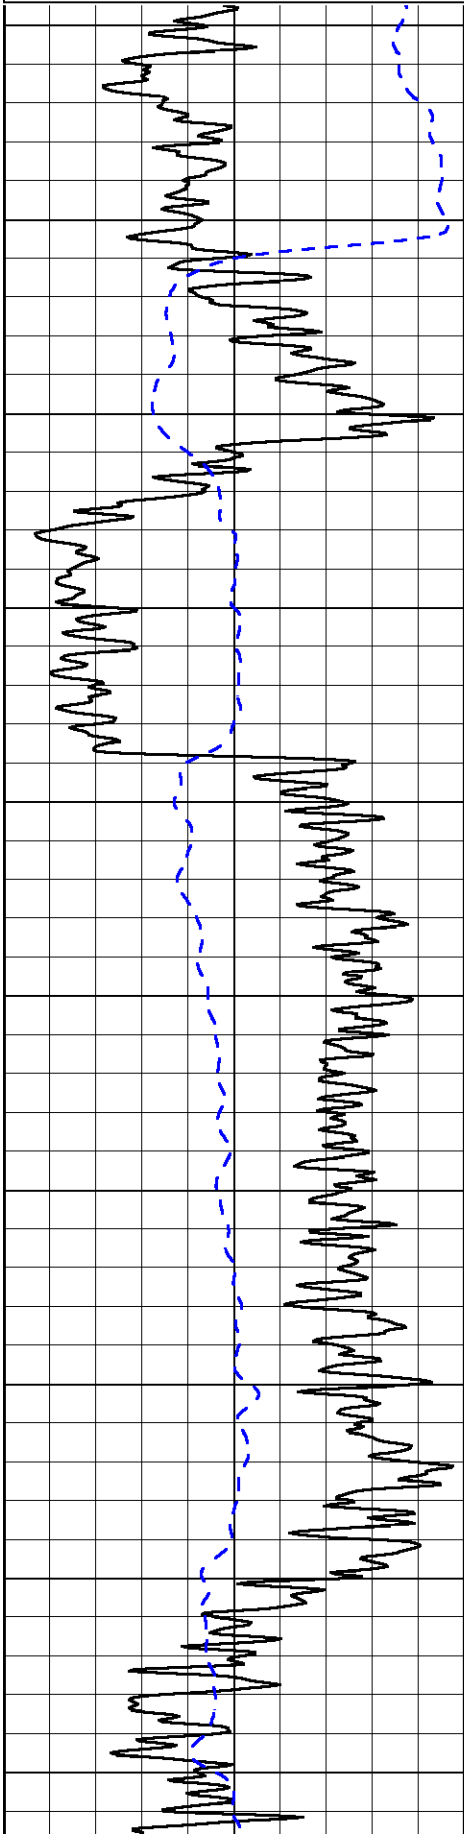

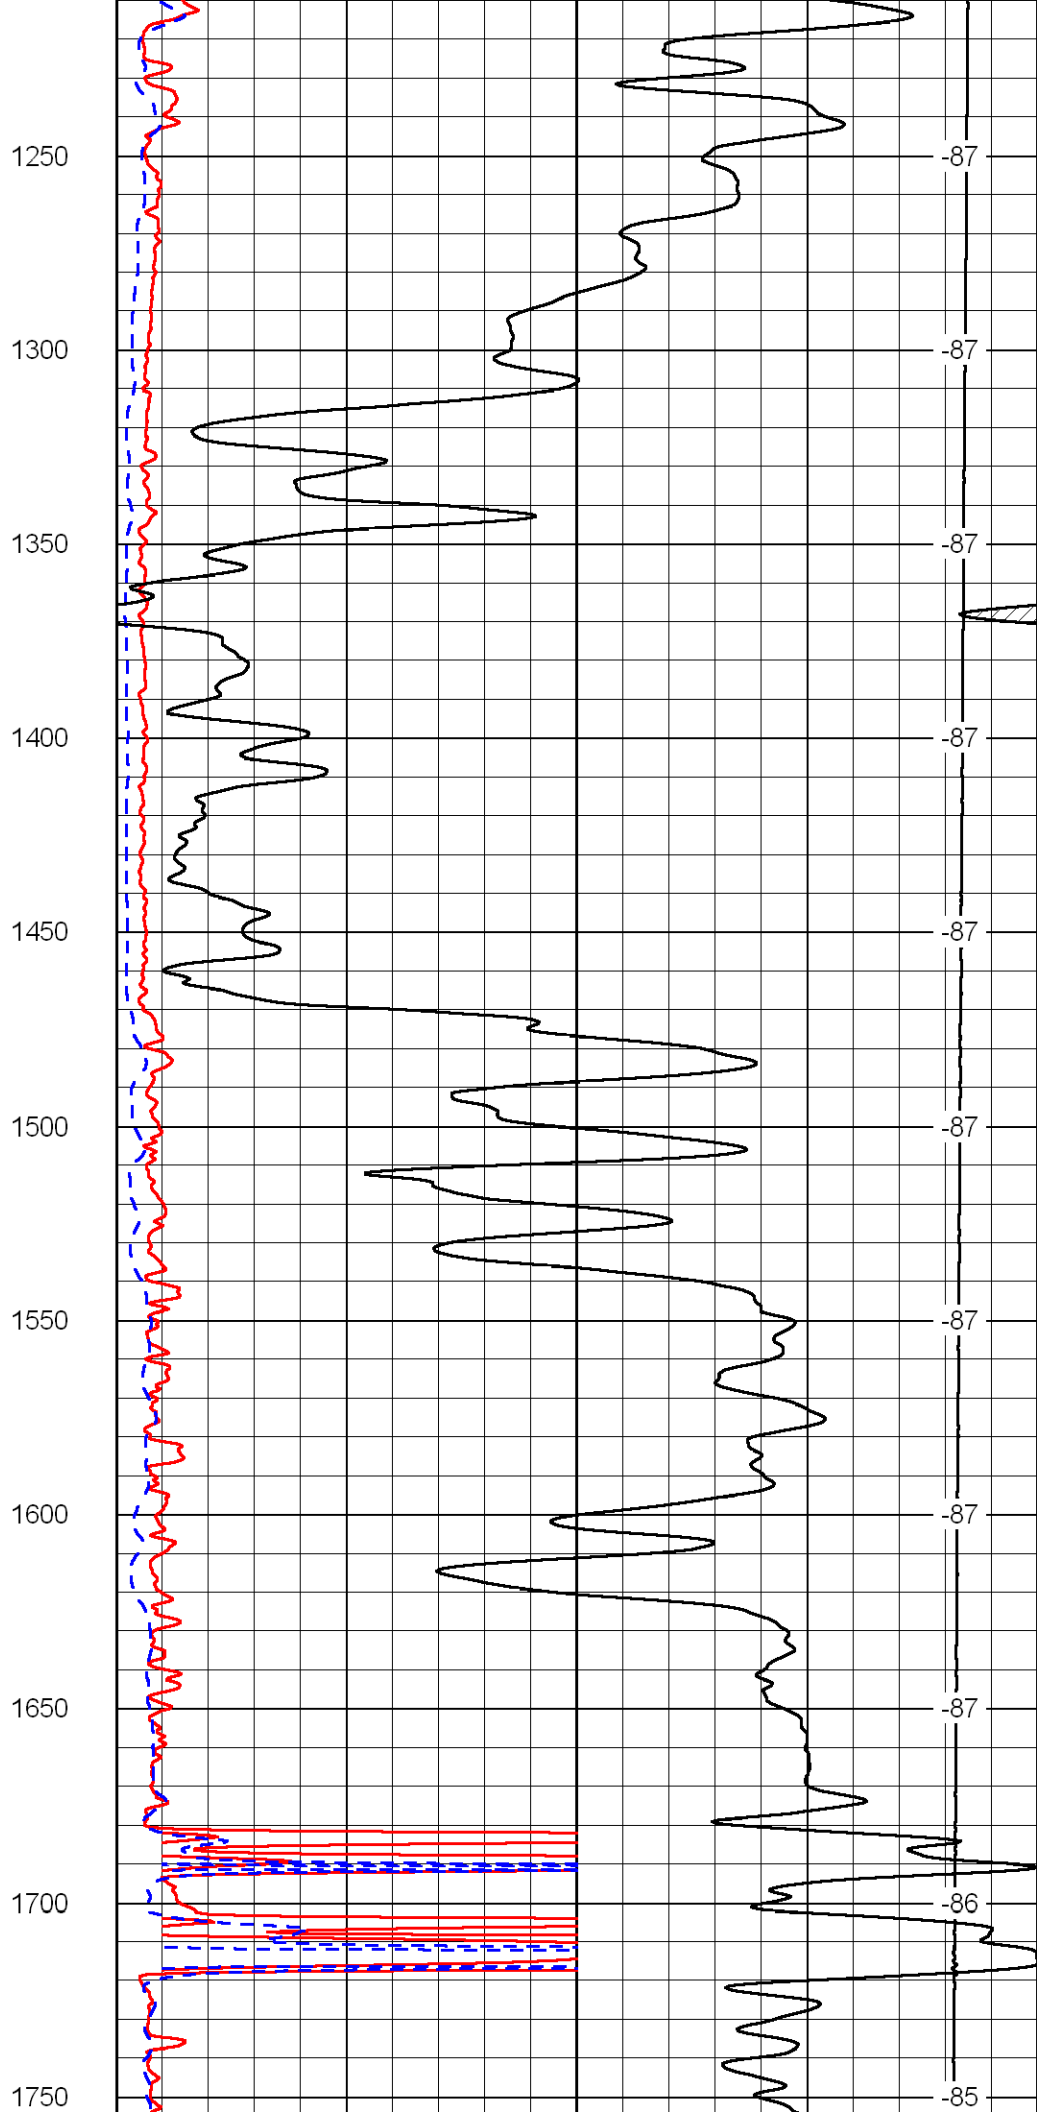
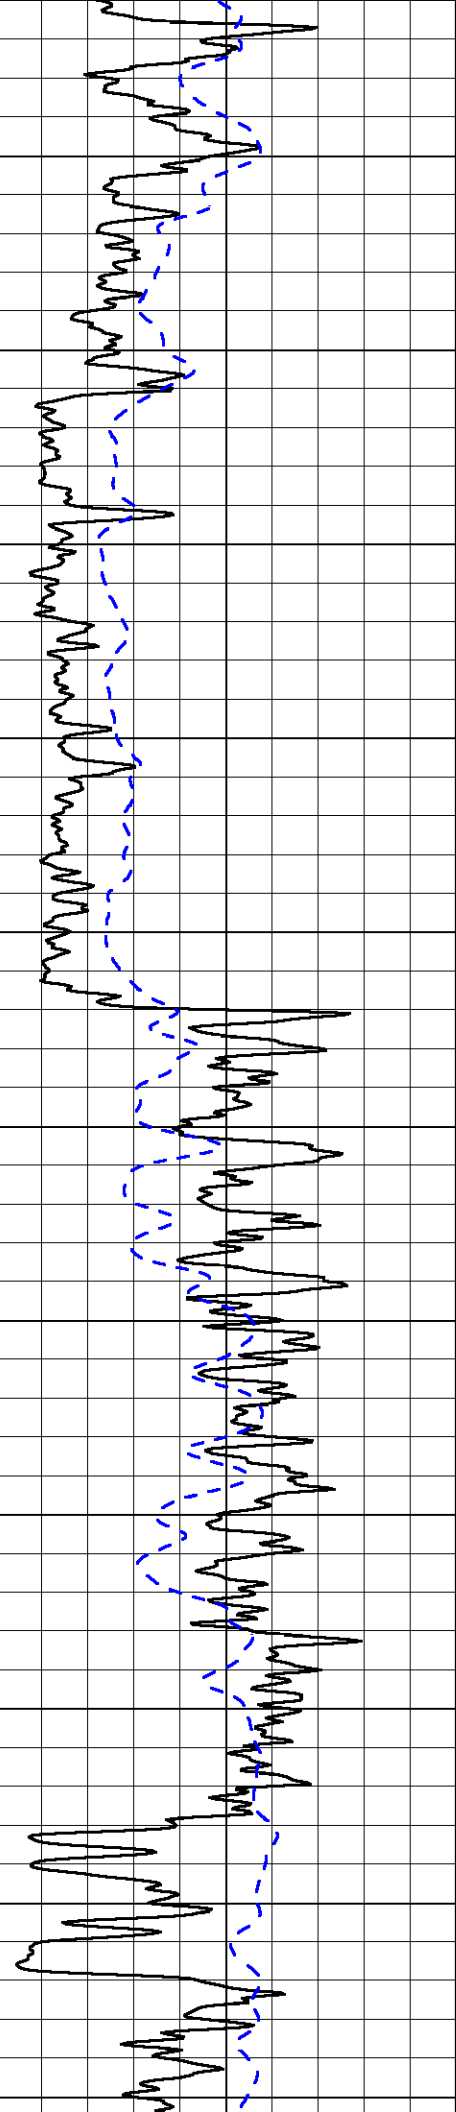


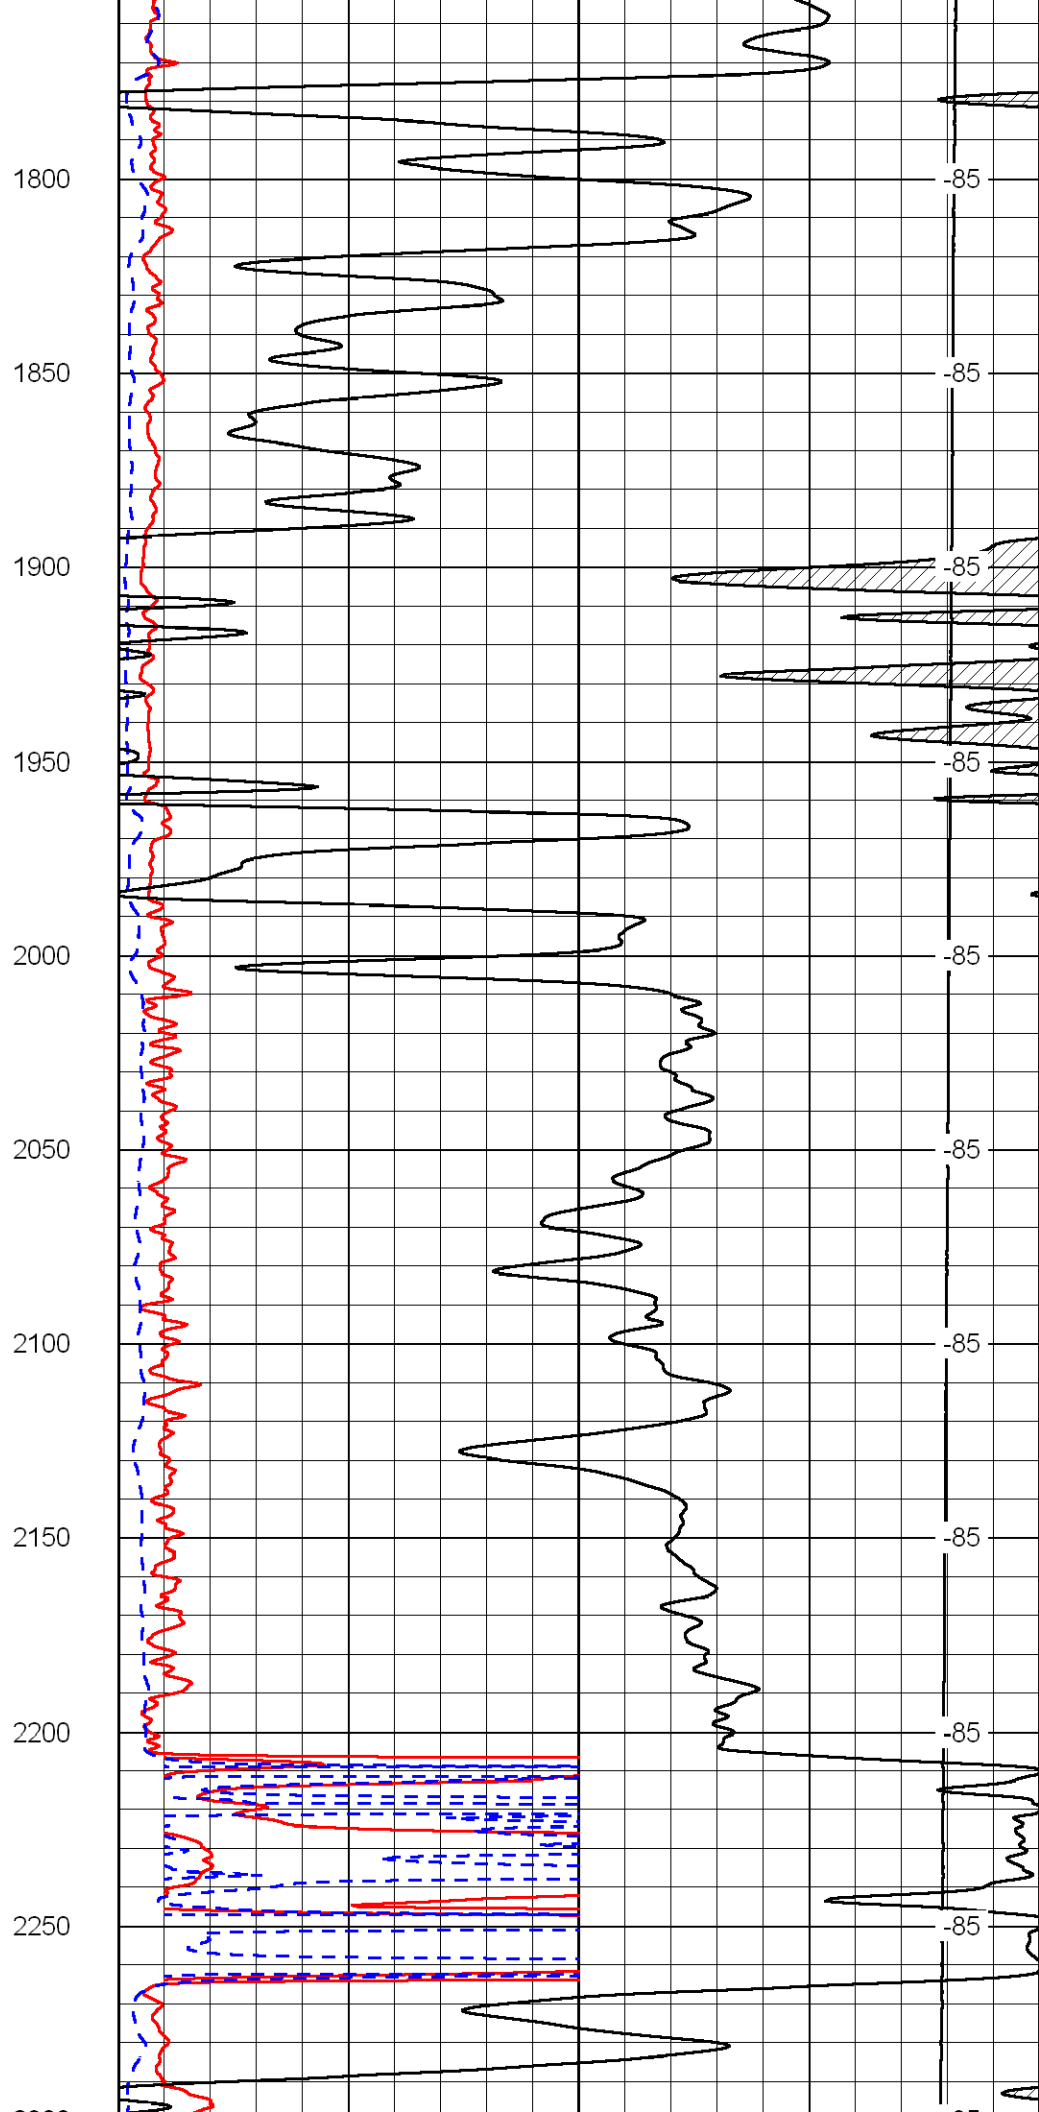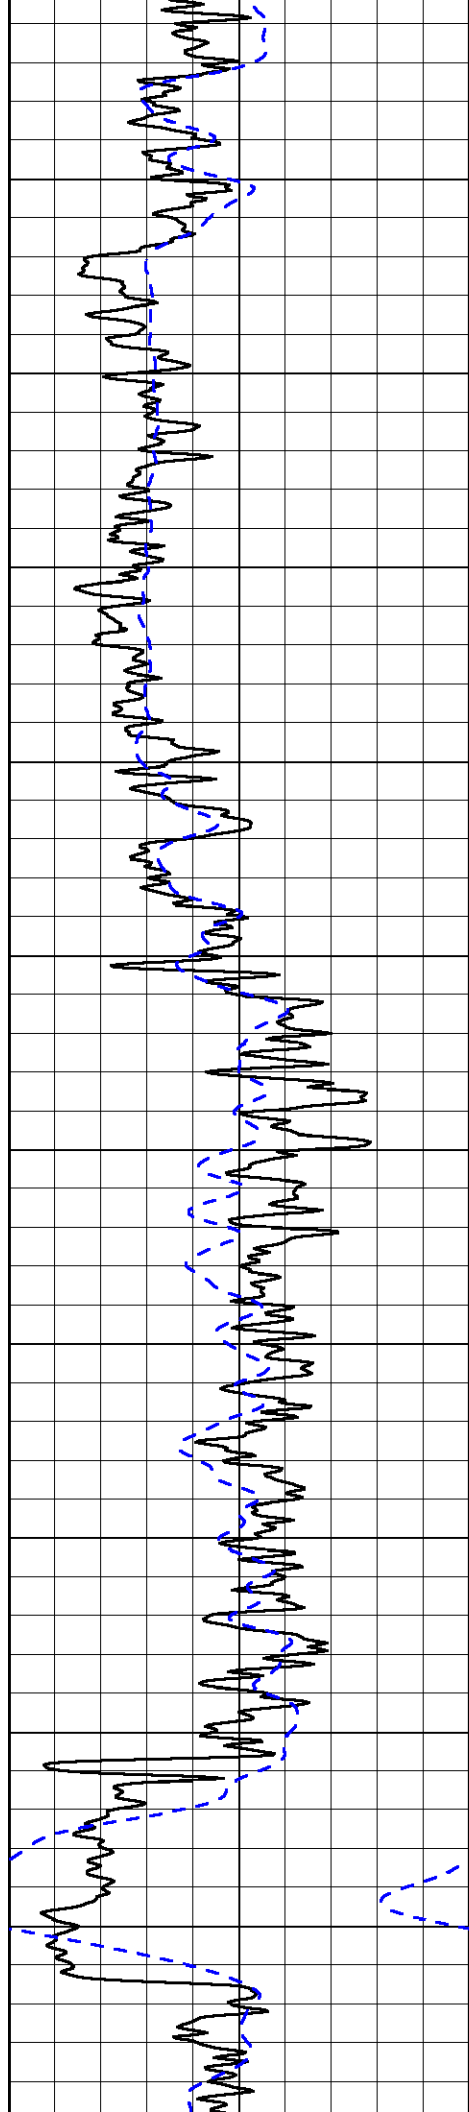


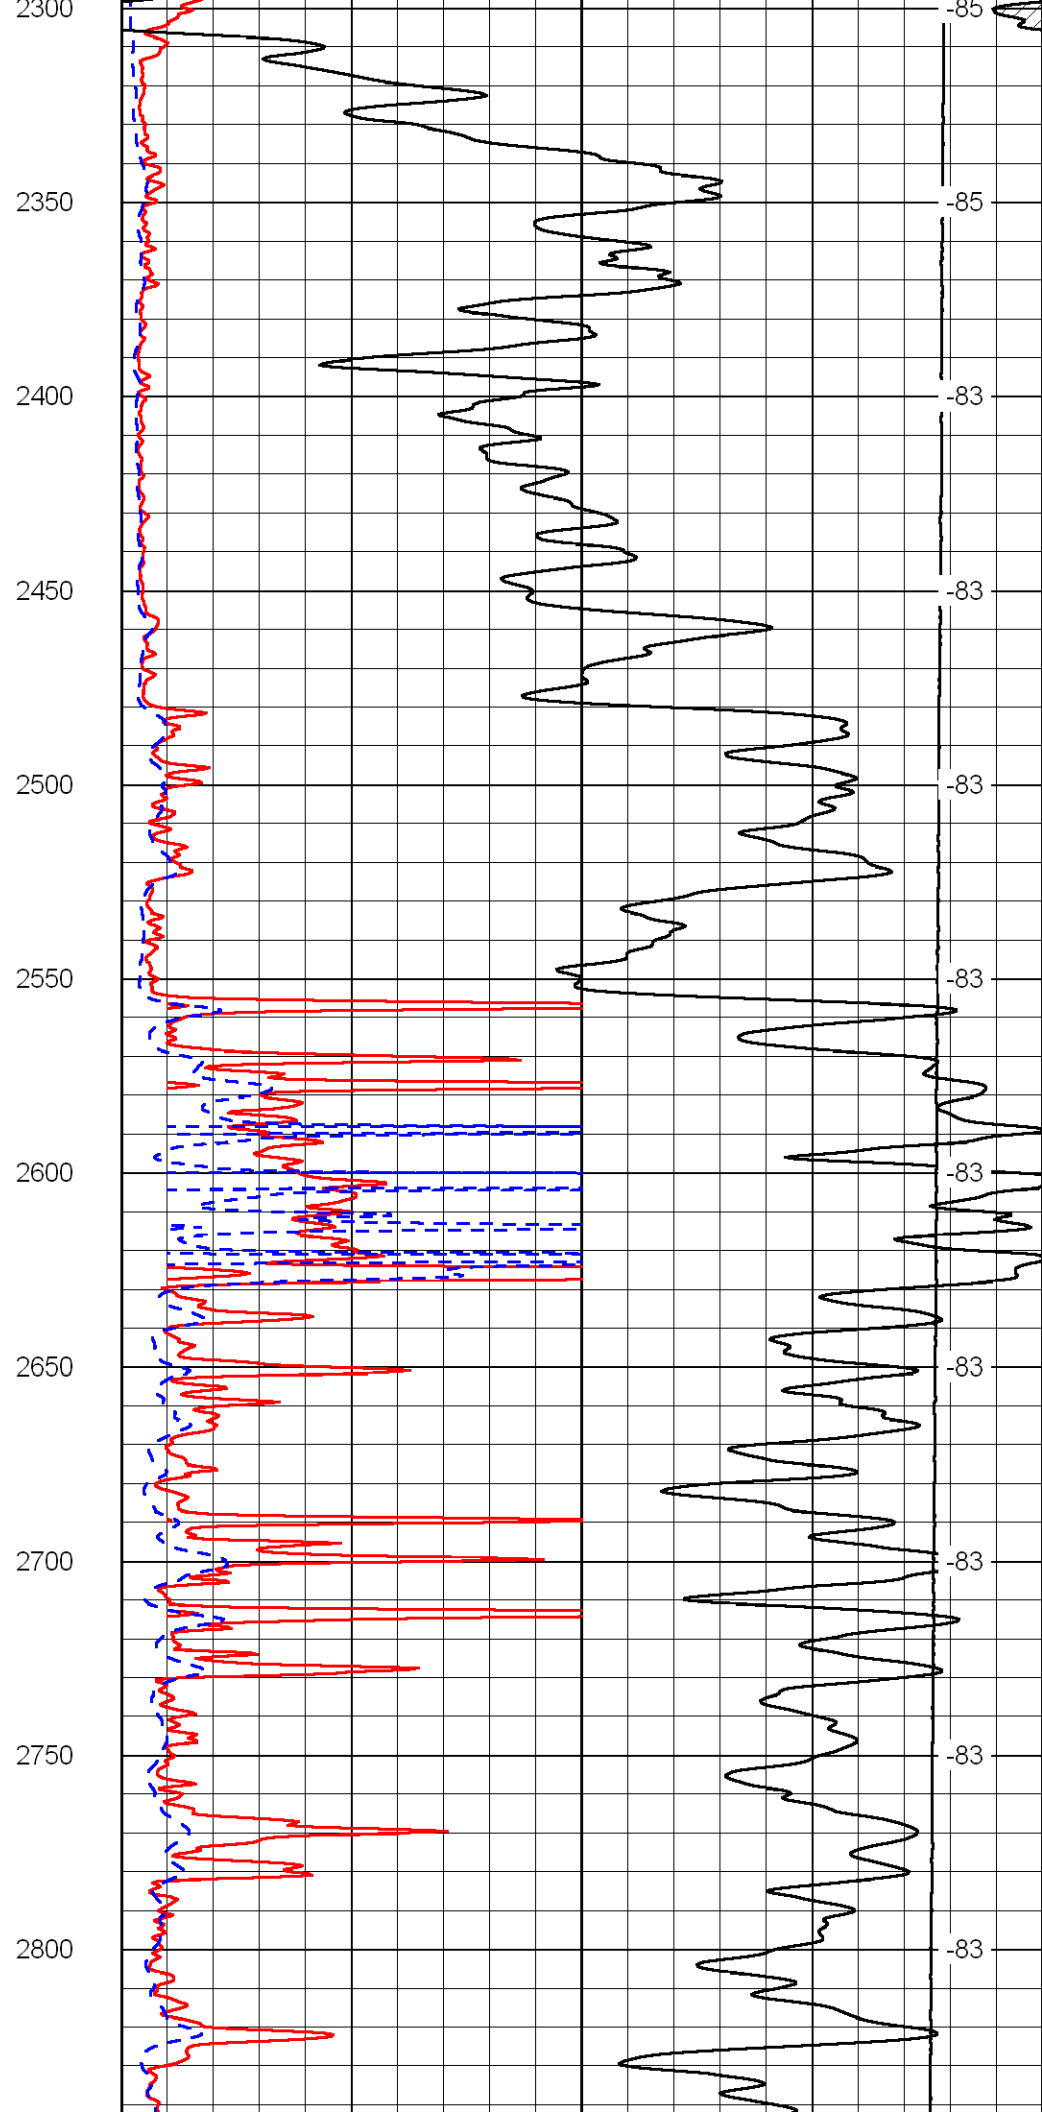
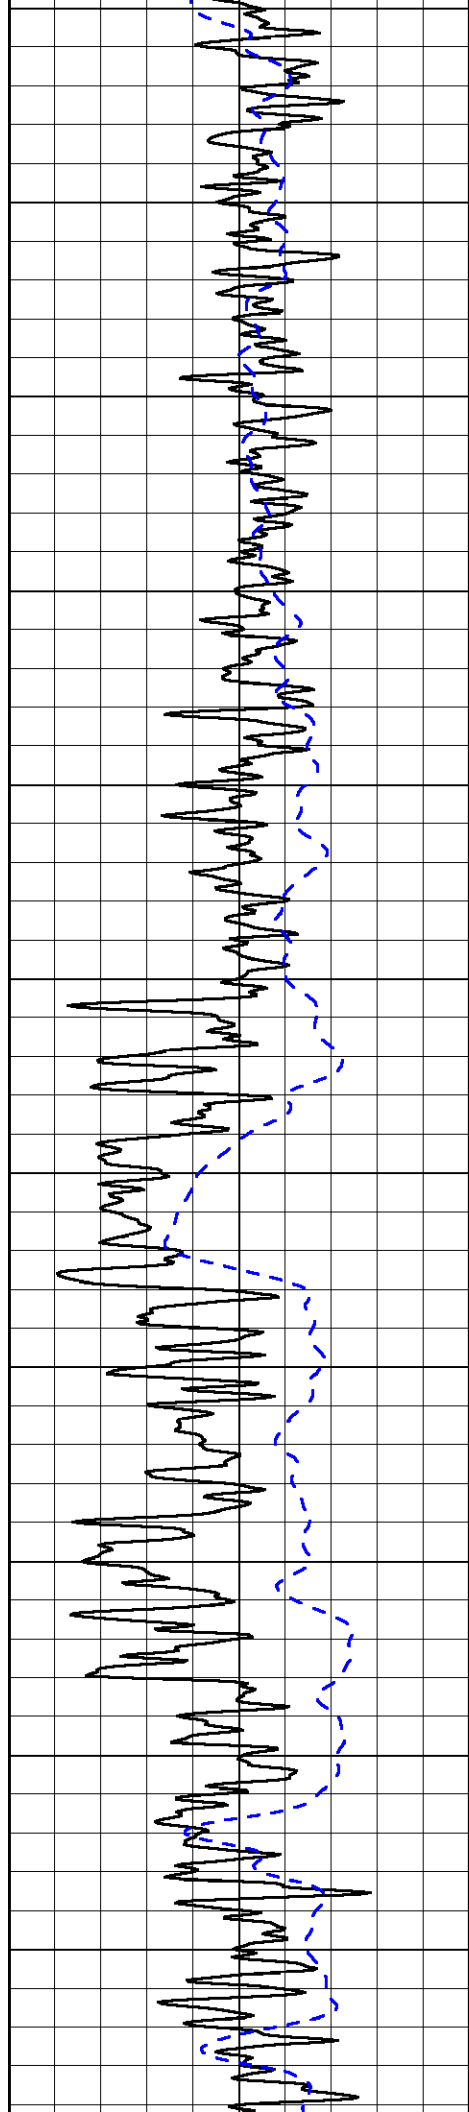


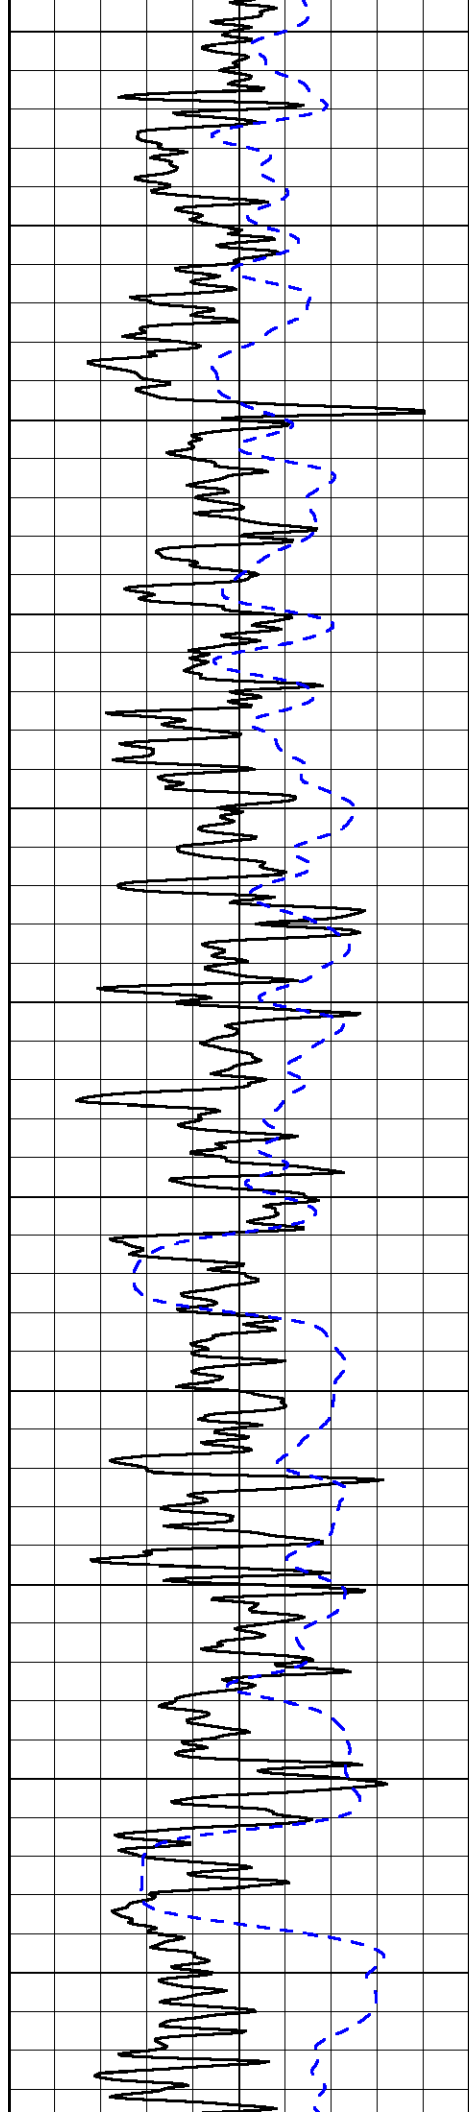


2850
2900
2950
3000
3050
3100
3150
3200
3250
3300
3350

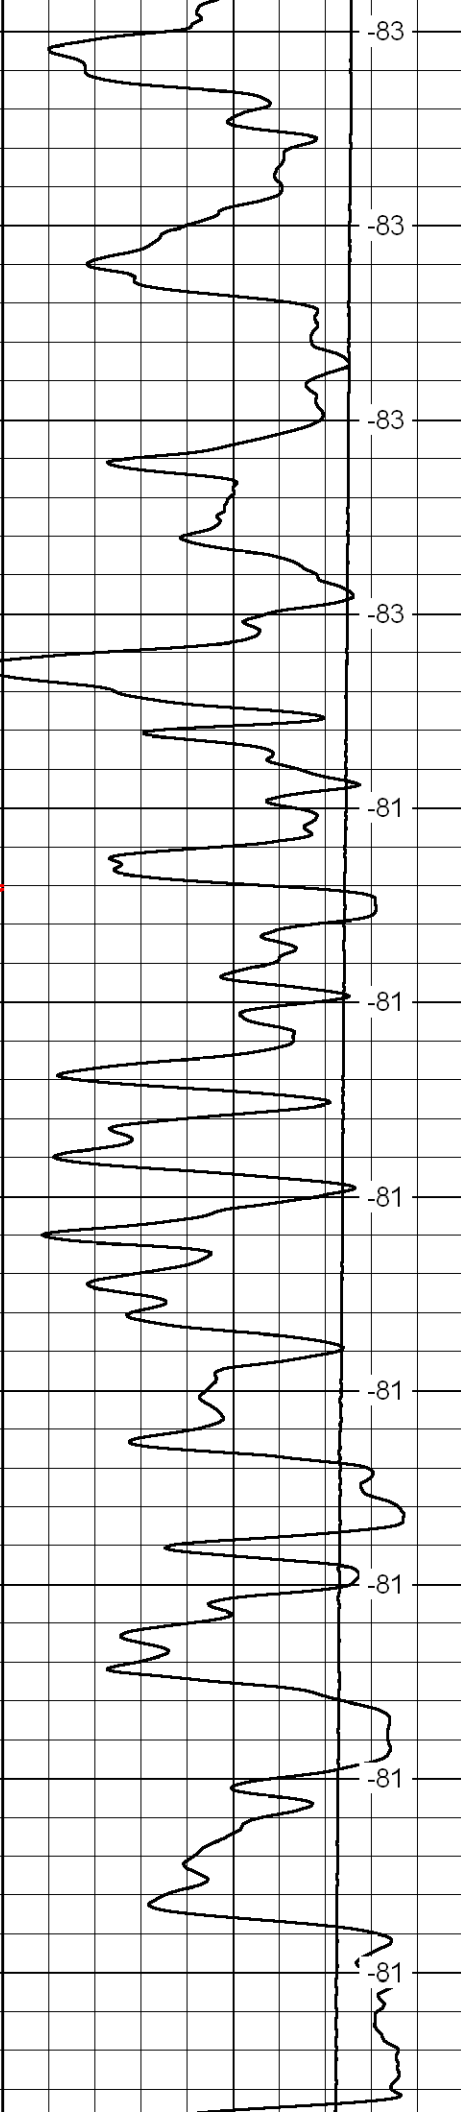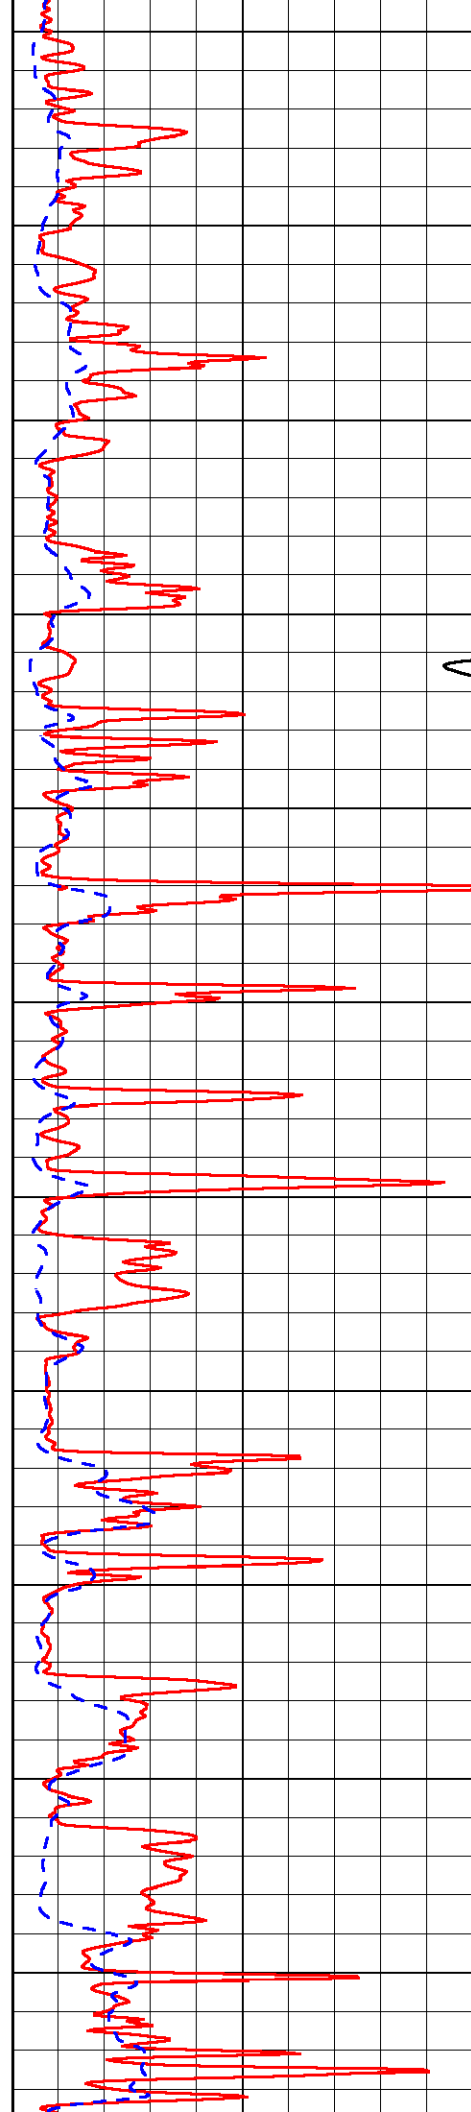

-83
-83
-83
-83
-81
-81
-81
-81
-81
-81
-81

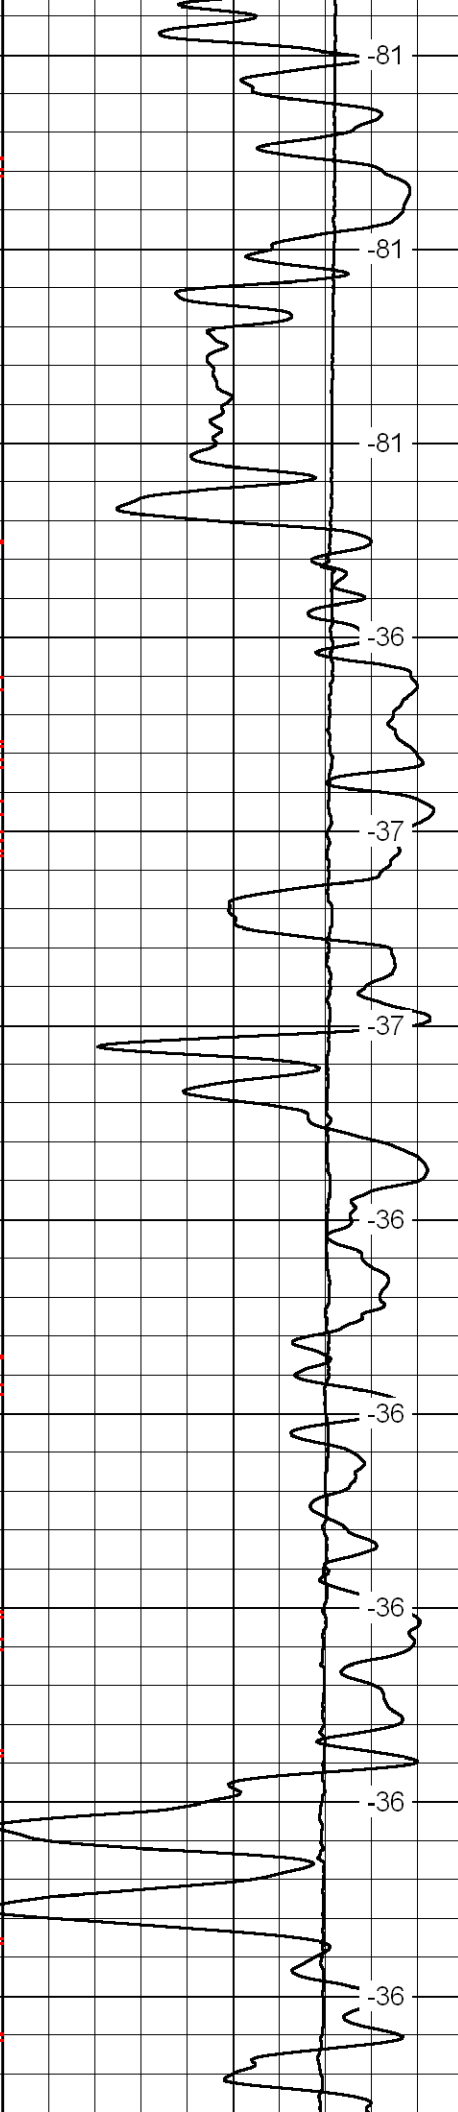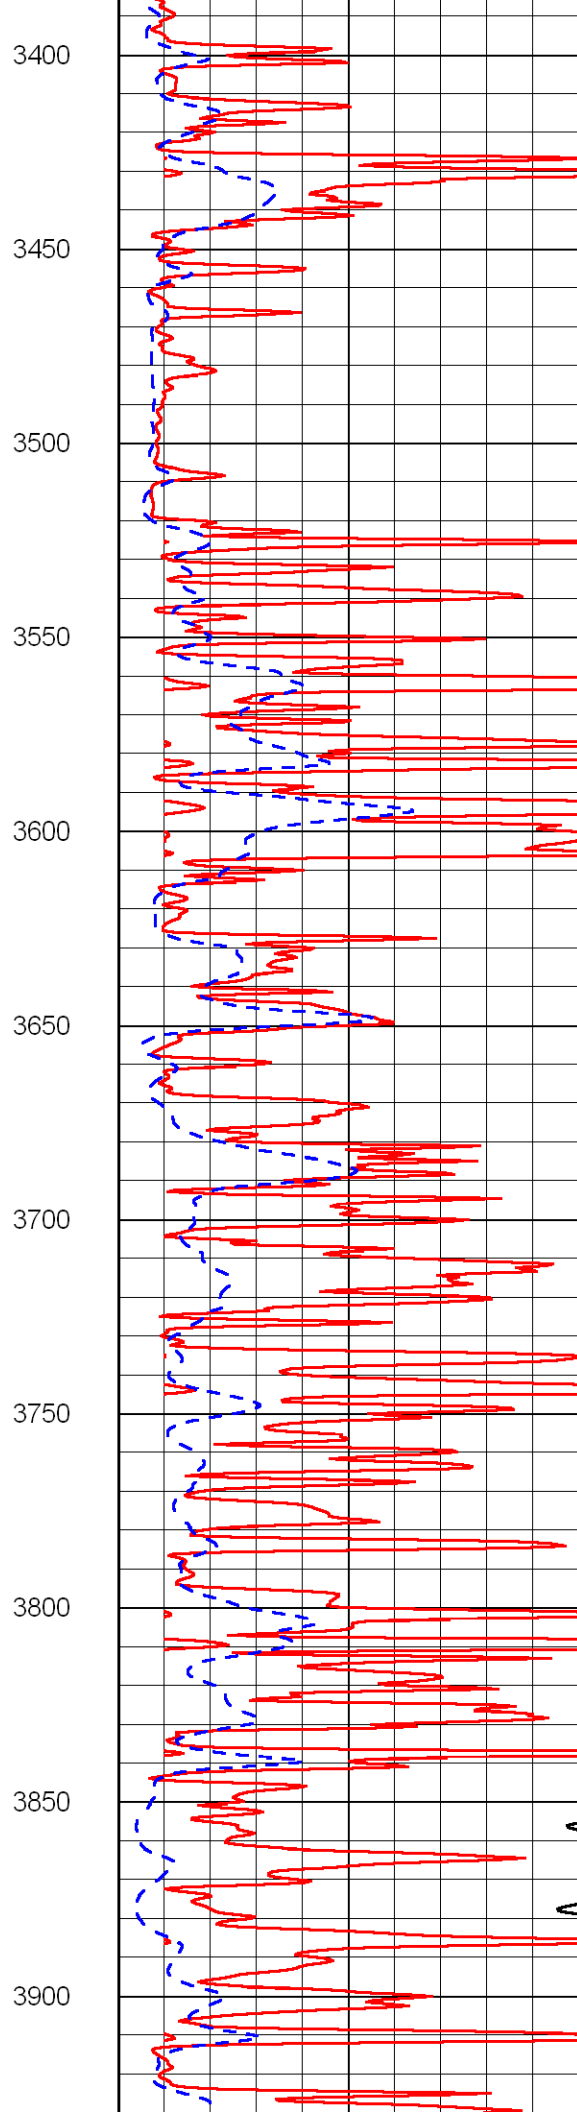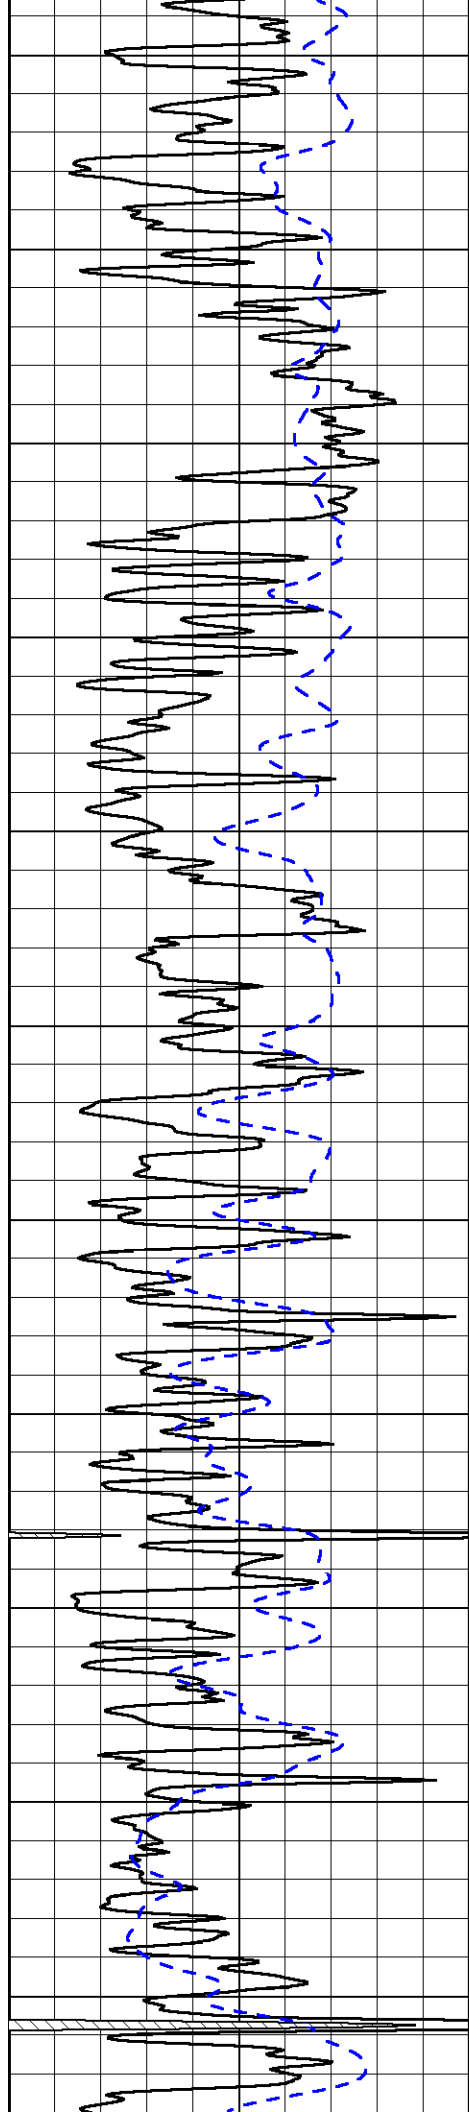

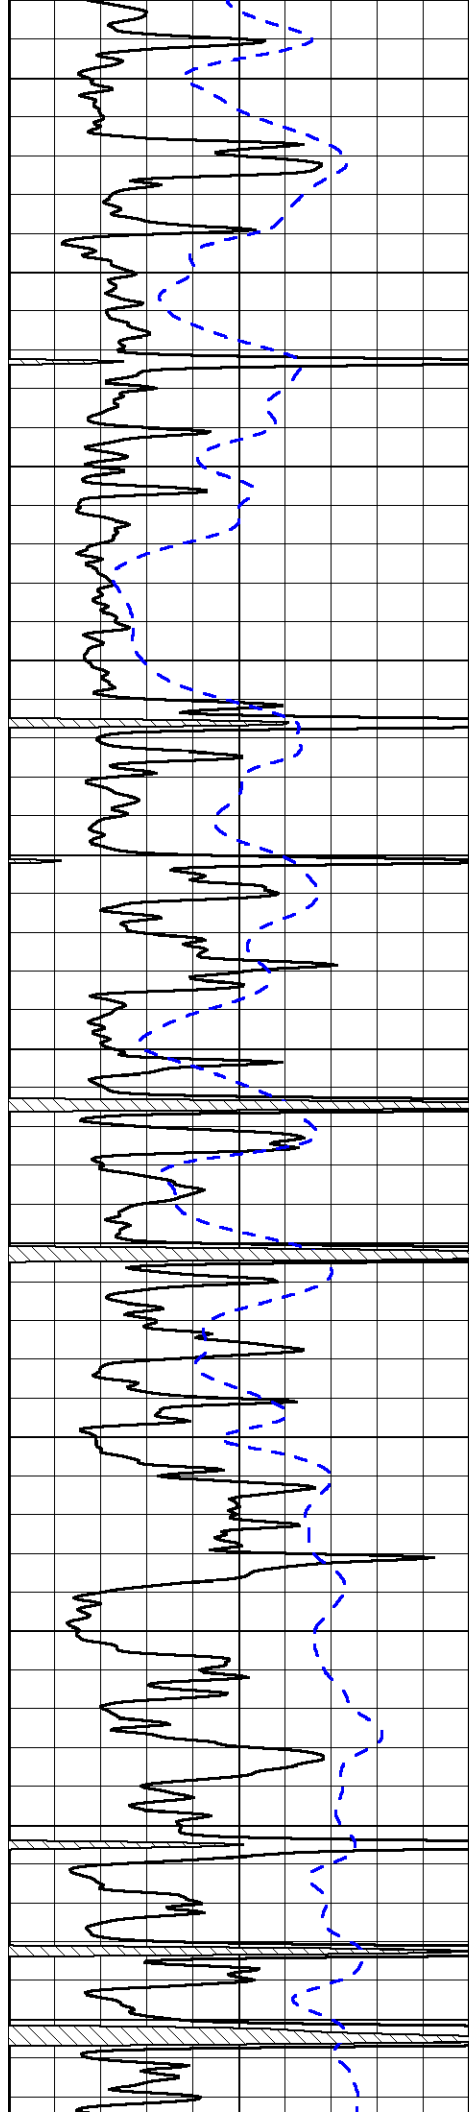

3950

4000

4050

4100

4150

4200


4250

4300

4350

4400

4450

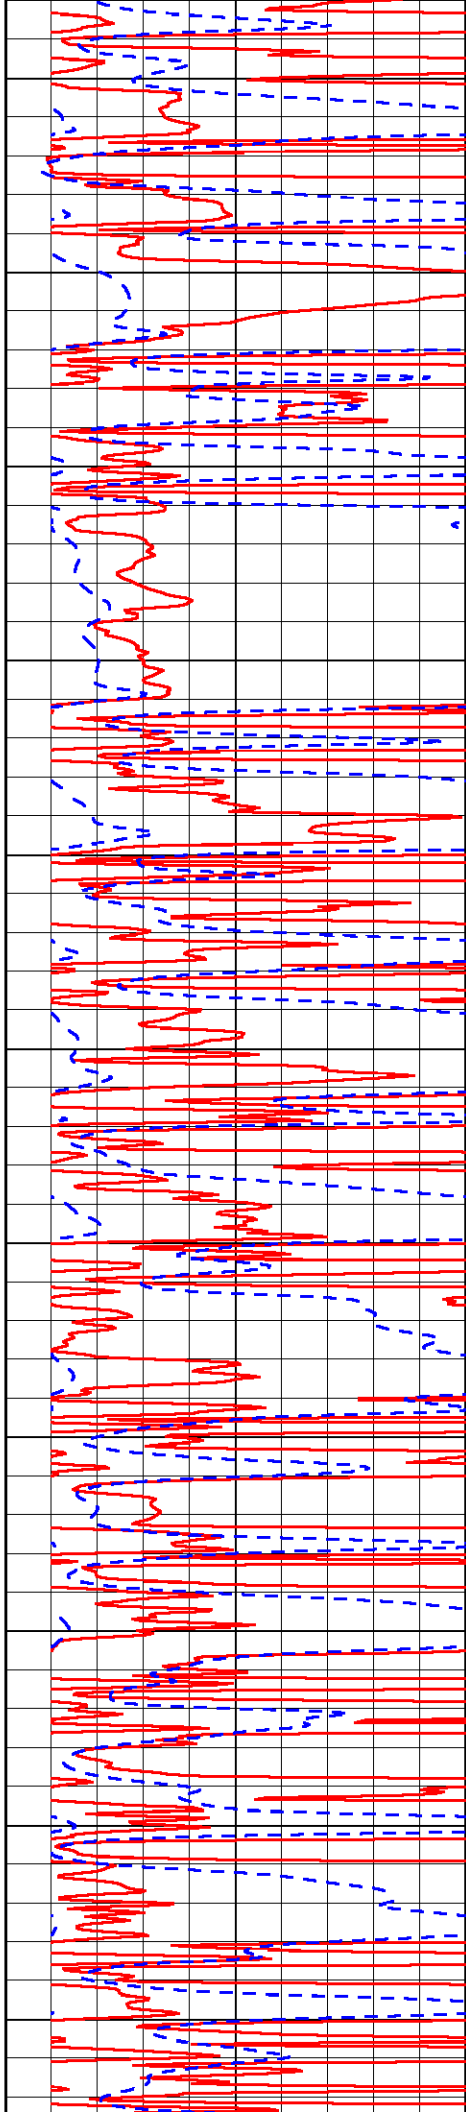

-36

-36

-36

-35

-36

-36


-36


-36

-35



-35


-35

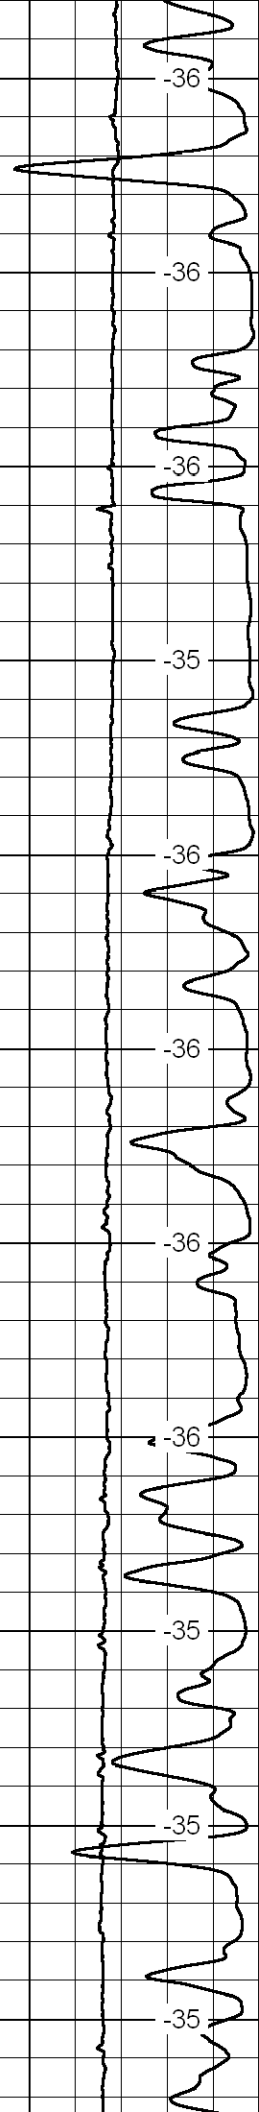

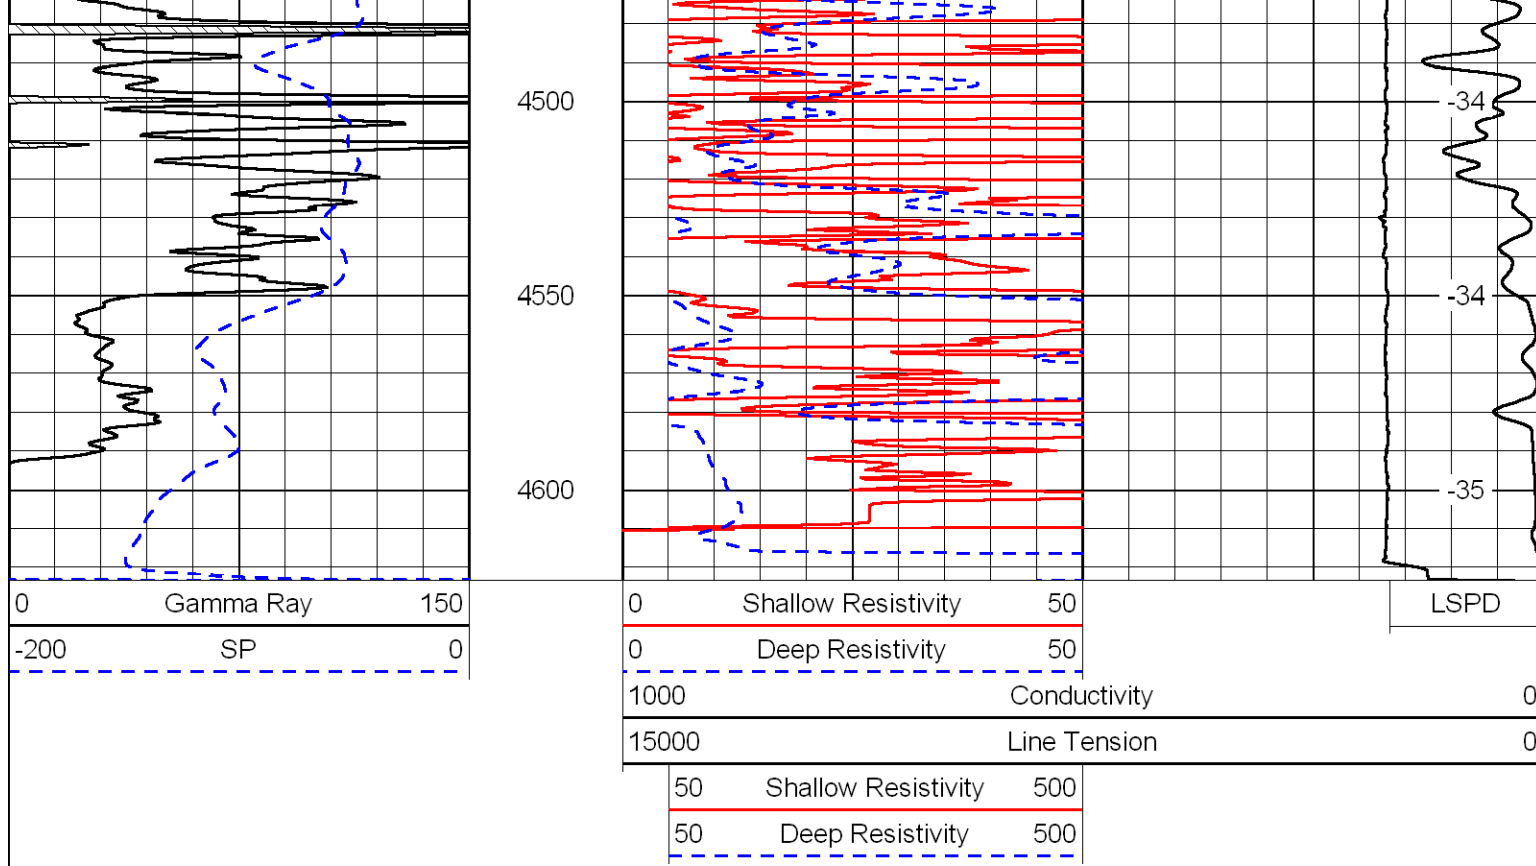


Database File: laron_cramer2-22hd.db
 Dataset Pathname: dil/laron3
 Presentation Format: dil
 Dataset Creation: Sun Sep 19 18:04:26 2010
 Charted by: Depth in Feet scaled 1:240


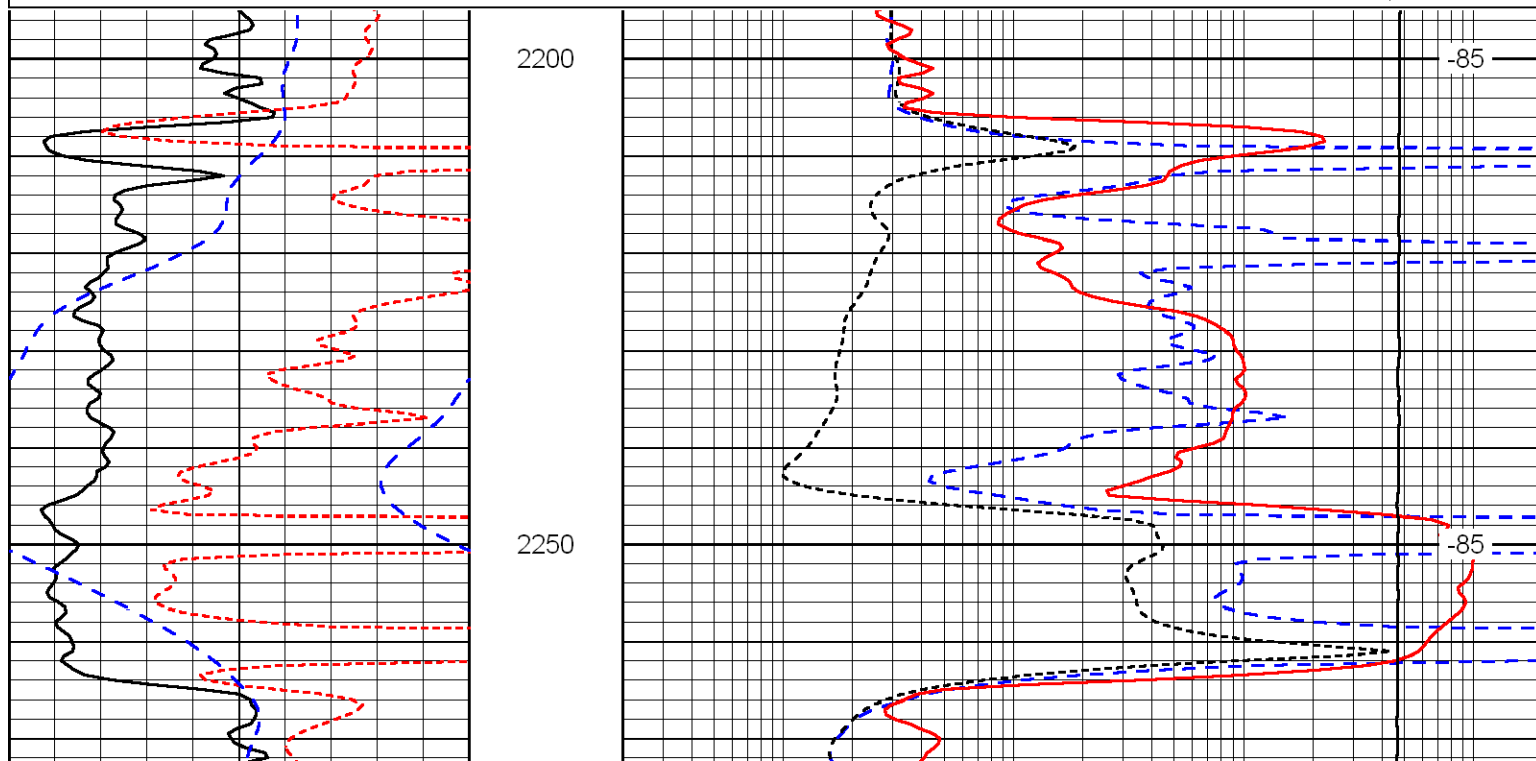
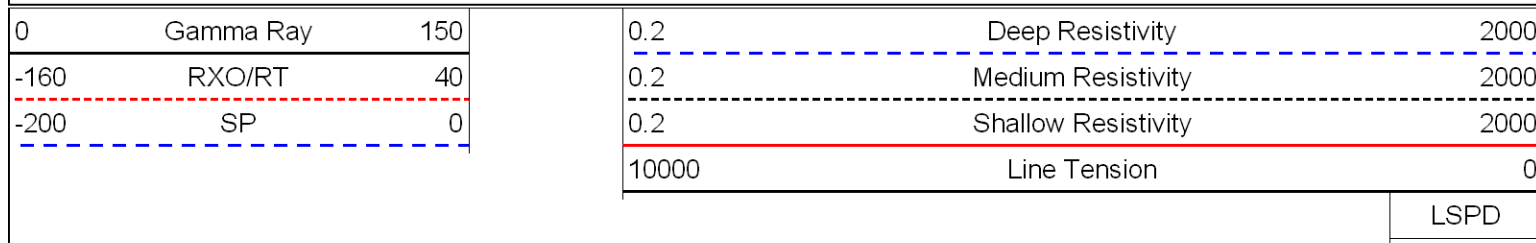


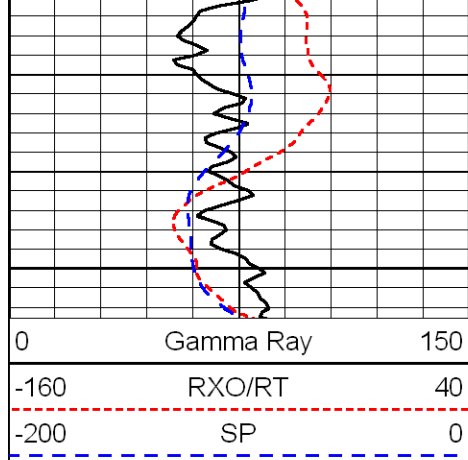

2300

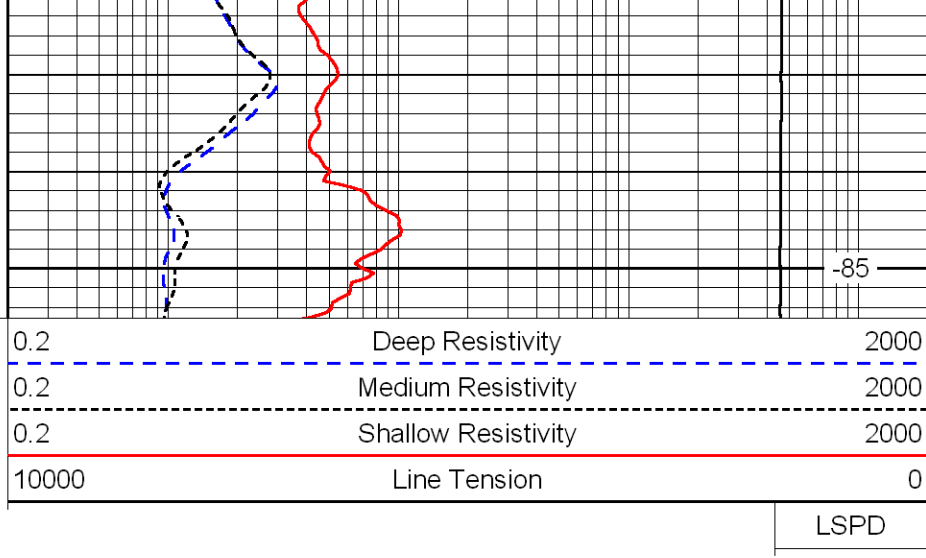


Database File: laron_cramer2-22hd.db
 Dataset Pathname: dil/laron3
 Presentation Format: dil
 Dataset Creation: Sun Sep 19 18:04:26 2010
 Charted by: Depth in Feet scaled 1:240

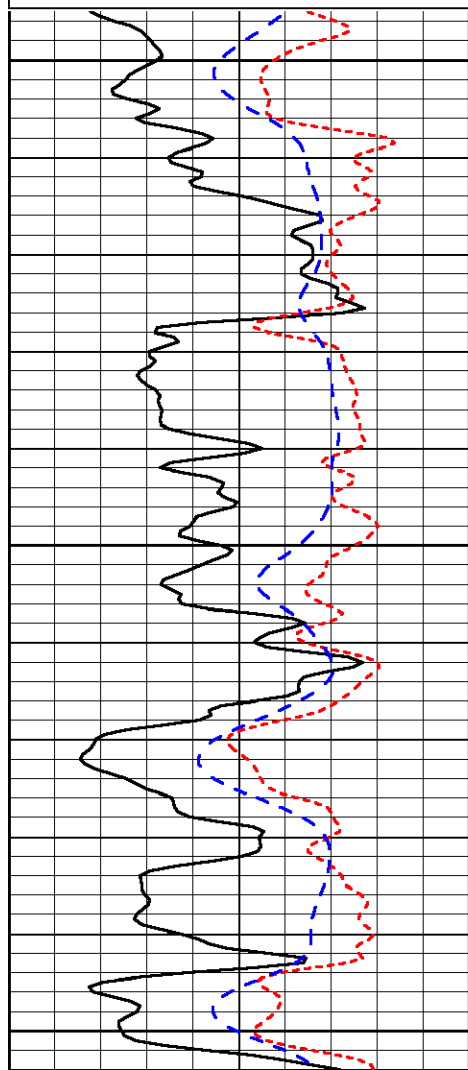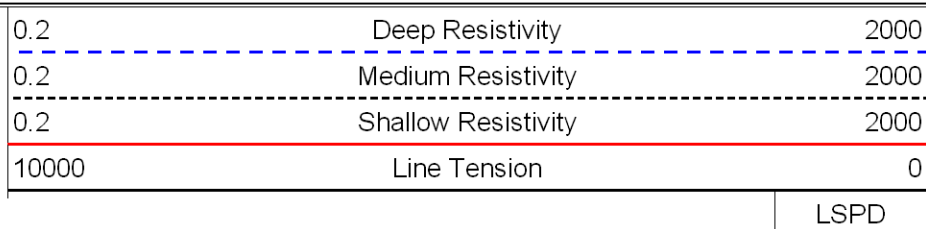


3600

3650

3700

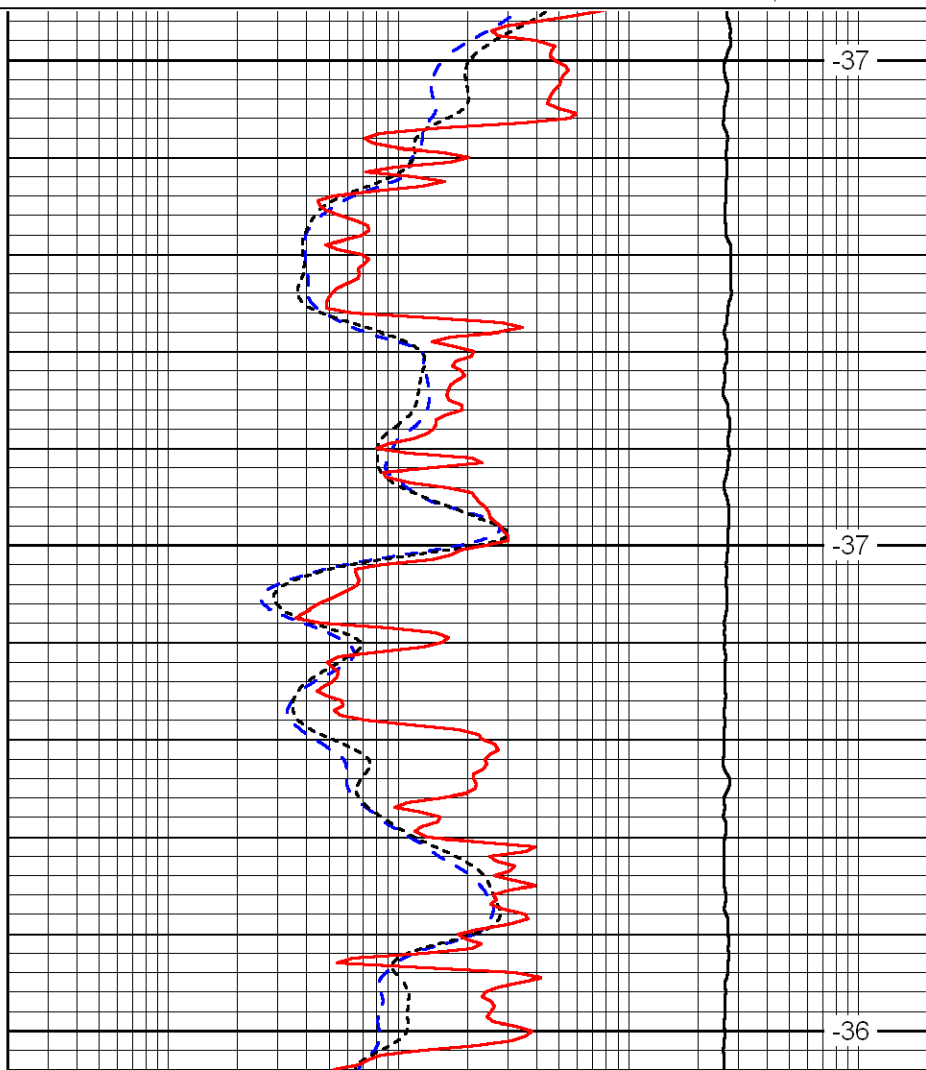

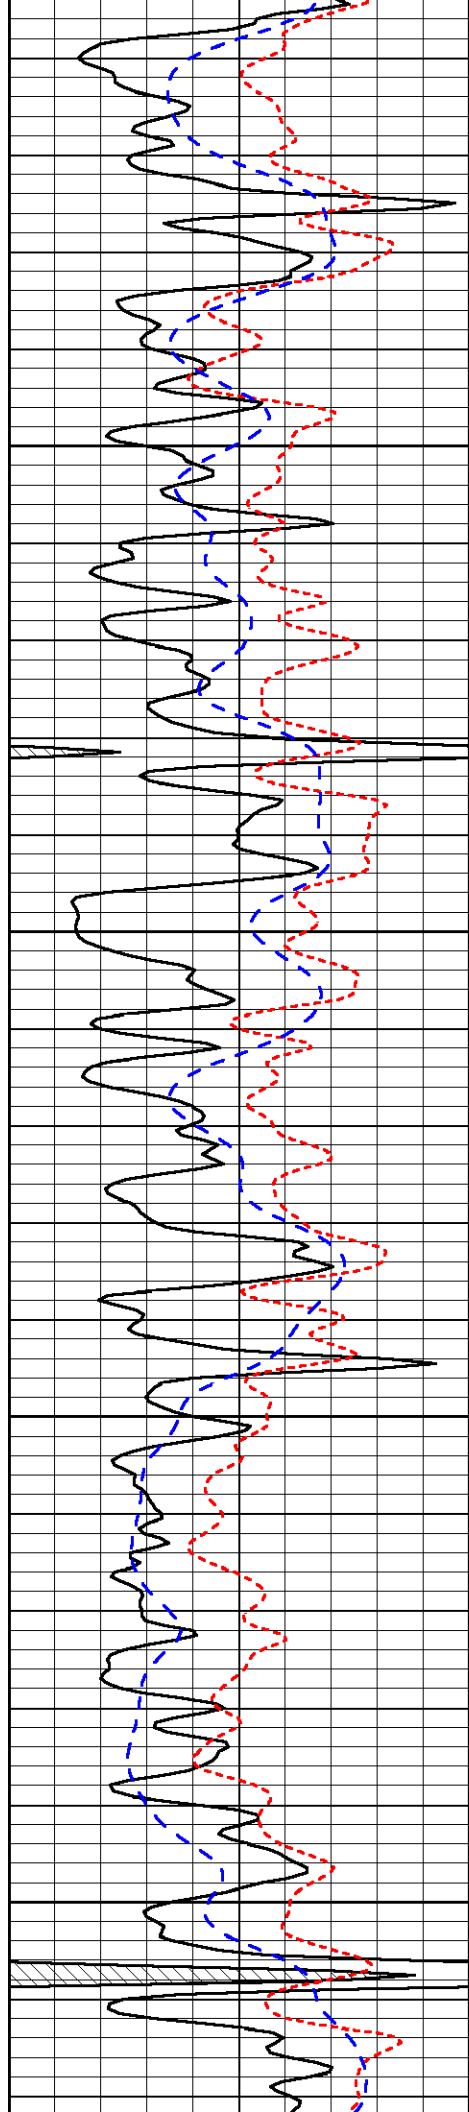


3750

3800

3850

3900

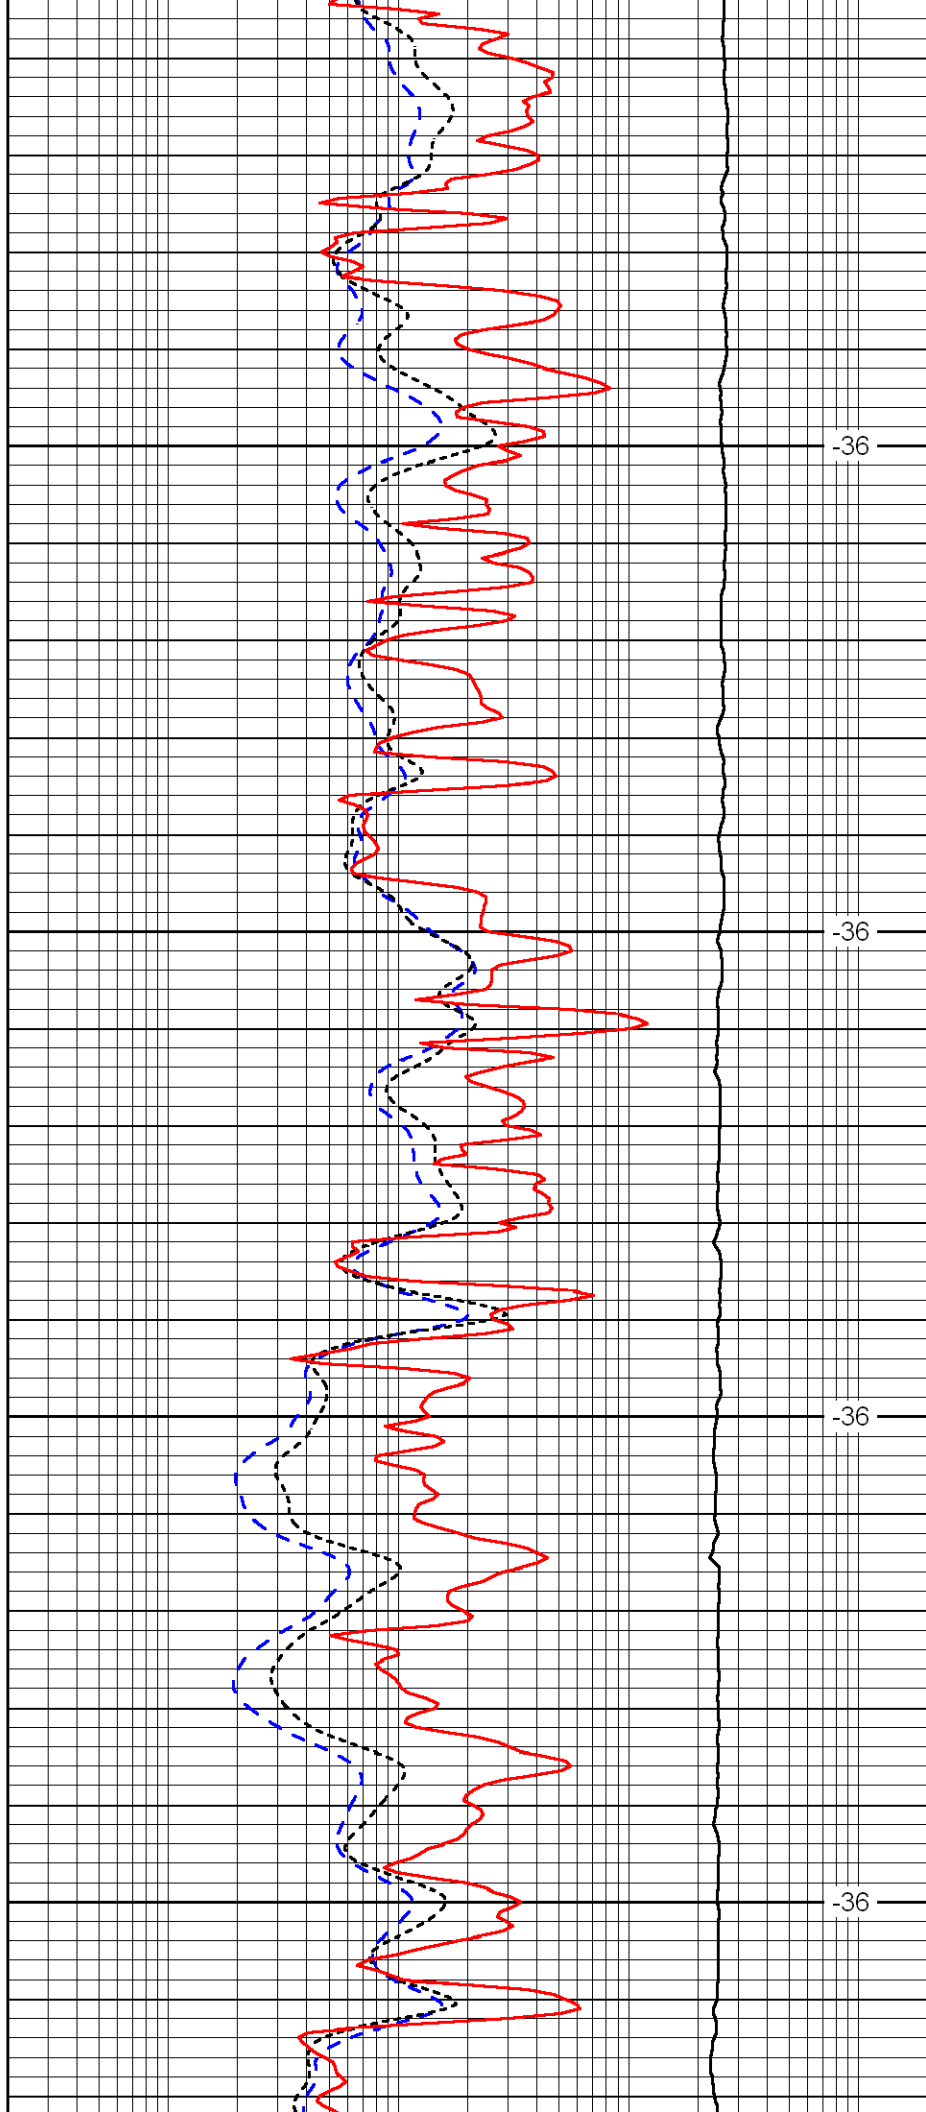


-36

-36

-36

-36

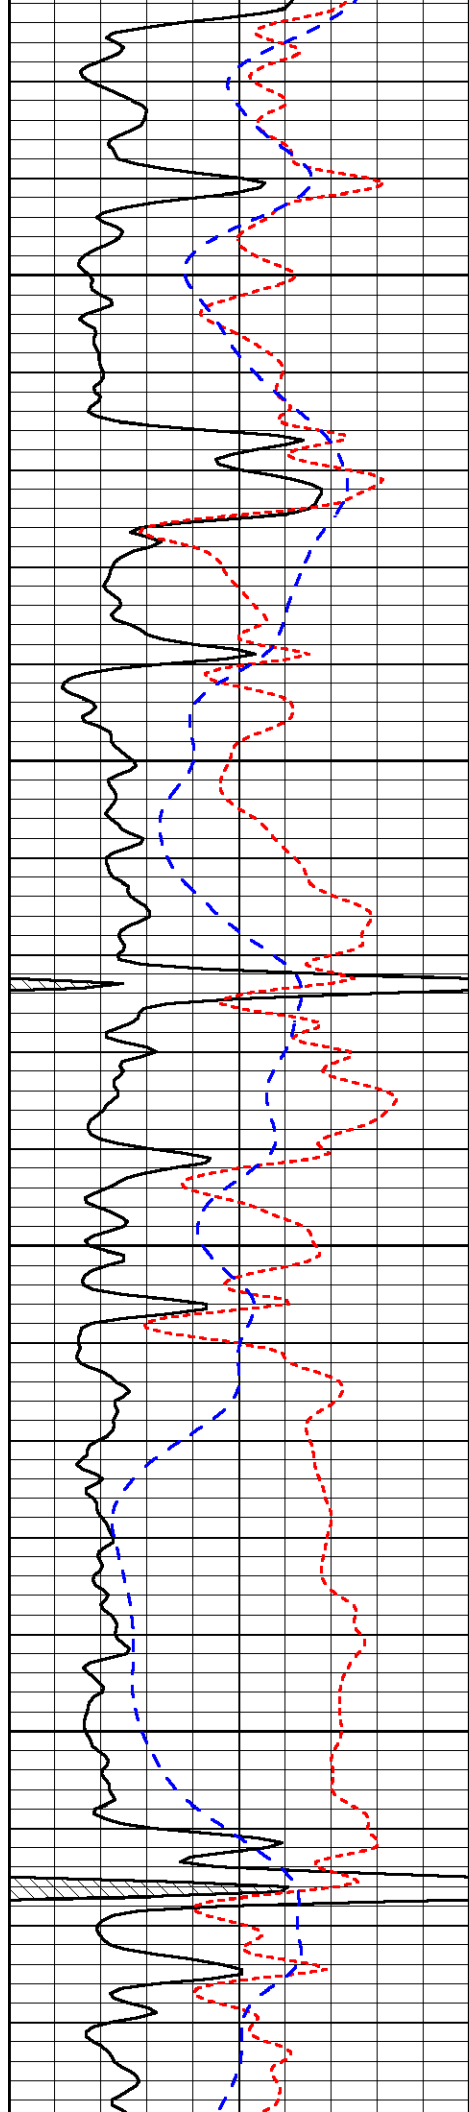


3950

4000

4050

4100

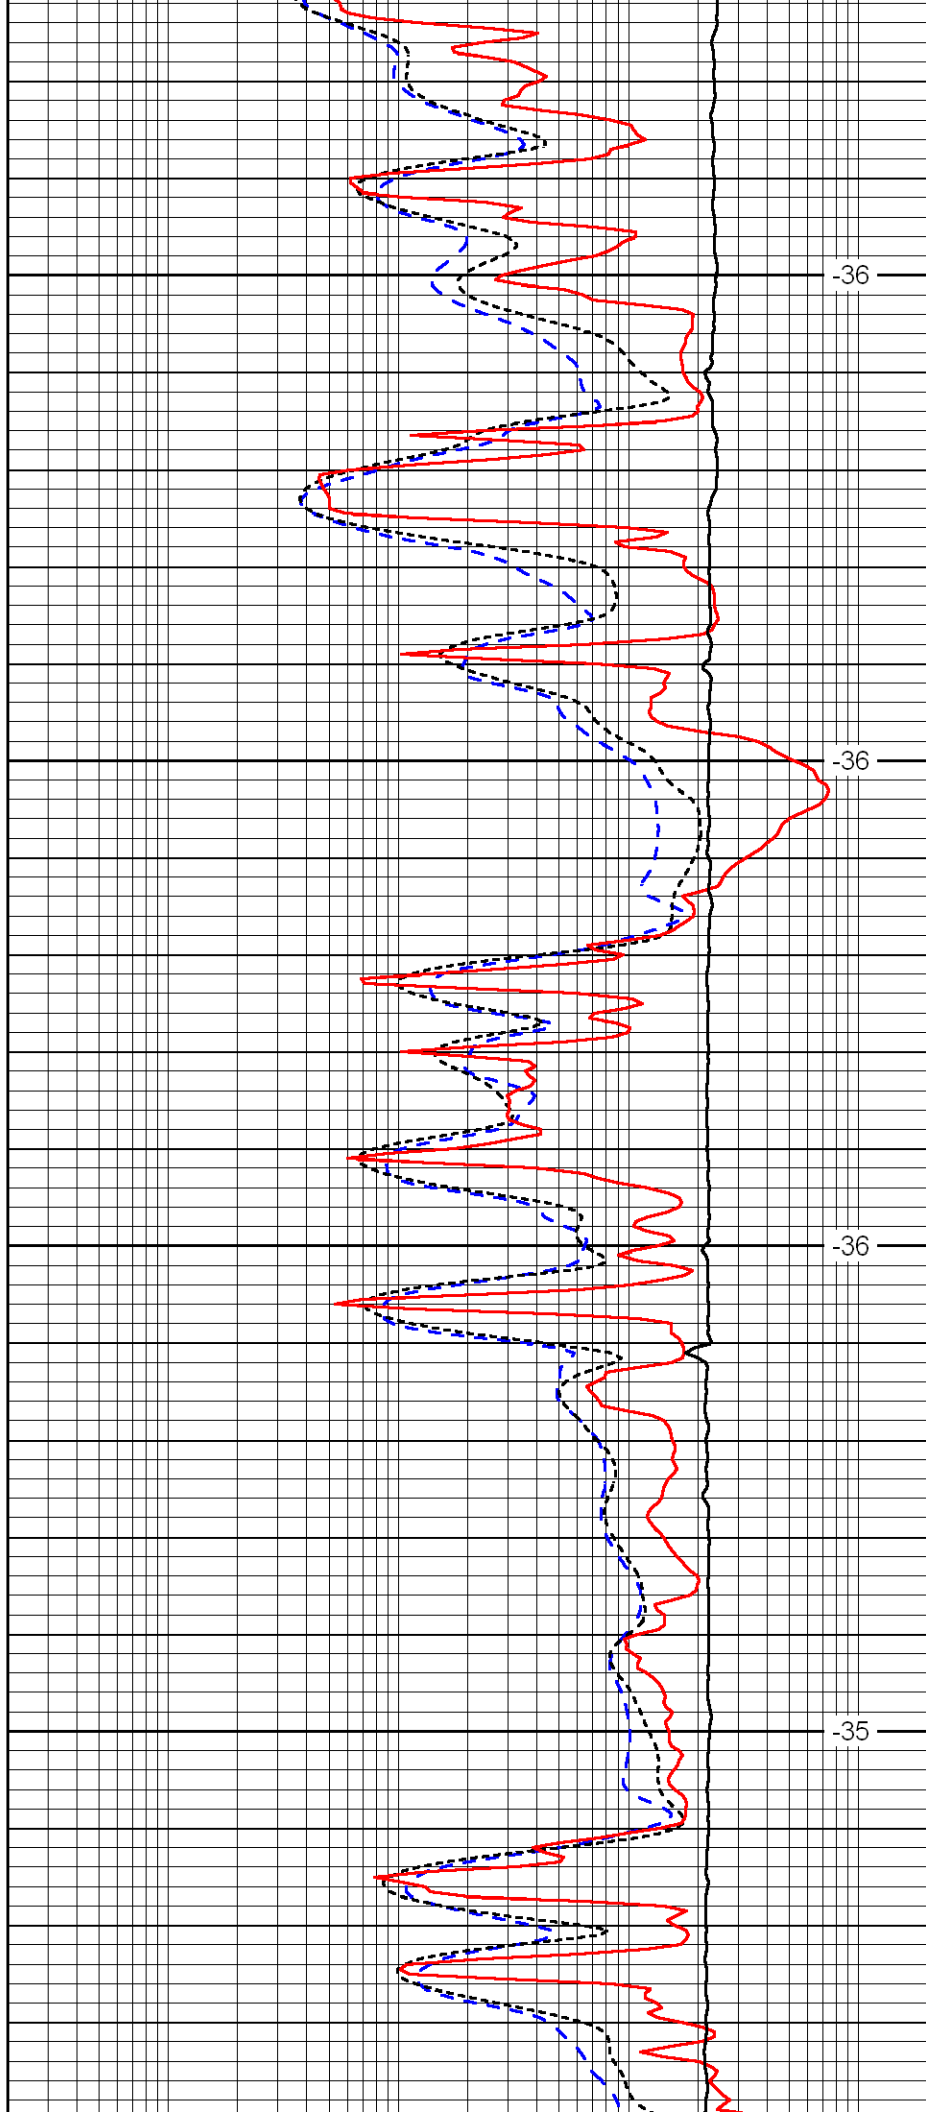


-36

-36

-36

-35

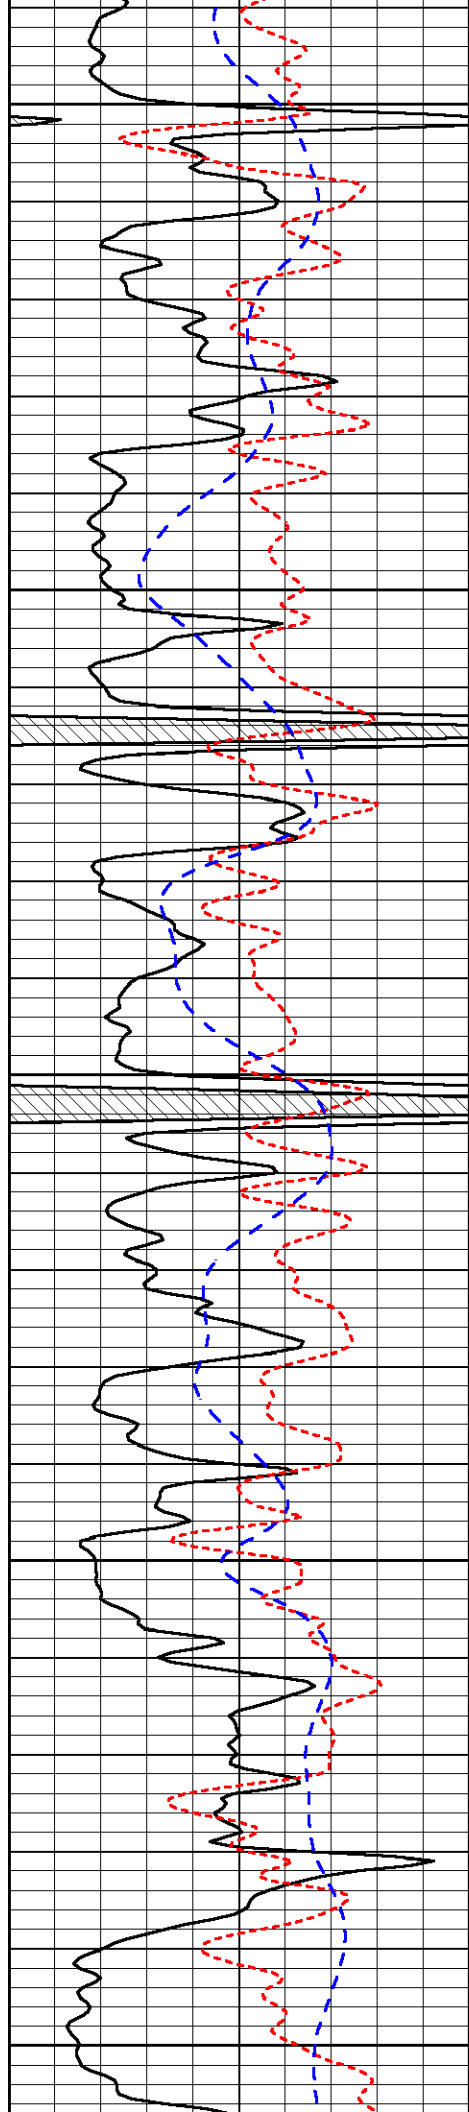


4150

4200

4250

4300

4350

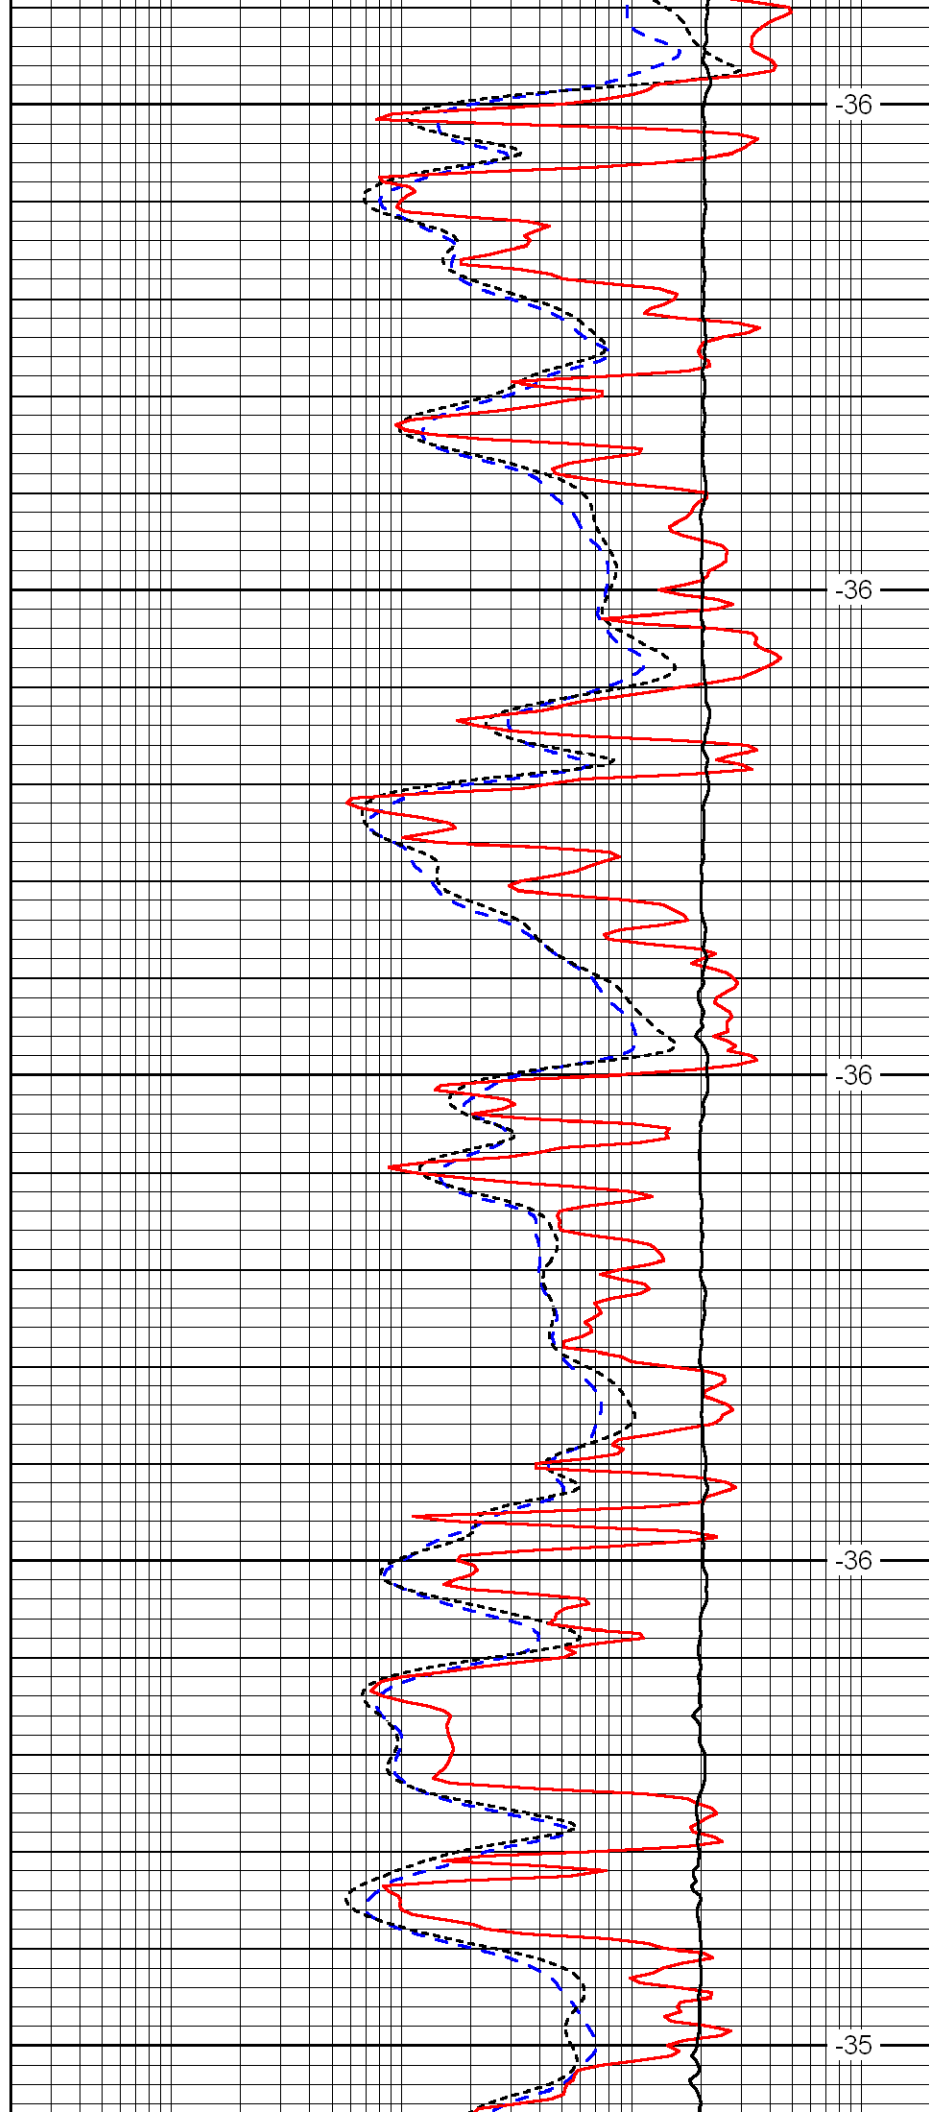


-36

-36

-36

-36

-35

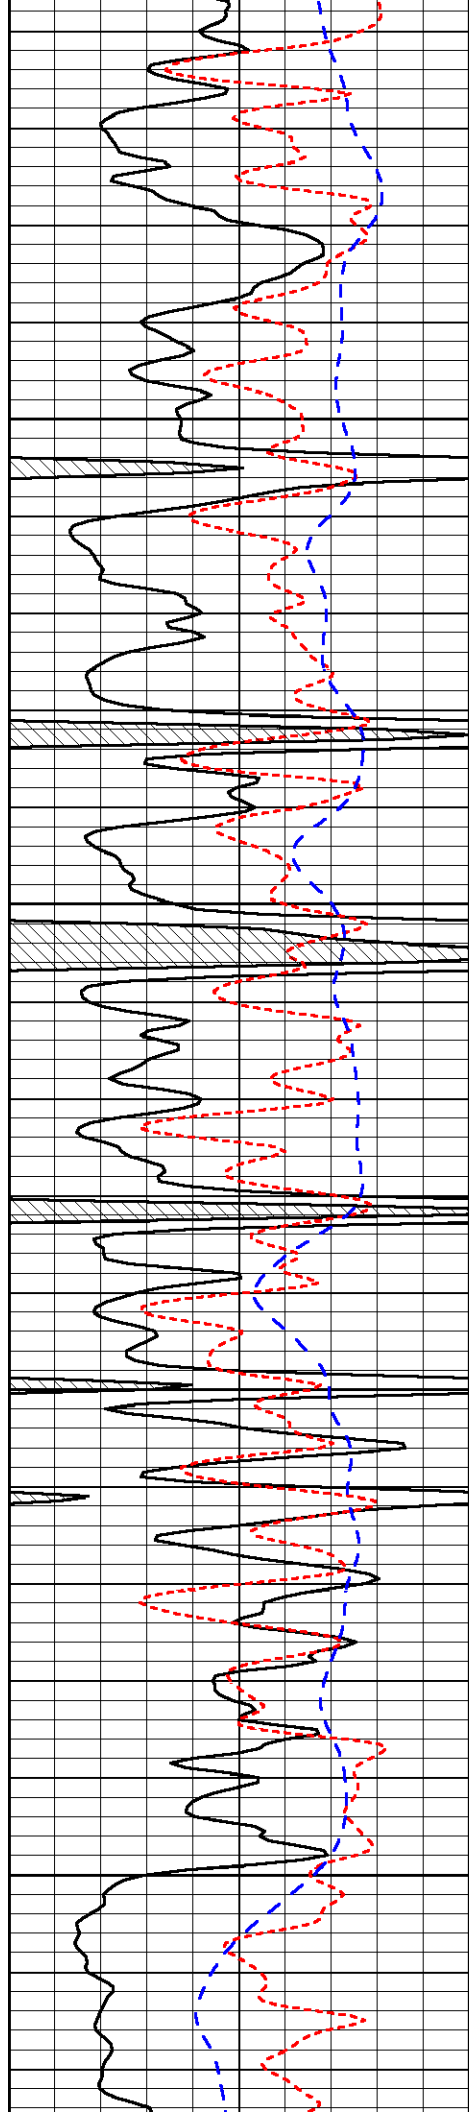


4400

4450

4500

4550

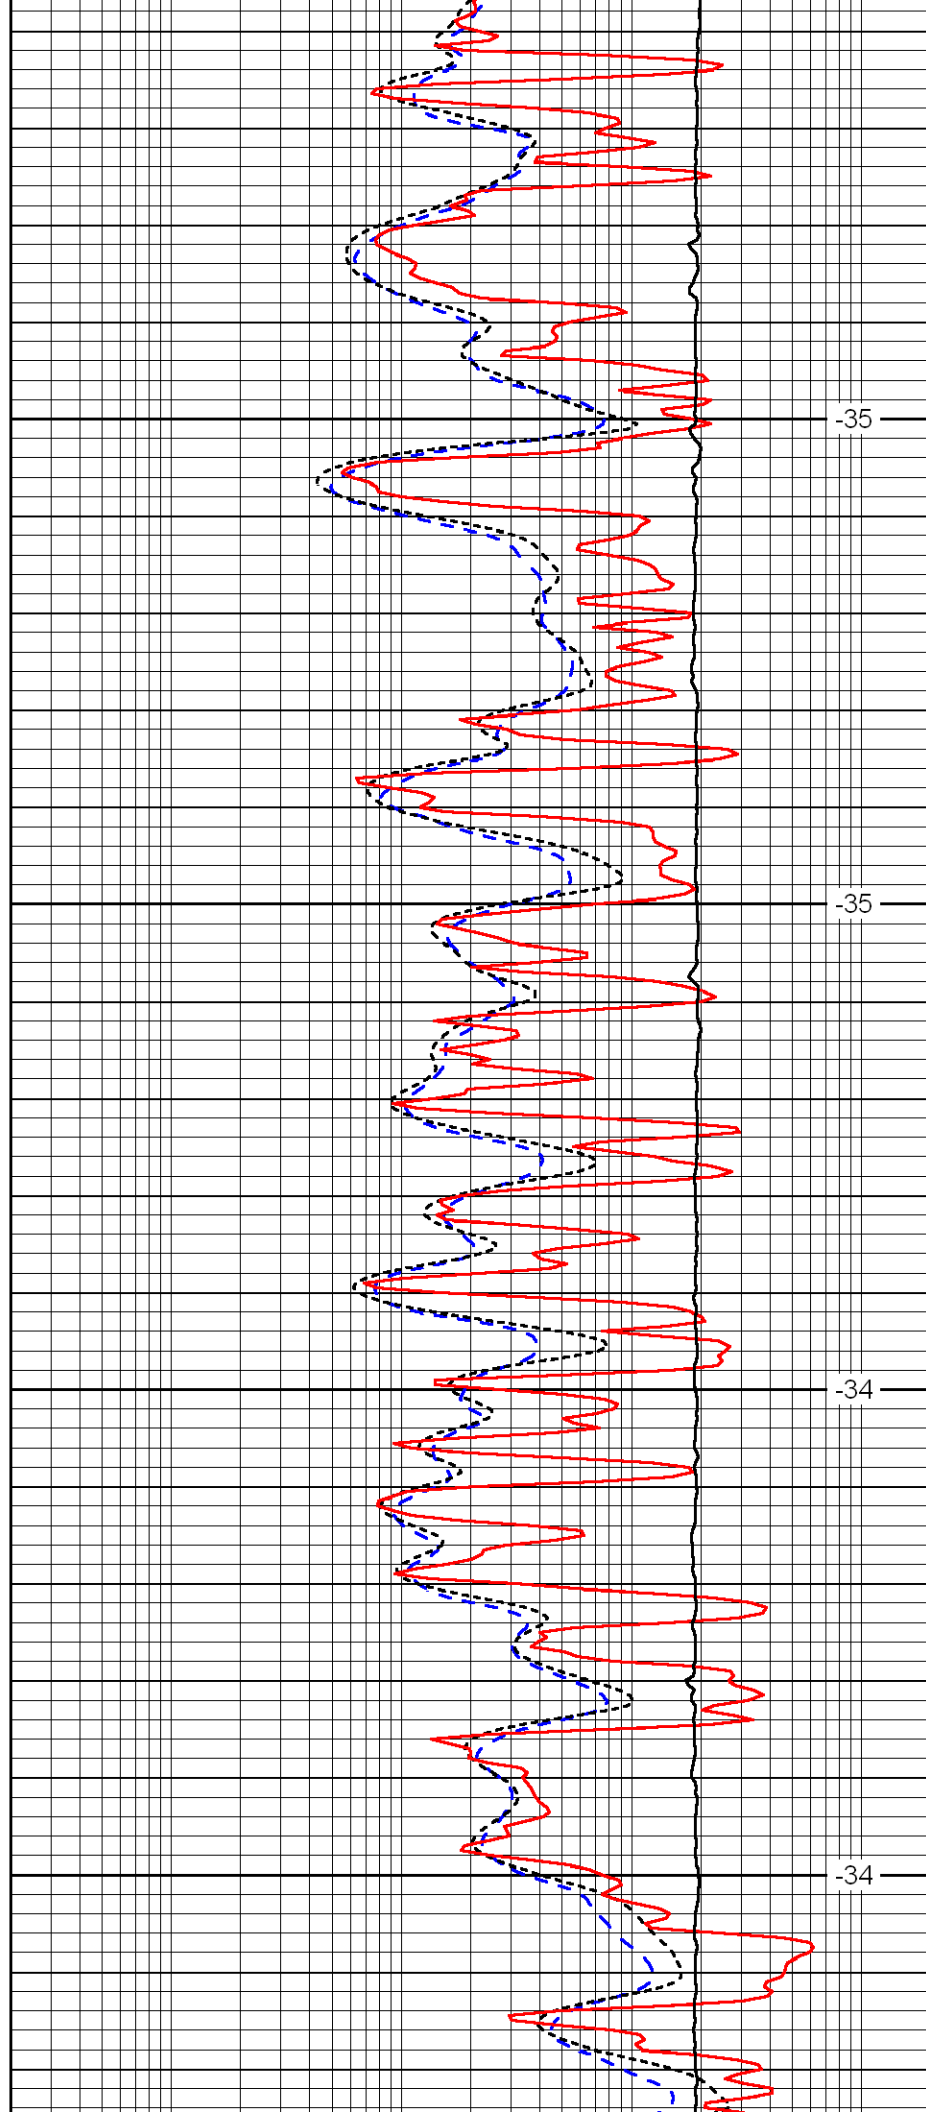


-35

-35


-34

-34

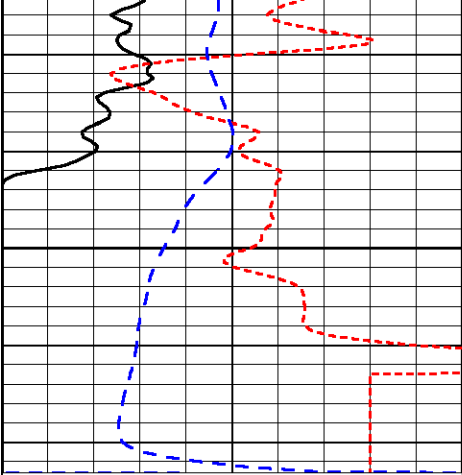

4600

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

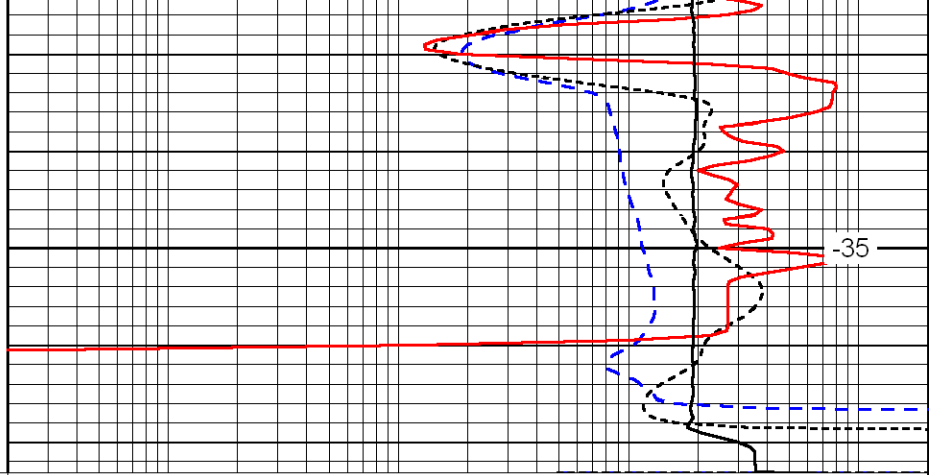

35

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0

LSPD