



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.	
15-101-22,265-00-00		Well Ed No 1-25	
Field Wildcat		County Lane State Kansas	
Location 1311' FNL & 1775' FEL		Other Services CNL/CDL DIL	
Sec: 25 Twp: 18S Rge: 27W		Elevation	
Permanent Datum Ground Level		K.B. 2617	
Log Measured From Kelly Bushing		D.F. 2610	
Drilling Measured From Kelly Bushing		G.L. 2610	
Date	11/23/2010		
Run Number	Two		
Depth Driller	4650		
Depth Logger	4654		
Bottom Logged Interval	4653		
Top Log Interval	3600		
Casing Driller	8.625 @ 257		
Casing Logger	254		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3.300		
Density / Viscosity	9.4 50		
pH / Fluid Loss	11.0 8.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.2 @ 70		
Rmf @ Meas. Temp	.90 @ 70		
Rmc @ Meas. Temp	1.62 @ 70		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.67 @ 125		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	125		
Equipment Number	17		
Location	Hays		
Recorded By	Mike Garrison		
Witnessed By	Bob Lewellyn		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Ness City, West to Lane/Ness County line 1/2 South, West Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

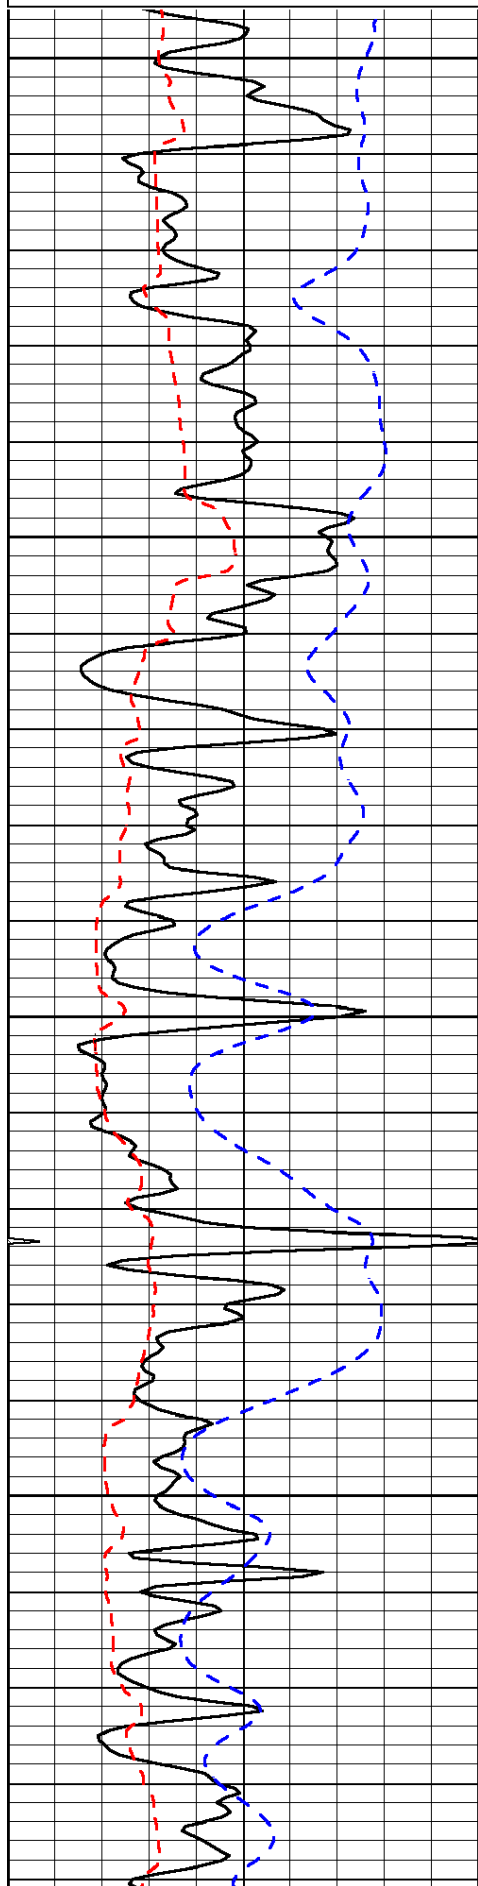


3600

3650

3700

3750

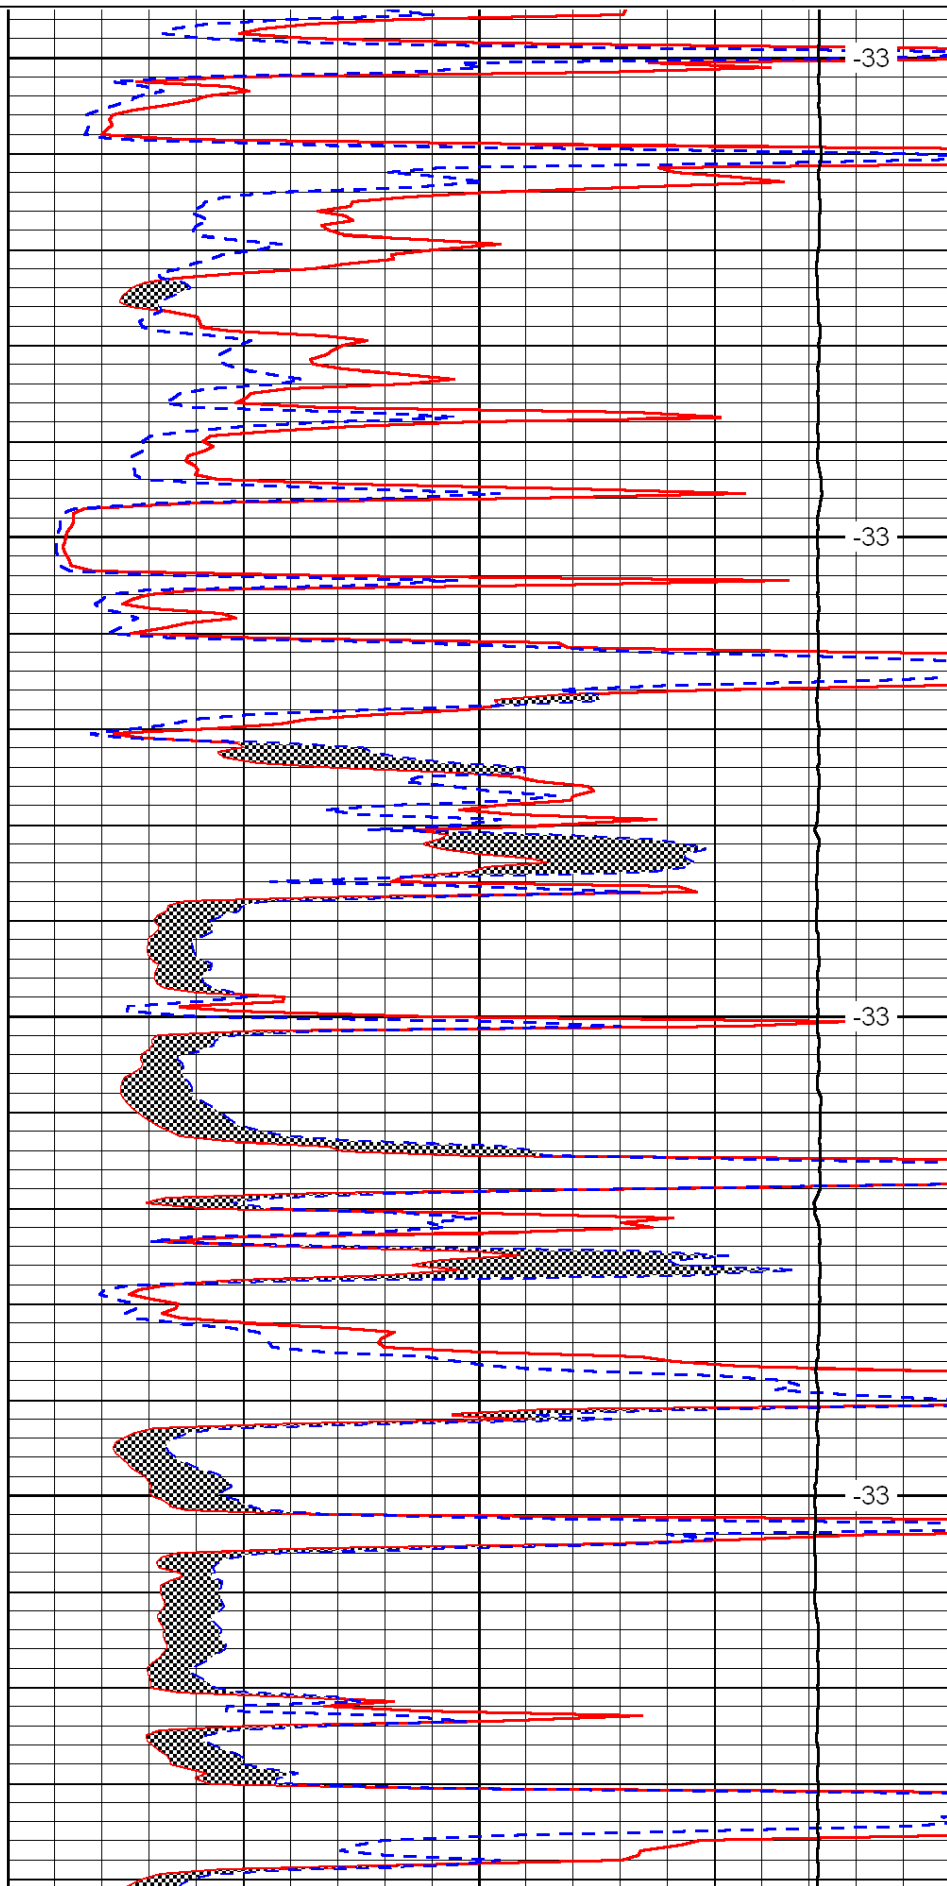


-33

-33

-33

-33

LSPD

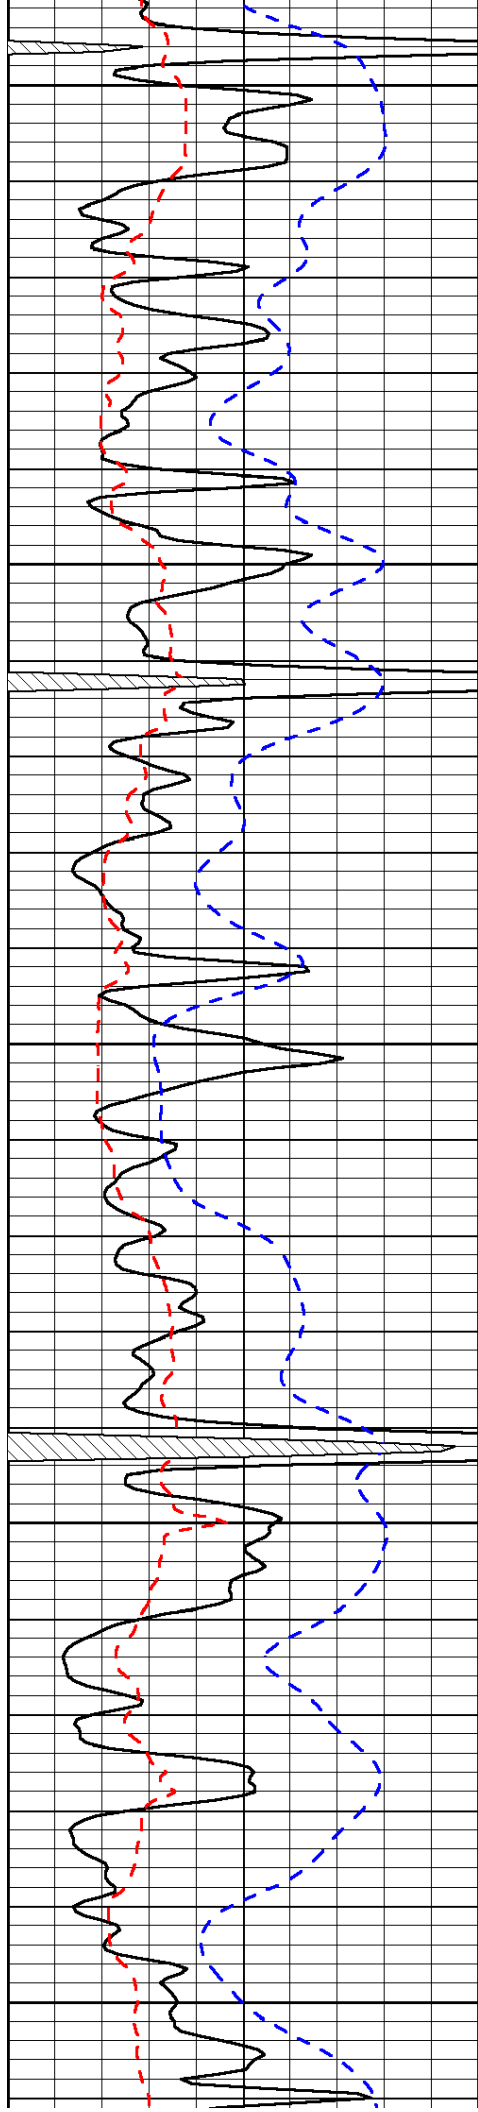


3800

3850

3900

3950

4000

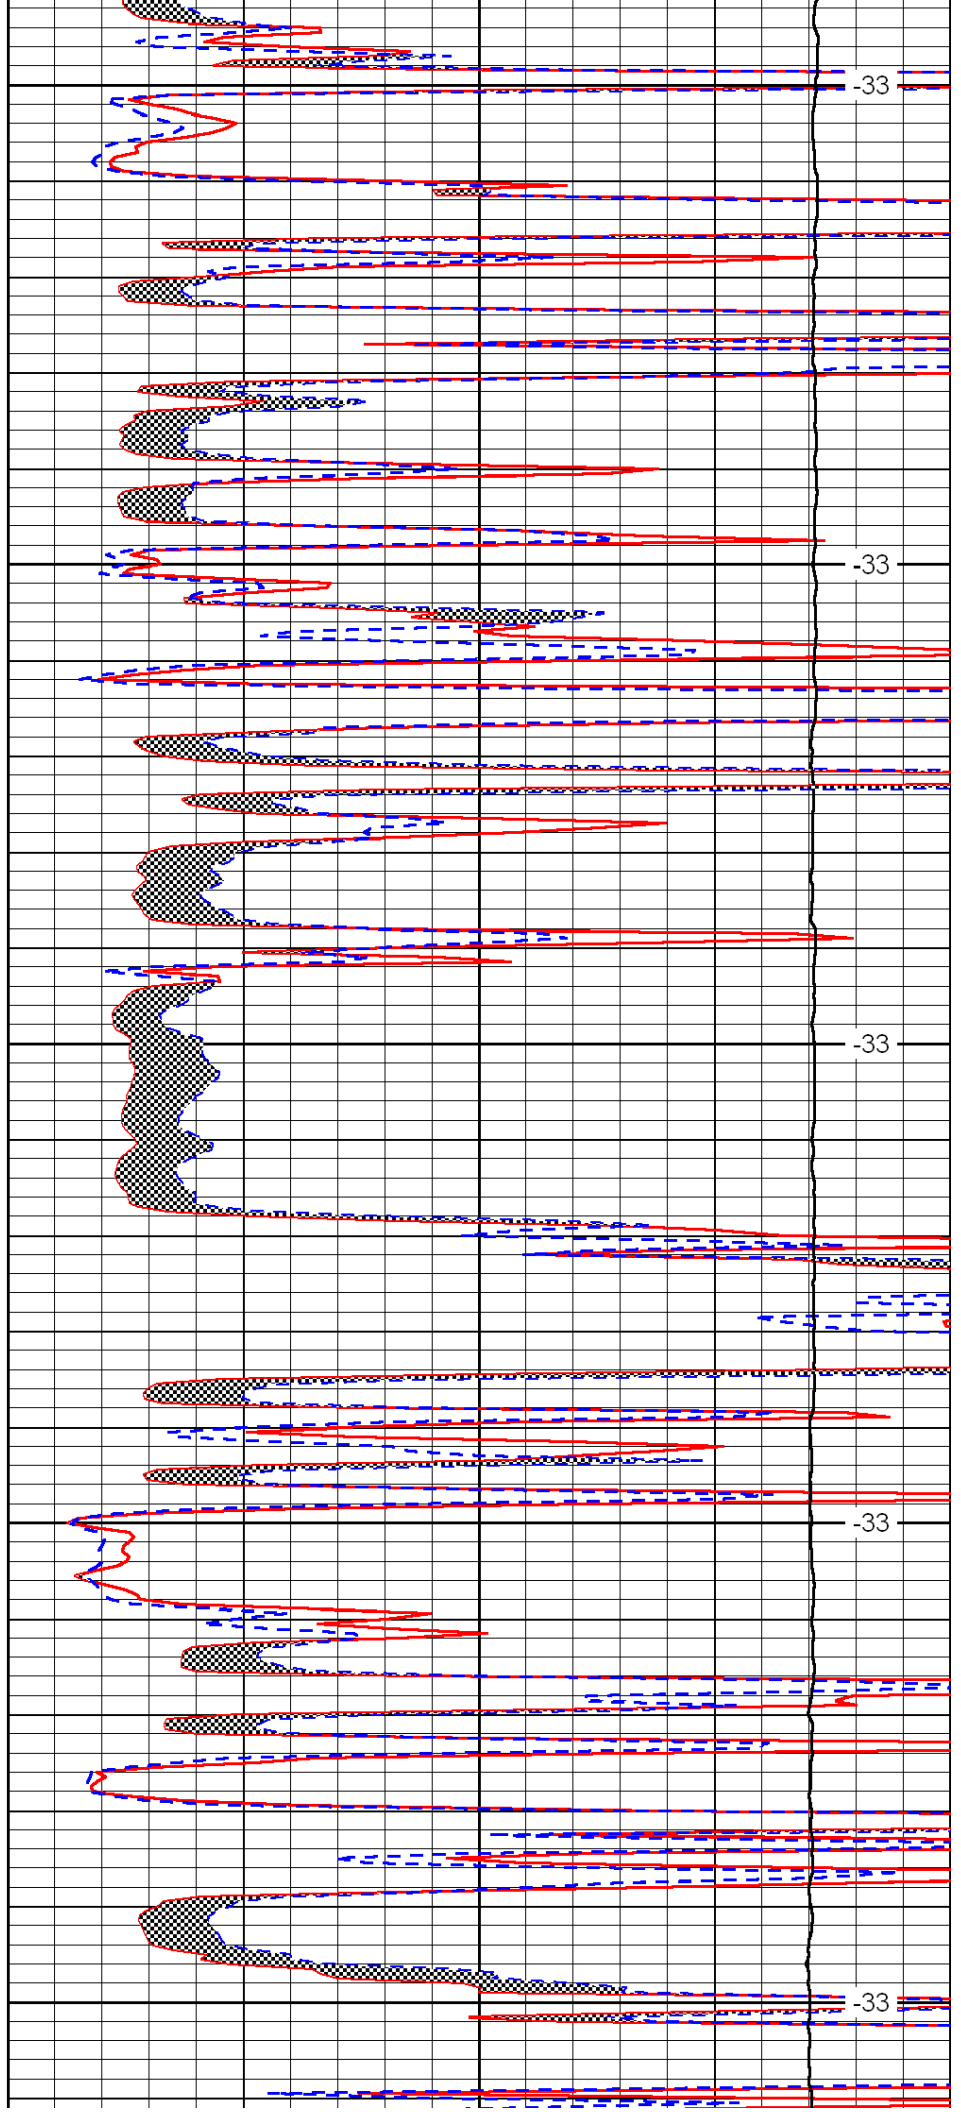


-33

-33

-33

-33

-33

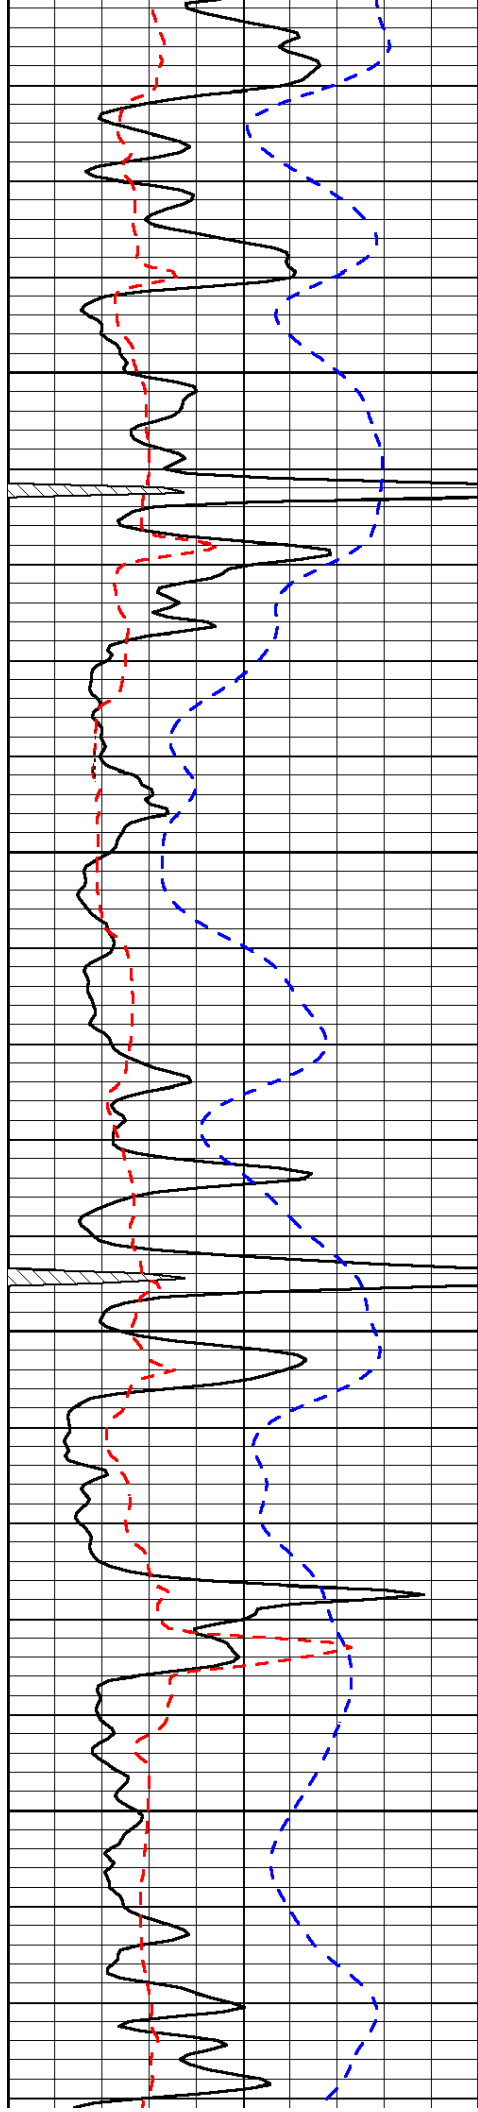



4050

4100

4150

4200

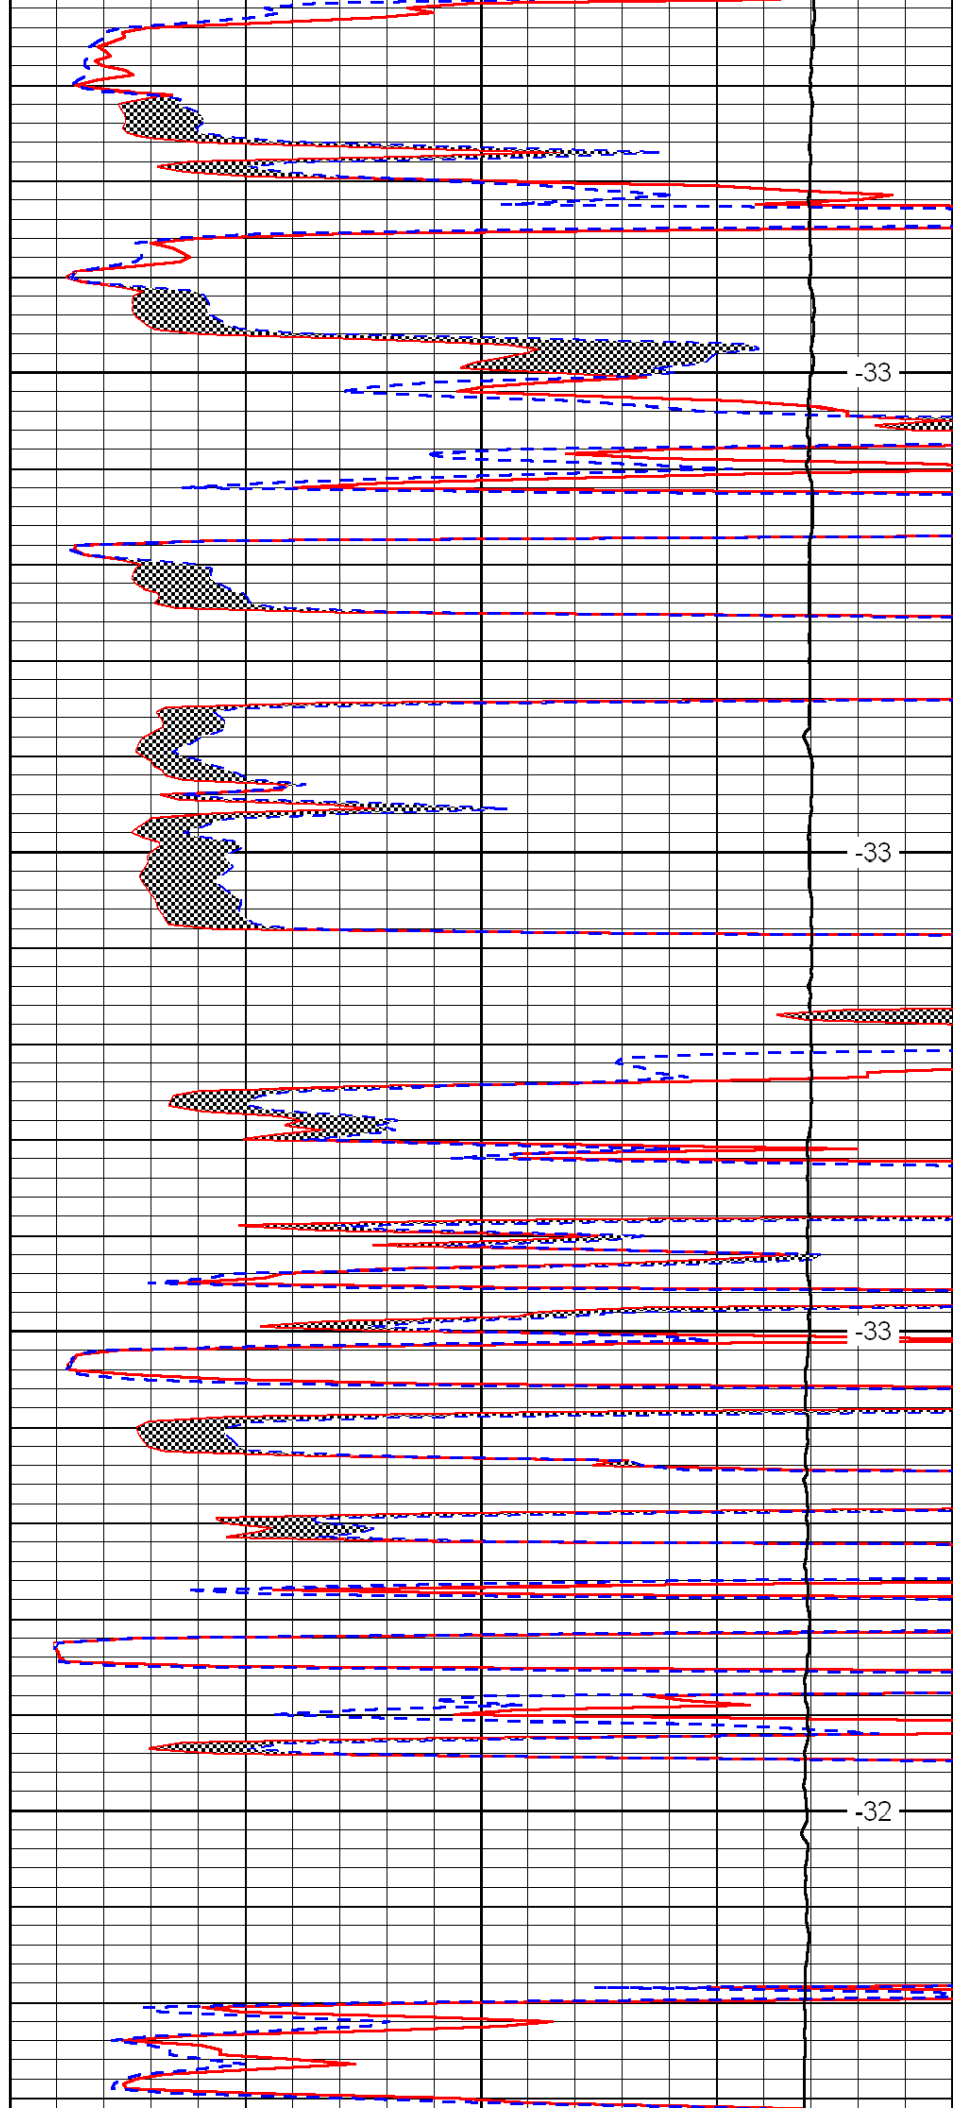

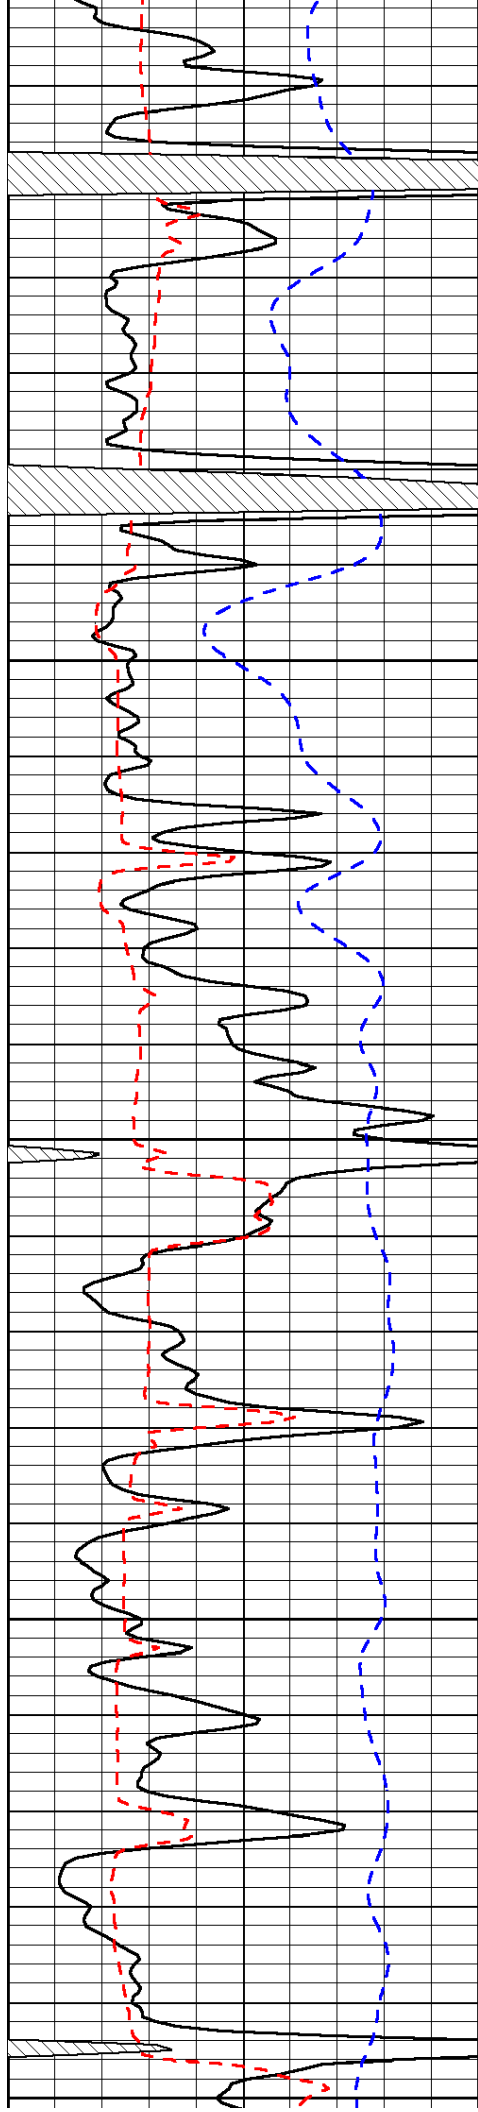


4250

4300

4350

4400

4450

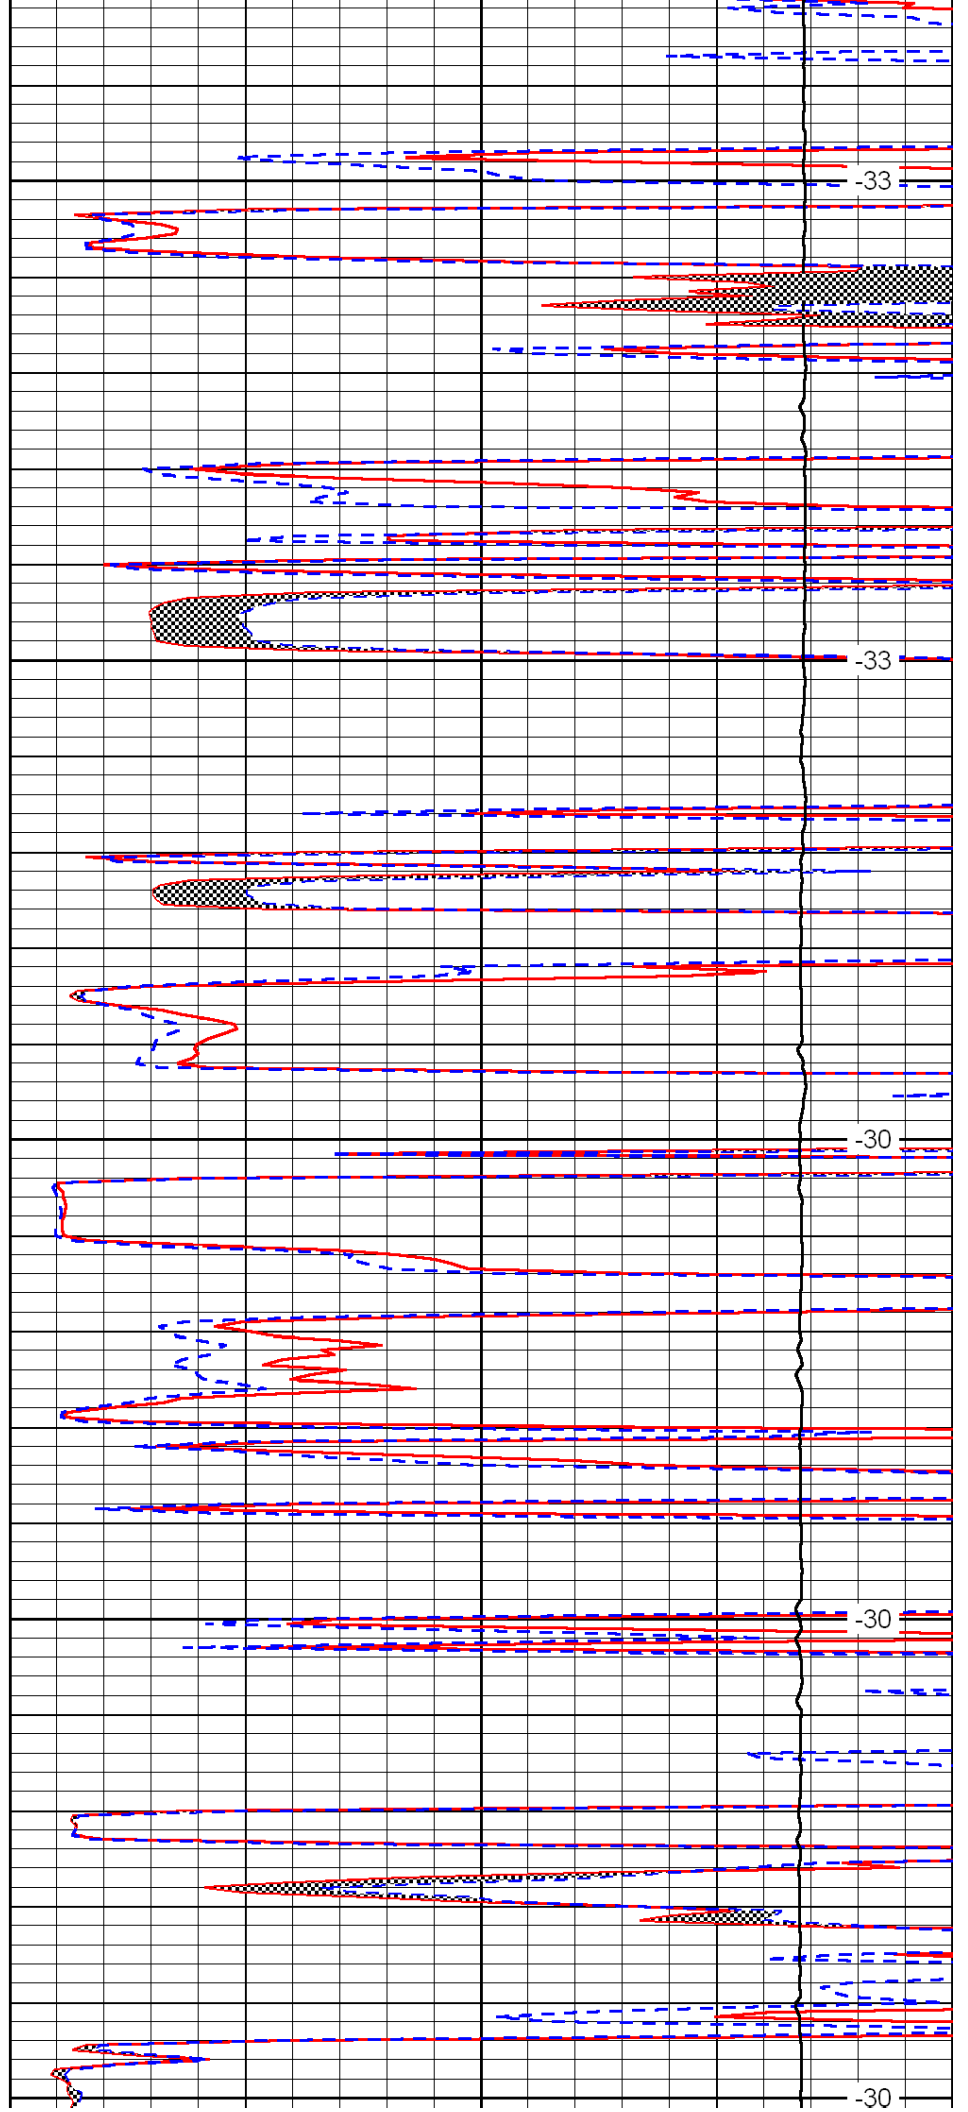


-33

-33

-30

-30


-30

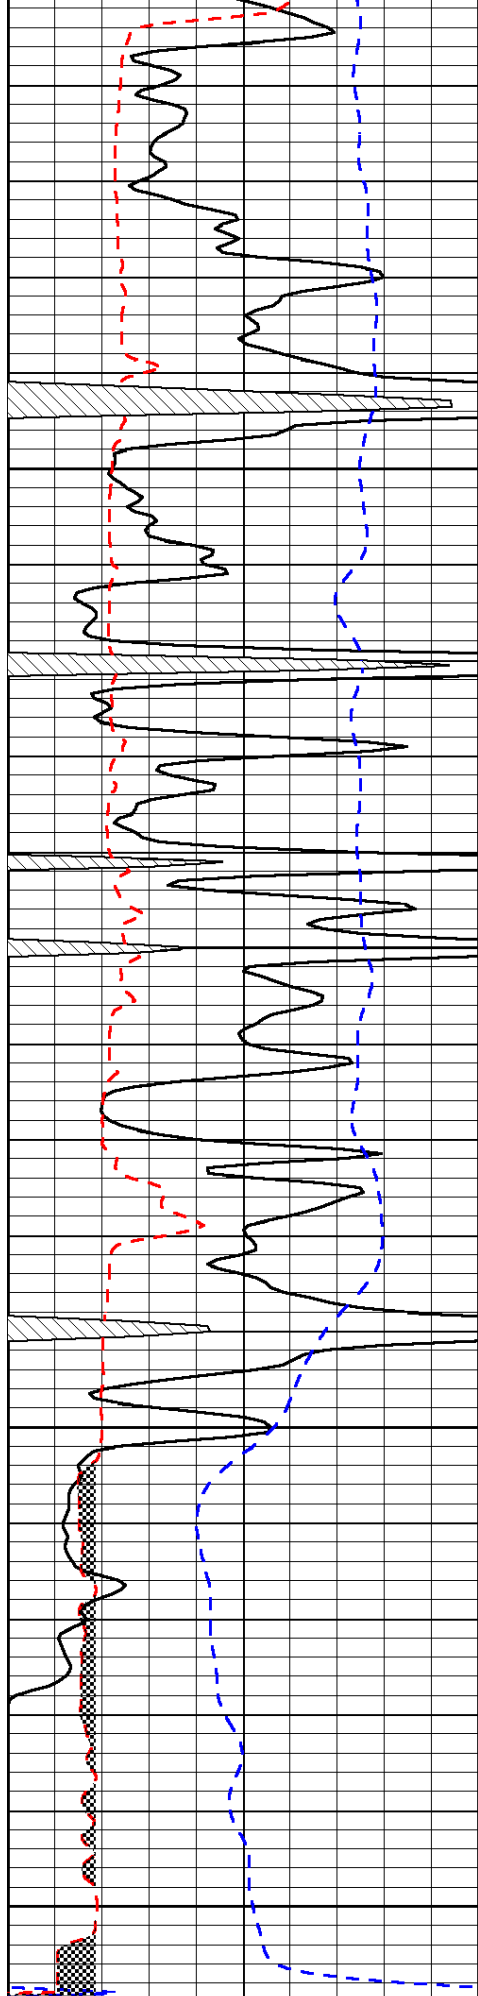

0 Gamma Ray 150

6 Micro Log Caliper (GAPI) 16

200 GR (mV) 0

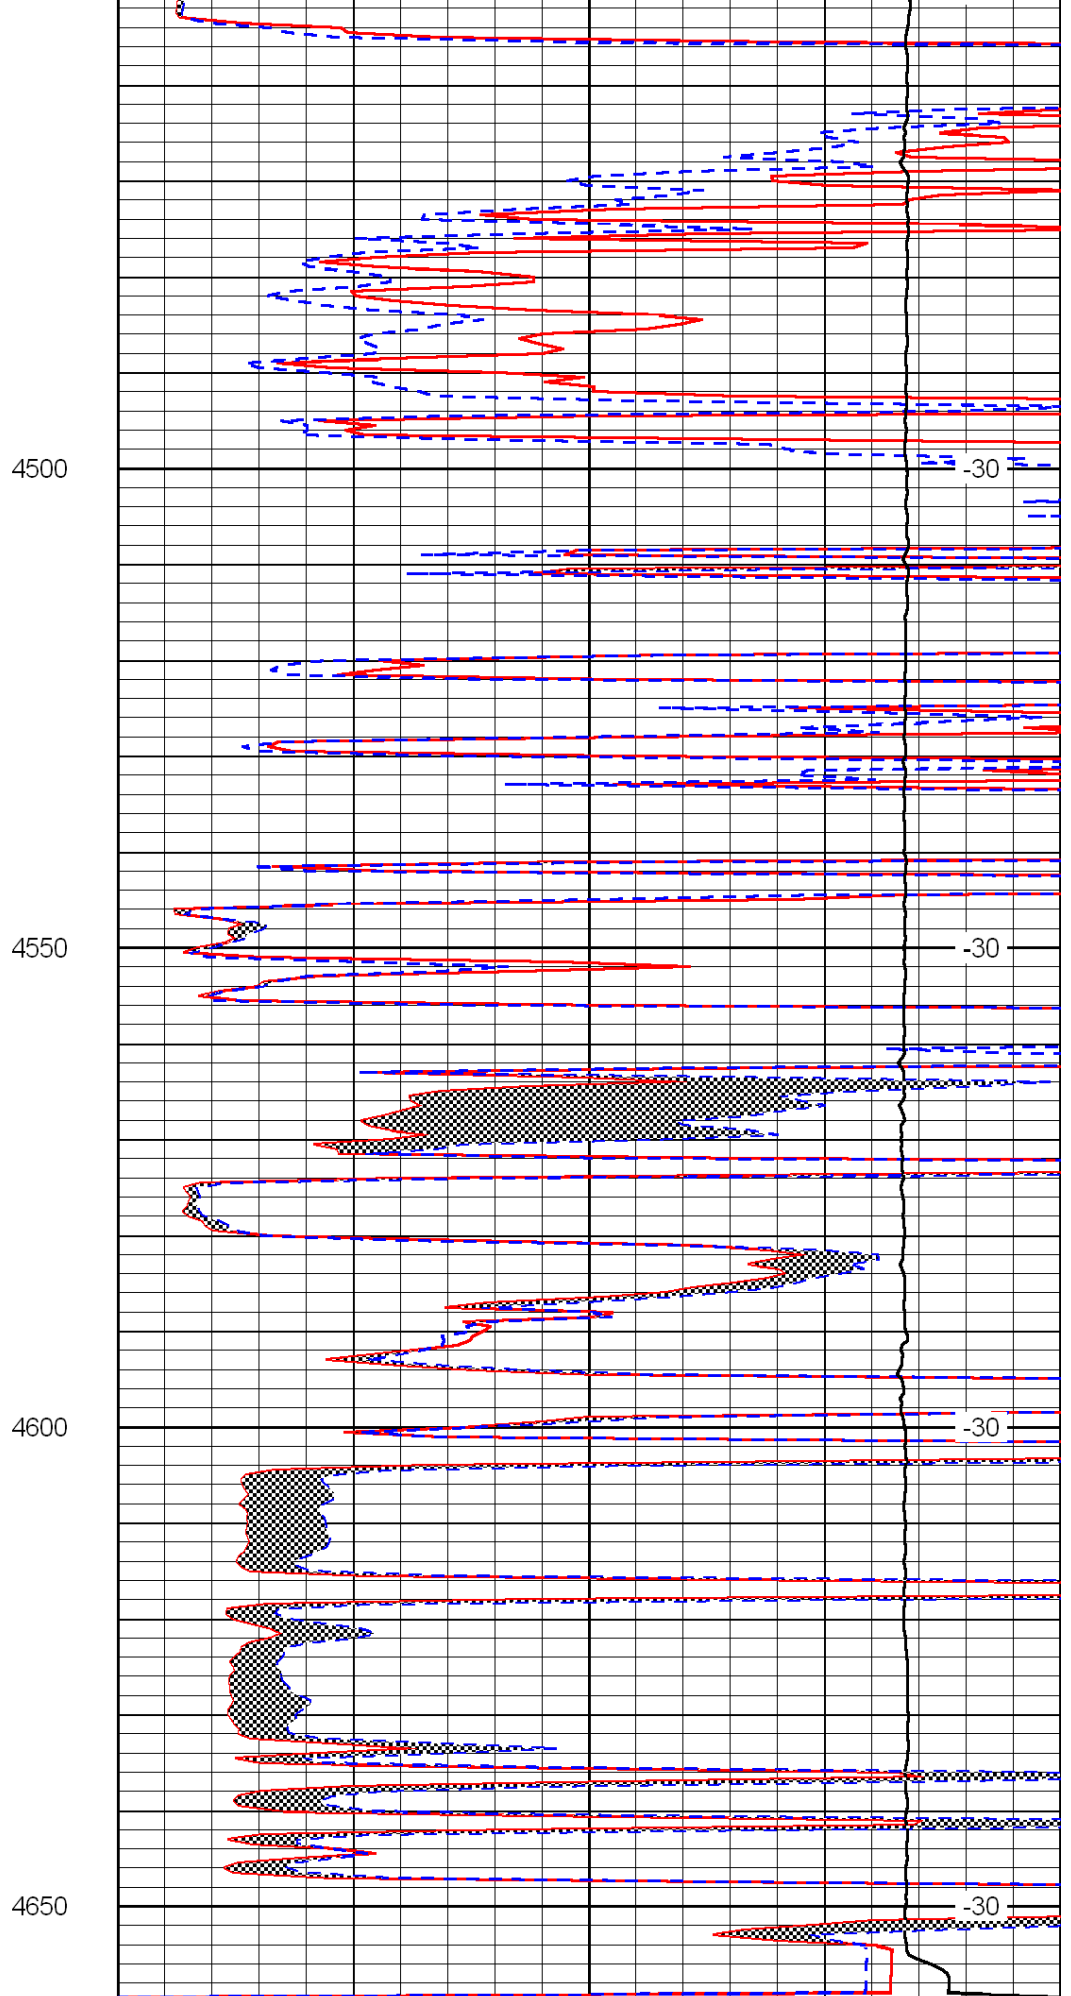

0 Micro Inverse 1 X 1 40

0 Micro Normal 2" 40

15000 Line Weight 0

-200	SP (mV)	0	15000	Line weight	0
					LSPD