Operator: Chevron U.S.A. Inc.
Well: Tahoe 17 Fed Com #1H
Field: Wildcat
County: Lea
State: New Mexico

Surface Location
Sec 17 T-24-S R-32-E
1,980' FSL & 330' FWL

Bottom Hole Location
Sec 17 T-24-S R-32-E
1,980' FSL & 330' FEL

Elevations
GL: 3,500'
KB: 3,525'

Spud Date: 10/15/2019
Completion Date: 11/30/2019

Casing & Cement

Type	Hole Size	Csg Size	Wt/Ft	Grade	Depth	Cmt Sx	Cmt Top
Surface	17.500"	13.375"	54.5#	J-55	1,500'	1,200	Surface
Intermediate	12.250"	9.625"	40#	HCL-80	5,200'	1,800	Surface
Production	8.750"	5.500"	20#	P-110	10,850'	2,100	4,800'

Tubing
2.875" 6.5# L-80 EUE @ 10,720'

Formation

Formation	Top MD	Top TVD
Rustler	1,450'	1,450'
Top of Salt	1,720'	1,720'
Base of Salt	4,980'	4,980'
Delaware Sand	5,200'	5,200'
Bone Spring Lime	8,450'	8,450'
1st Bone Spring Sand	9,100'	9,100'
2nd Bone Spring Sand	9,650'	9,650'
3rd Bone Spring Sand	10,300'	10,300'
Wolfcamp	10,720'	10,720'

Logging Suite
Gamma Ray / Resistivity / Density / Neutron

Perforations
10,850' - 20,450' MD
10,720' - 10,720' TVD

Stimulation
Stage 1: 10,850' - 11,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 2: 11,050' - 11,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 3: 11,250' - 11,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 4: 11,450' - 11,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 5: 11,650' - 11,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 6: 11,850' - 12,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 7: 12,050' - 12,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 8: 12,250' - 12,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 9: 12,450' - 12,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 10: 12,650' - 12,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 11: 12,850' - 13,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 12: 13,050' - 13,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 13: 13,250' - 13,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 14: 13,450' - 13,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 15: 13,650' - 13,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 16: 13,850' - 14,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 17: 14,050' - 14,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 18: 14,250' - 14,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 19: 14,450' - 14,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 20: 14,650' - 14,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 21: 14,850' - 15,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 22: 15,050' - 15,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 23: 15,250' - 15,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 24: 15,450' - 15,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 25: 15,650' - 15,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 26: 15,850' - 16,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 27: 16,050' - 16,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 28: 16,250' - 16,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 29: 16,450' - 16,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 30: 16,650' - 16,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 31: 16,850' - 17,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 32: 17,050' - 17,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 33: 17,250' - 17,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 34: 17,450' - 17,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 35: 17,650' - 17,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 36: 17,850' - 18,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 37: 18,050' - 18,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 38: 18,250' - 18,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 39: 18,450' - 18,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 40: 18,650' - 18,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 41: 18,850' - 19,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 42: 19,050' - 19,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 43: 19,250' - 19,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 44: 19,450' - 19,650' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 45: 19,650' - 19,850' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 46: 19,850' - 20,050' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 47: 20,050' - 20,250' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70
Stage 48: 20,250' - 20,450' MD — 2,500 bbls 15% HCl, 1,200,000 lbs 100 mesh, 3,600,000 lbs 40/70

Notes
Gamma ray reads high through the salt section.
Resistivity separation indicates oil-bearing zones in the Bone Spring and Wolfcamp.
Density porosity corrected for salt matrix.
Neutron porosity shows gas effect in the upper Bone Spring.

Operator: Chevron U.S.A. Inc.
Well: Tahoe 17 Fed Com #1H
Field: Wildcat
County: Lea
State: New Mexico

Surface Location
Sec 17 T-24-S R-32-E
1,980' FSL & 330' FWL

Bottom Hole Location
Sec 17 T-24-S R-32-E
1,980' FSL & 330' FEL

Elevations
GL: 3,500'
KB: 3,525'

Spud Date: 10/15/2019
Completion Date: 11/30/2019

Notes
Gamma ray reads high through the salt section.
Resistivity separation indicates oil-bearing zones in the Bone Spring and Wolfcamp.
Density porosity corrected for salt matrix.
Neutron porosity shows gas effect in the upper Bone Spring.

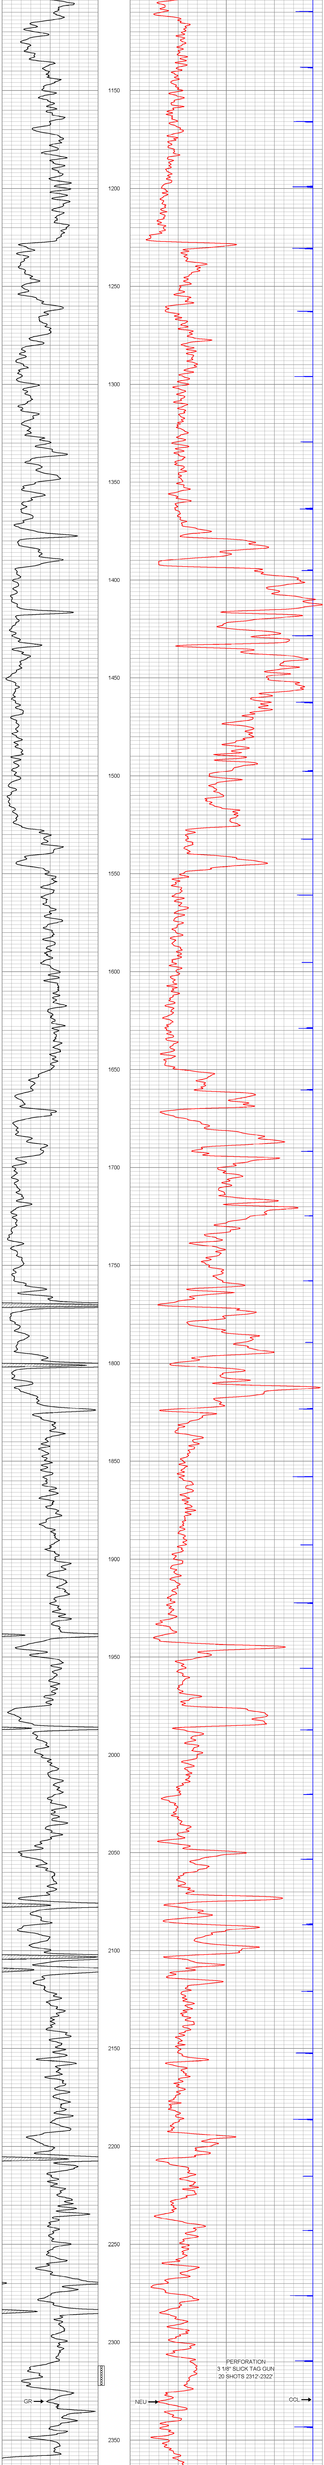

Company	DARRAH OIL
Well	MARSHALL #25
Field	THRALL-AAGARD
County	GREENWOOD SEC. 1 TWP. 24S RGE. 9E
State	KANSAS Date 9-14-10

CORNISH WIRELINE SERVICES, INC.
CHANUTE, KANSAS