



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.		Company Maralex Resources, Inc.	
15-065-23708-00-00		Well Heskett No. 6-1	
		Field Wildcat	
		County Graham State Kansas	
		Location	N/2 - S/2 - SE - NW 2080' FNL & 1980' FWL
		Sec: 6 Twp: 7 S Rge: 25 W	Other Services CNL/CDL MEL/BHCS
Permanent Datum		Ground Level	Elevation 2564
Log Measured From		Kelly Bushing	5 Ft. Above Perm. Datum
Drilling Measured From		Kelly Bushing	K.B. 2569 D.F. 2564 G.L. 2564
Date	1/14/2011		
Run Number	One		
Depth Driller	3950		
Depth Logger	3953		
Bottom Logged Interval	3952		
Top Log Interval	300		
Casing Driller	8.625 @ 303		
Casing Logger	303		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.400		
Density / Viscosity	9.3 48		
pH / Fluid Loss	9.5 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.90 @ 60		
Rmf @ Meas. Temp	1.43 @ 60		
Rmc @ Meas. Temp	2.57 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.99 @ 116		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	116		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Chritie Reid	Clayton Ericson	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Studley, Ks;
7-1/2 North; 1/2 East;
South Into

Database File: c:\warrior\data\maralex_ heskett no. 6-1\maralexhd.db
Dataset Pathname: DIL\mrlxstk
Presentation Format: dil2in
Dataset Creation: Sat Jan 15 02:05:41 2011
Charted by: Depth in Feet scaled 1:600

Charted by: Depth in Feet scaled 1:500

0	Gamma Ray	150
-200	SP (mV)	0




0	Shallow Resistivity	50
0	Deep Resistivity	50




LSPD



1000	Conductivity	0
------	--------------	---



15000	Line Tension	0
-------	--------------	---



50	Shallow Resistivity	500
50	Deep Resistivity	500

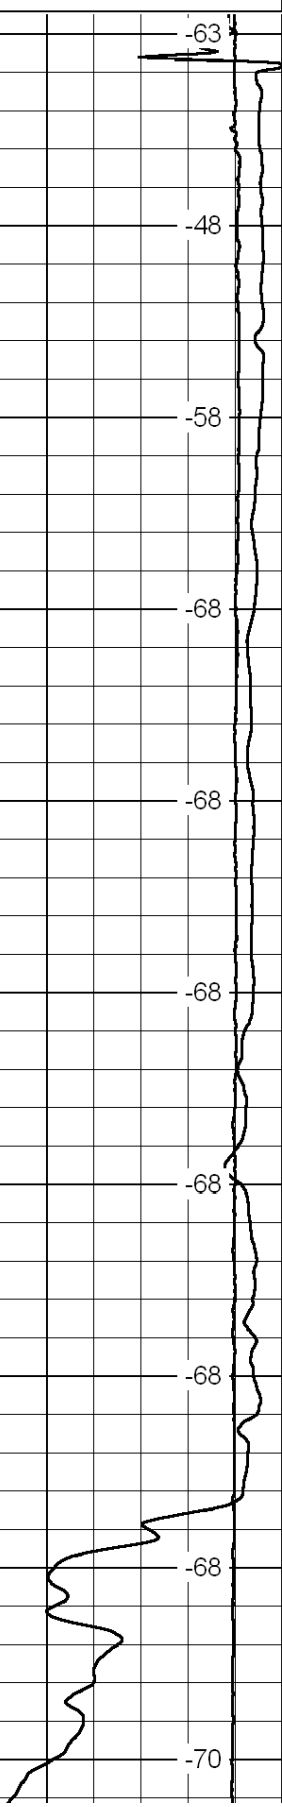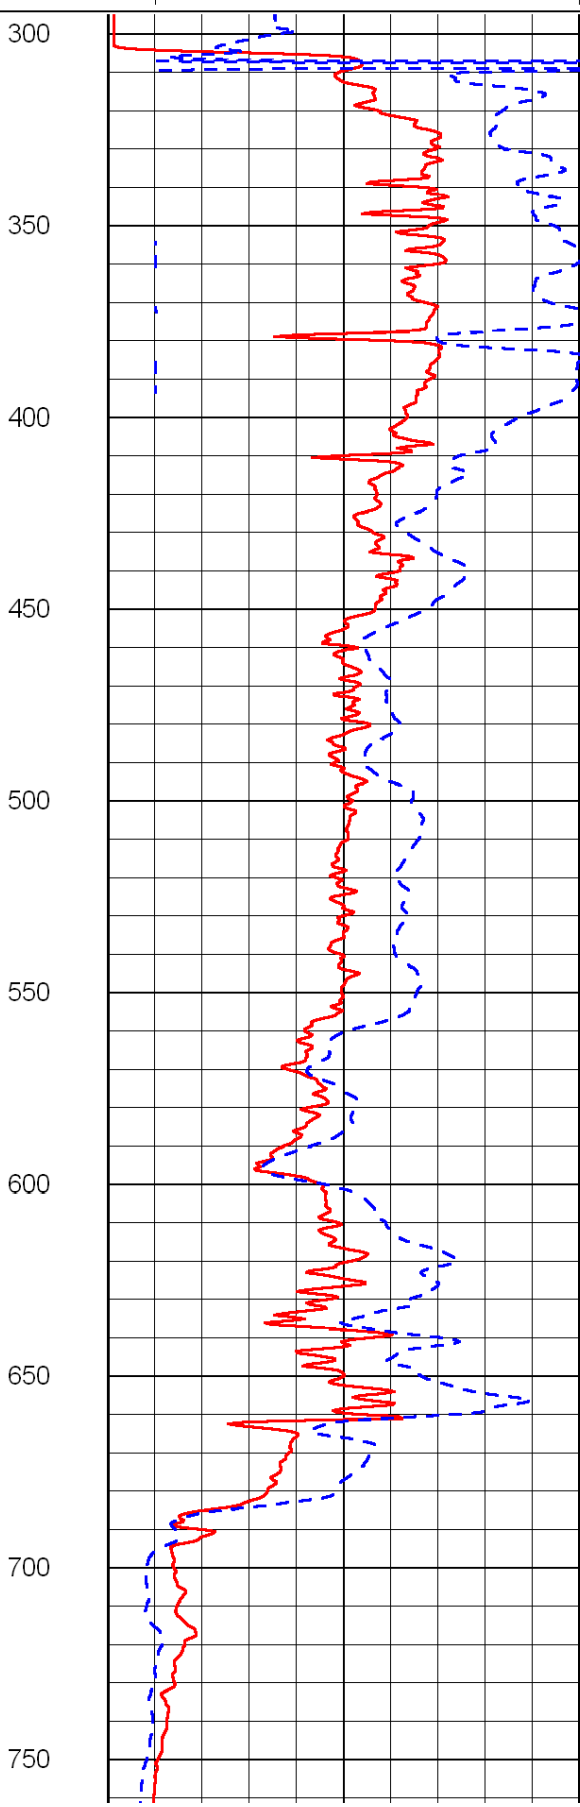
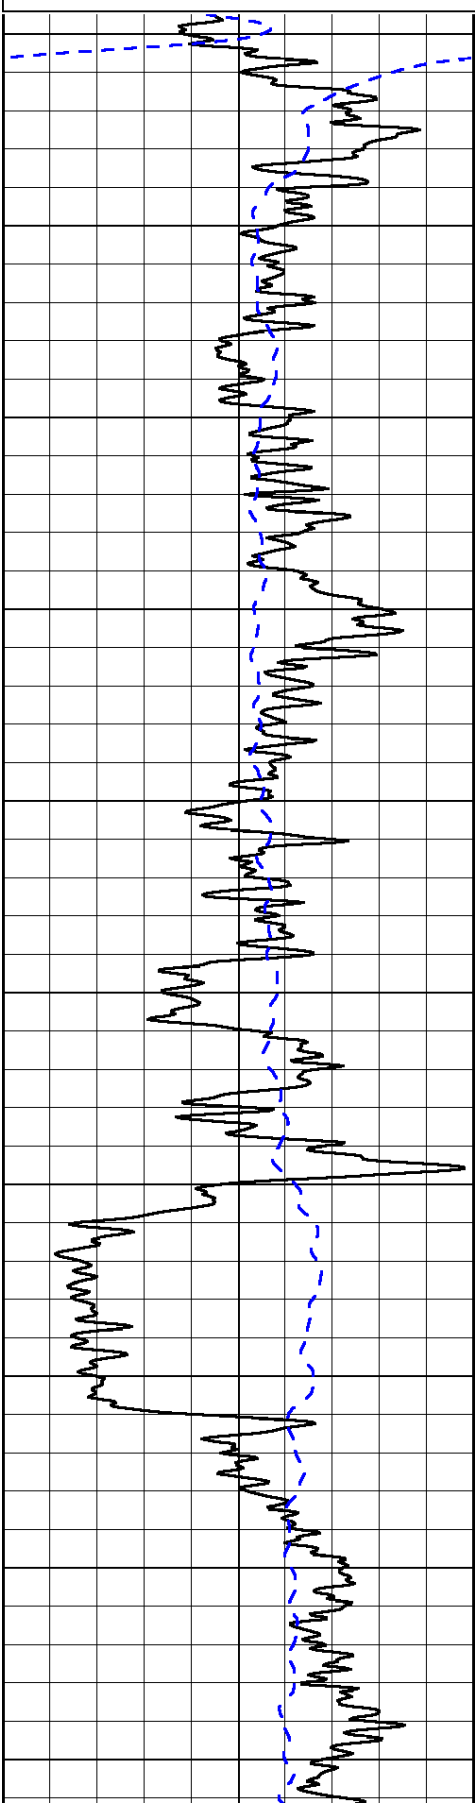


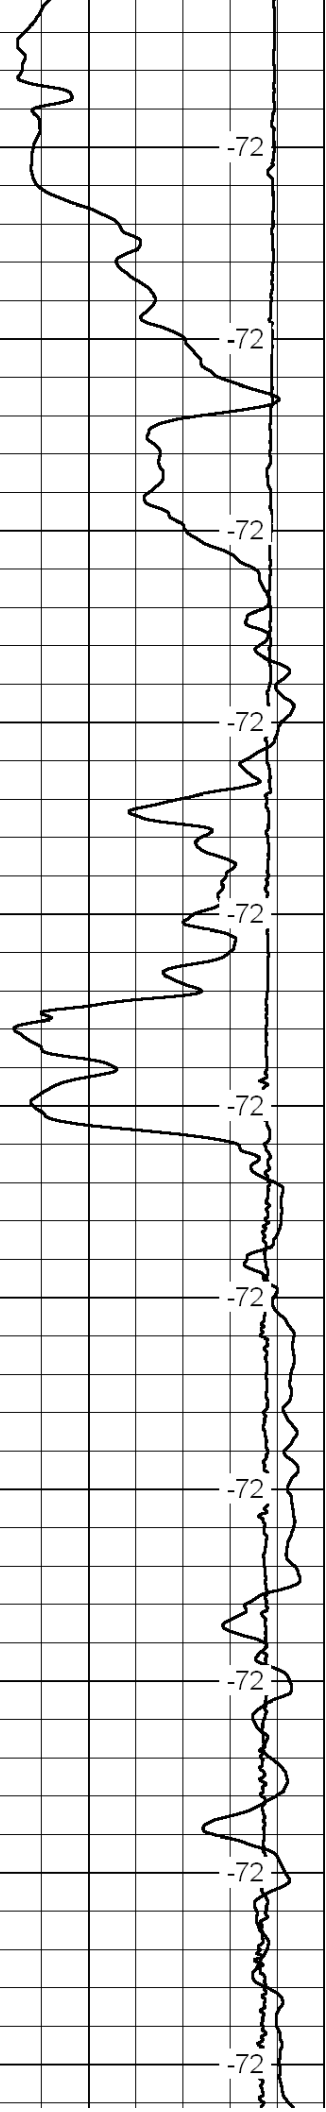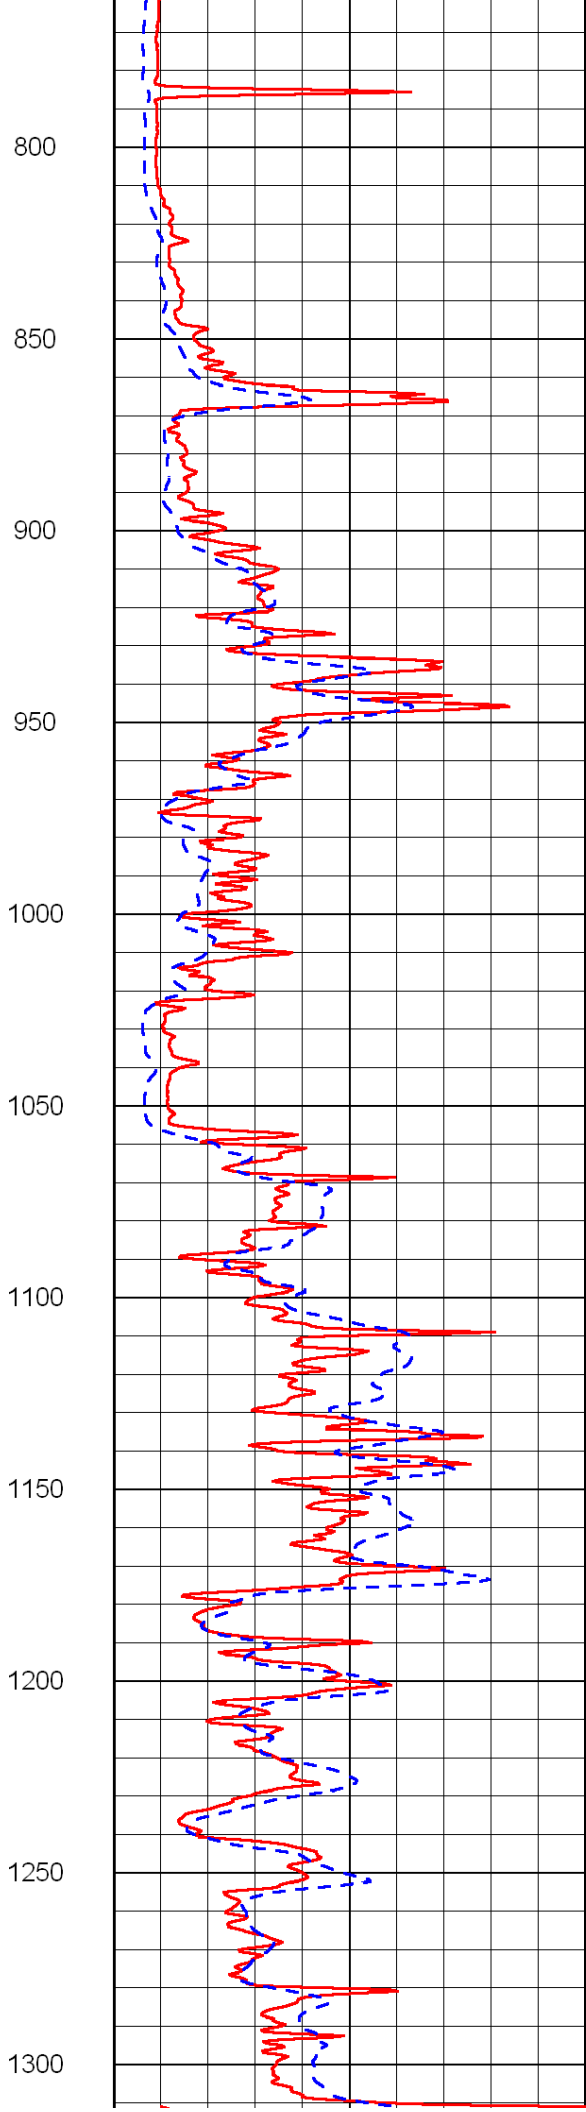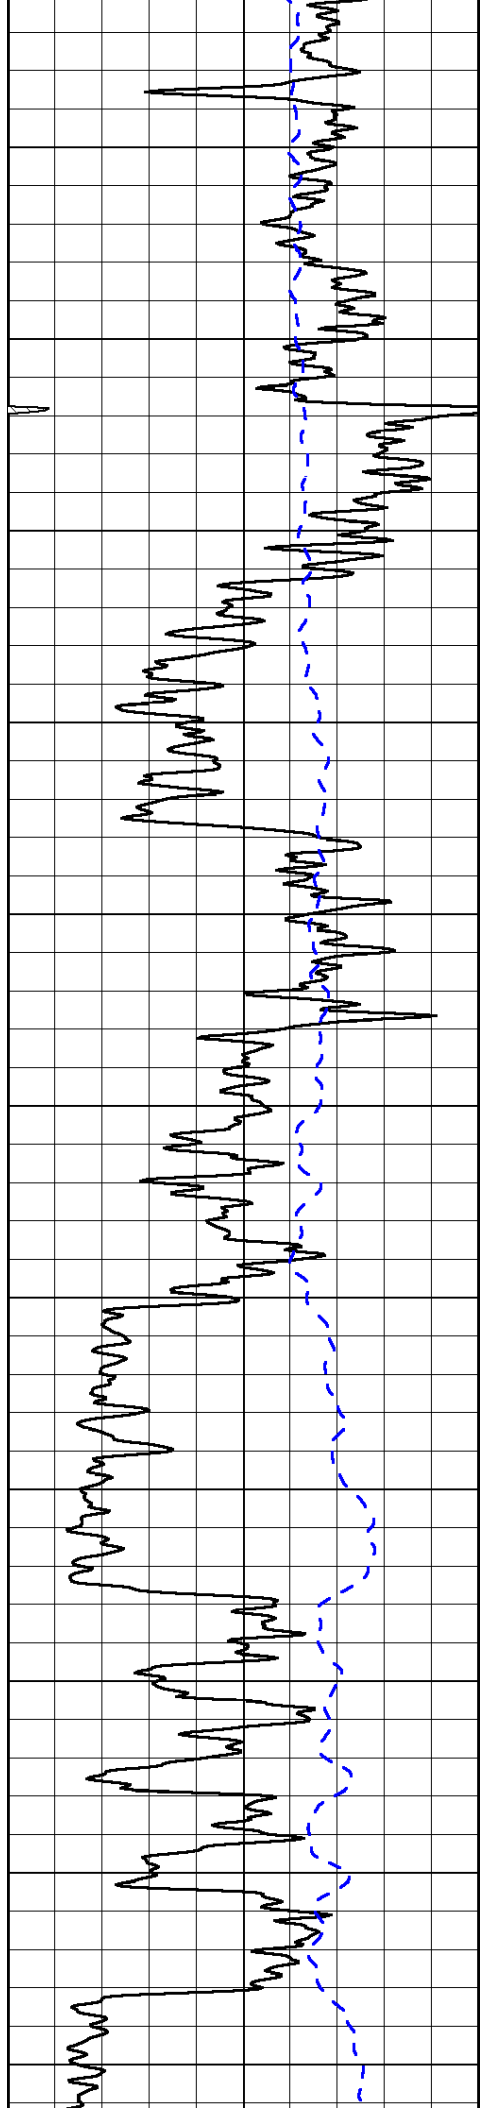


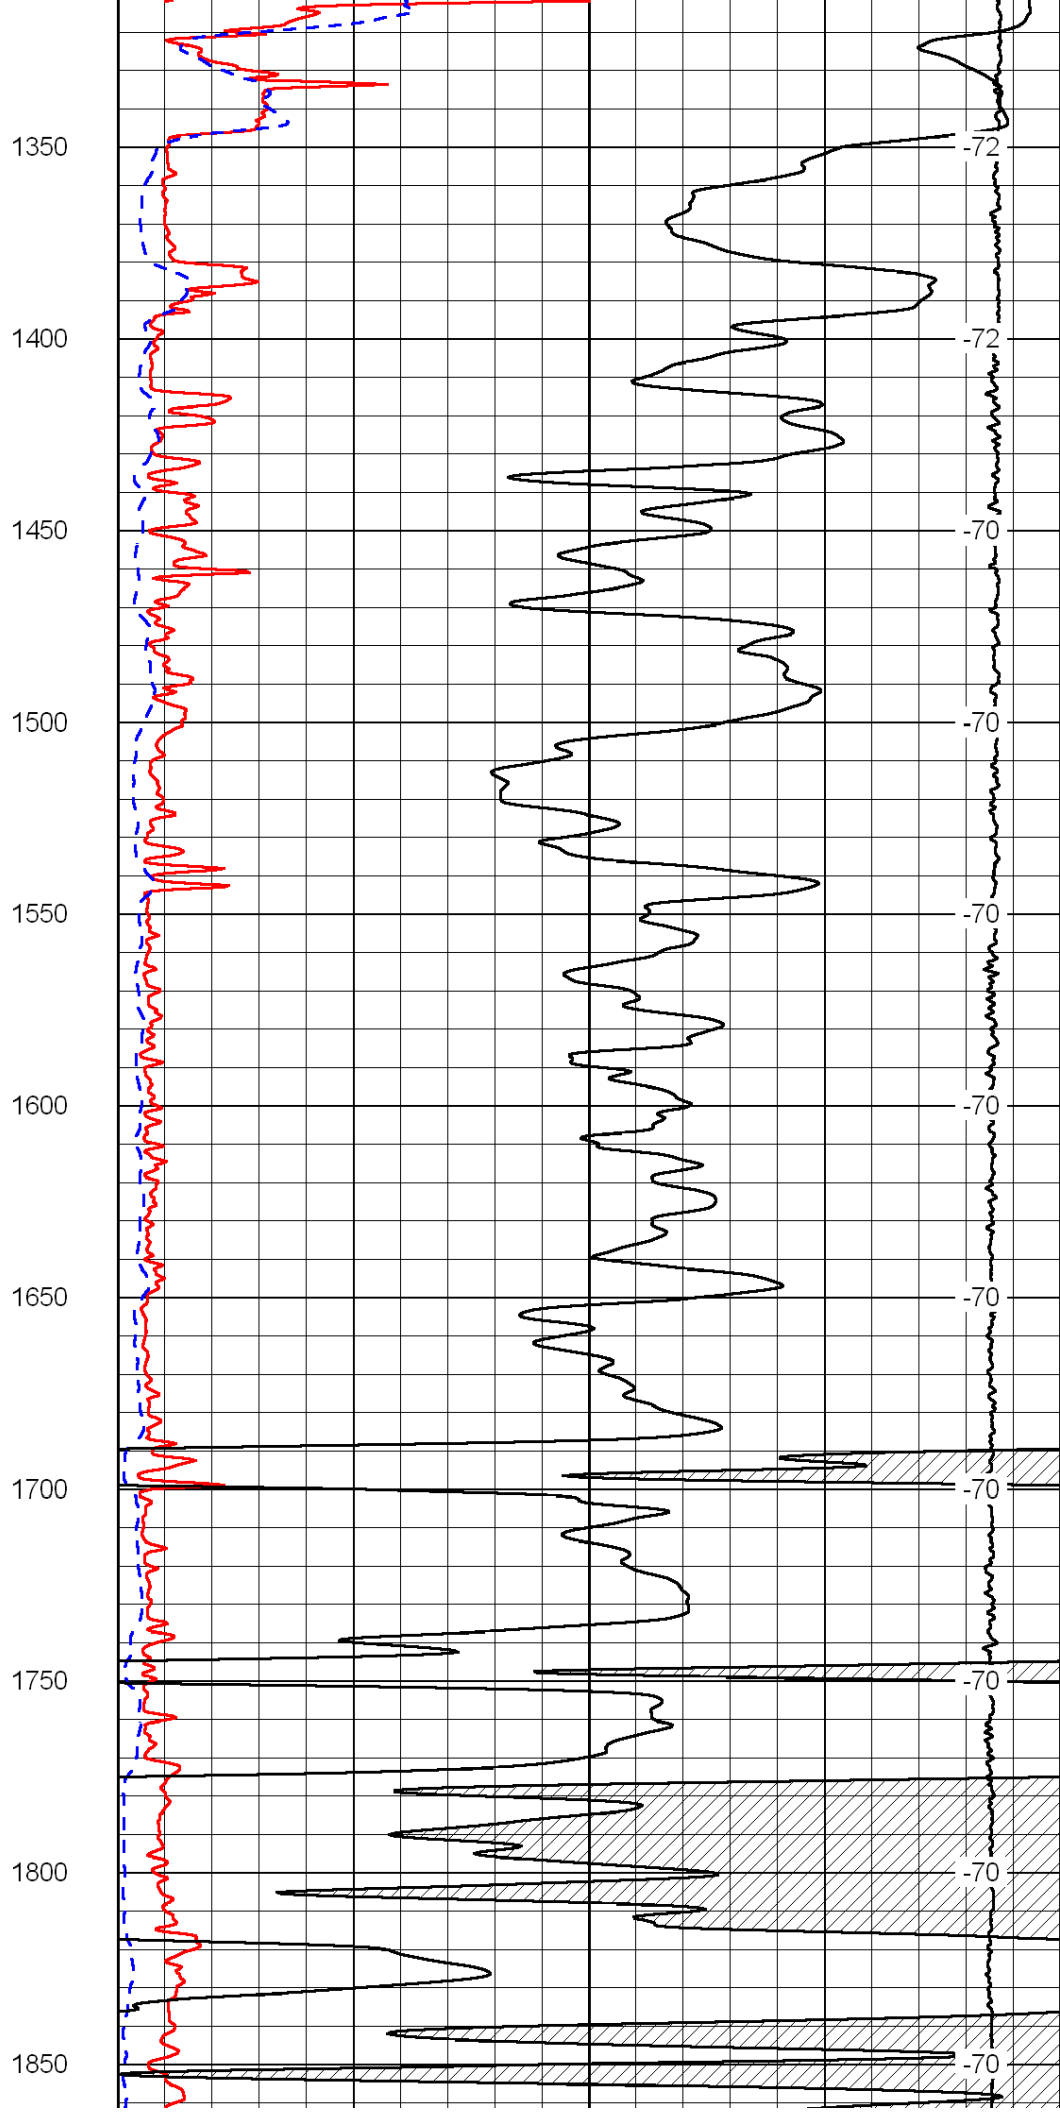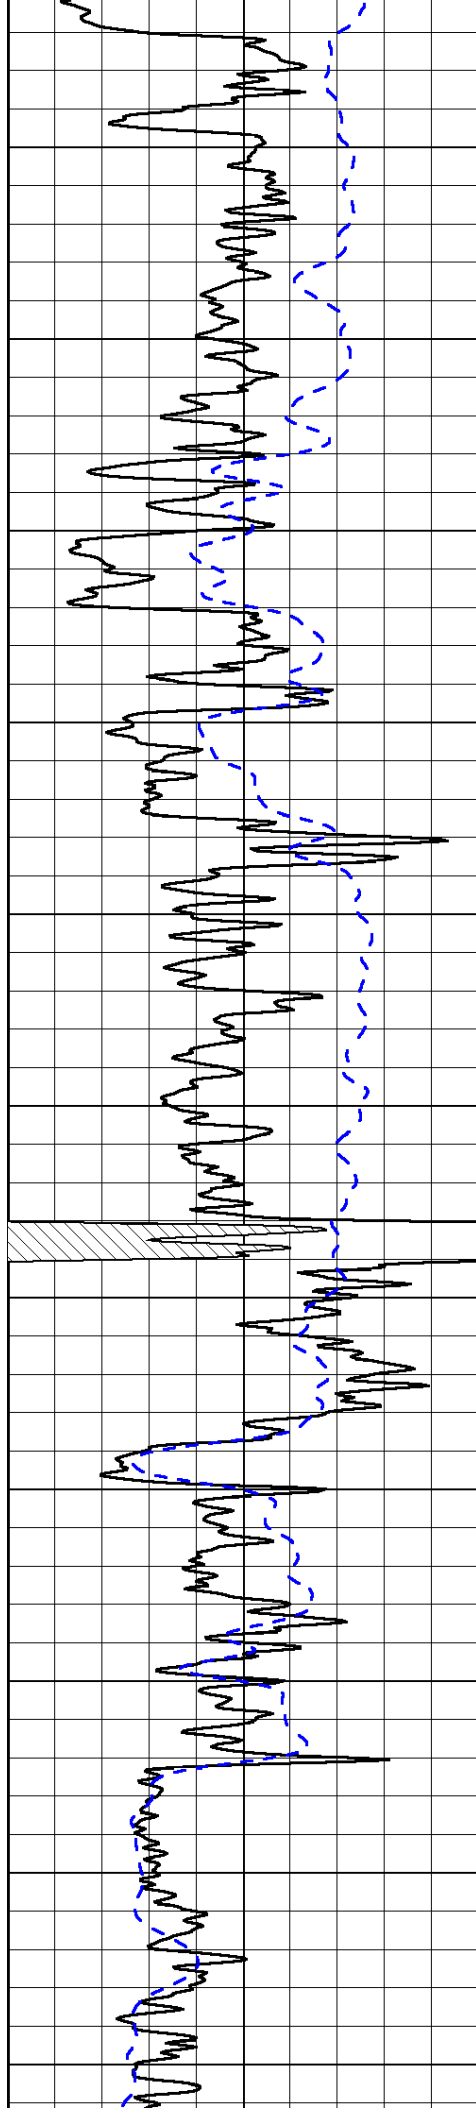

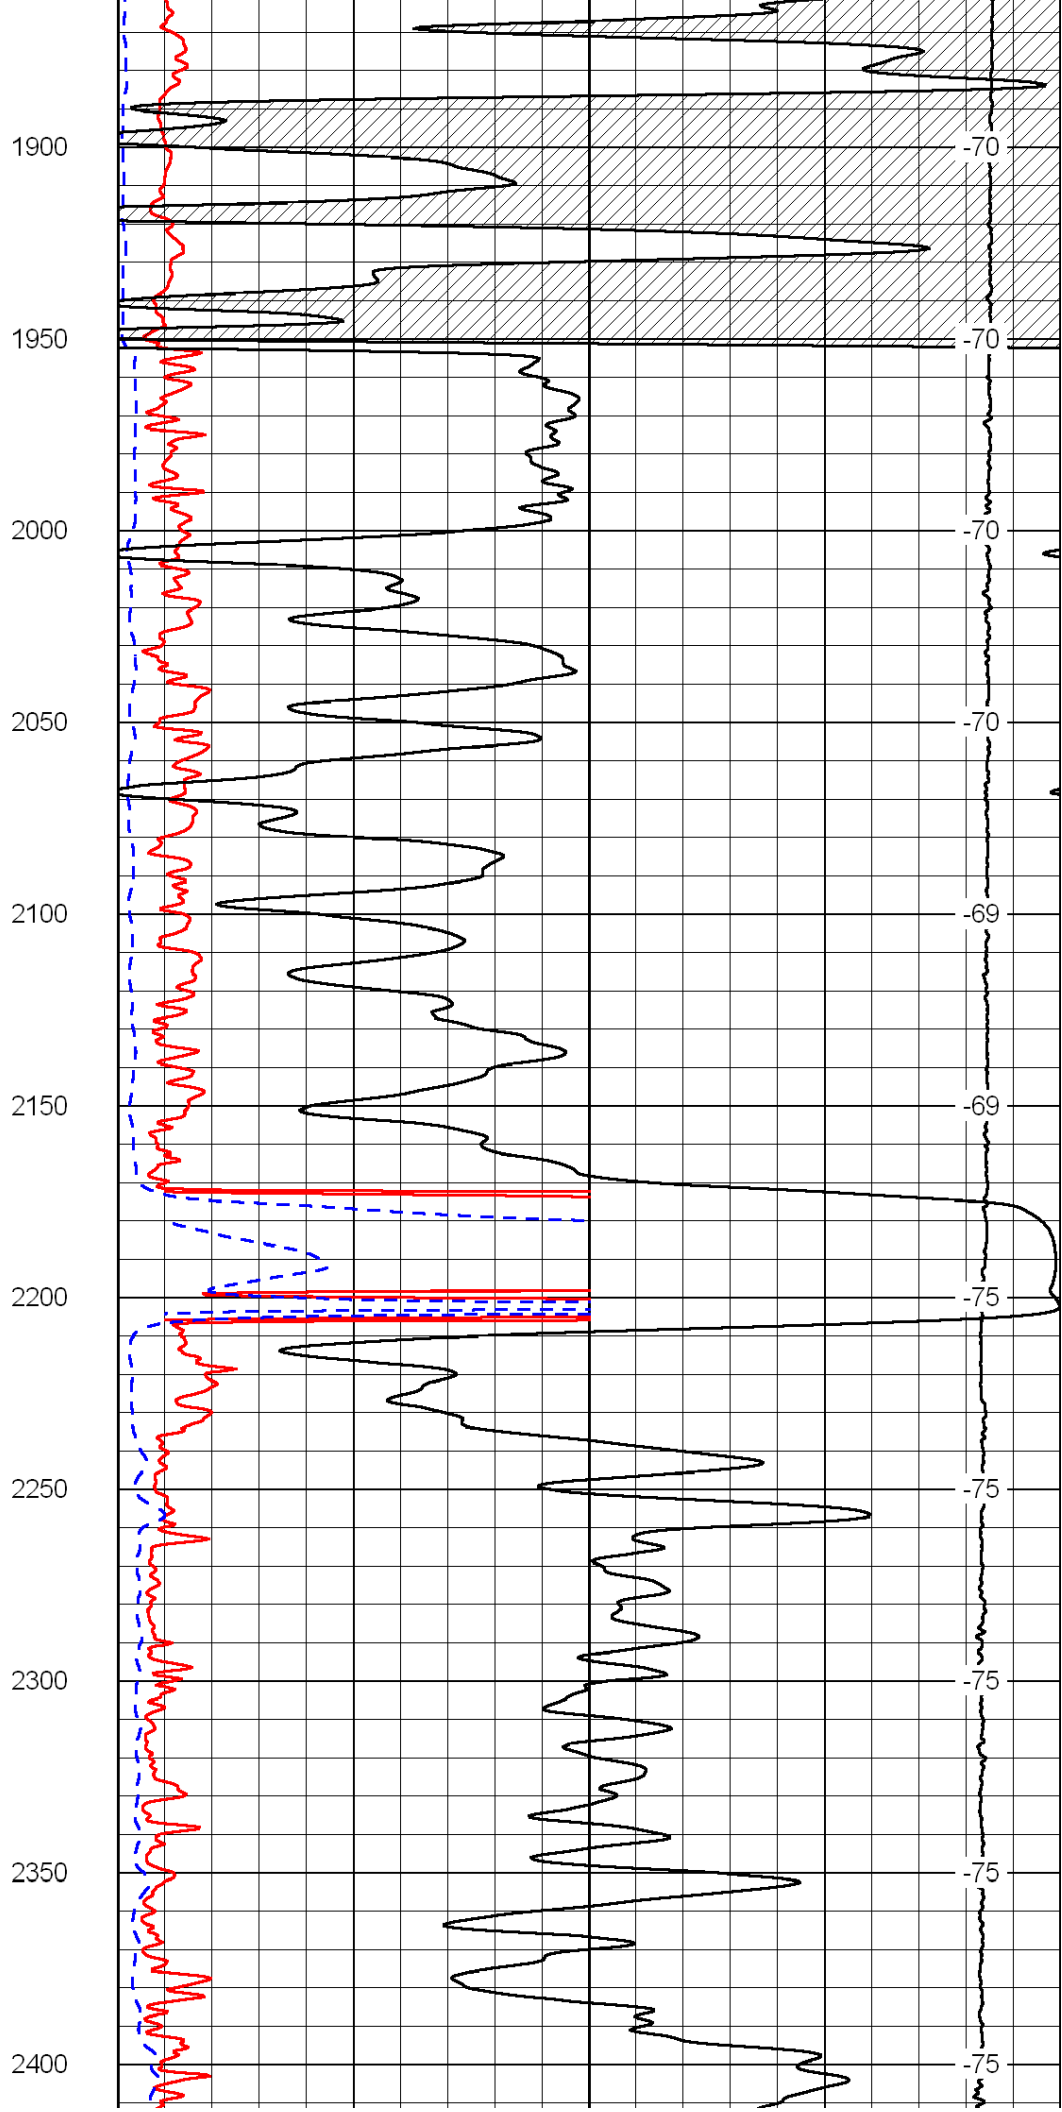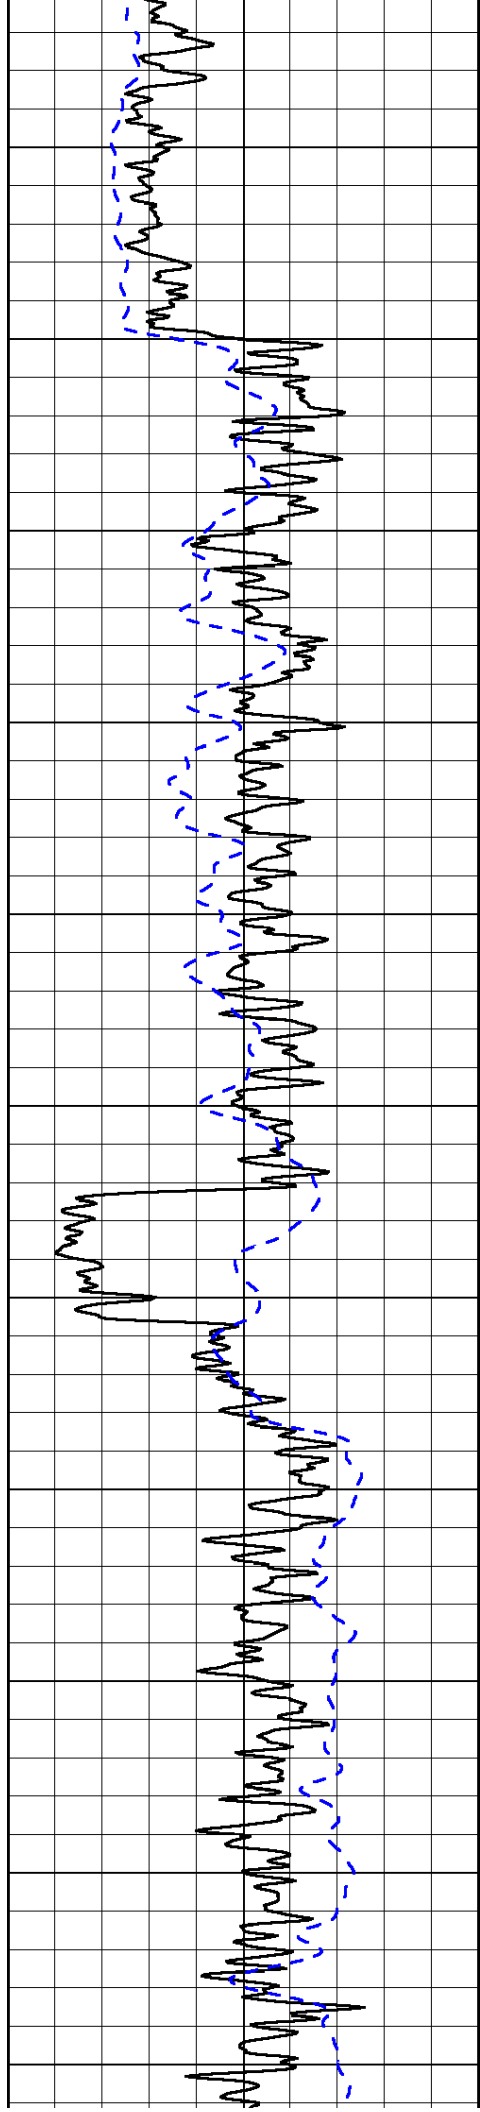

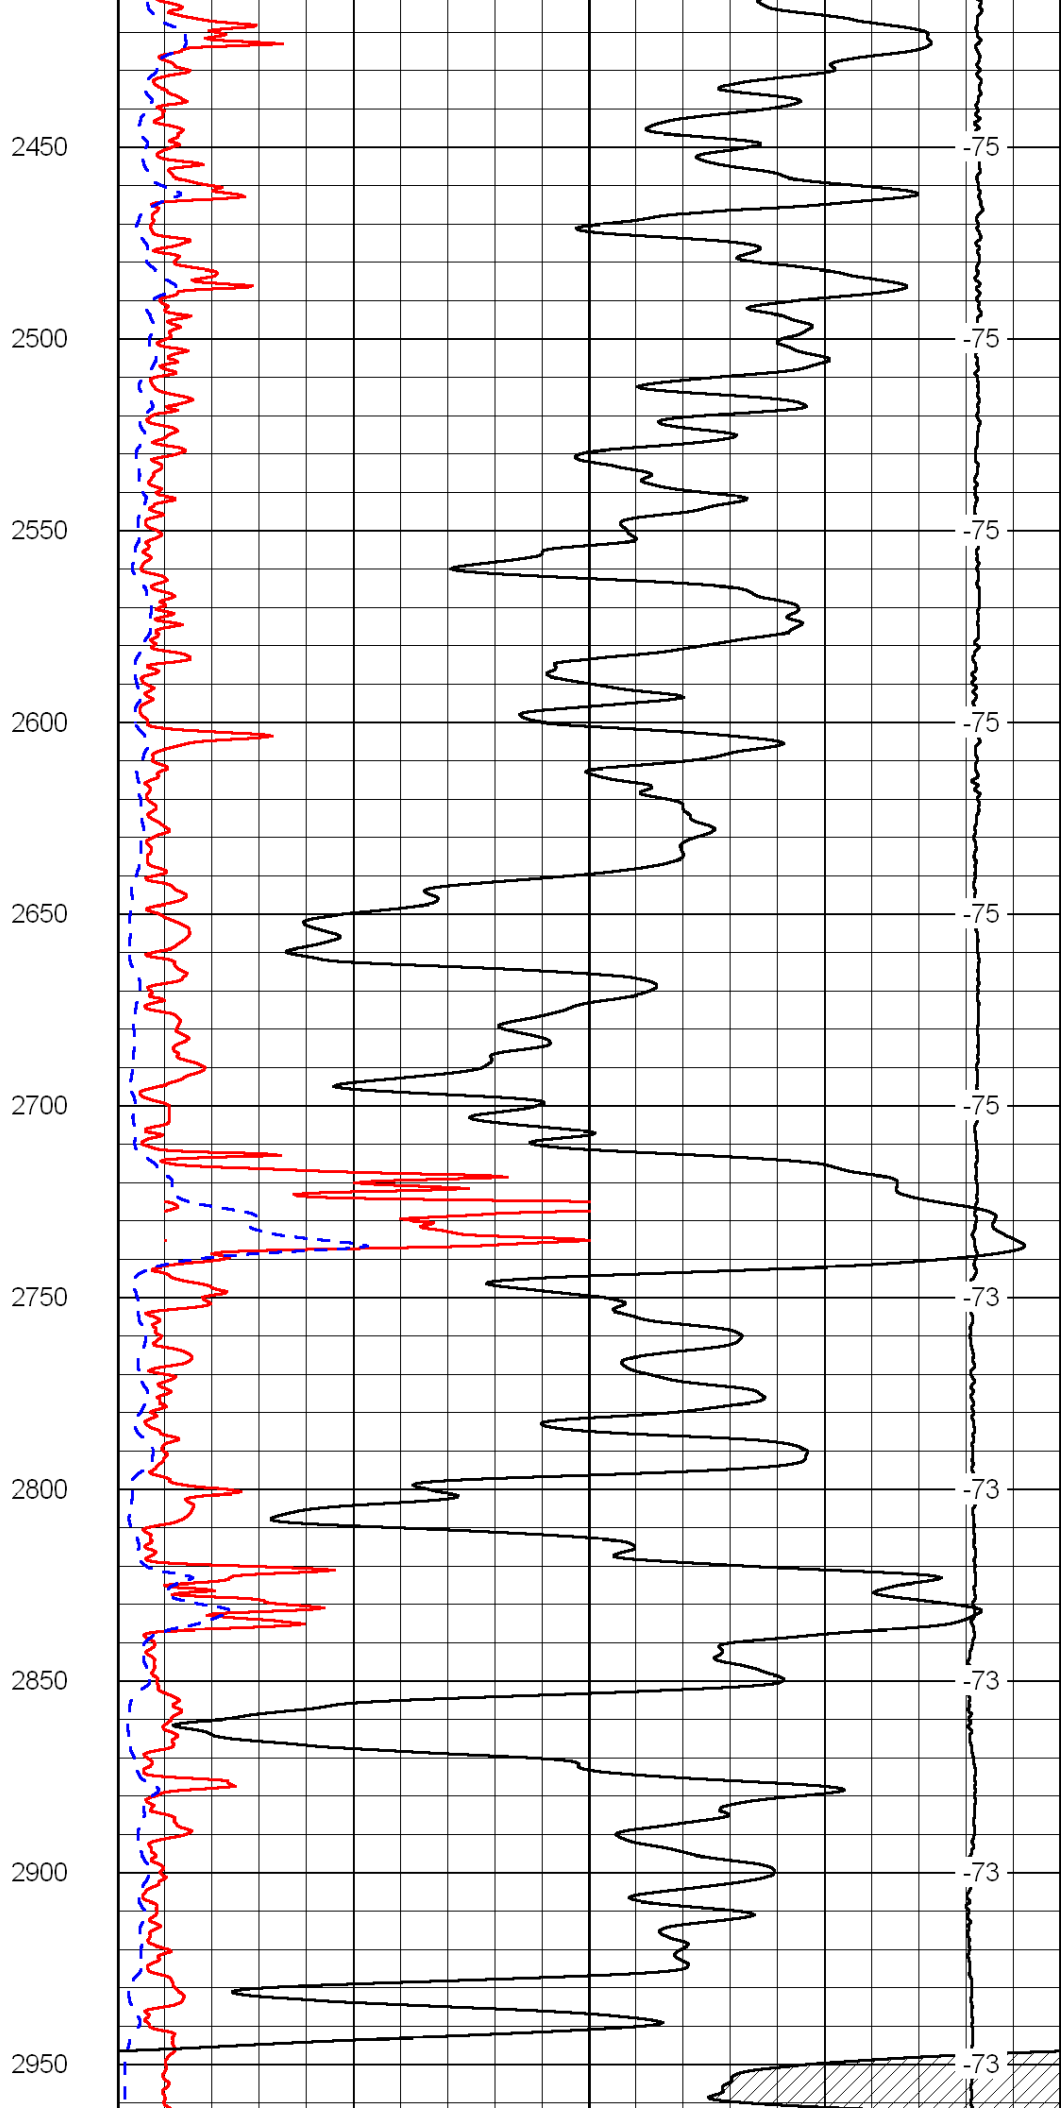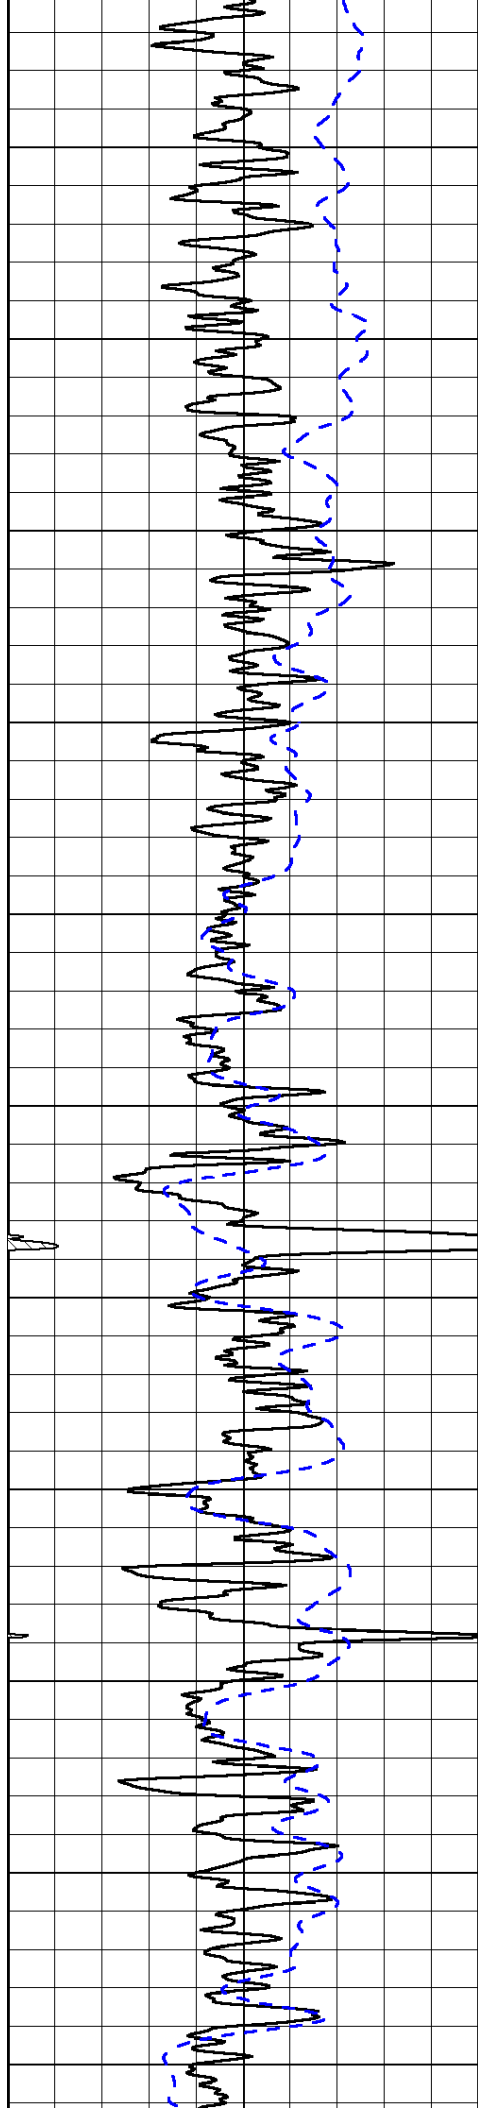

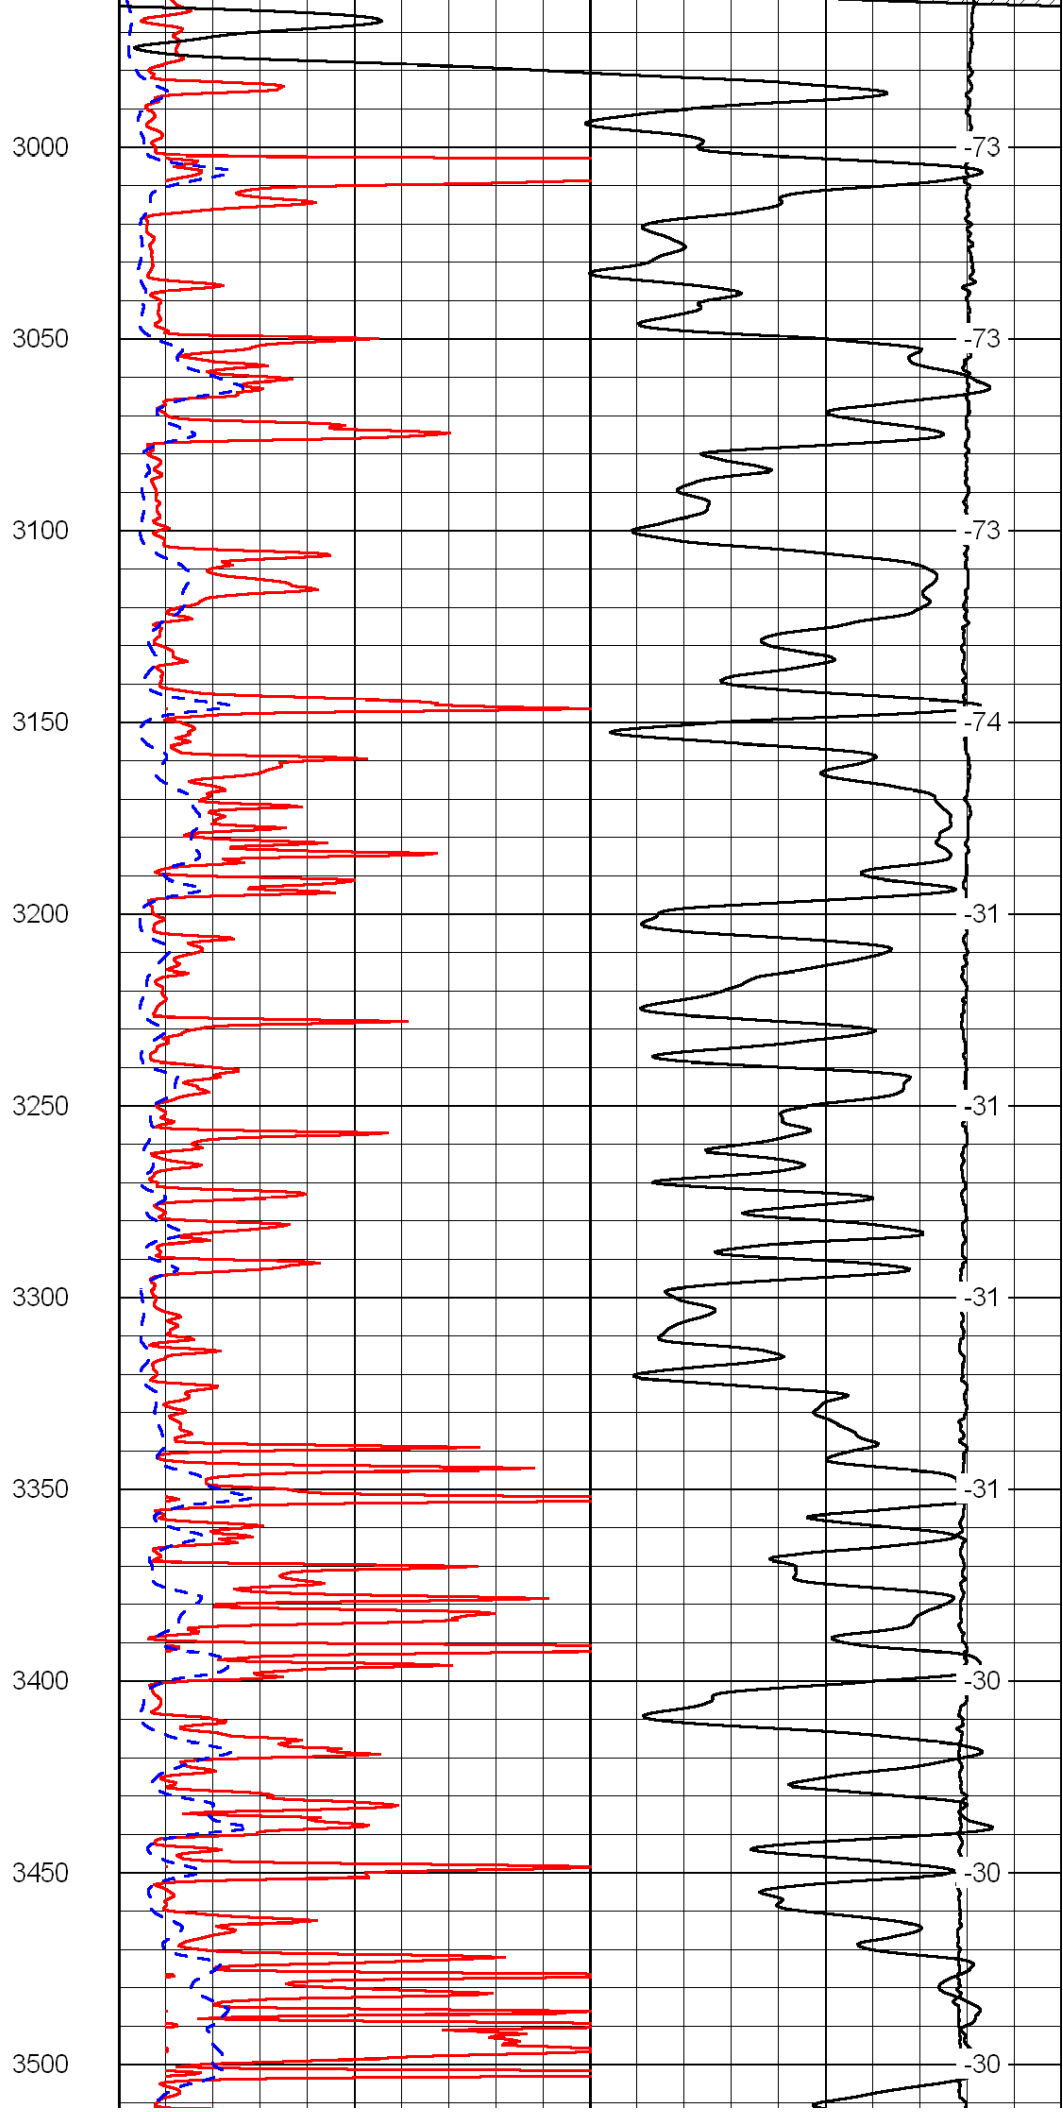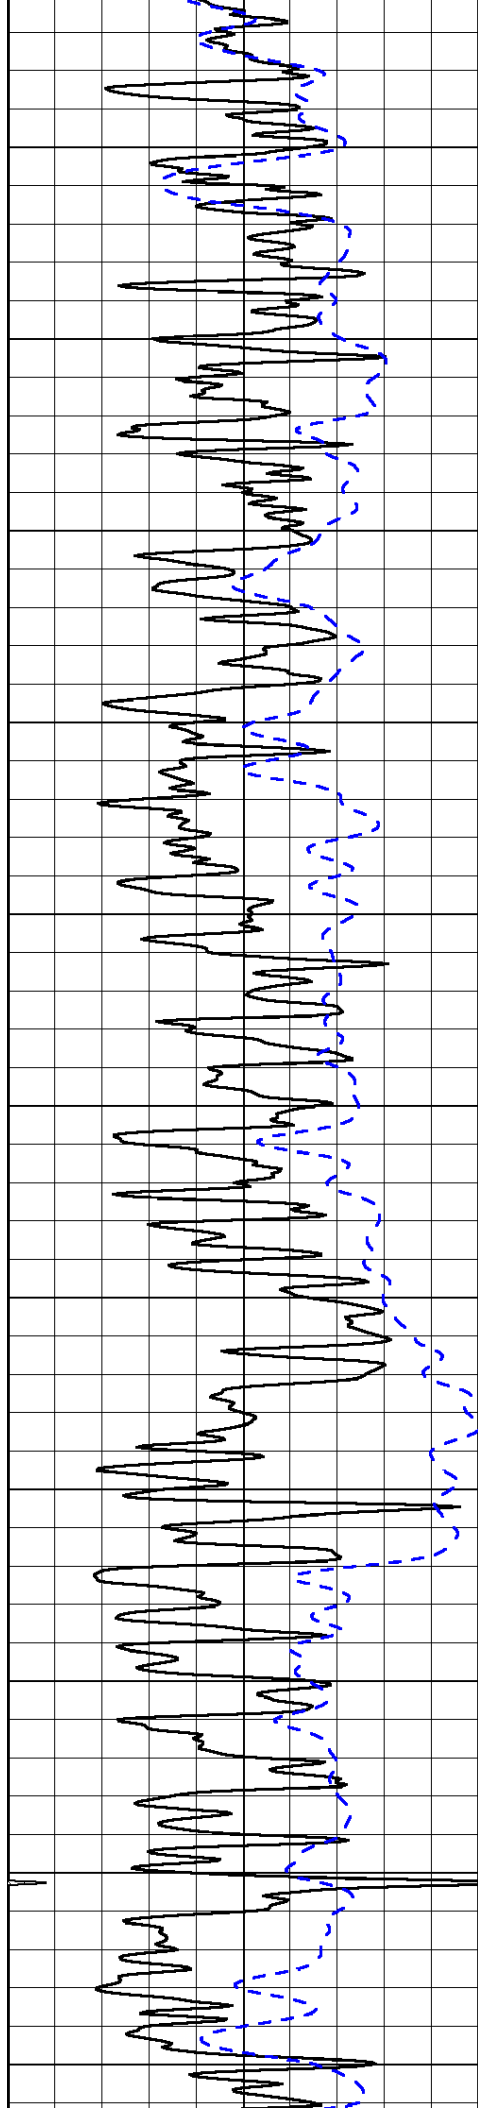

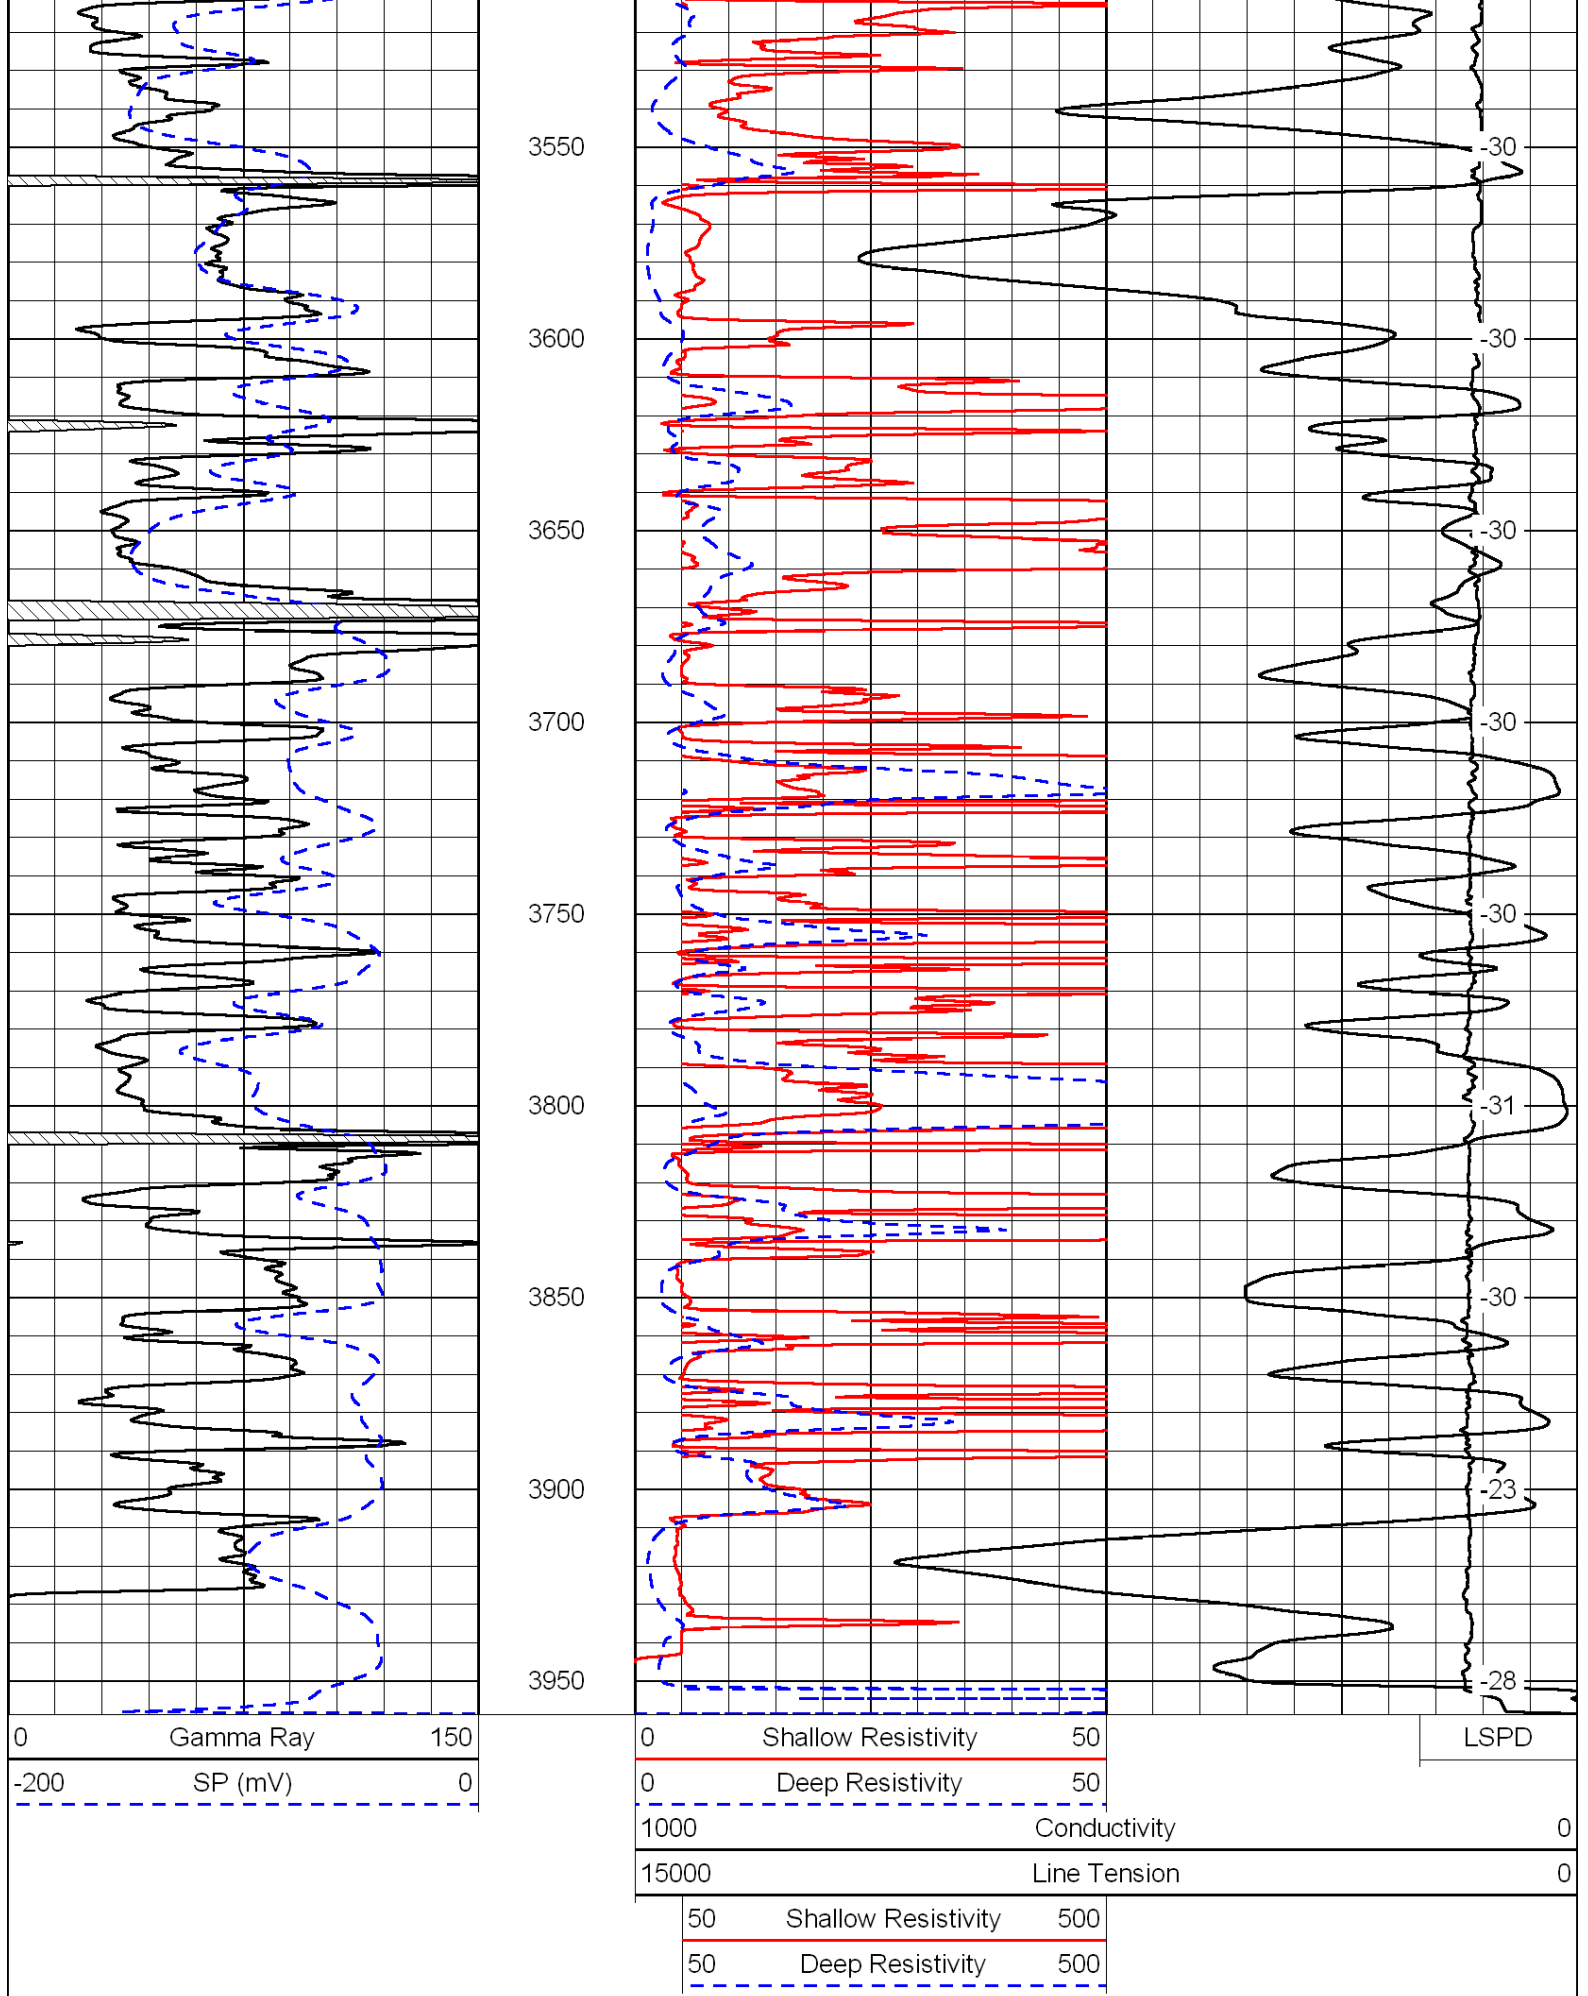


Dataset Pathname: DIL/mrlxstk
Presentation Format: dil
Dataset Creation: Sat Jan 15 02:05:41 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD

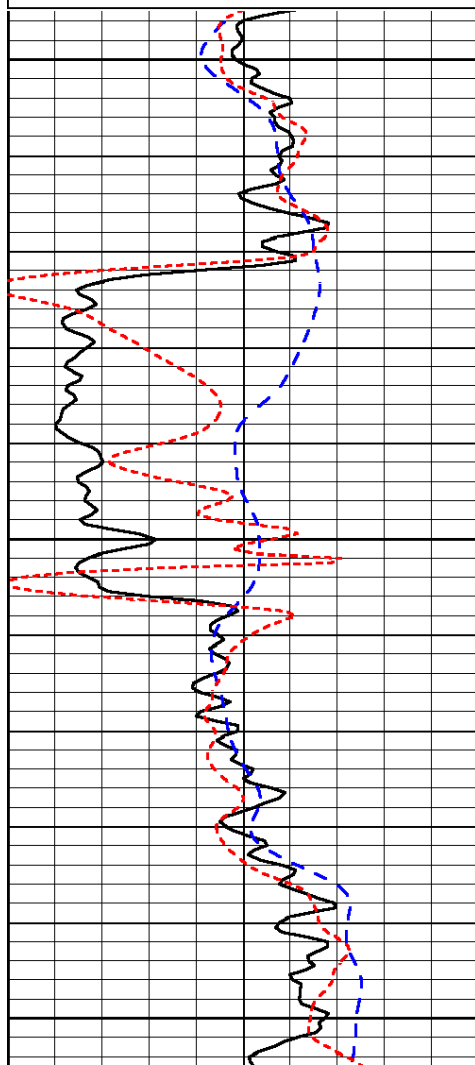

2150

2200

2250



-69

-75

-75

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40


0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD

Database File: c:\warrior\data\maralex_heskett no. 6-1\maralexhd.db
Dataset Pathname: DIL/mrlxstk
Presentation Format: dil
Dataset Creation: Sat Jan 15 02:05:41 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

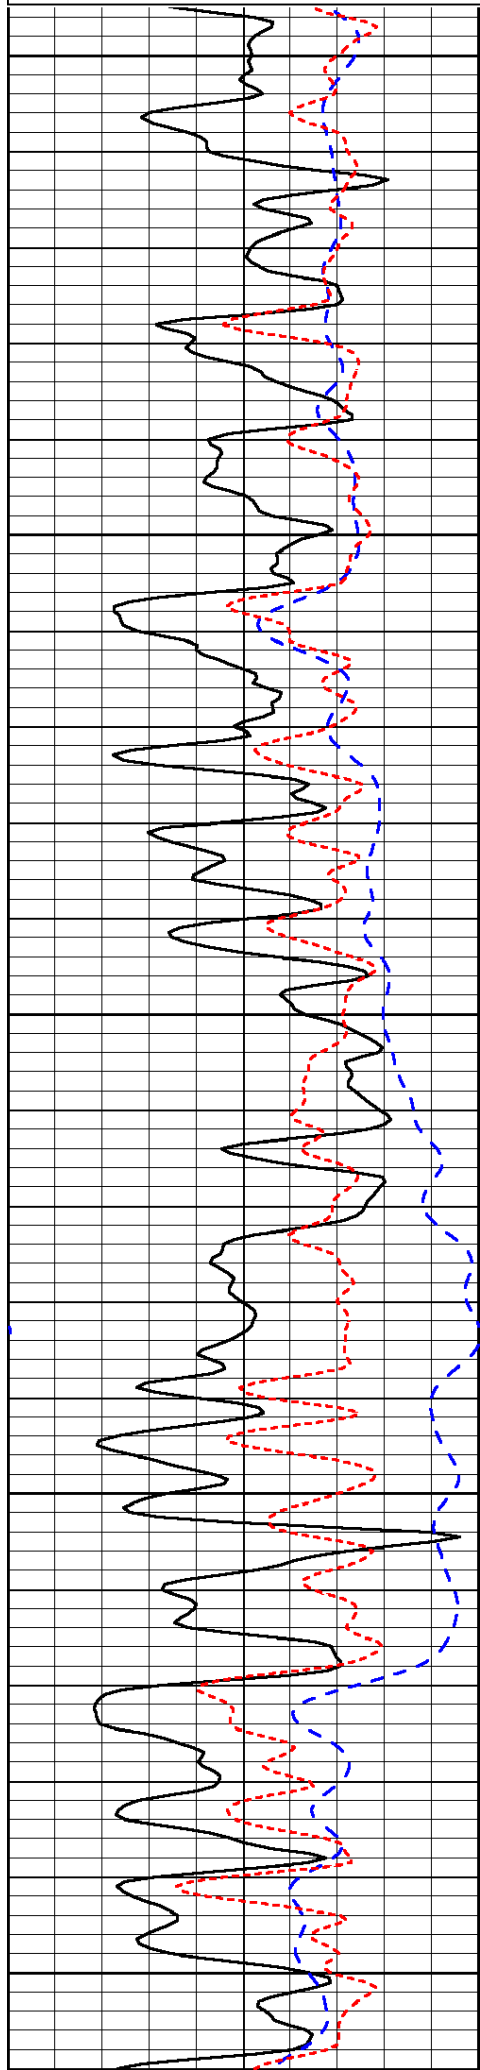


3200

3250

3300

3350

3400

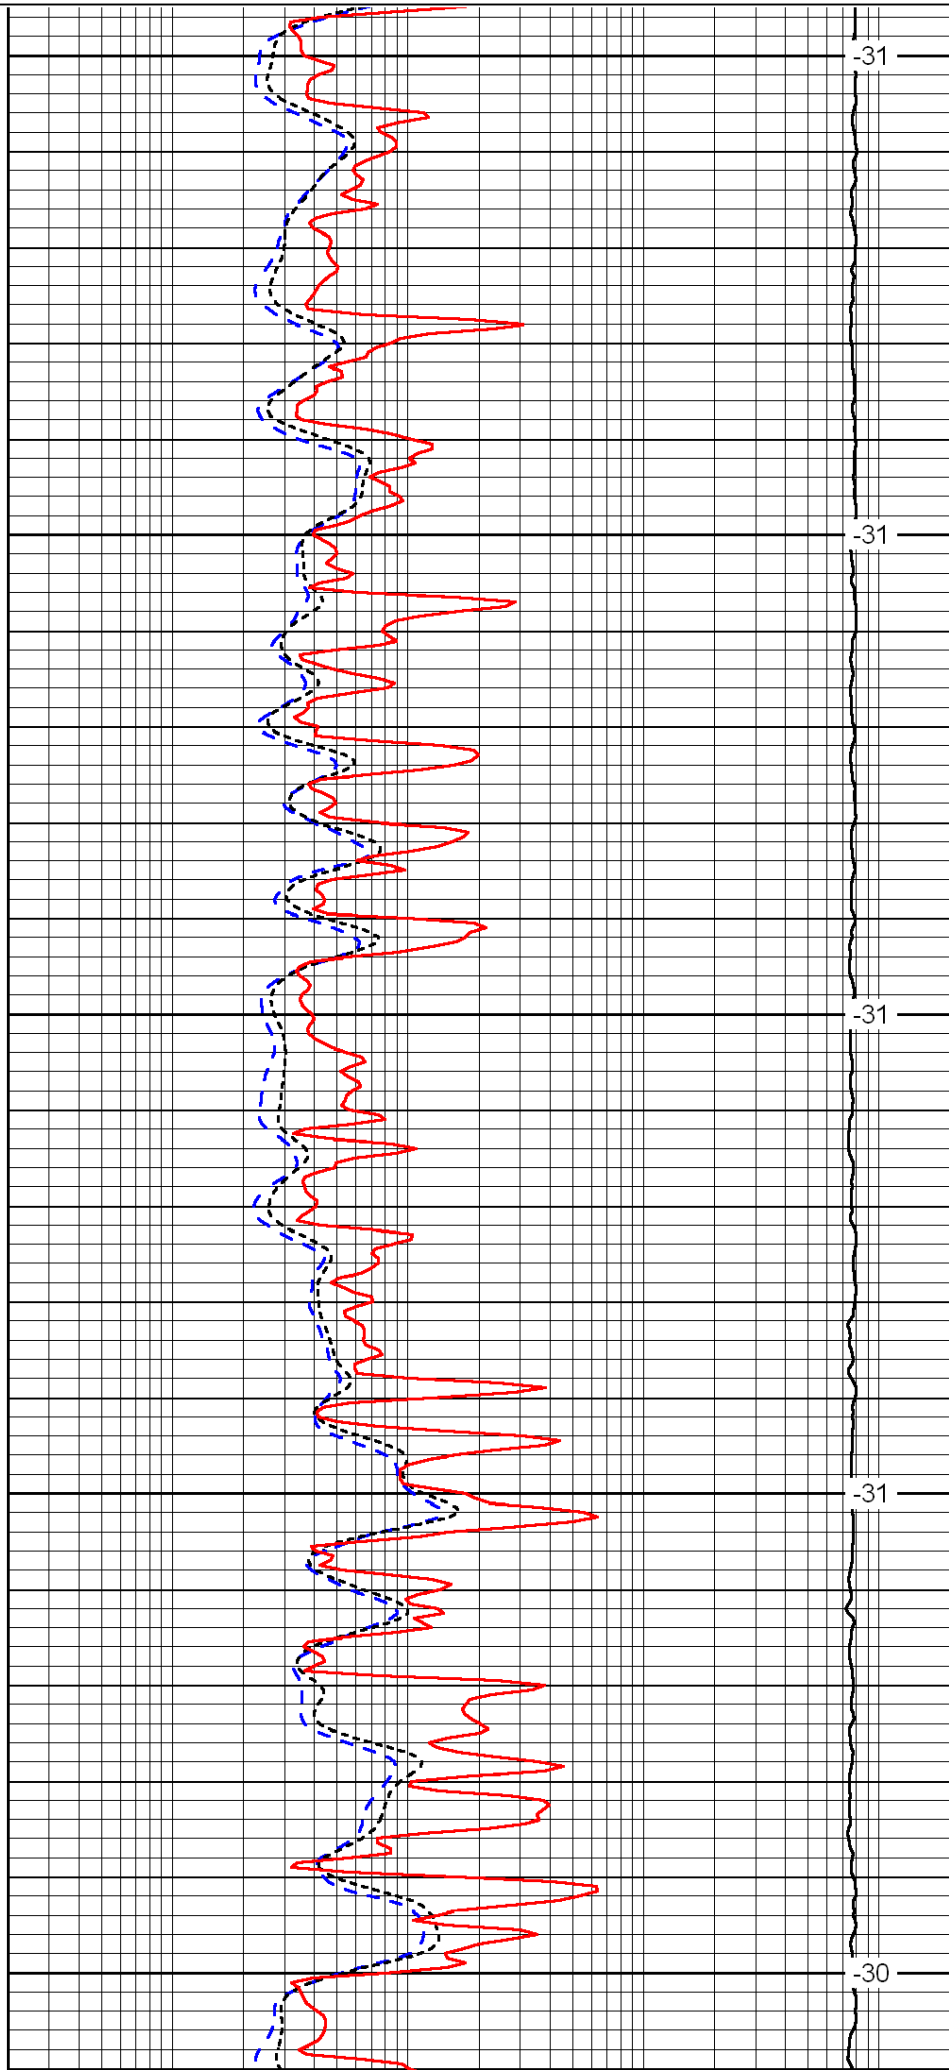


-31

-31

-31

-31

-30

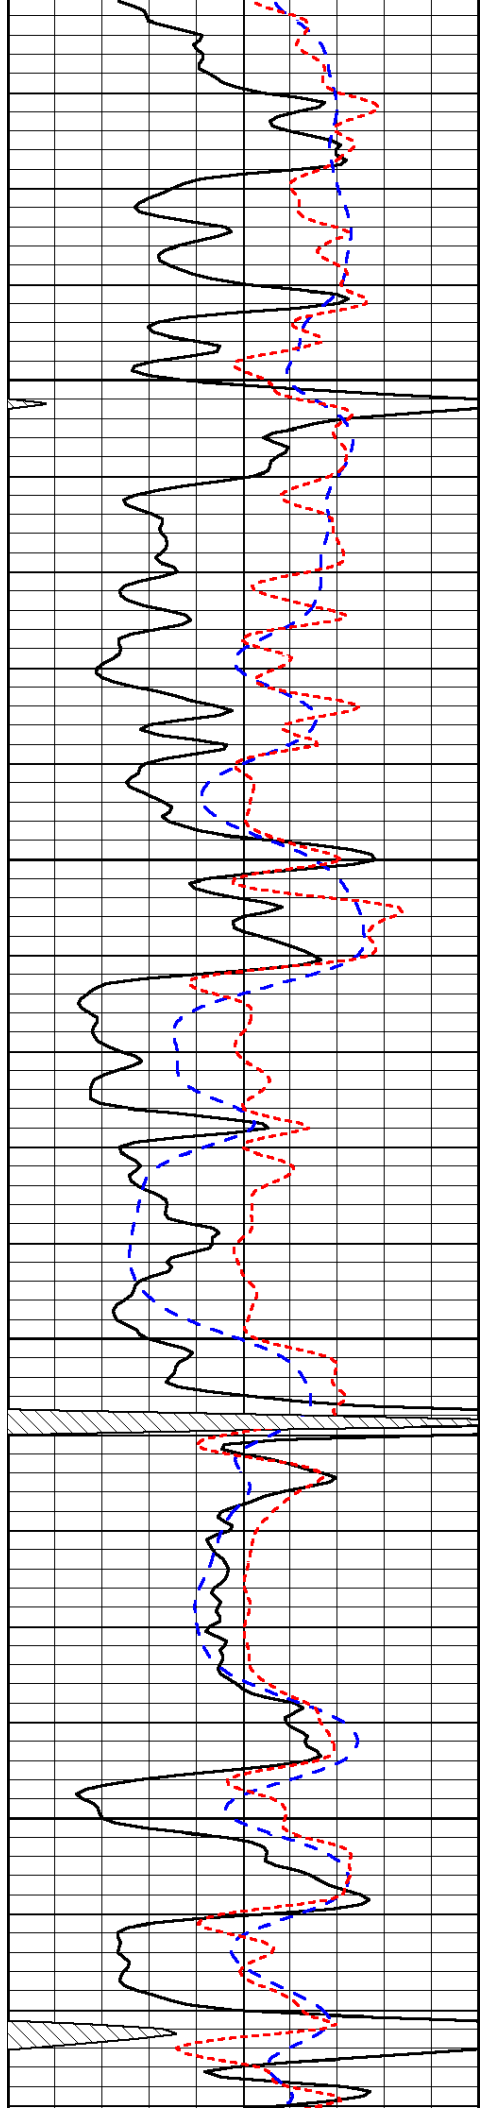


3450

3500

3550

3600

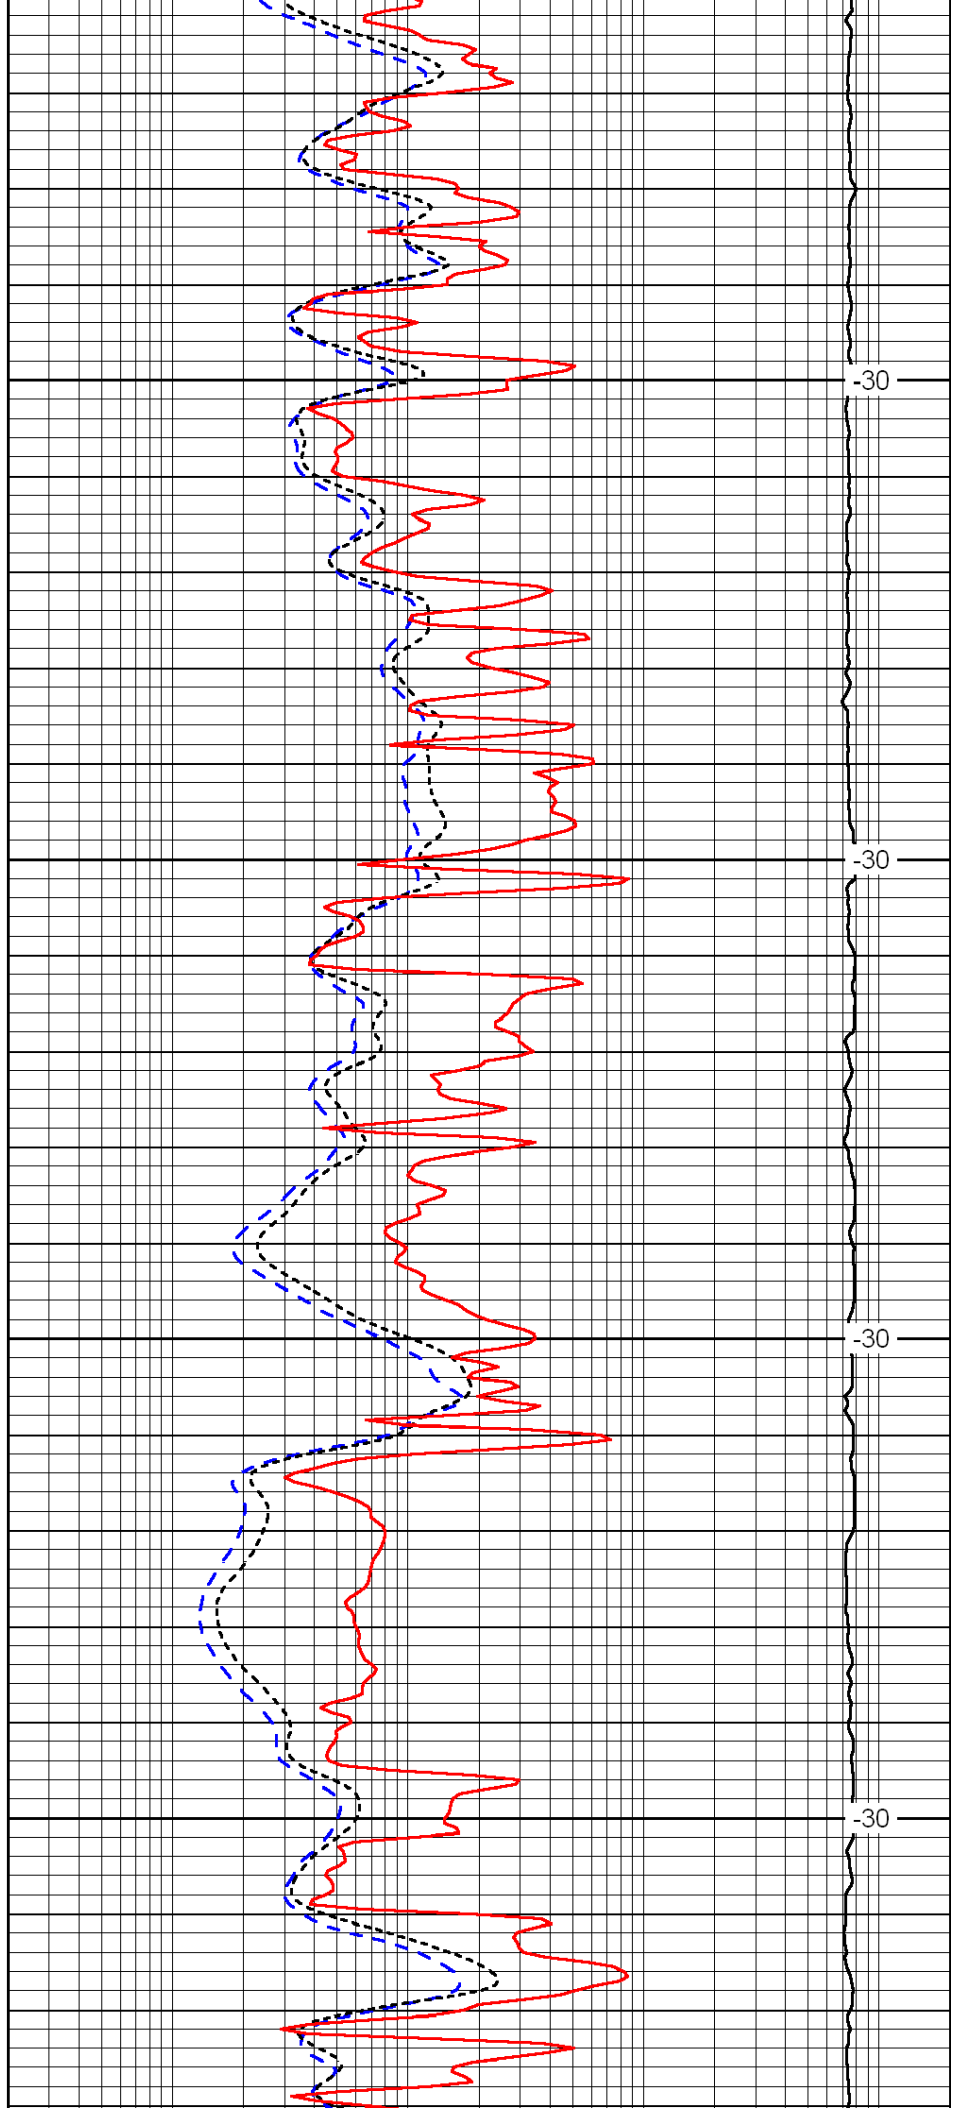


-30

-30

-30

-30

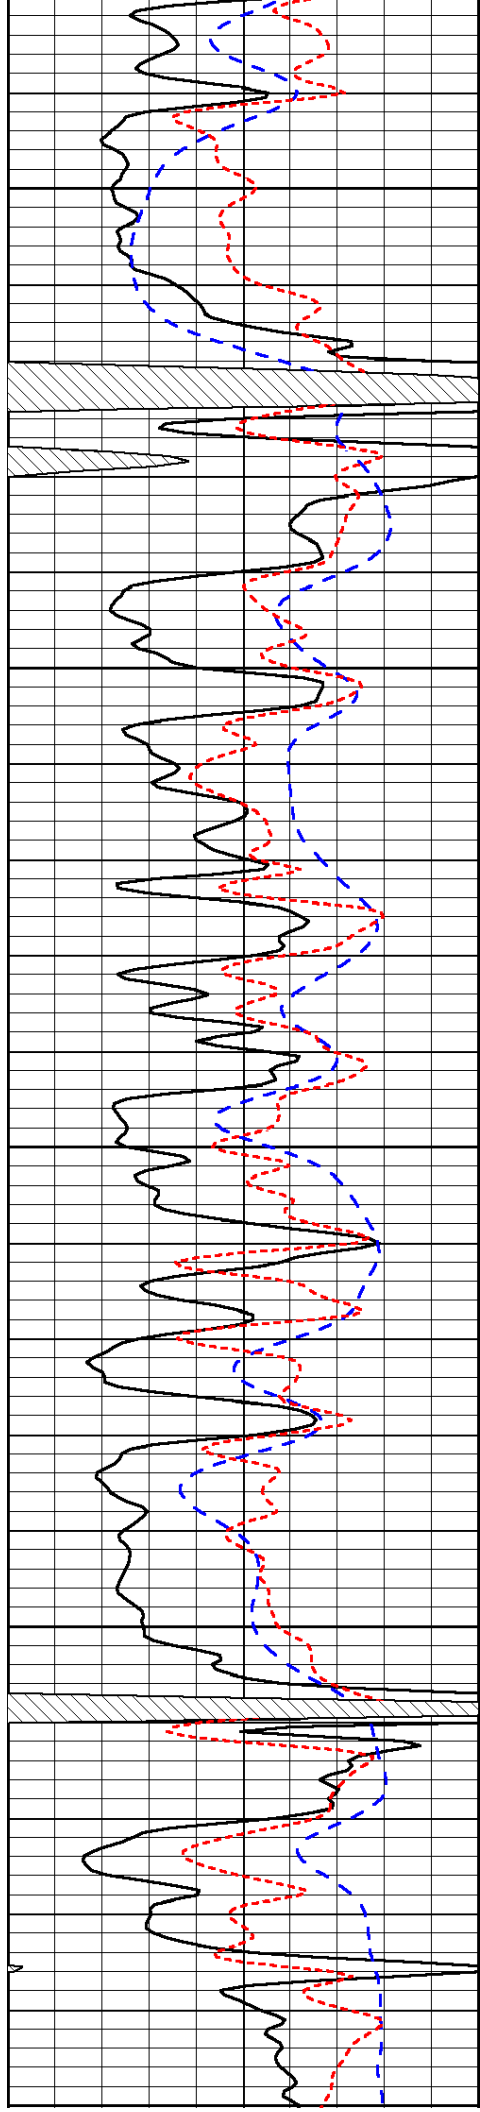


3650

3700

3750

3800

3850

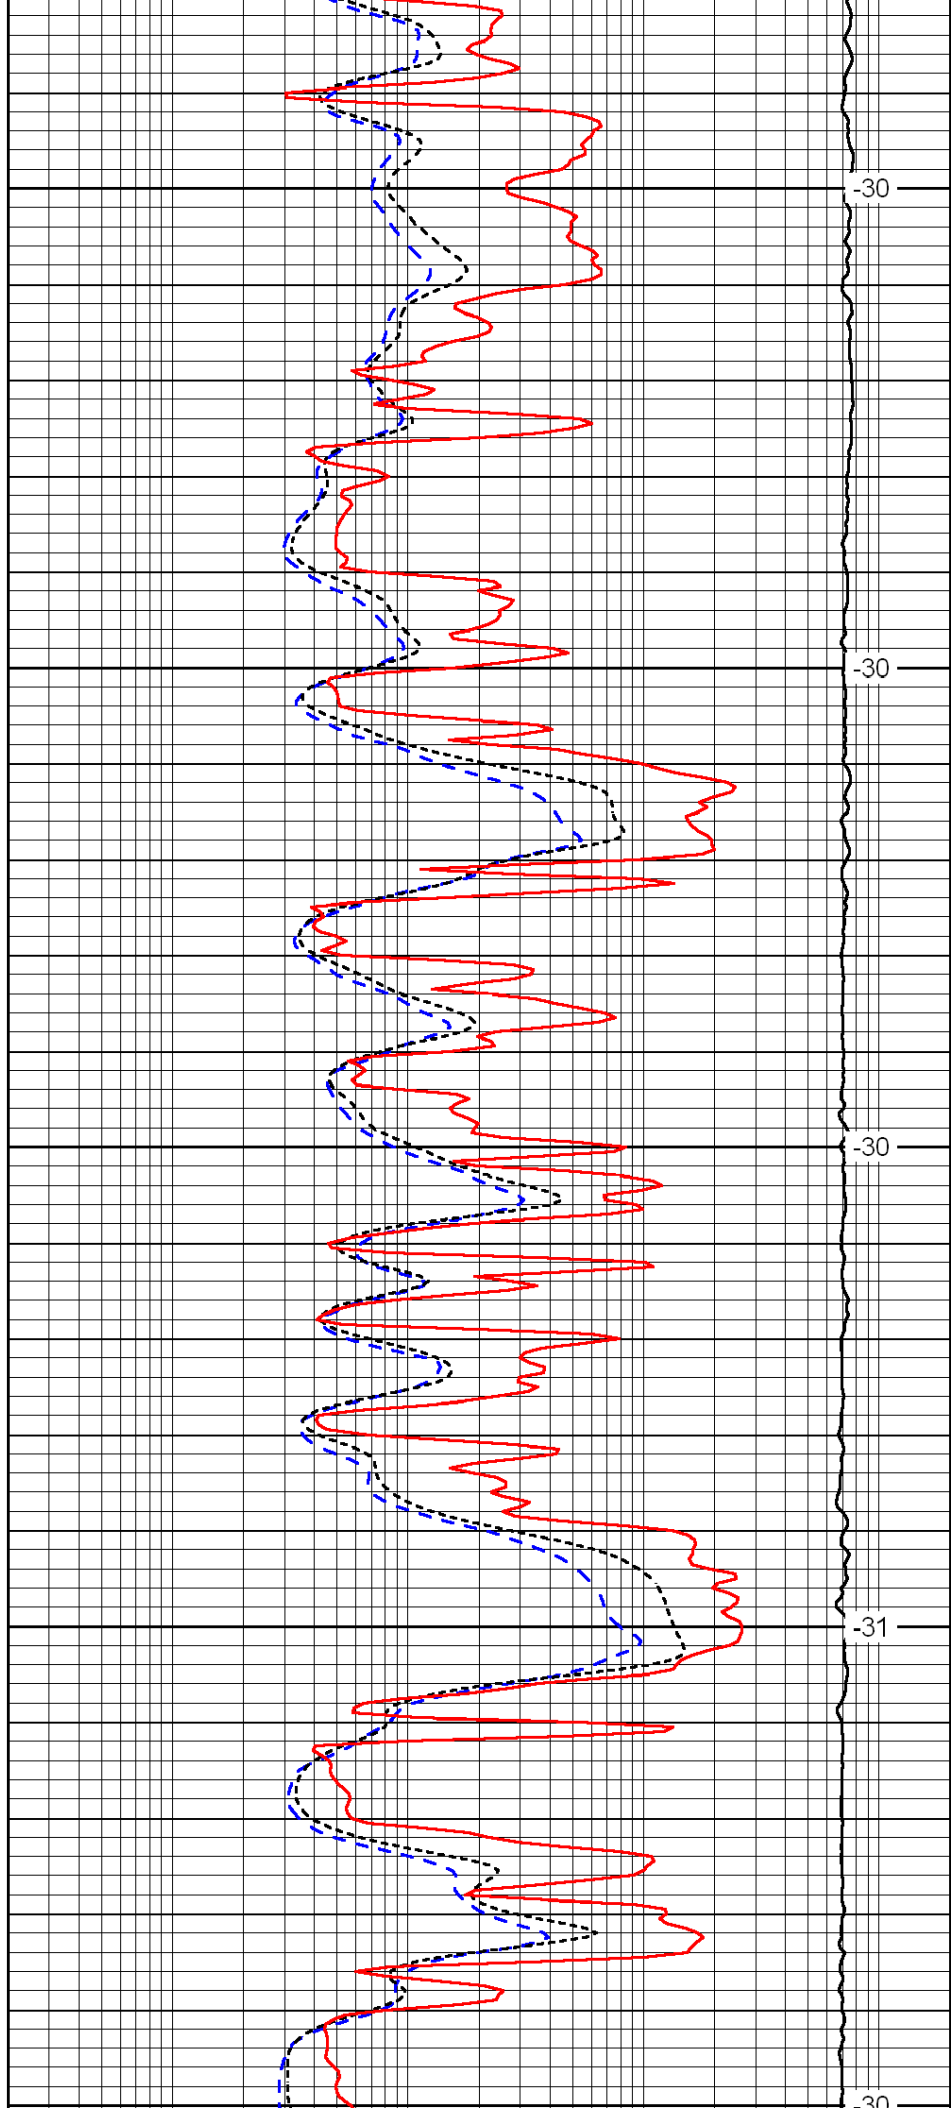



-30

-30

-30

-31

-30

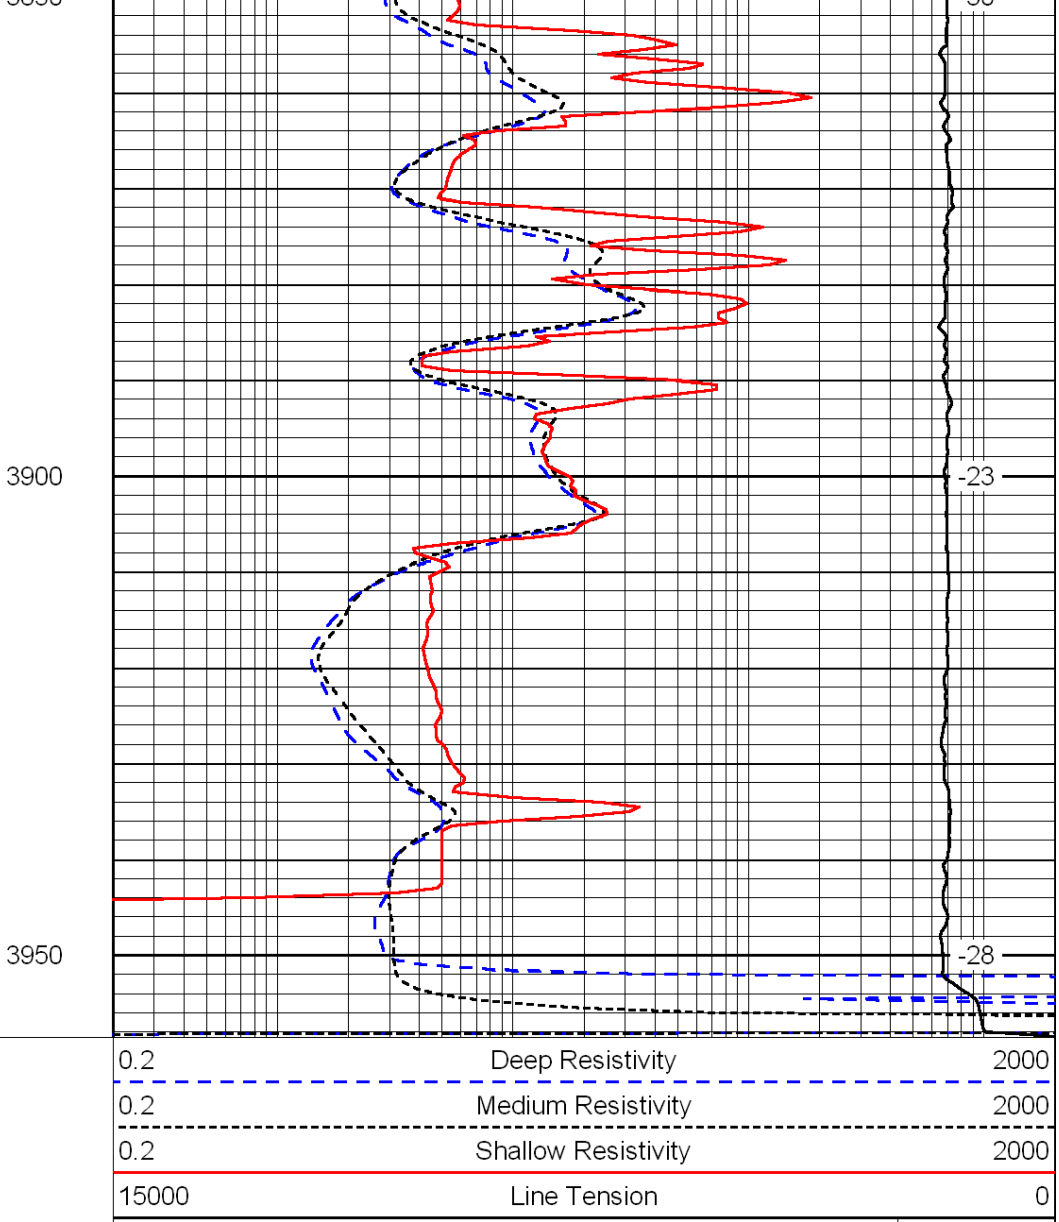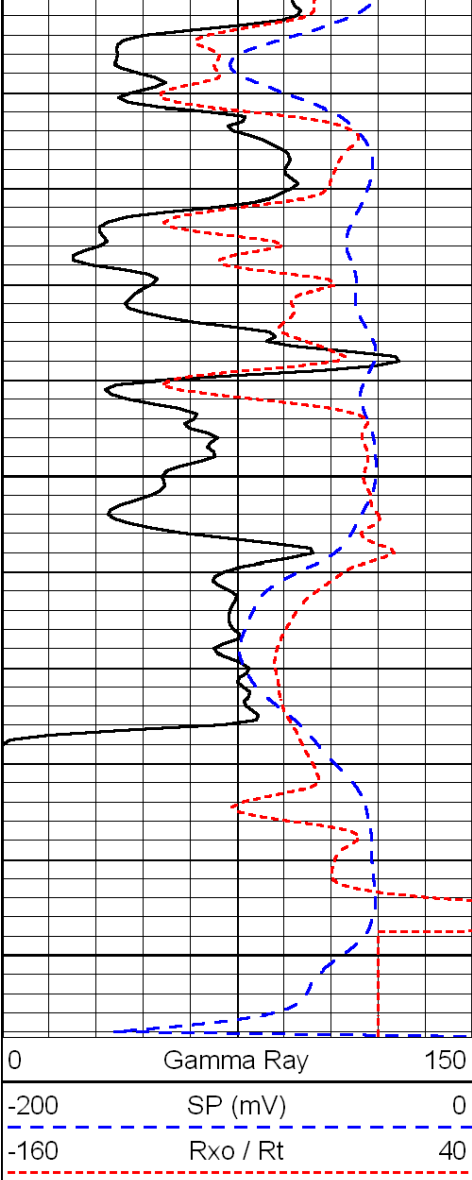

LSPD