

15-163-02471-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Rooks County. Sec. 12 Twp. 6 Rge. 18 (E) W (W)
Location as "NE/CNW%SW%" or footage from lines NW 1/4 SE 1/4 NW 1/4
Lease Owner Transit Corporation
Lease Name Shaw-Hindman Well No. 1
Office Address Oklahoma City, Oklahoma.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 10-13 19 55
Application for plugging filed 10-13 19 55
Application for plugging approved 10-13 19 55
Plugging commenced 10-13 19 55
Plugging completed 10-13 19 55
Reason for abandonment of well or producing formation _____

NORTH

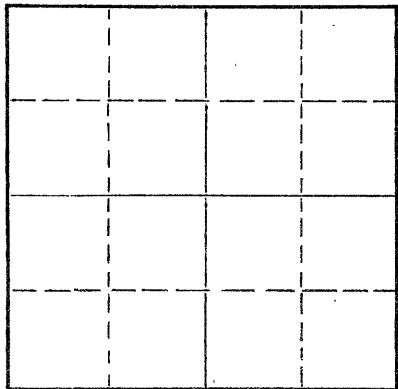

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19 ____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 414 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	212'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole to 200 ft. with heavy drilling mud, set plug and cemented with 15 sacks cement. Filled hole to 40' with heavy drilling mud, set plug and cemented to bottom of cellar with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
OCT 27 1955

1027-55

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Transit Corporation
Address 1516 Liberty Bank Bldg., Oklahoma City, Okla.

STATE OF Oklahoma, COUNTY OF Oklahoma, ss.
G. W. Dodson (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Dodson
Oklahoma City, Oklahoma. (Address)

SUBSCRIBED AND SWORN TO before me this 26 day of October, 19 55

My commission expires 1-28-59
Jane A. Brady Notary Public.

PLUGGING
FILE SEC 12 T 6 R 18 W
BOOK PAGE 9 LINE 36

TRANSIT CORPORATION
Shaw-Hindman #1

12-6S-18W., Rooks Co., Kans.

<u>Formation</u>	<u>From</u>	<u>To</u>	Elevation: 1925 RB Commenced: 10-3-55 Completed: 10-13-55
Clay	•	70	
Shale	70	185	
Sand	185	200	
Shale	200	212	Ran 212' of 8-5/8" Casing Cem. w/ 150 sacks
Shale	212	250	
Sandy Shale	250	385	
Shale	385	850	
Sand	850	1040	
Shale Shells	1040	1272	
Shale & Shells, Red Bed	1272	1340	
Anhydrite	1340	1375	
Shale & Shells	1375	1910	
Shale & Lime	1910	2200	
Lime & Shale	2200	2310	
Shale & Lime	2310	2410	
Lime & Shale	2410	2495	
Lime	2495	2516	
Shale	2516	2750	
Lime & Shale	2750	2892	
Lime	2892	3395	
Lime & Shale	3395	3460	
Lime	3460	3475 T. D.	

Formation Tops

Anhydrite	1340'
Base Anhydrite	1375
Topeka	2876
Heebner	3079
Toronto	3106
Lansing K. C.	3123
Base K. C.	3354

I hereby certify the foregoing to be a true and accurate Driller's Log of the formations encountered in the above well.

TRANSIT CORPORATION

BY C. D. Dodson

DIVISION
10-27-55

Subscribed and sworn to before me this 24th day of October, 1955.

Jesse A. Brady
Notary Public,
State of Oklahoma.

My commission expires 1-28-59.

