



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company	VINCENT OIL CORP.	Company	VINCENT OIL CORPORATION
Well	SCOTT FARMS #1-13	Well	SCOTT FARMS #1-13
Field		Field	
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-20707-0000 1160' FNL & 1370' FWL	Other Services CDL/CNL/PE SON/DIL	
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL KELLY BUSHING 10' A.G.L. KELLY BUSHING	Elevation K.B. 2551 D.F. 2549 G.L. 2541	
SEC 13 TWP 29S RGE 24W			
Date	12-10-10		
Run Number	TWO		
Depth Driller	5450		
Depth Logger	5454		
Bottom Logged Interval	5437		
Top Log Interval	4150		
Casing Driller	611		
Casing Logger	610		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.1 / 54	CHLORIDES 14000	
pH / Fluid Loss	9.0 / 11.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.60 @ 60F		
Rmf @ Meas. Temp	0.45 @ 60F		
Rmc @ Meas. Temp	0.72 @ 60F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	0.28 @ 129F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	129F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	JEFF GRONEWEG		
Witnessed By	KENLEBLANC		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: FORD, KS - WEST ON SADDLE RD 7 MILES TO RD 118
6 MILES SOUTH TO WILBORN RD - 1 MILE WEST - 2 MILES SOUTH - EAST INTO

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	20
0	MEL2.0 (Ohm-m)	20

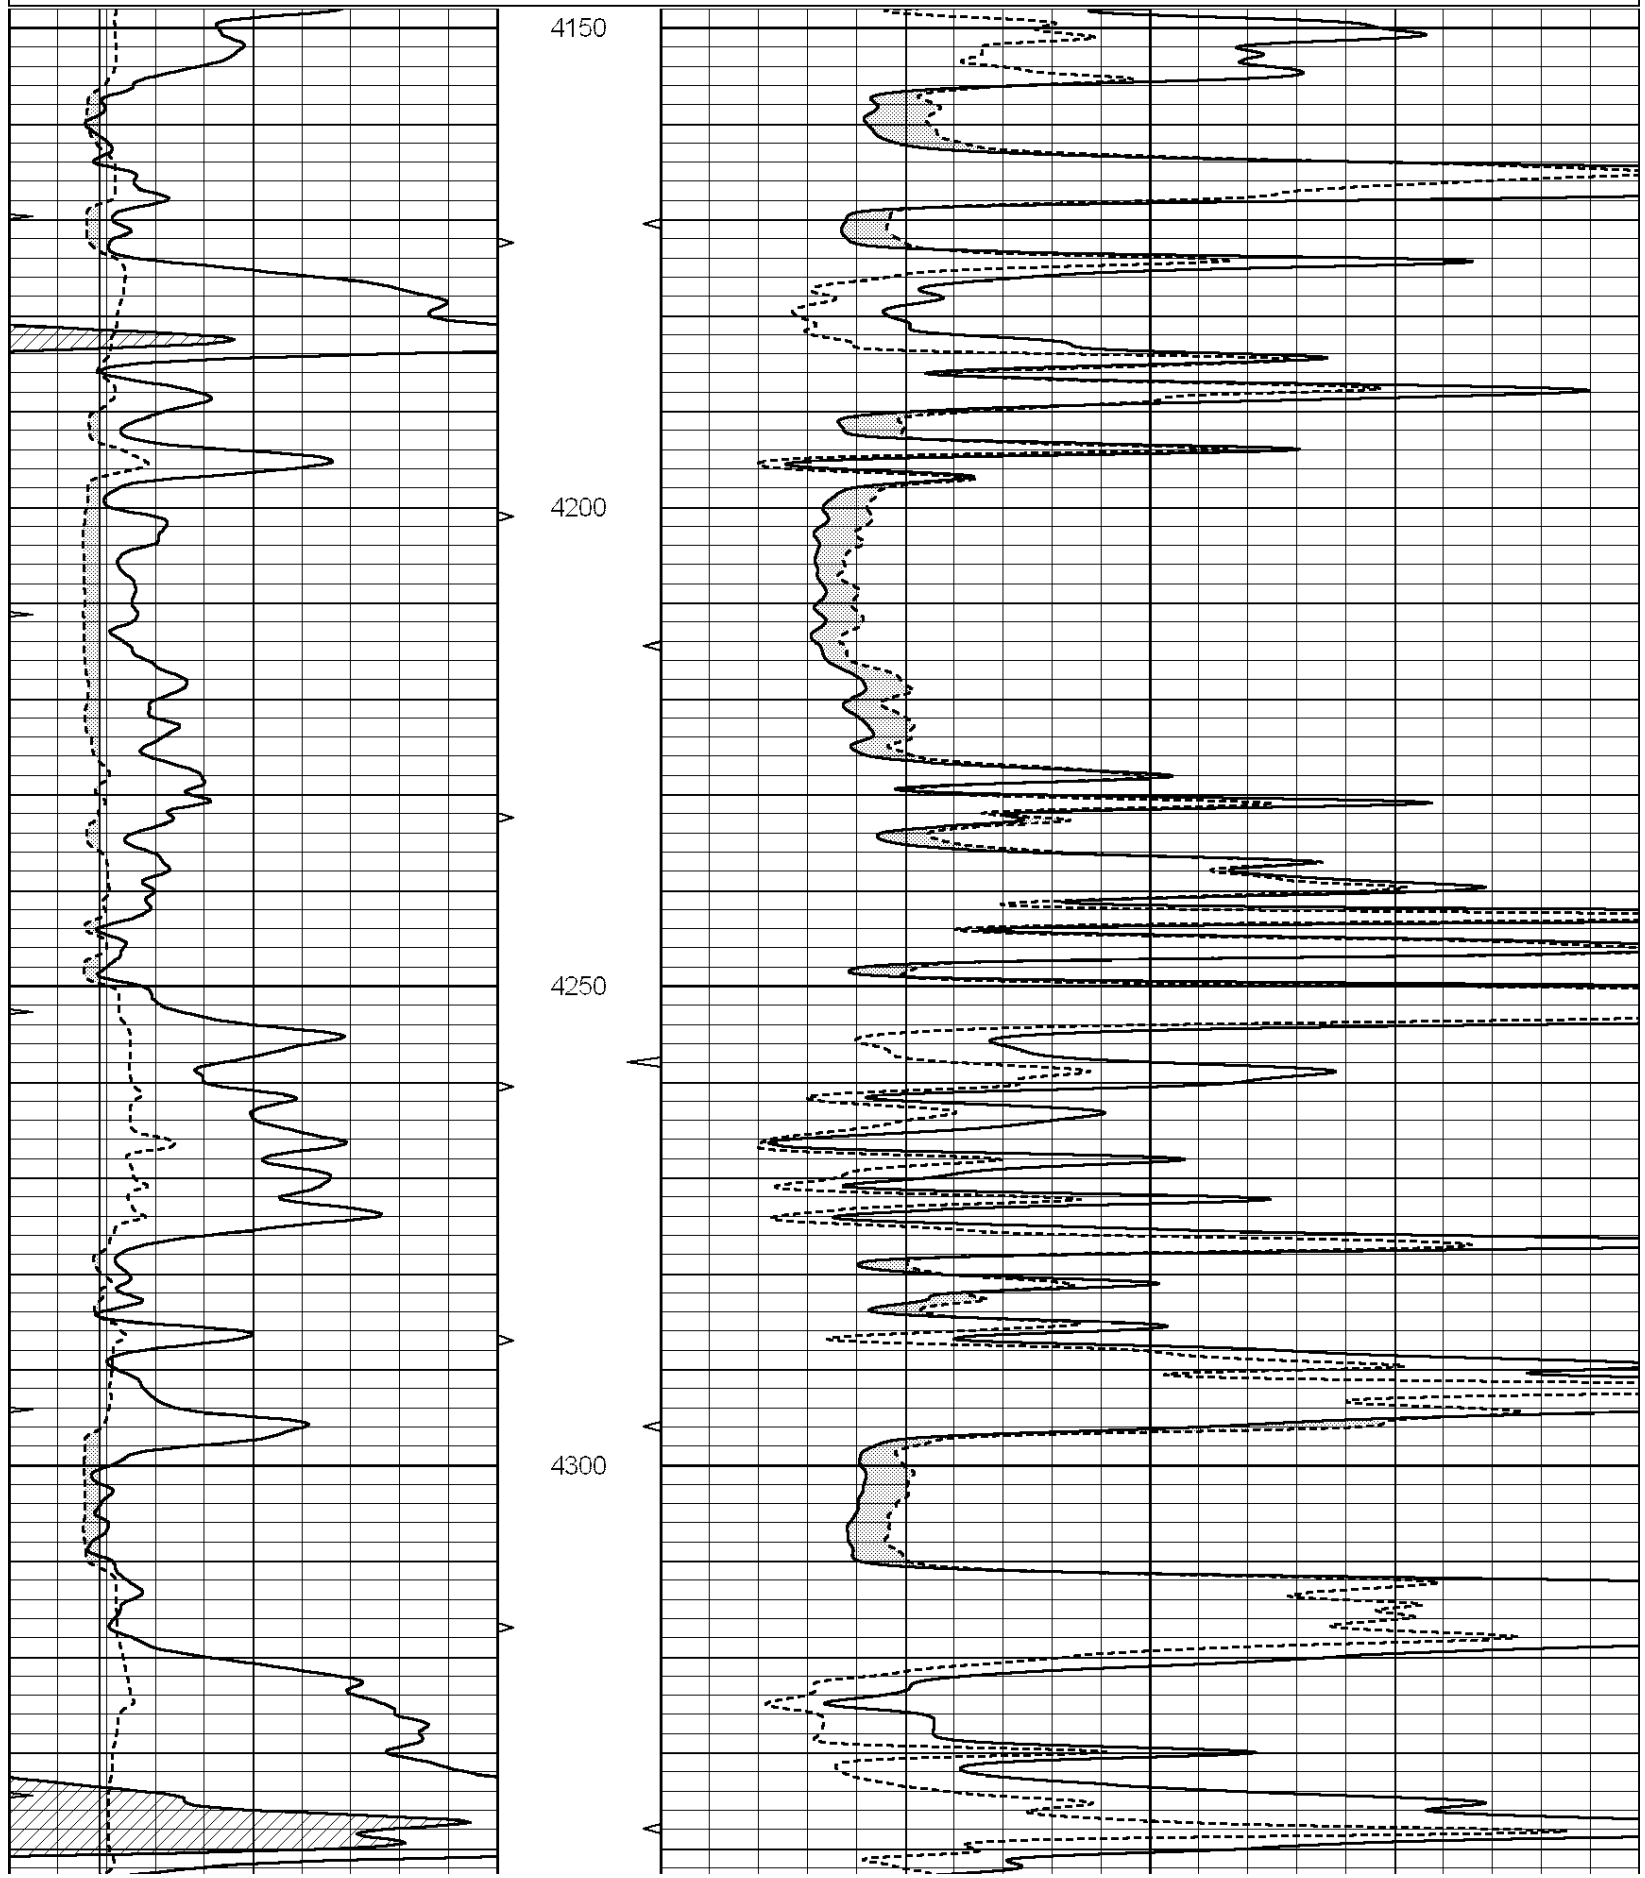

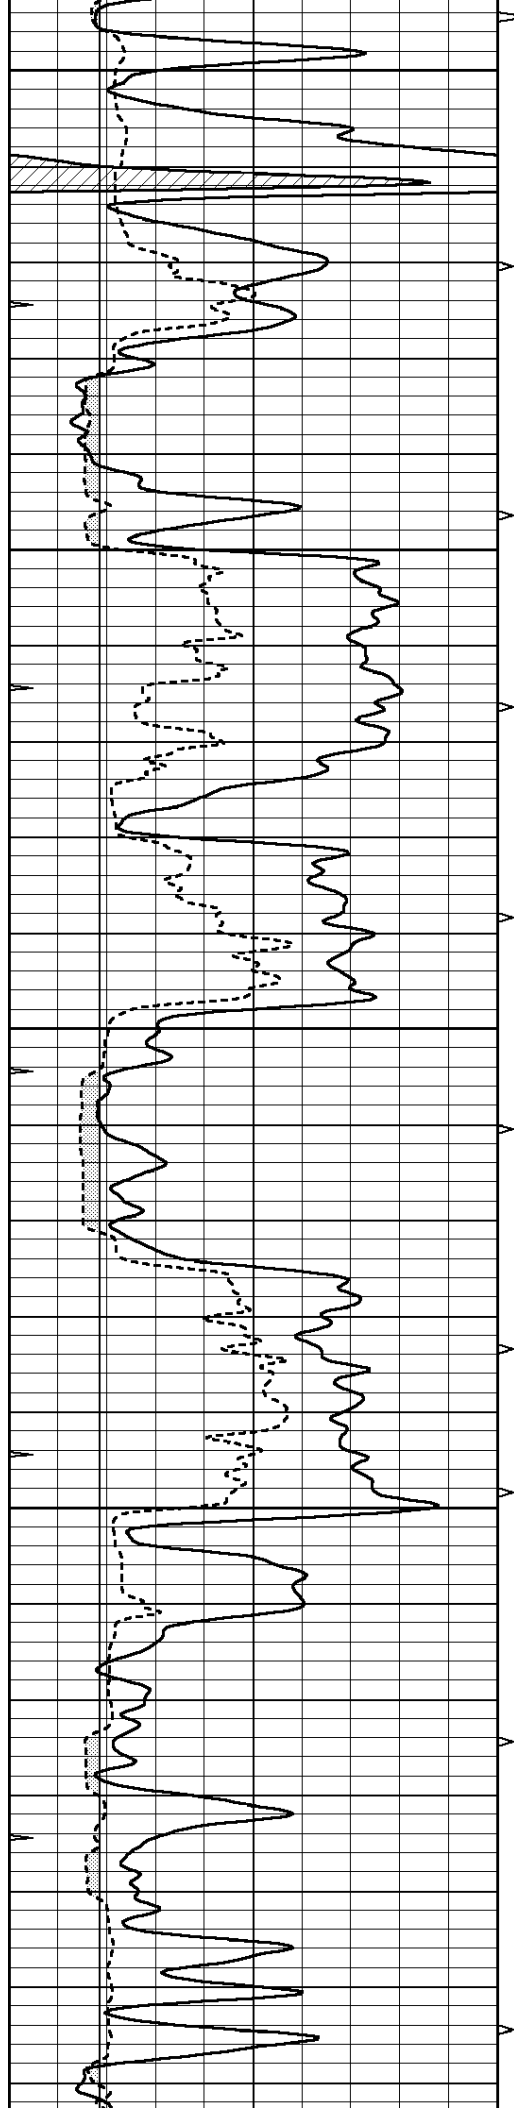


4350


4400

4450

4500

4550

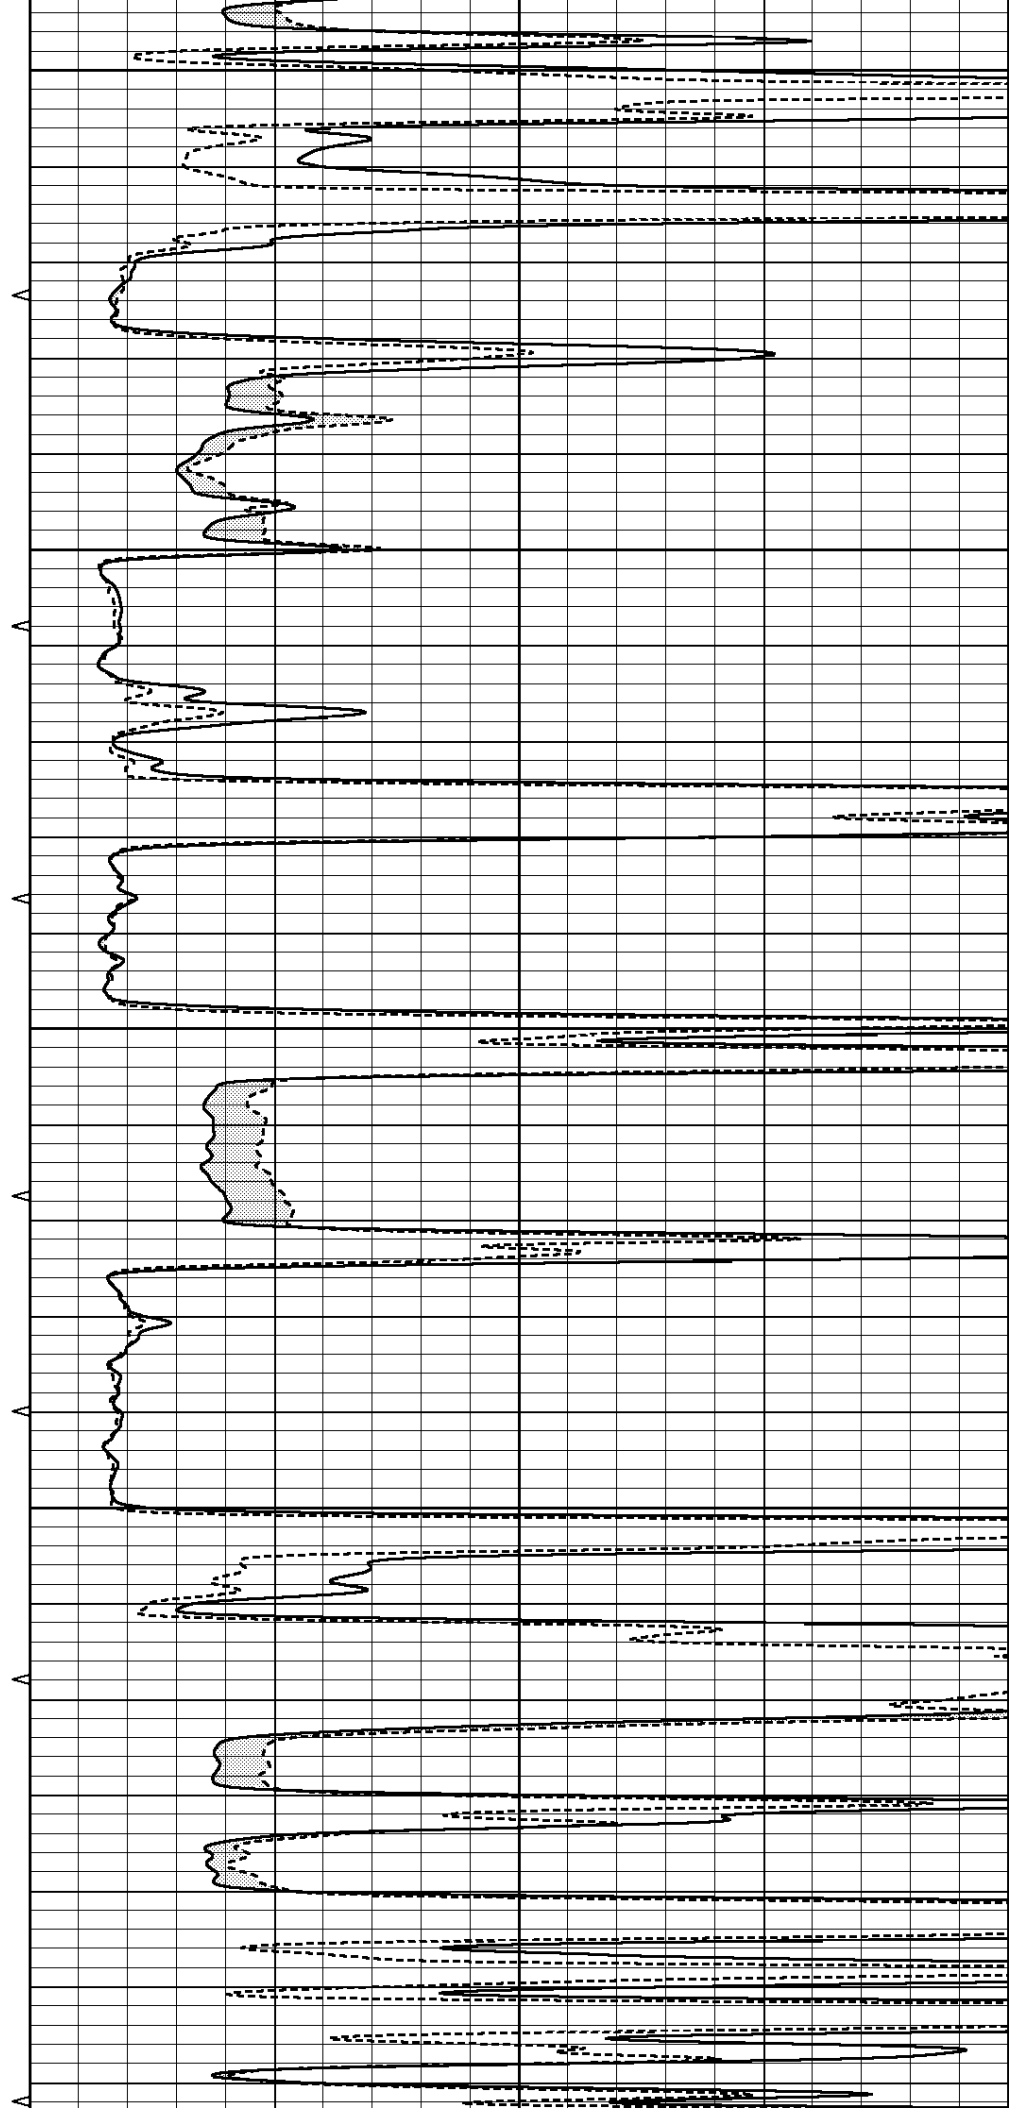

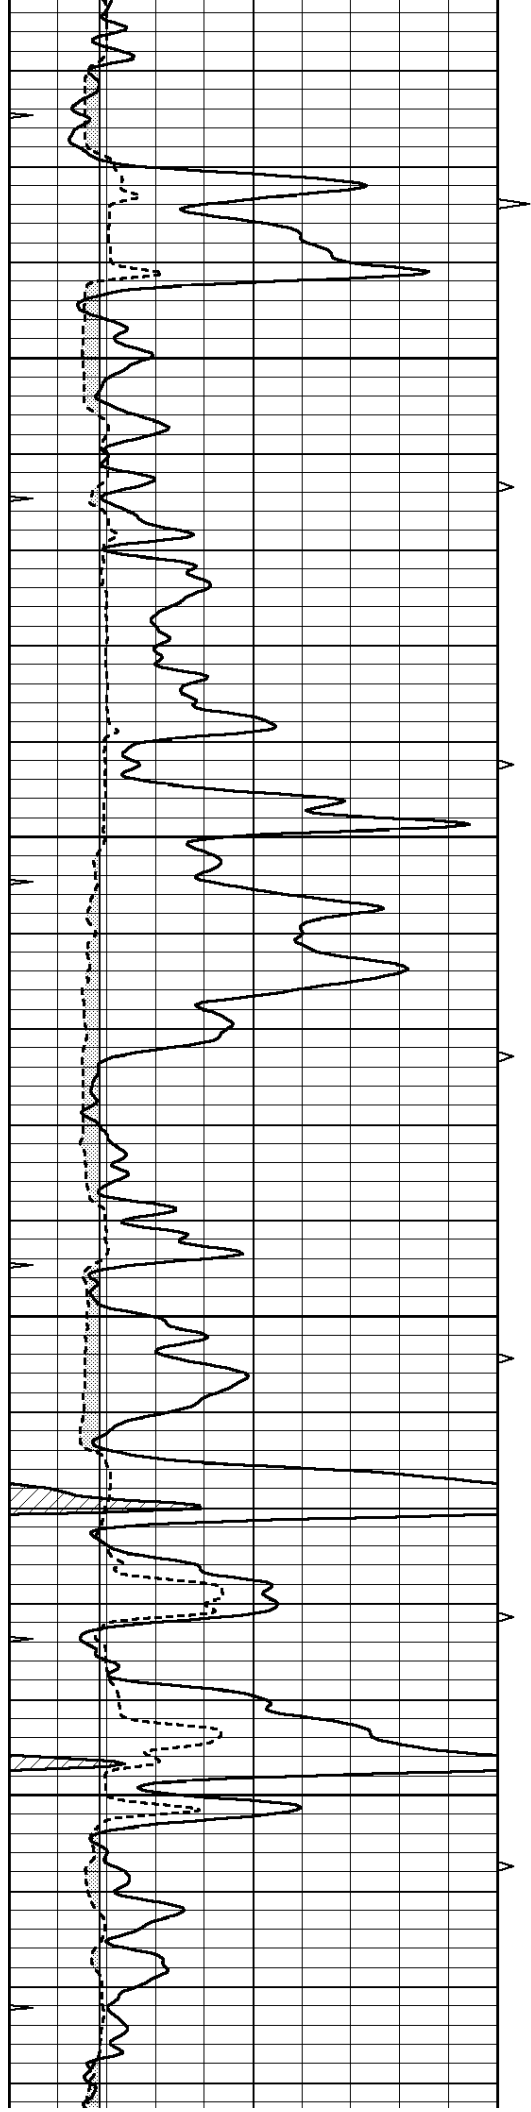




4600


4650

4700

4750

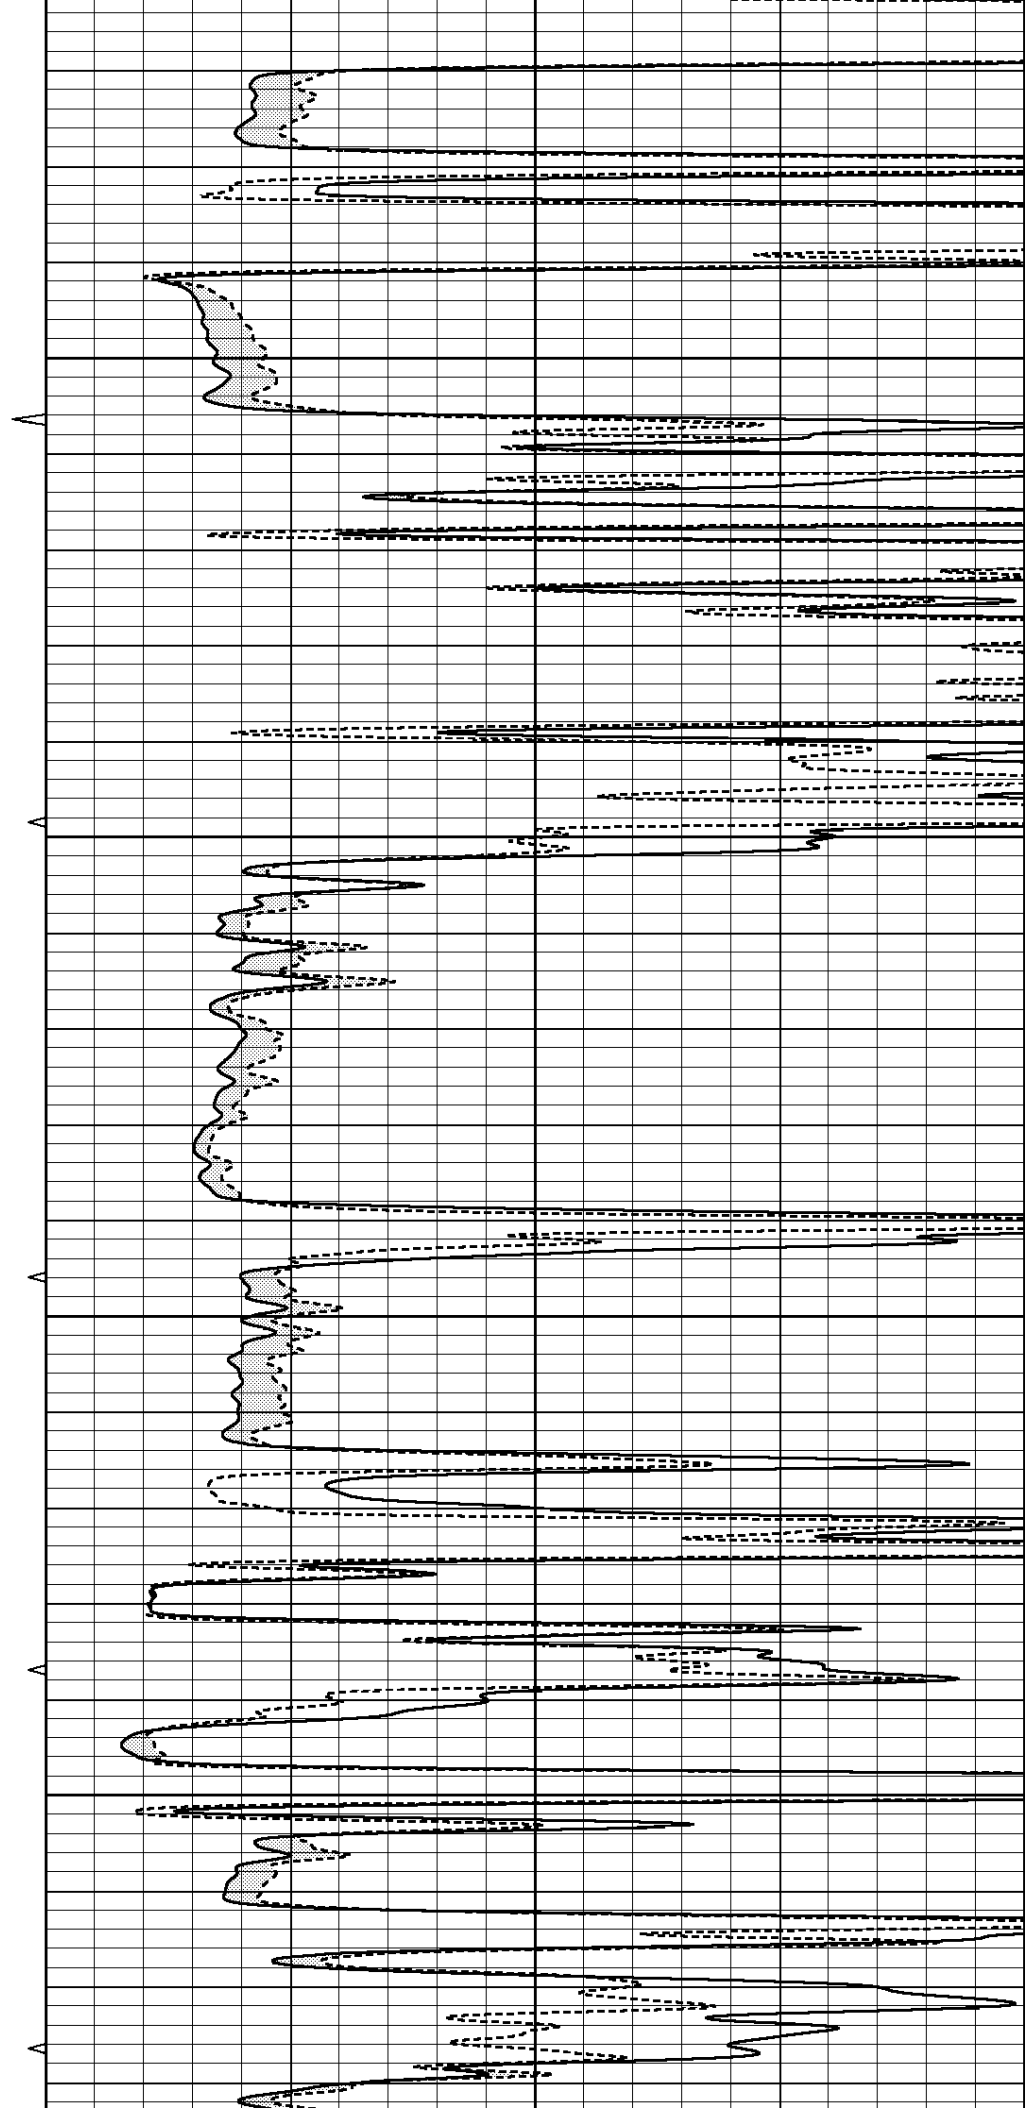

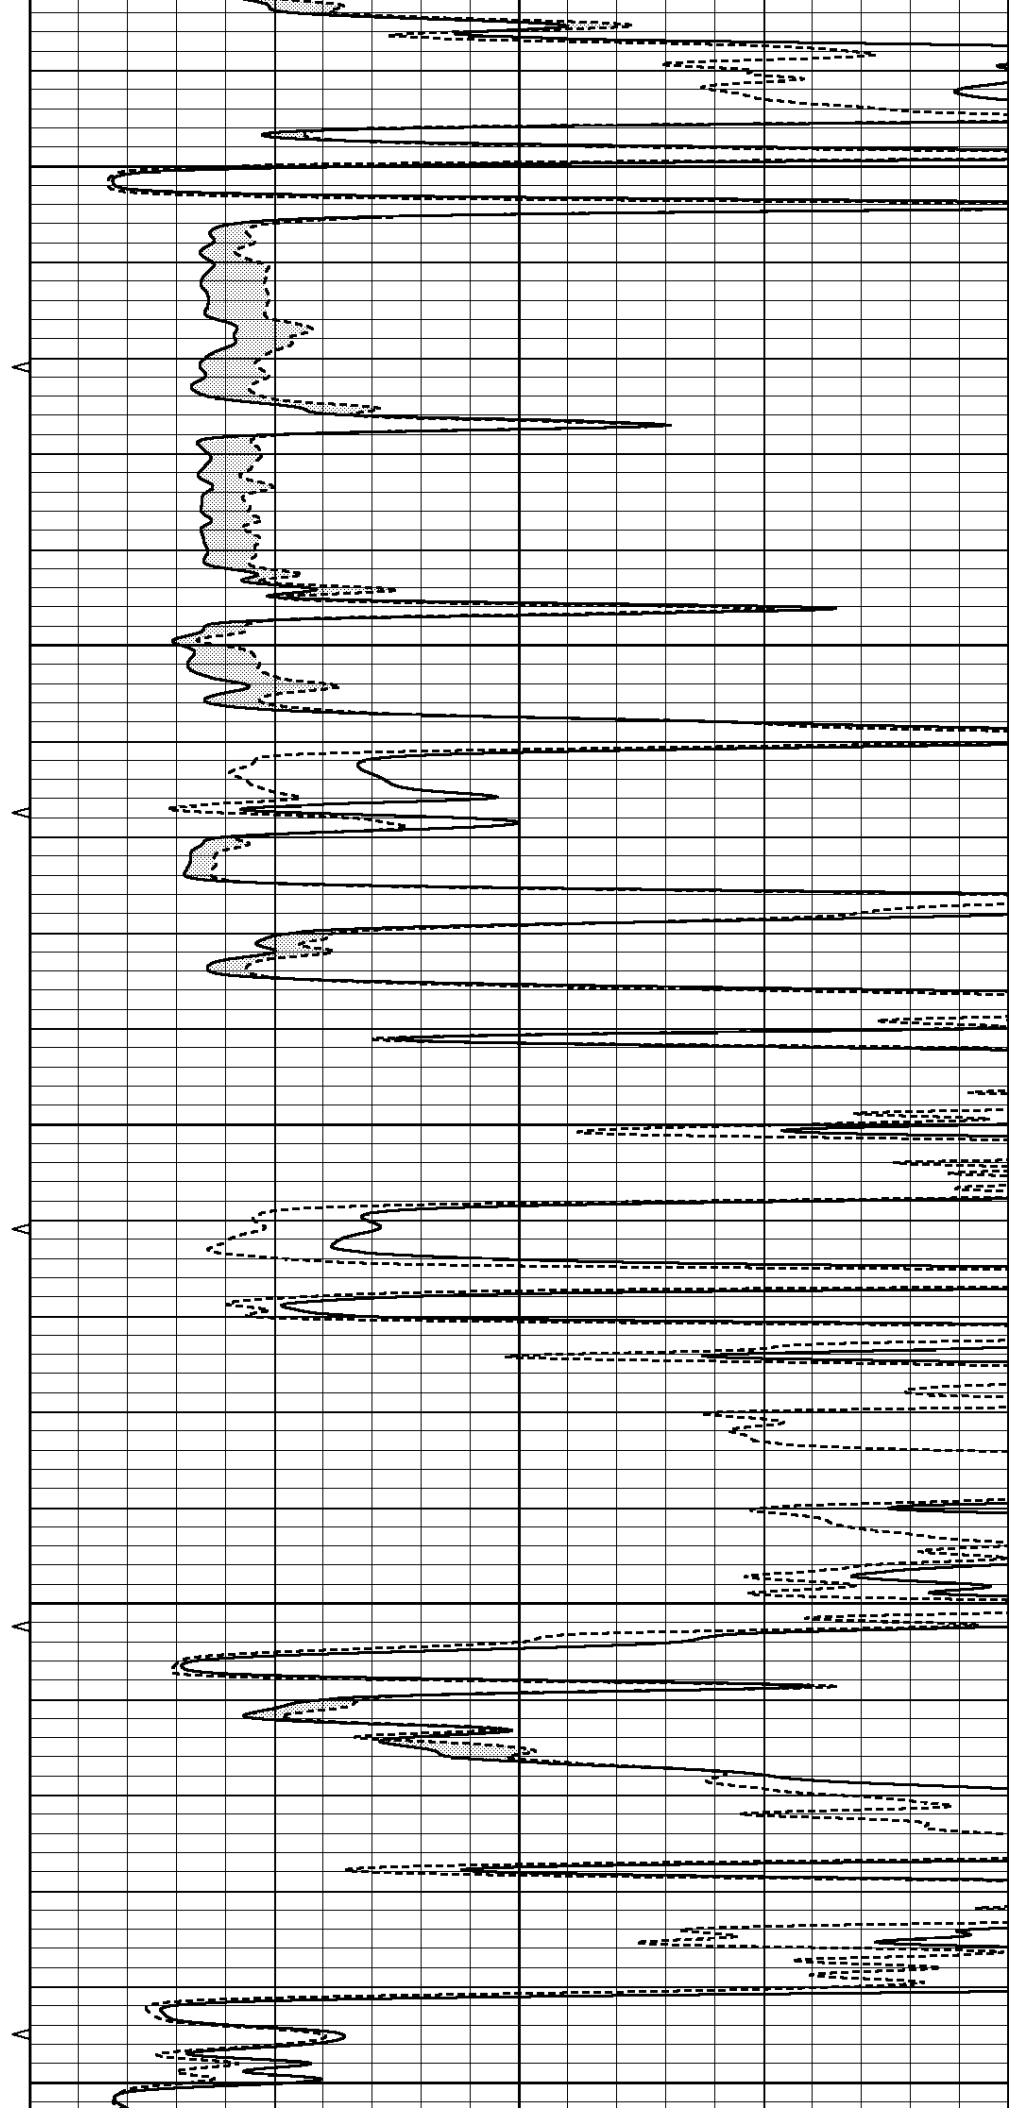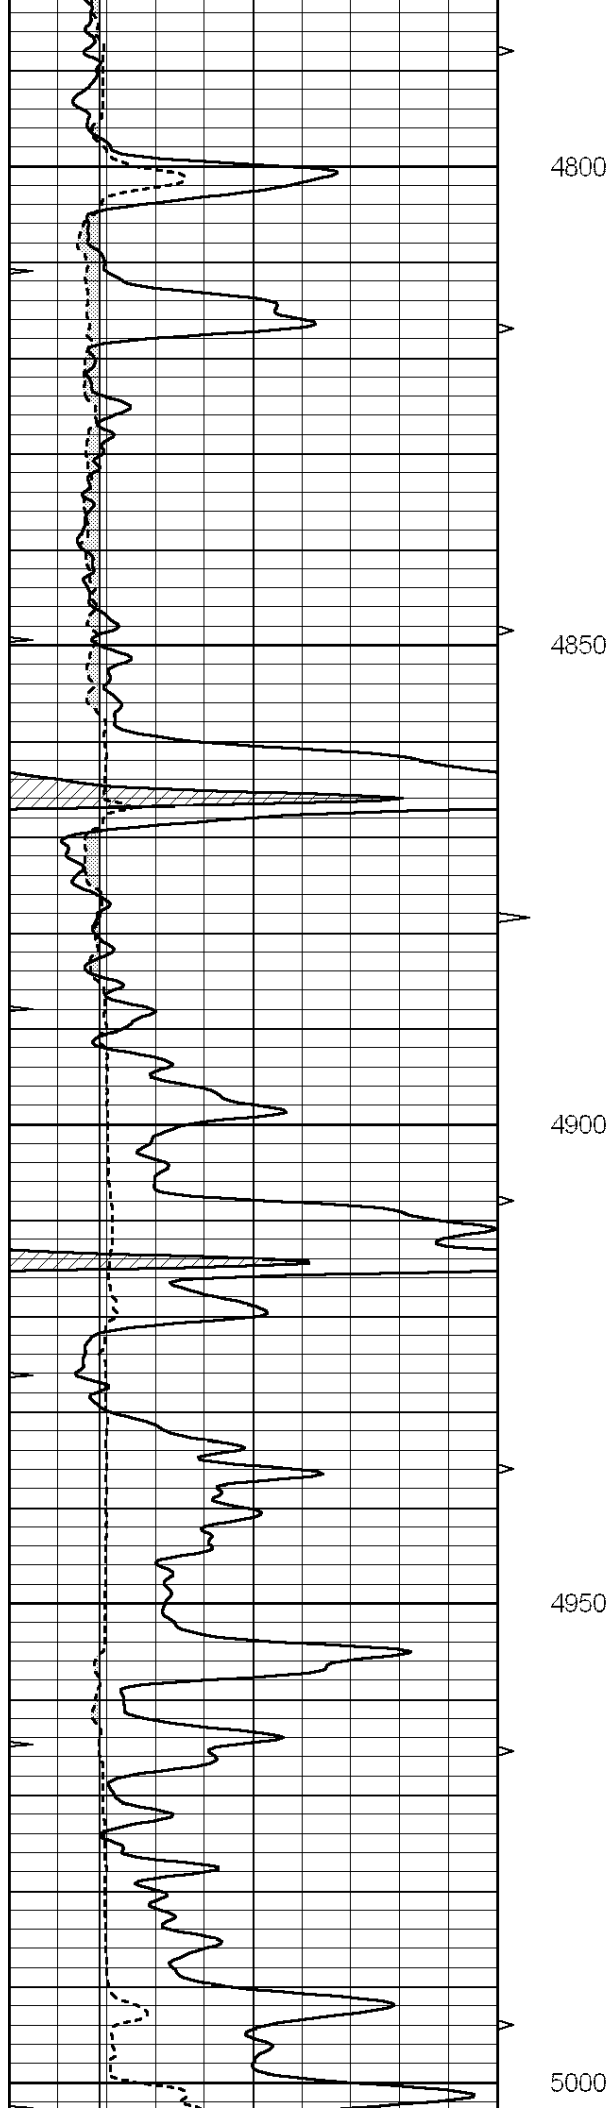

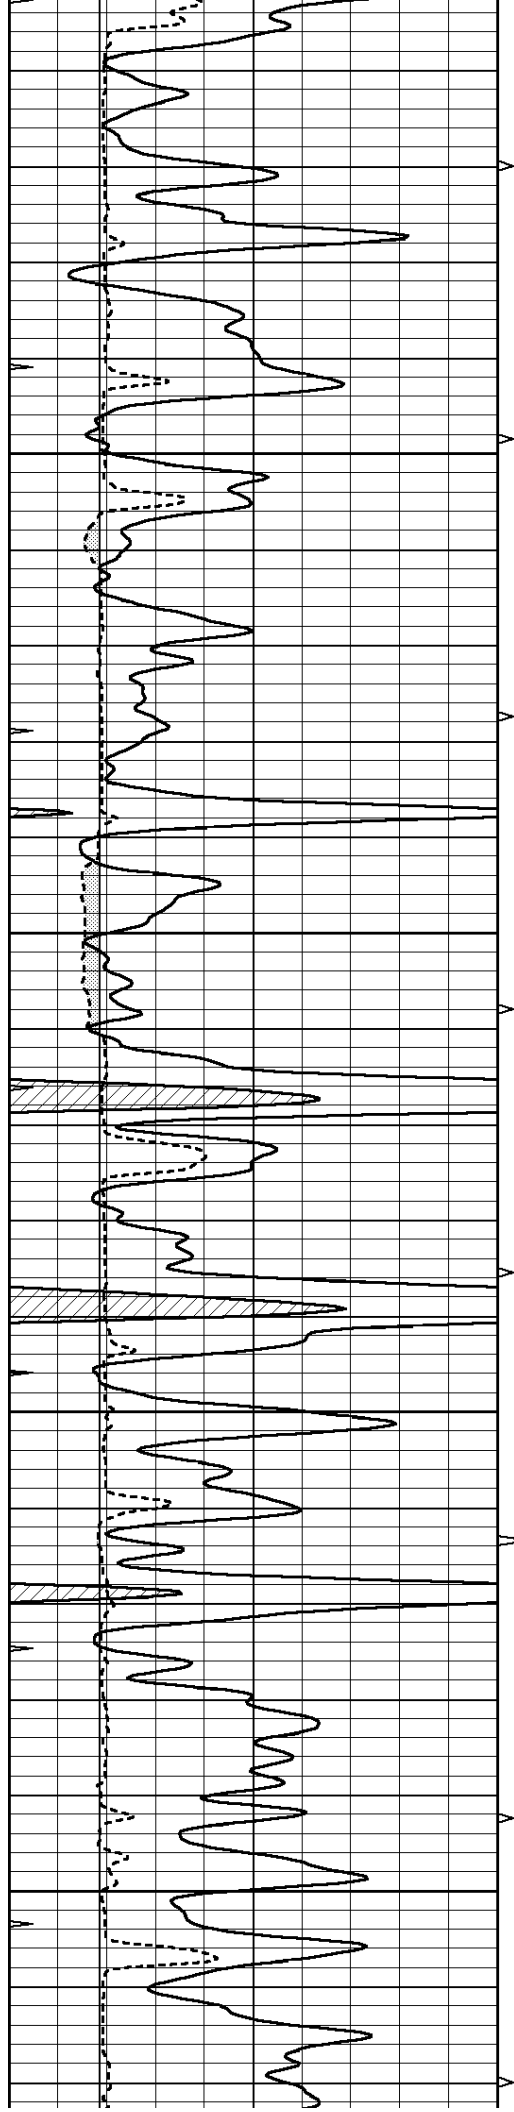



5050

5100

5150

5200

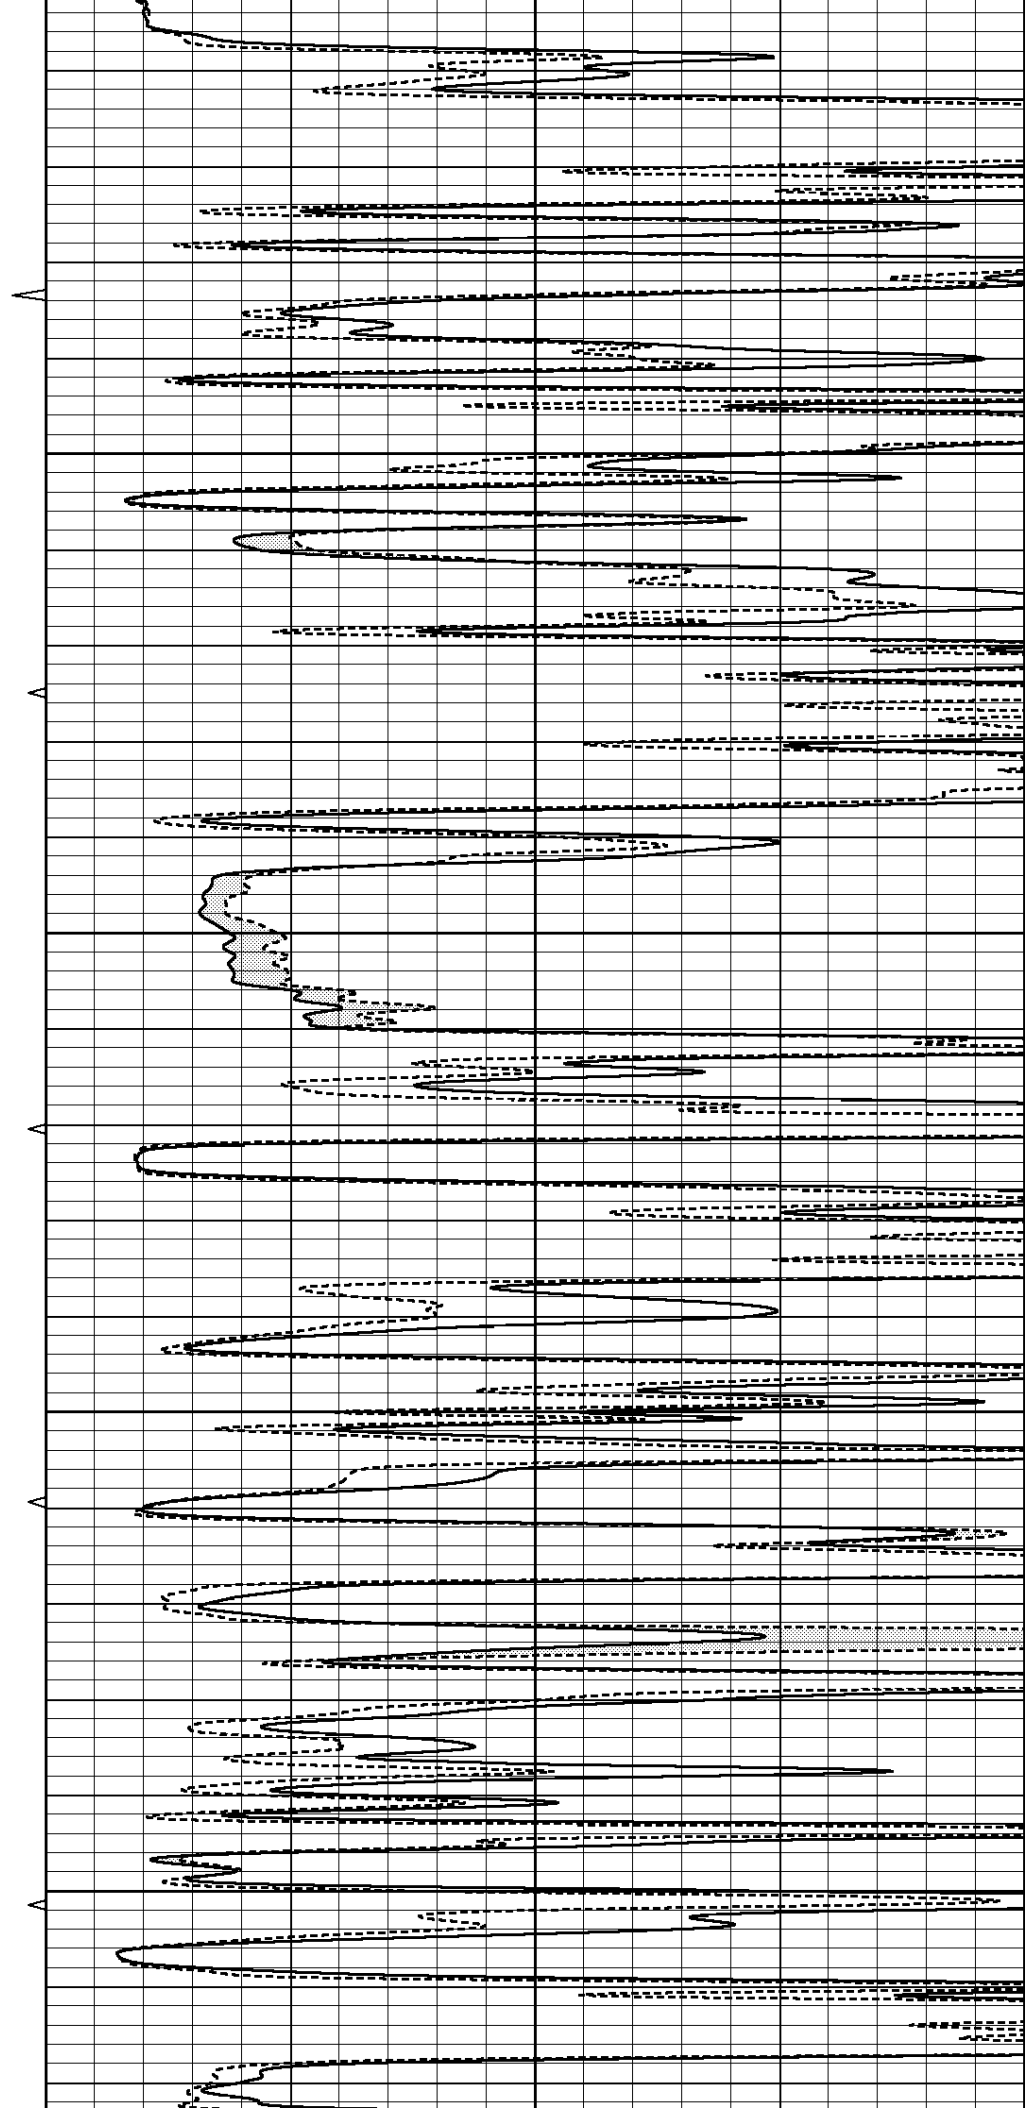

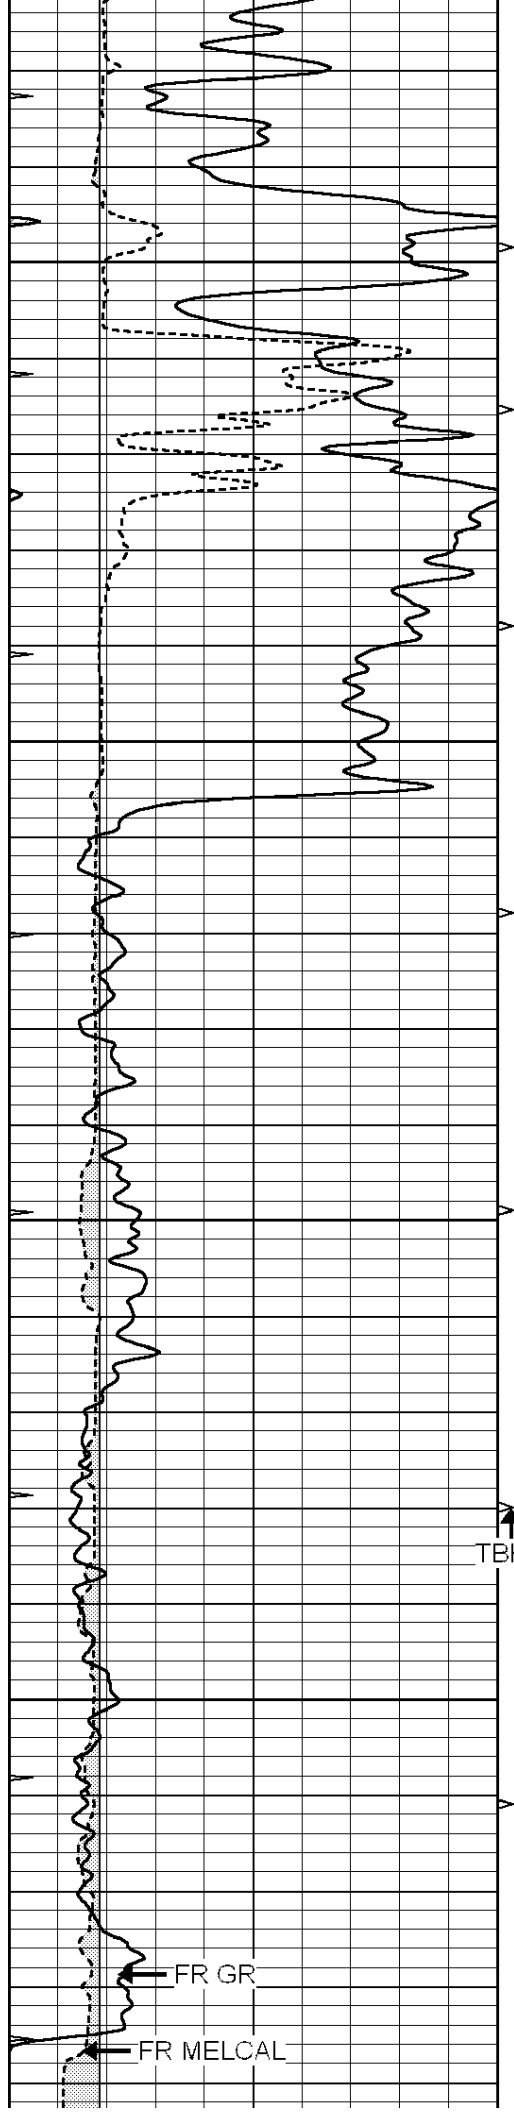

5250

5300

5350 ABHV
4.5" CSG


TBHV

5400

FR GR

FR MELCAL

FR MICRO

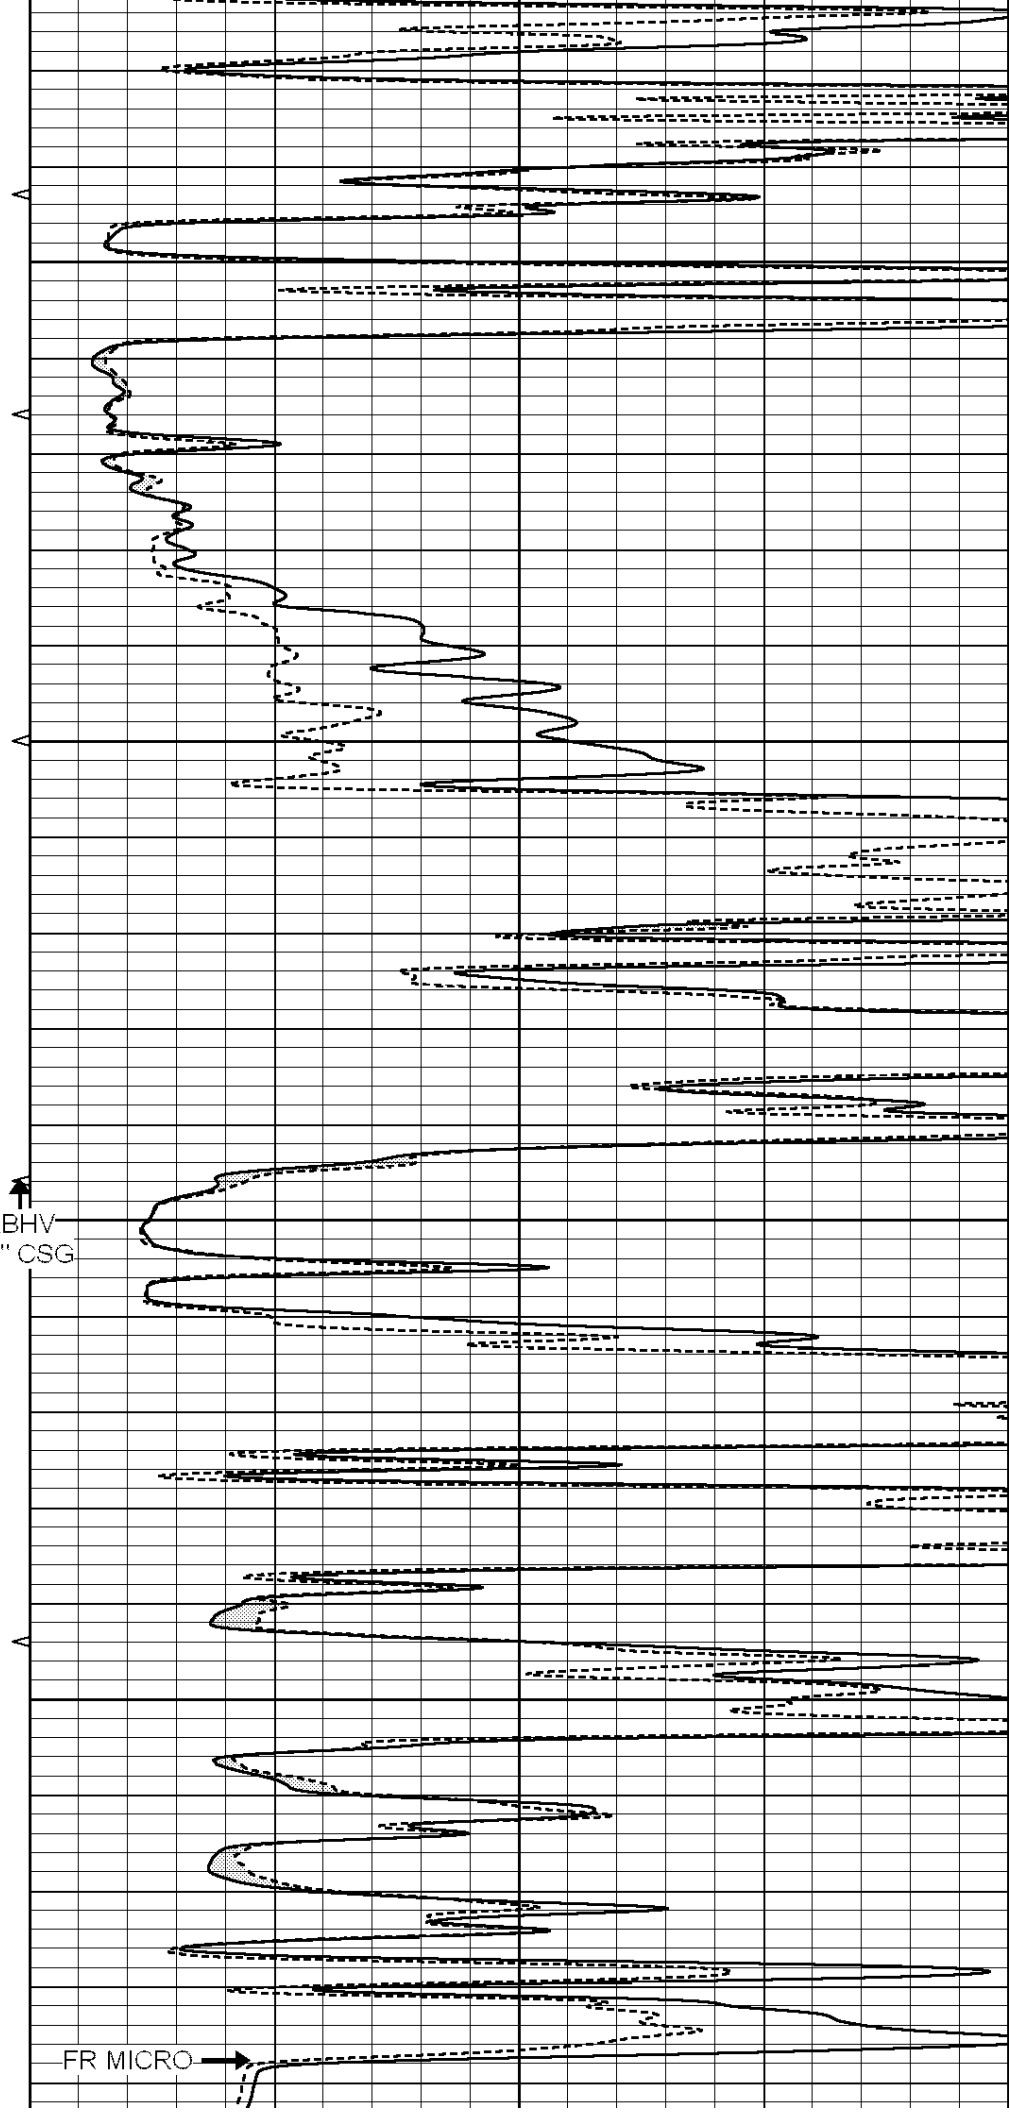

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
0	MINMK	20

5450
LTD 5454

0	MEL1.5 (Ohm-m)	20
0	MEL2.0 (Ohm-m)	20




SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 006309pe.db
Dataset Pathname: pass5.1
Presentation Format: micro
Dataset Creation: Sat Dec 11 14:48:31 2010 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
0	MINMK	20


0	MEL1.5 (Ohm-m)	20
0	MEL2.0 (Ohm-m)	20

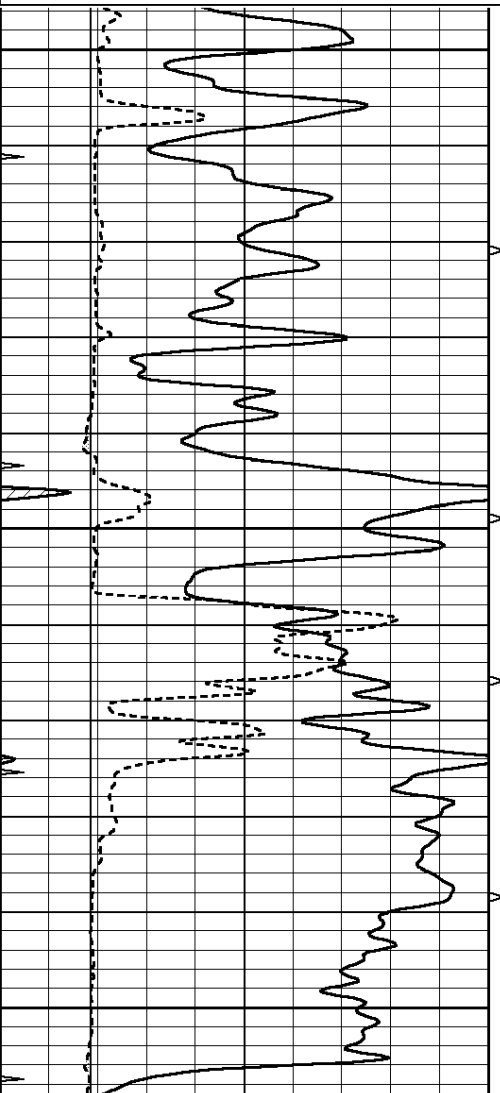


5200

5250

5300

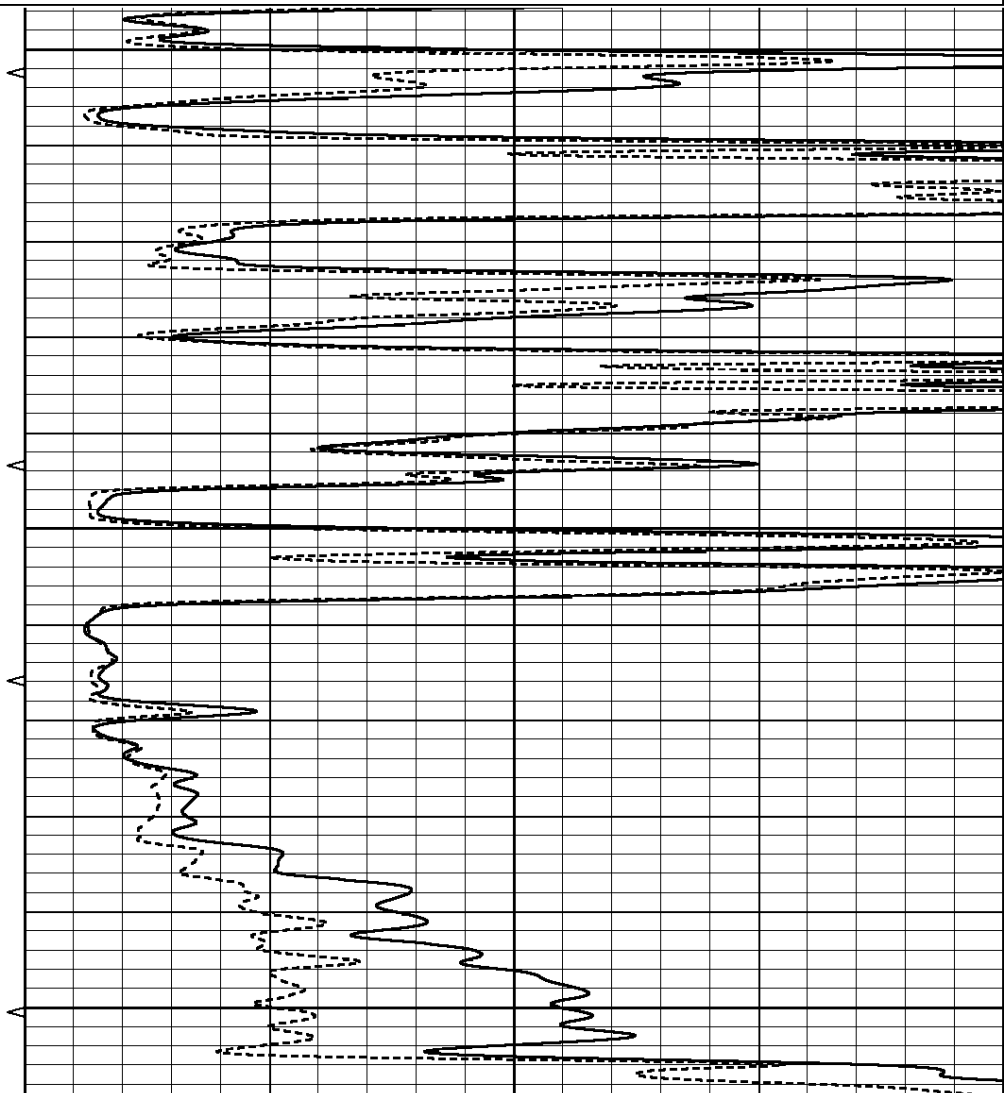

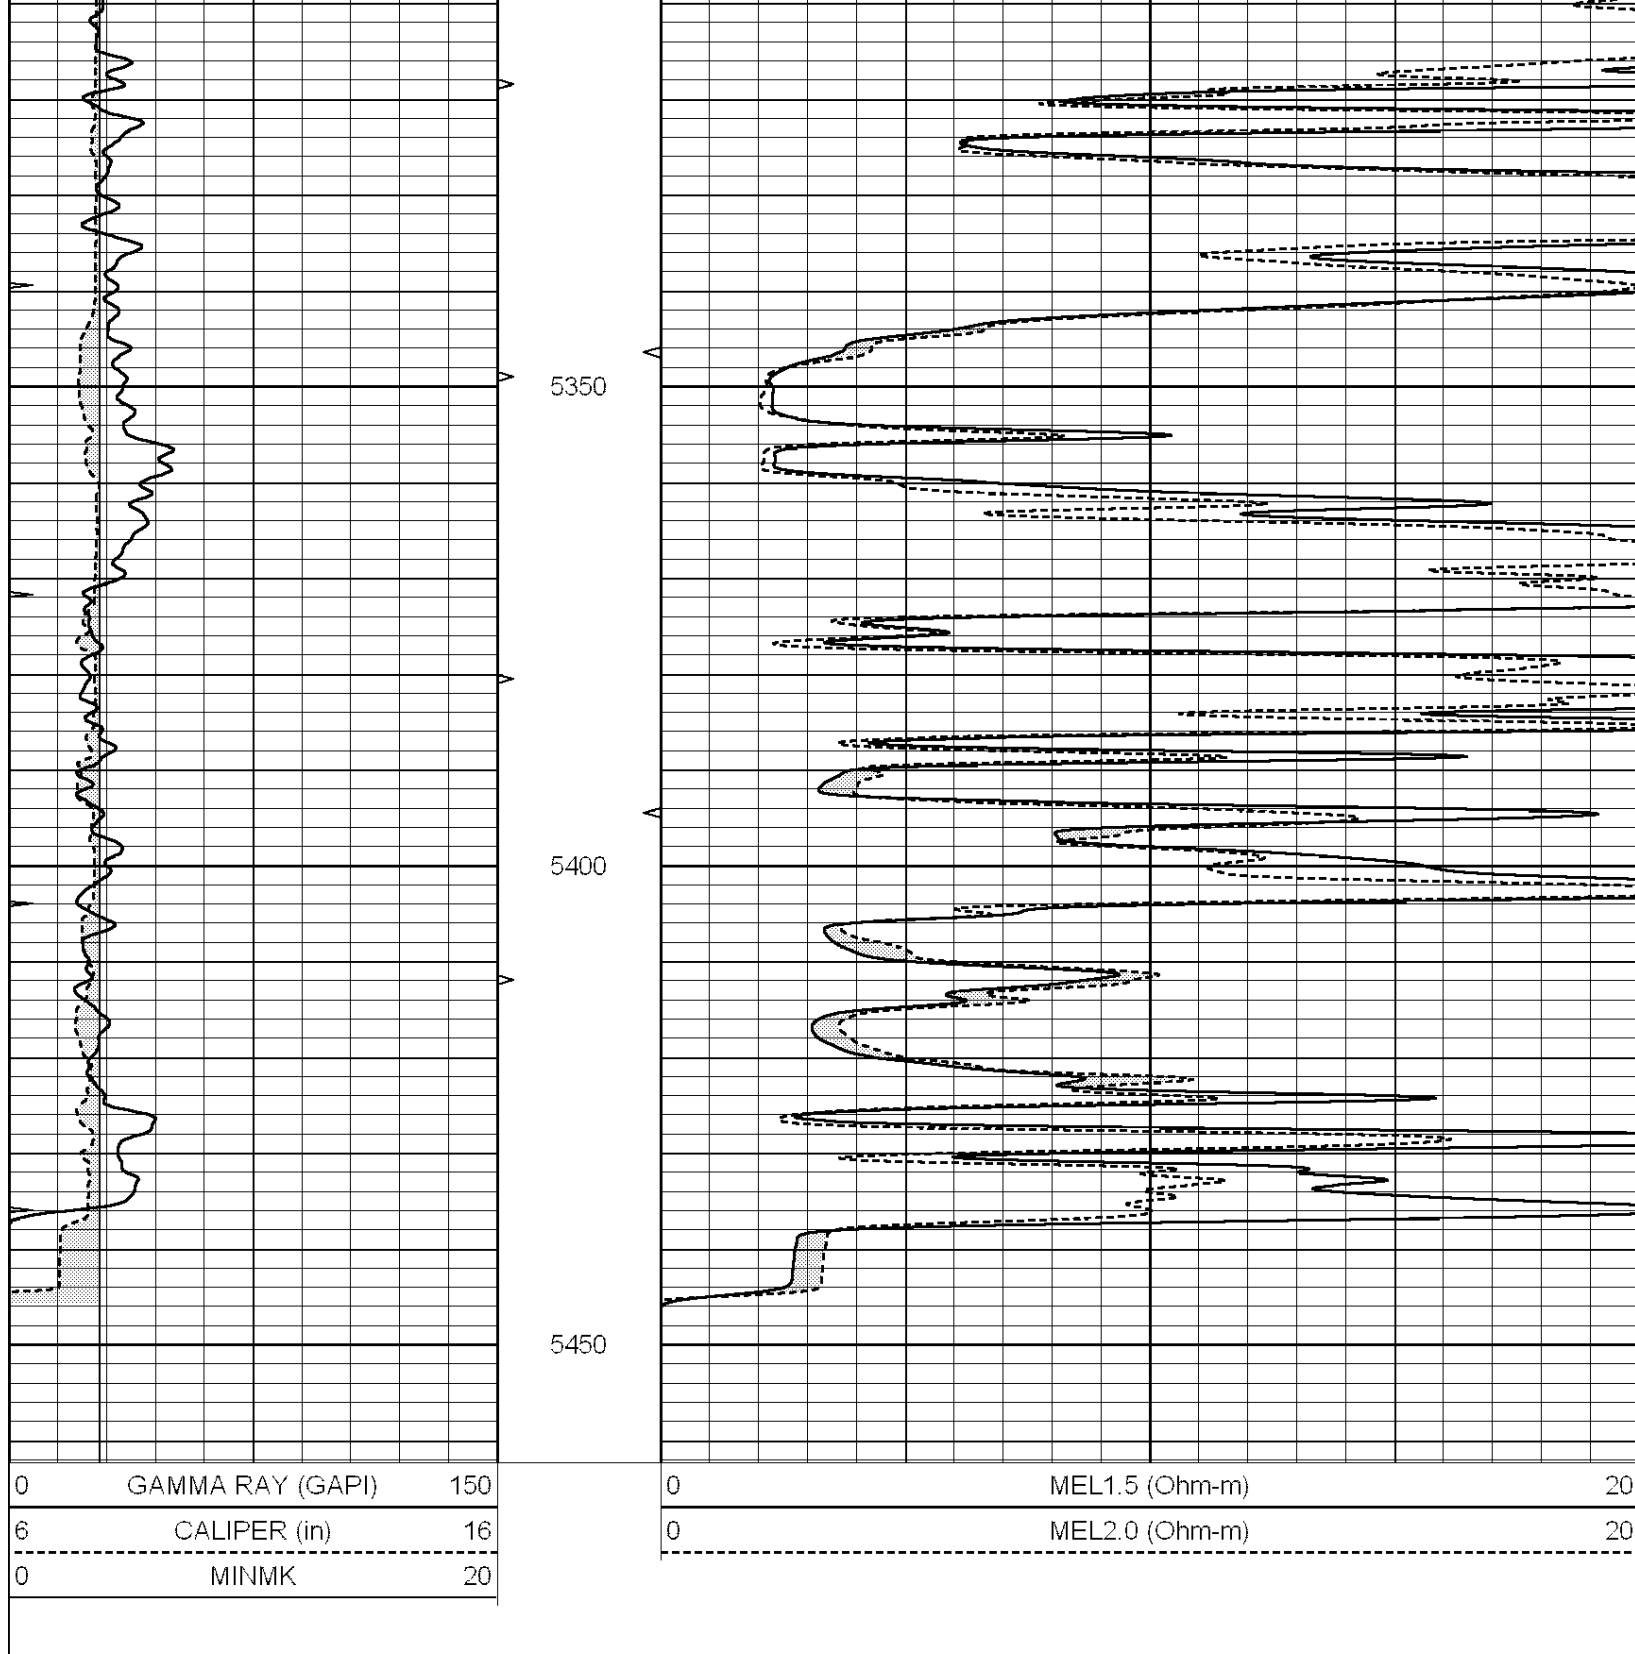

Calibration Report

Database File: 006309pe.db
Dataset Pathname: pass6.1
Dataset Creation: Sat Dec 11 15:27:01 2010 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: Micro1
Tool Model: ProbeL
Performed: Wed Dec 08 20:54:22 2010

Caliper Calibration: Gain=3.275 Offset=-0.458

References	Low Cal	High Cal
Readings	7.000	14.000
	2.277	4.415
1.5" Calibration:	Gain=42.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.003	0.844
2" Calibration:	Gain=35.000	Offset=-0.250
References	Low Cal	High Cal
Readings	0.000	20.000
	0.028	0.817
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Wed Dec 08 21:00:30 2010	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6200	GAPI/cps