



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company American Warrior, Inc.		
15-159-22,637-00-00	Well Link No.2-13		
	Field Chase-Silica		
	County Rice	State	Kansas
	Location NW/SE NE SE 1850' FSL & 500' FEL	Other Services CNL/CDL DIL	
	Sec: 13	Twp: 19S	Rge: 10W
Permanent Datum	Ground Level	Elevation 1742	
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 1750 D.F. 1742 G.L. 1742	
Date	2/21/2010		
Run Number	Two		
Depth Driller	3380		
Depth Logger	3378		
Bottom Logged Interval	3377		
Top Log Interval	2600		
Casing Driller	8.625 @ 313		
Casing Logger	307		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	6.700		
Density / Viscosity	9.3 49		
pH / Fluid Loss	11.0 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	.7 @ 58		
Rmf @ Meas. Temp	.53 @ 58		
Rmc @ Meas. Temp	.95 @ 58		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.36 @ 112		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	112		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desaire		
Witnessed By	Jim Musgrove		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Chase KS,
3 N, 1 W, 1/2 N, W Into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

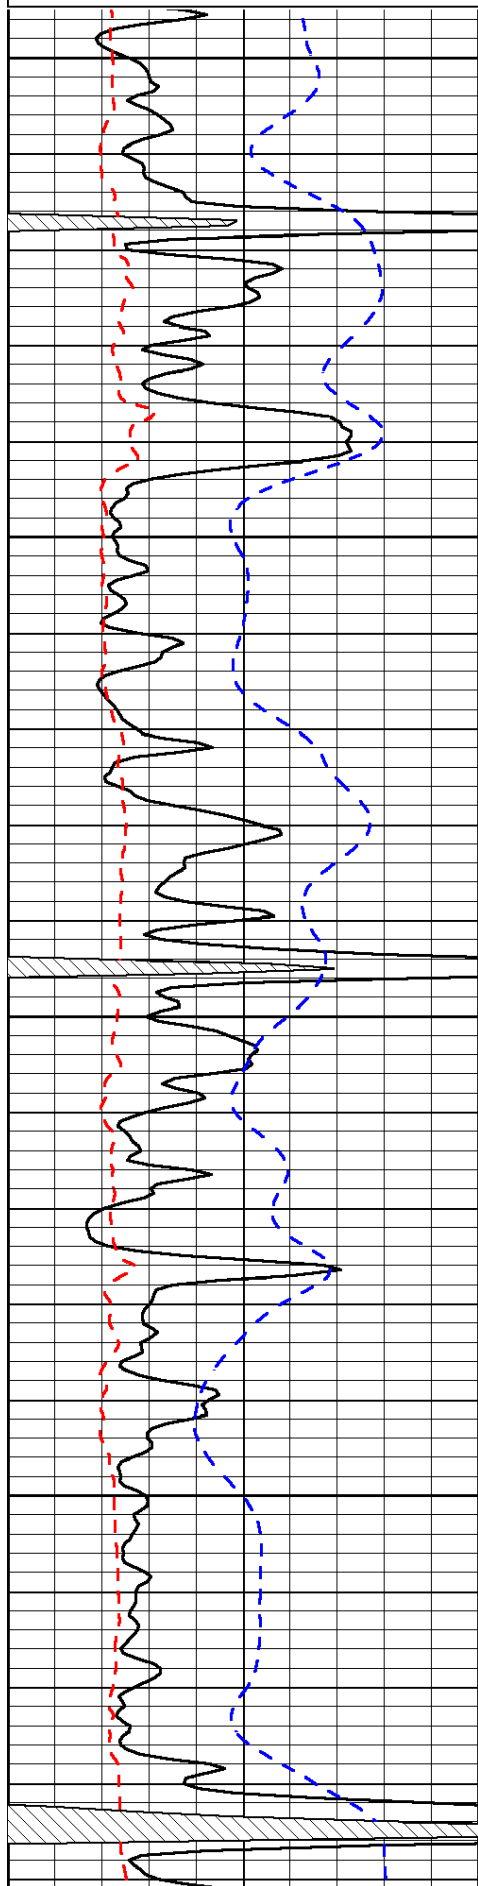

2600


2650

2700

2750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD


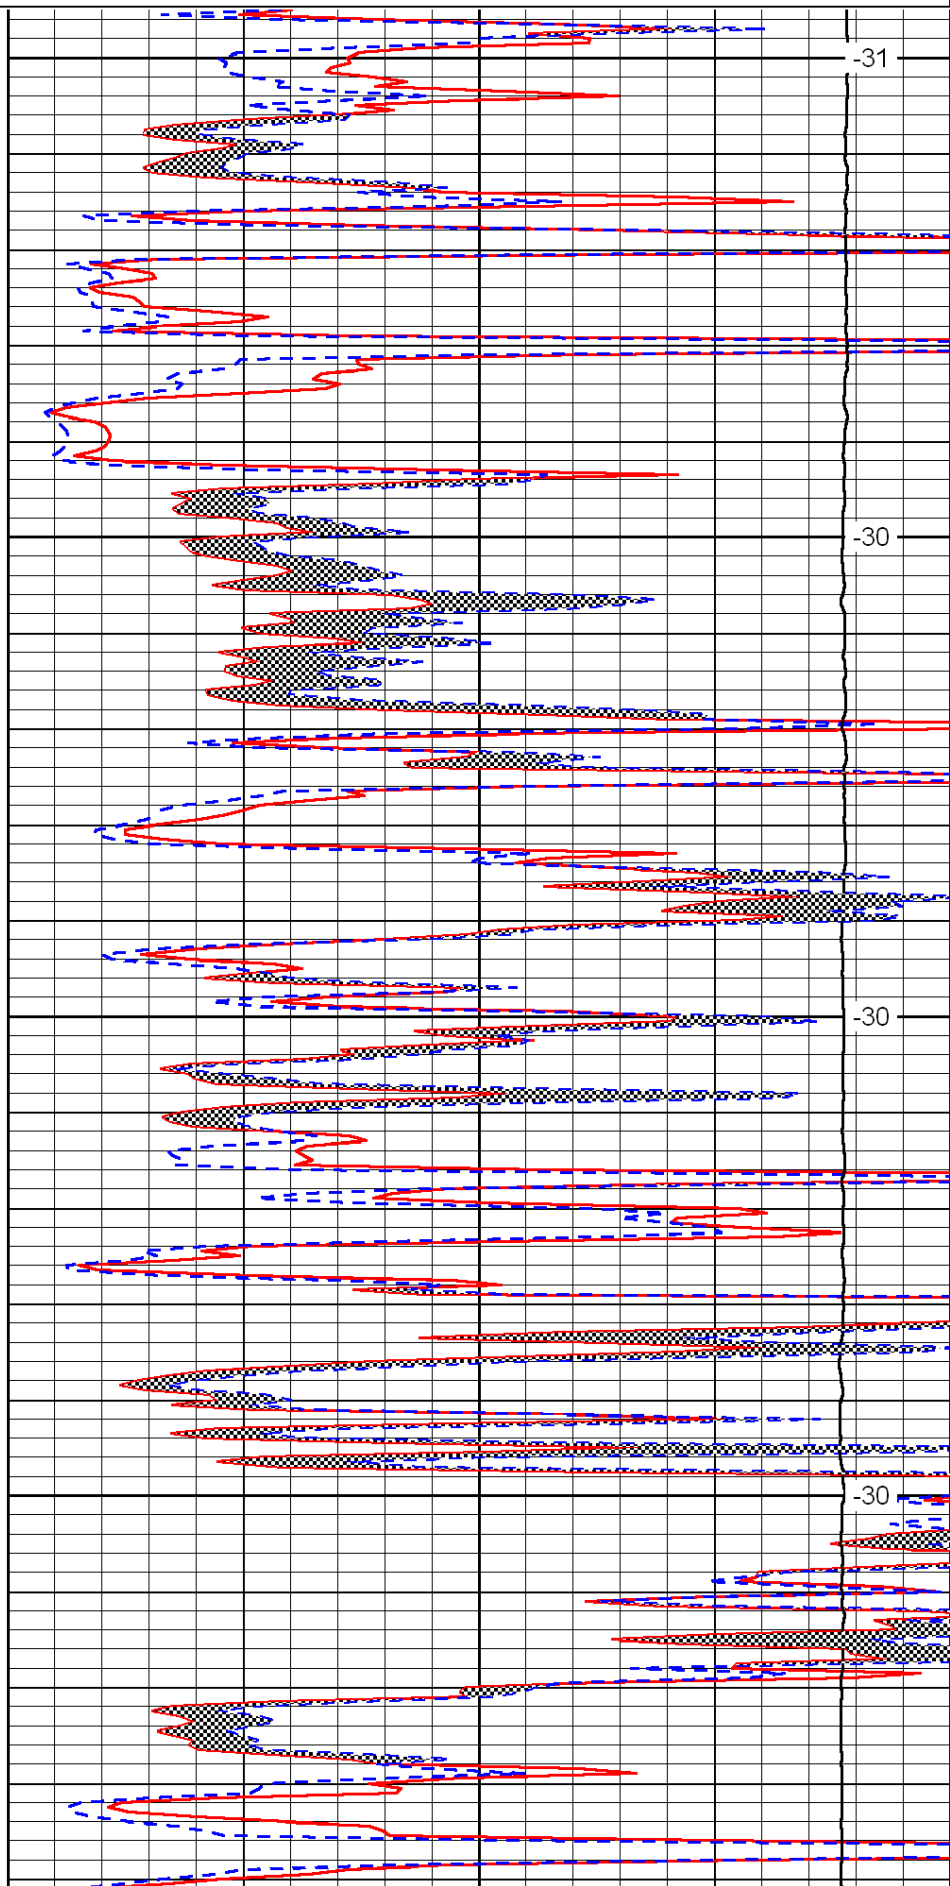



-31

-30

-30

-30

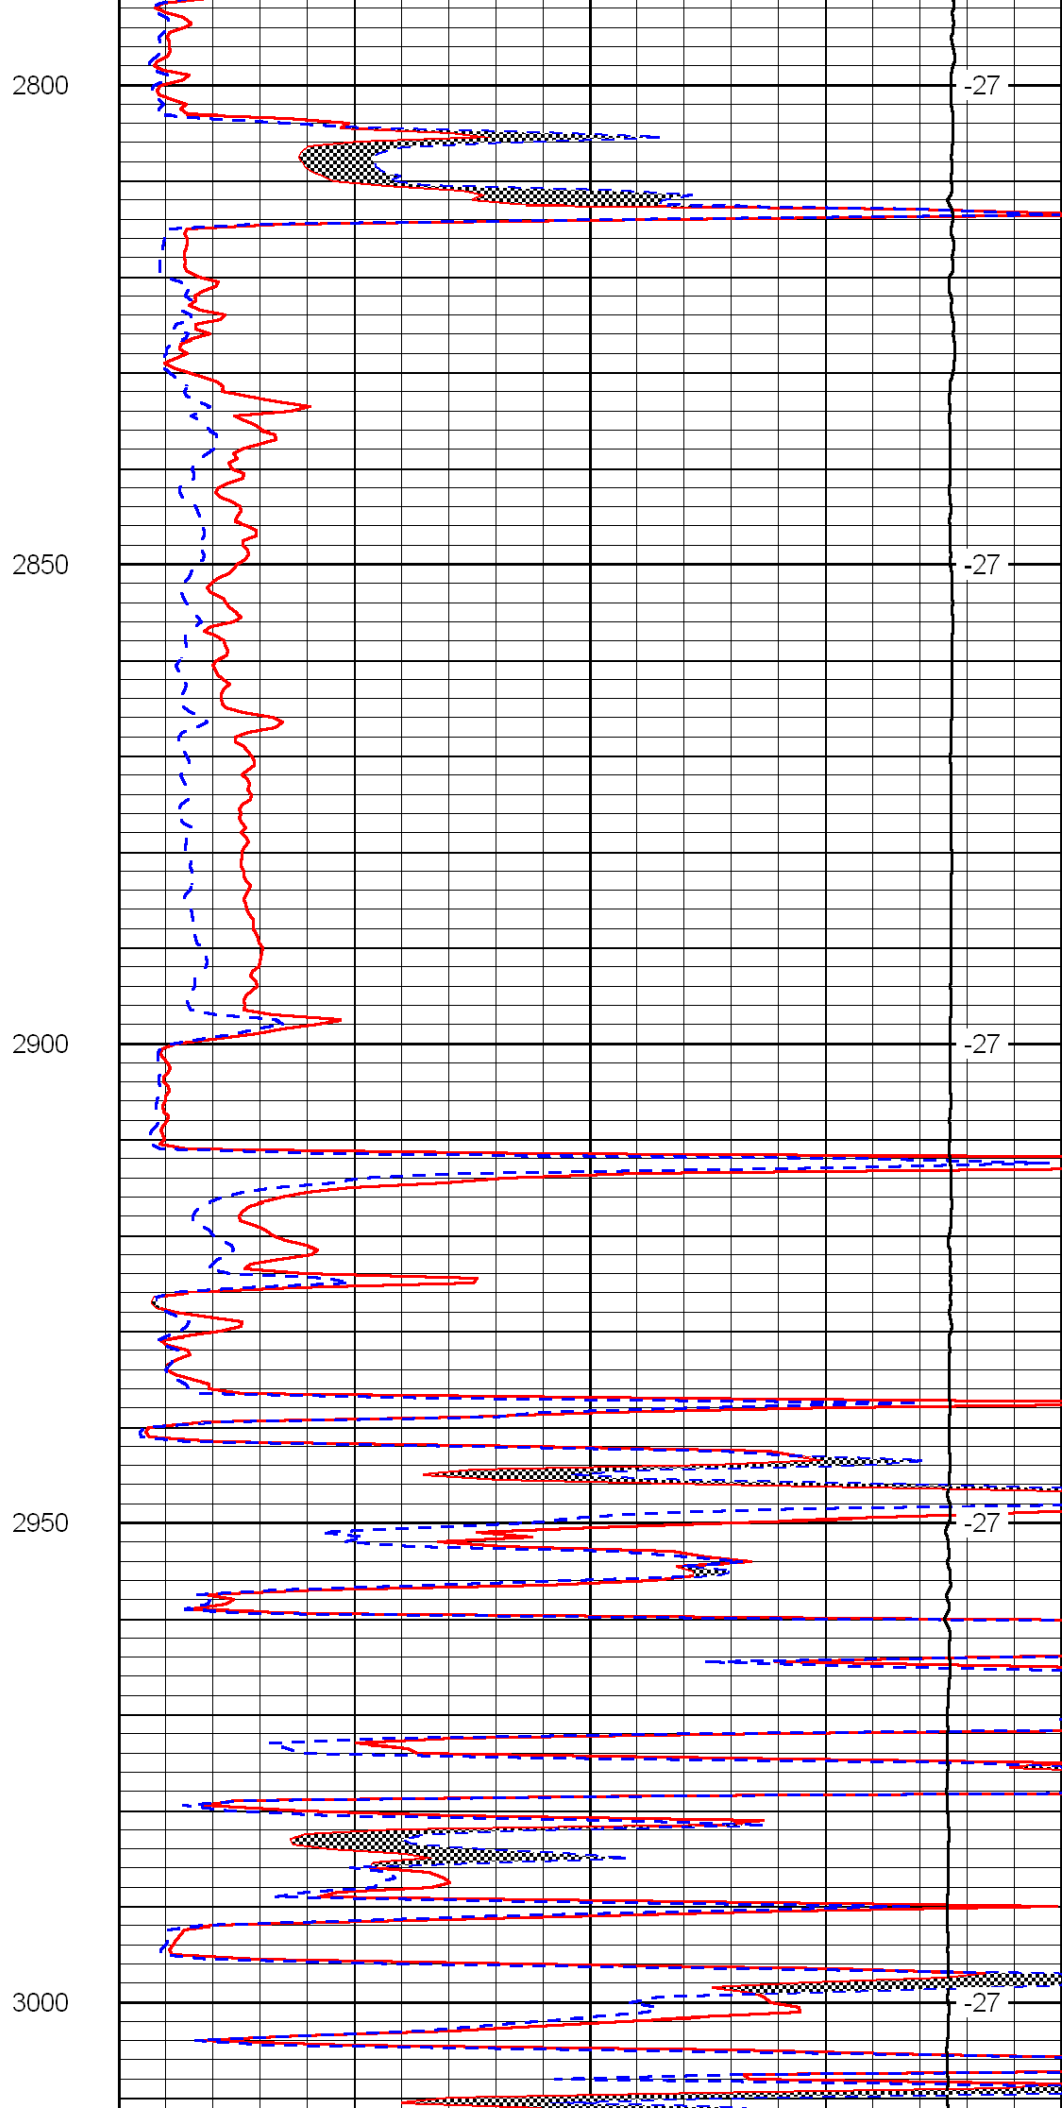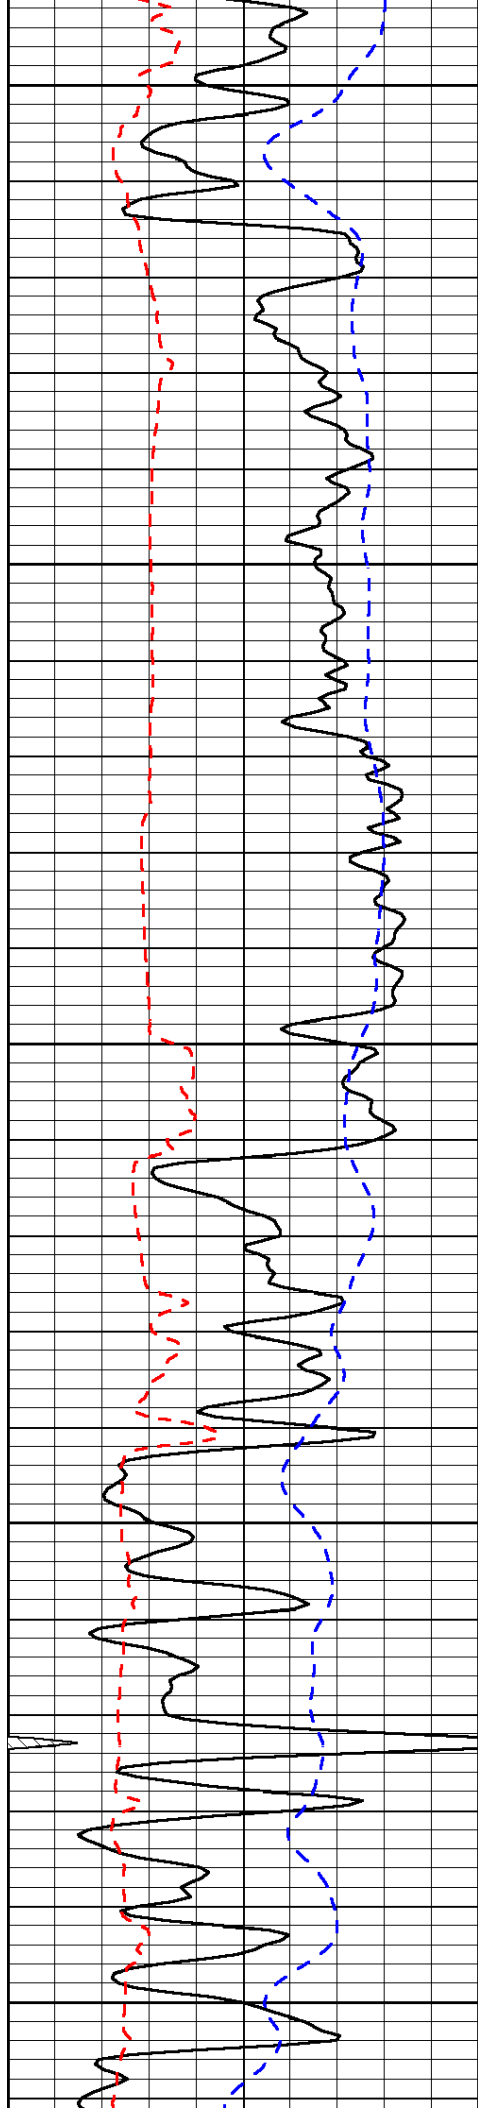

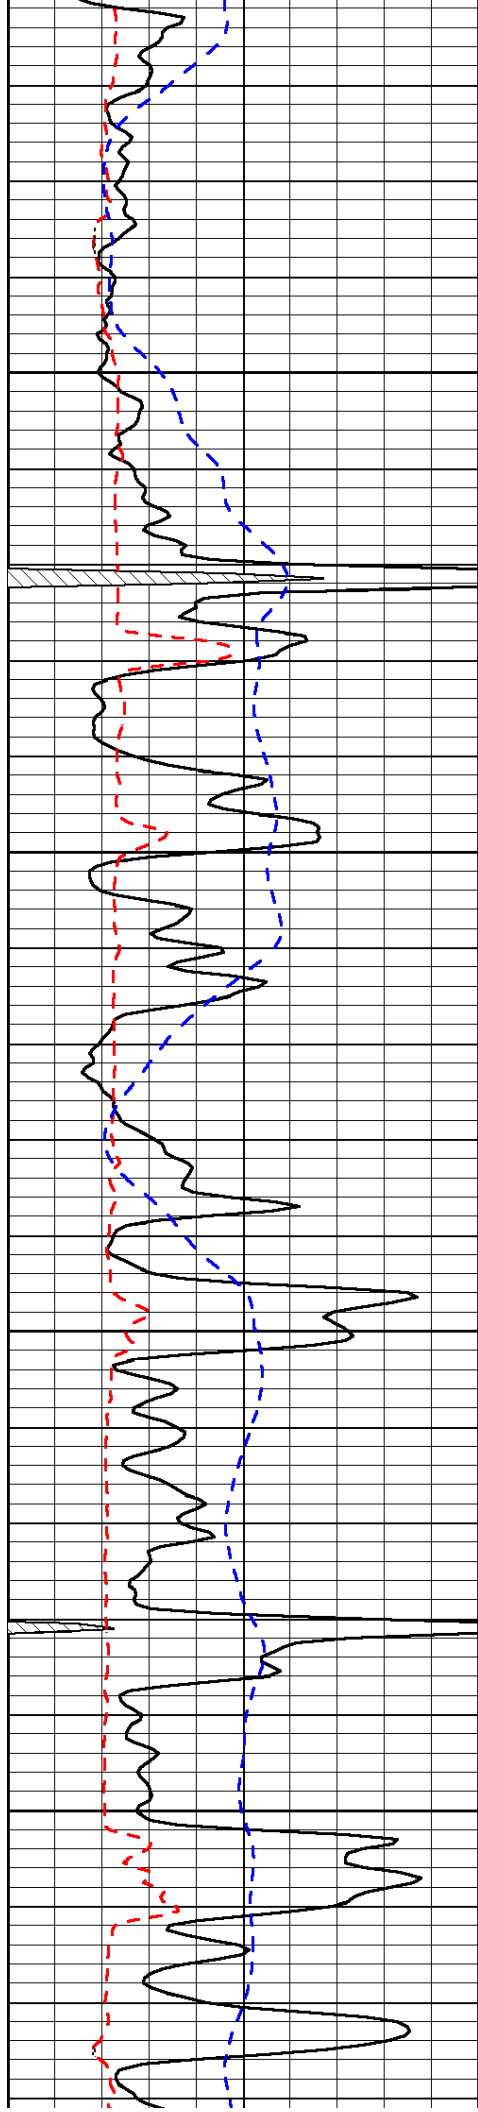




3050

3100

3150

3200

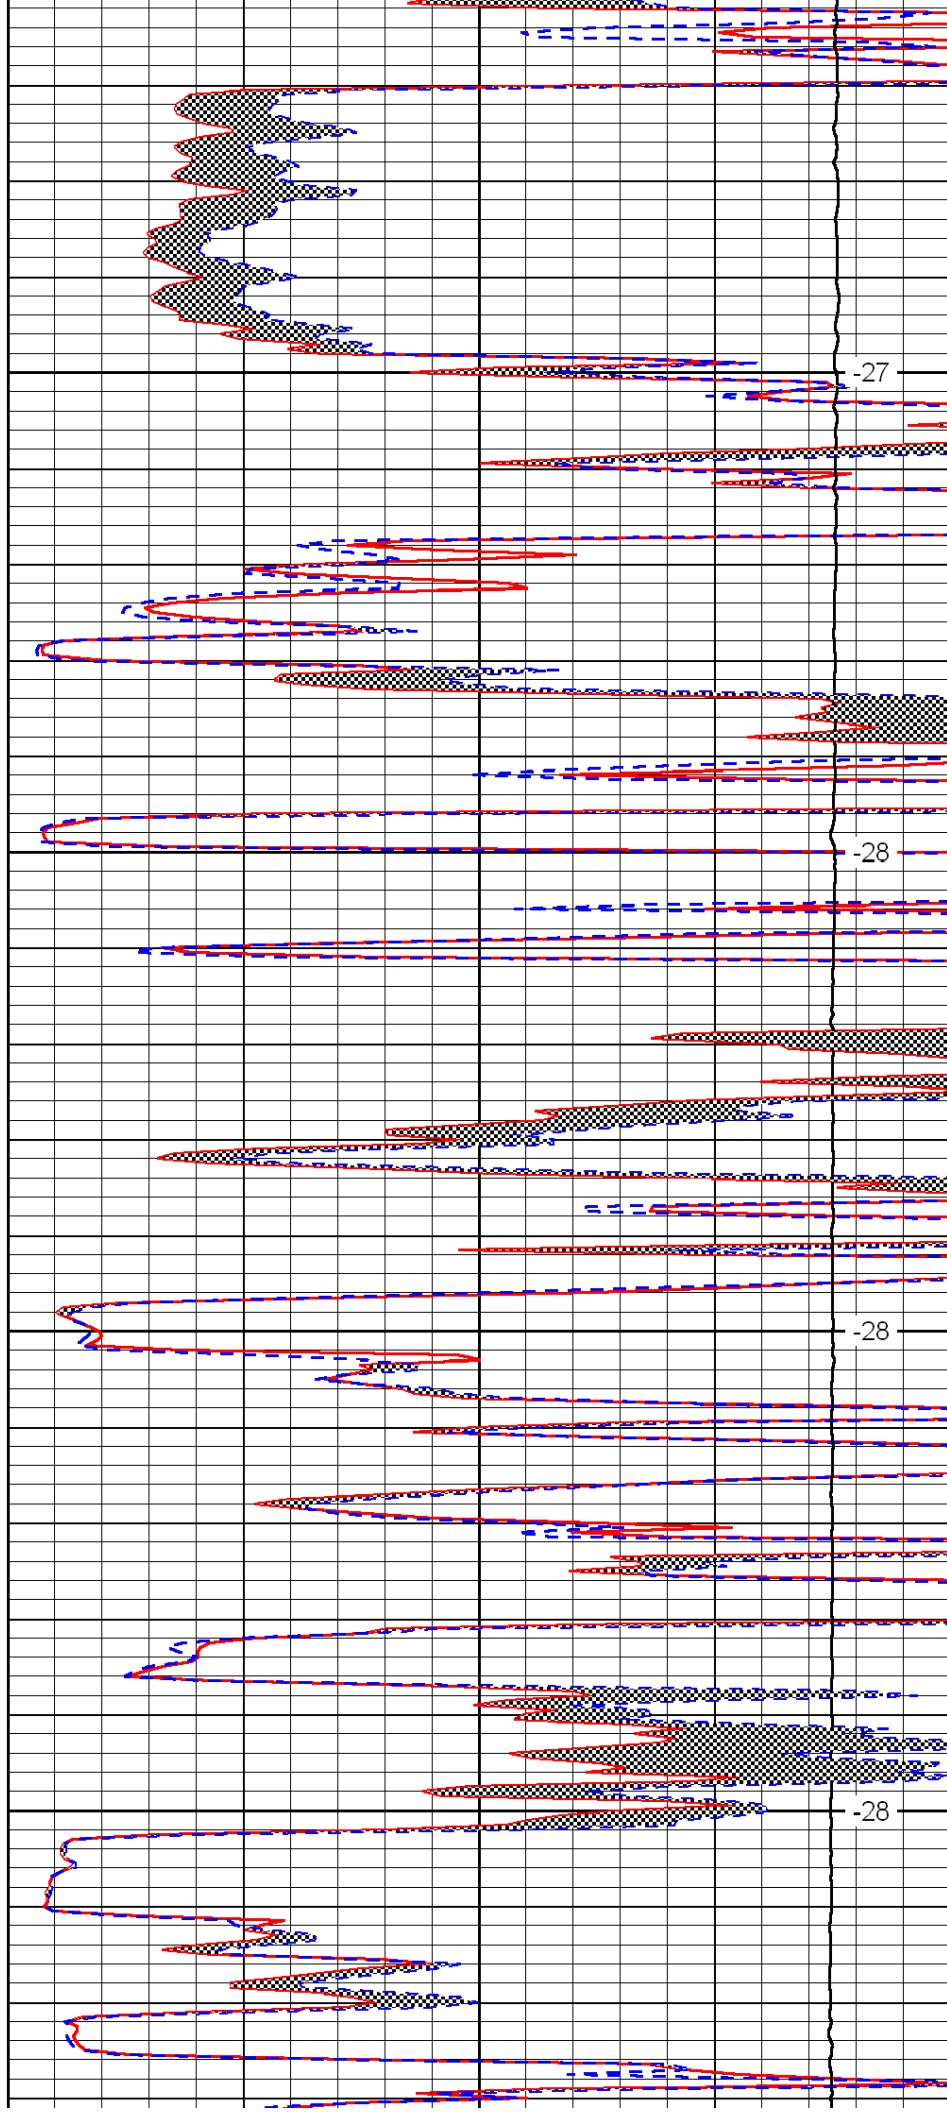

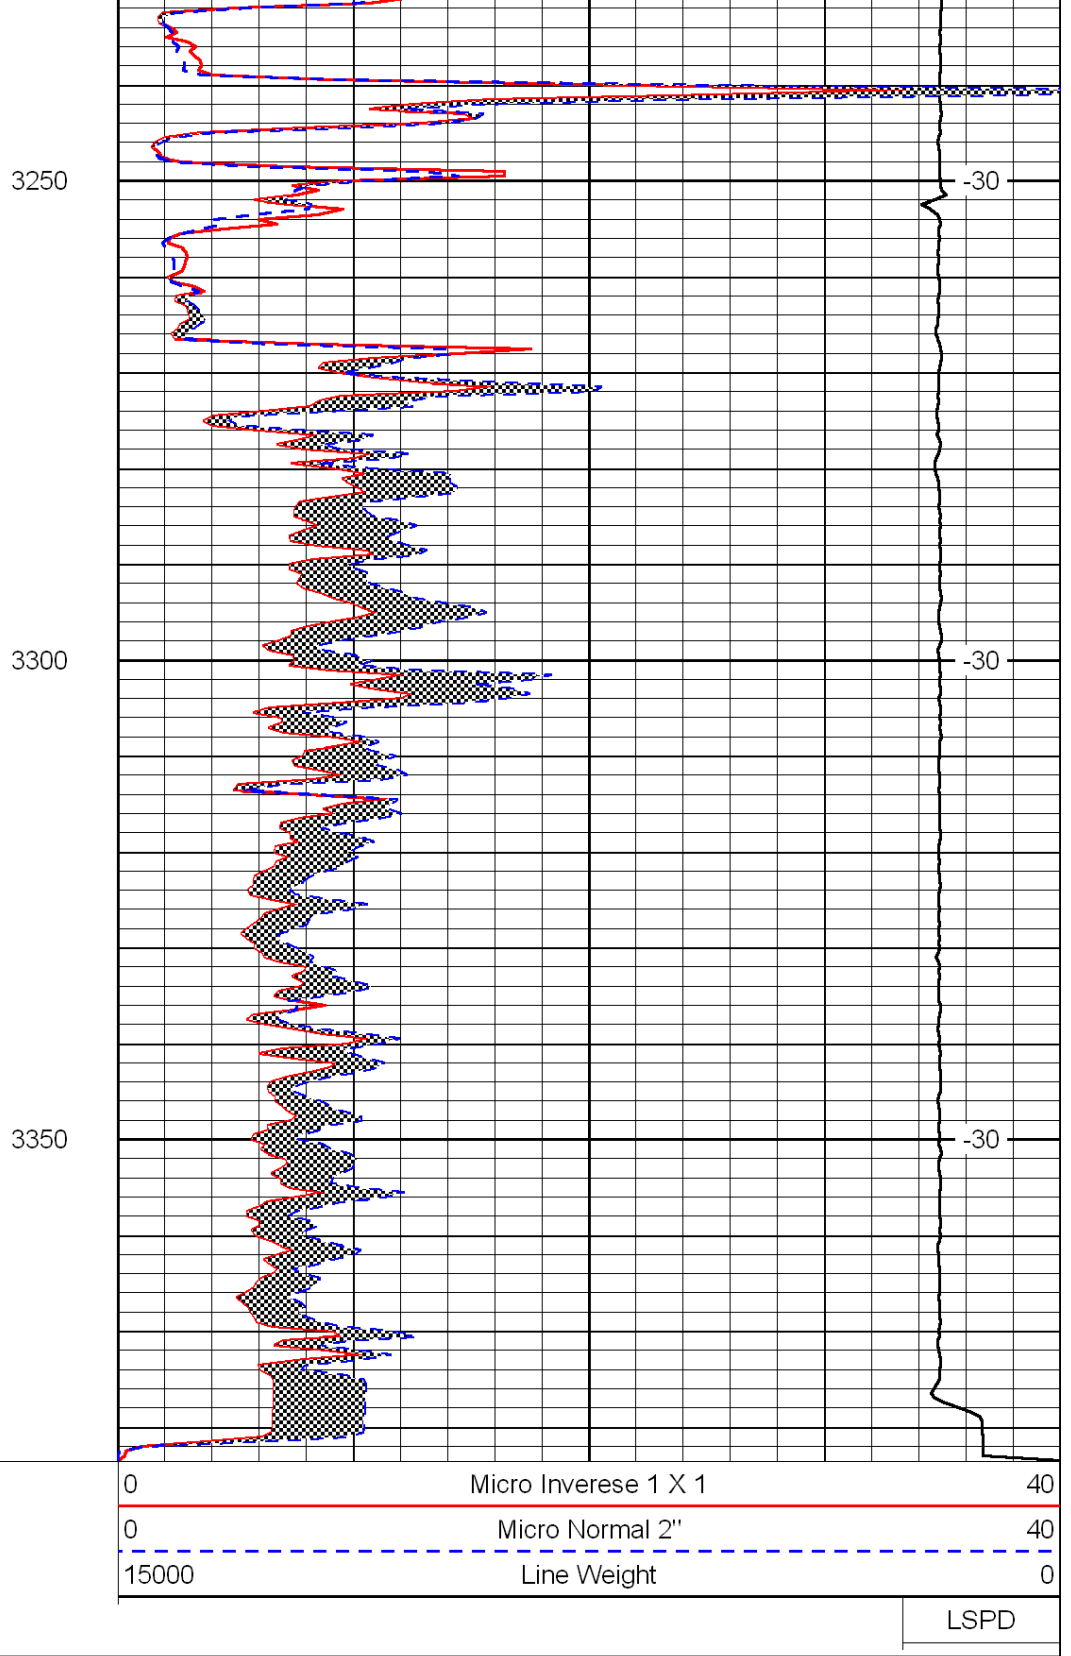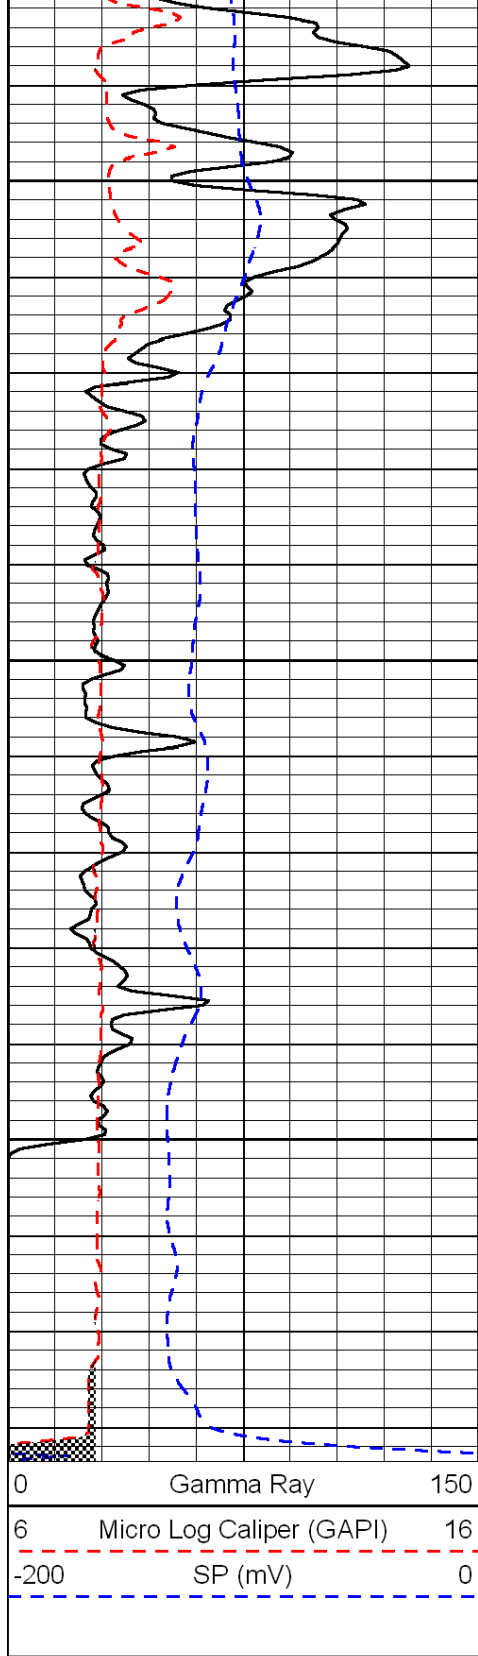

LSPD