

LOG-TECH



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.	Company Credo Petroleum Corporation		
15-171-20,783-00-00	Well BJH No. 1-5		
	Field Unknown		
	County Scott	State	Kansas
	Location NE - SE - NE - SW 1850' FSL & 2635' FWL	Other Services CNL/CDL MEL/BHCS	
	Sec: 5 Twp: 17 W Rge: 31 S	Elevation	
Permanent Datum	Ground Level	Elevation 2950	
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 2955 D.F. 2950 G.L. 2950	
Date	10/30/2010		
Run Number	One		
Depth Driller	4720		
Depth Logger	4721		
Bottom Logged Interval	4720		
Top Log Interval	200		
Casing Driller	8.625 @ 248		
Casing Logger	244		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4600		
Density / Viscosity	9.2 51		
pH / Fluid Loss	10.0 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.70 @ 60		
Rmf @ Meas. Temp	1.28 @ 60		
Rmc @ Meas. Temp	2.30 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.83 @ 123		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	123		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Don Guy		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858




Healy, Ks; 8-1/2 West;
North into location from Hwy 4




Database File: credohd.db
Dataset Pathname: DIL/credo
Presentation Format: dil2in
Dataset Creation: Sat Oct 30 09:12:58 2010
Charted by: Depth in Feet scaled 1:600




0	Gamma Ray	150
-200	SP	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500



LSPD

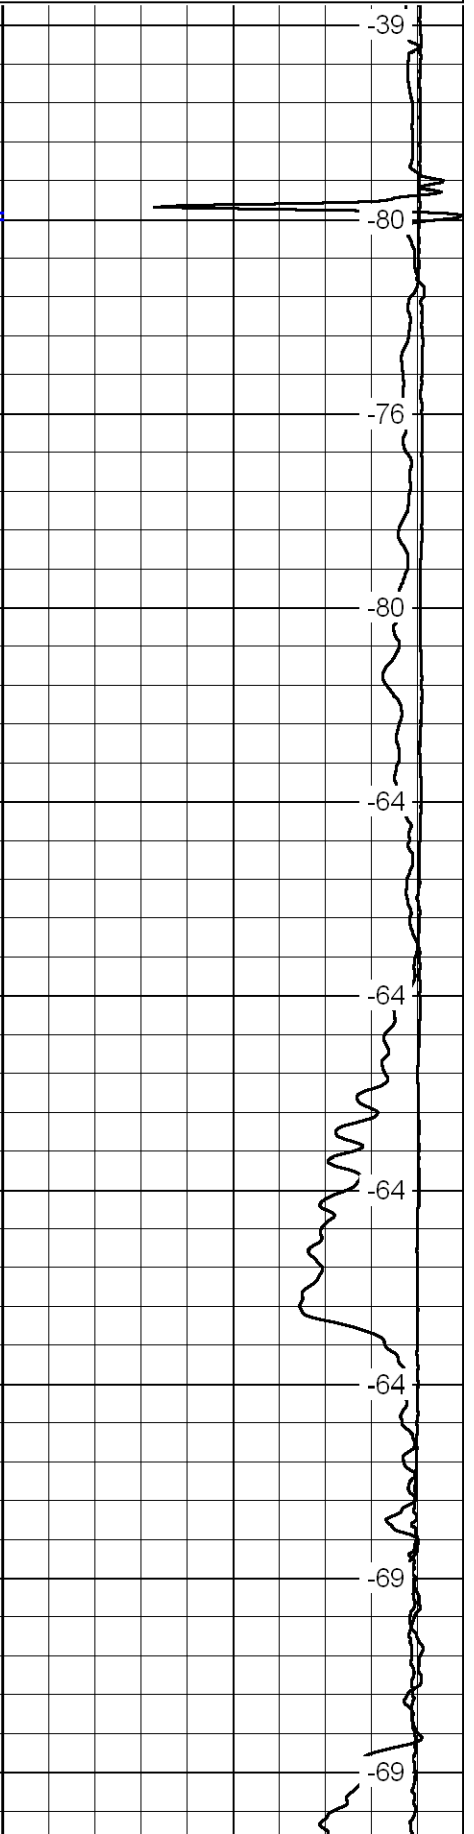
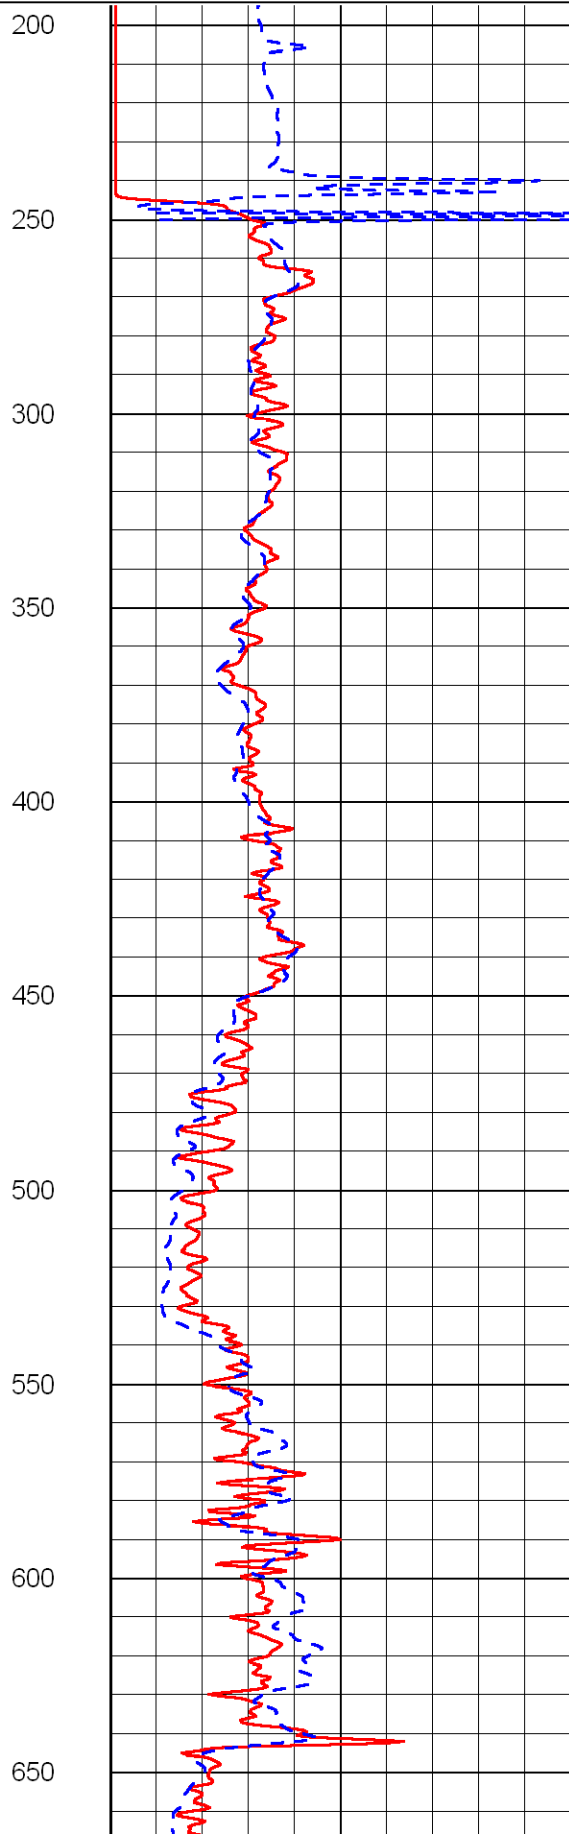
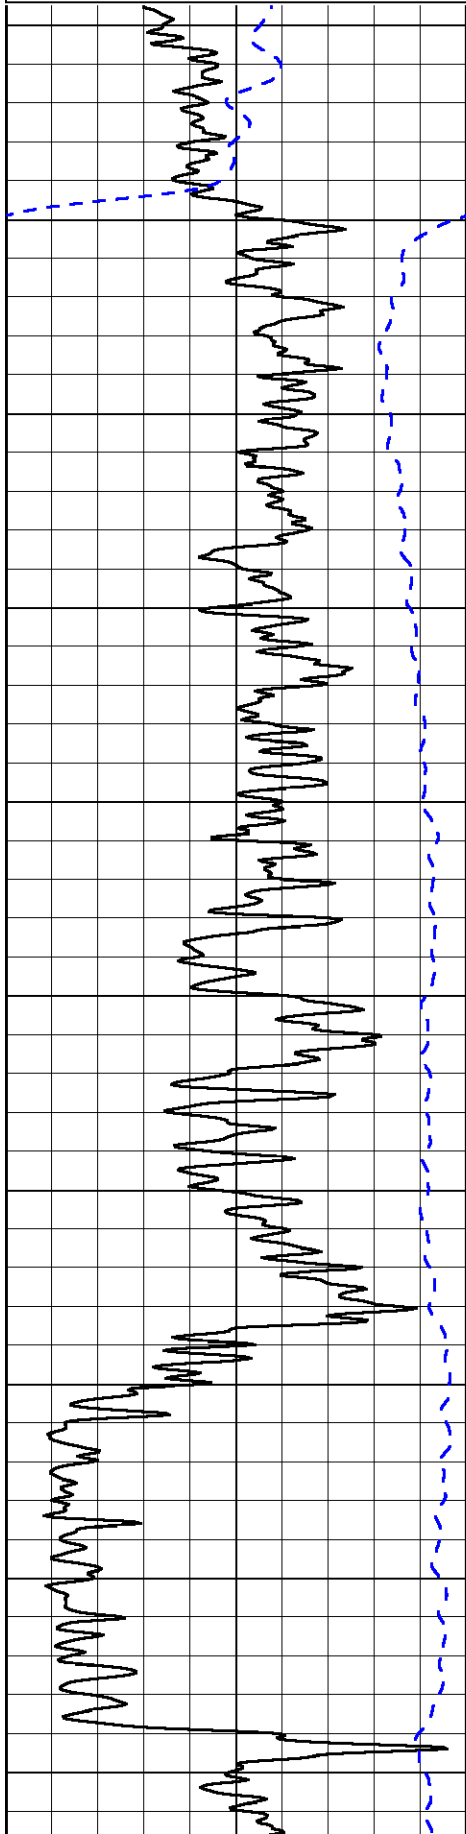


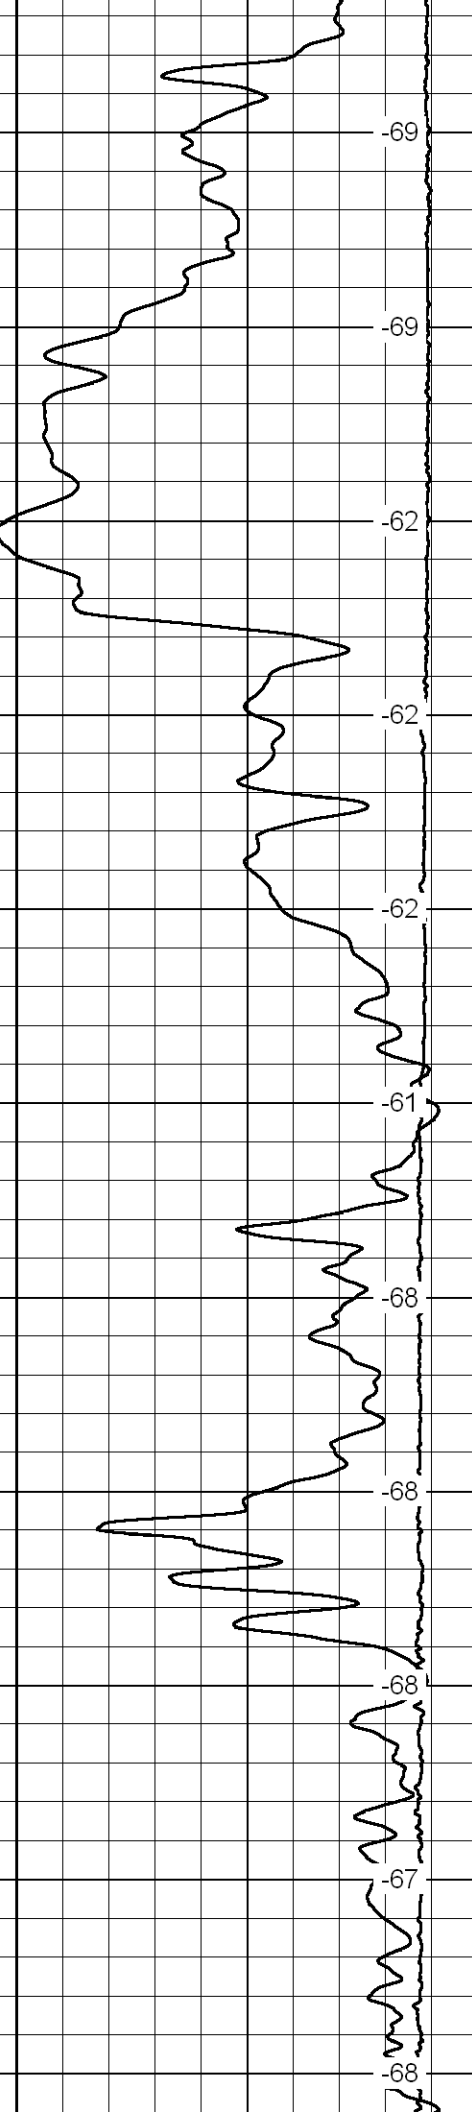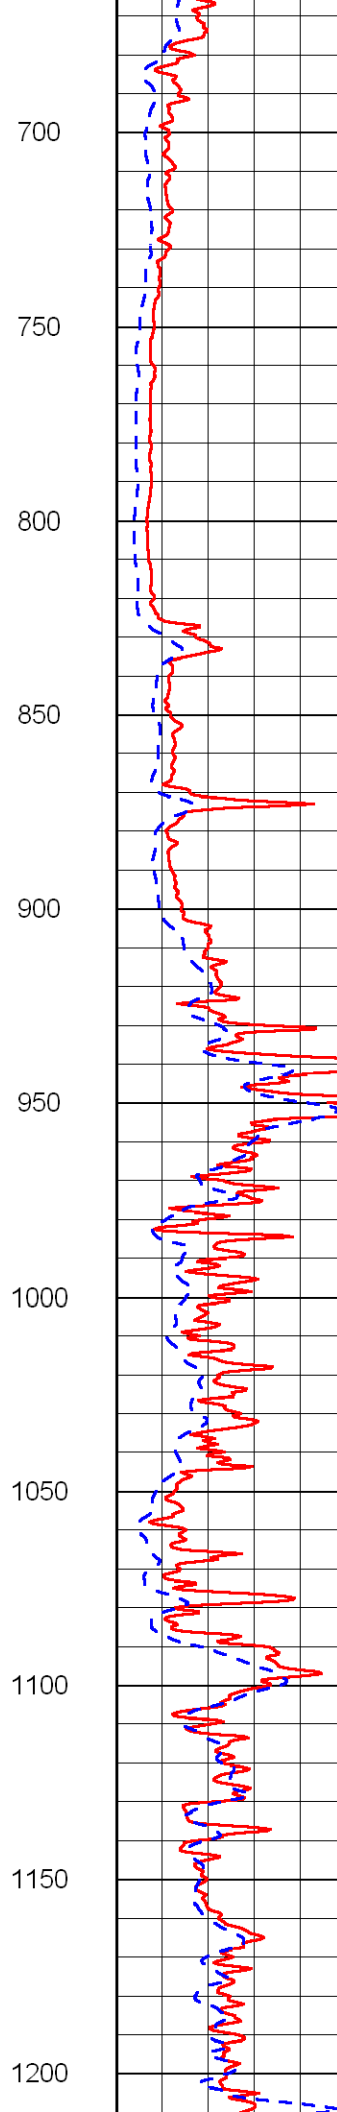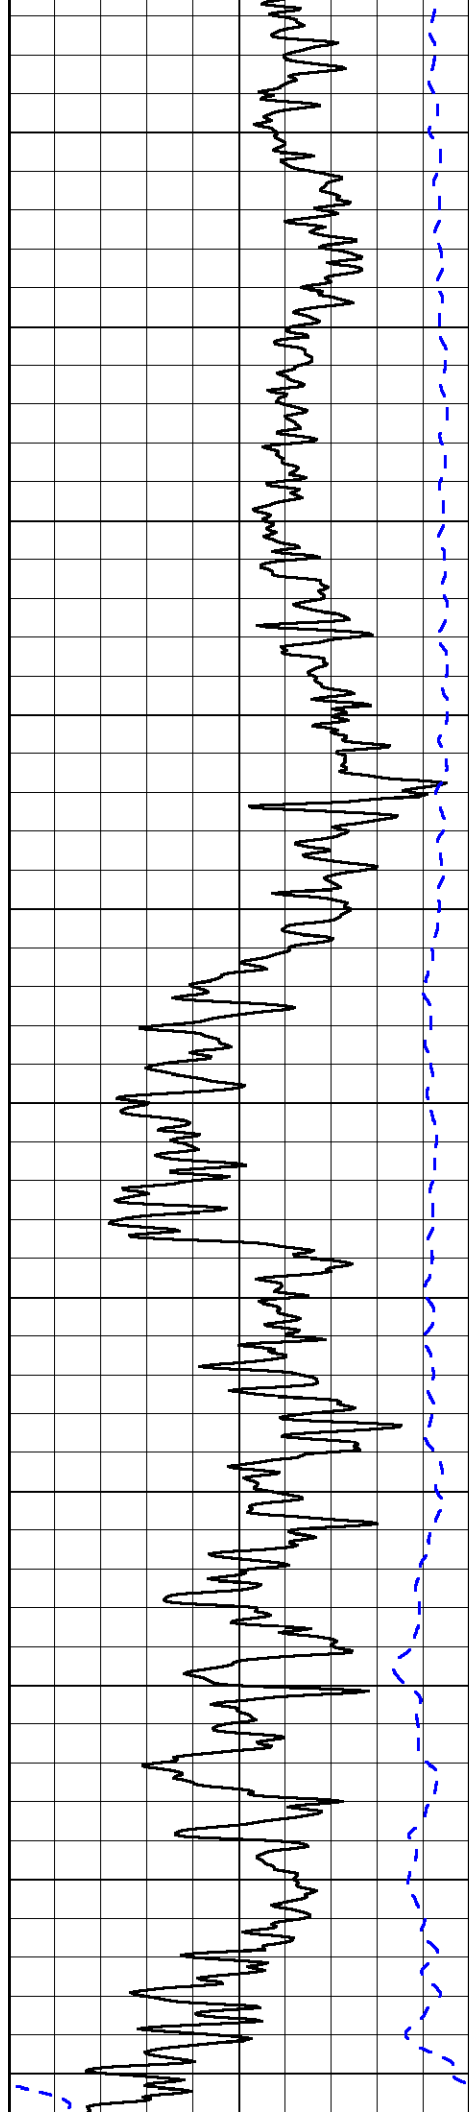


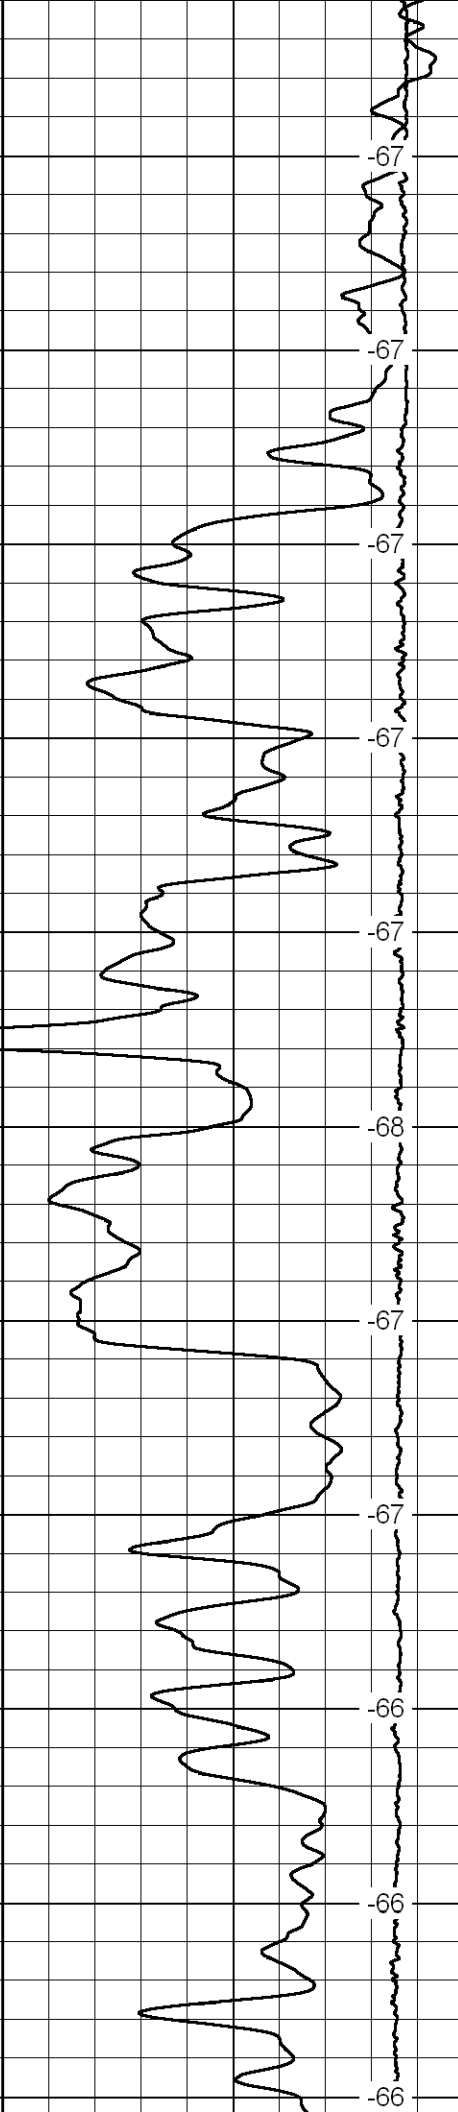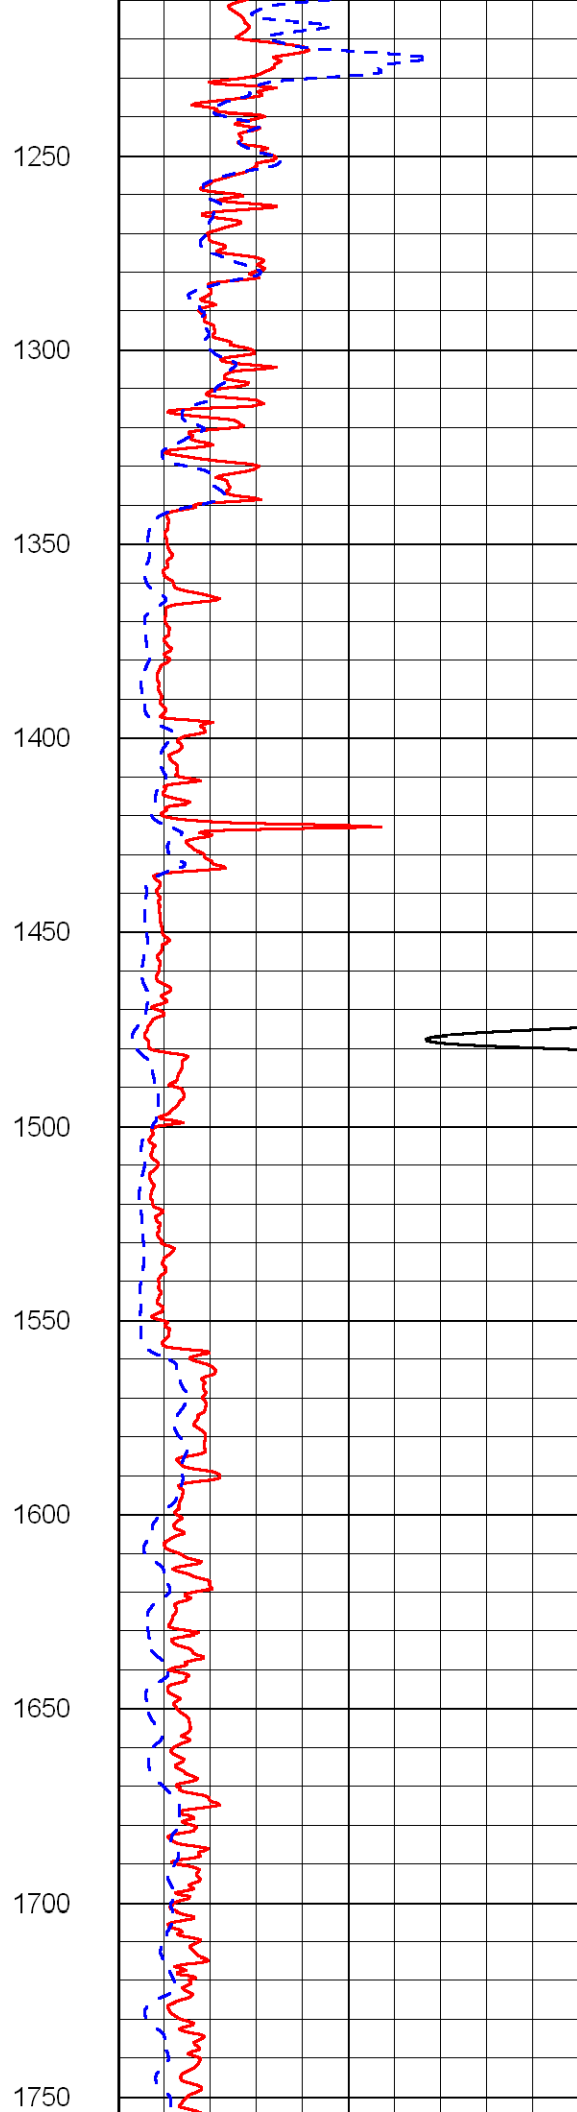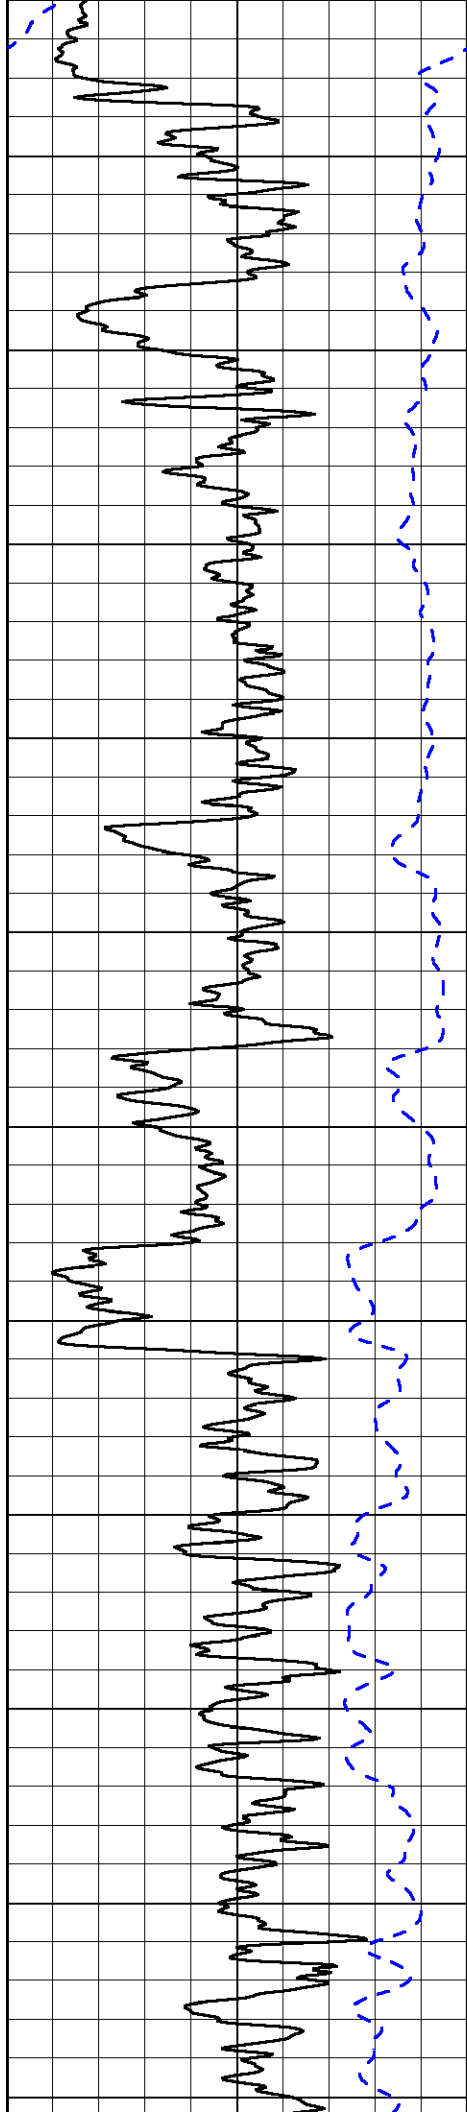

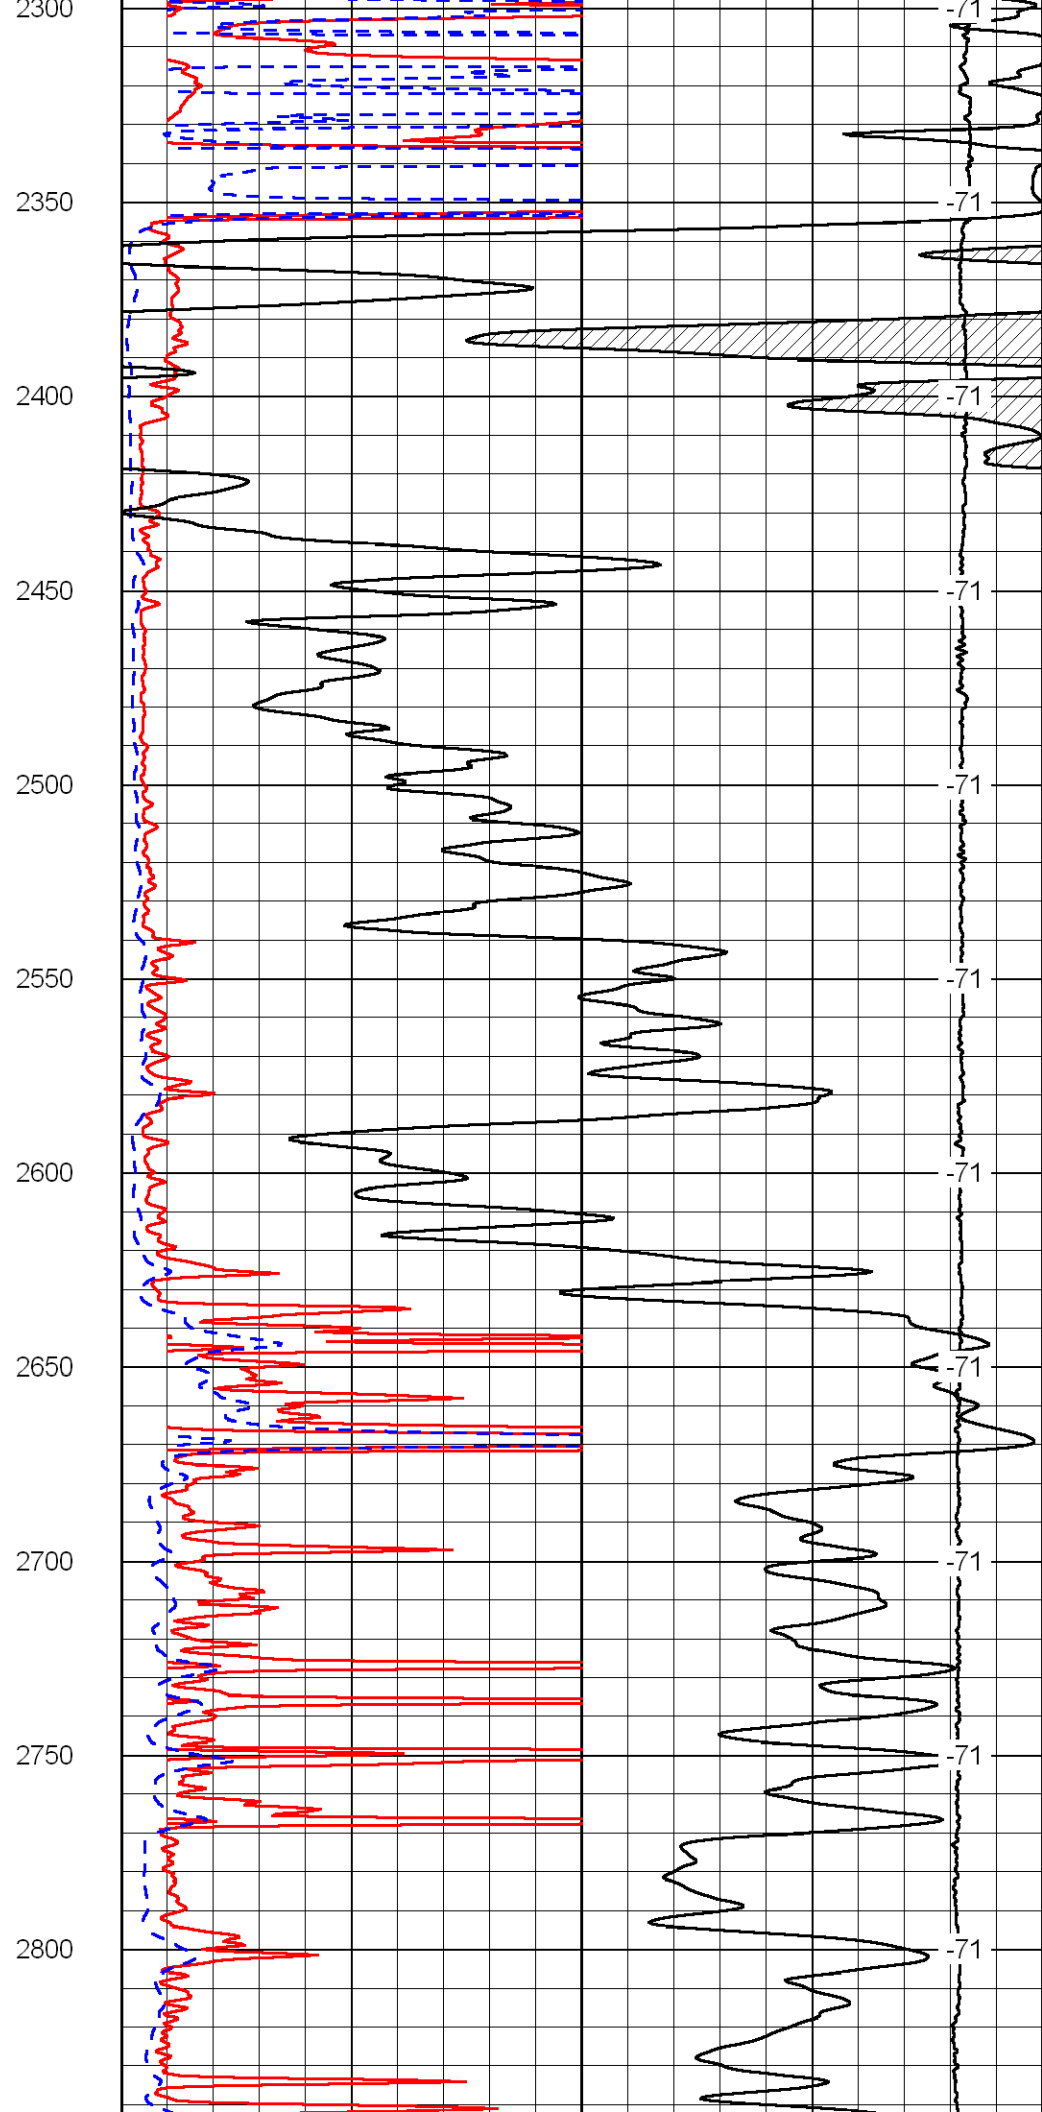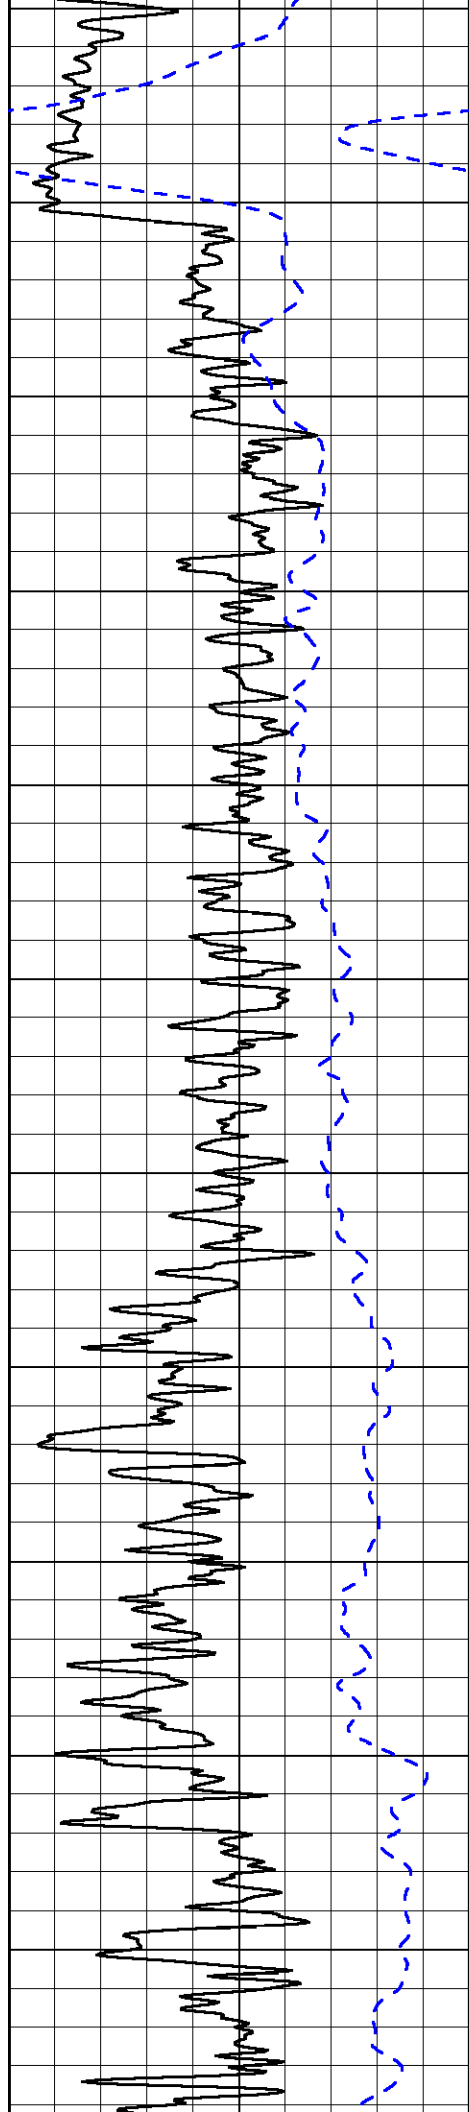

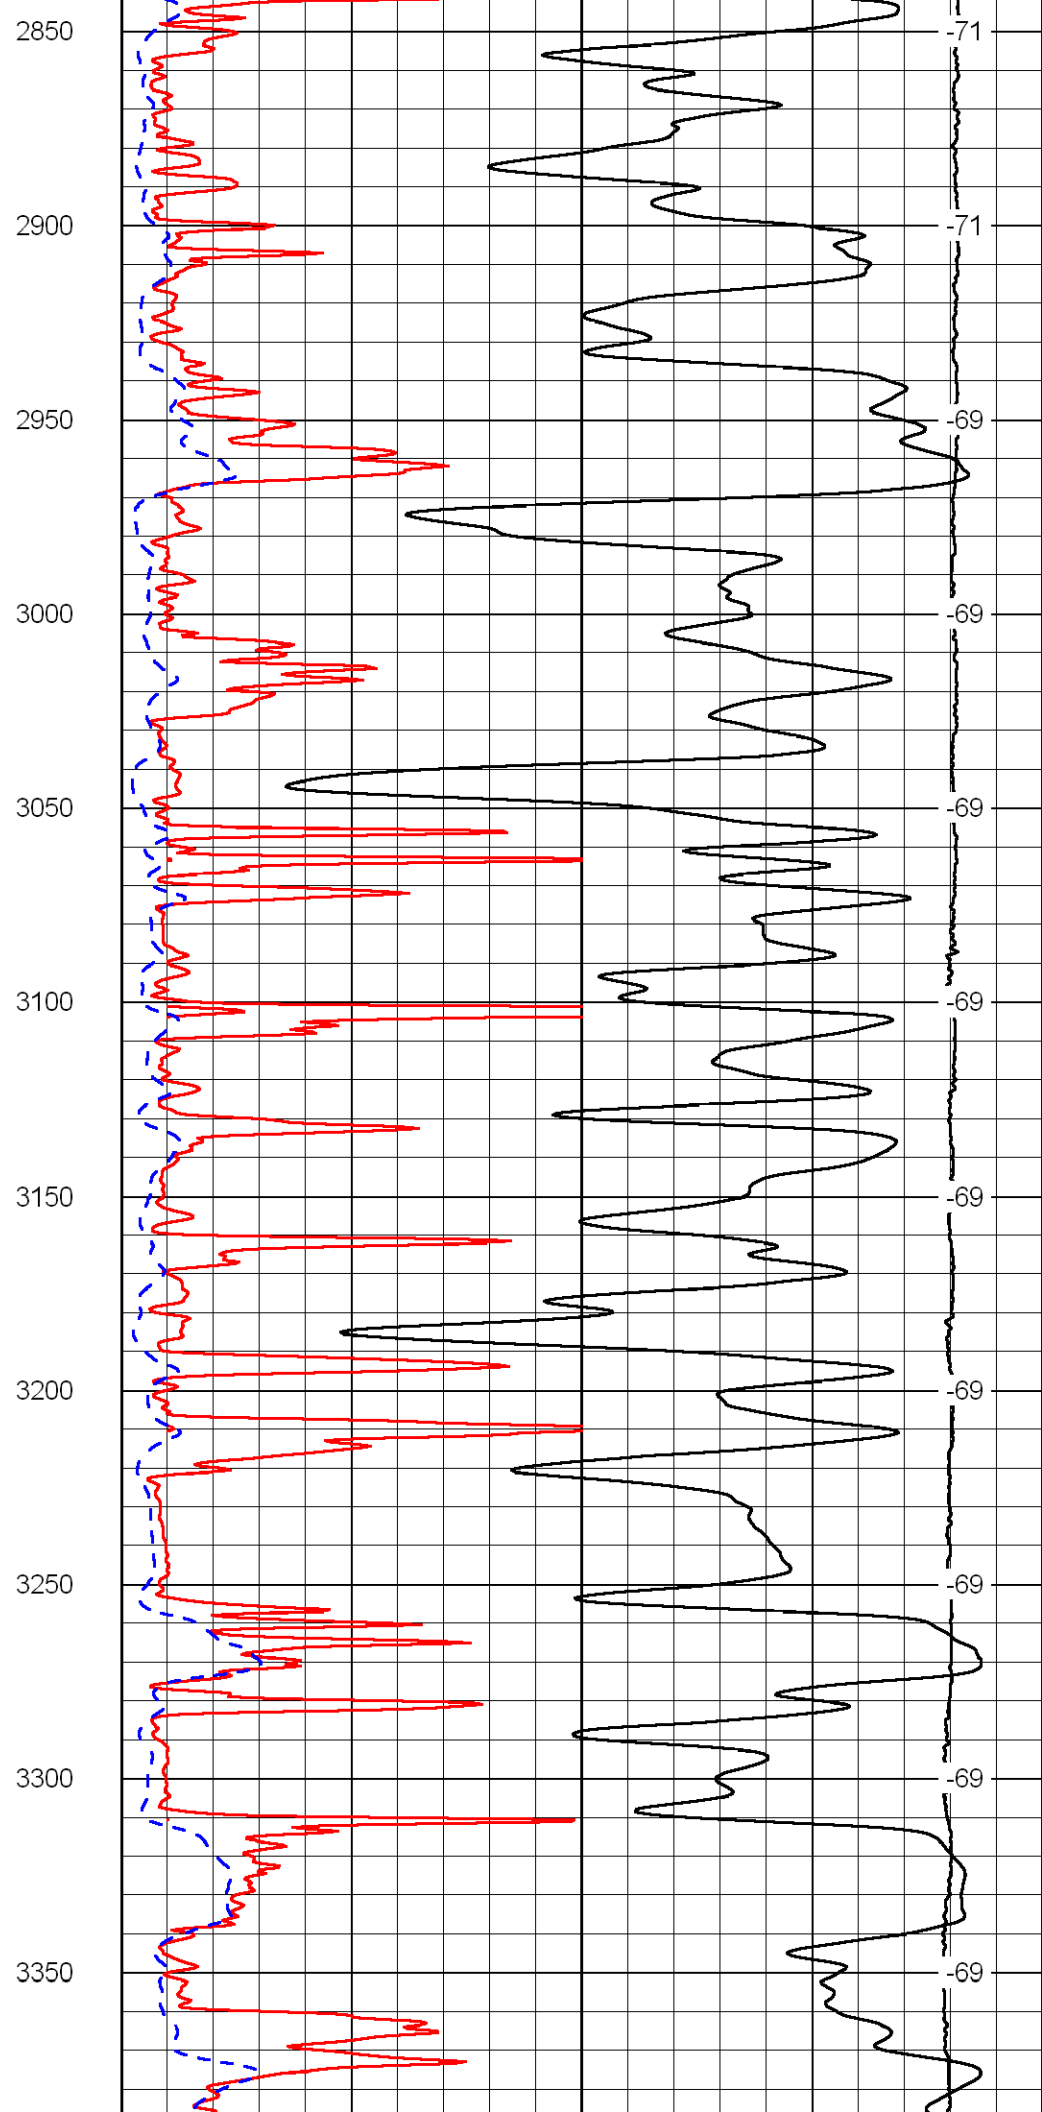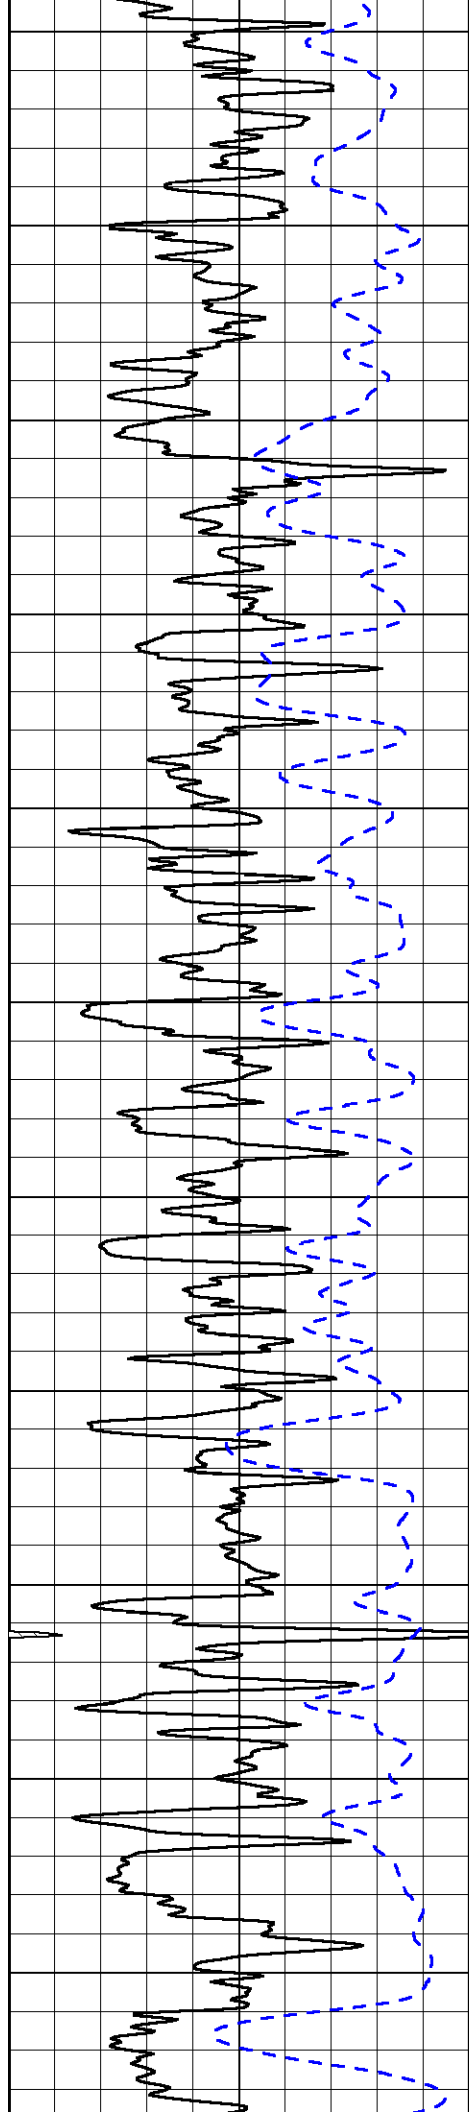

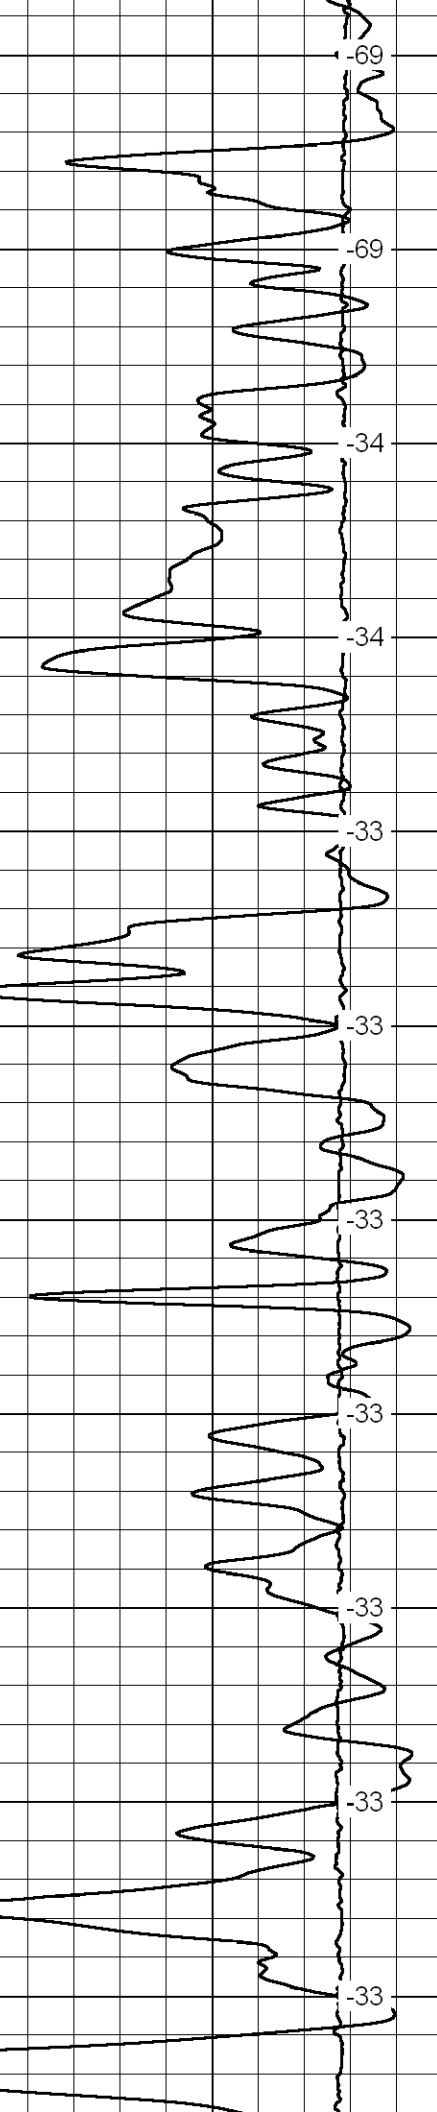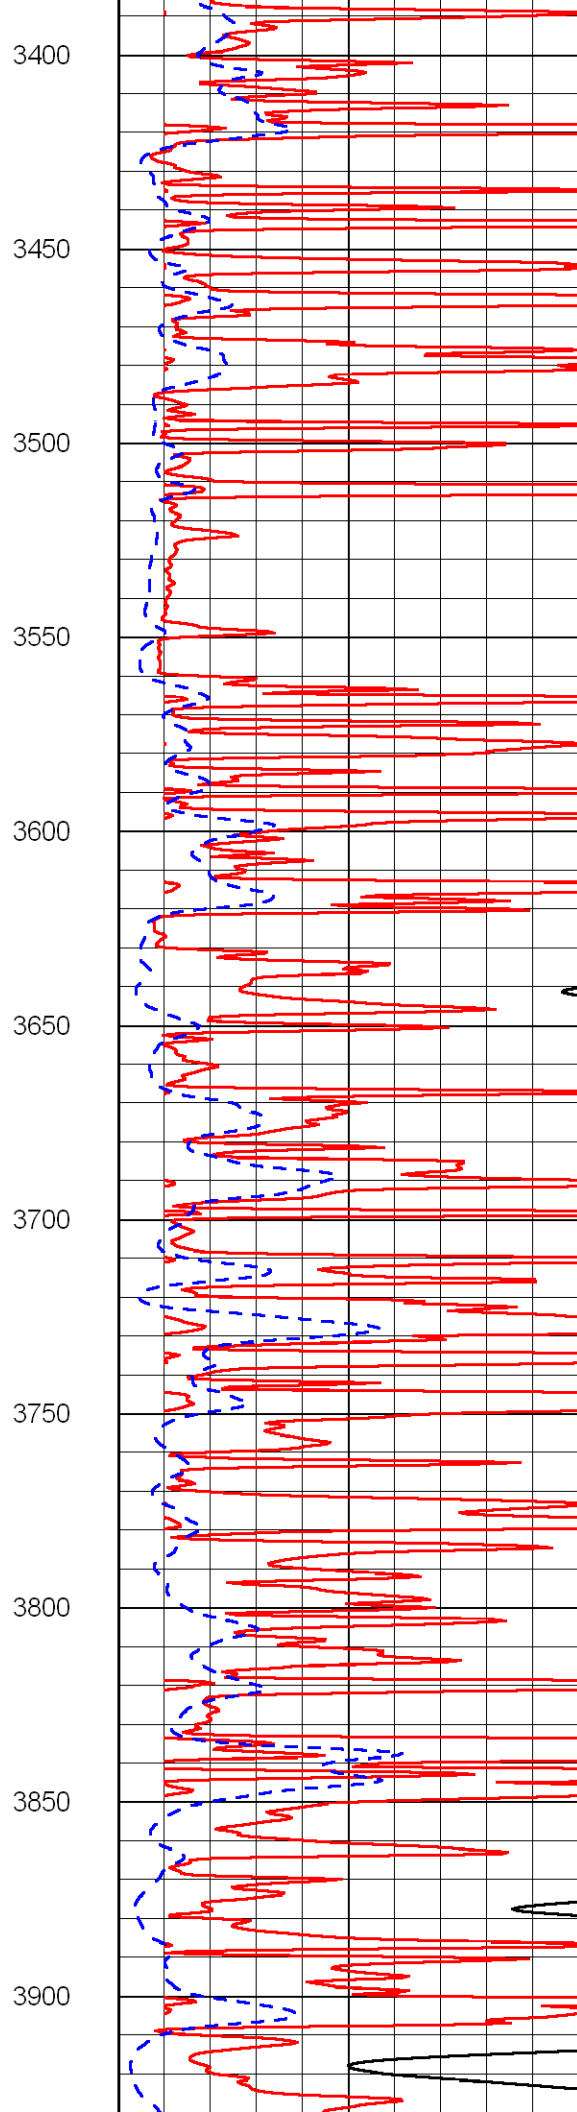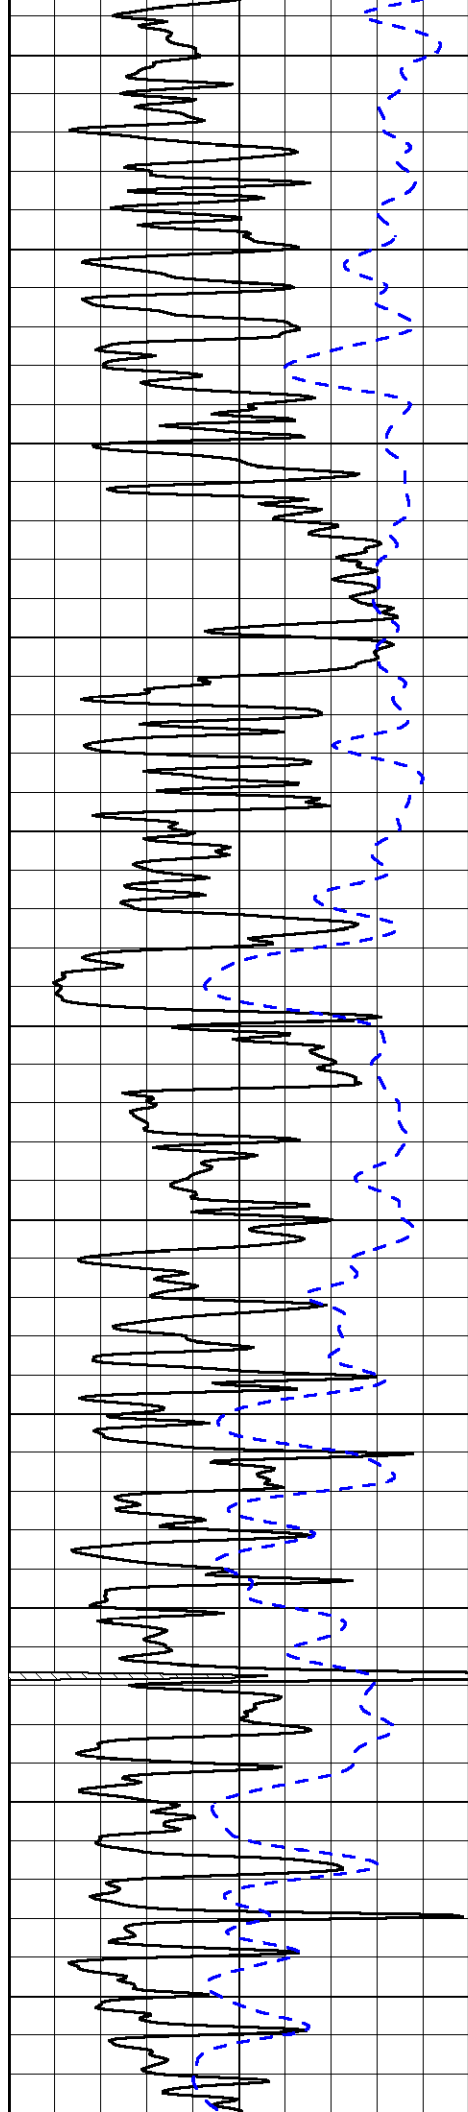

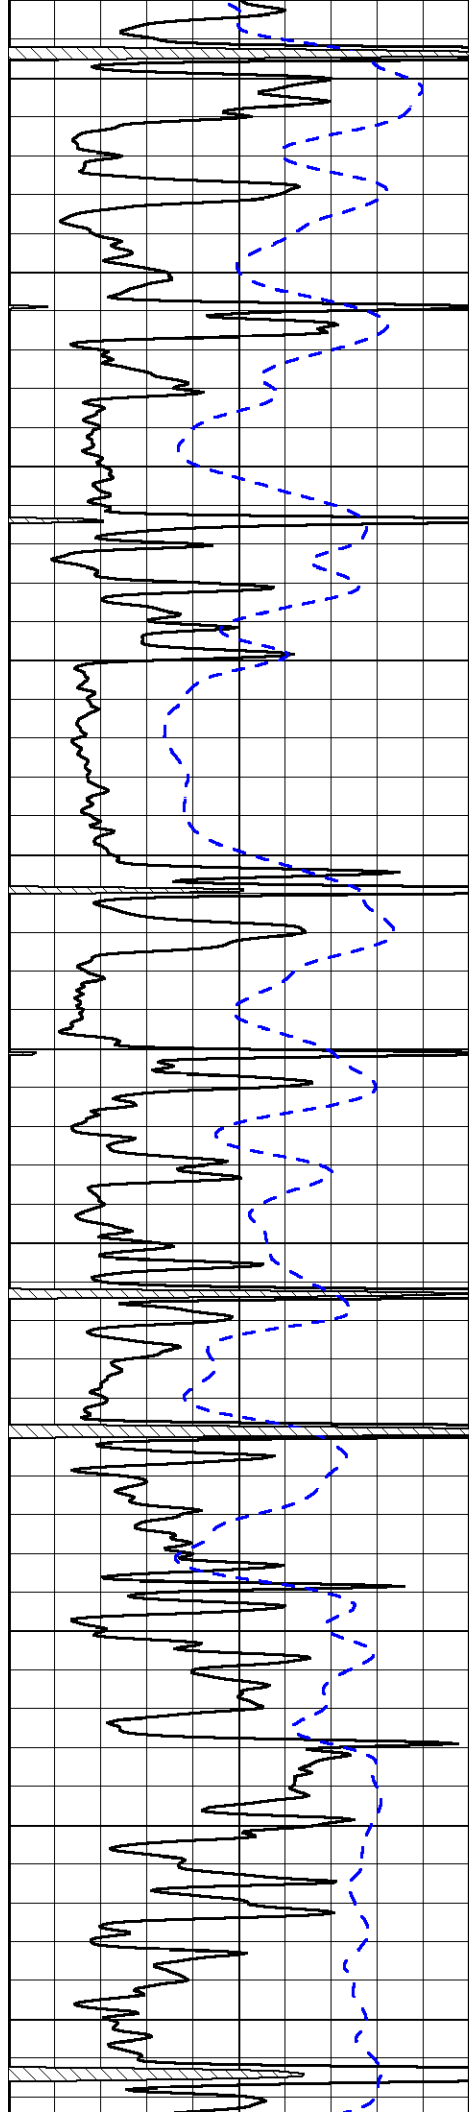

3950

4000

4050

4100

4150

4200


4250

4300

4350

4400

4450

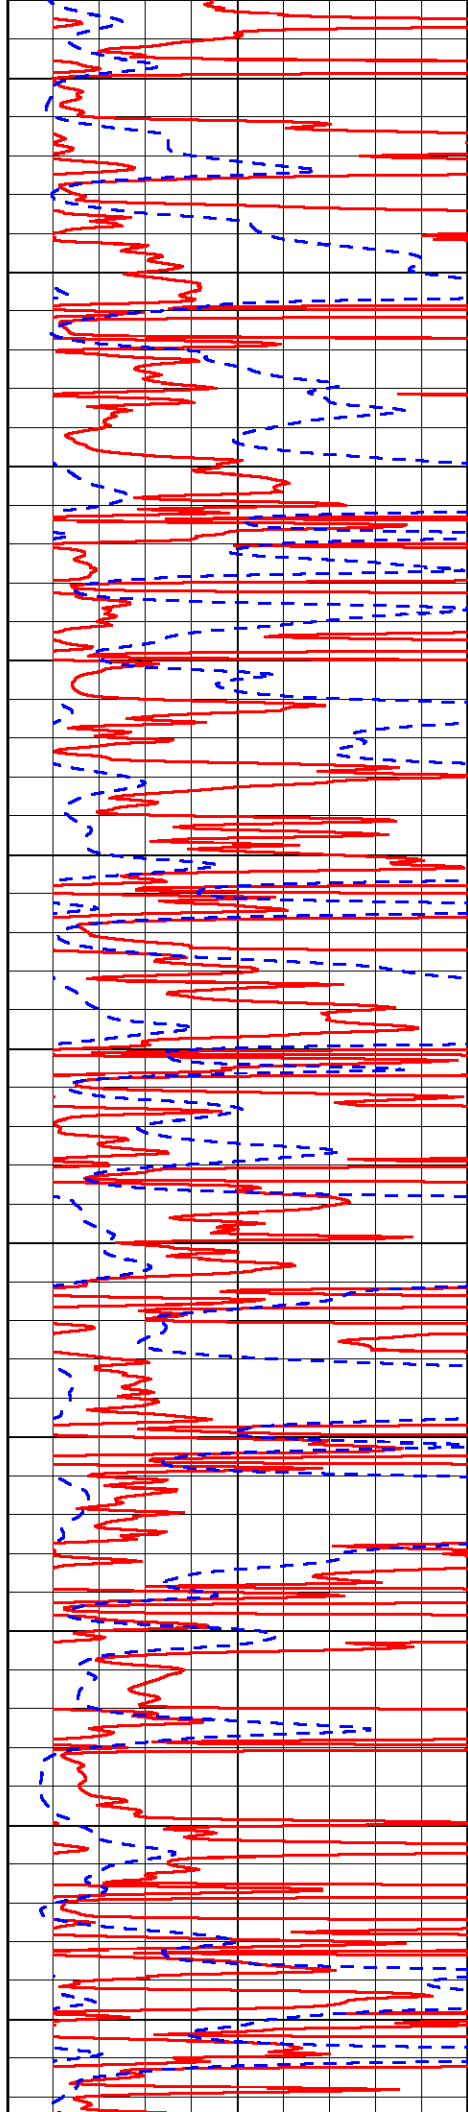

-33

-33

-33

-33

-33

-33


-32


-32

-32



-32


-32

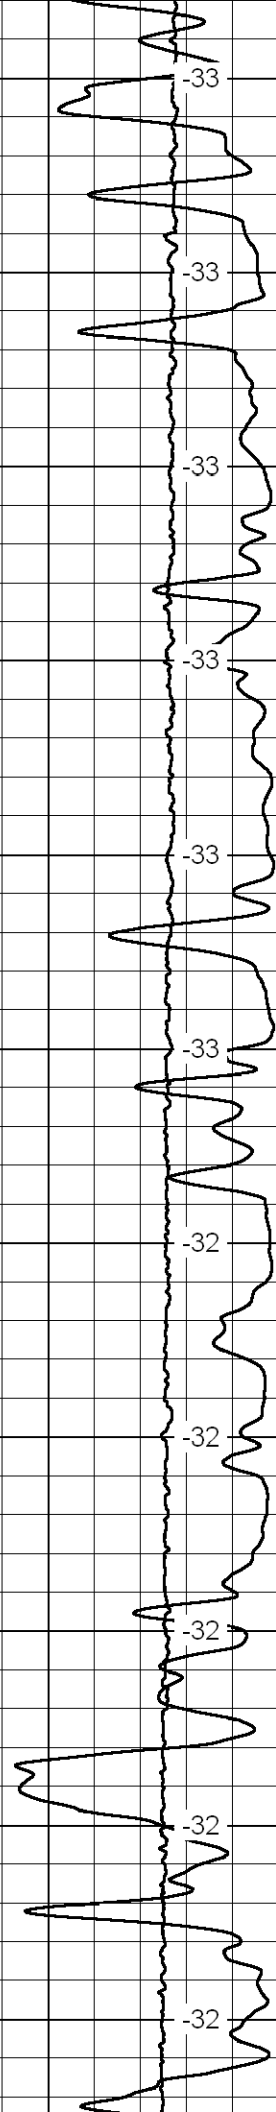

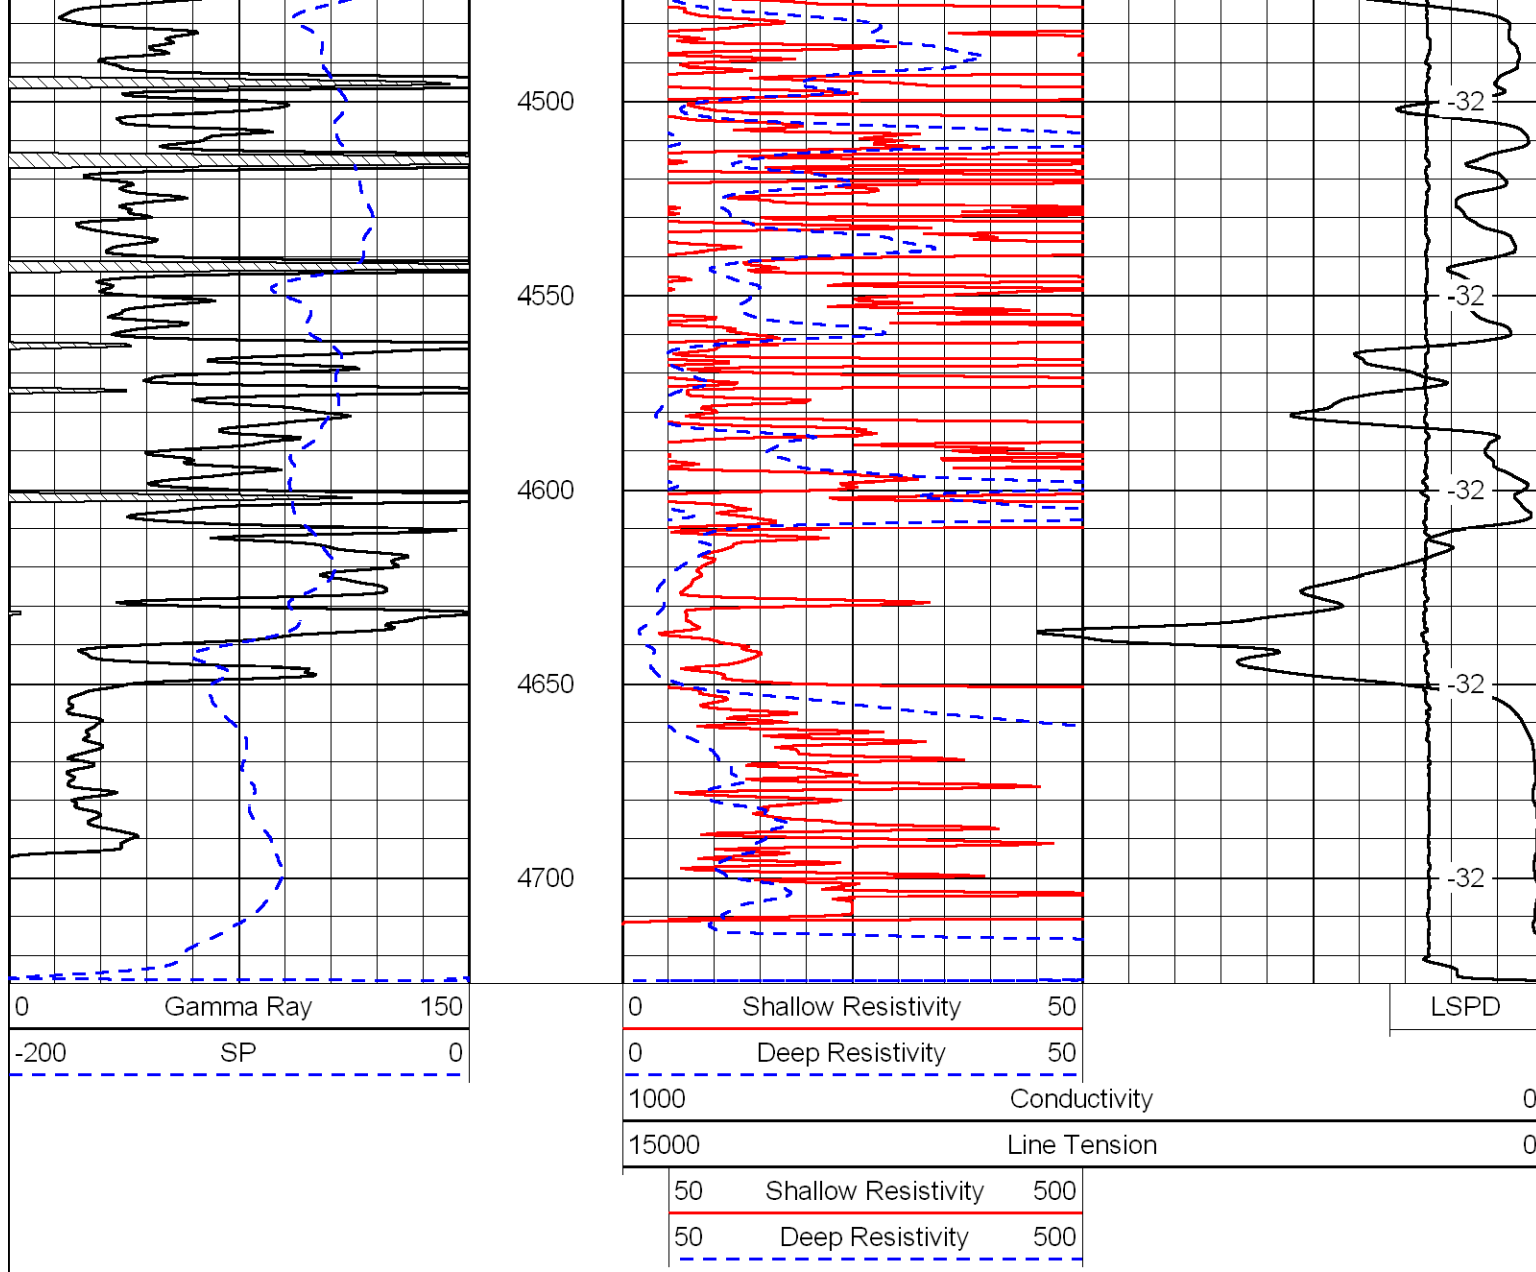


Database File: credohd.db
Dataset Pathname: DIL/credo
Presentation Format: dil
Dataset Creation: Sat Oct 30 09:12:58 2010
Charted by: Depth in Feet scaled 1:240

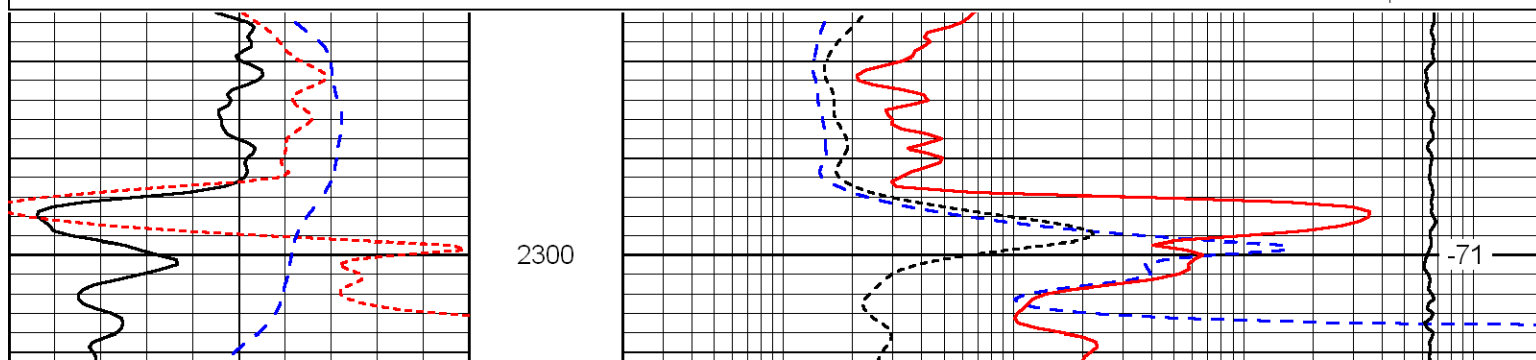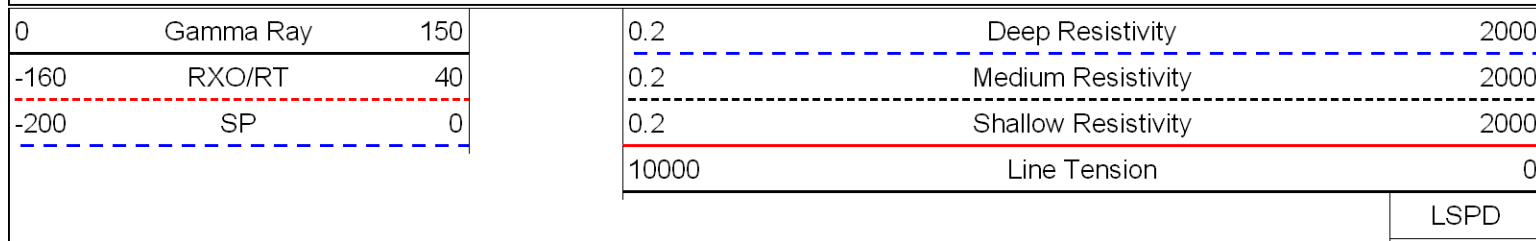


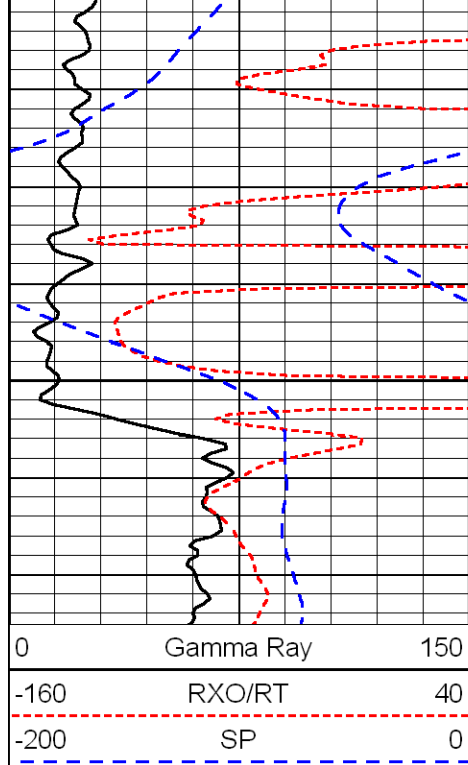


2350

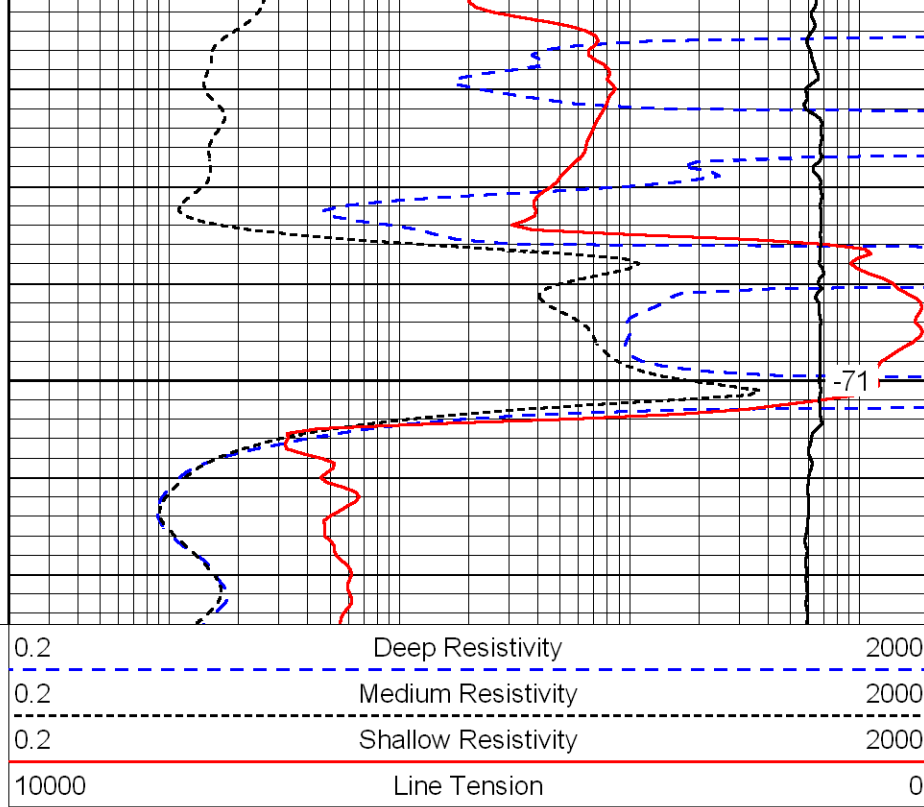


LSPD

Database File: credohd.db
 Dataset Pathname: DIL/credo
 Presentation Format: dil
 Dataset Creation: Sat Oct 30 09:12:58 2010
 Charted by: Depth in Feet scaled 1:240

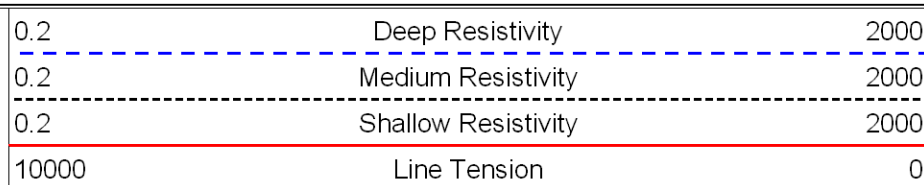


LSPD

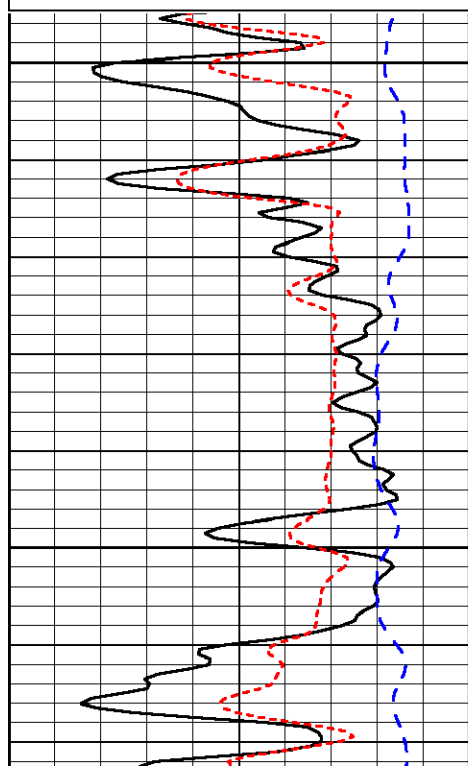


3500

3550

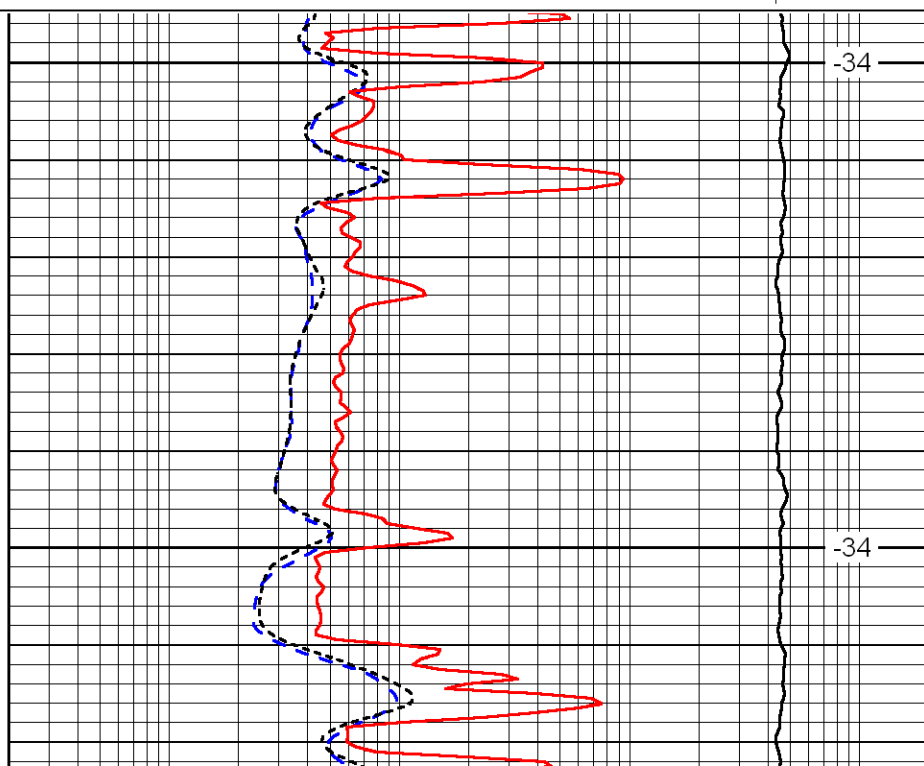

-34

-34

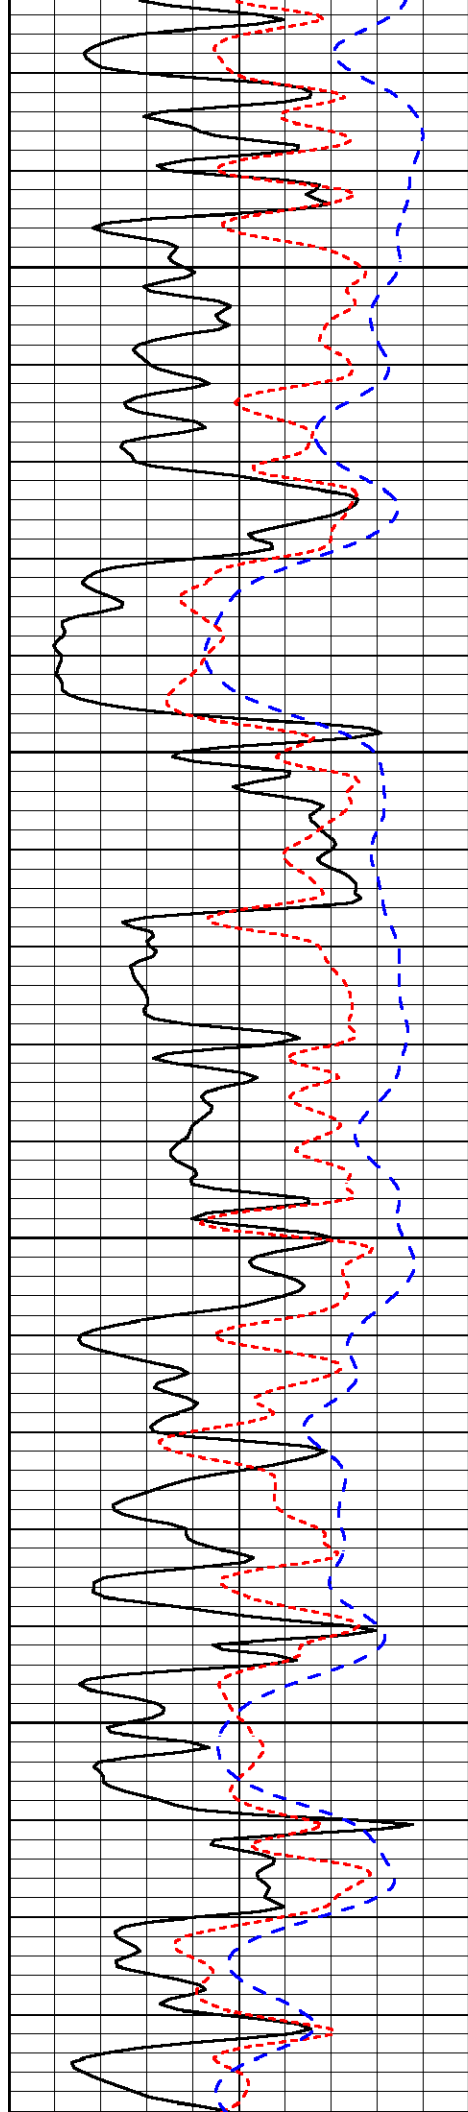


3600

3650

3700

3750

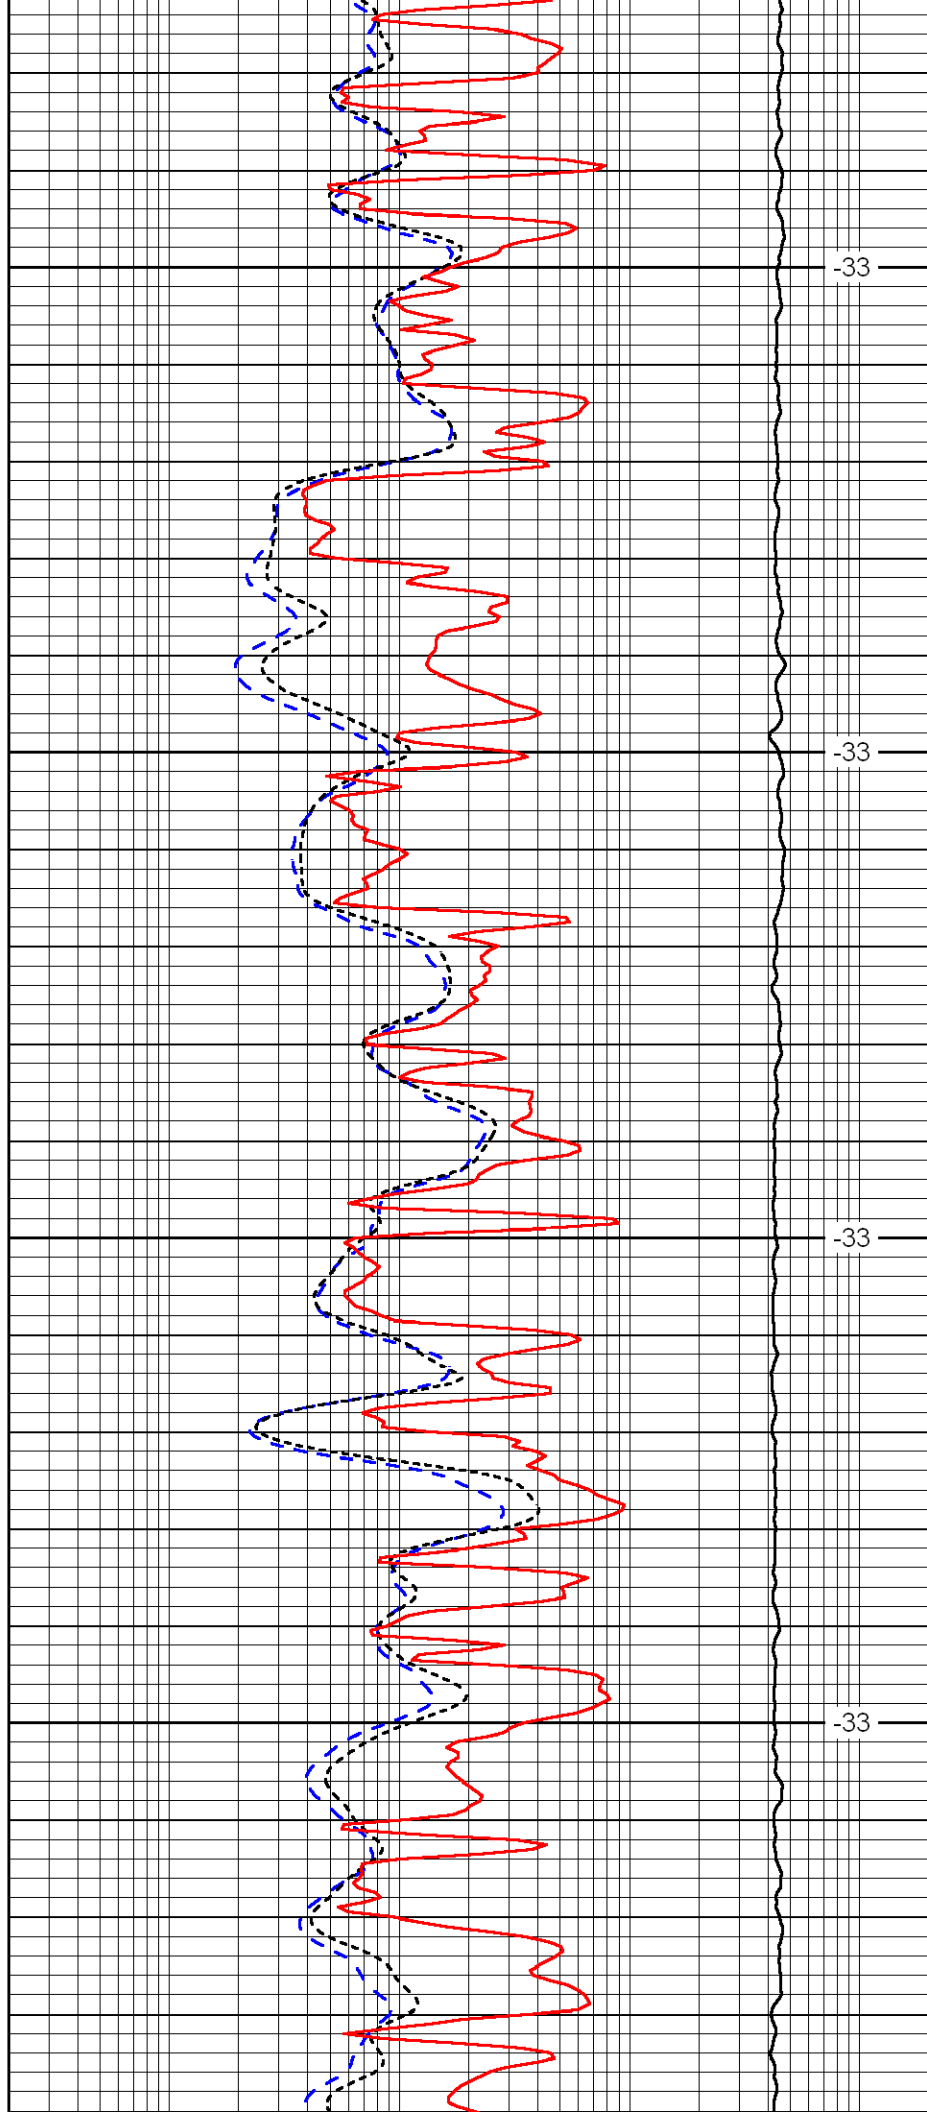


-33

-33

-33

-33

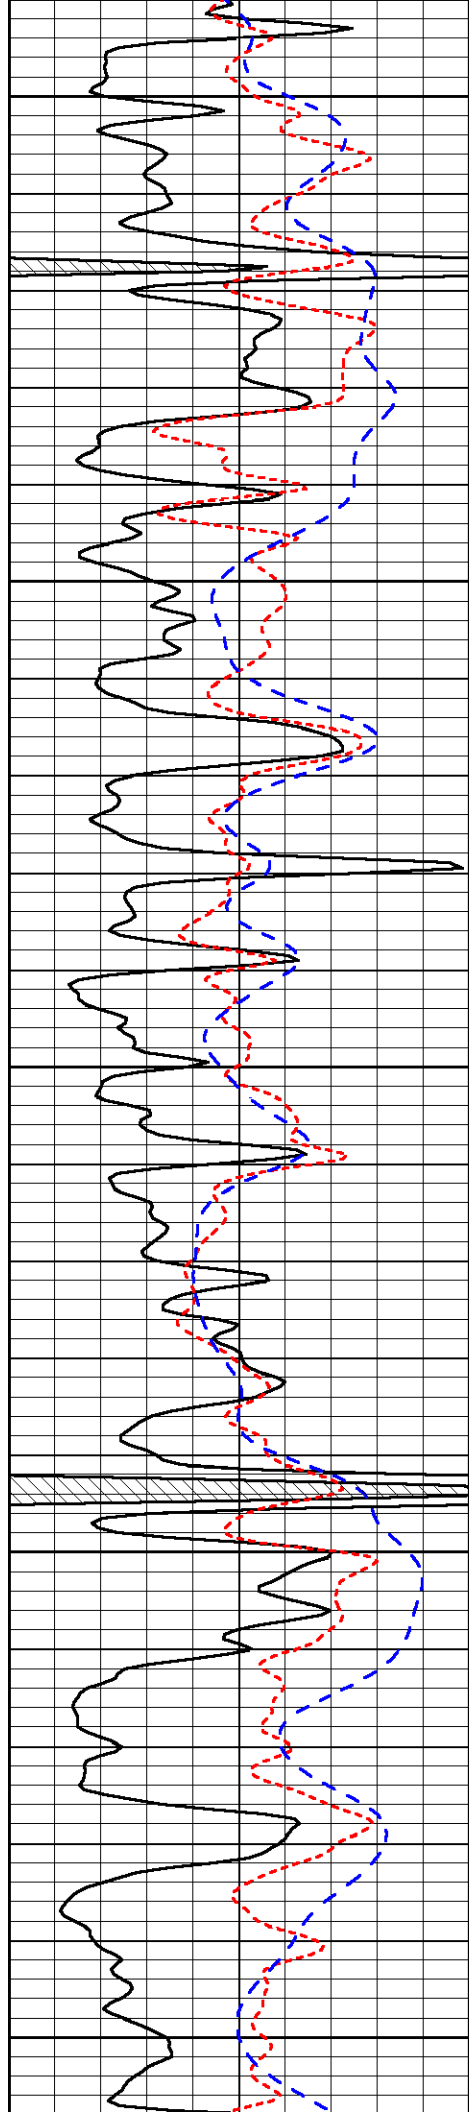


3800

3850

3900

3950

4000

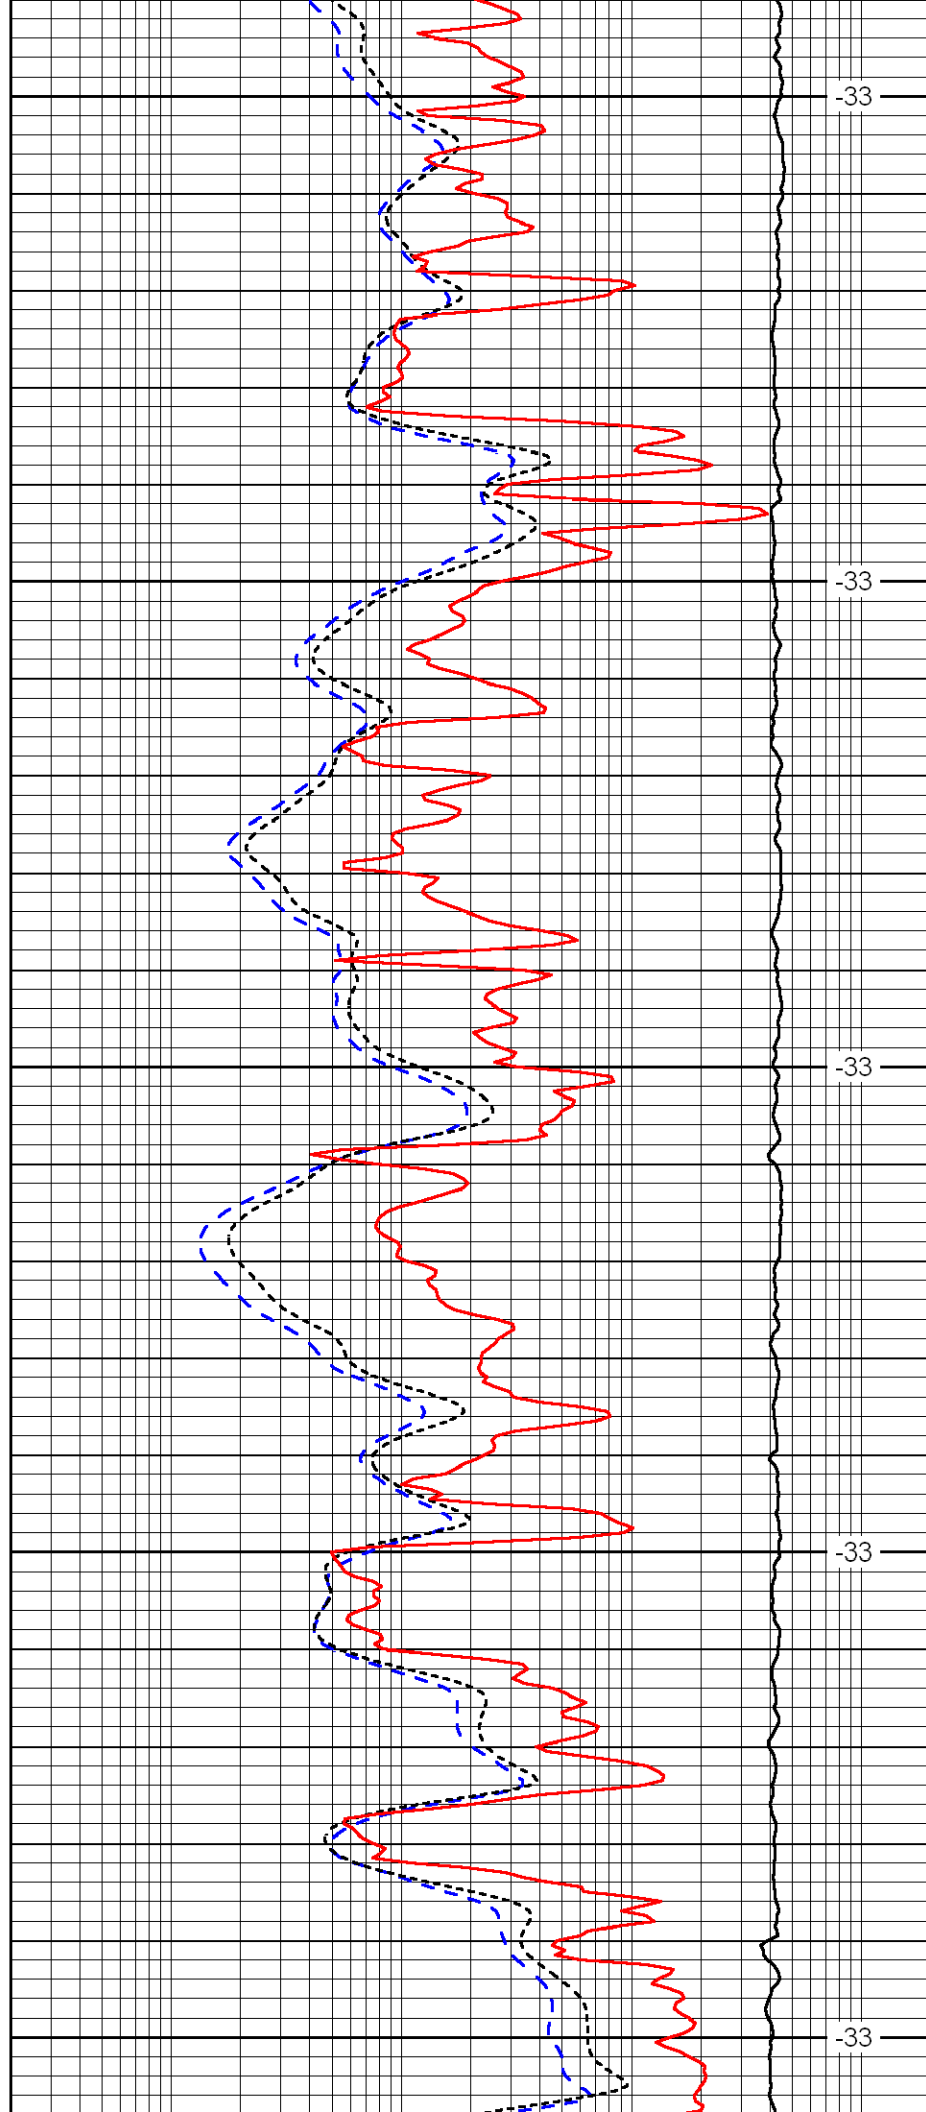


-33

-33

-33

-33

-33

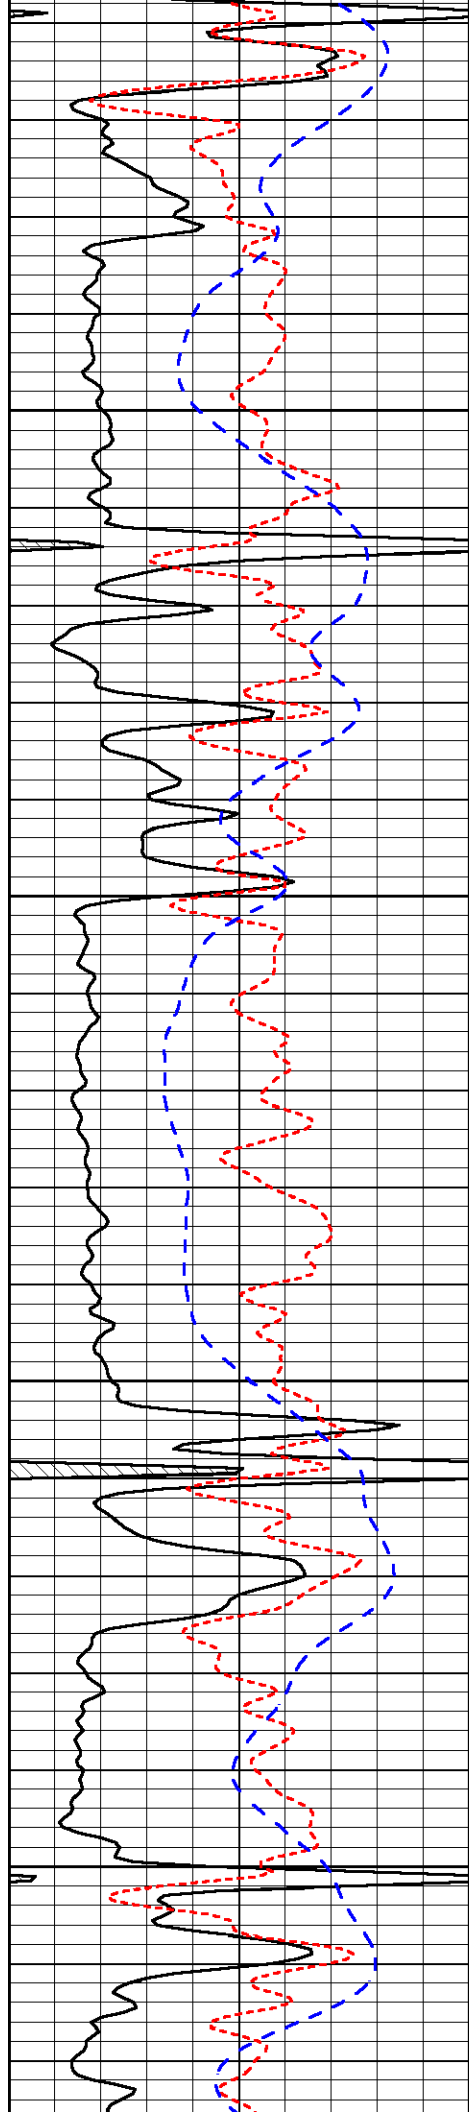


4050

4100

4150

4200

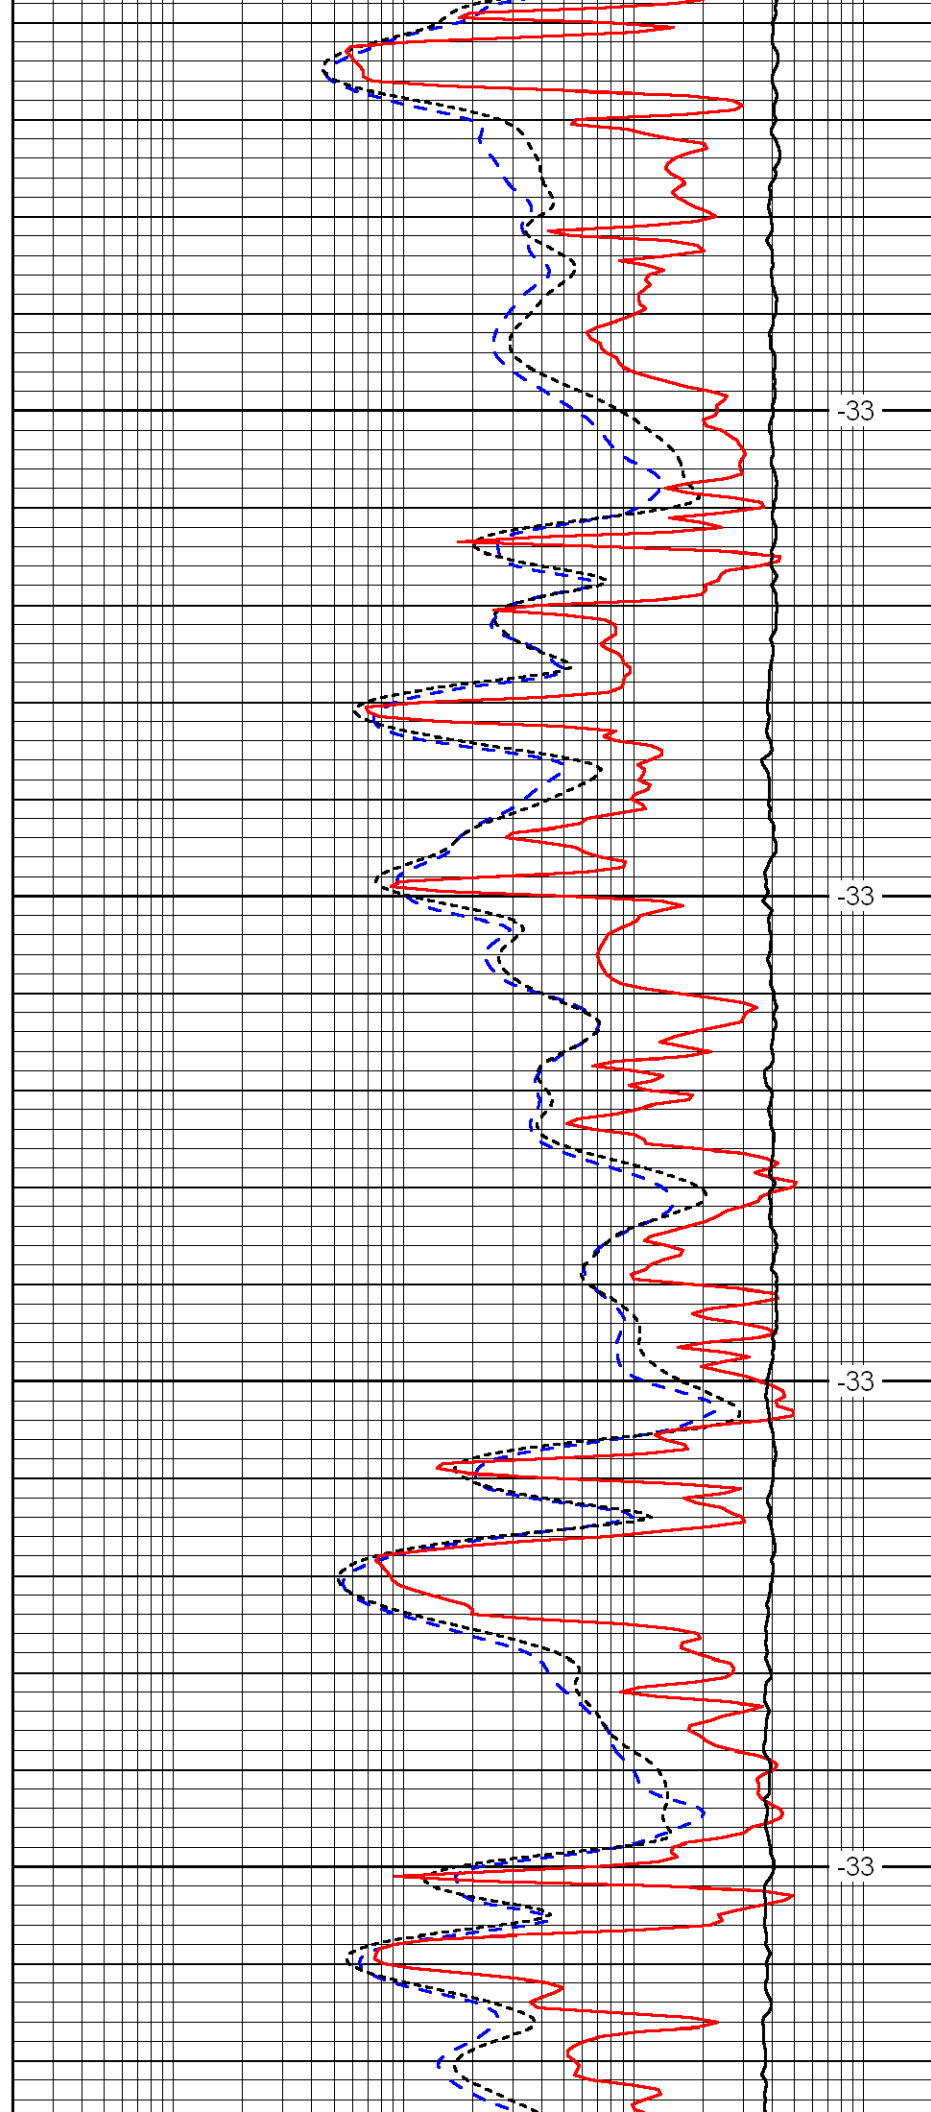


-33

-33

-33

-33

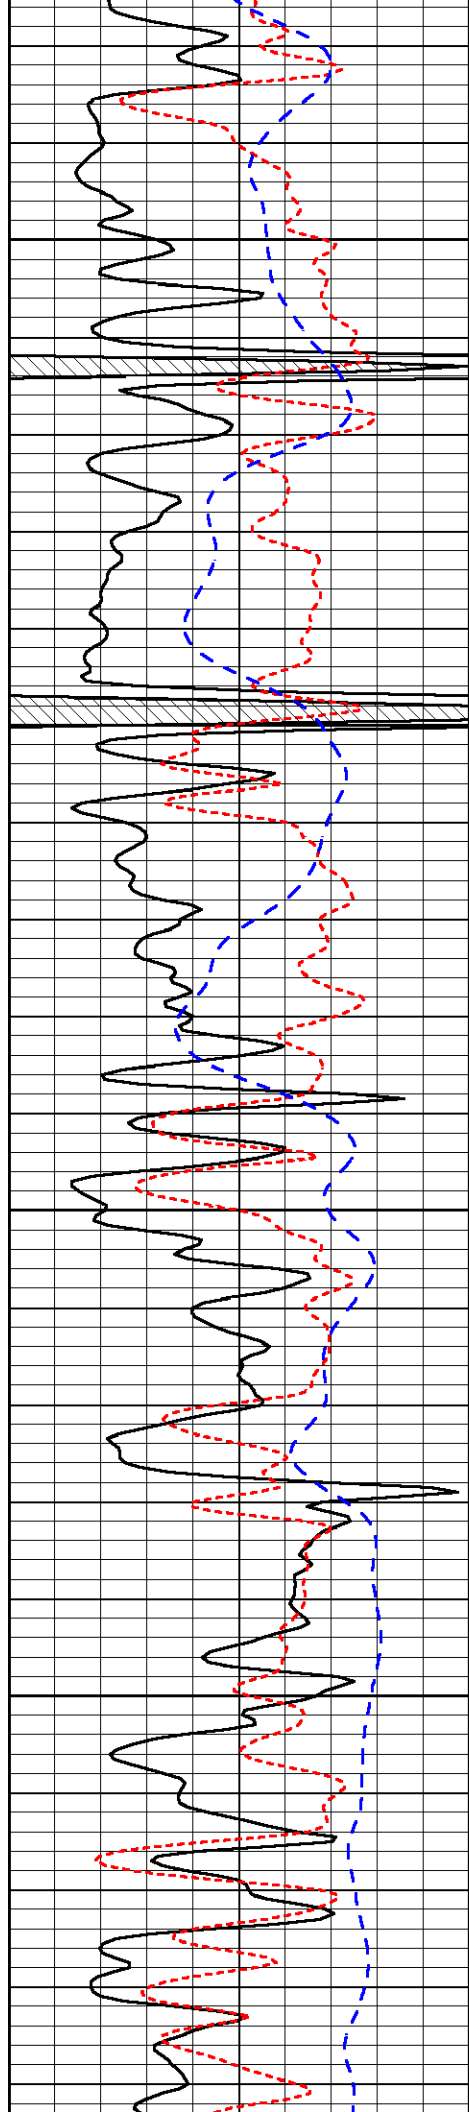


4250

4300

4350

4400

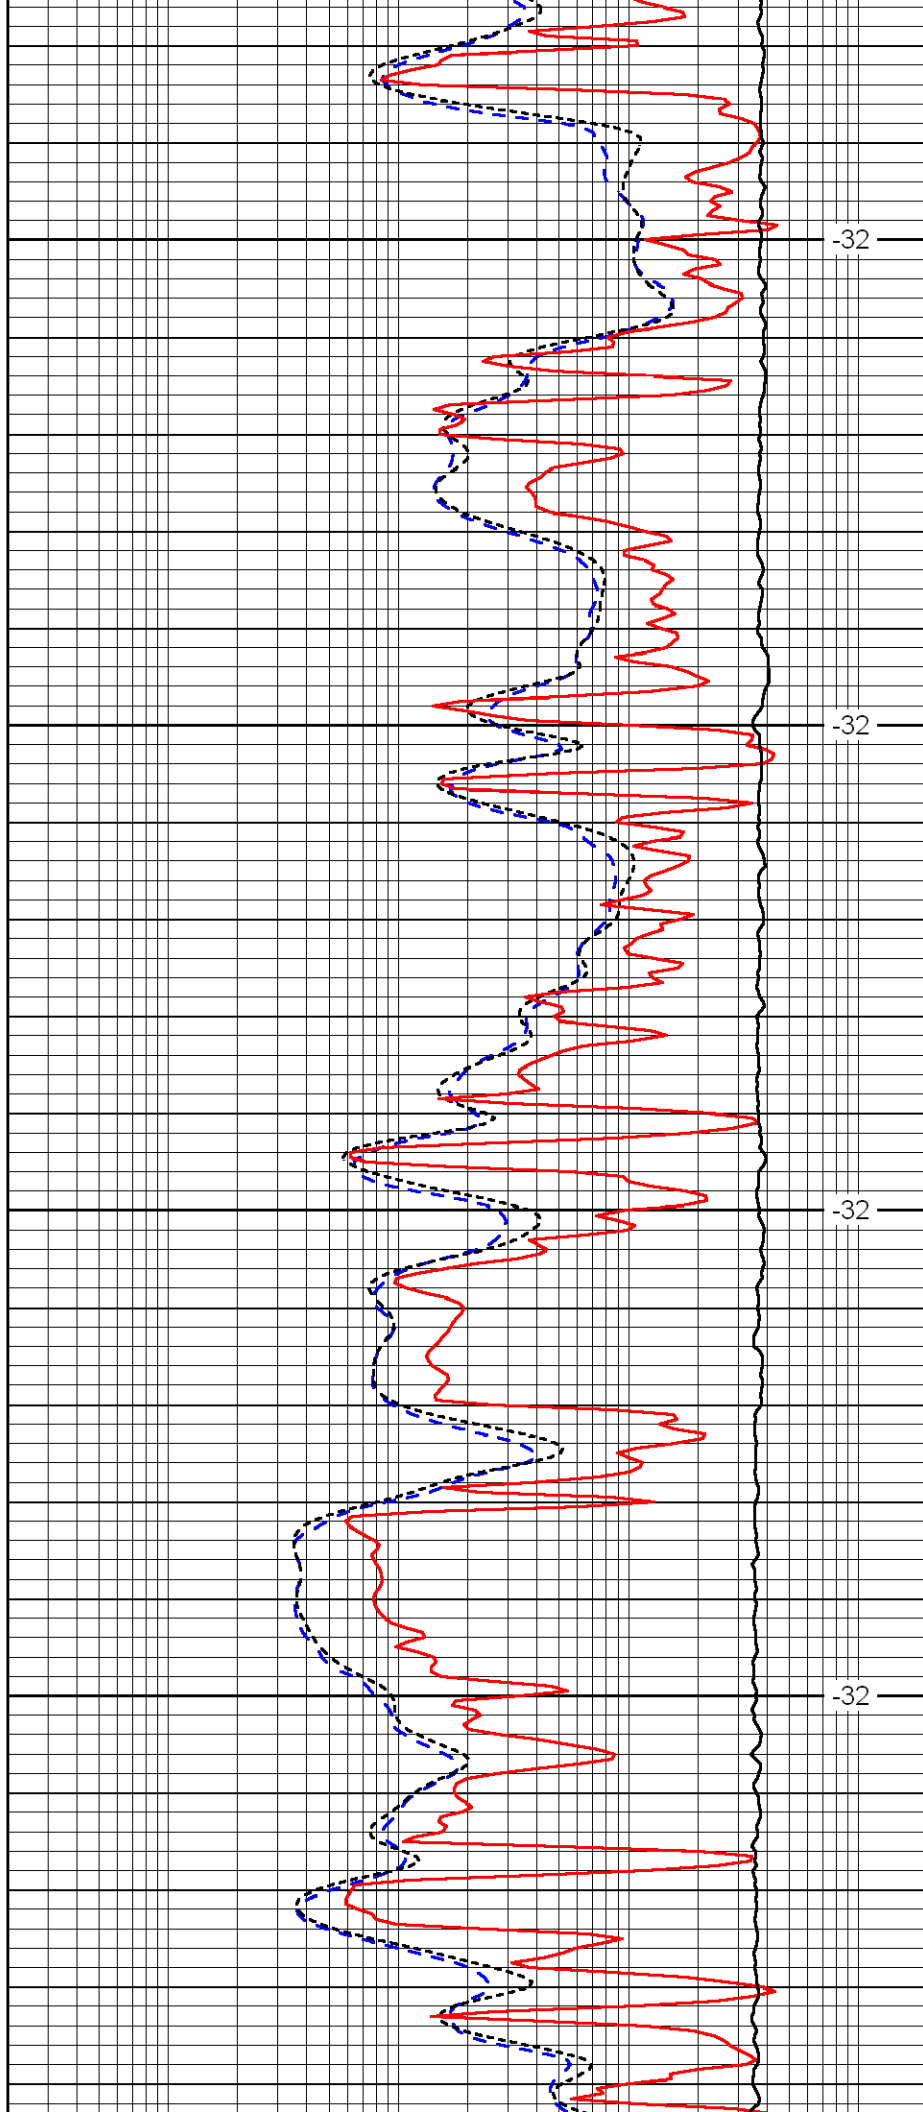


-32

-32

-32

-32

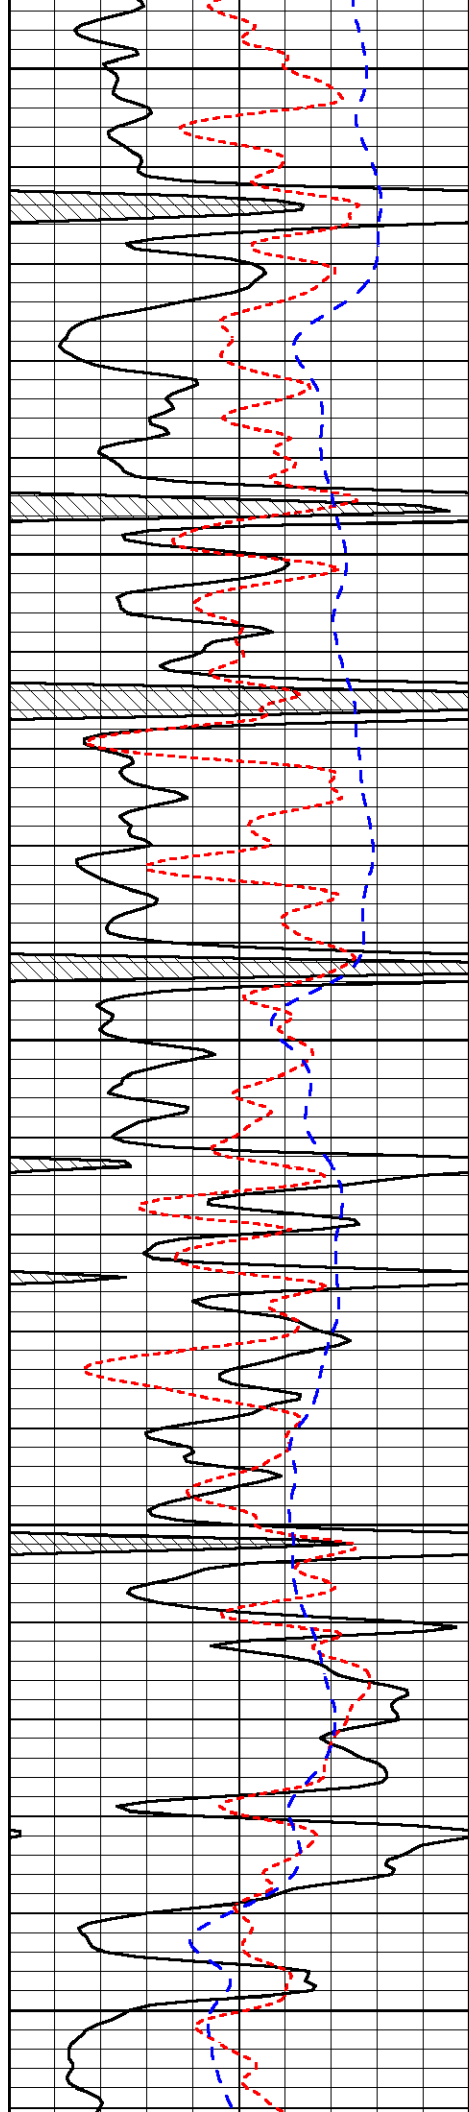


4450

4500

4550

4600

4650

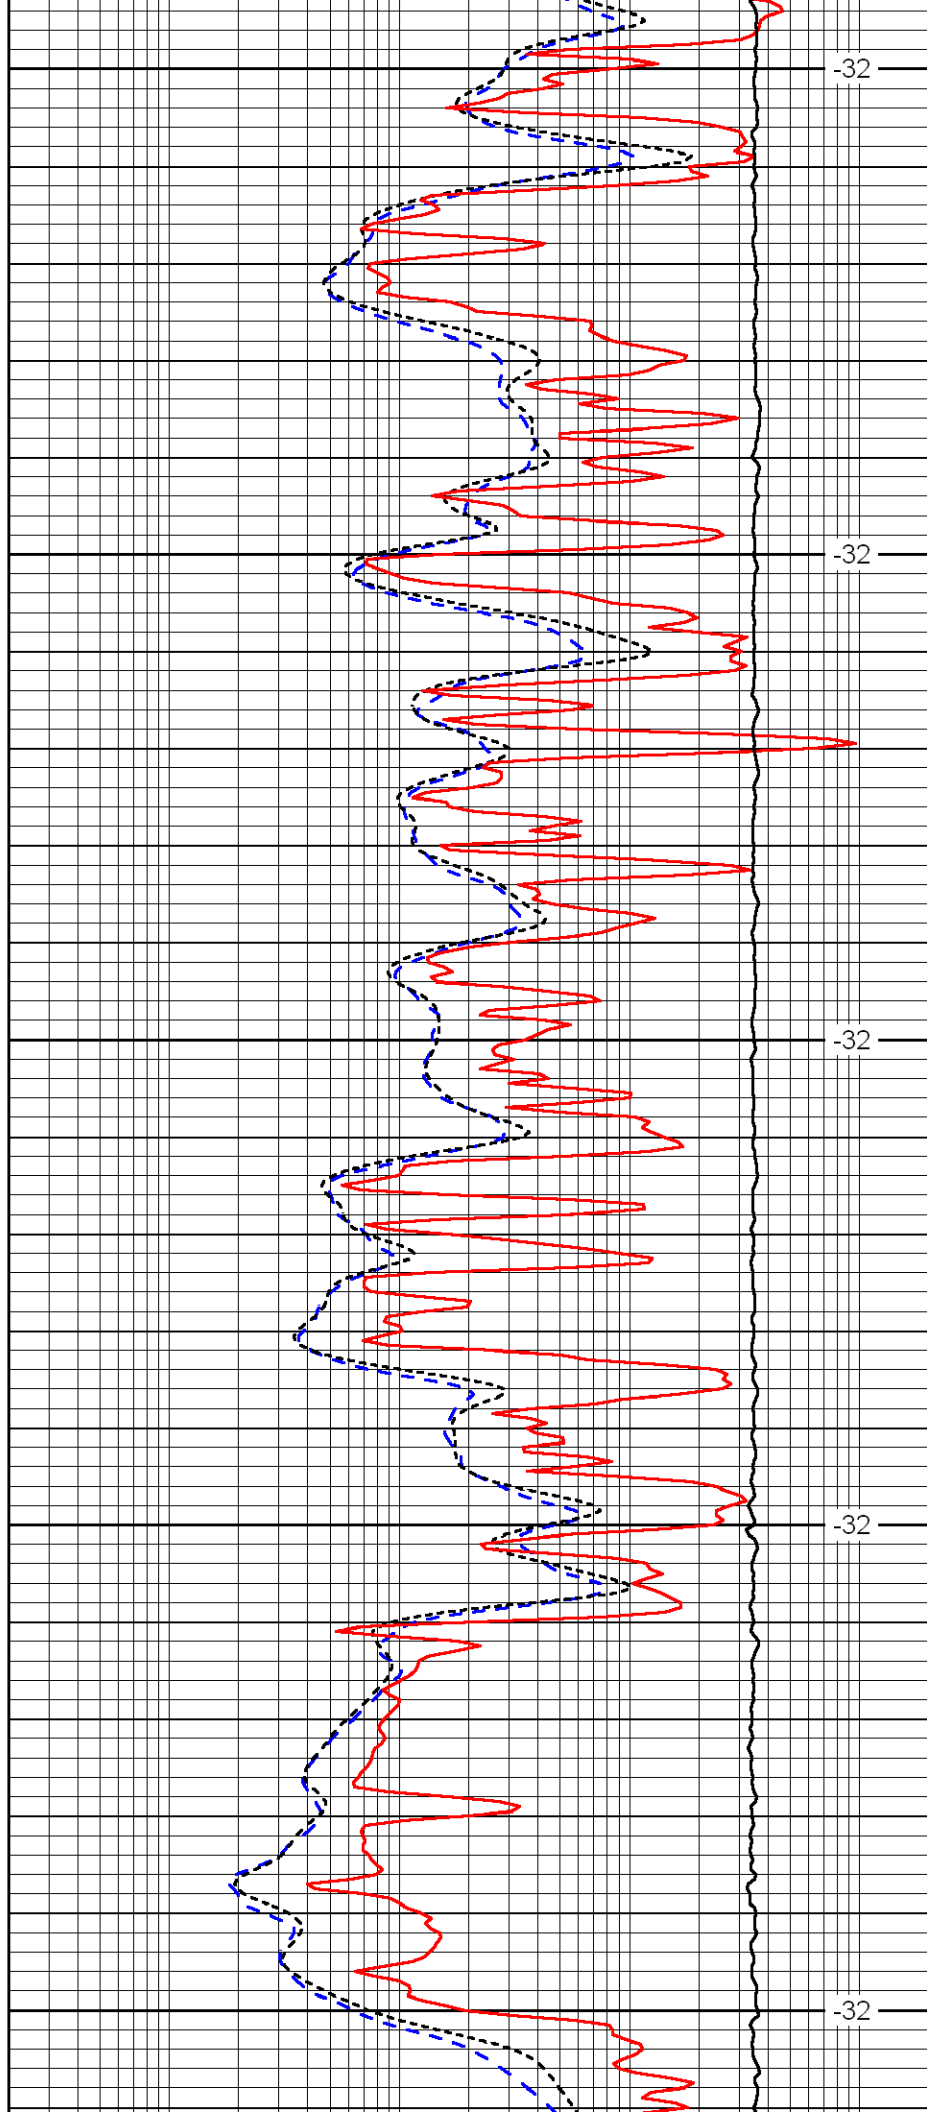


-32

-32

-32


-32

-32

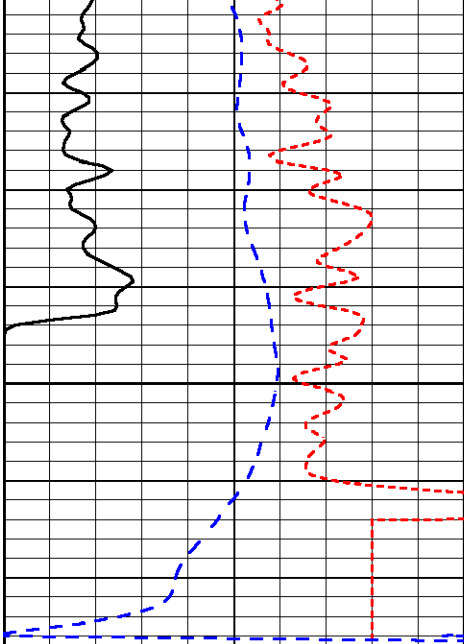

0	Gamma Ray	150
-160	RXO/RT	40
-200	SP	0

4700

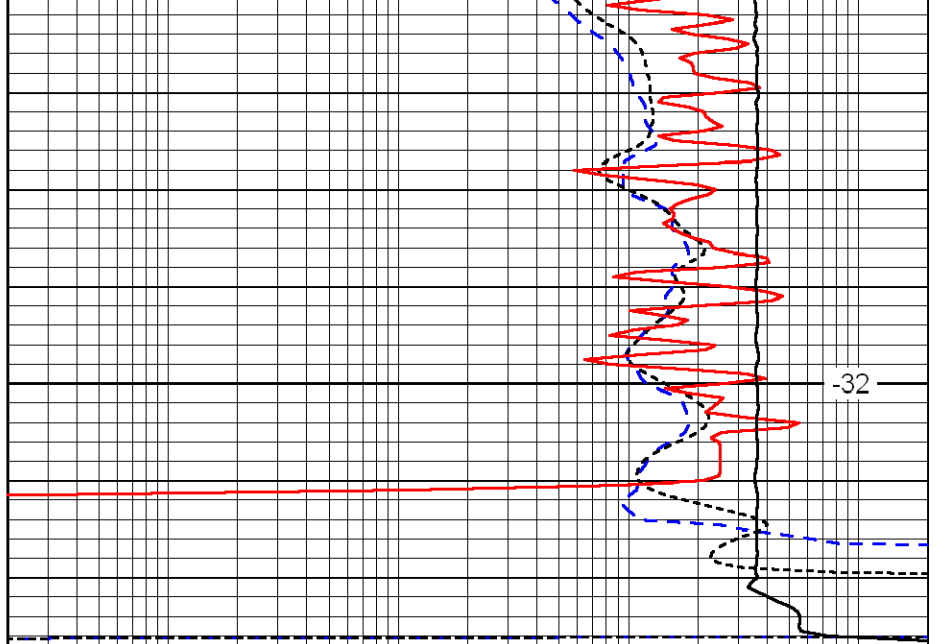

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
10000	Line Tension	0

LSPD