



DIGITAL LOG (785) 625-3858

Dual Induction Log

| | | |
|------------------------|--------------------------|--|
| API No. | 15-069-20,335-00-00 | |
| Company | Falcon Exploration, Inc. | |
| Well | Andee Fry No. 1-2 | |
| Field | Wildcat | |
| County | Gray | State Kansas |
| Location | 200' FSL & 2360' FWL | |
| Sec: 2 | Twp: 28 S | Rge: 30 W |
| Permanent Datum | Ground Level | Elevation 2799 |
| Log Measured From | Kelly Bushing | 12 Ft. Above Perm. Datum |
| Drilling Measured From | Kelly Bushing | |
| | | Other Services CNL/CDL MEL/BHCS |
| | | Elevation K.B. 2811 D.F. 2799 G.L. 2799 |

| | |
|------------------------|--------------|
| Date | 1/14/2011 |
| Run Number | One |
| Depth Driller | 5450 |
| Depth Logger | 5456 |
| Bottom Logged Interval | 5455 |
| Top Log Interval | 0 |
| Casing Driller | 8.625 @ 1874 |
| Casing Logger | 1870 |
| Bit Size | 7.875 |
| Type Fluid in Hole | Chemical |
| Salinity, ppm CL | 1,300 |
| Density / Viscosity | 9.05 55 |
| pH / Fluid Loss | 9.5 6.8 |
| Source of Sample | Flowline |
| Rm @ Meas. Temp | 1.2 @ 55 |
| Rmf @ Meas. Temp | .90 @ 55 |
| Rmc @ Meas. Temp | 1.62 @ 55 |
| Source of Rmf / Rmc | Charts |
| Rm @ BHT | .50 @ 133 |
| Operating Rig Time | 7 Hours |
| Max Rec. Temp. F | 133 |
| Equipment Number | 4 |
| Location | Hays |
| Recorded By | K. Bange |
| Witnessed By | Keith Reavis |

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments



Thank you for using Log-Tech, Inc.
 (785) 625-3858
 Montezuma, 7 W to 6th rd, 6 N, W into


| | | |
|------|-----------|-----|
| 0 | Gamma Ray | 150 |
| -200 | SP (mV) | 0 |



| | | |
|-------|---------------------|-----|
| 0 | Shallow Resistivity | 50 |
| 0 | Deep Resistivity | 50 |
| 1000 | Conductivity | 0 |
| 15000 | Line Tension | 0 |
| 50 | Shallow Resistivity | 500 |
| 50 | Deep Resistivity | 500 |




| |
|------|
| LSPD |
|------|


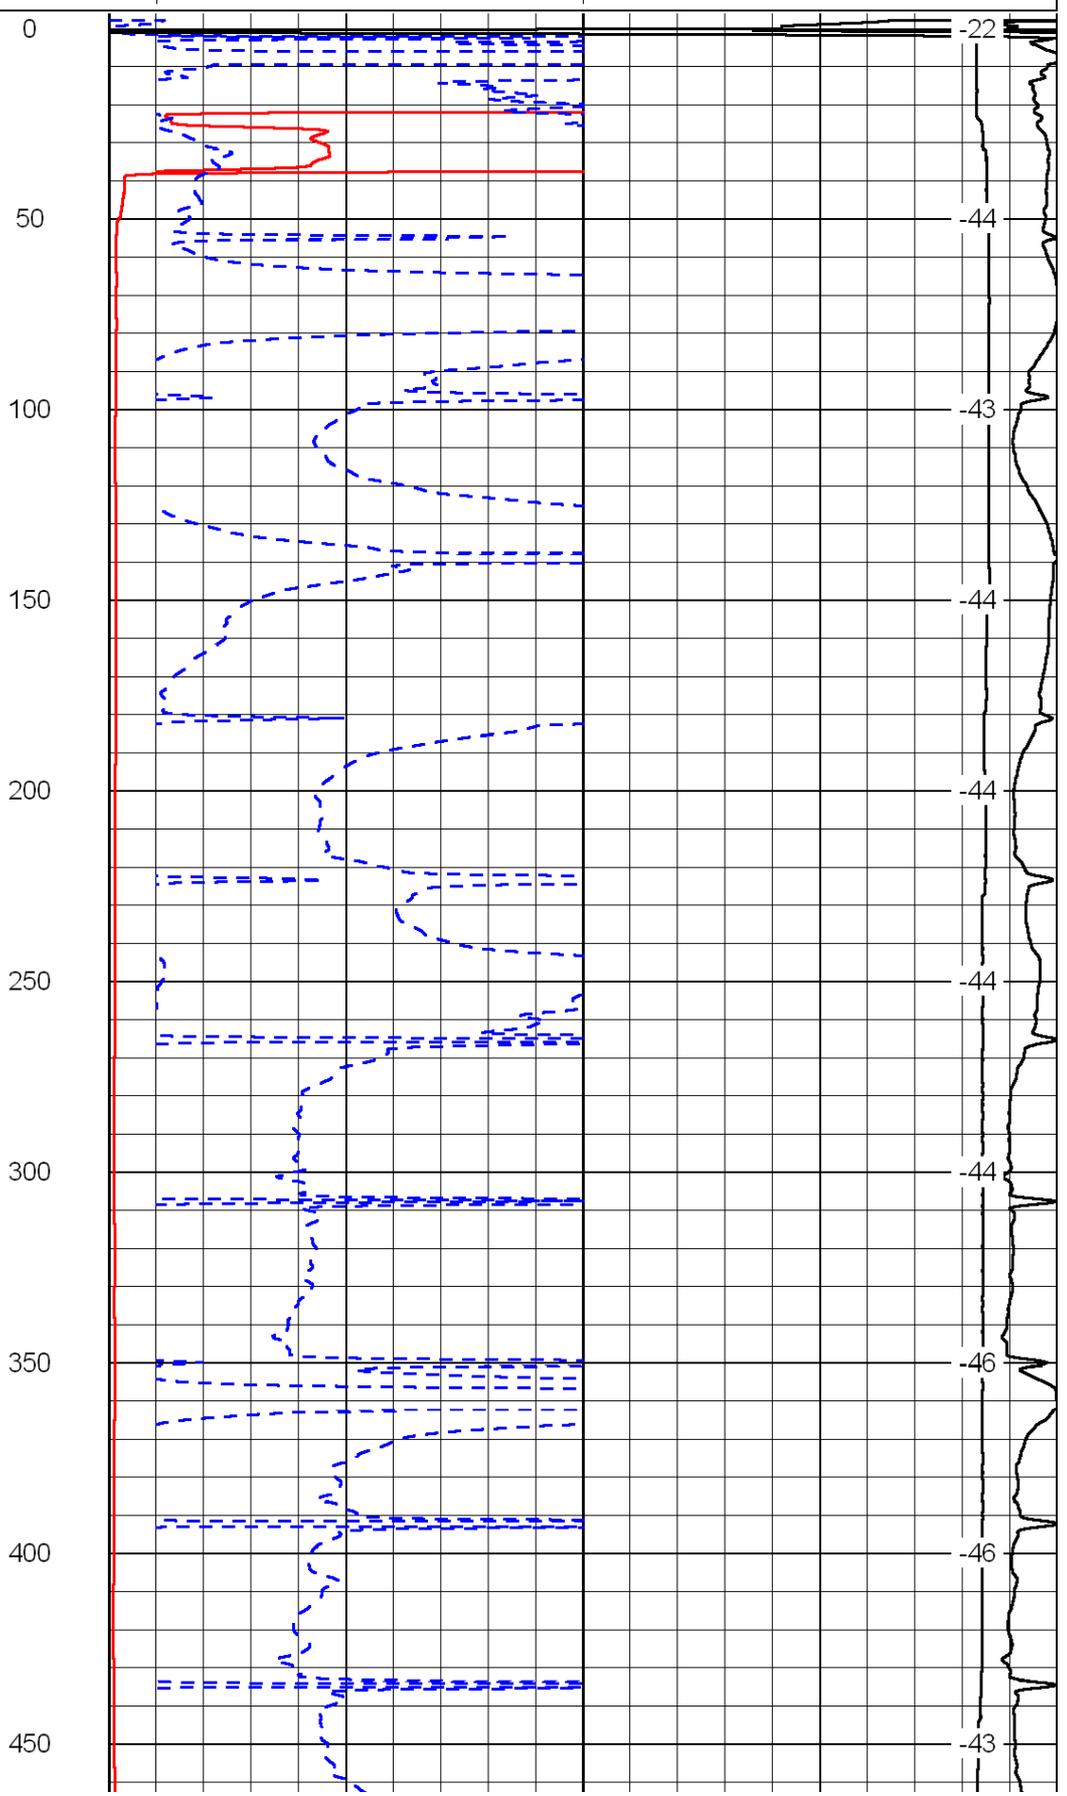
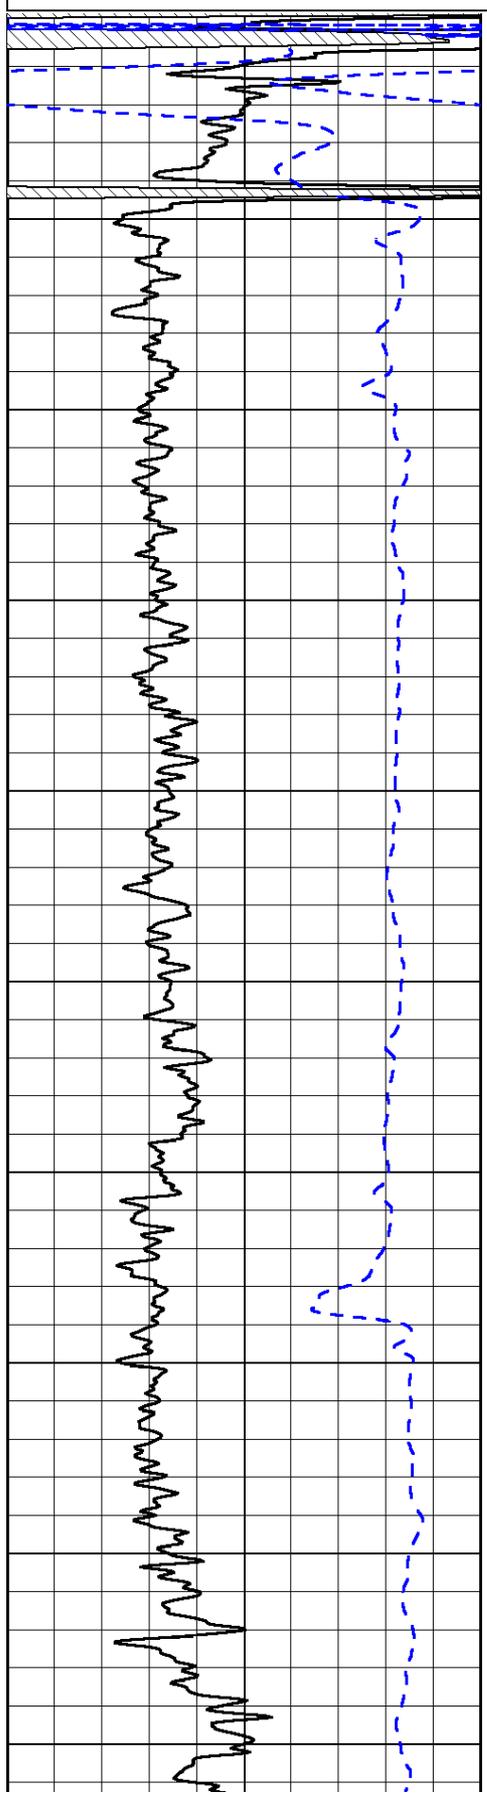


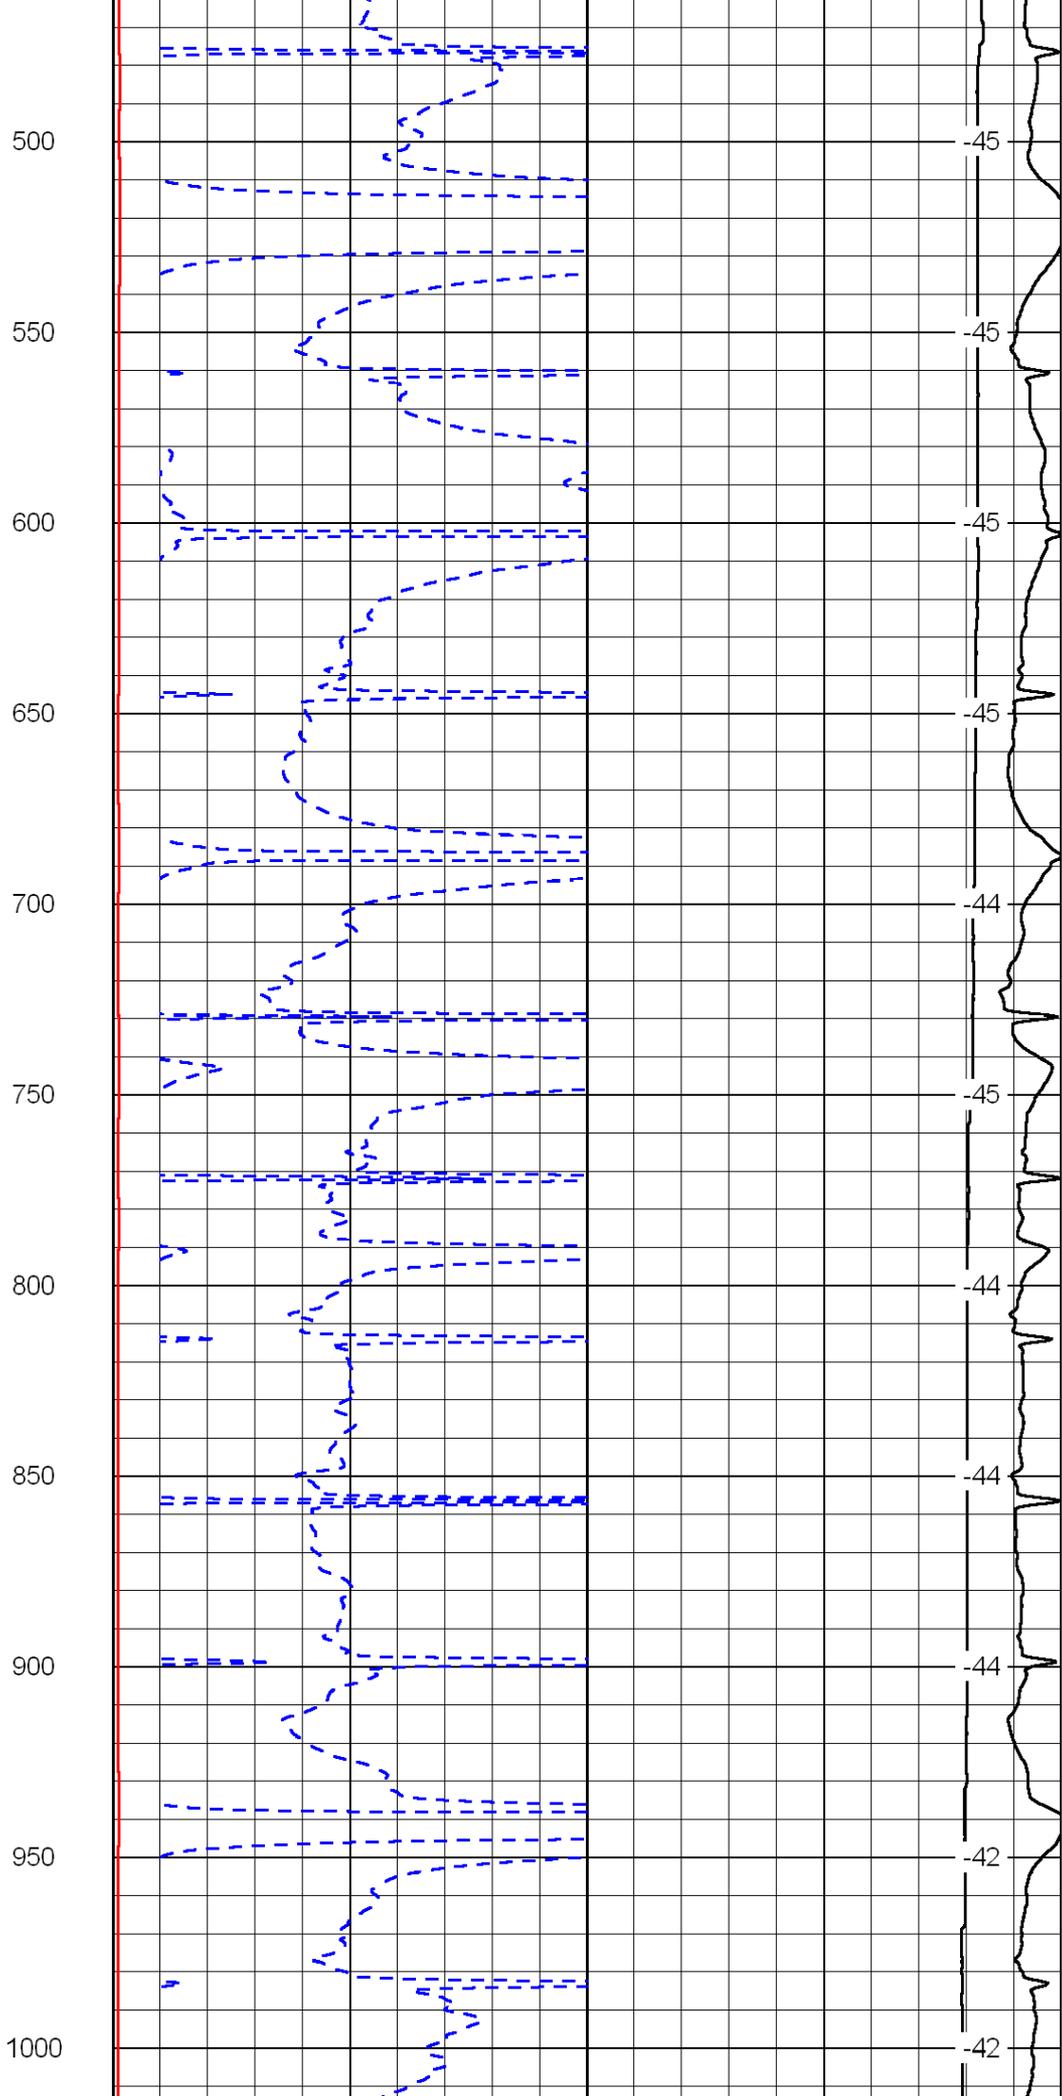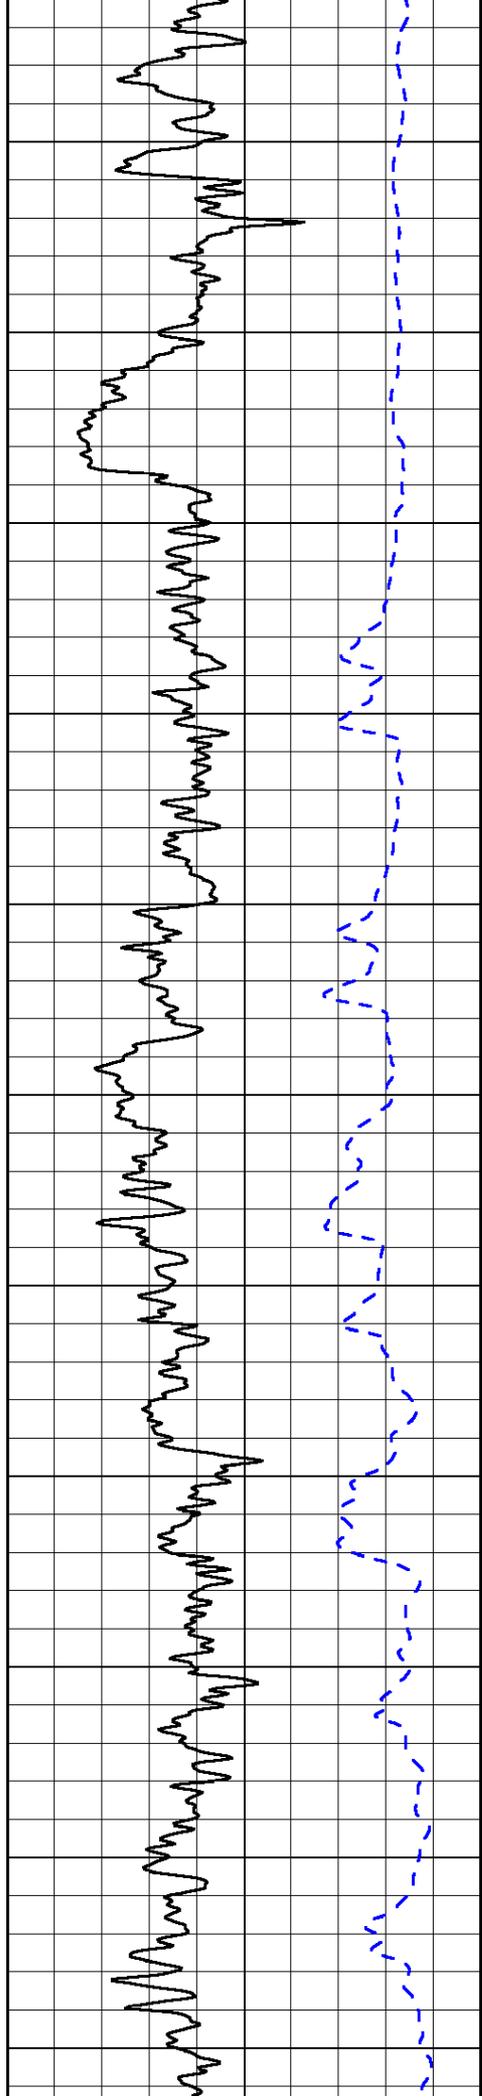



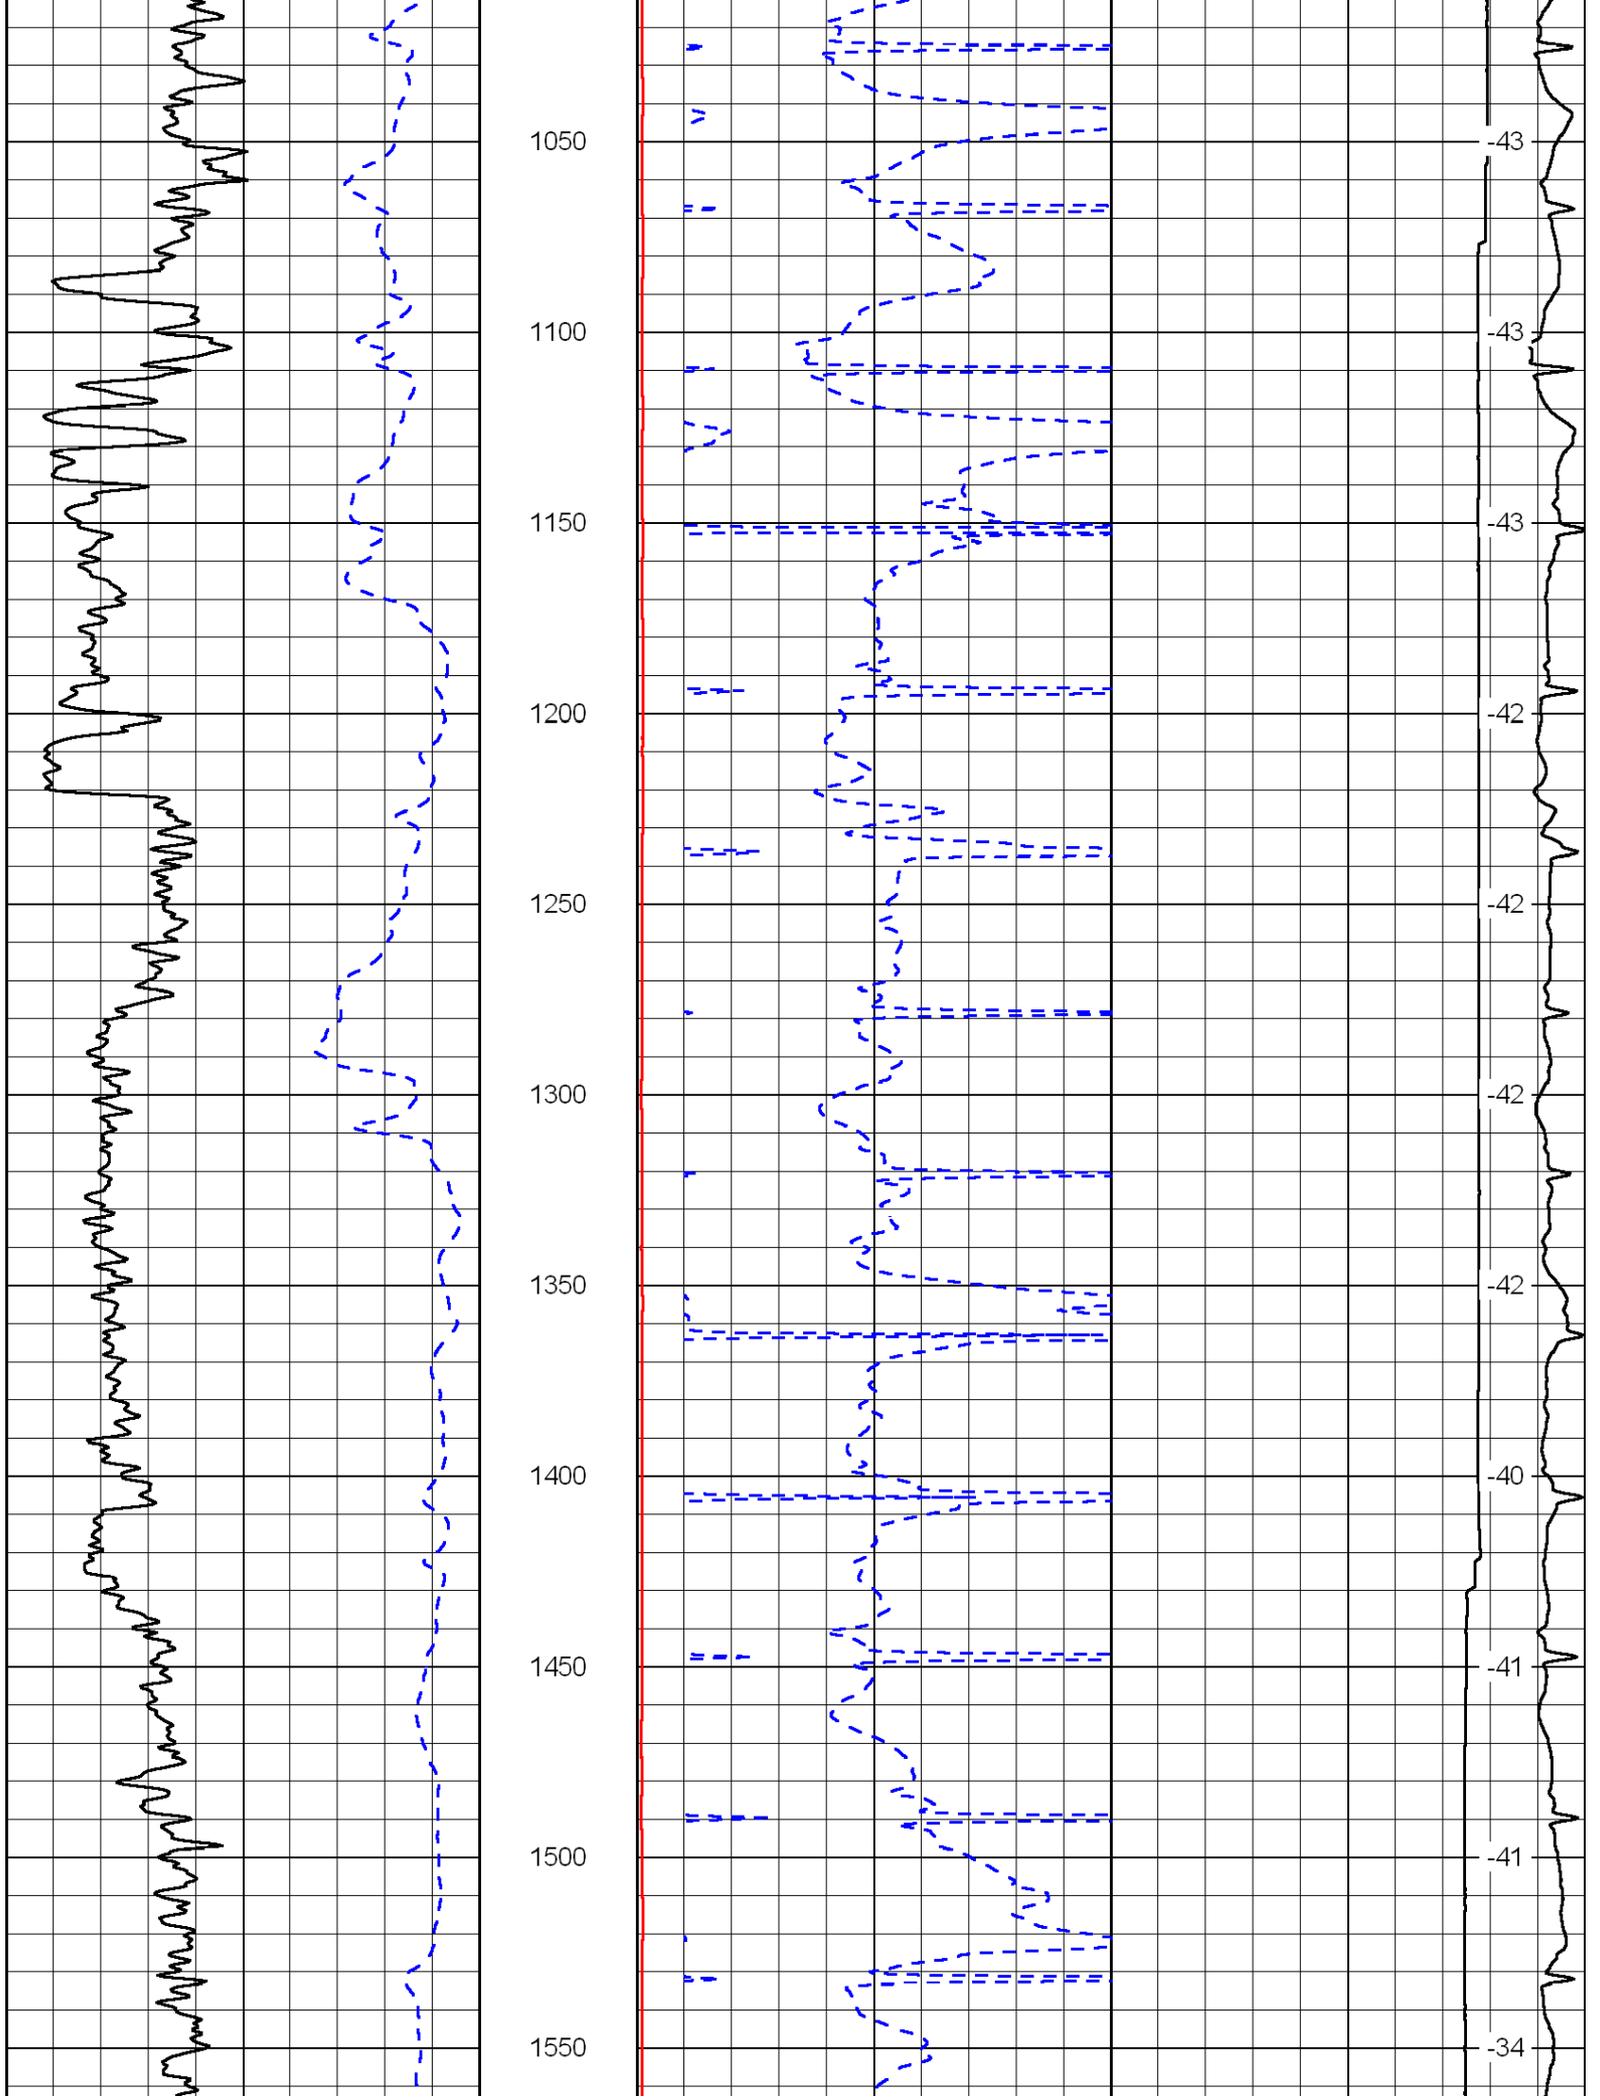



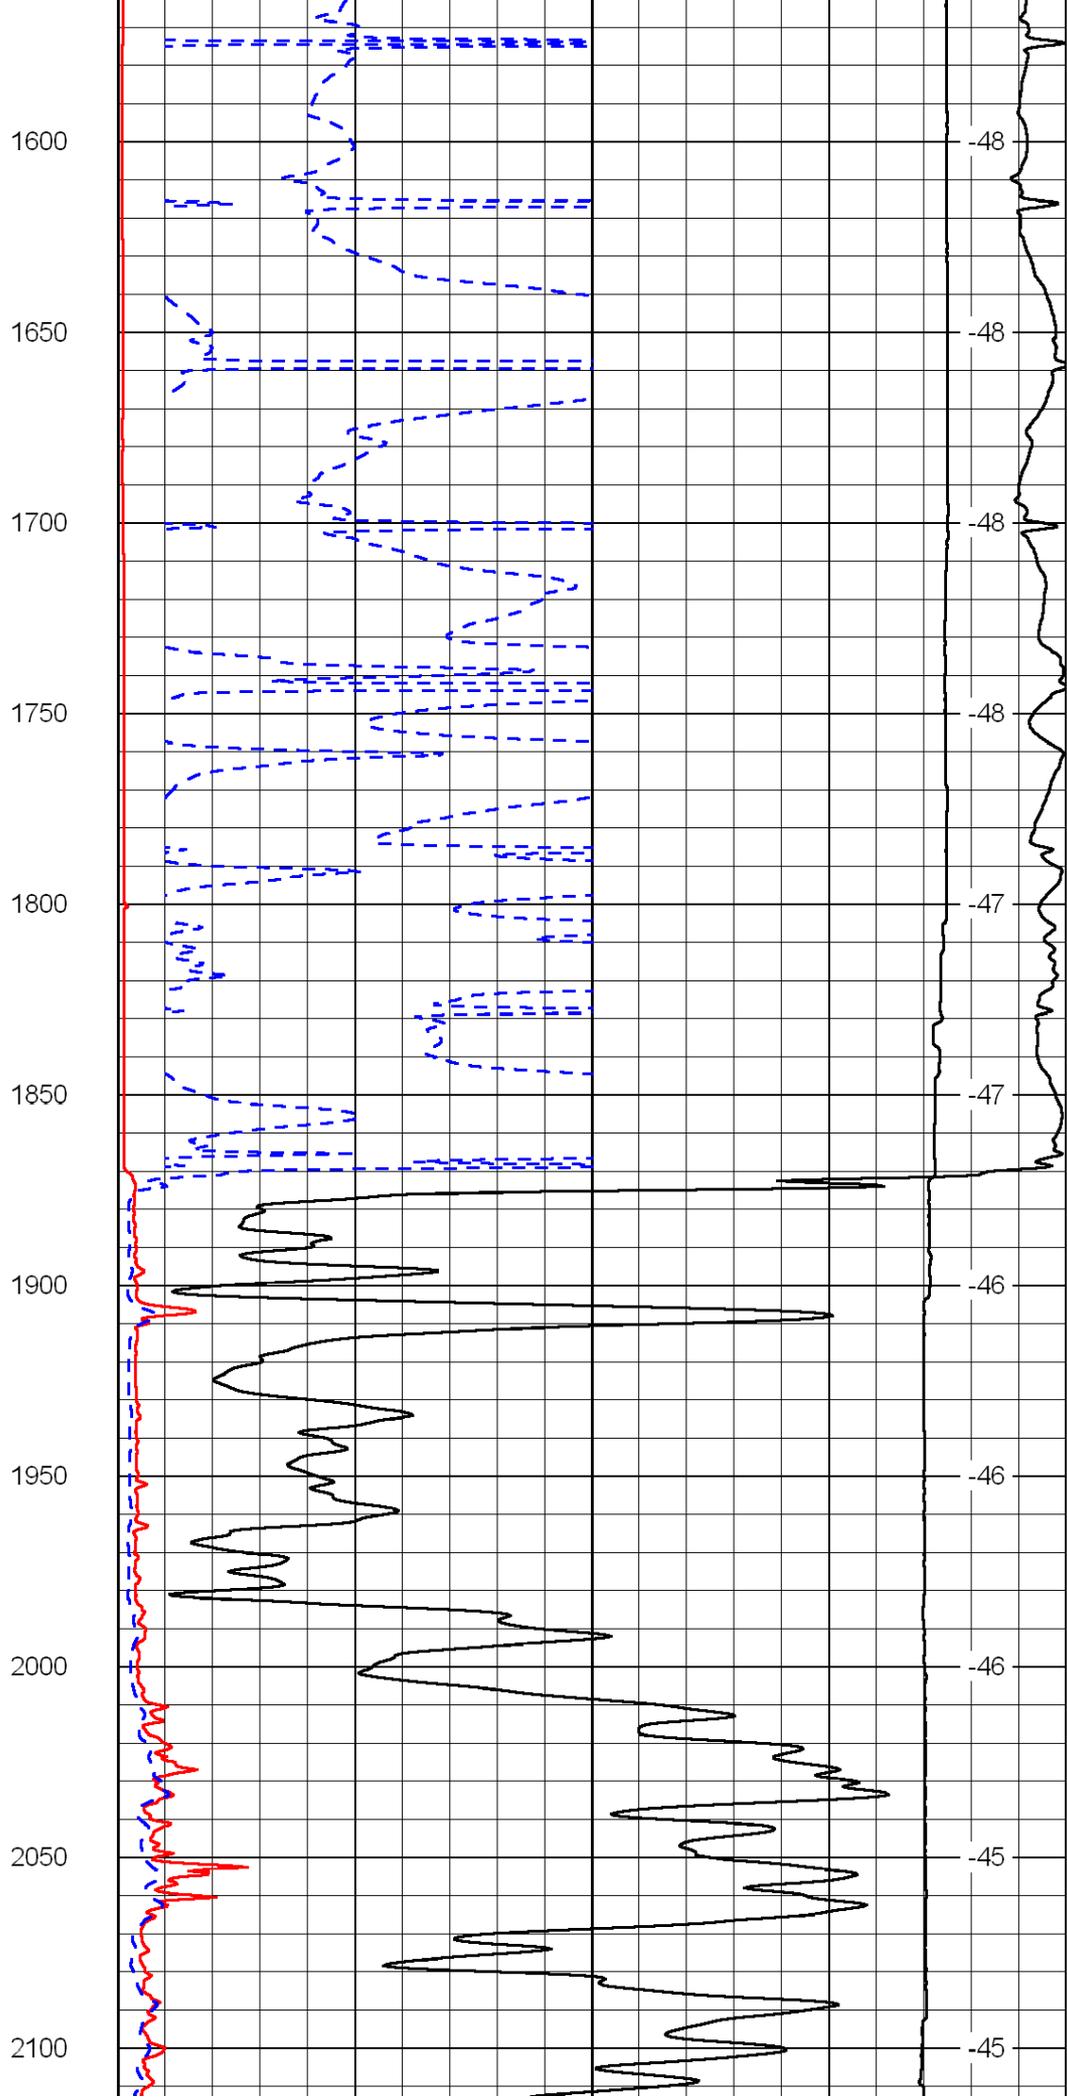
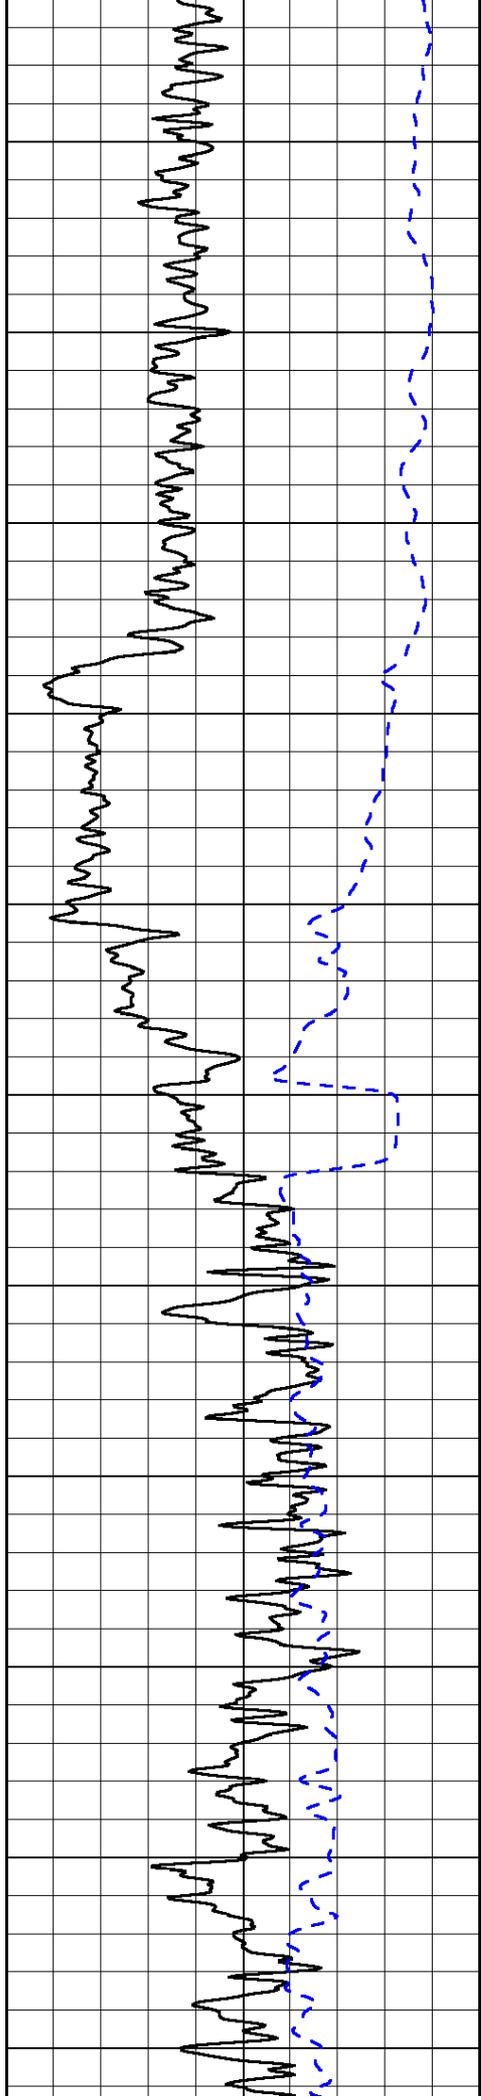


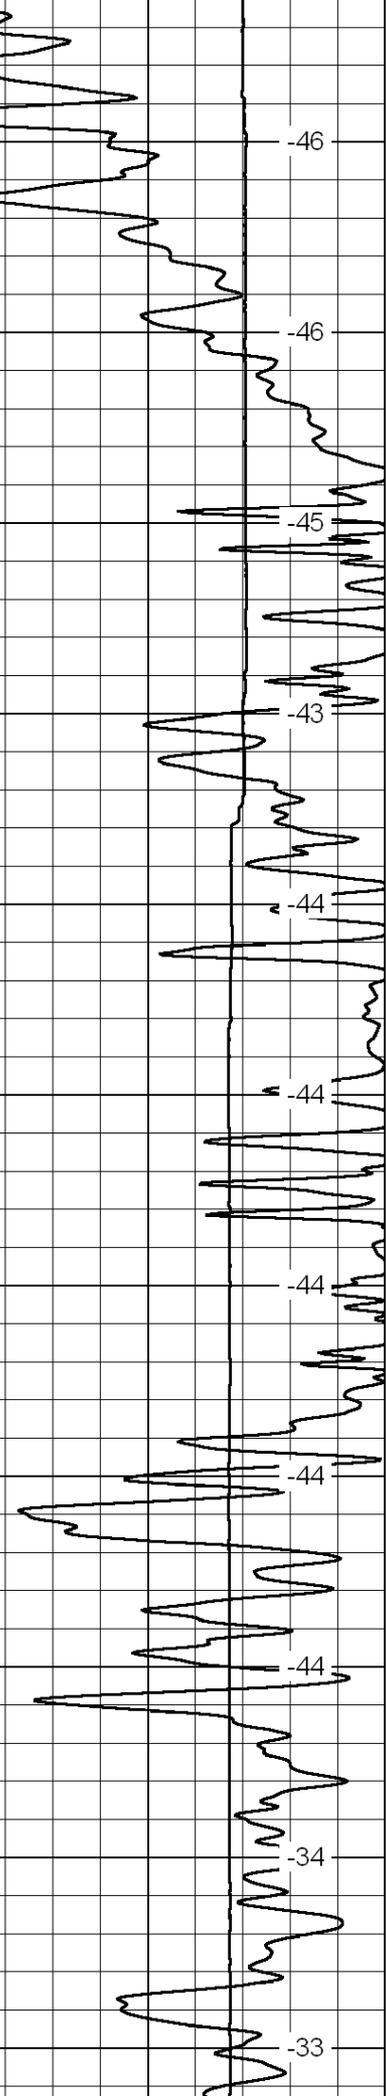
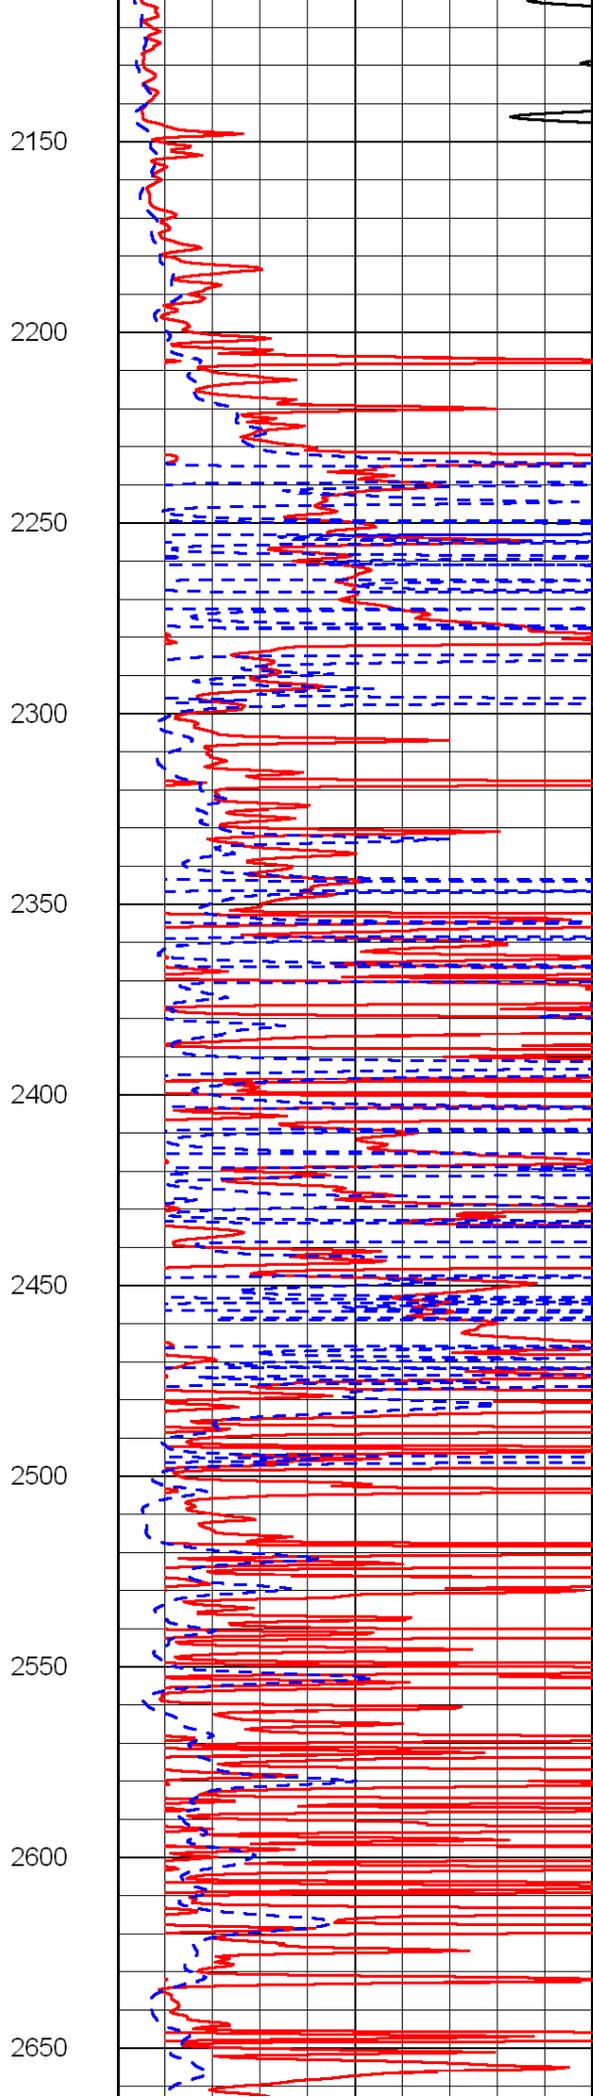
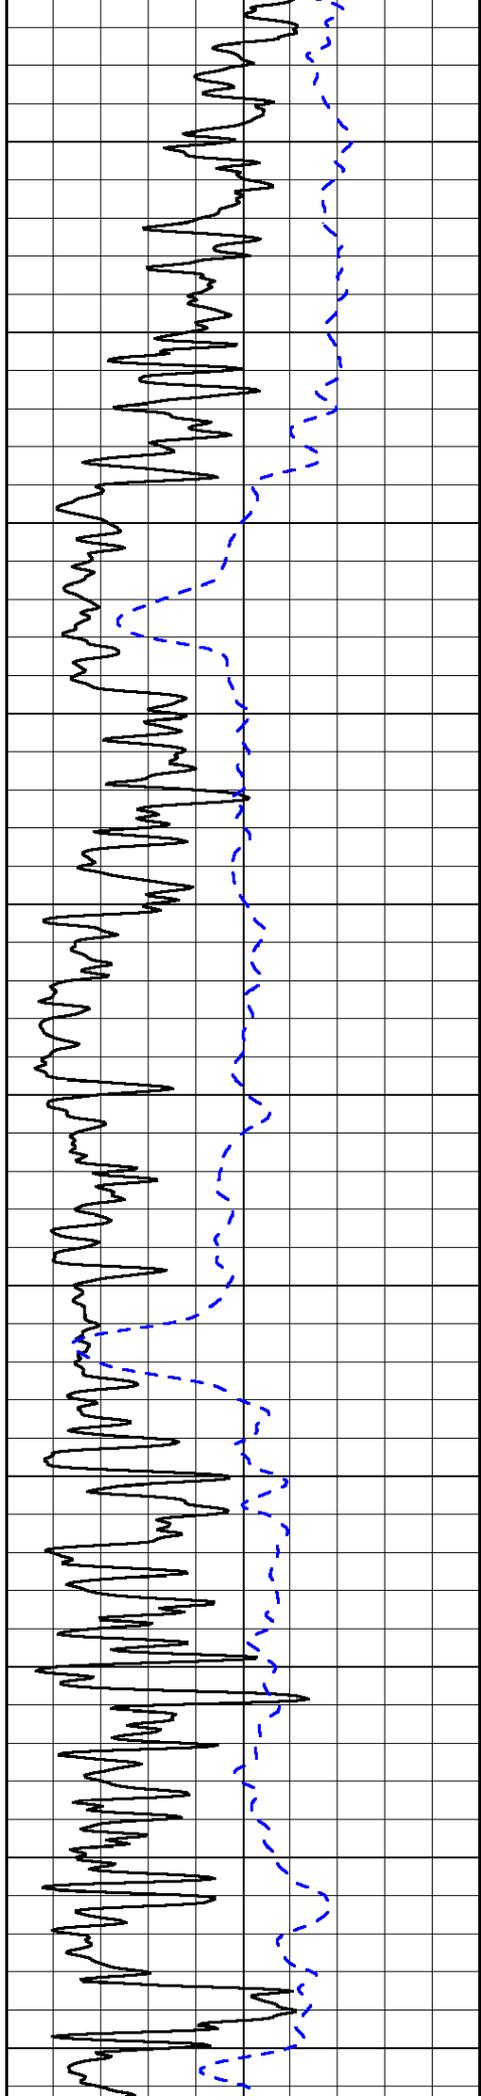


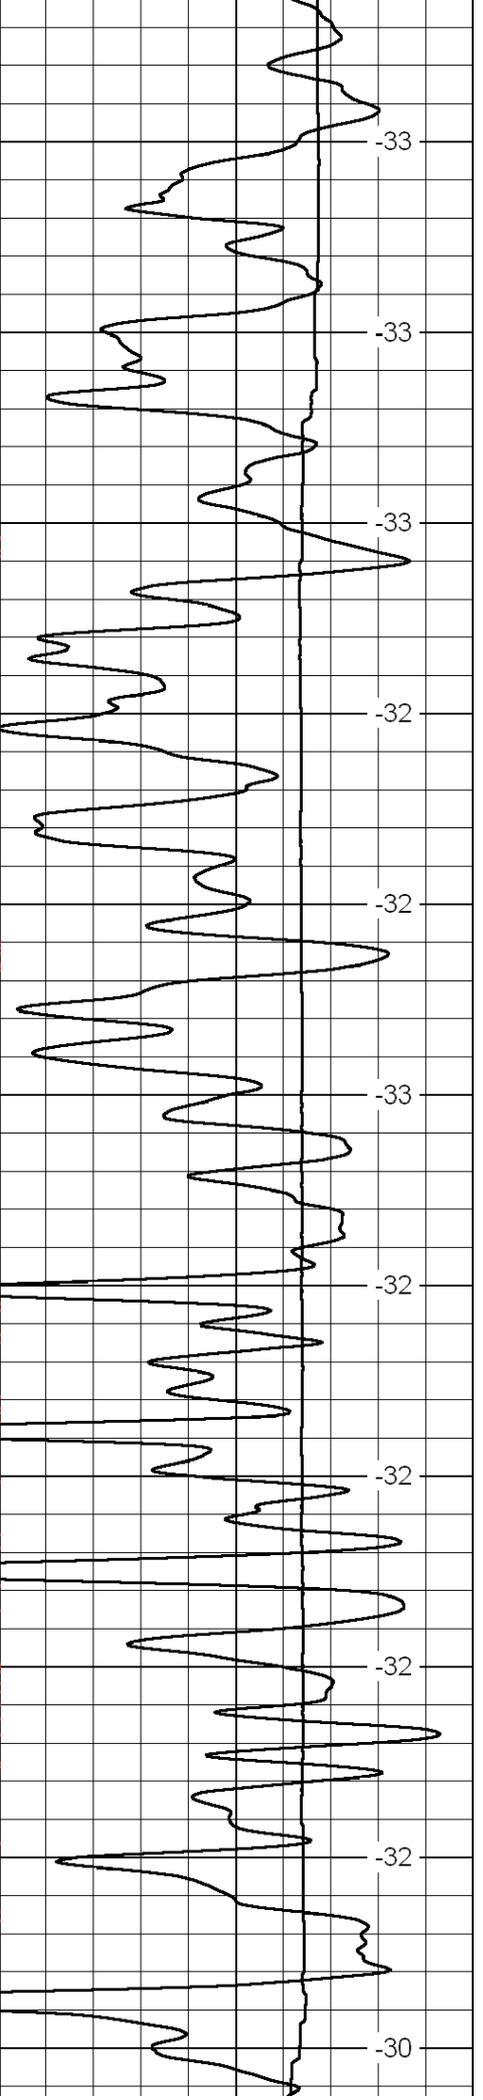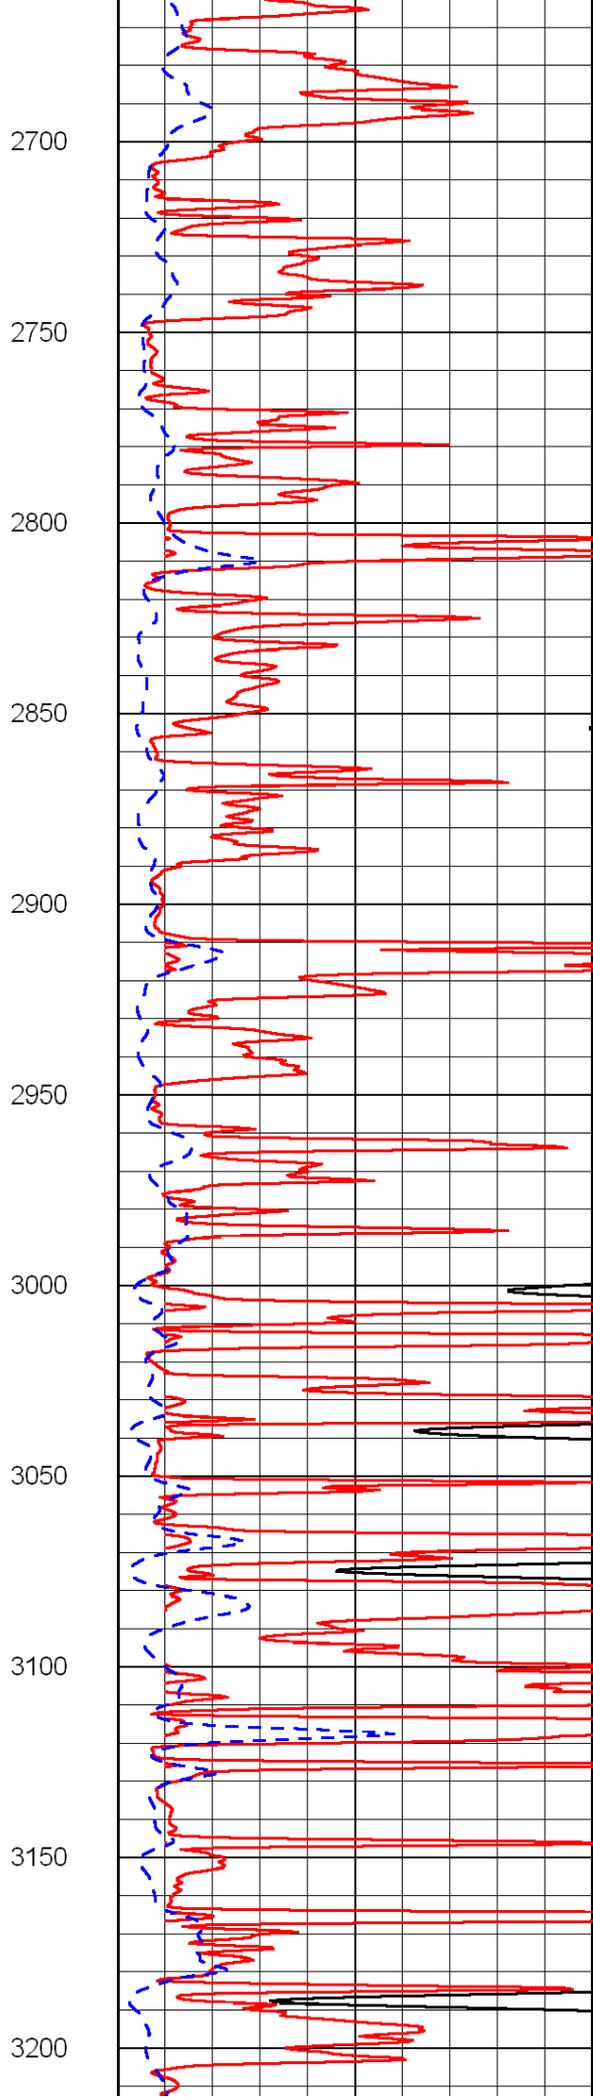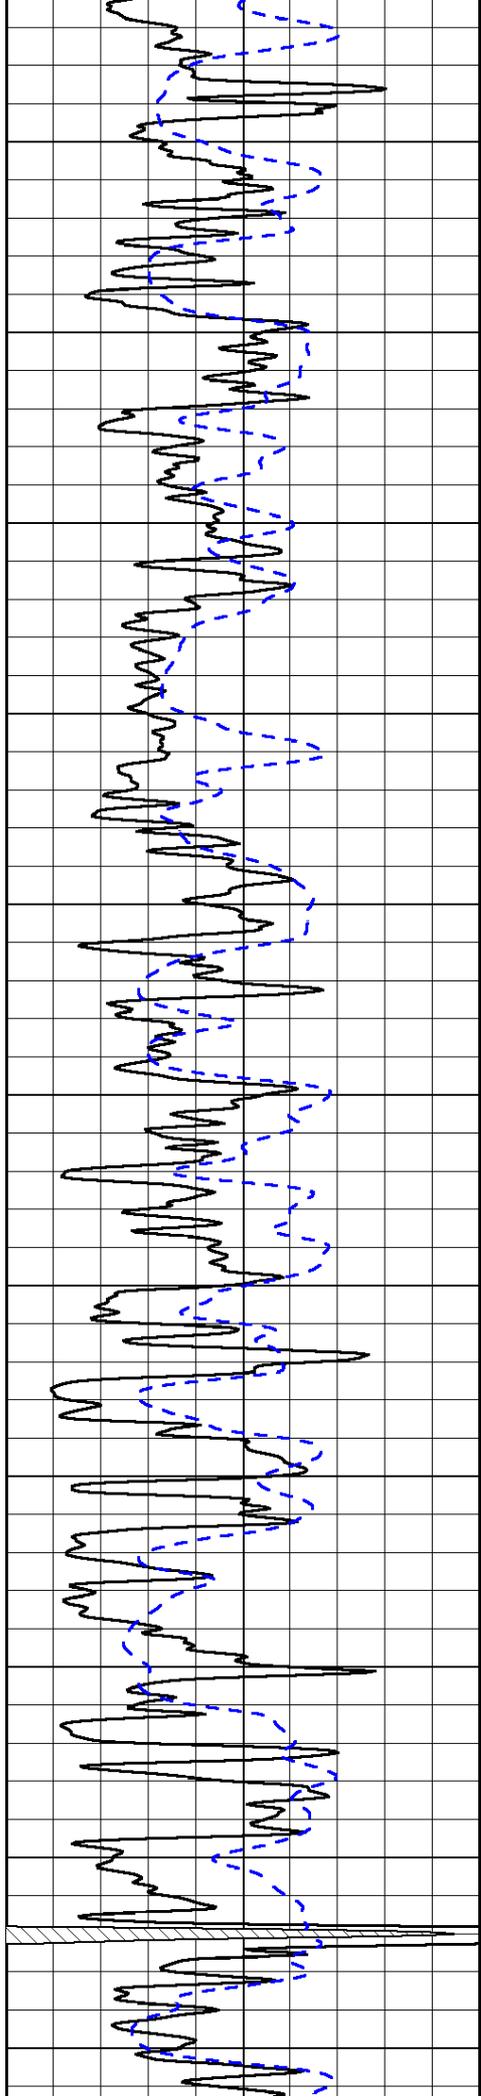


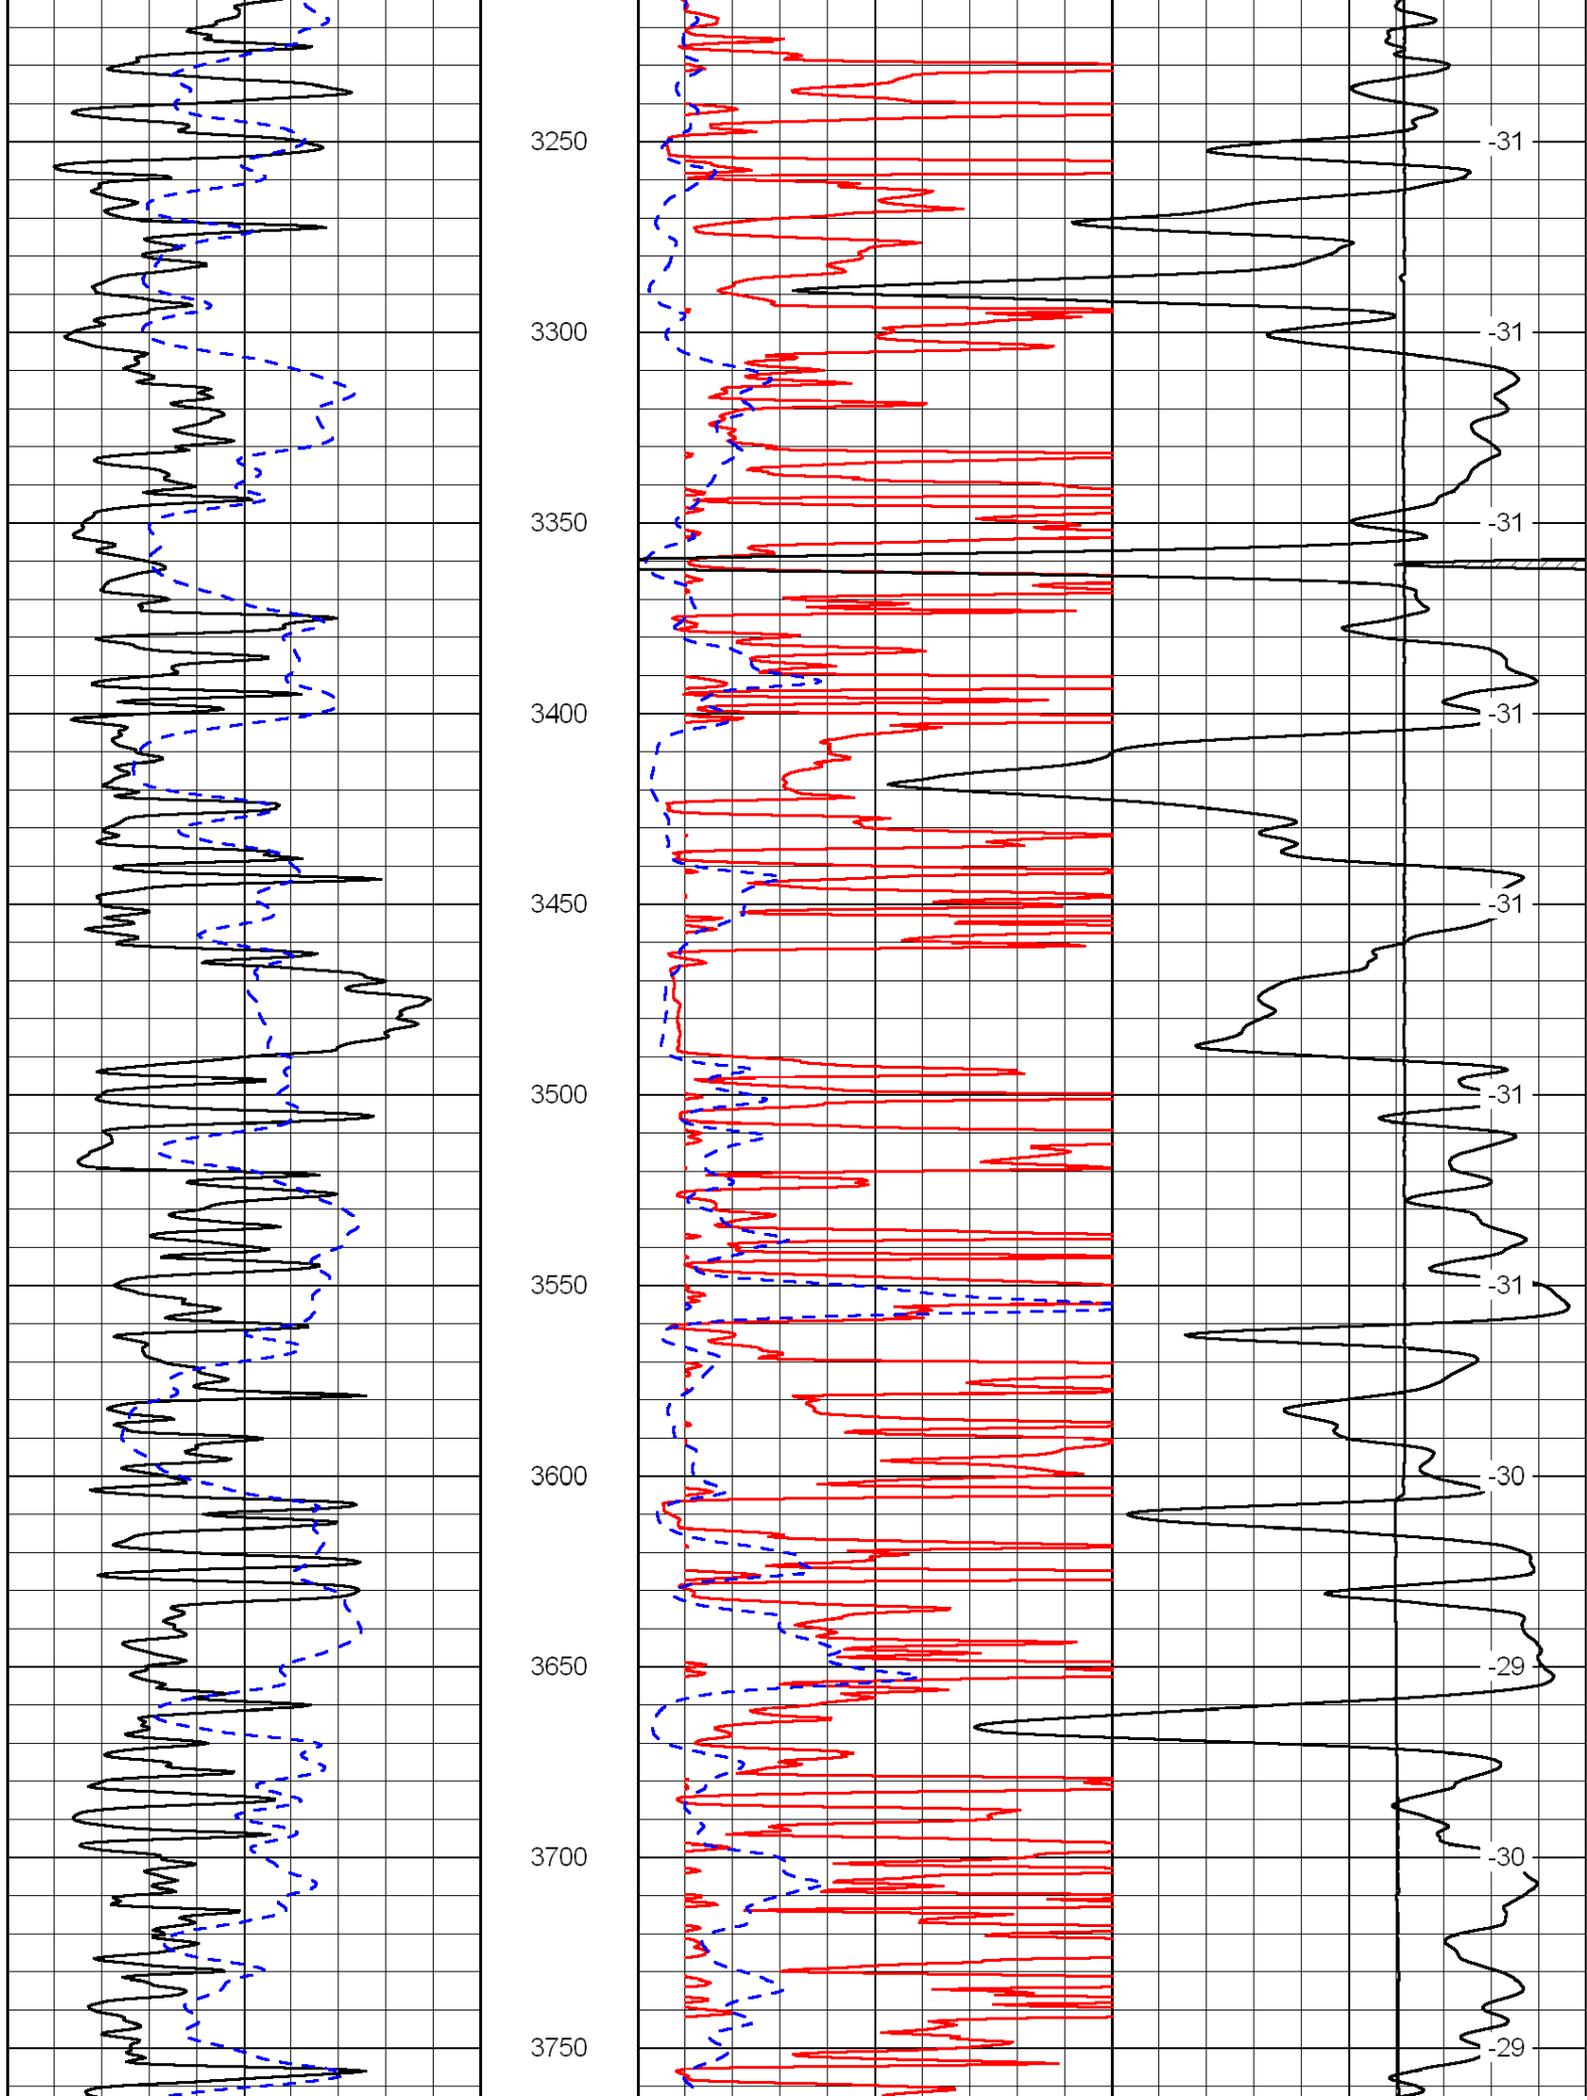


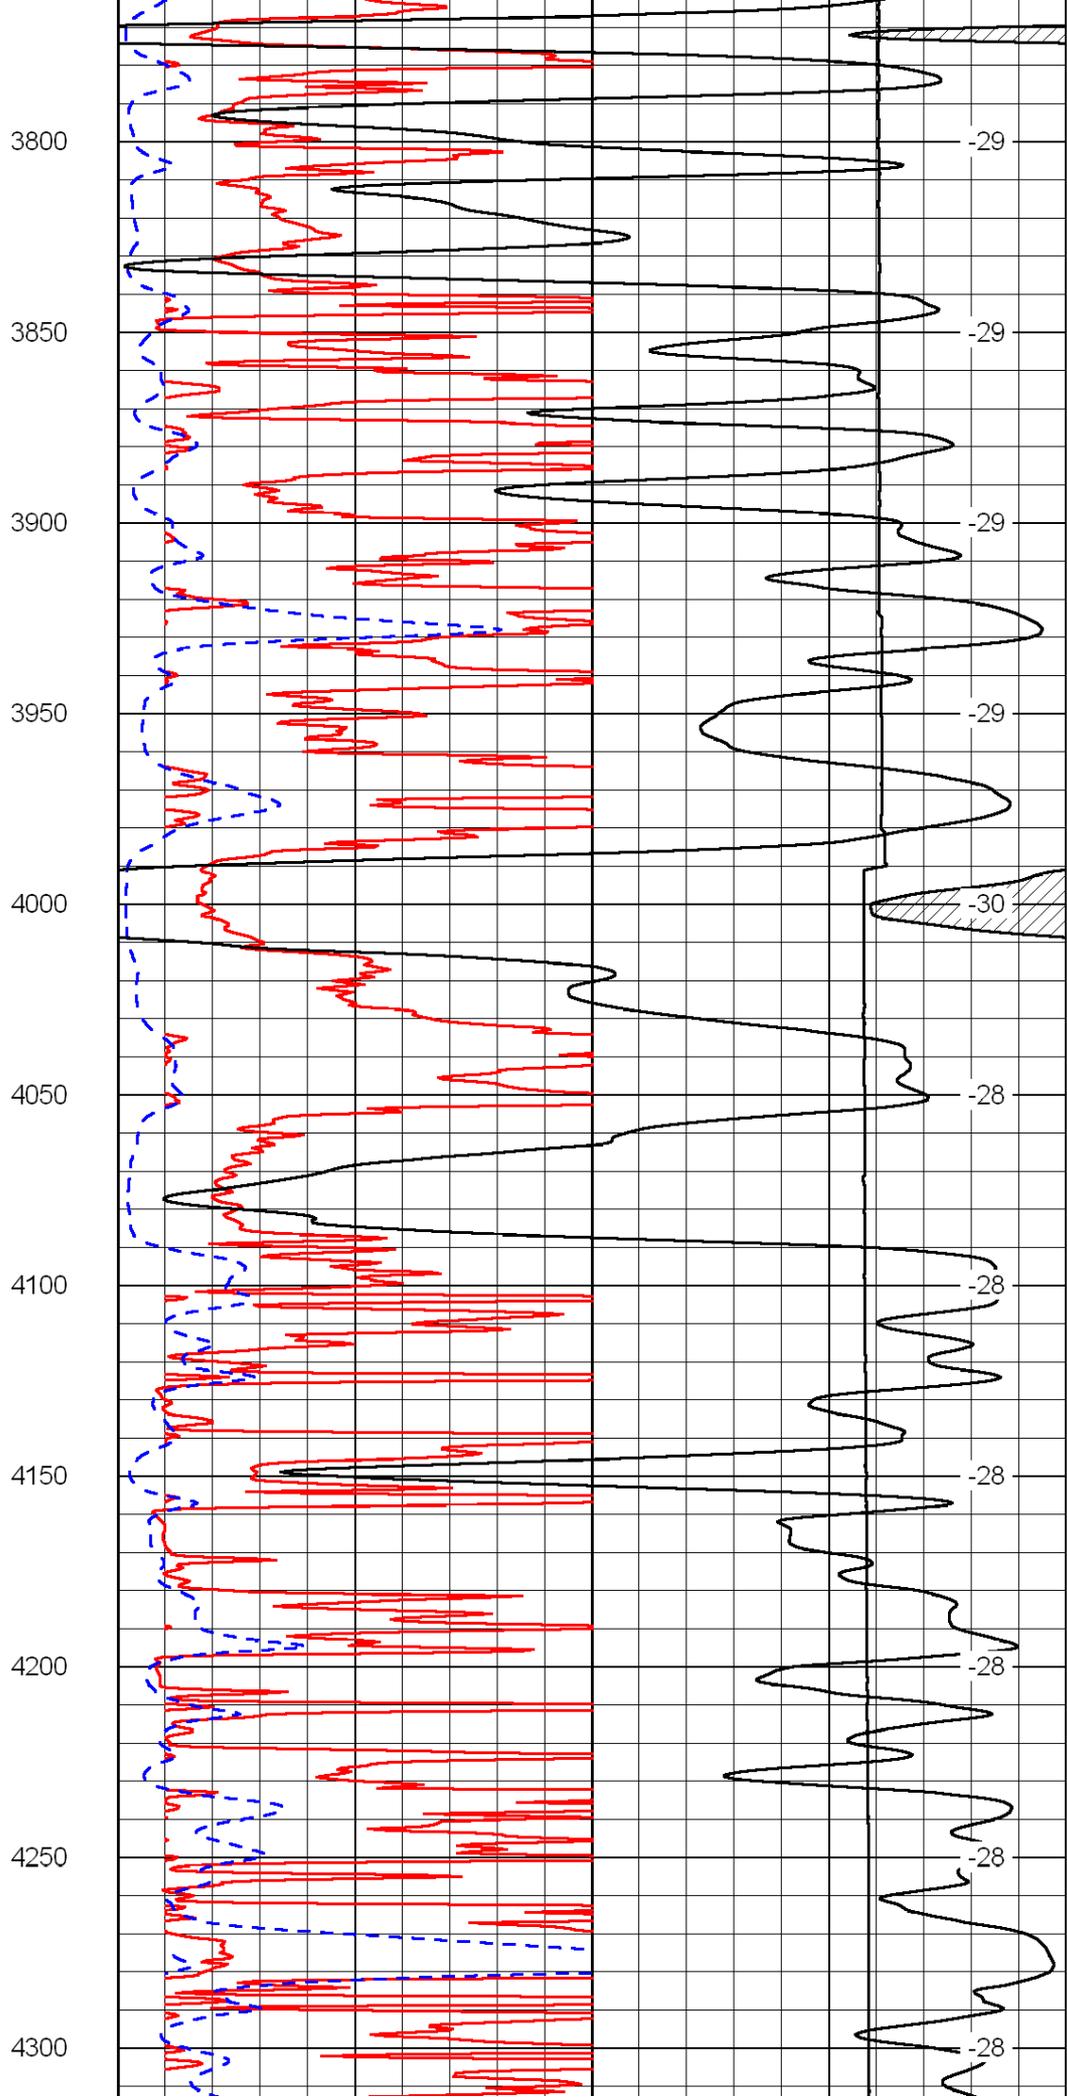
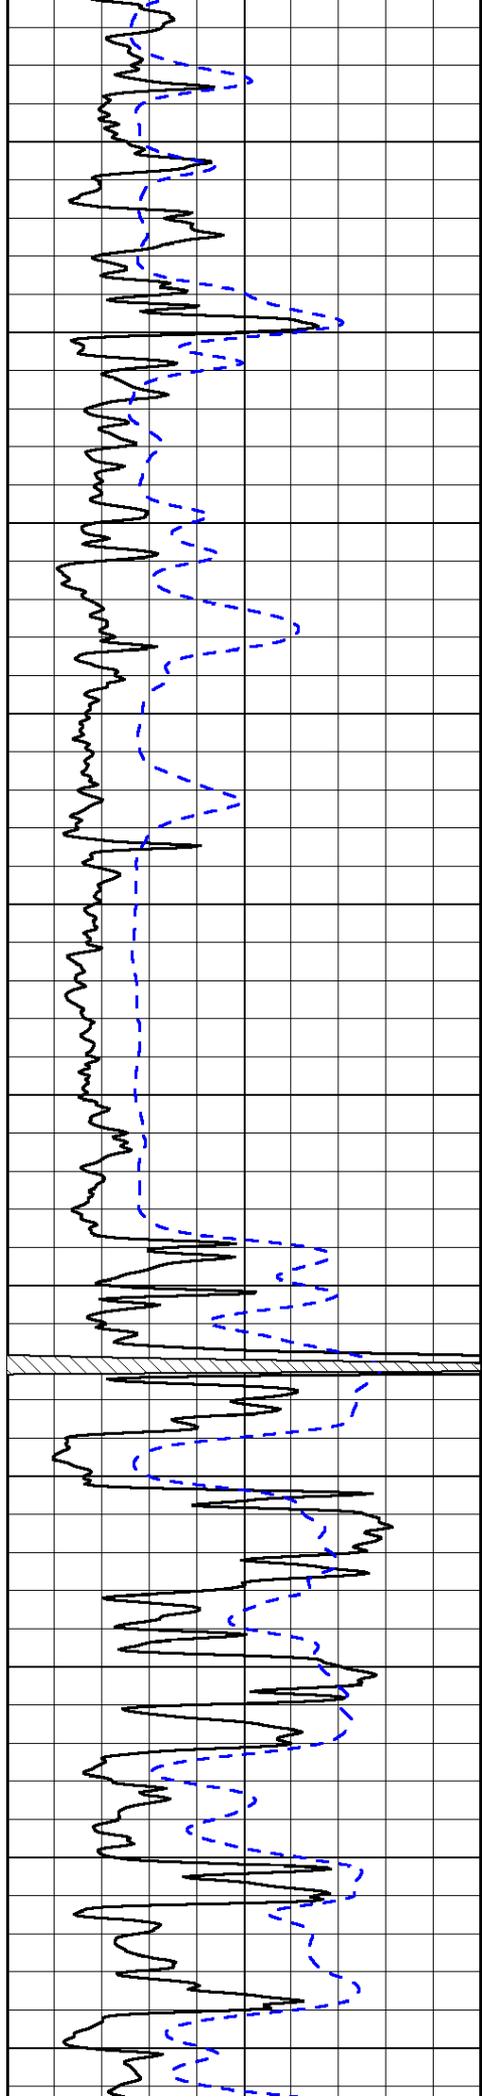


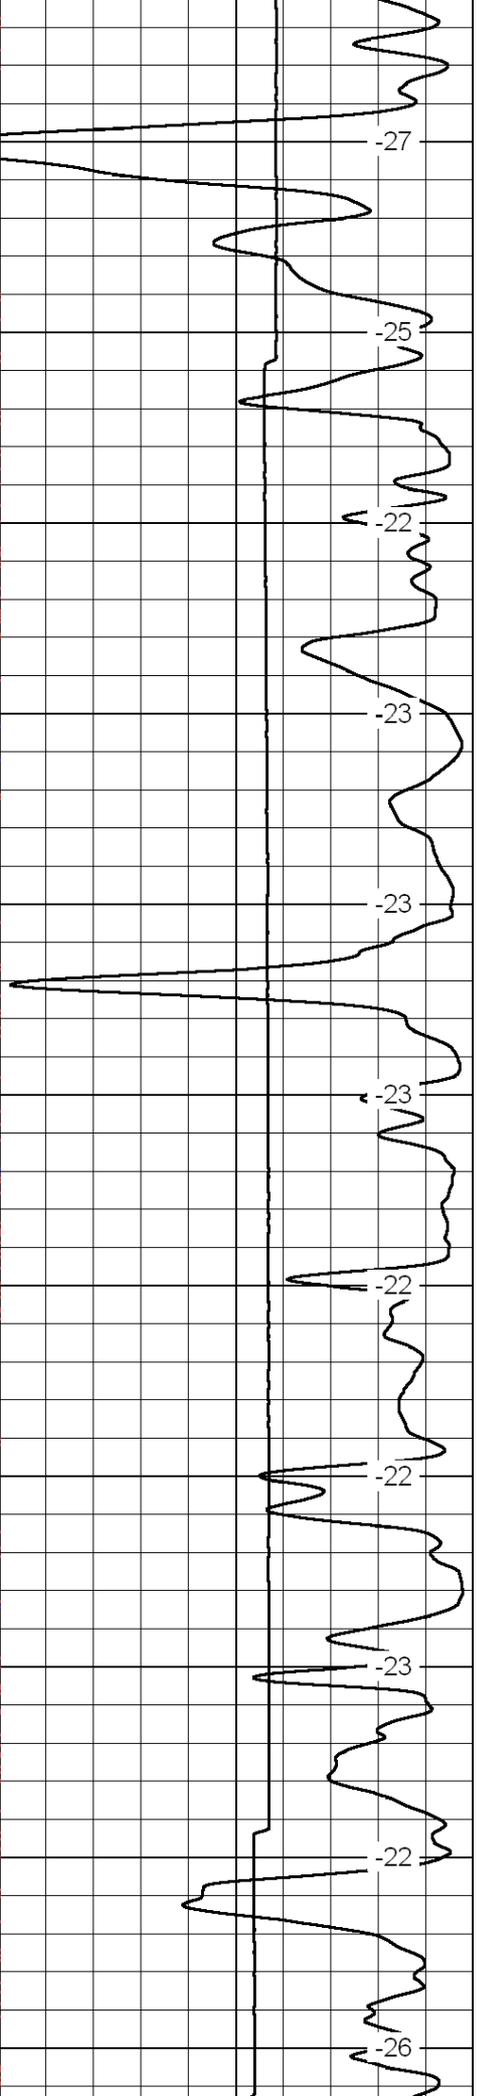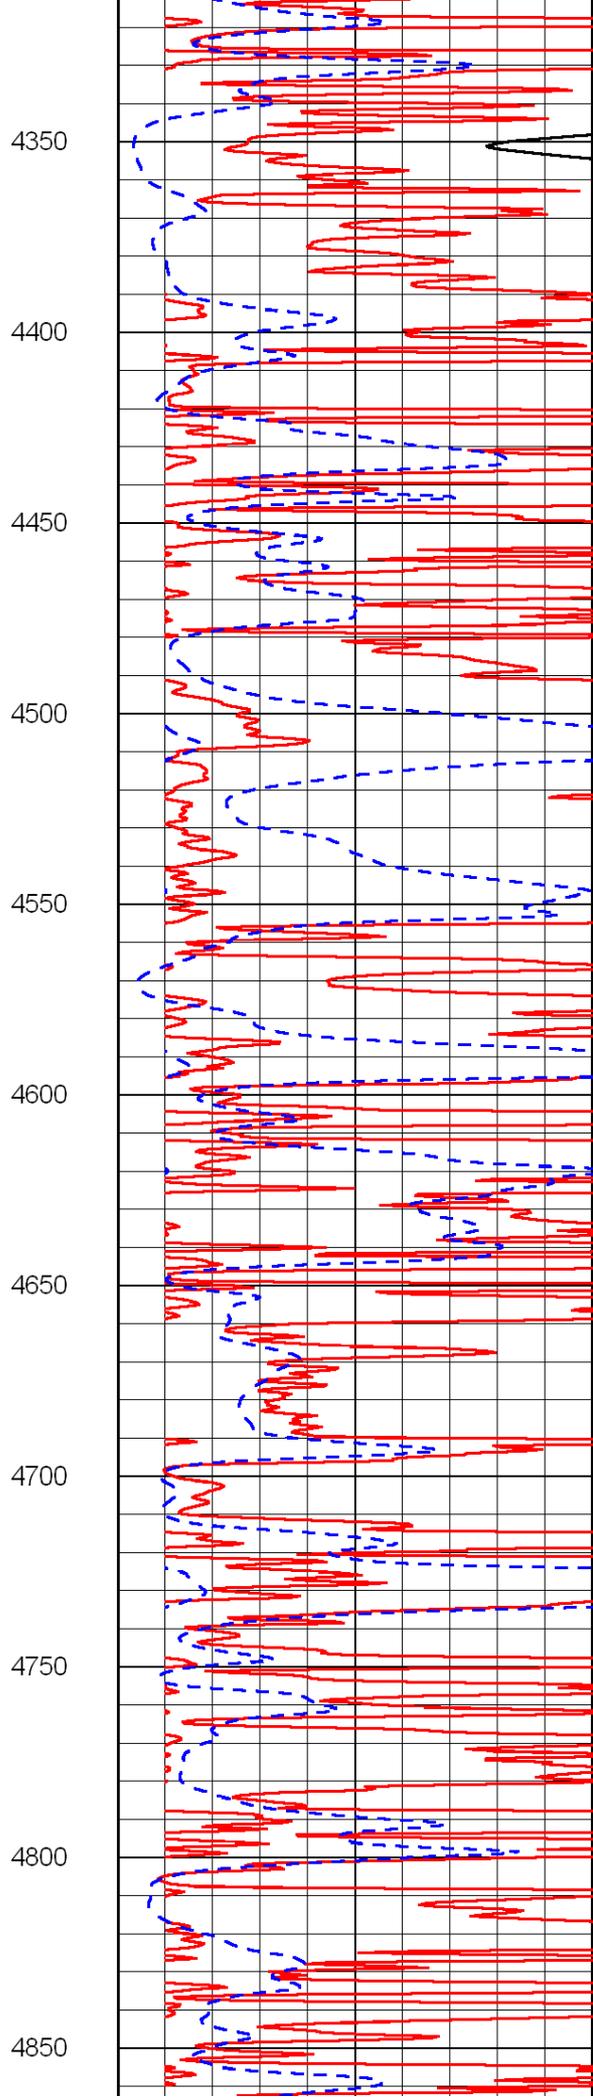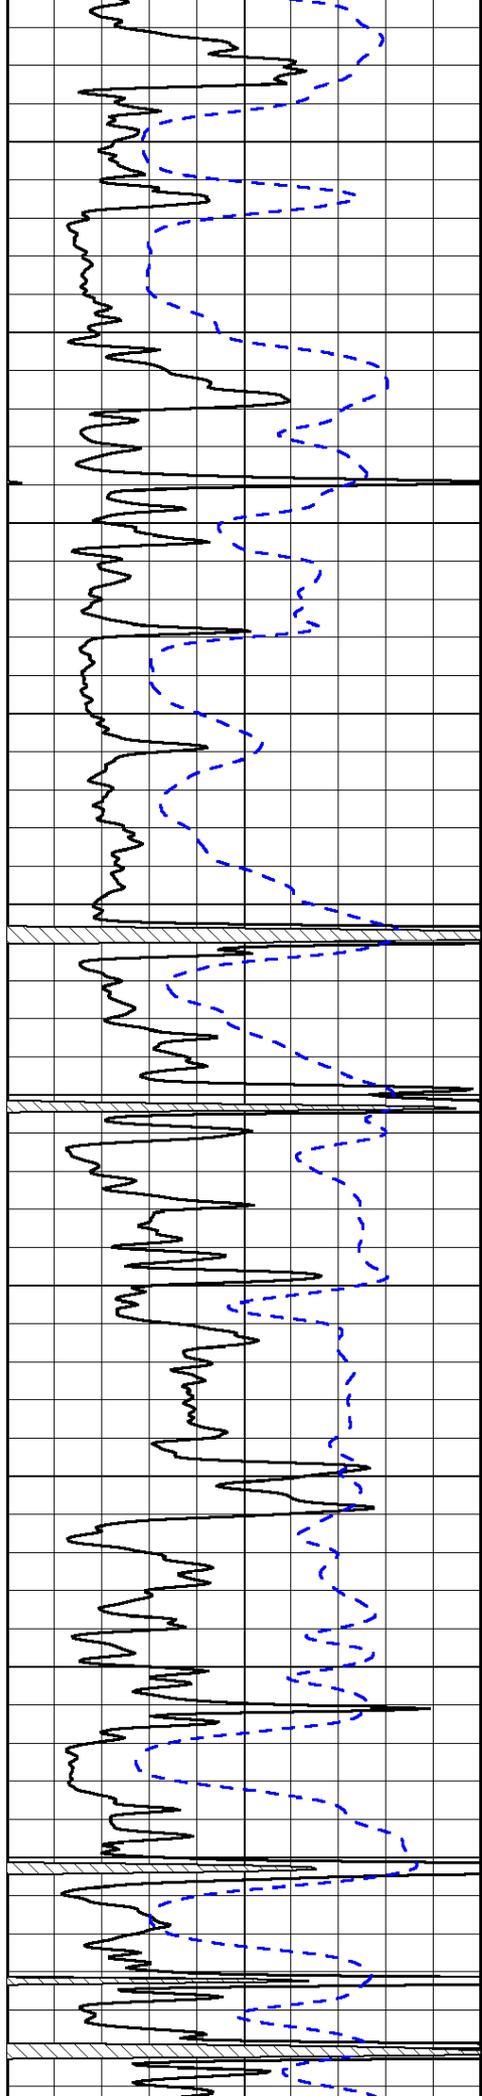


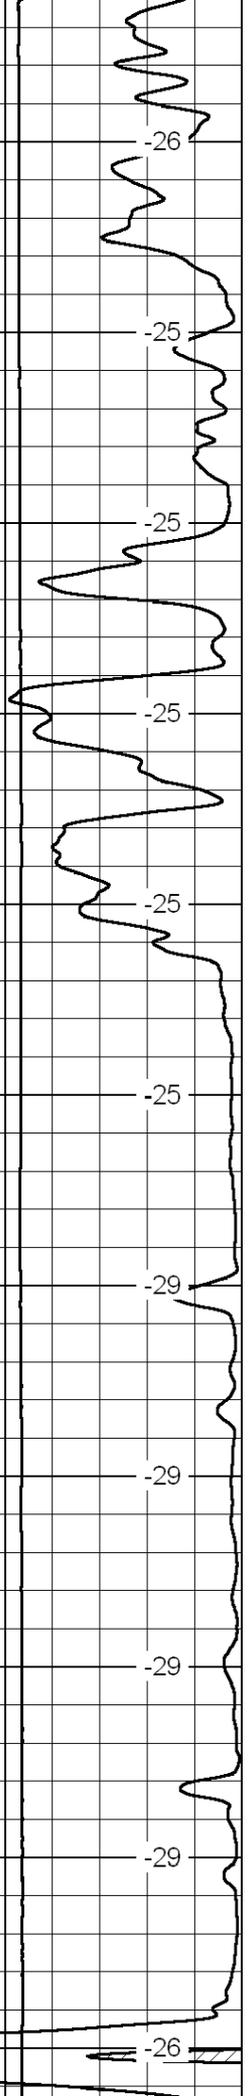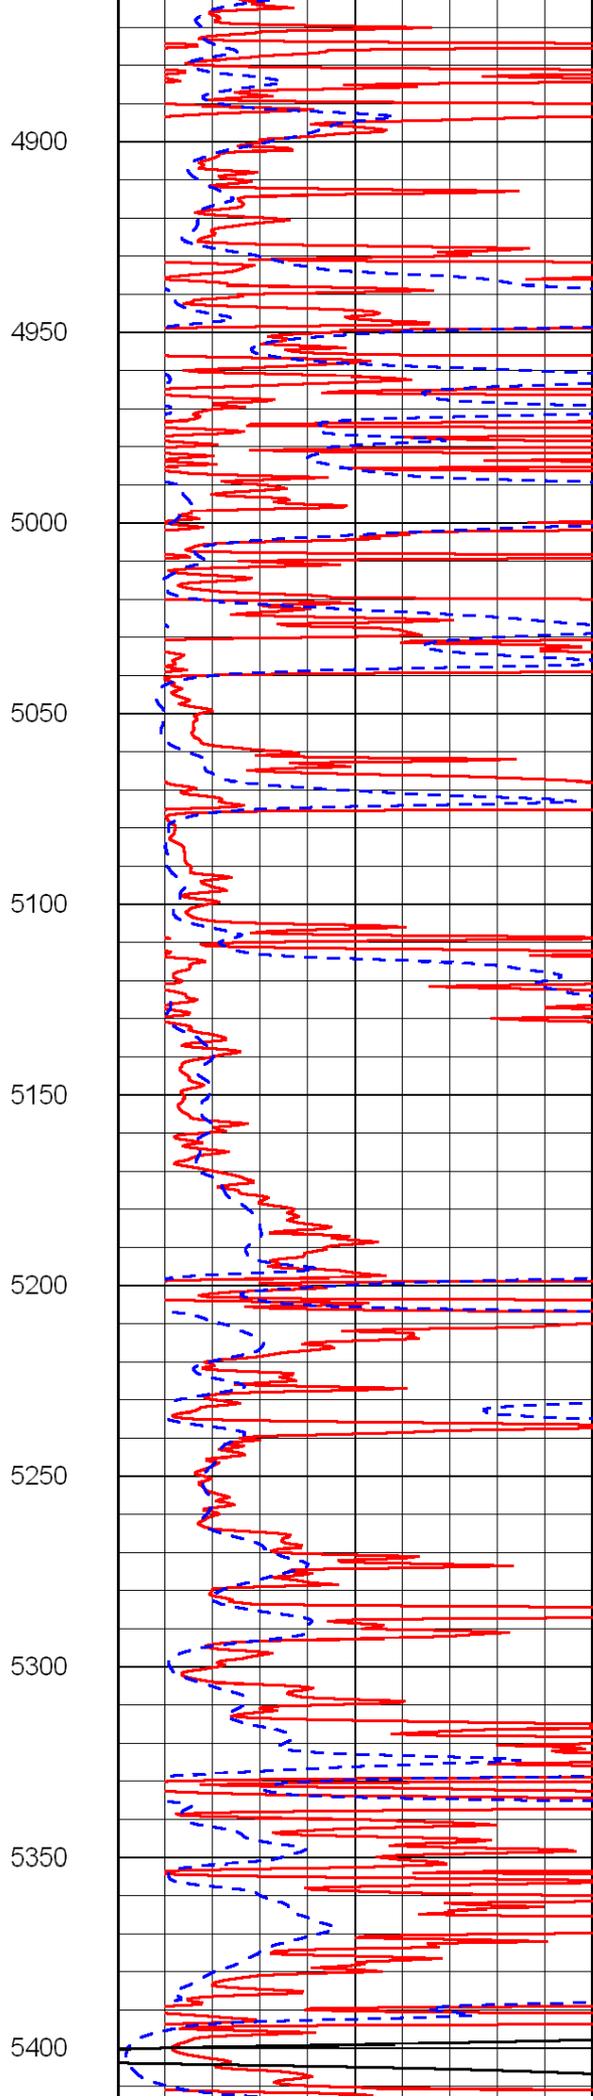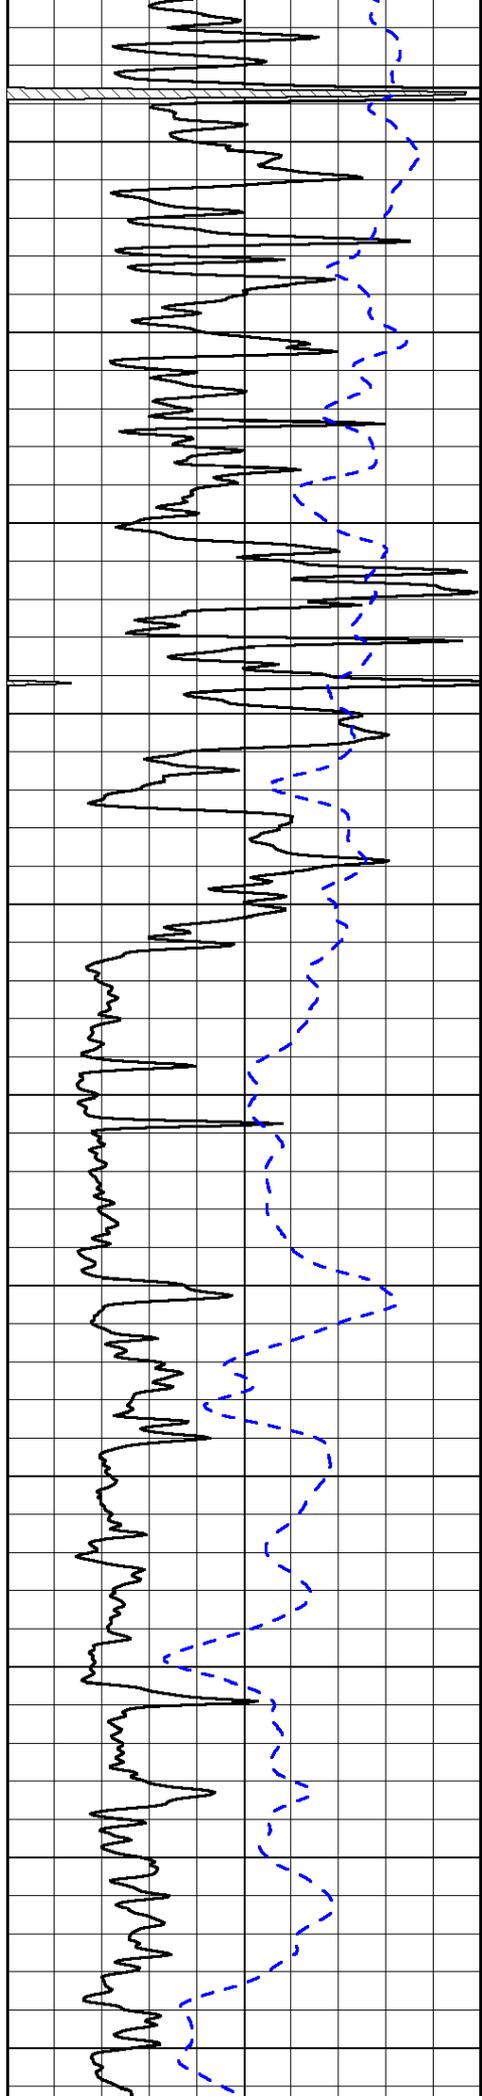

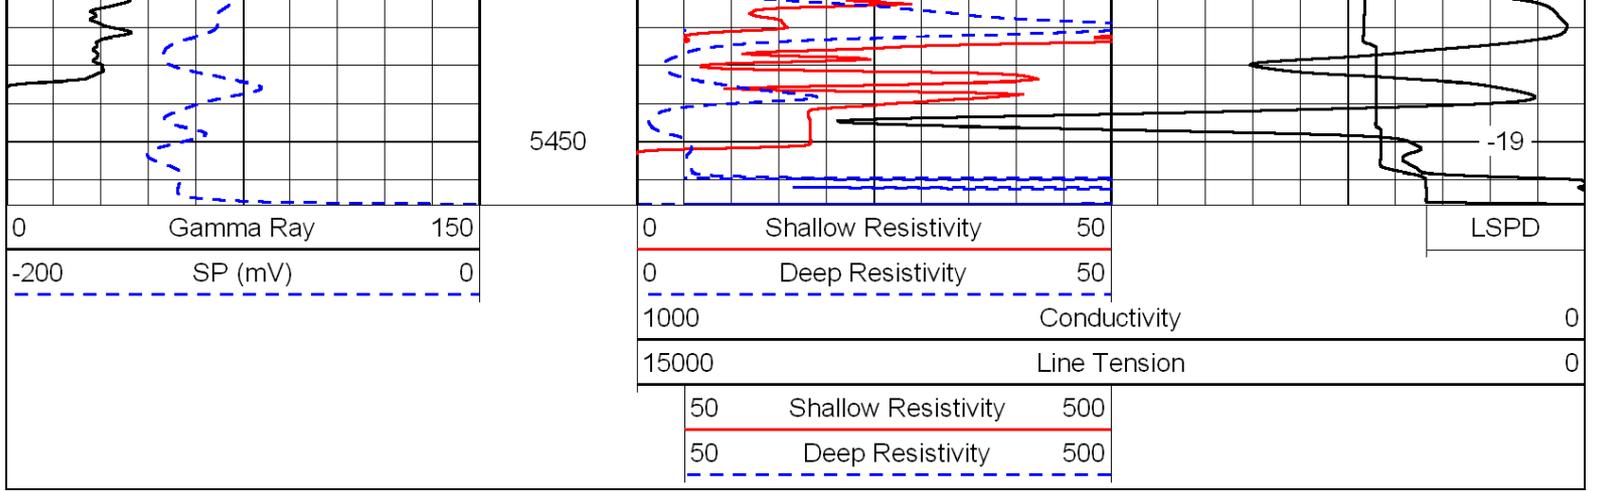

Database File: c:\warrior\data\falcon_andee fry no. 1-2\falcon011411hd.db
 Dataset Pathname: dil/falcstack
 Presentation Format: dil
 Dataset Creation: Fri Jan 14 13:07:33 2011
 Charted by: Depth in Feet scaled 1:240

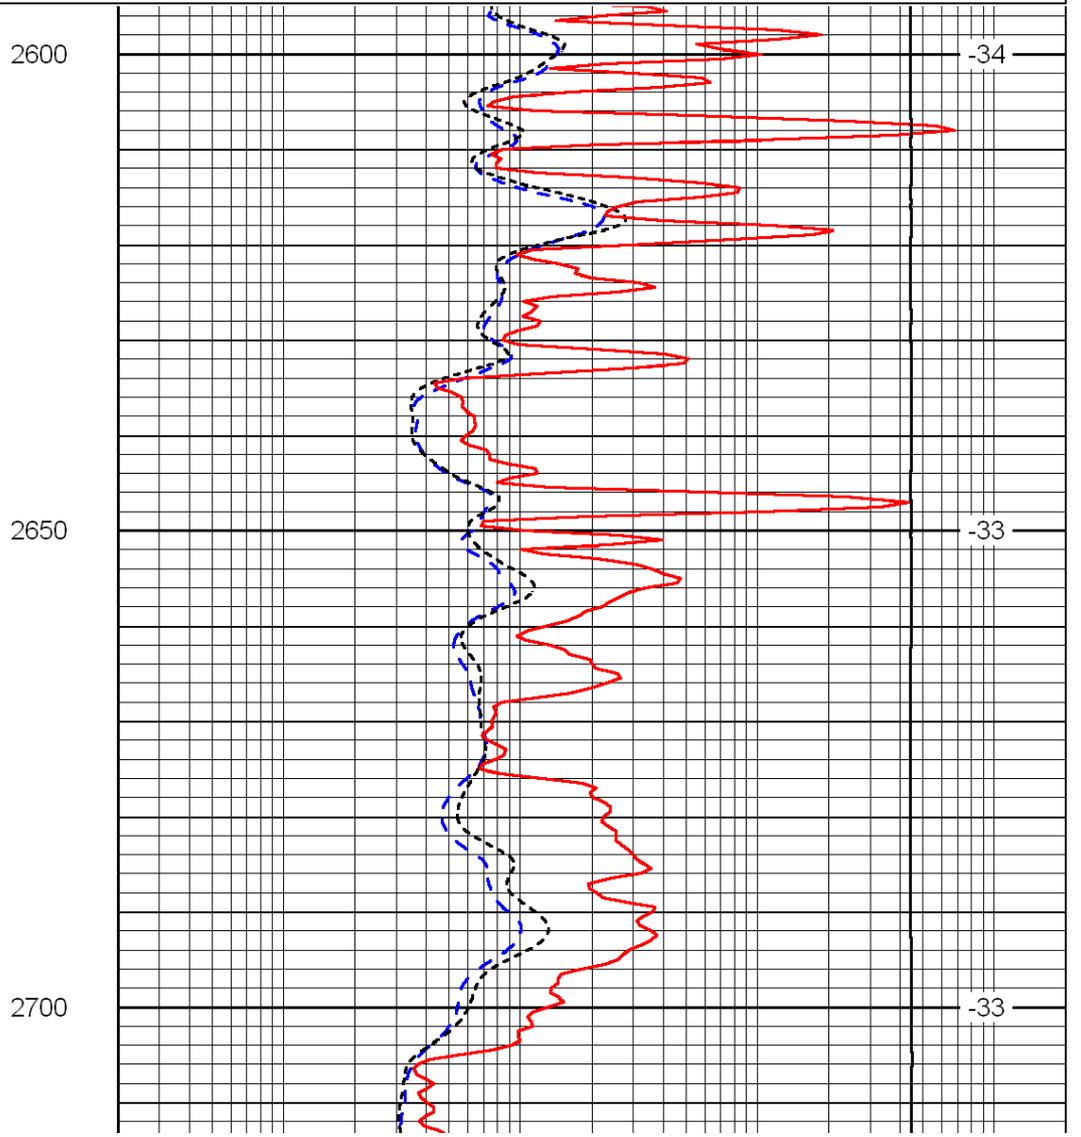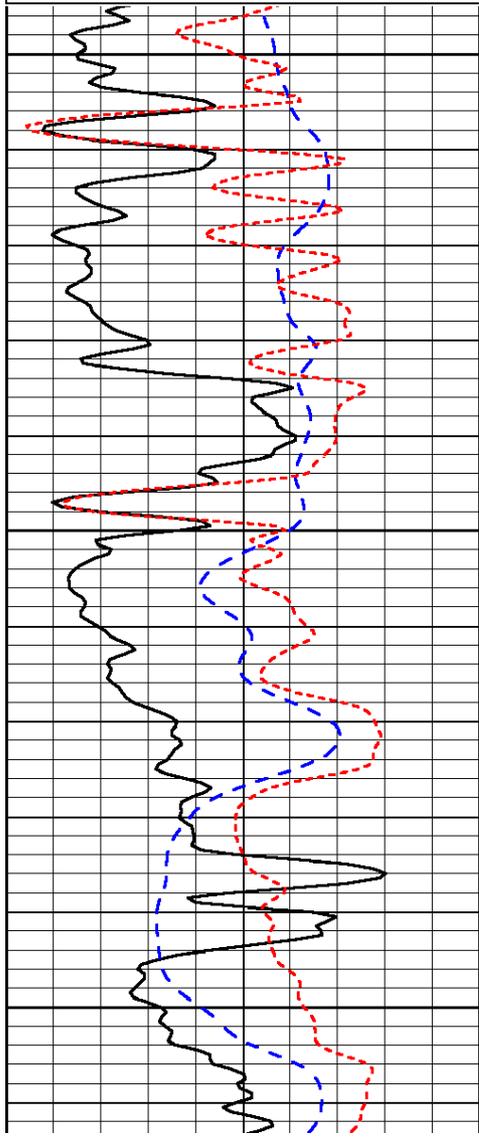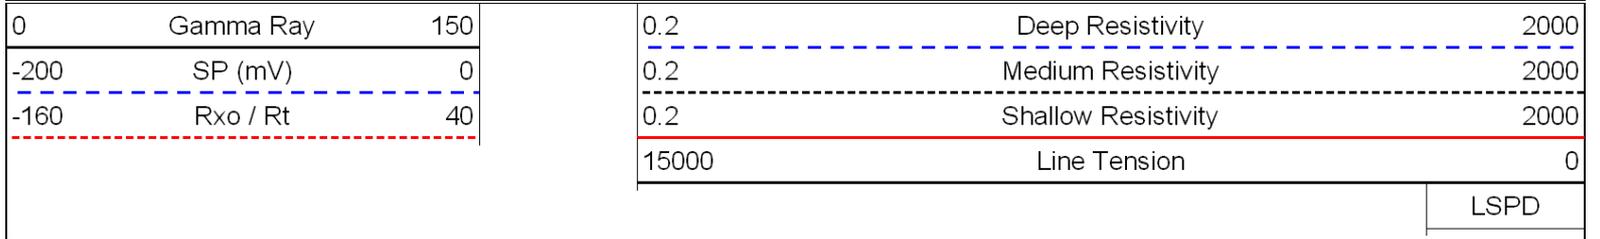

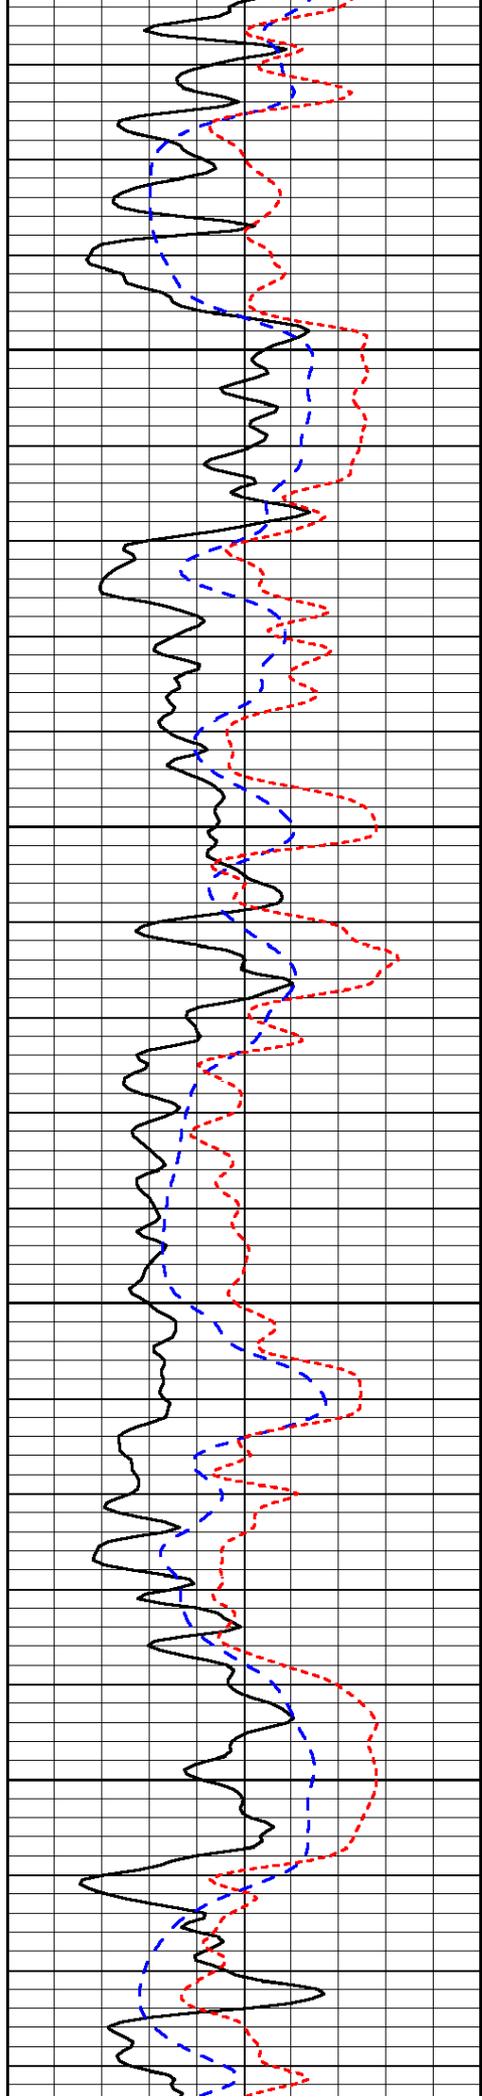


2750

2800

2850

2900

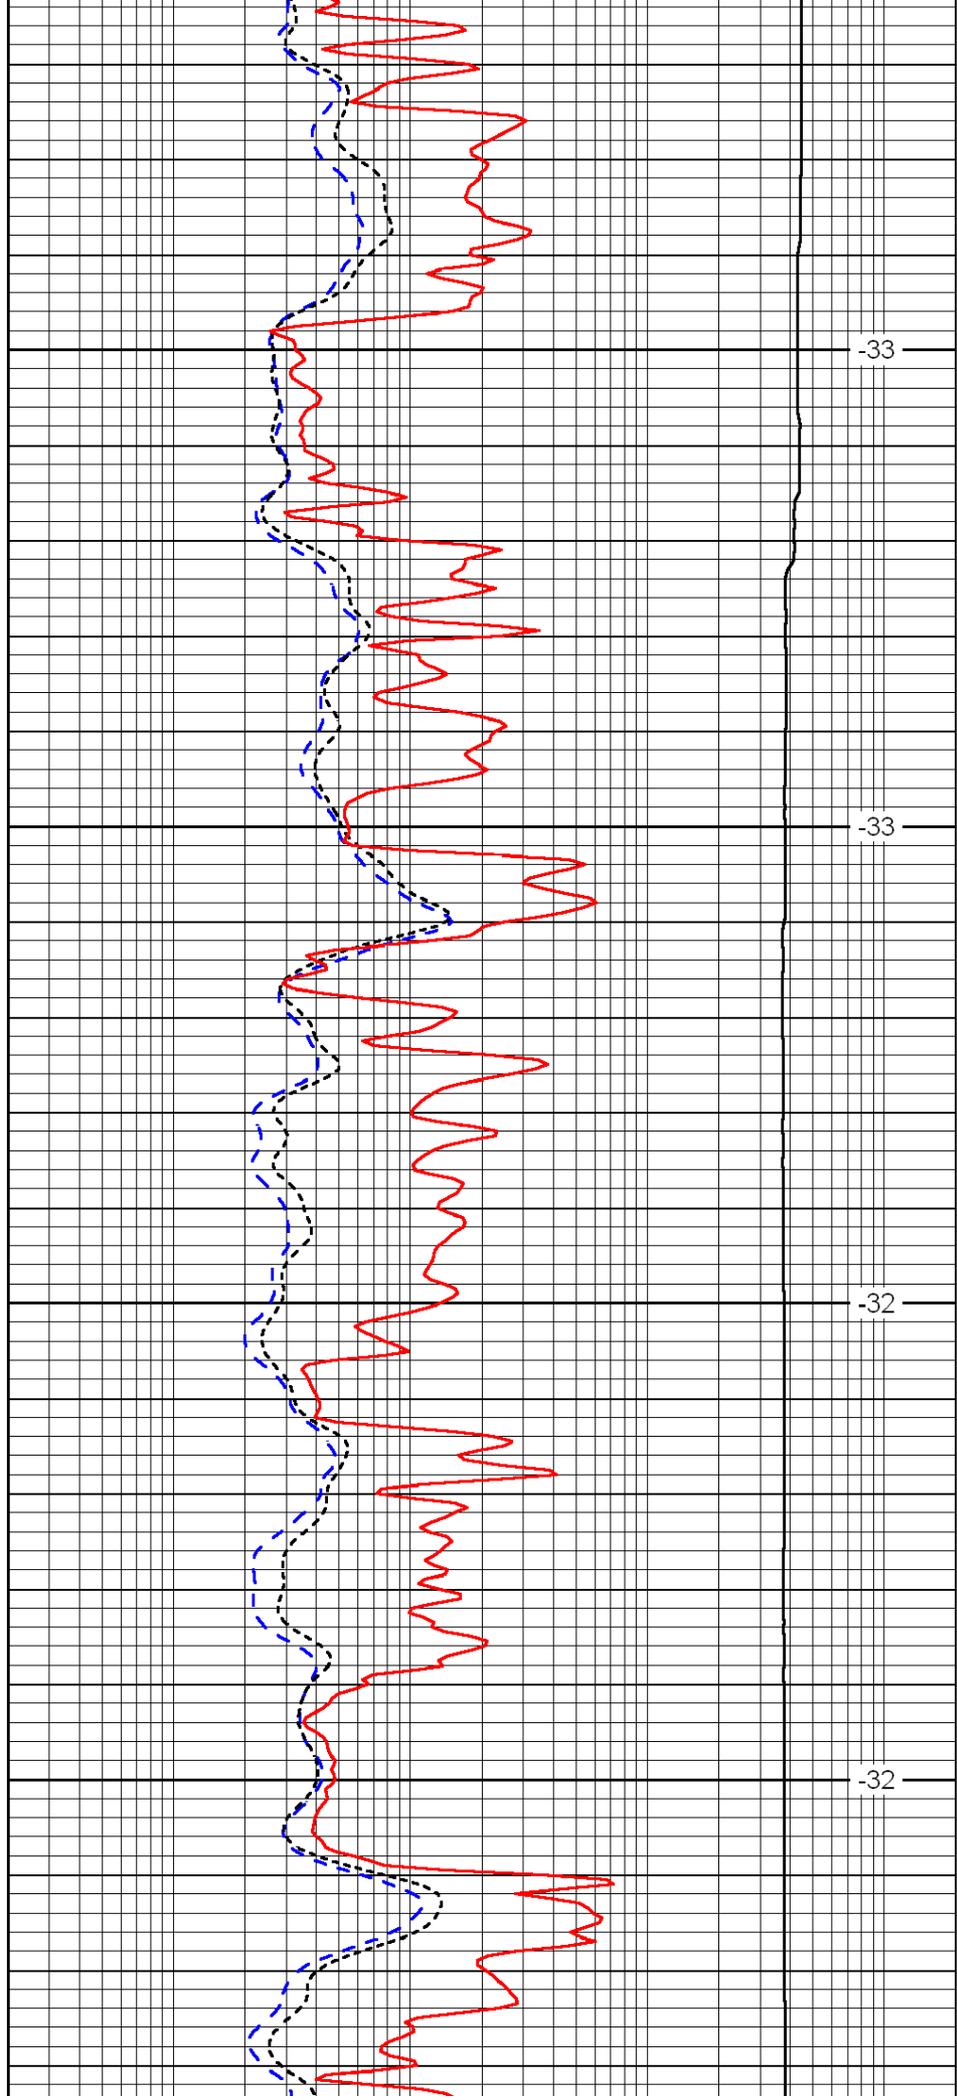


-33

-33

-32

-32

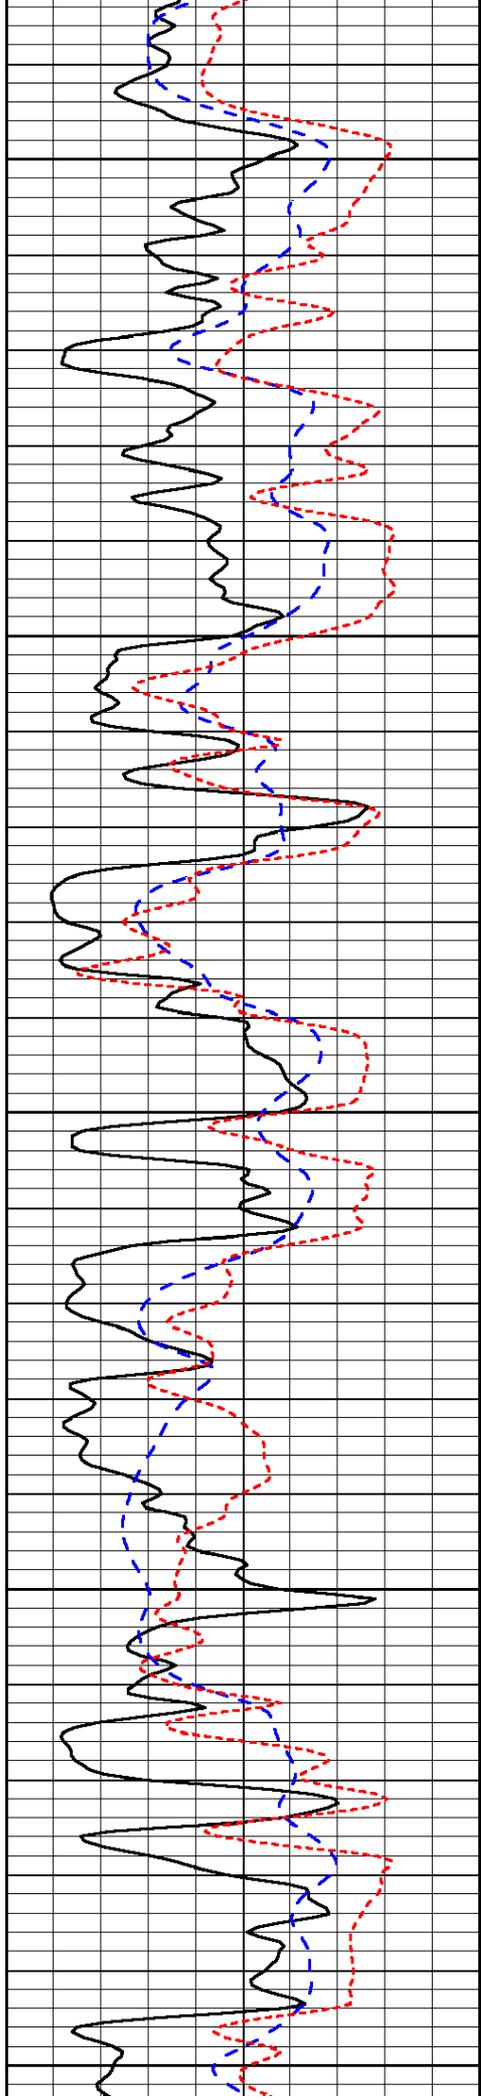


2950

3000

3050

3100

3150

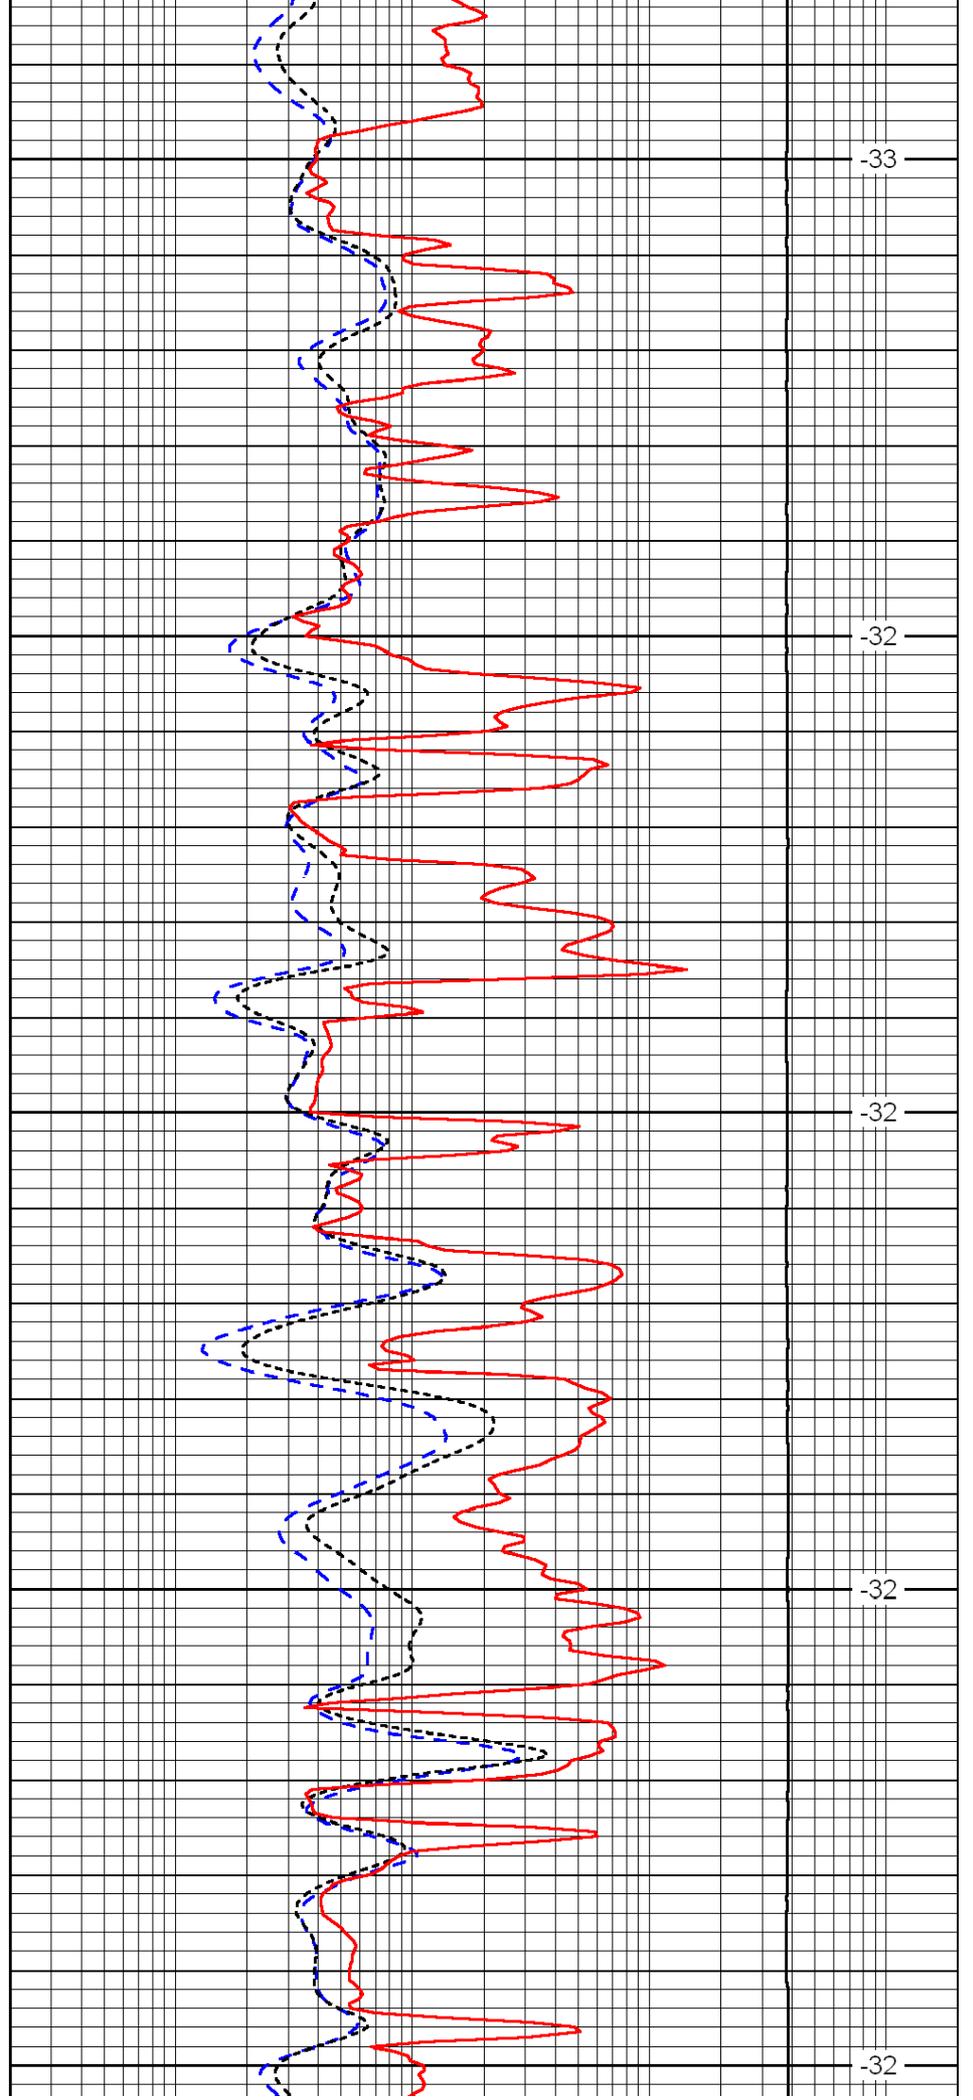


-33

-32

-32

-32

-32

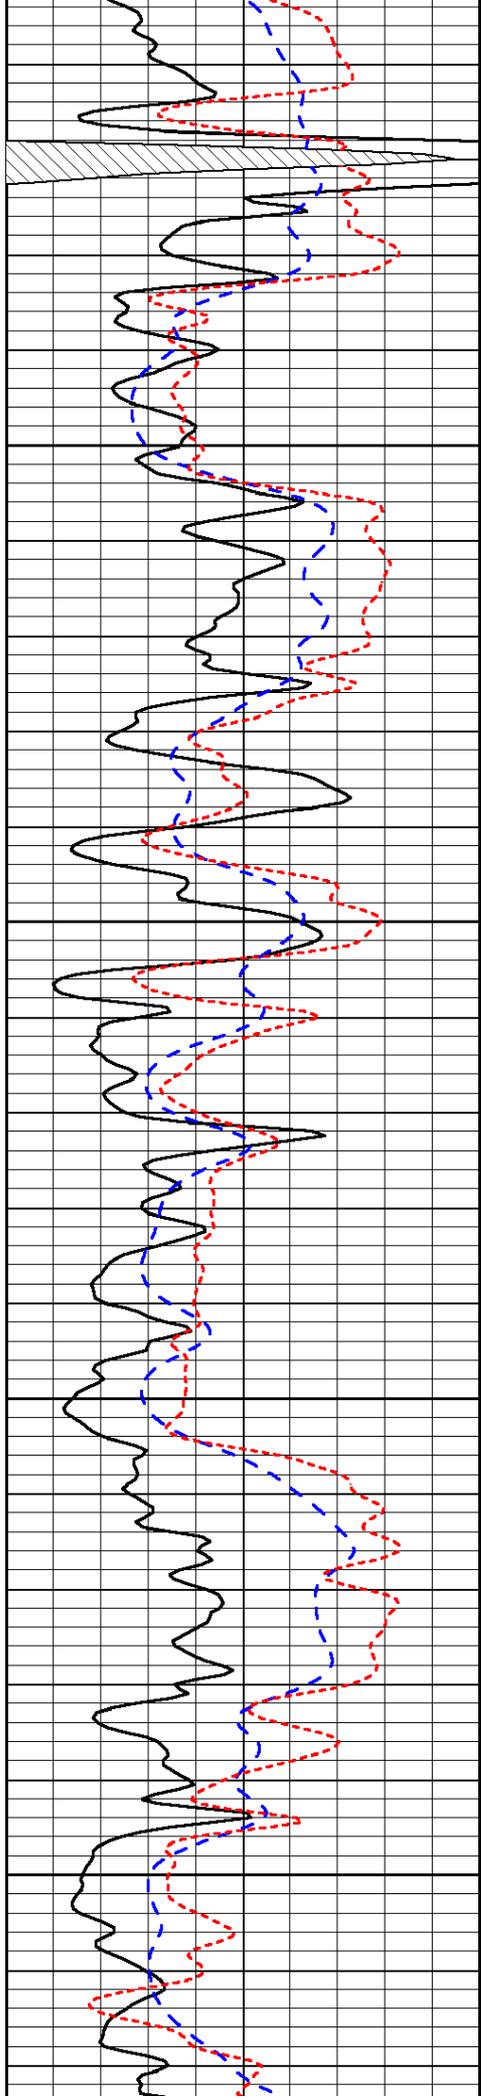


3200

3250

3300

3350

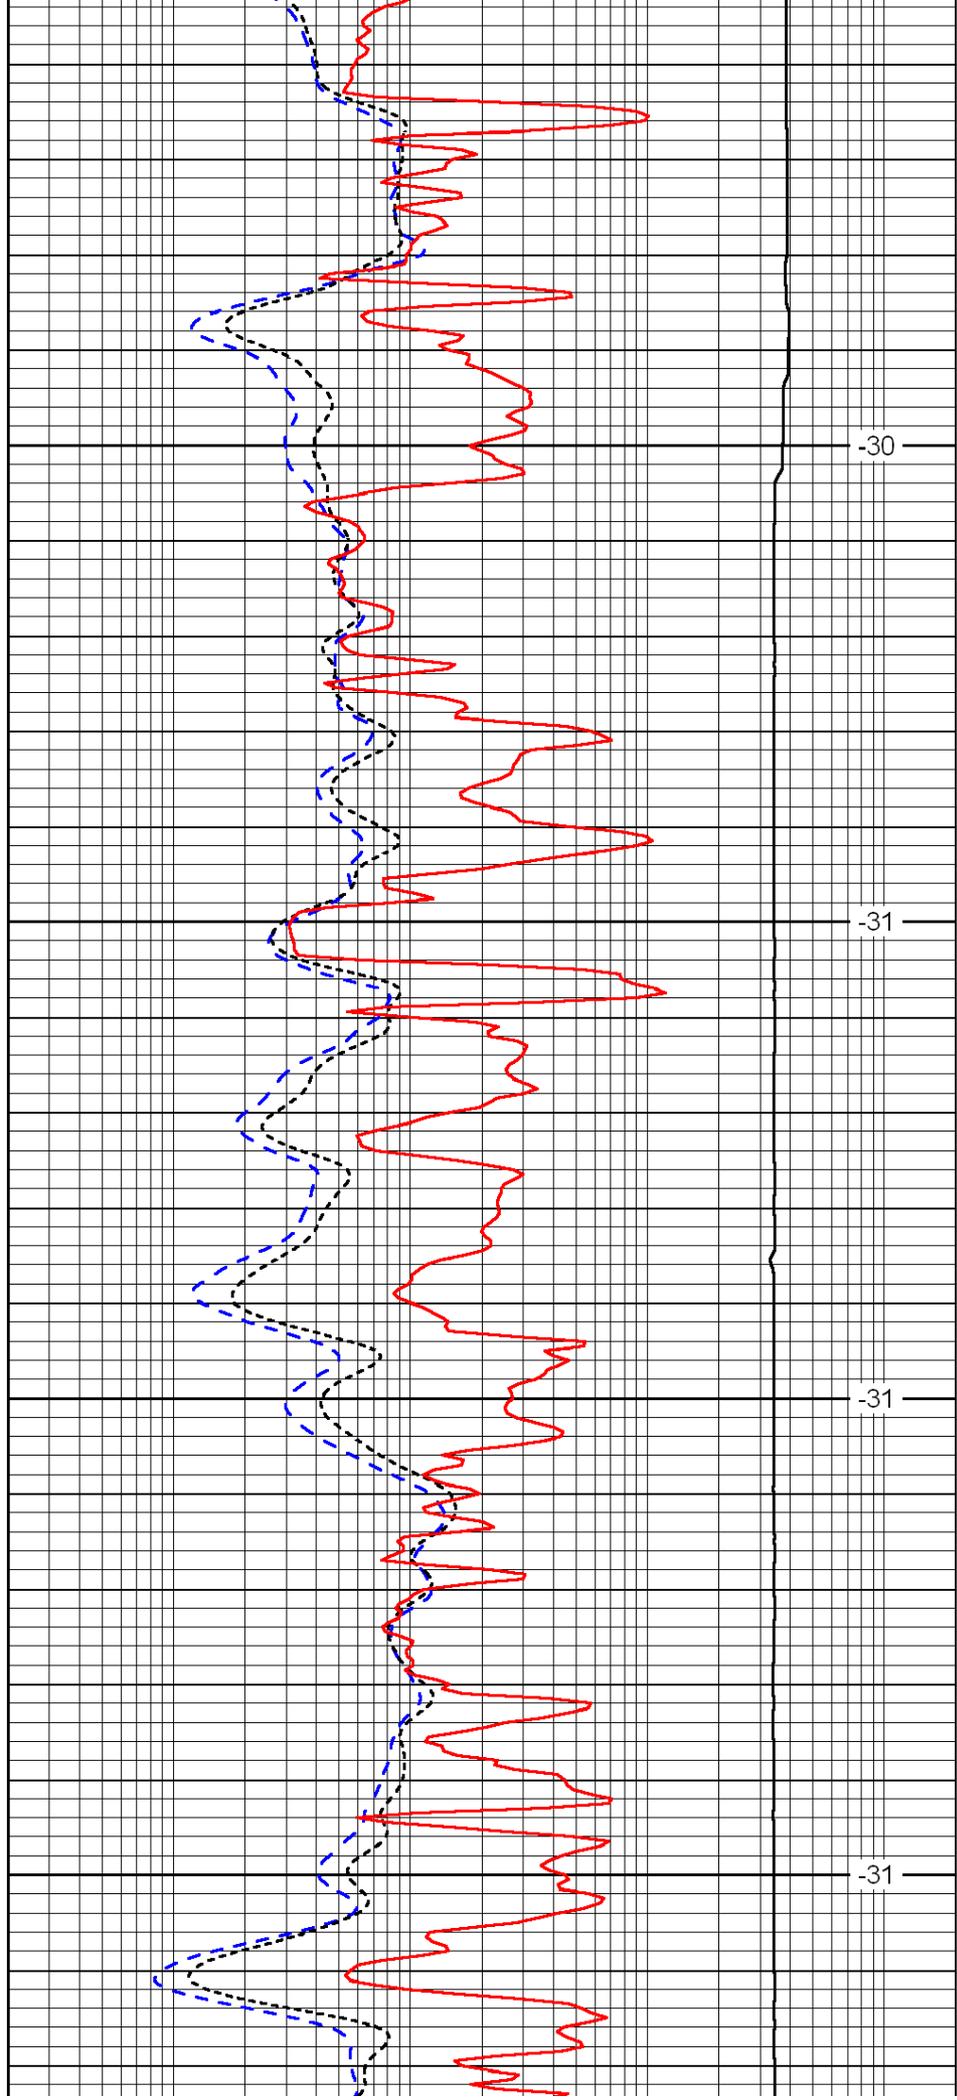


-30

-31

-31

-31

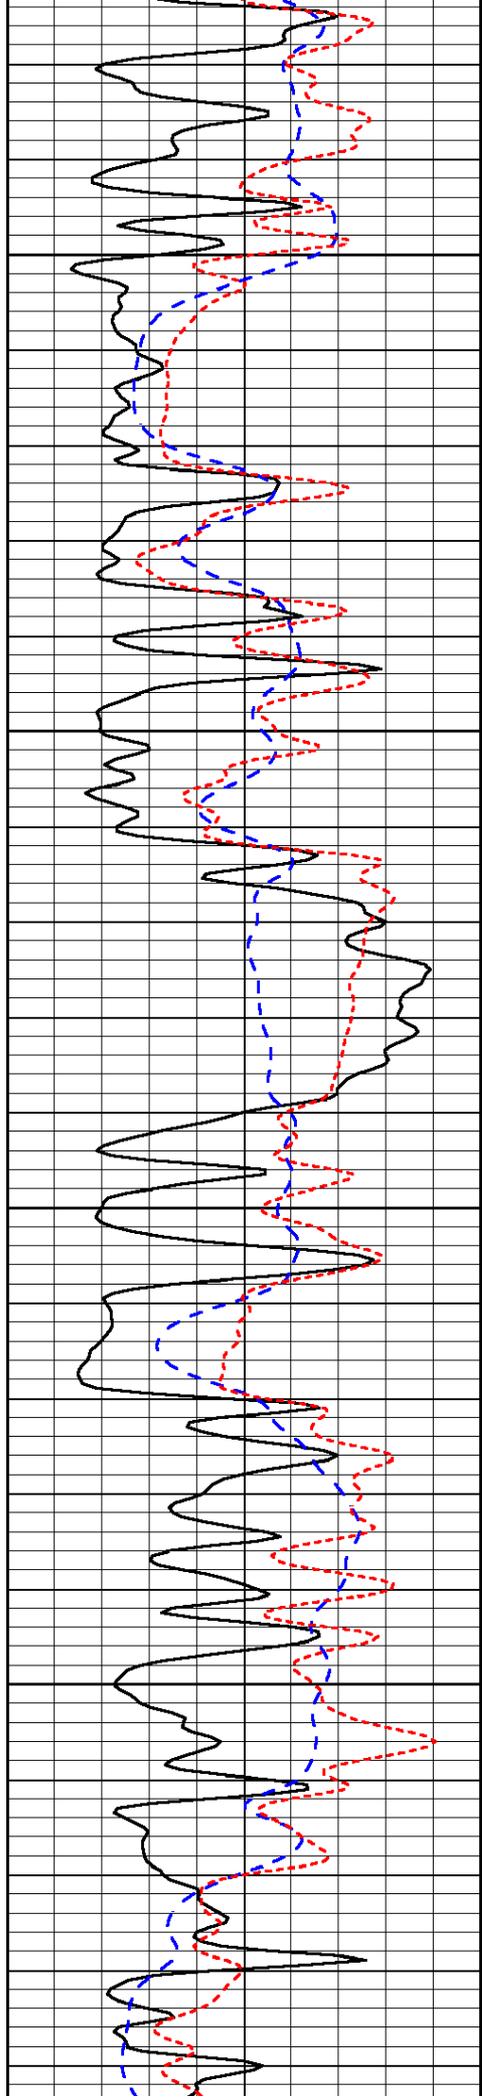


3400

3450

3500

3550

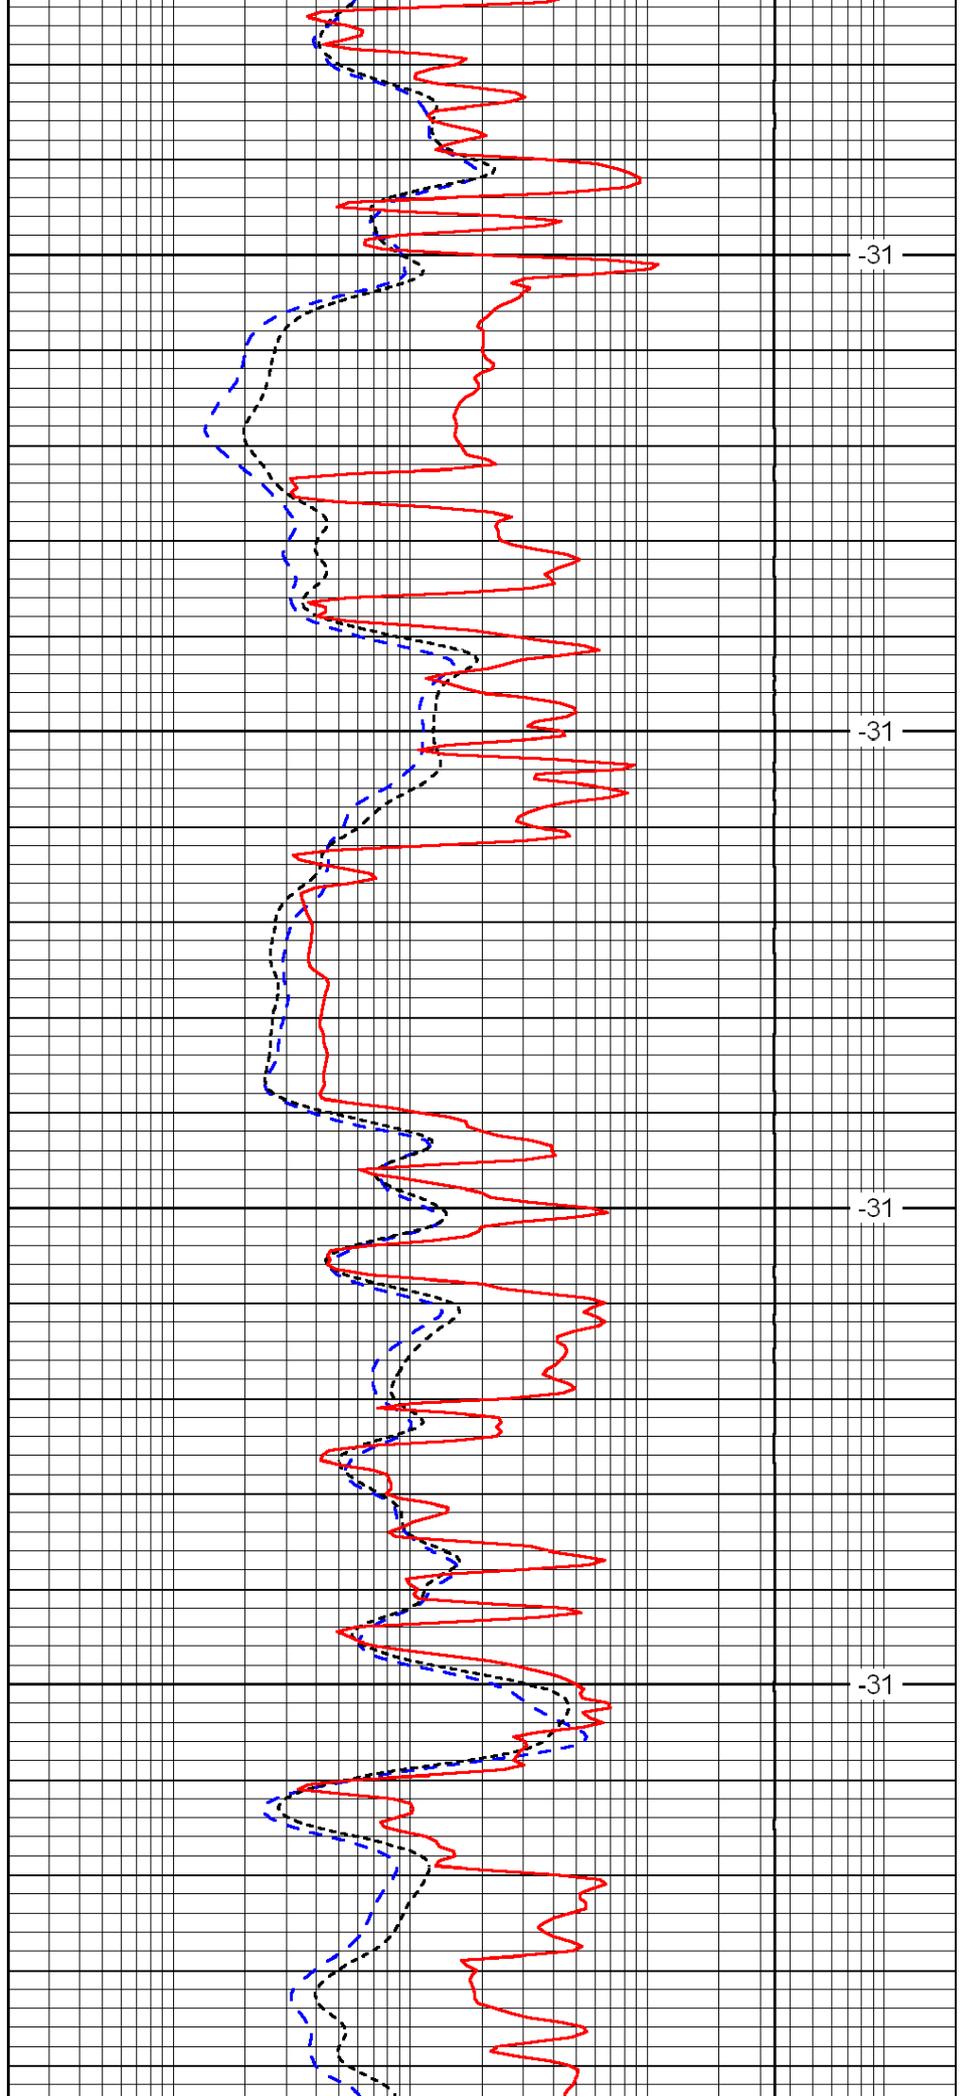


-31

-31

-31

-31

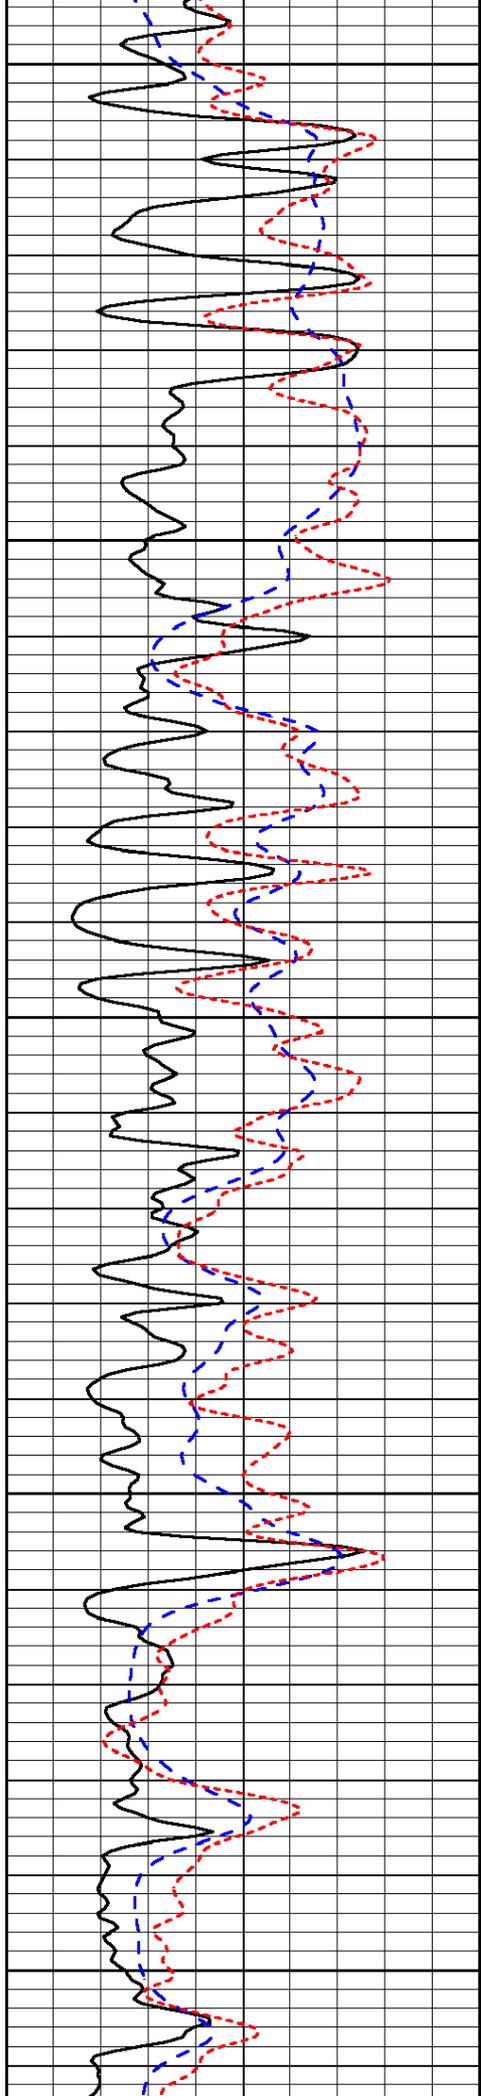


3600

3650

3700

3750

3800

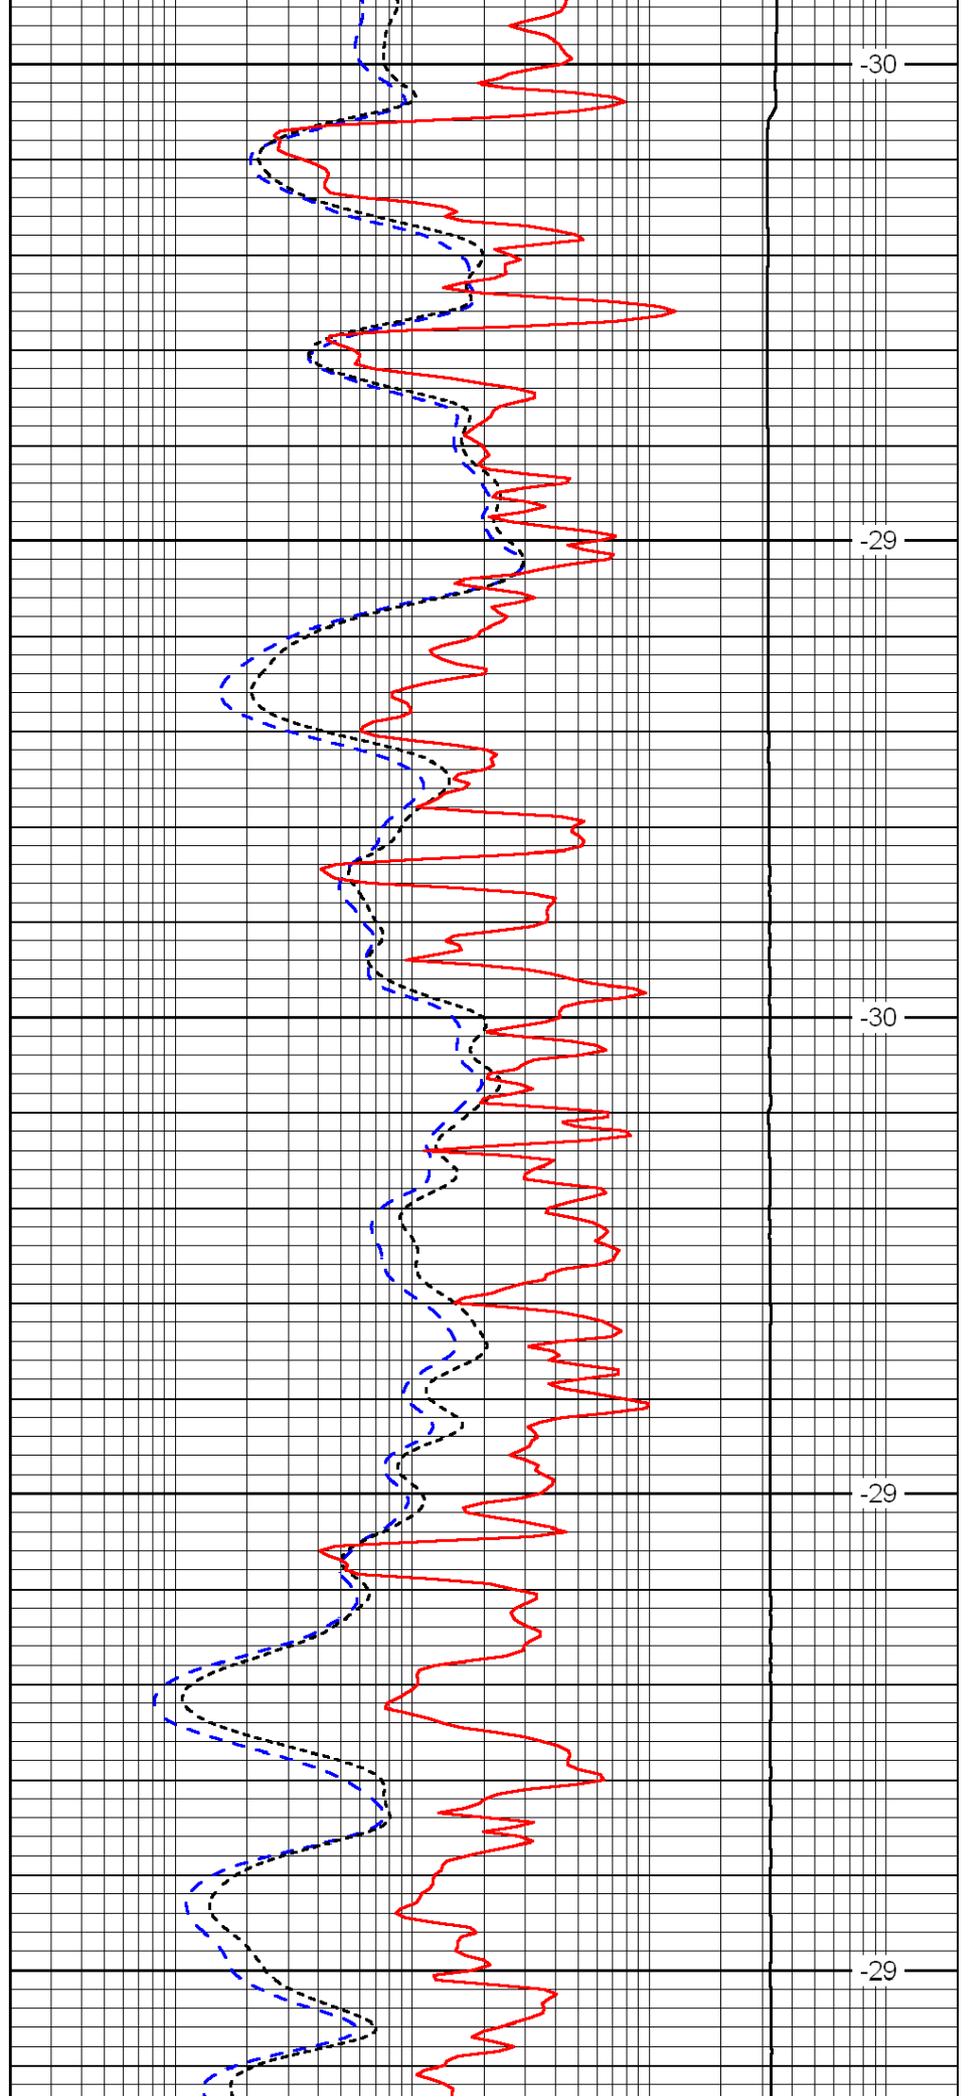


-30

-29

-30

-29

-29

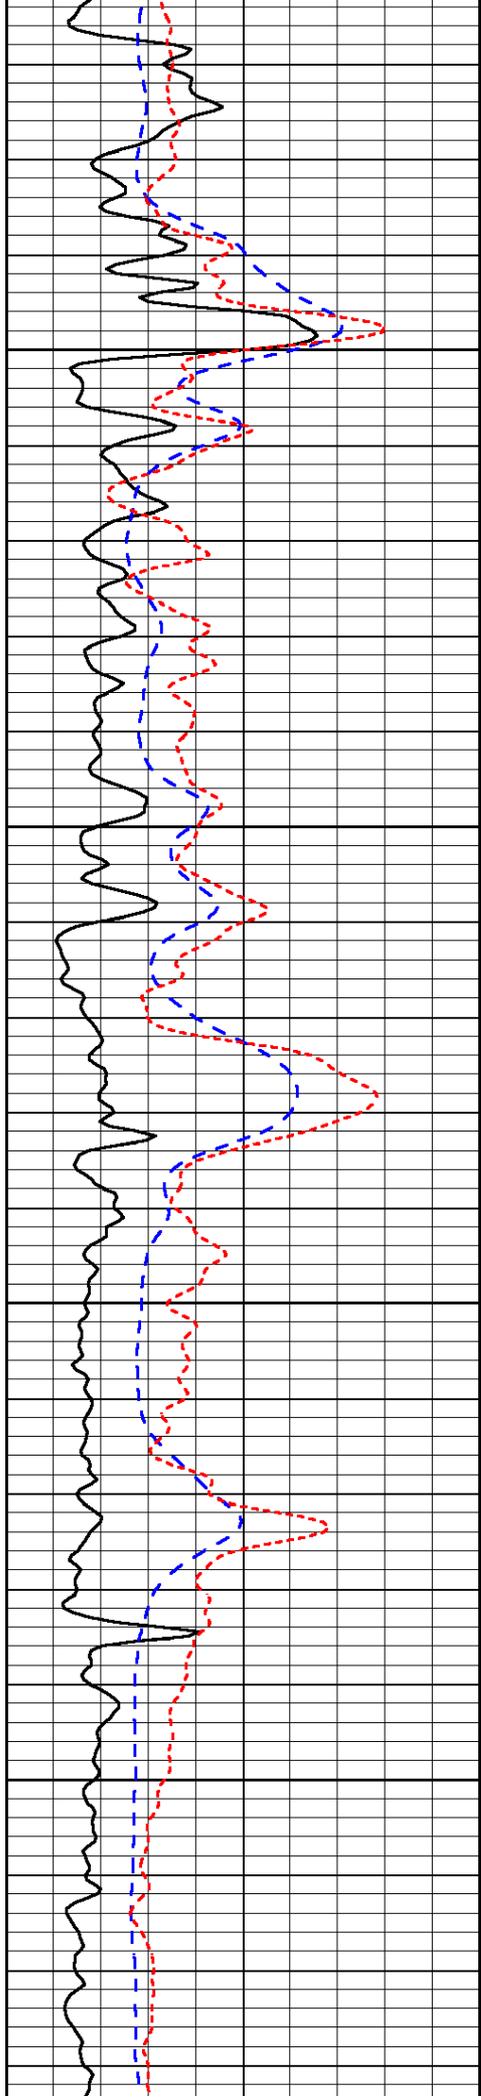


3850

3900

3950

4000

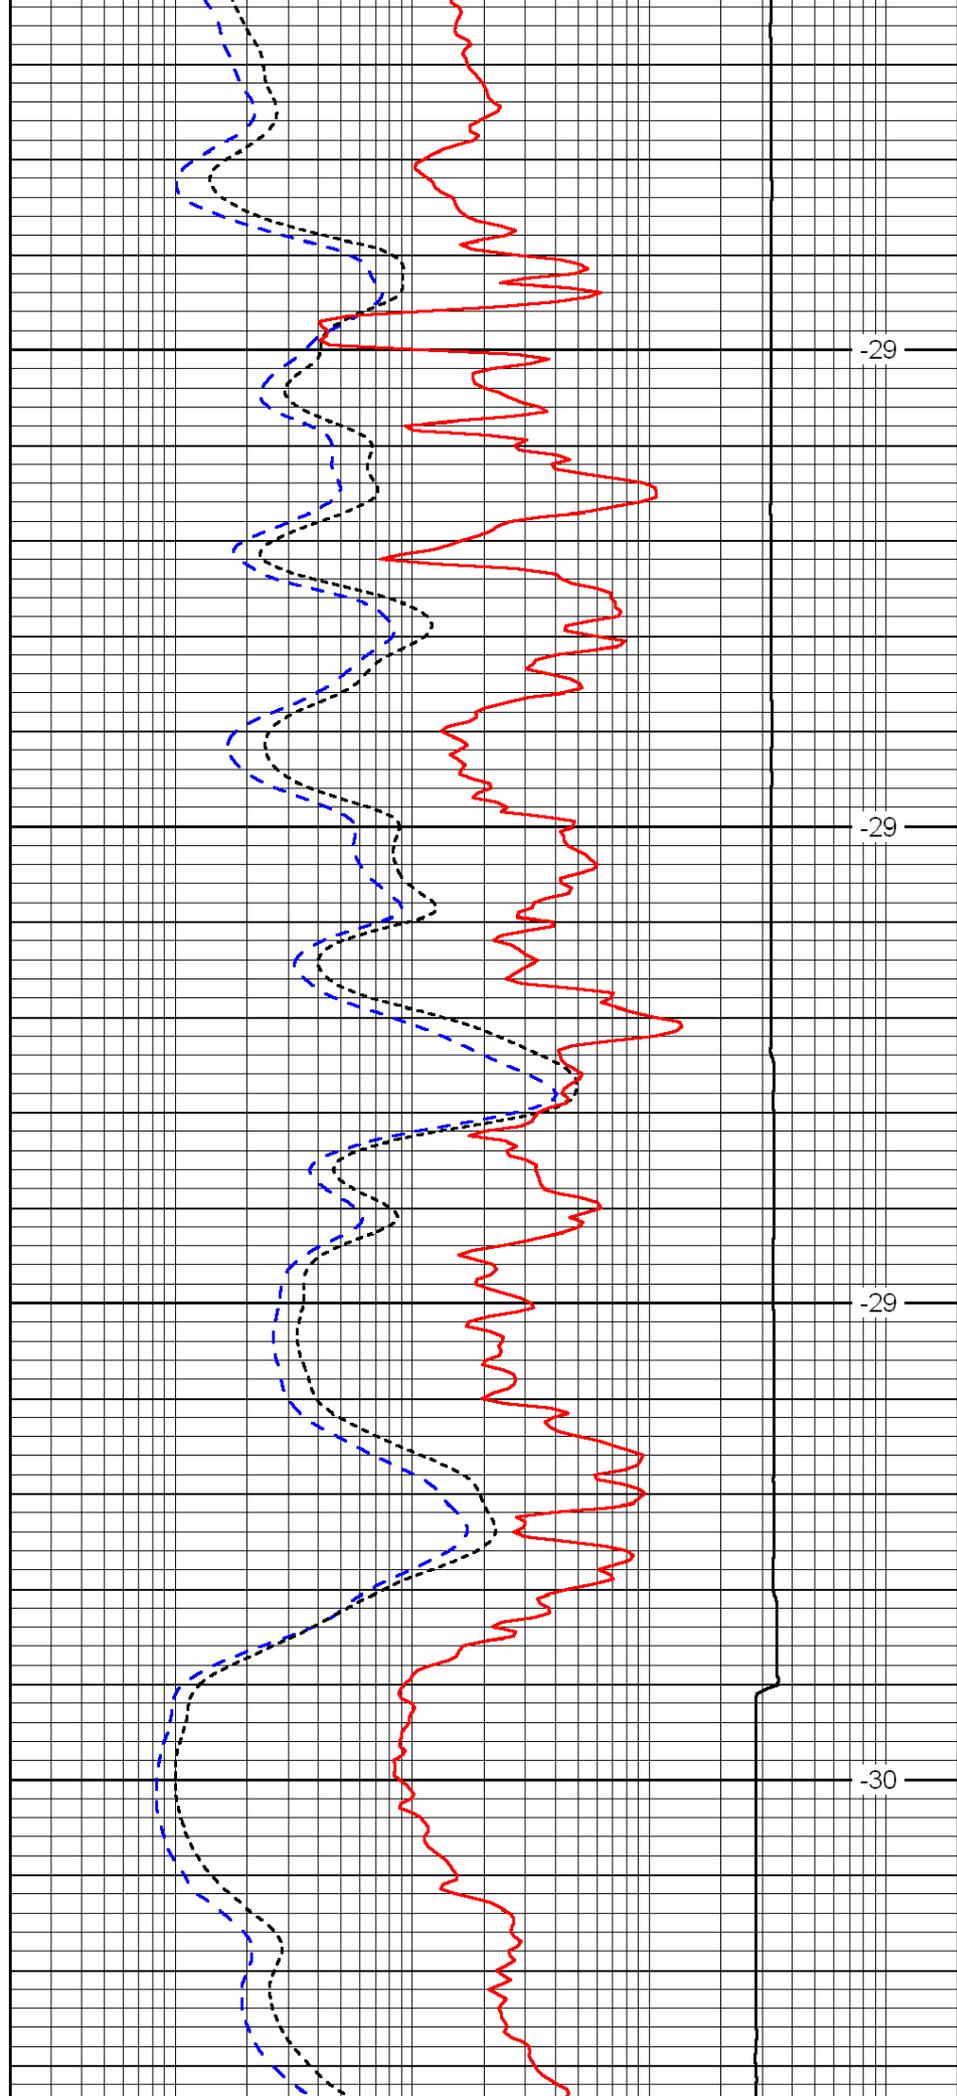


-29

-29

-29

-30

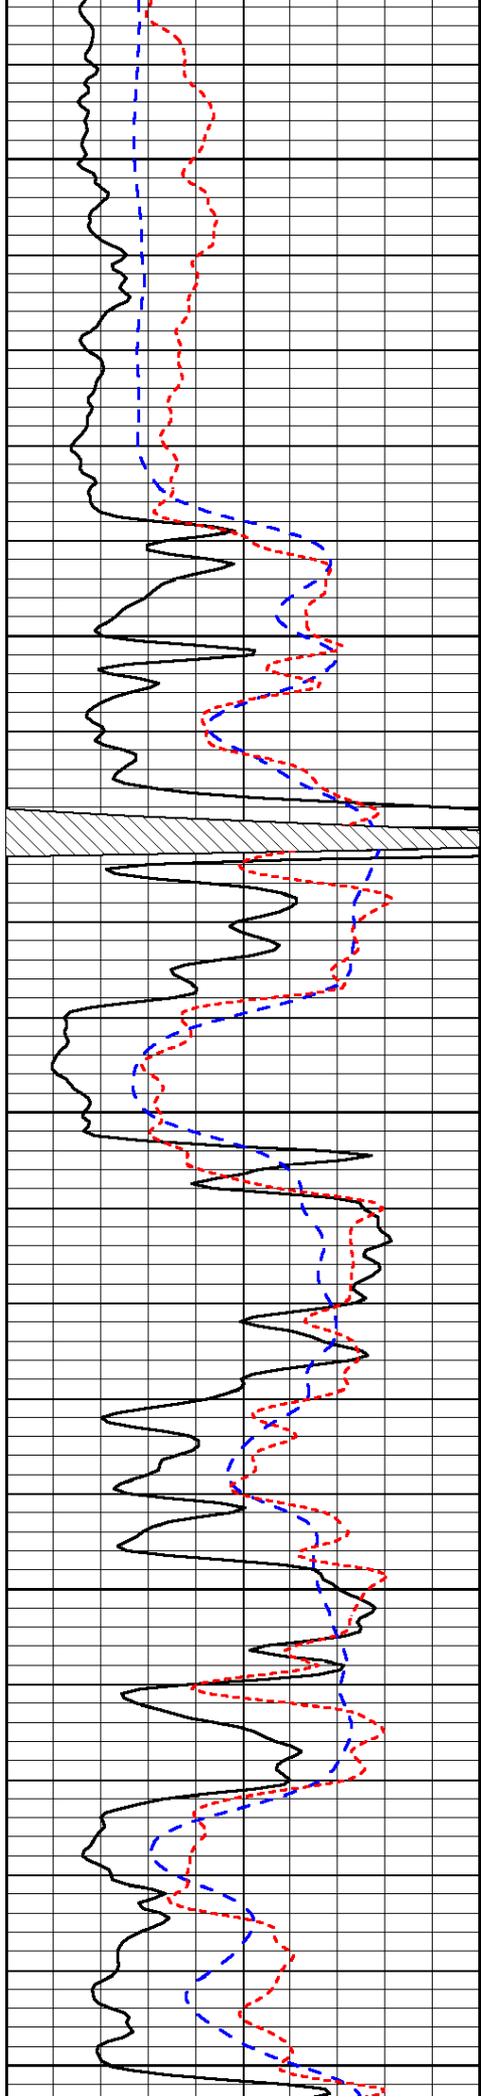


4050

4100

4150

4200

4250

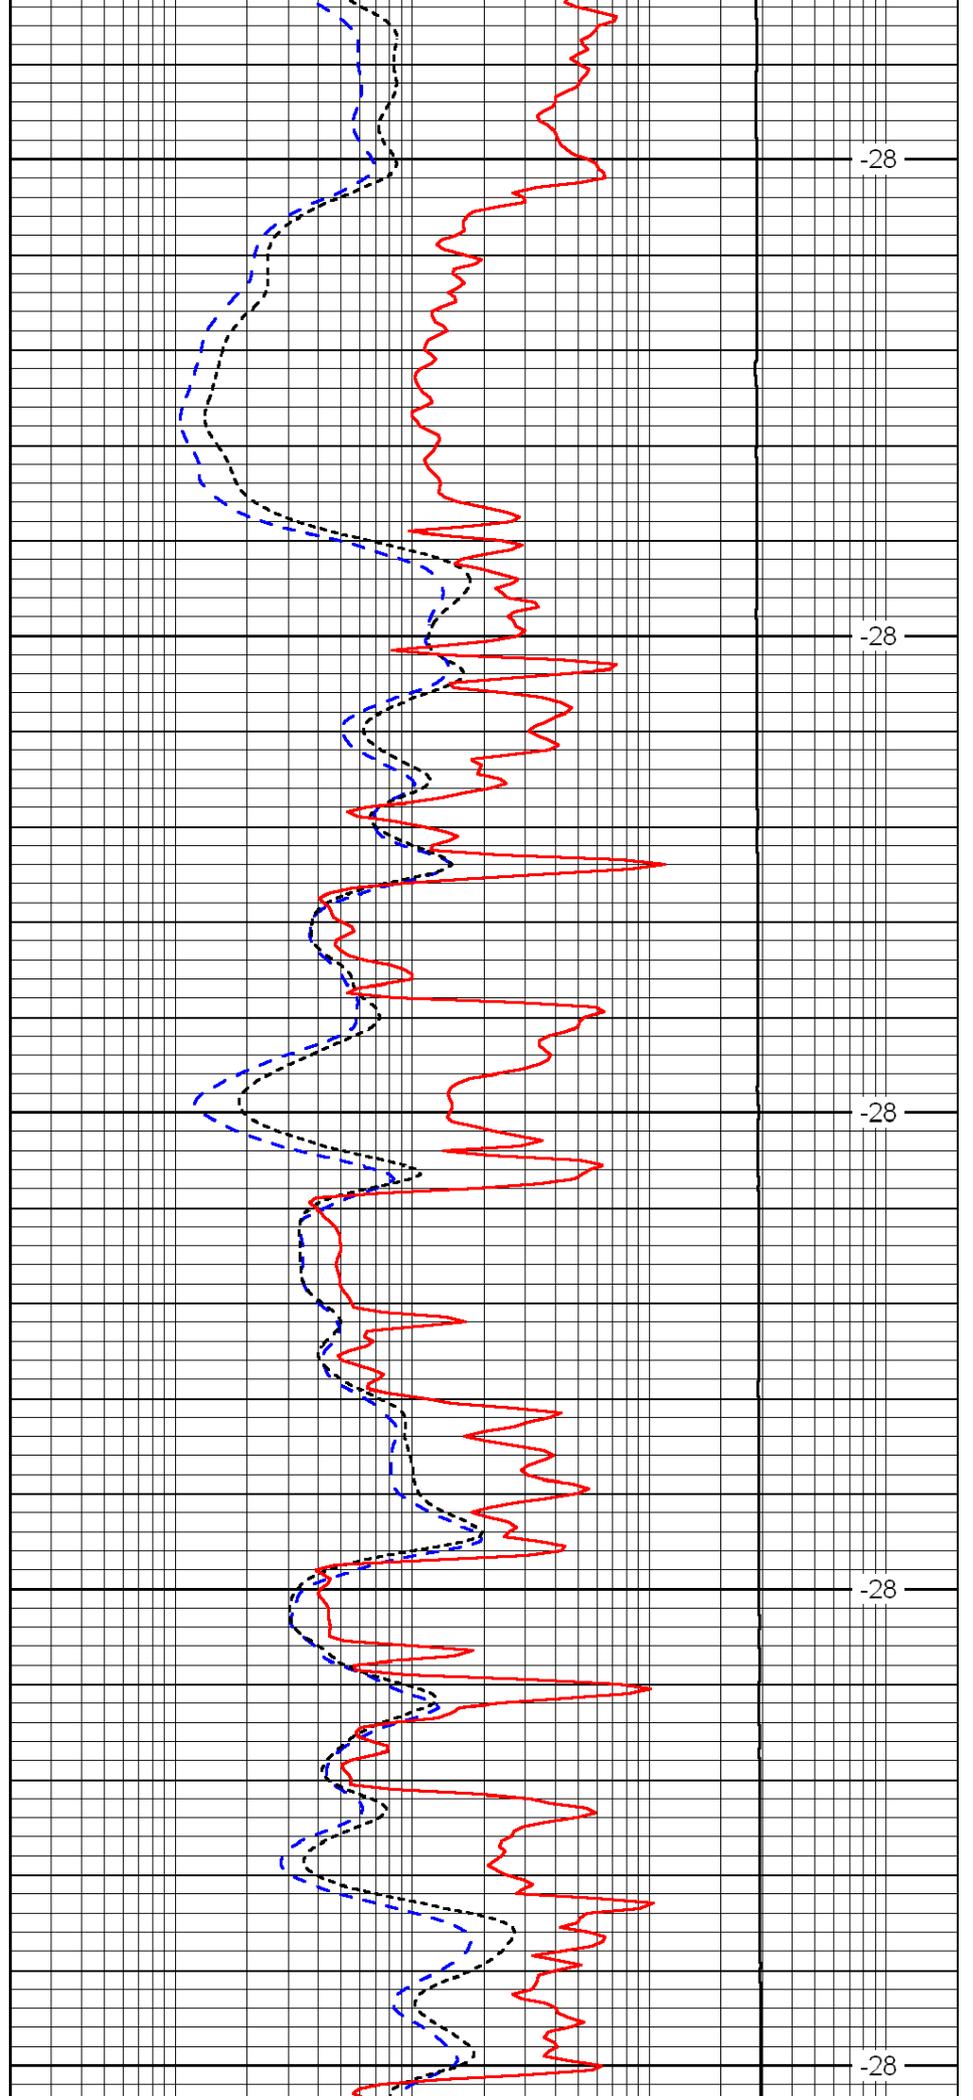


-28

-28

-28

-28

-28

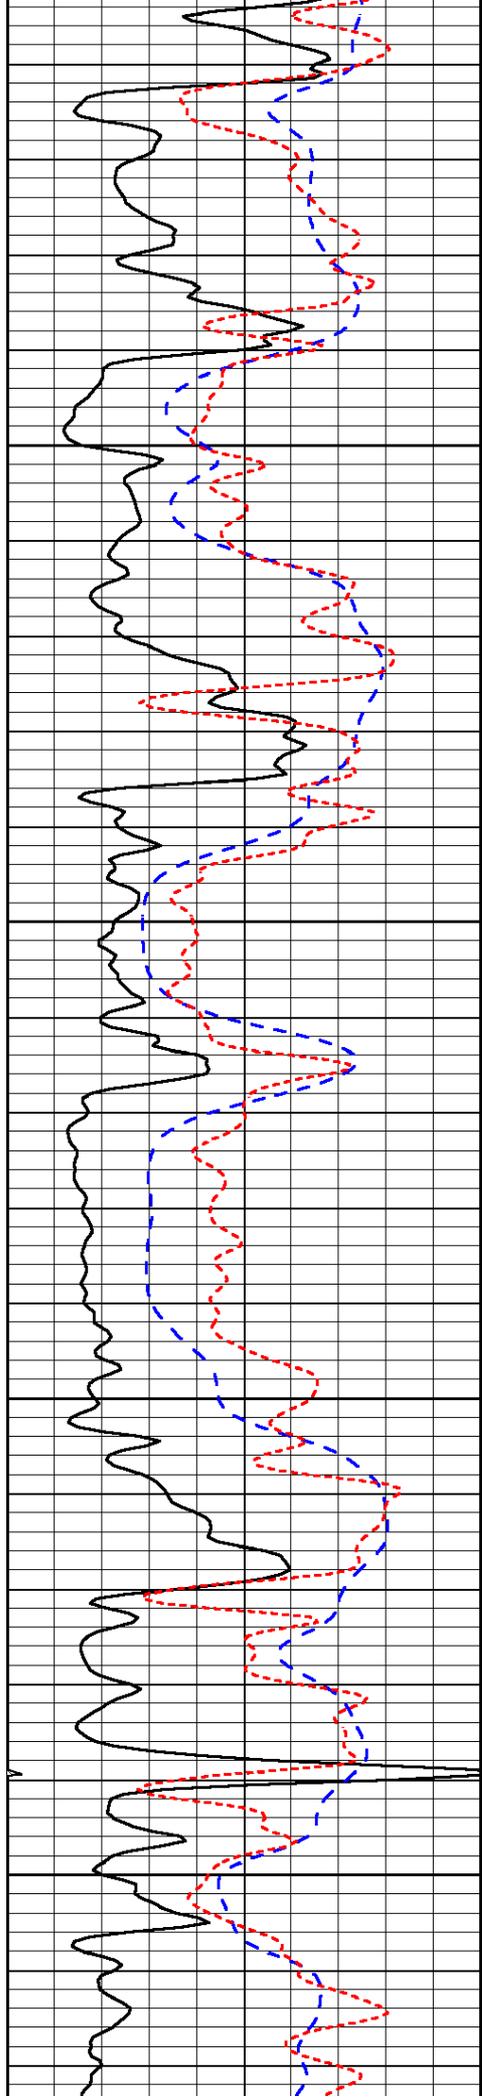


4300

4350

4400

4450

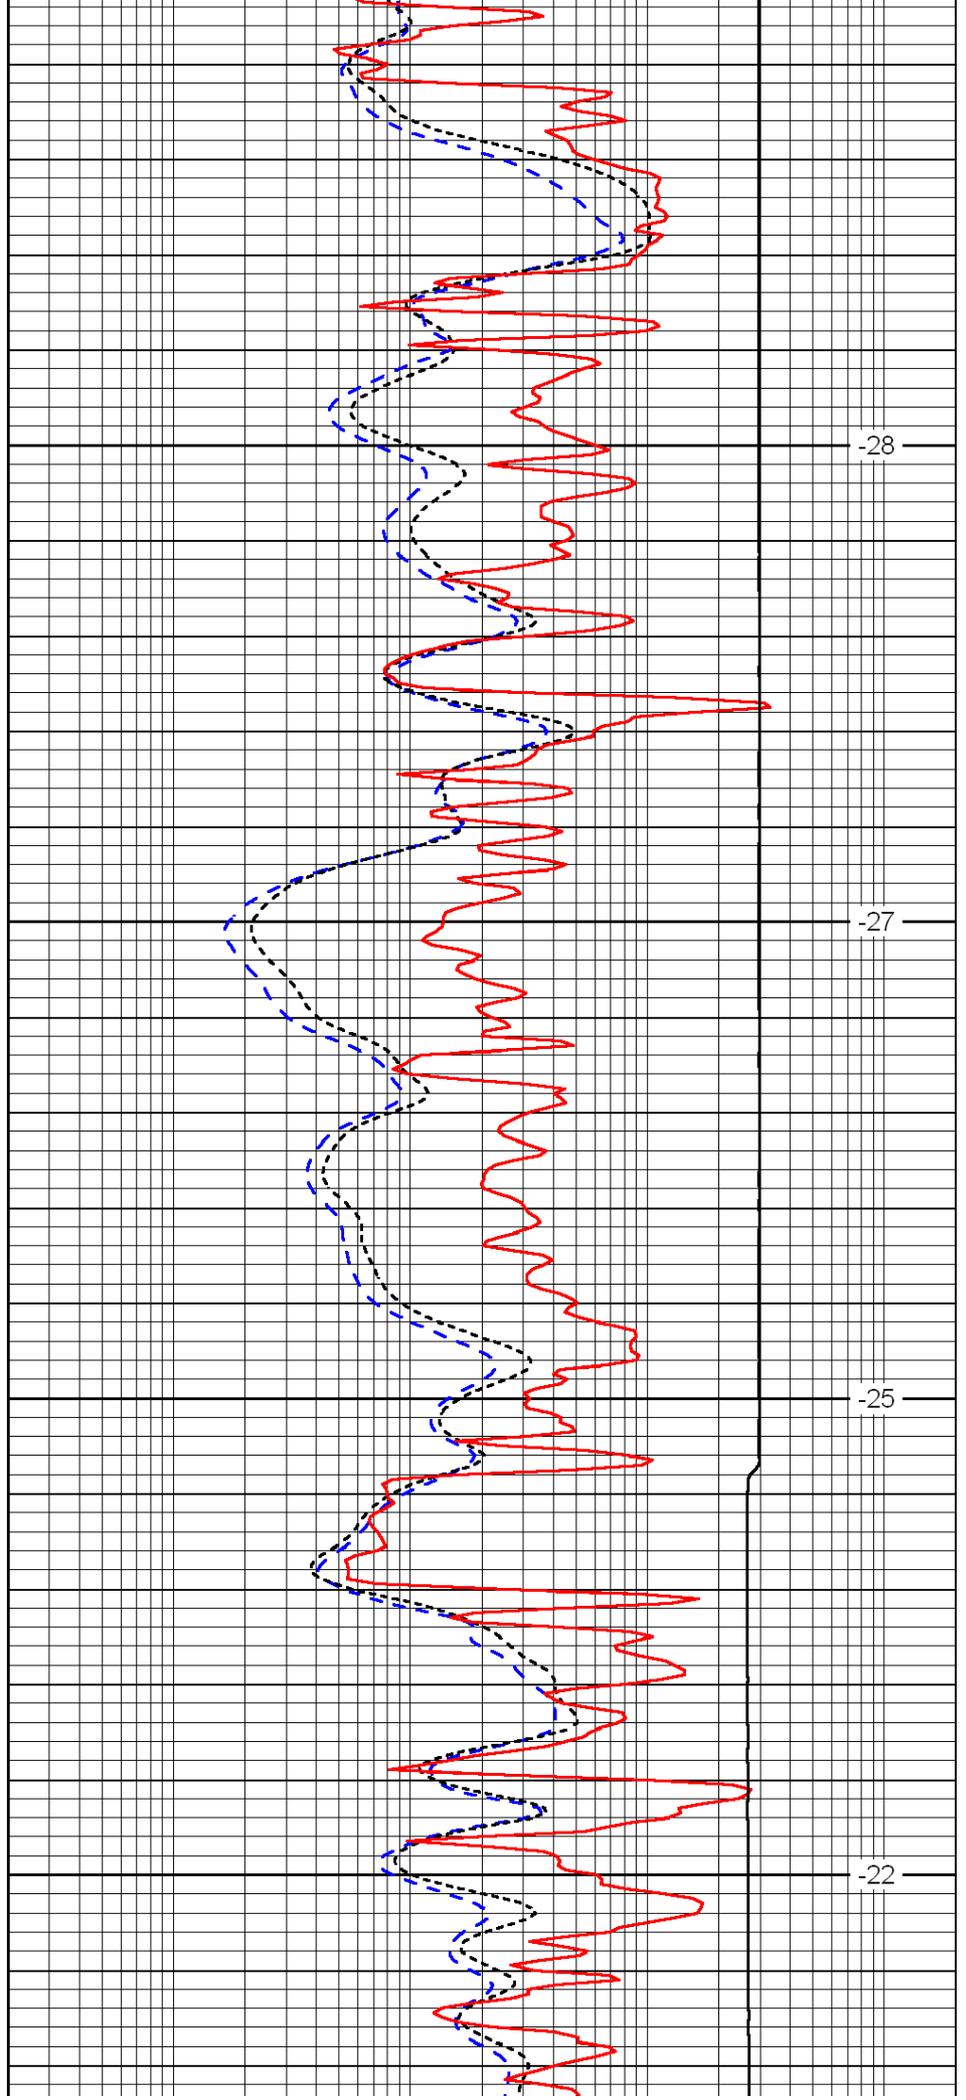


-28

-27

-25

-22

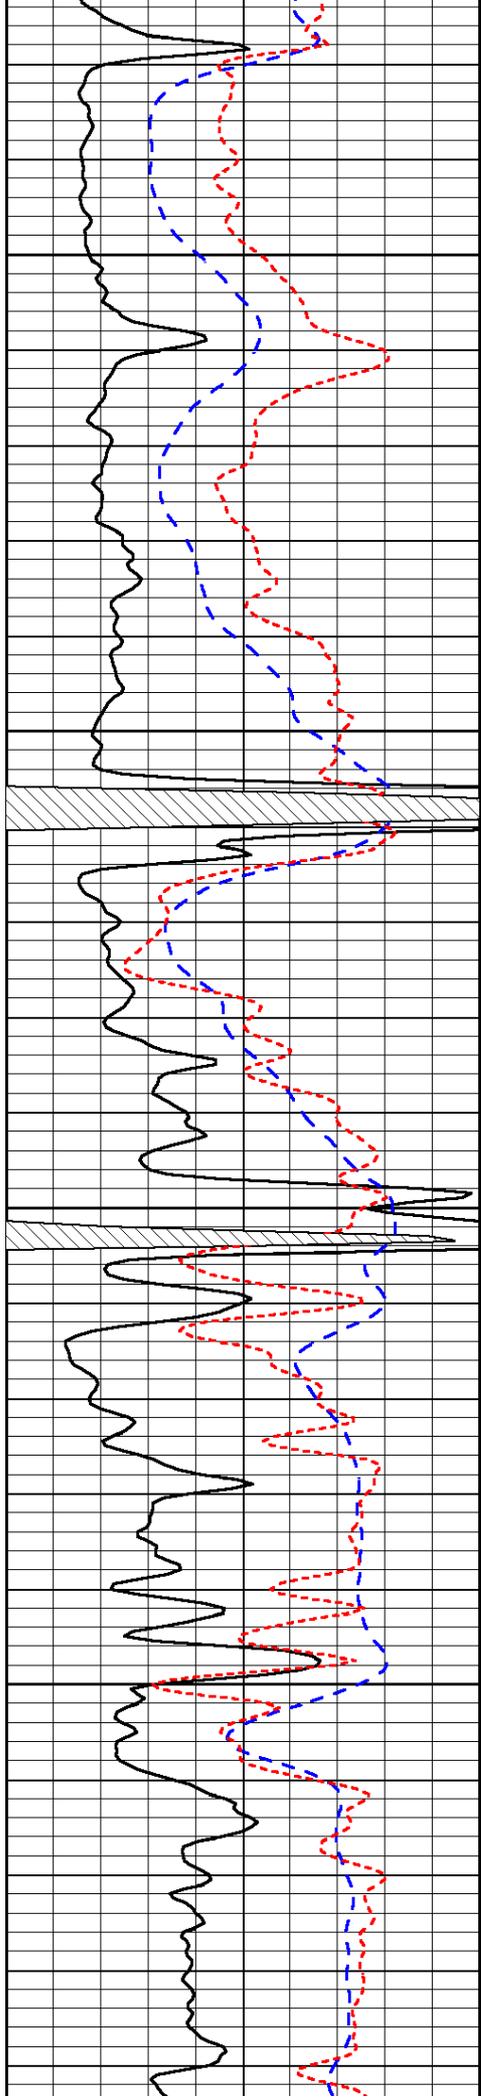


4500

4550

4600

4650

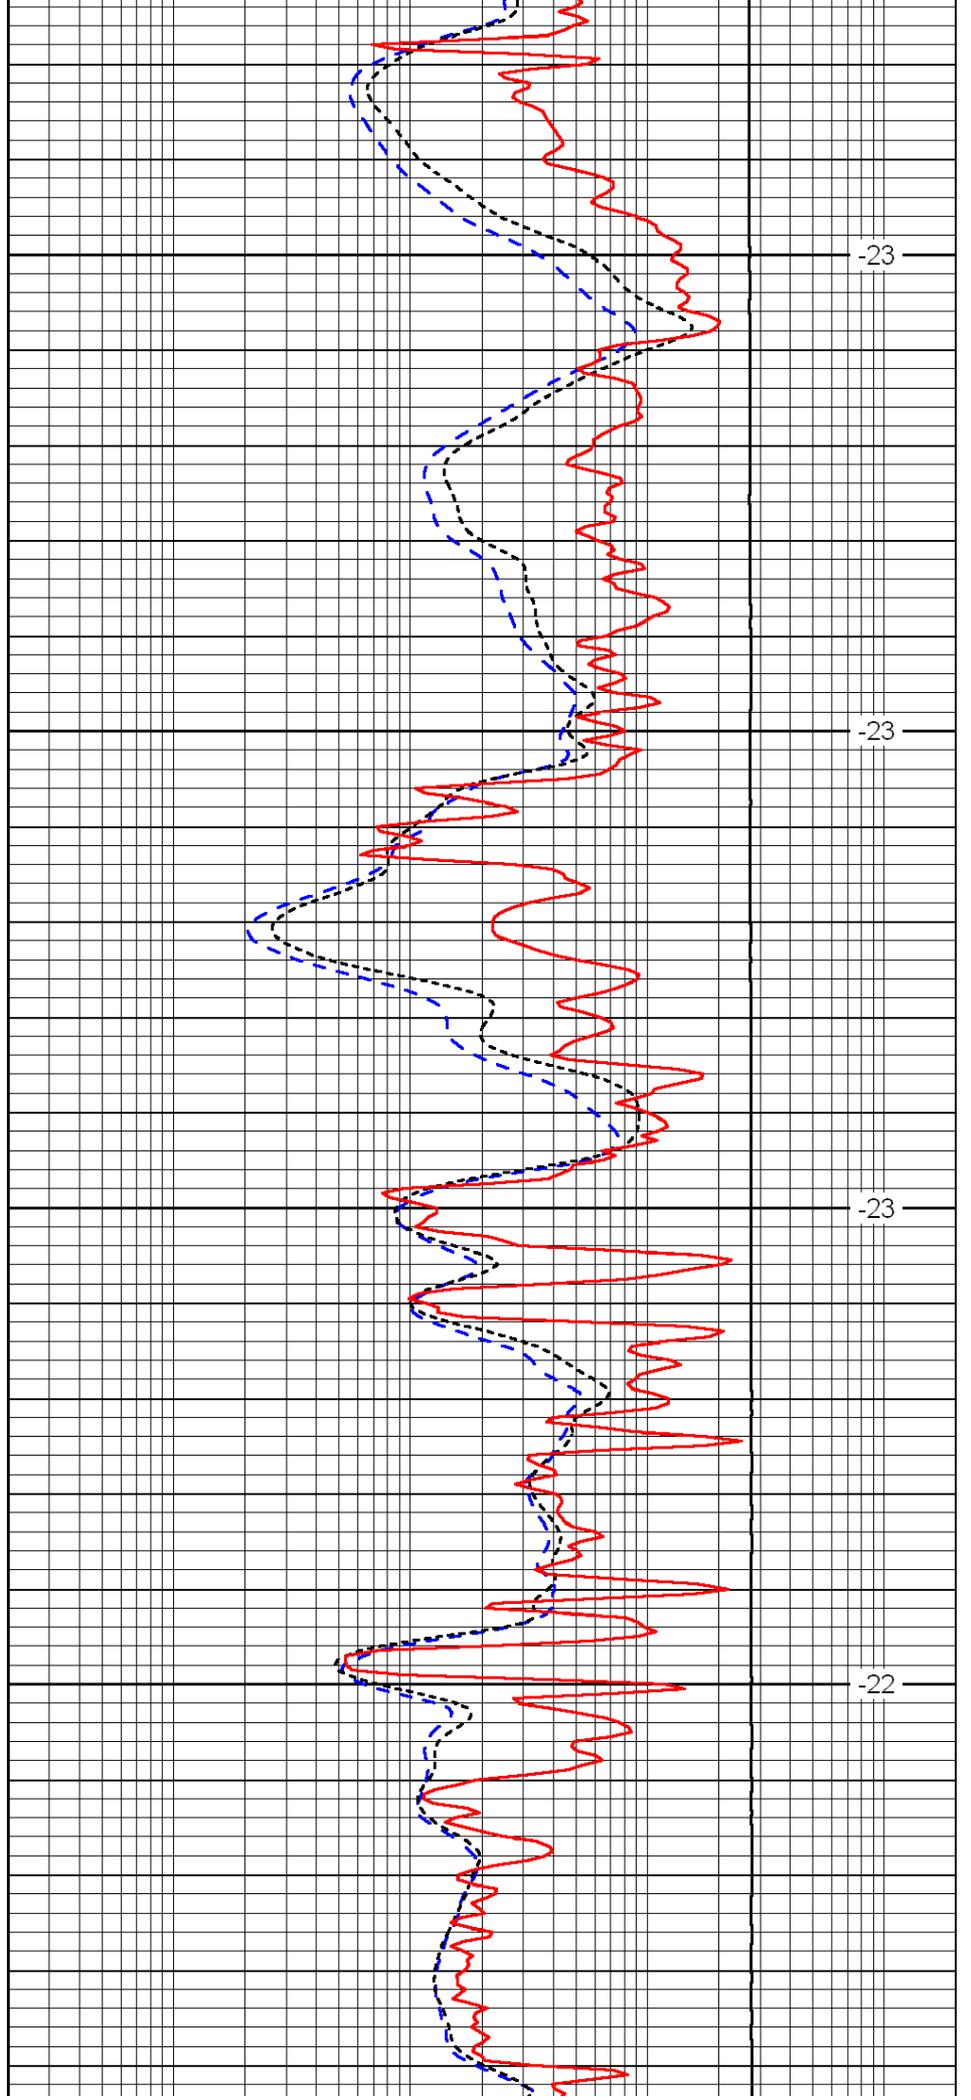


-23

-23

-23

-22

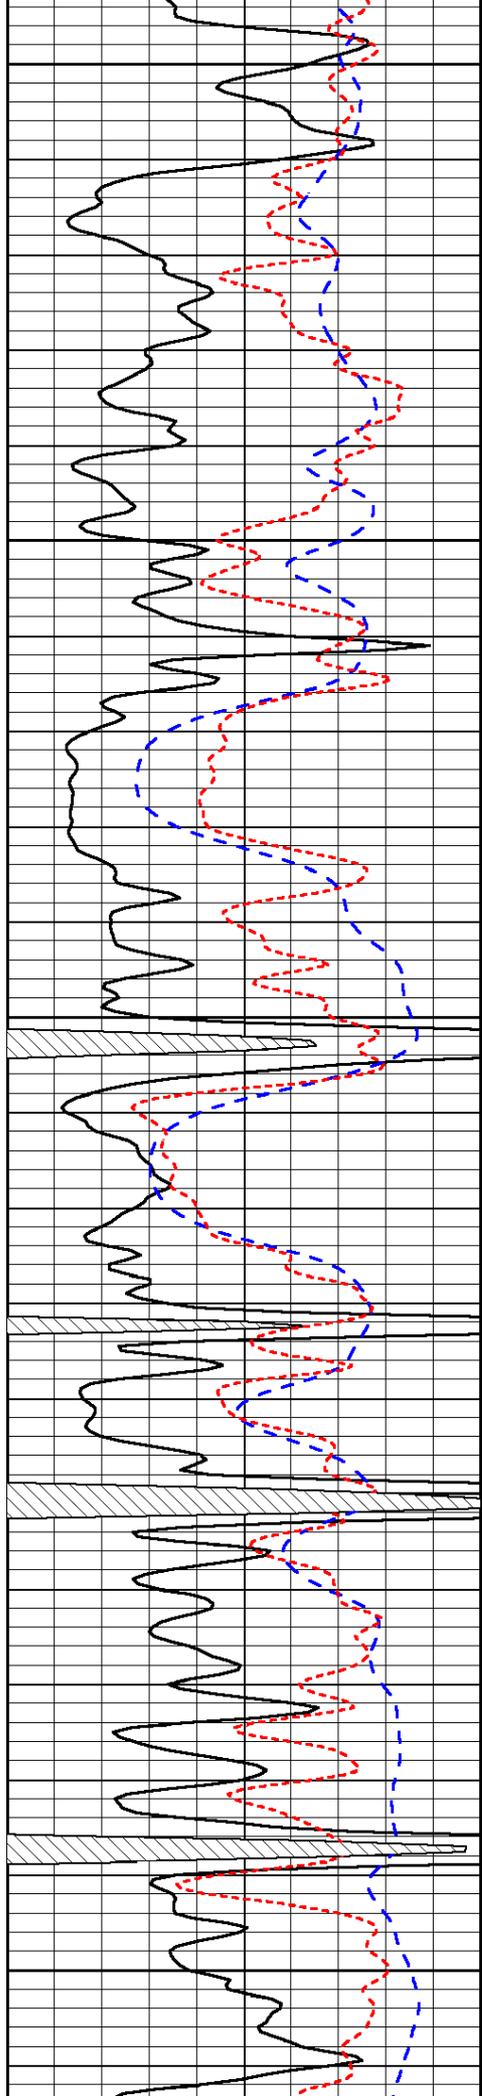


4700

4750

4800

4850

4900

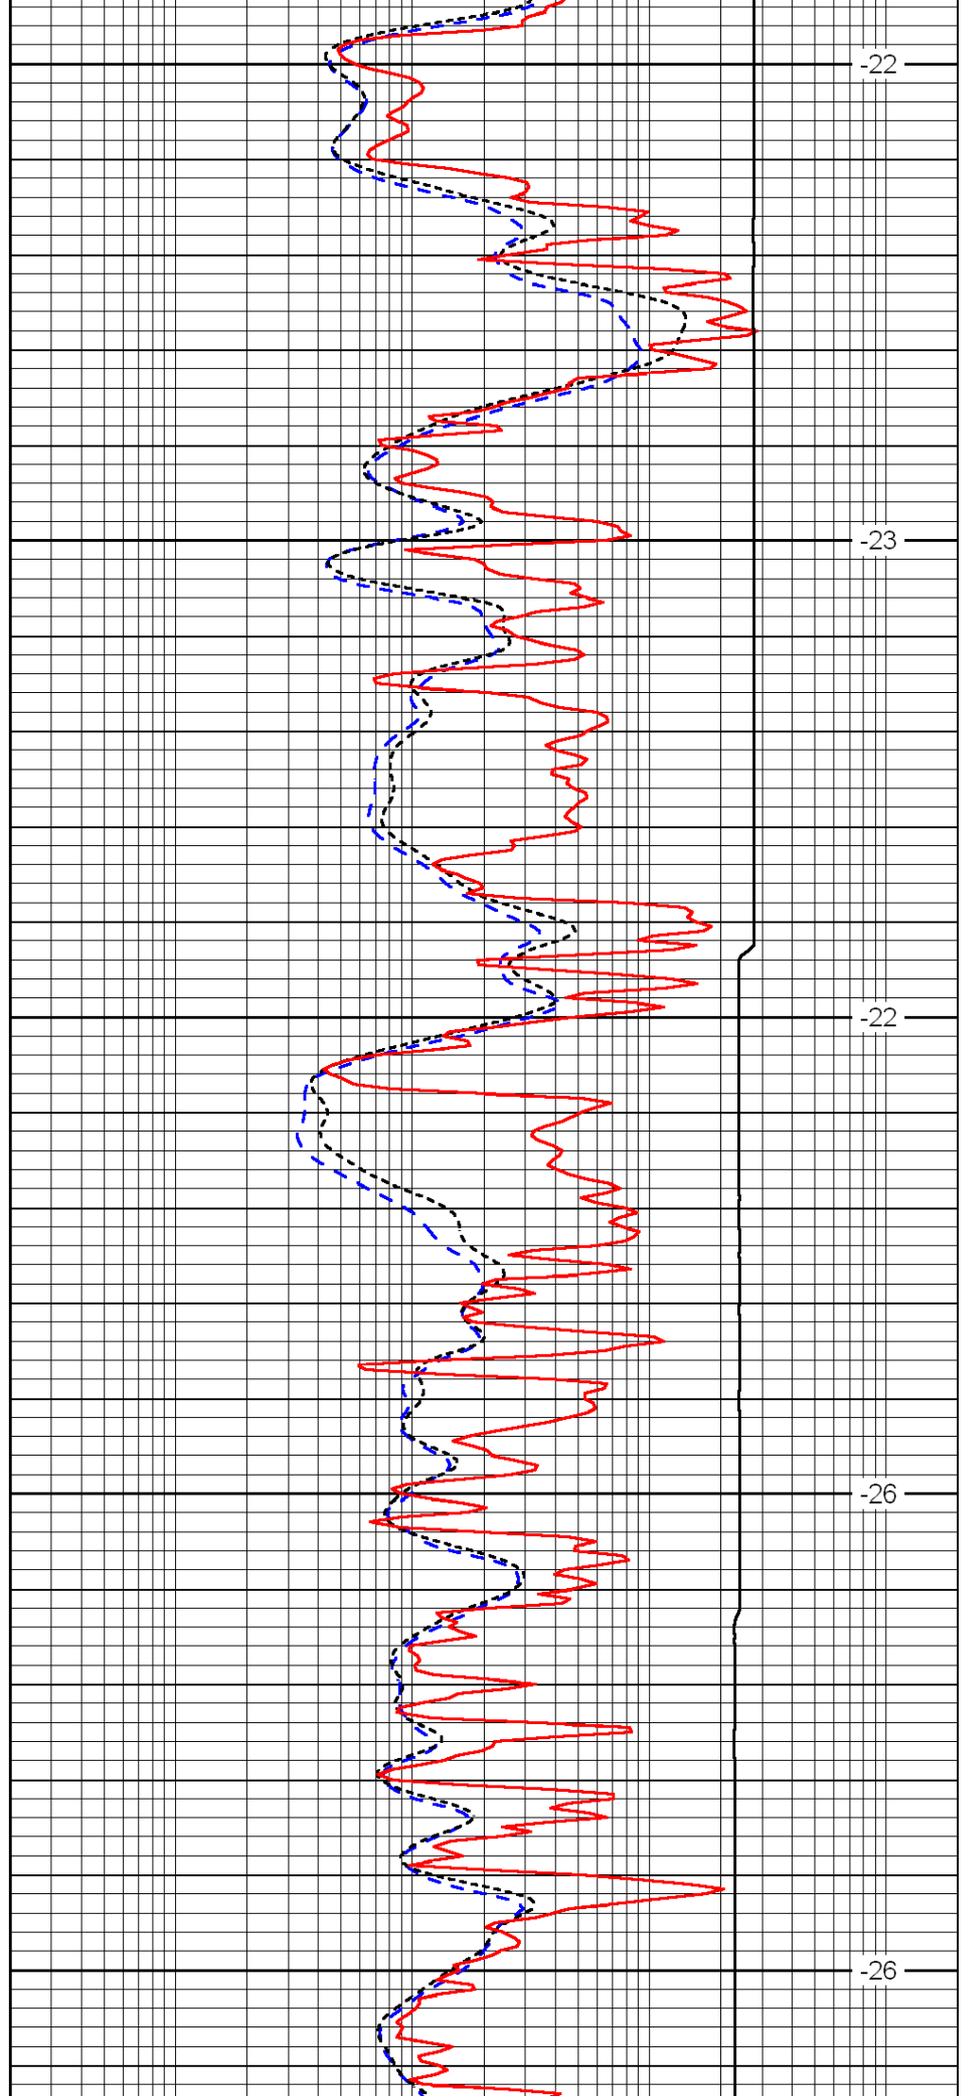


-22

-23

-22

-26

-26

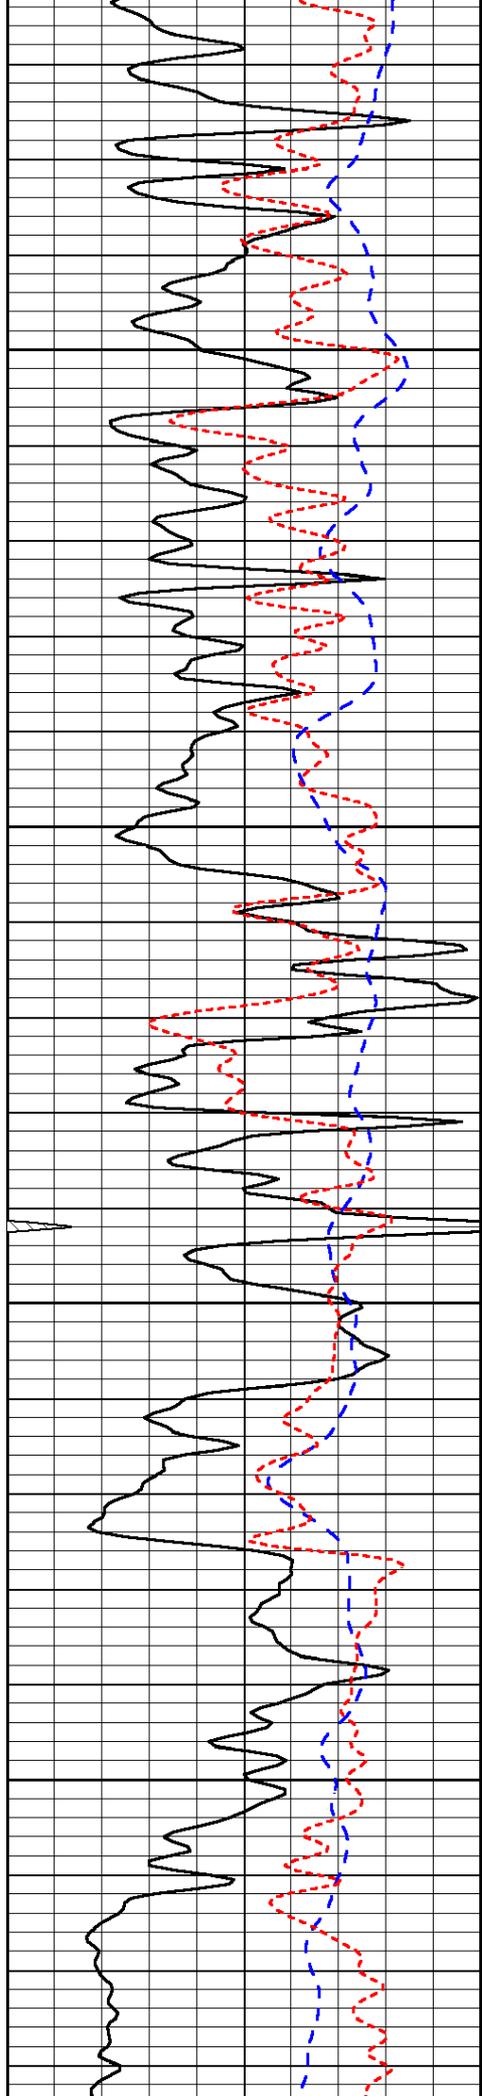


4950

5000

5050

5100

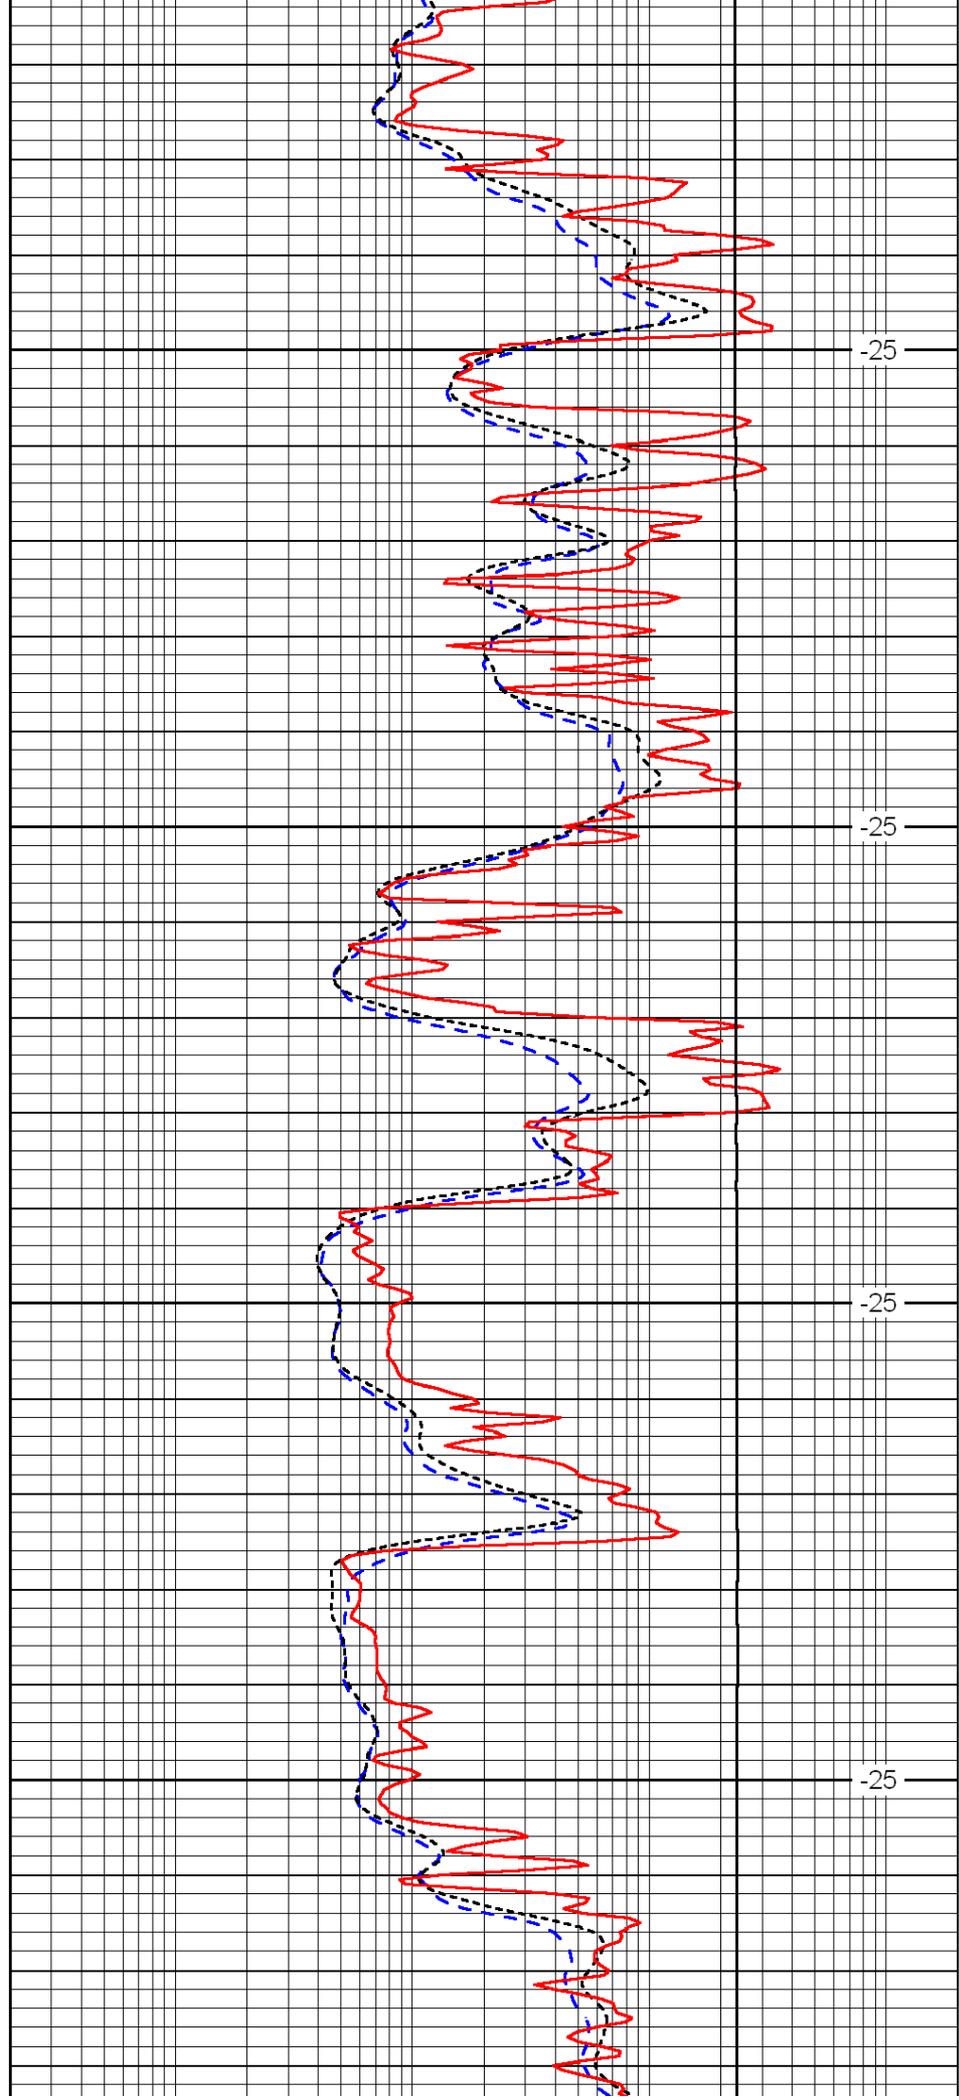


-25

-25

-25

-25

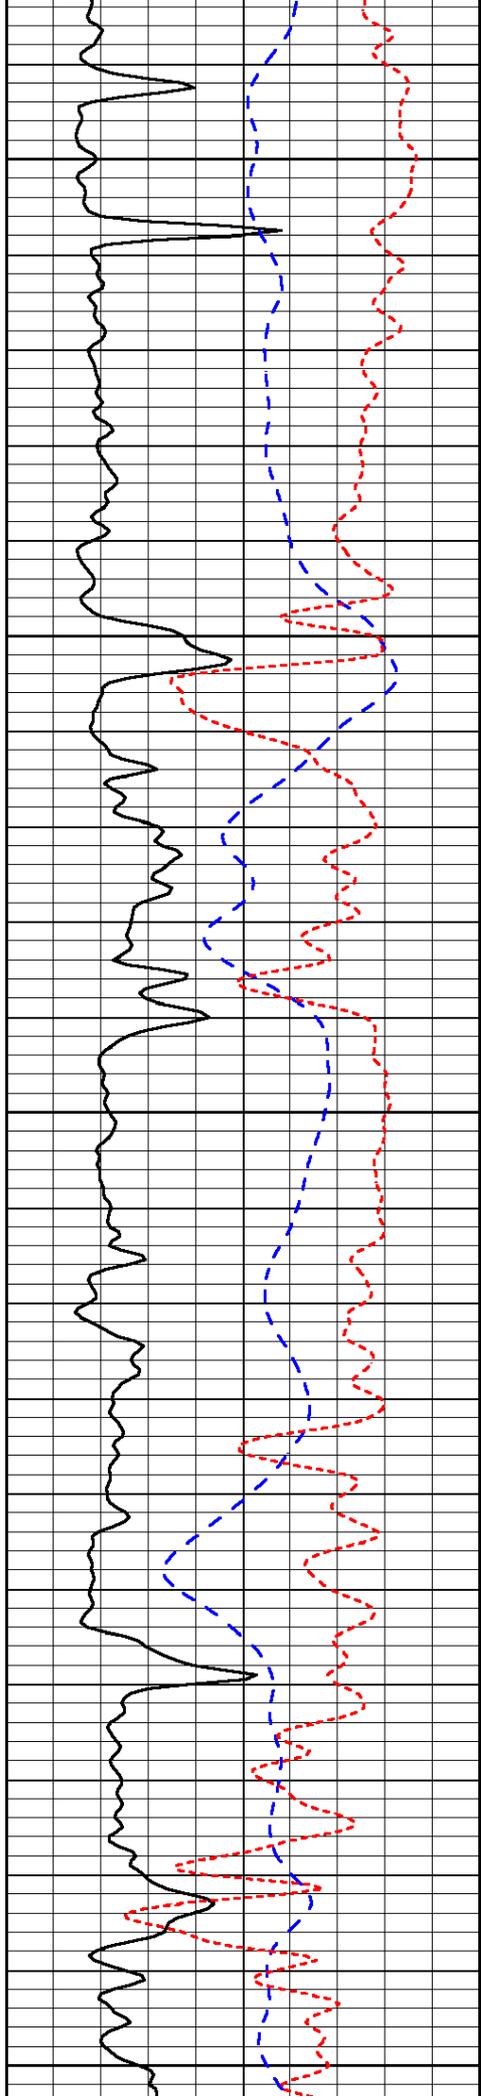


5150

5200

5250

5300

5350

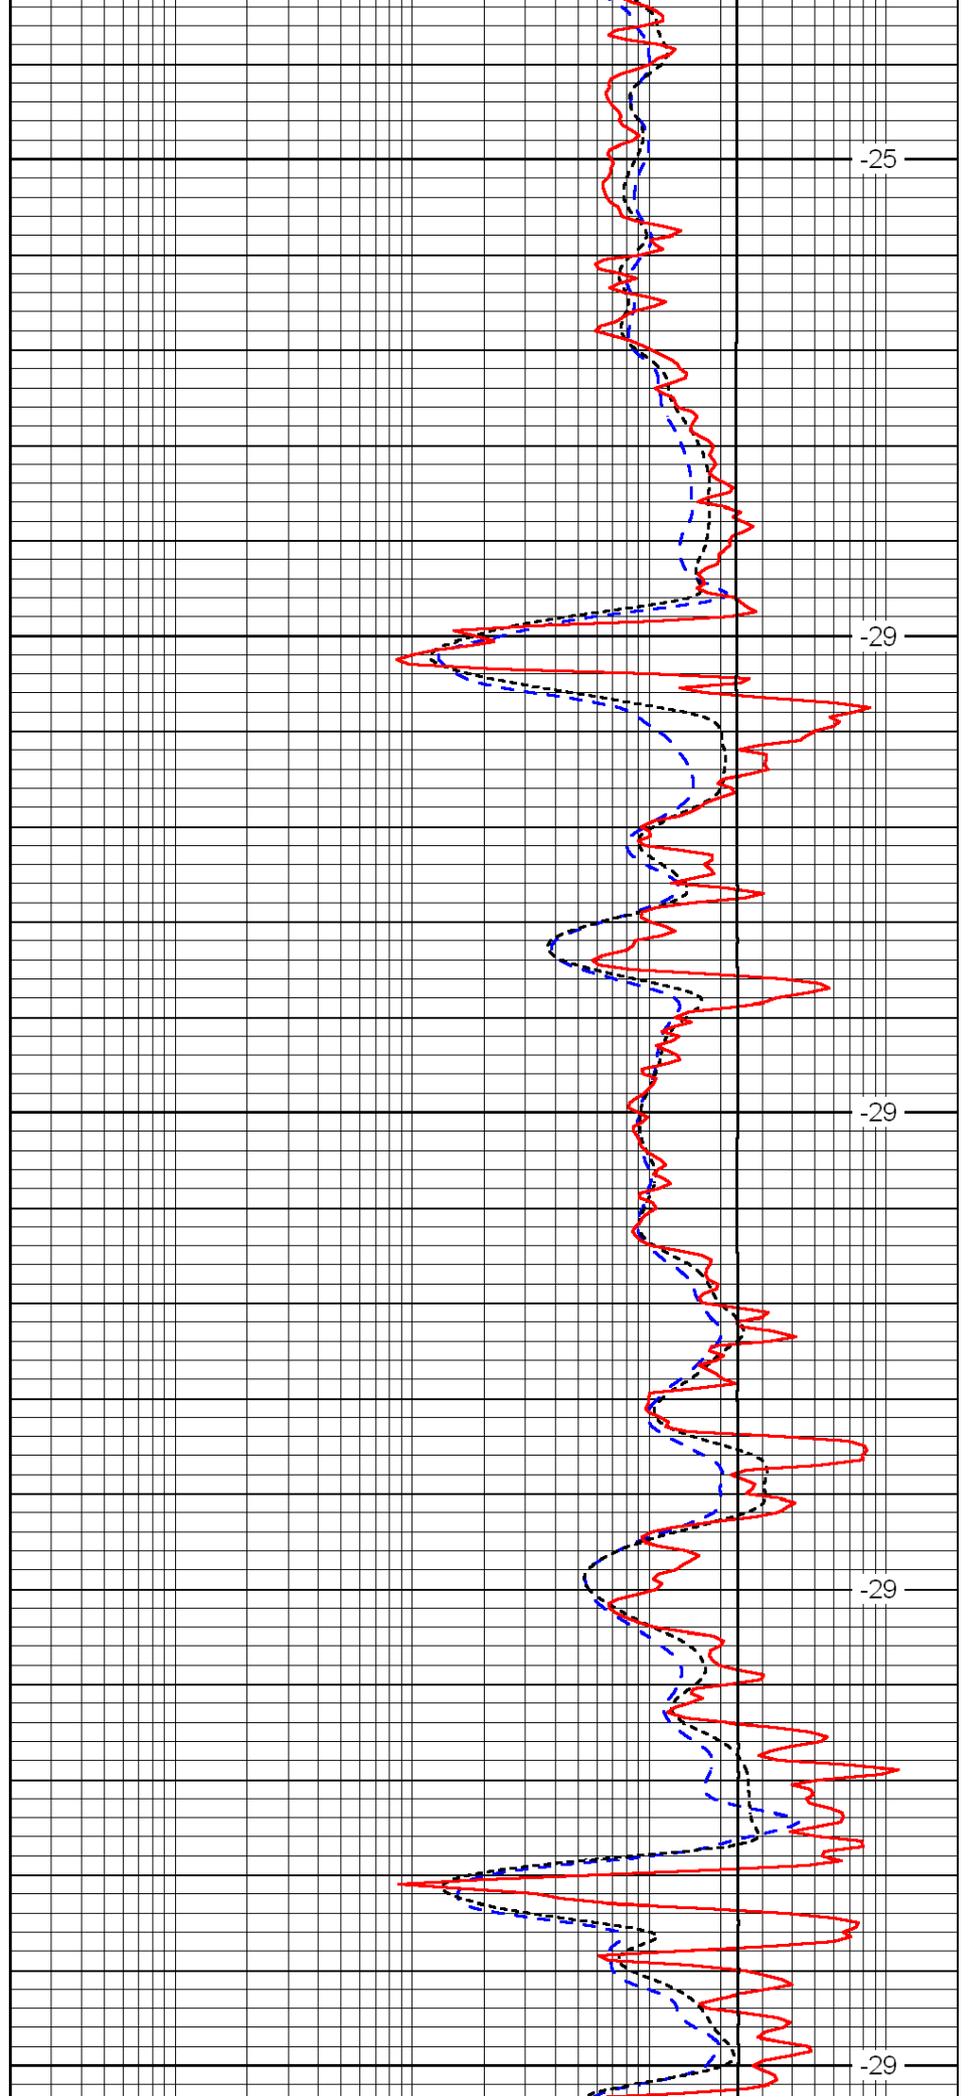


-25

-29


-29

-29

-29

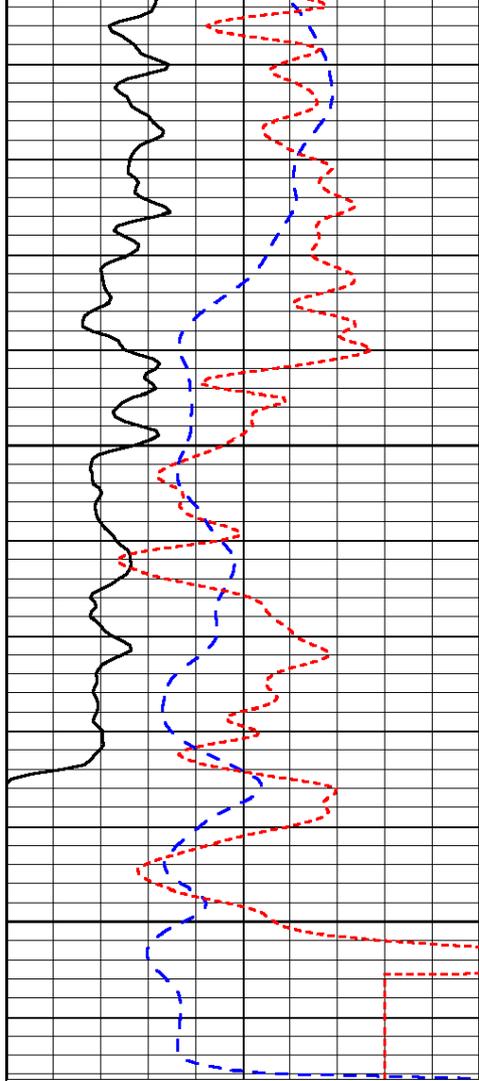

| | | |
|------|-----------|-----|
| 0 | Gamma Ray | 150 |
| -200 | SP (mV) | 0 |
| -160 | Rxo / Rt | 40 |

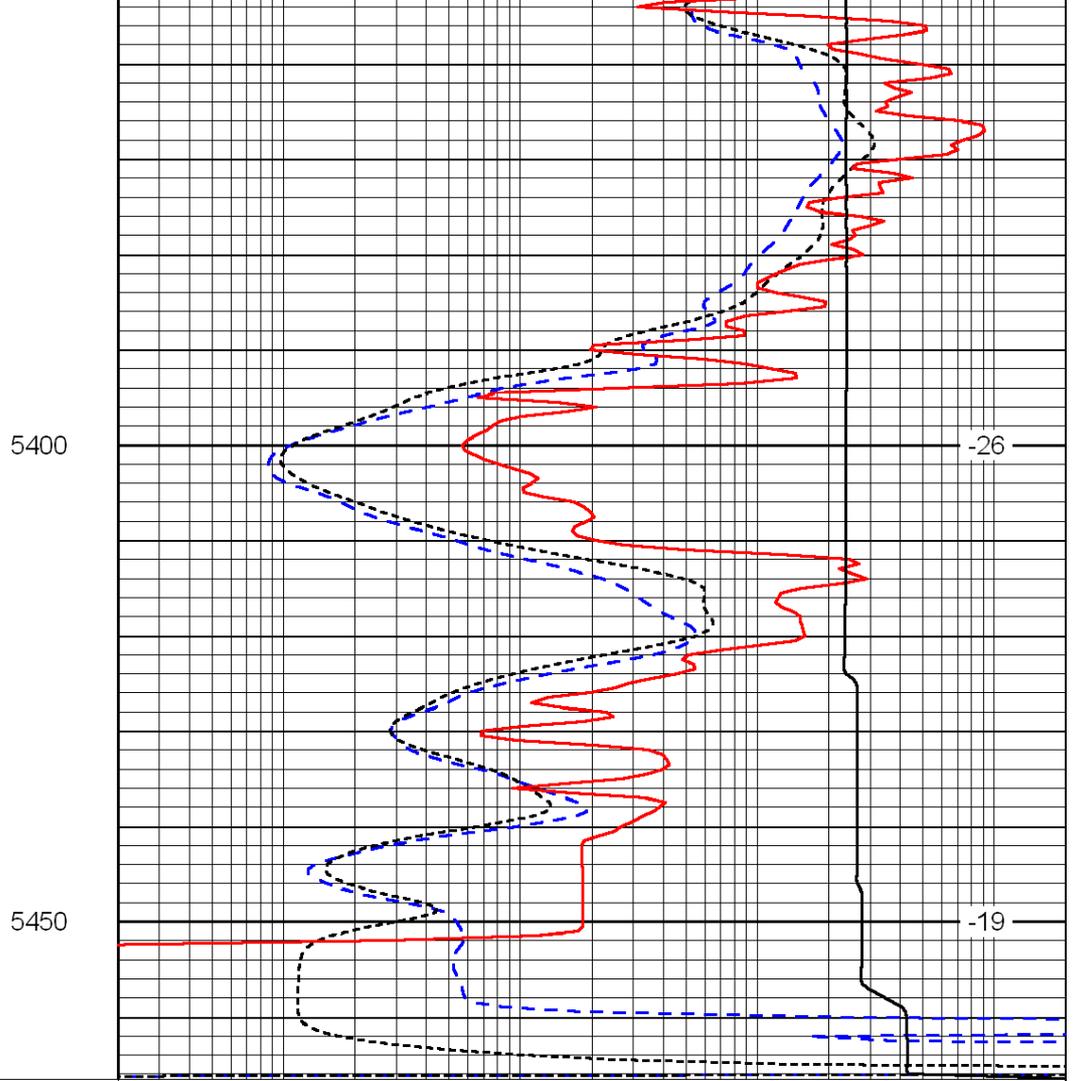

| | | |
|-------|---------------------|------|
| 0.2 | Deep Resistivity | 2000 |
| 0.2 | Medium Resistivity | 2000 |
| 0.2 | Shallow Resistivity | 2000 |
| 15000 | Line Tension | 0 |

LSPD