



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-069-20,335-00-00	Company Falcon Exploration, Inc.	Well Andee Fry No. 1-2	
	Field Wildcat	County Gray	State Kansas
	Location 200' FSL & 2360' FWL	Other Services CNL/CDL DIL/BHCS	
	Sec: 2	Twp: 28 S	Rge: 30 W
Permanent Datum Log Measured From Drilling Measured From	Ground Level Kelly Bushing Kelly Bushing	Elevation 2799 12 Ft. Above Perm. Datum	K.B. D.F. G.L. 2811 2799 2799

Date	1/14/2011
Run Number	Two
Depth Driller	5450
Depth Logger	5456
Bottom Logged Interval	5455
Top Log Interval	2600
Casing Driller	8.625 @ 1874
Casing Logger	1870
Bit Size	7.875
Type Fluid in Hole	Chemical
Salinity, ppm CL	1,300
Density / Viscosity	9.05 55
pH / Fluid Loss	9.5 6.8
Source of Sample	Flowline
Rm @ Meas. Temp	1.2 @ 55
Rmf @ Meas. Temp	.90 @ 55
Rmc @ Meas. Temp	1.62 @ 55
Source of Rmf / Rmc	Charts
Rm @ BHT	.50 @ 133
Operating Rig Time	7 Hours
Max Rec. Temp. F	133
Equipment Number	4
Location	Hays
Recorded By	K. Bange
Witnessed By	Keith Reavis
	Dave Wilson

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments



Thank you for using Log-Tech, Inc.
 (785) 625-3858



 Montezuma, 7 W to 6th rd, 6 N, W into


0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

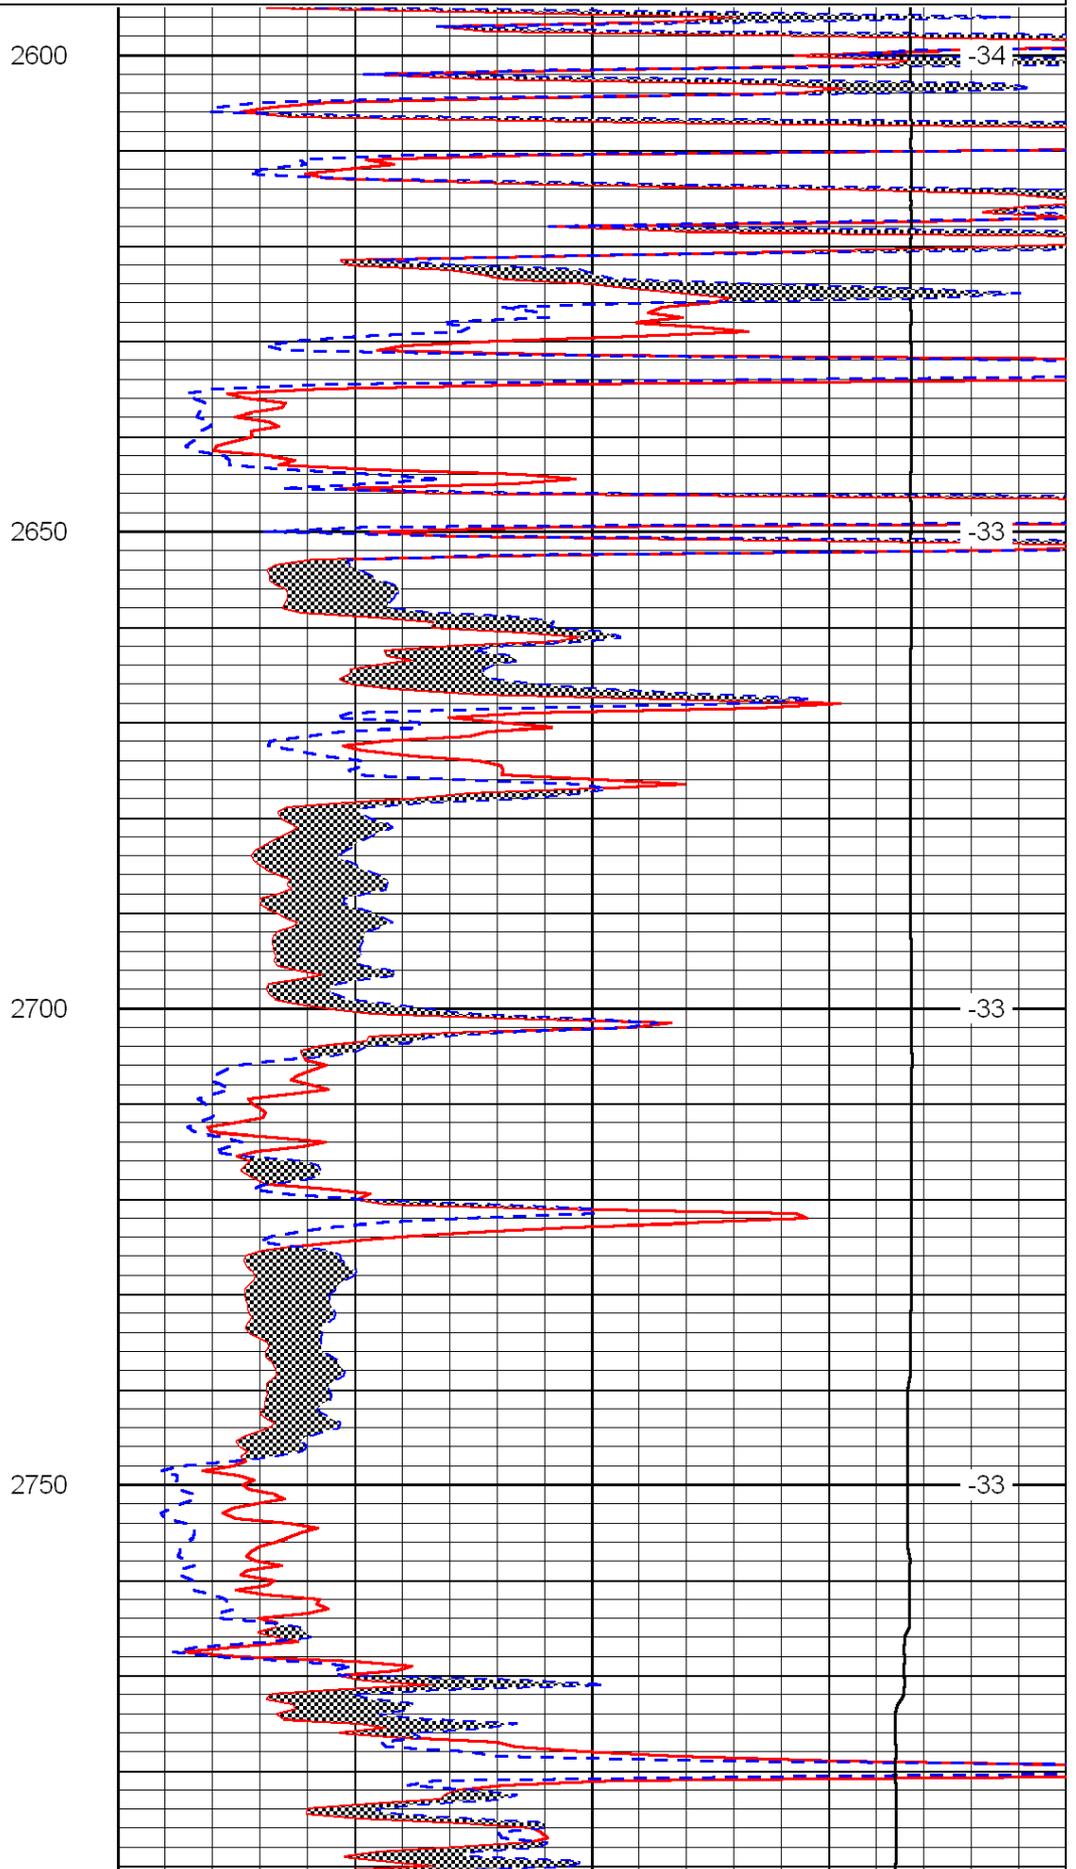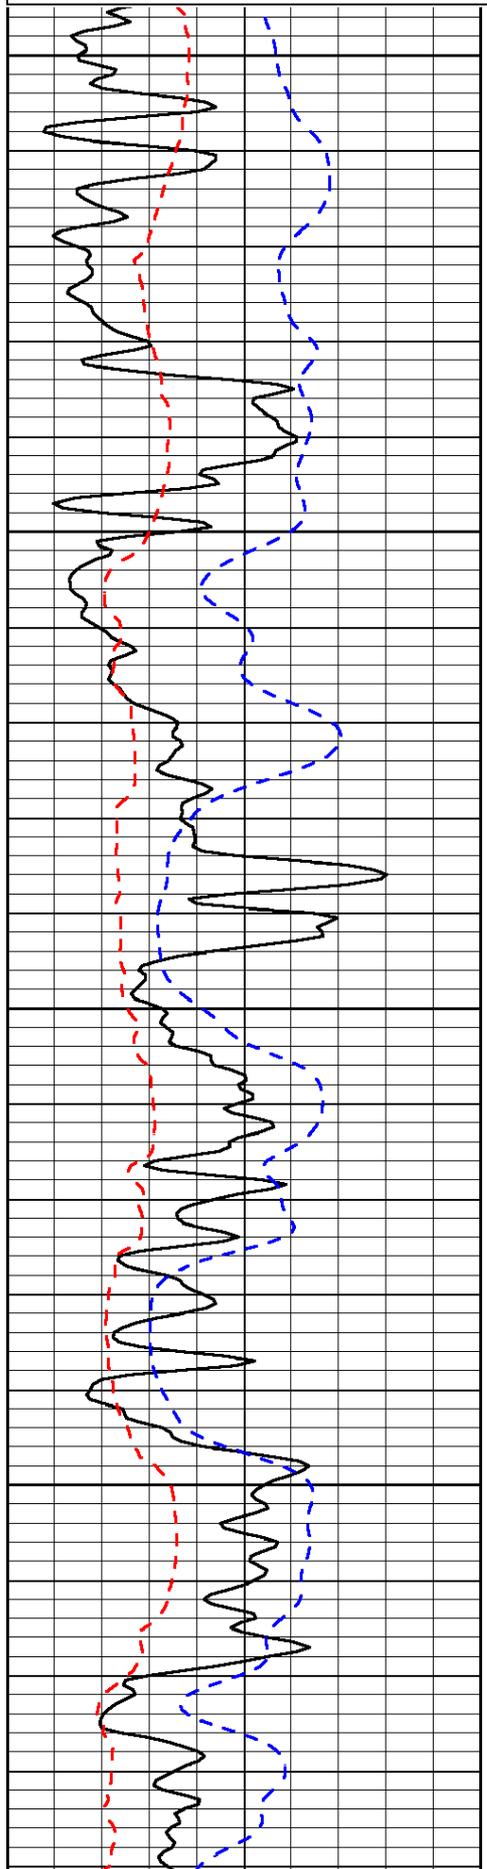

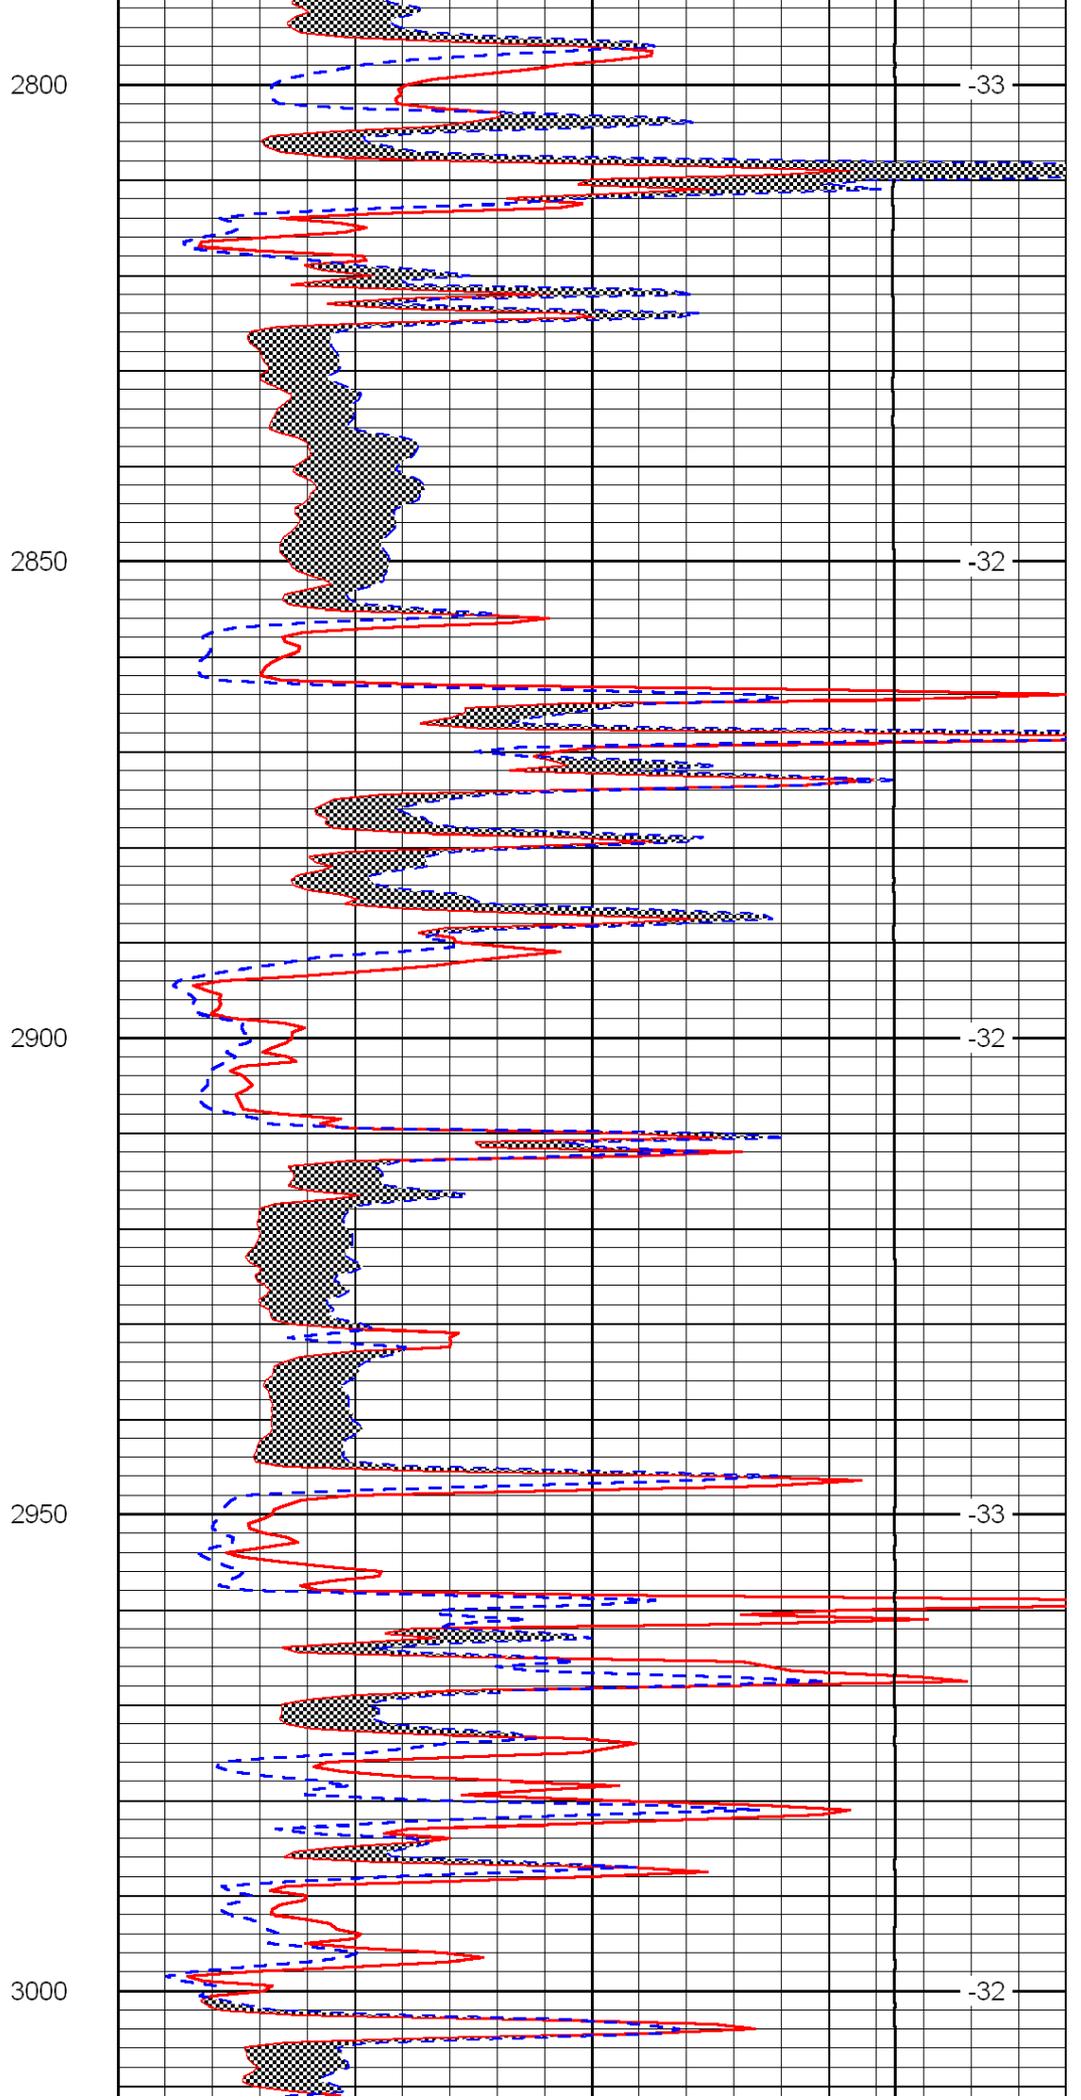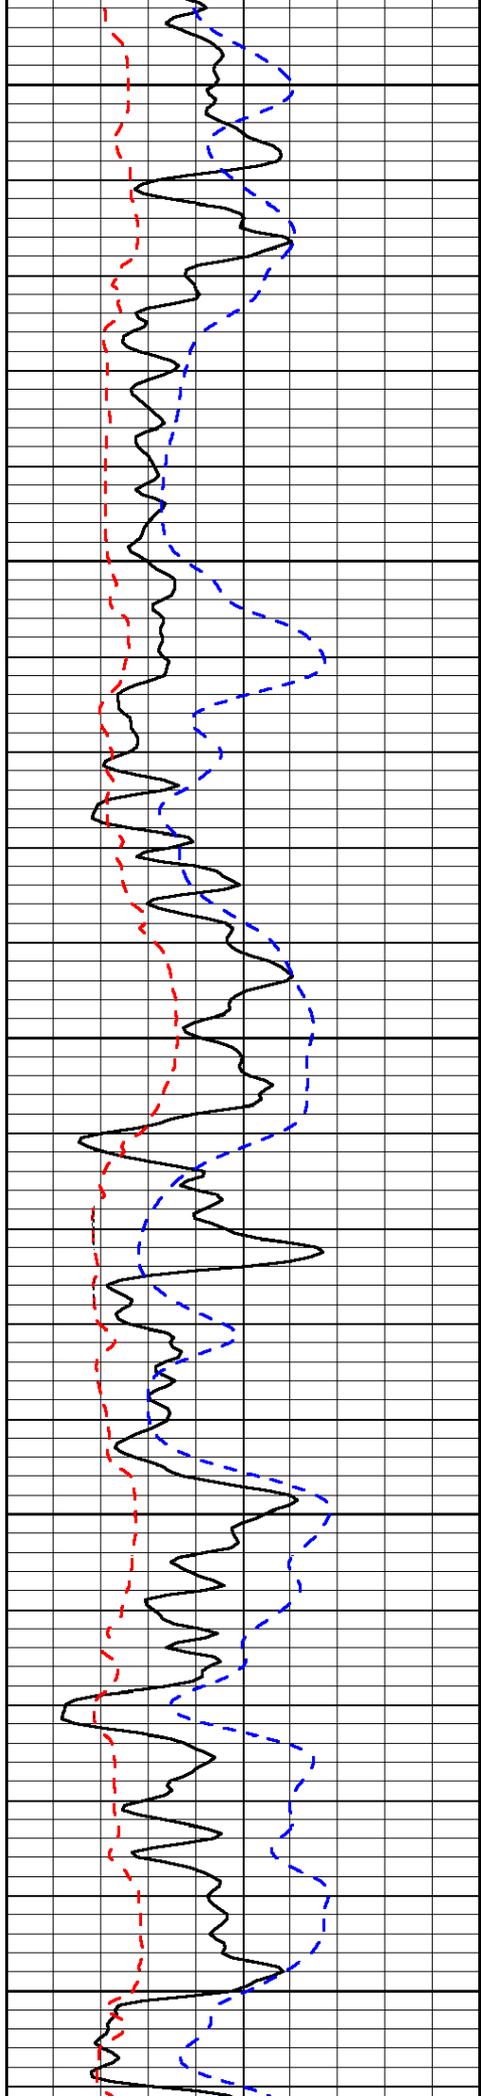

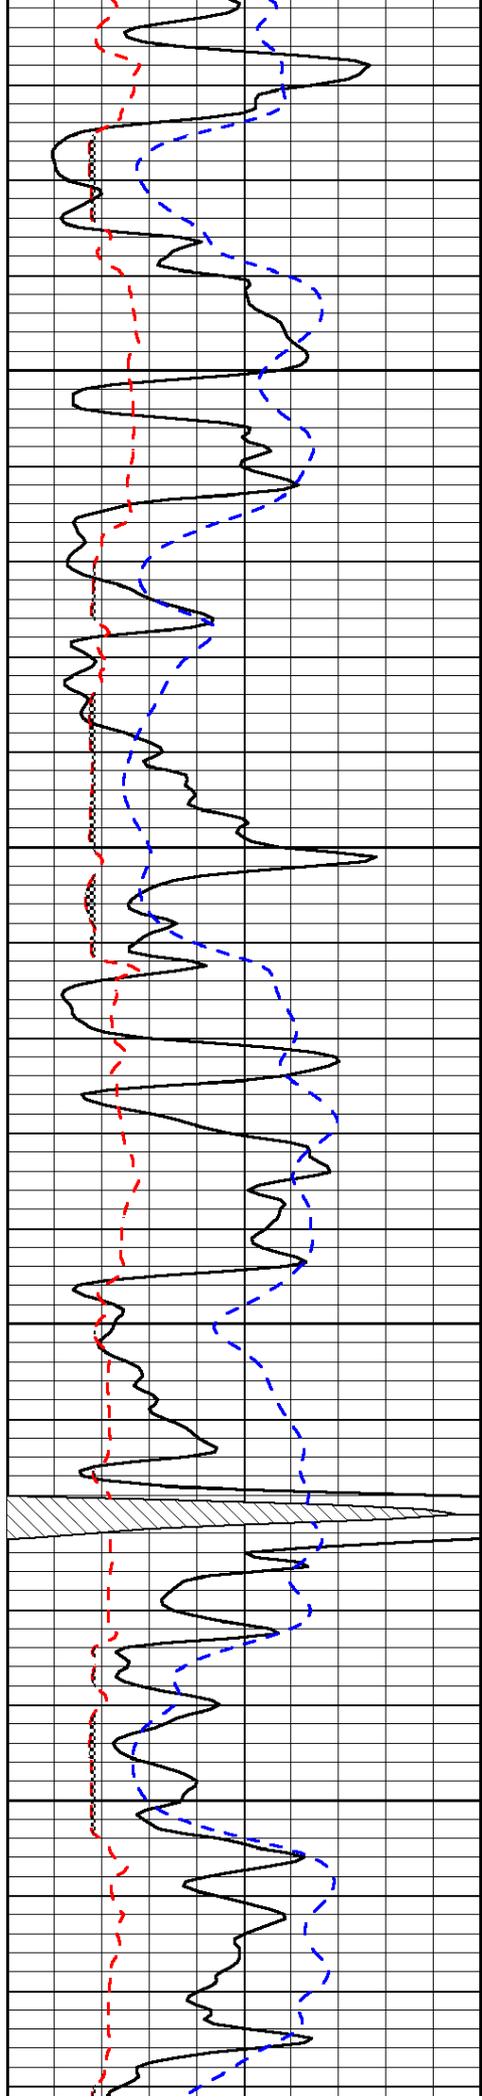




3050


3100

3150

3200

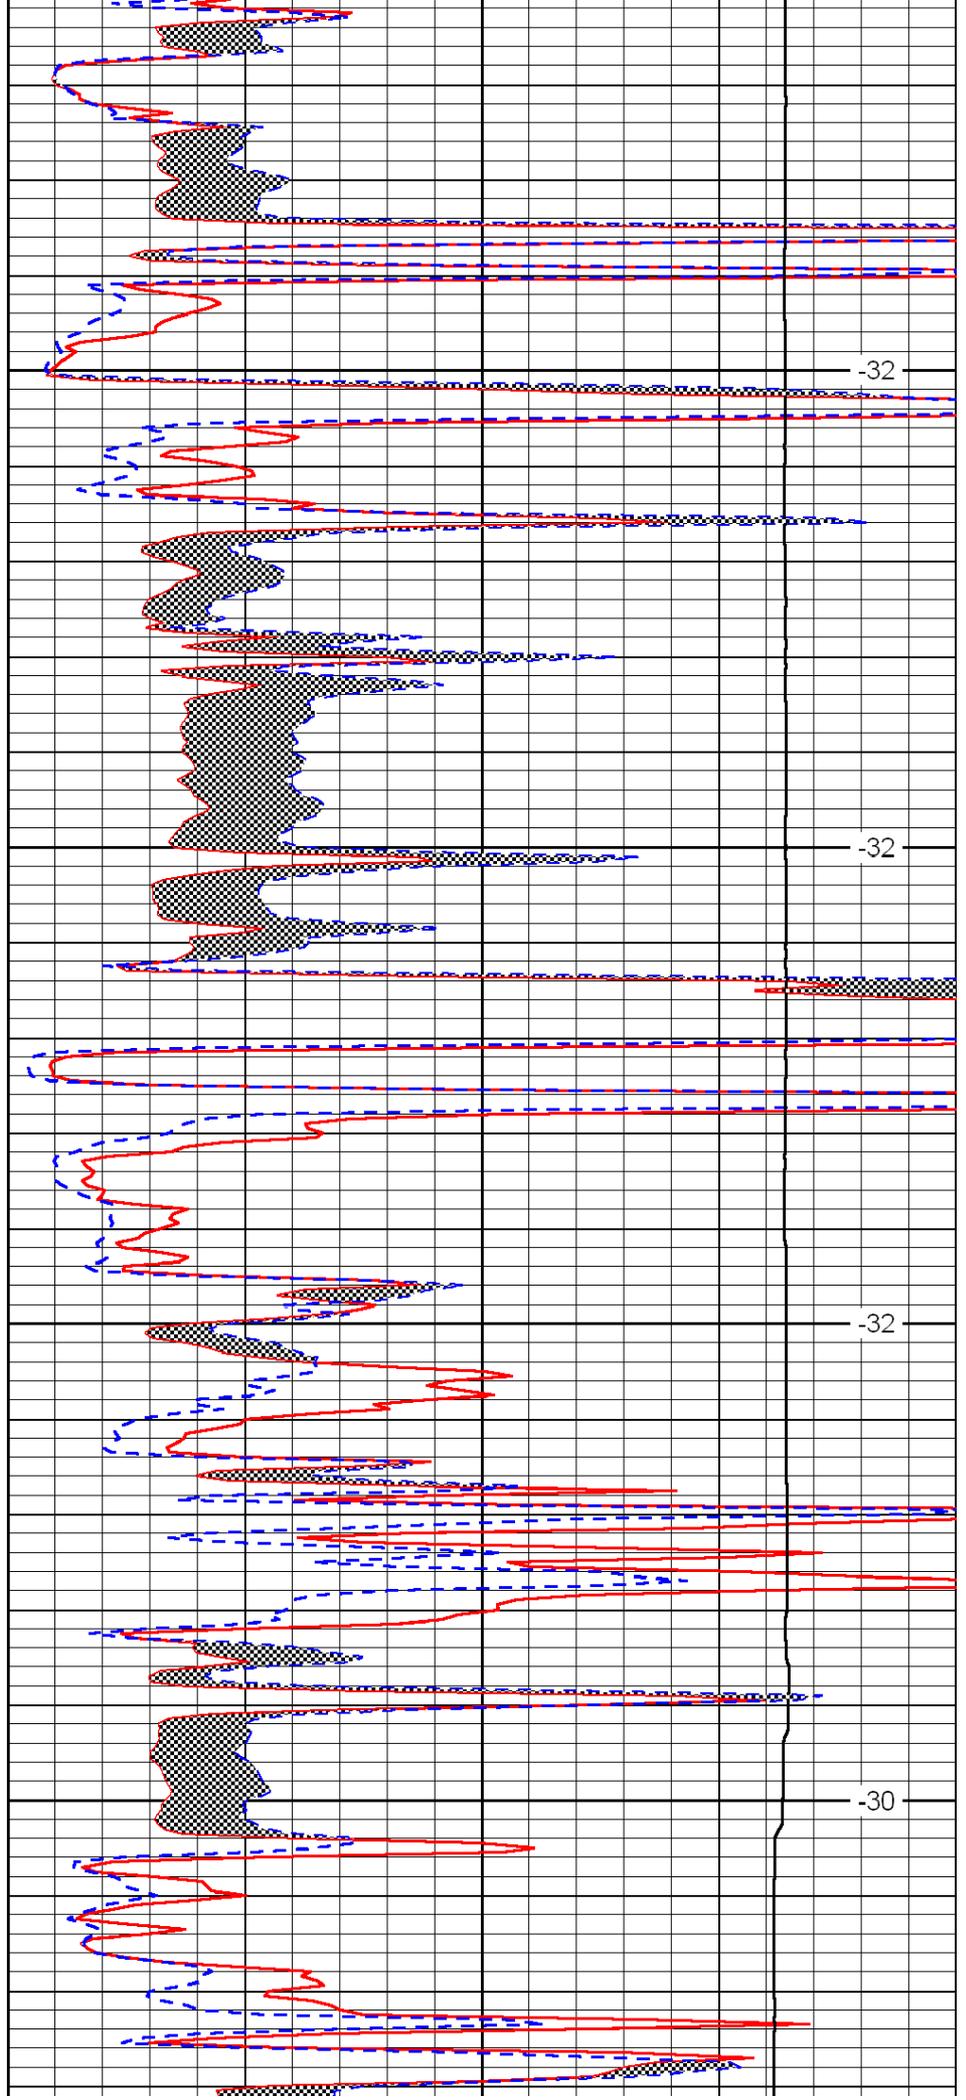

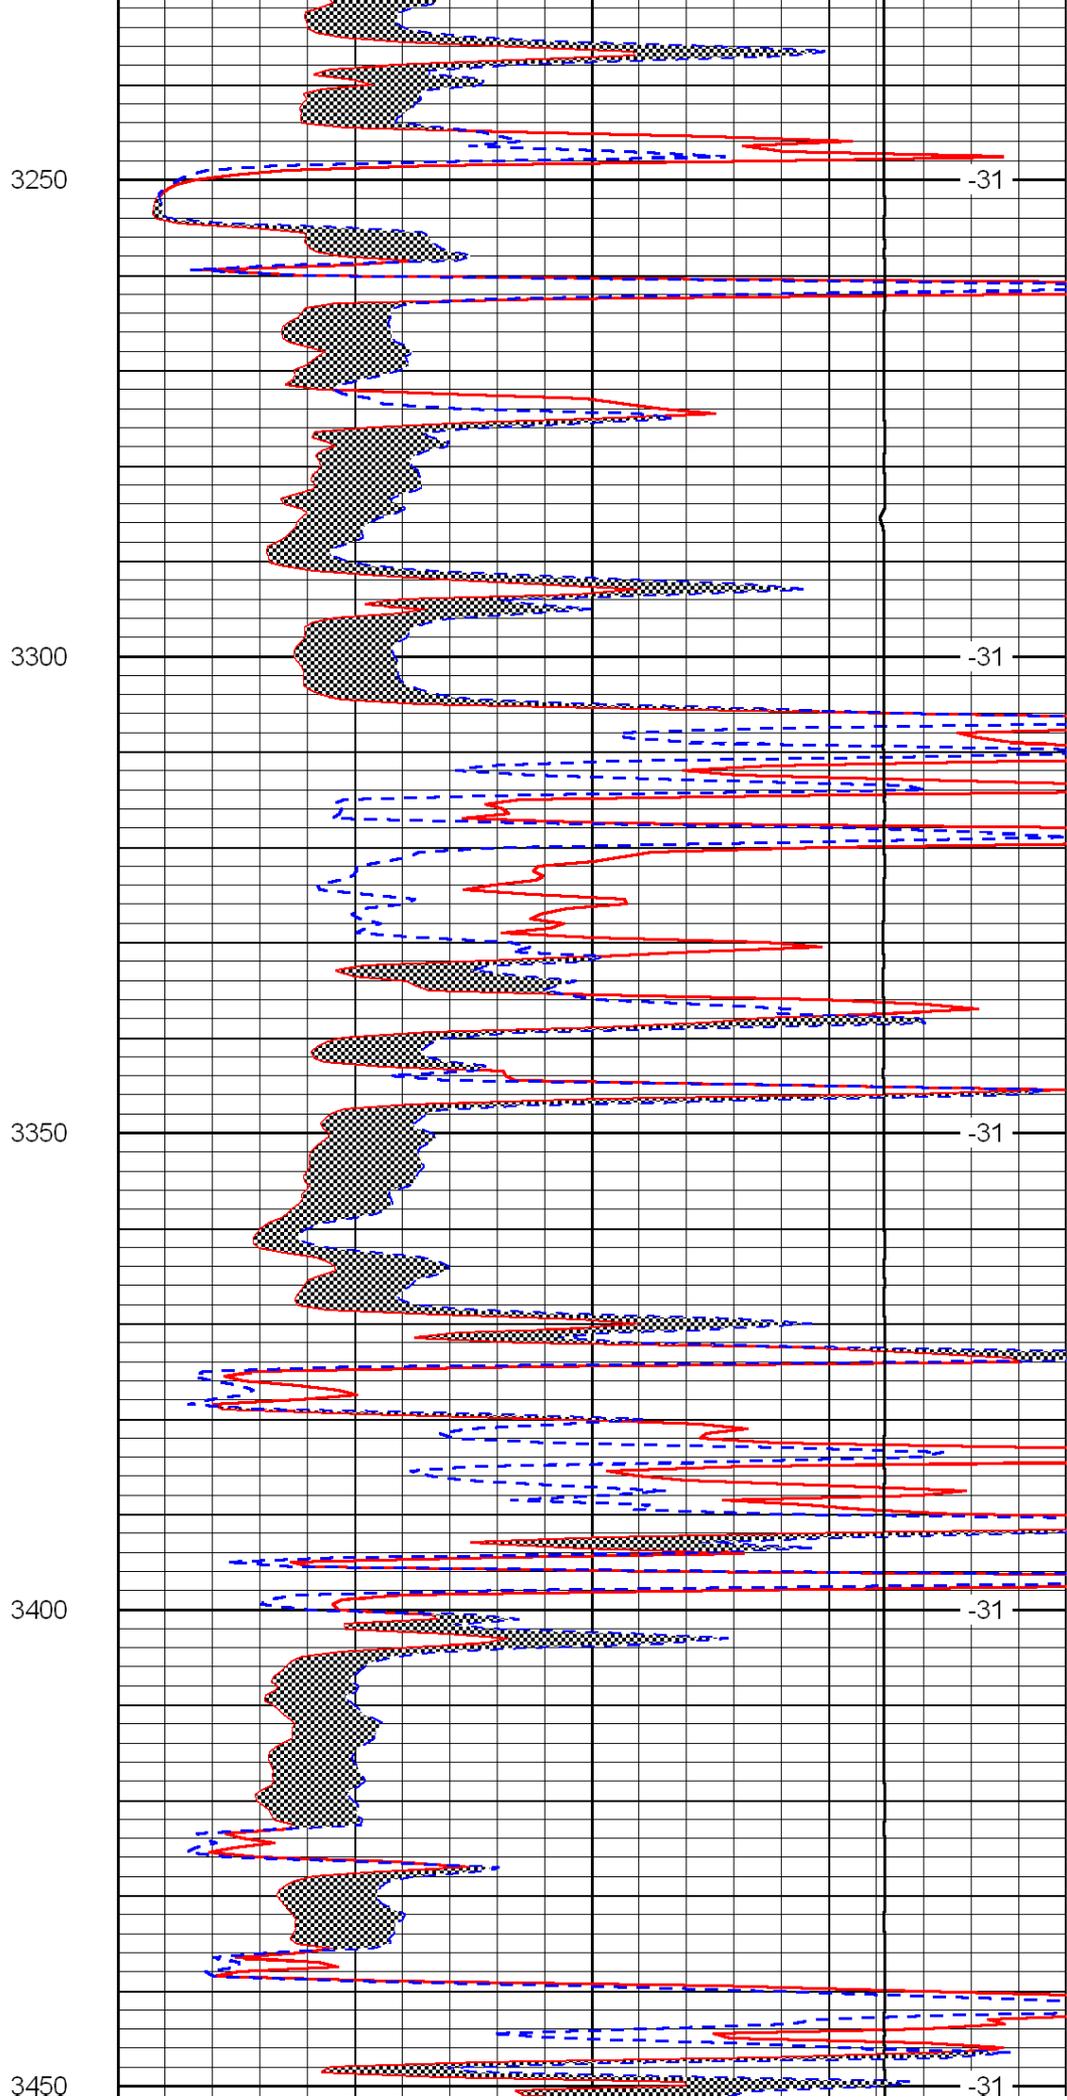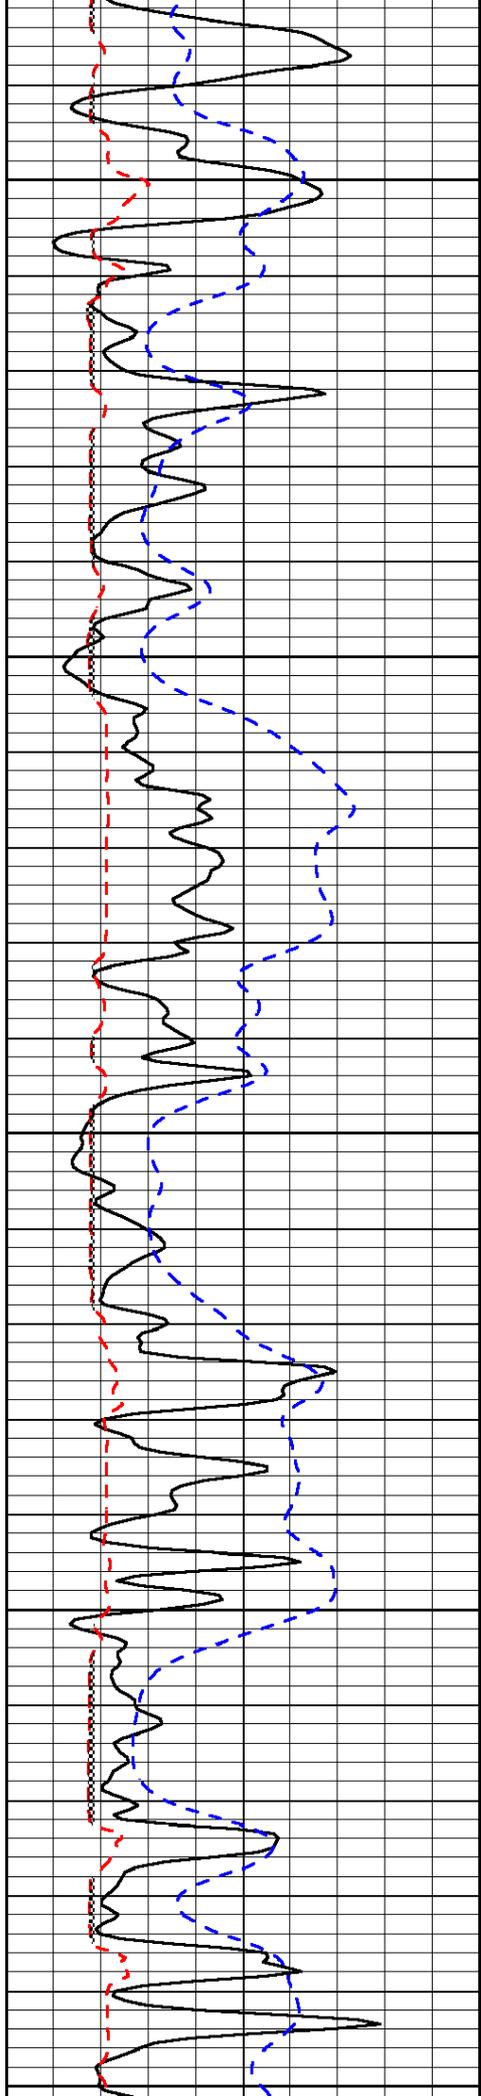

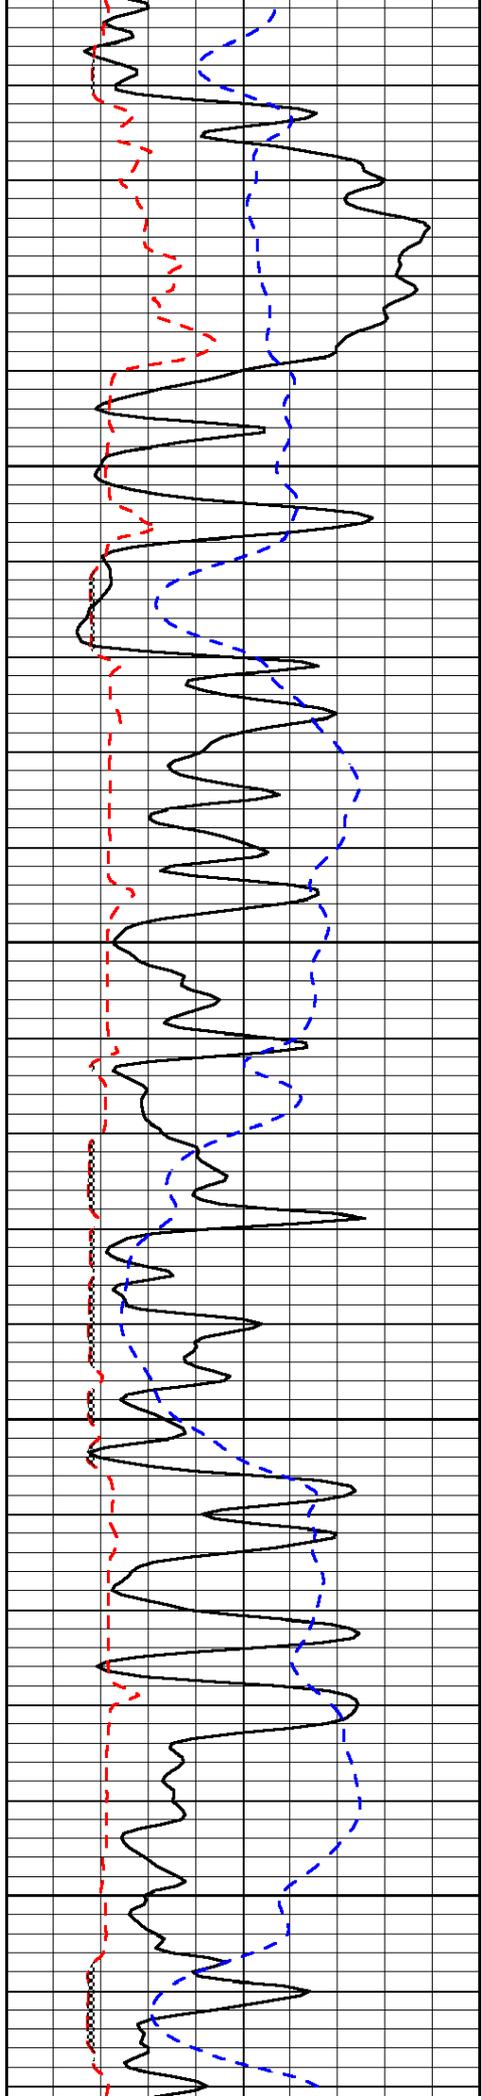


3500

3550

3600

3650

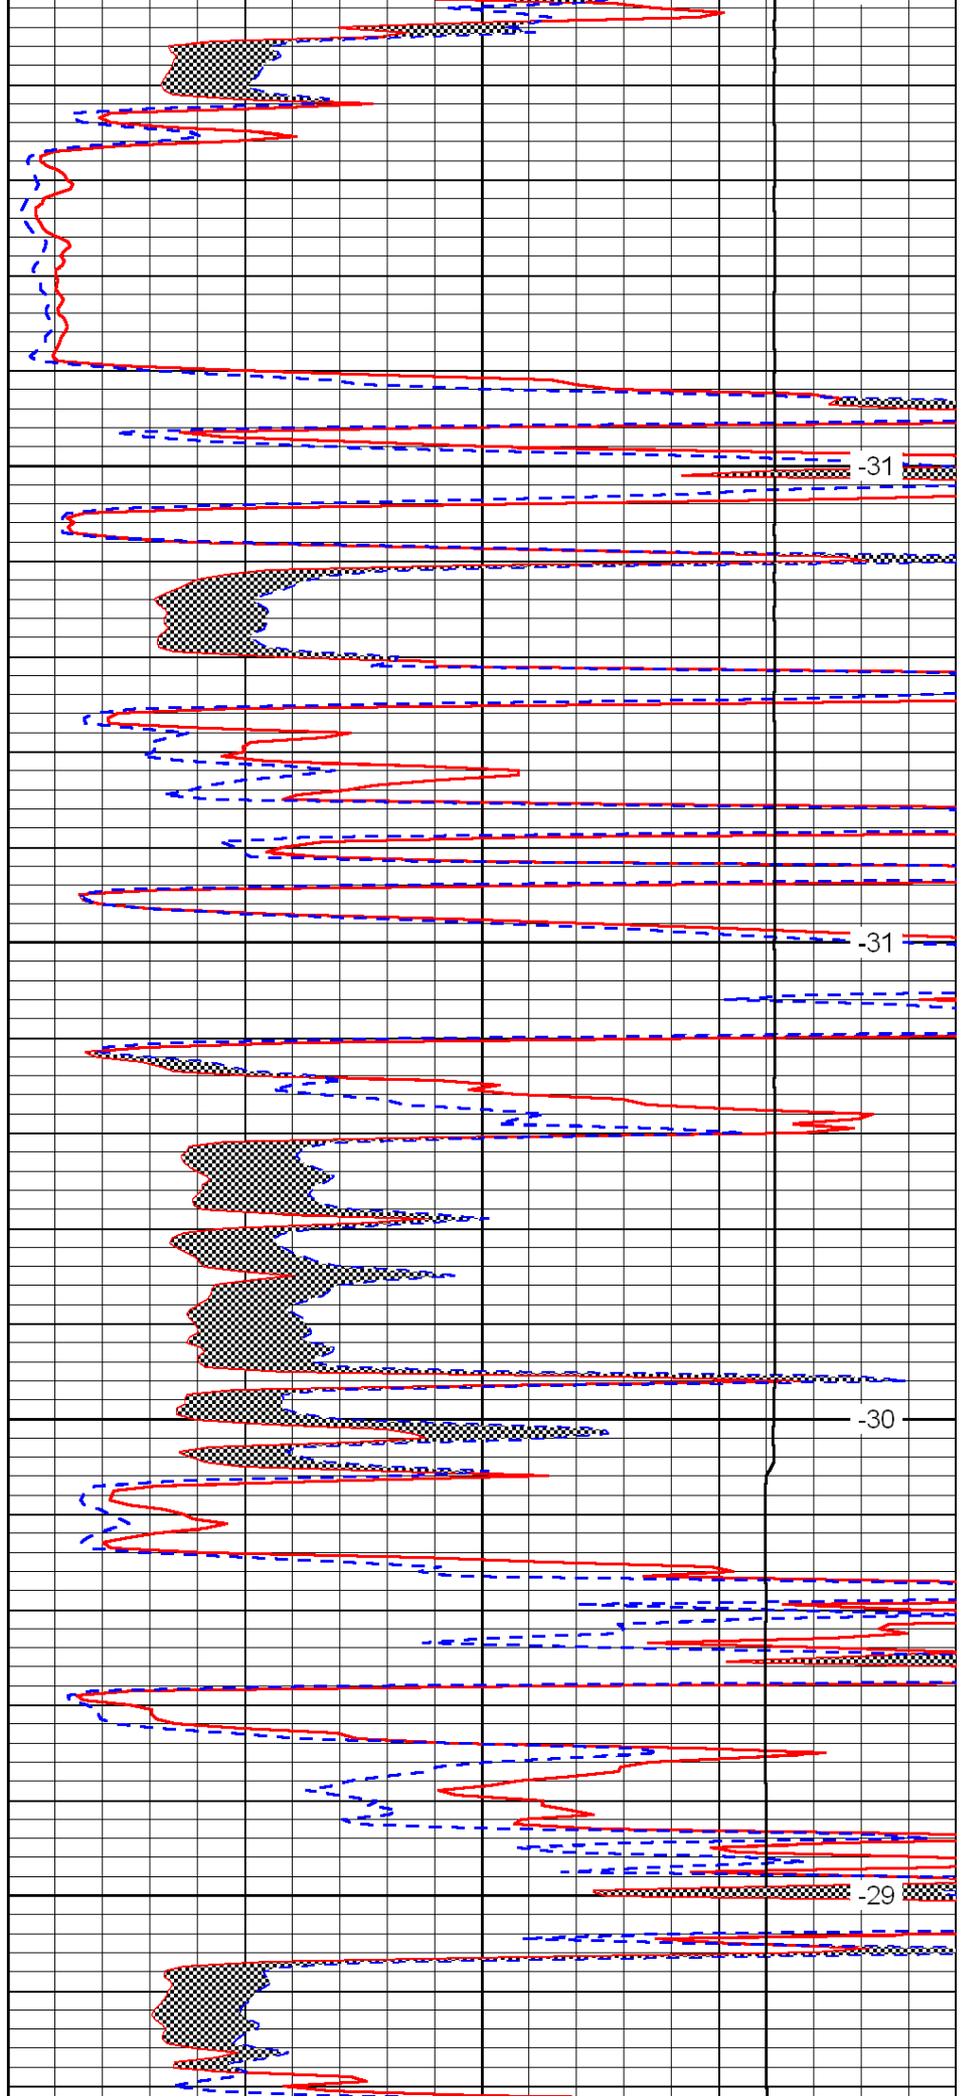


-31

-31

-30

-29

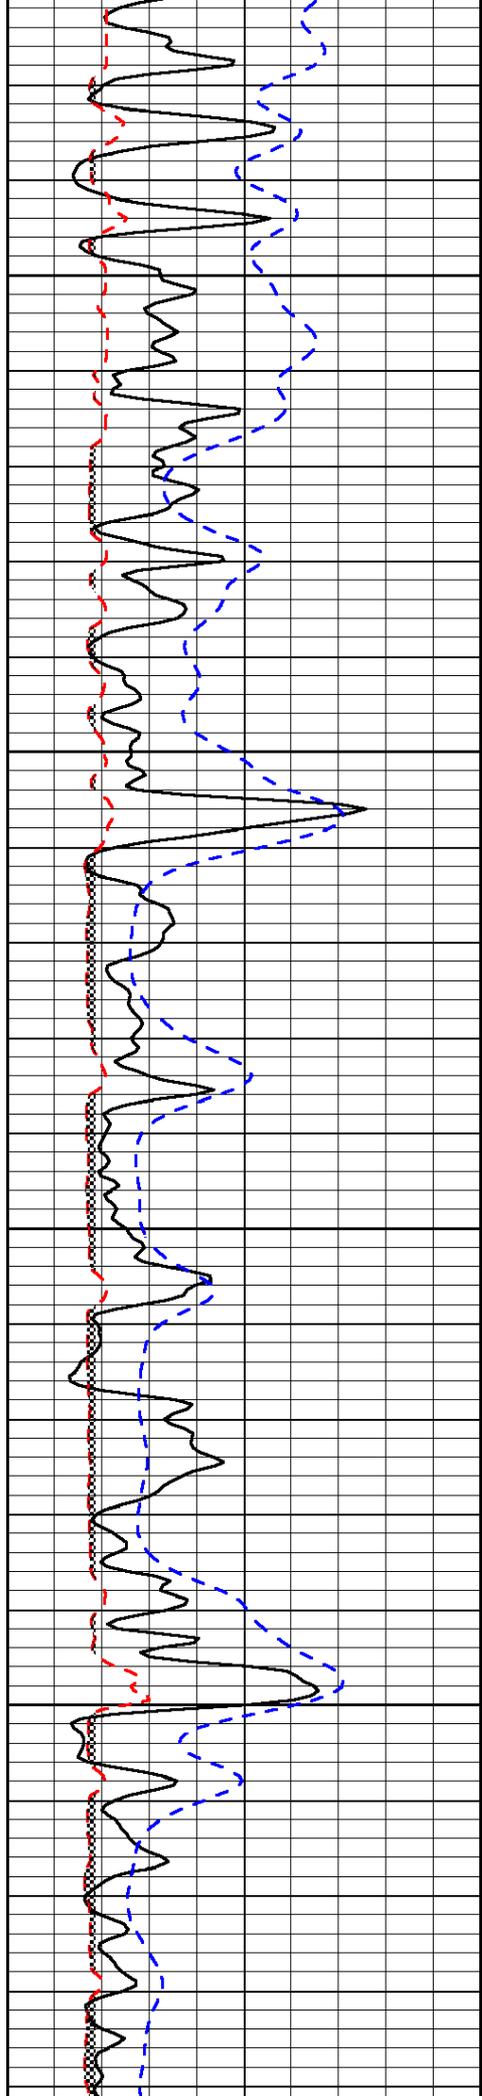


3700

3750

3800

3850


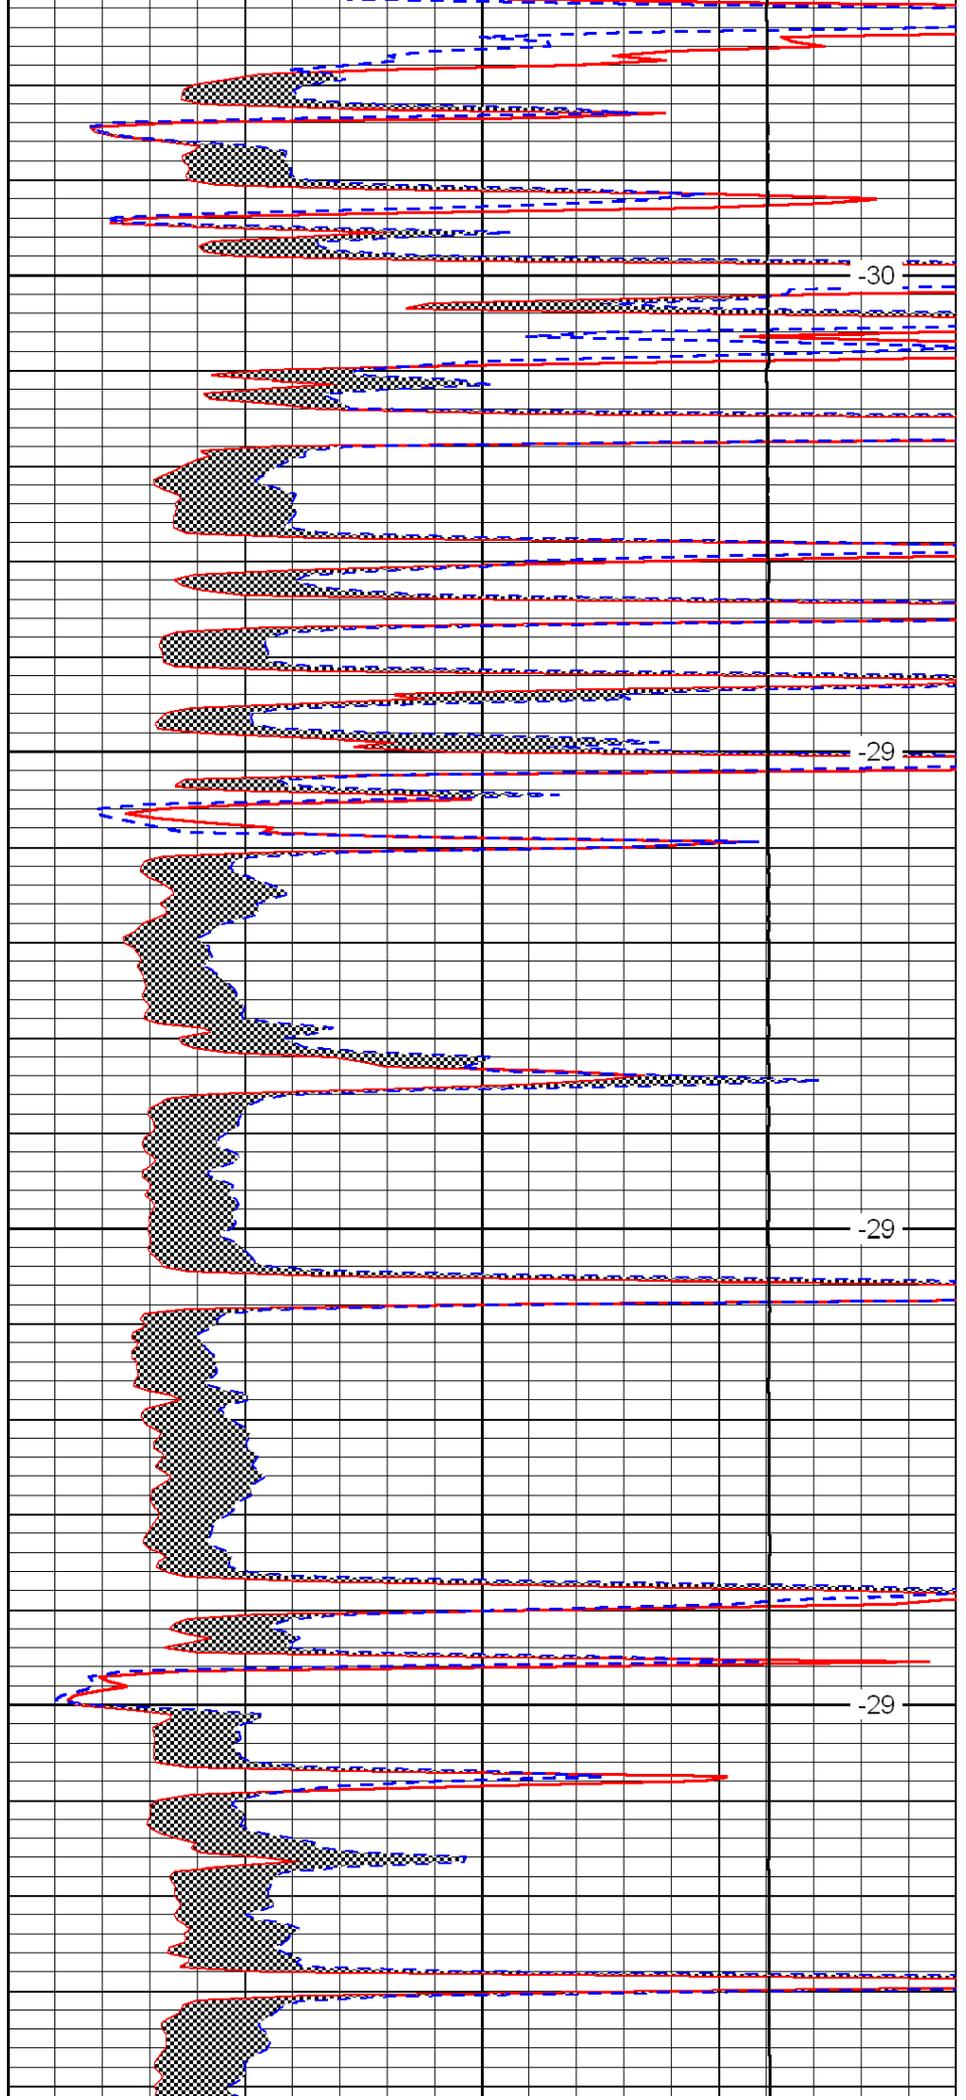



-30

-29

-29

-29

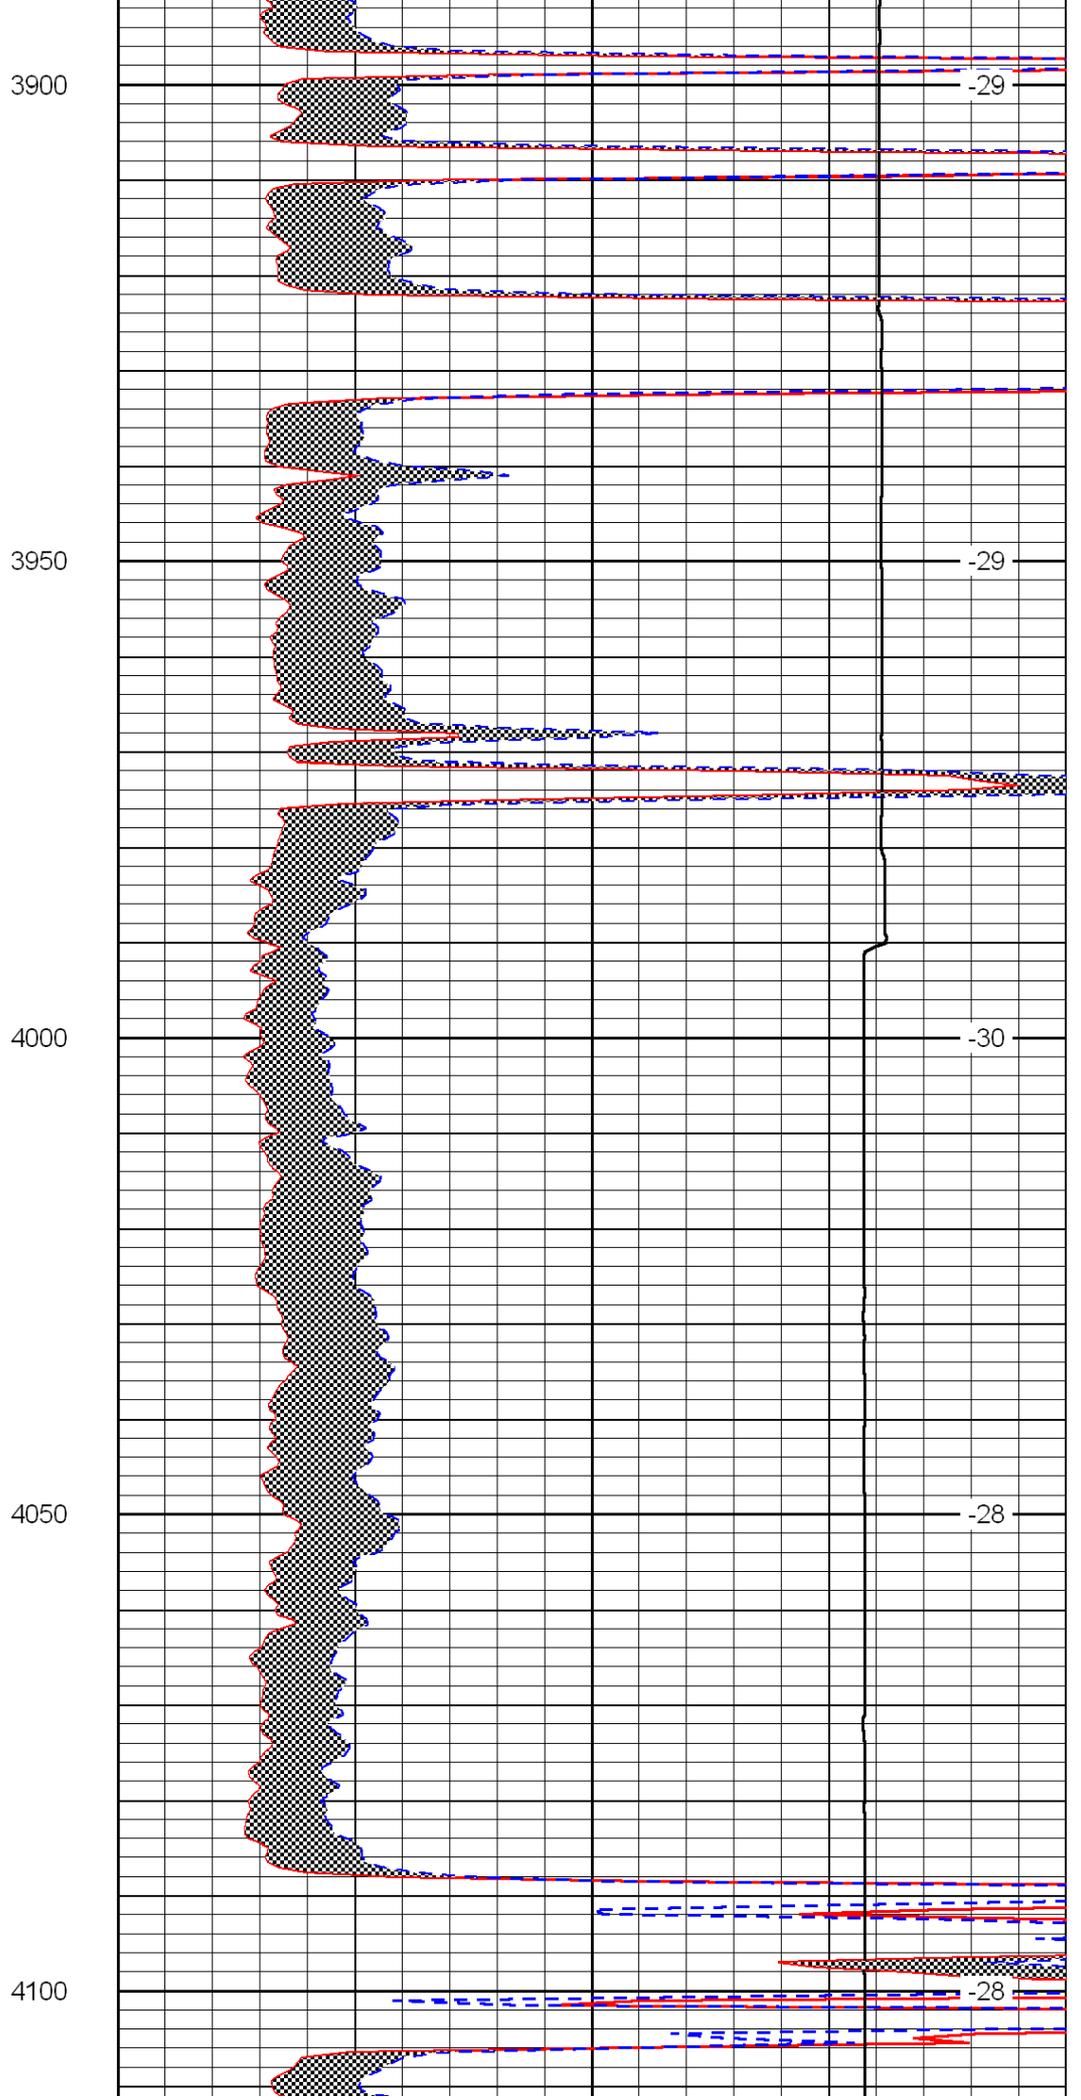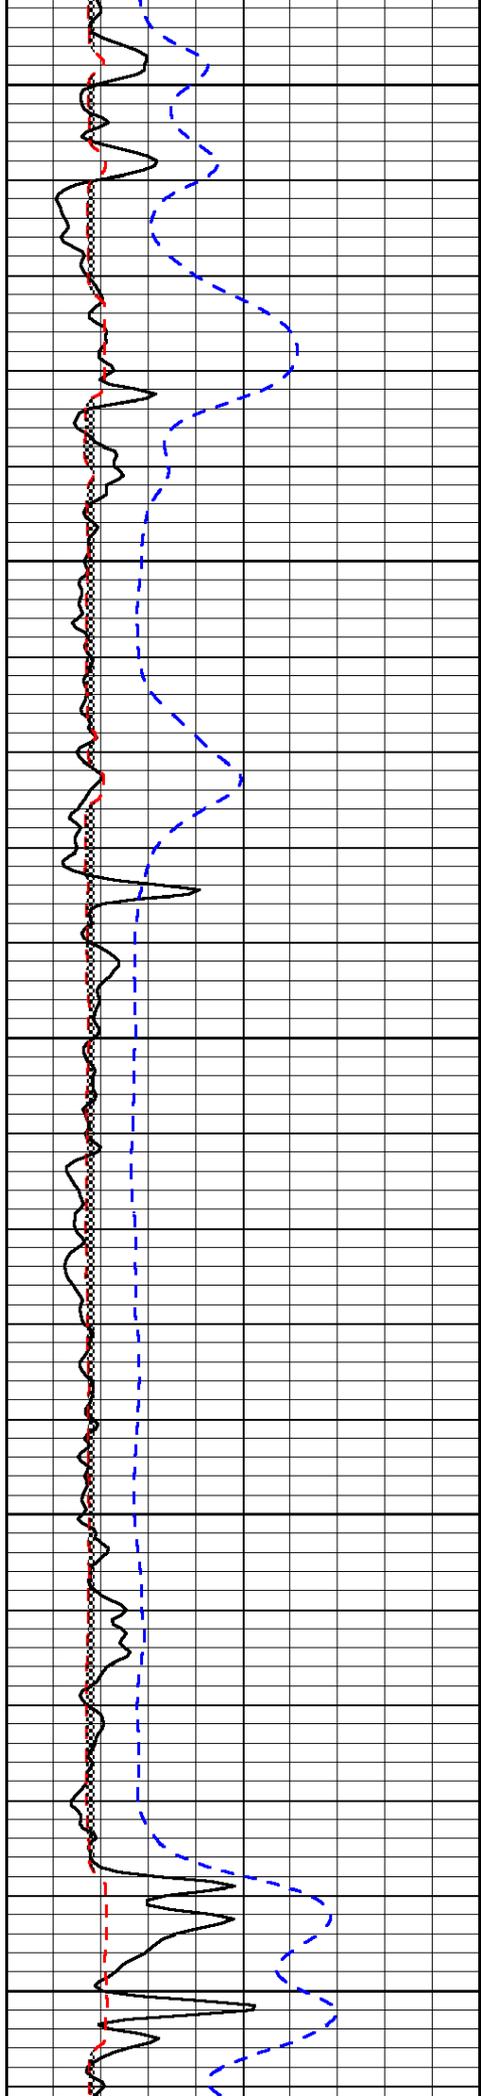

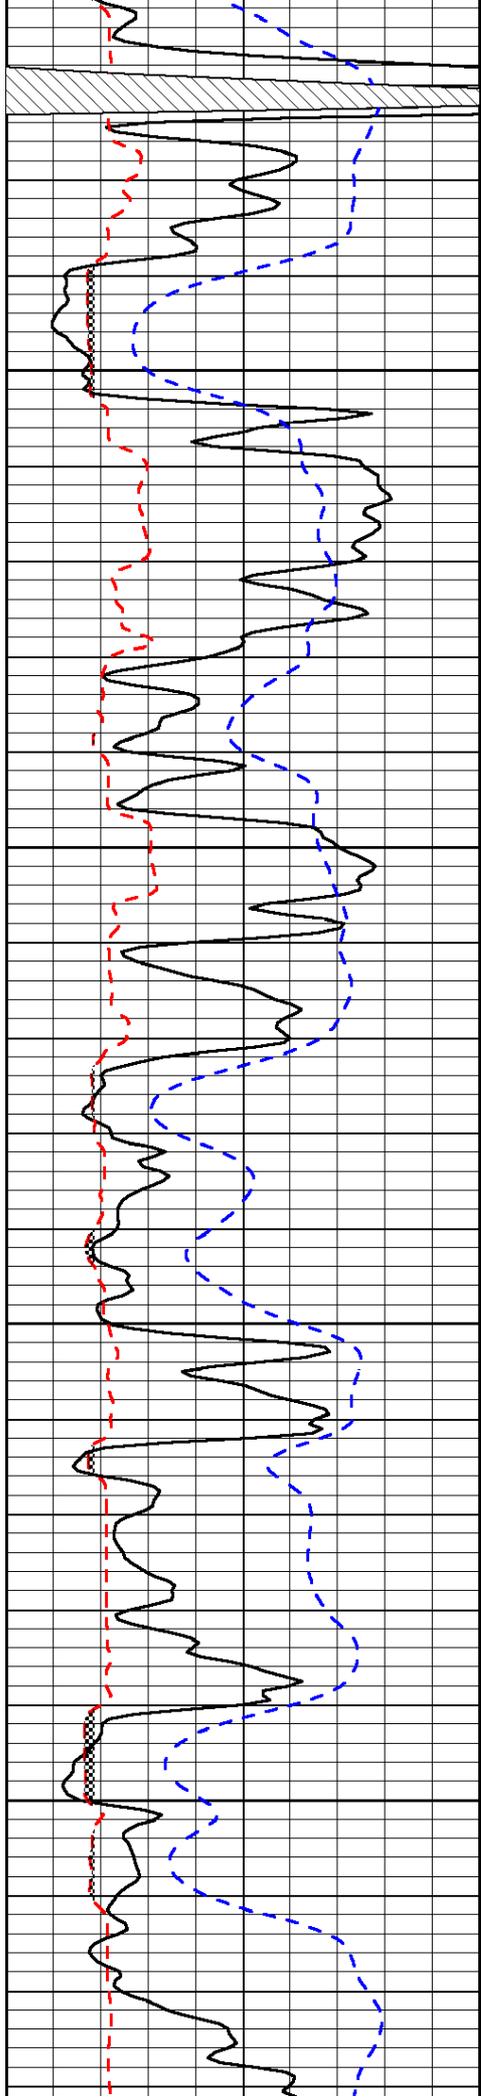



4150

4200

4250

4300

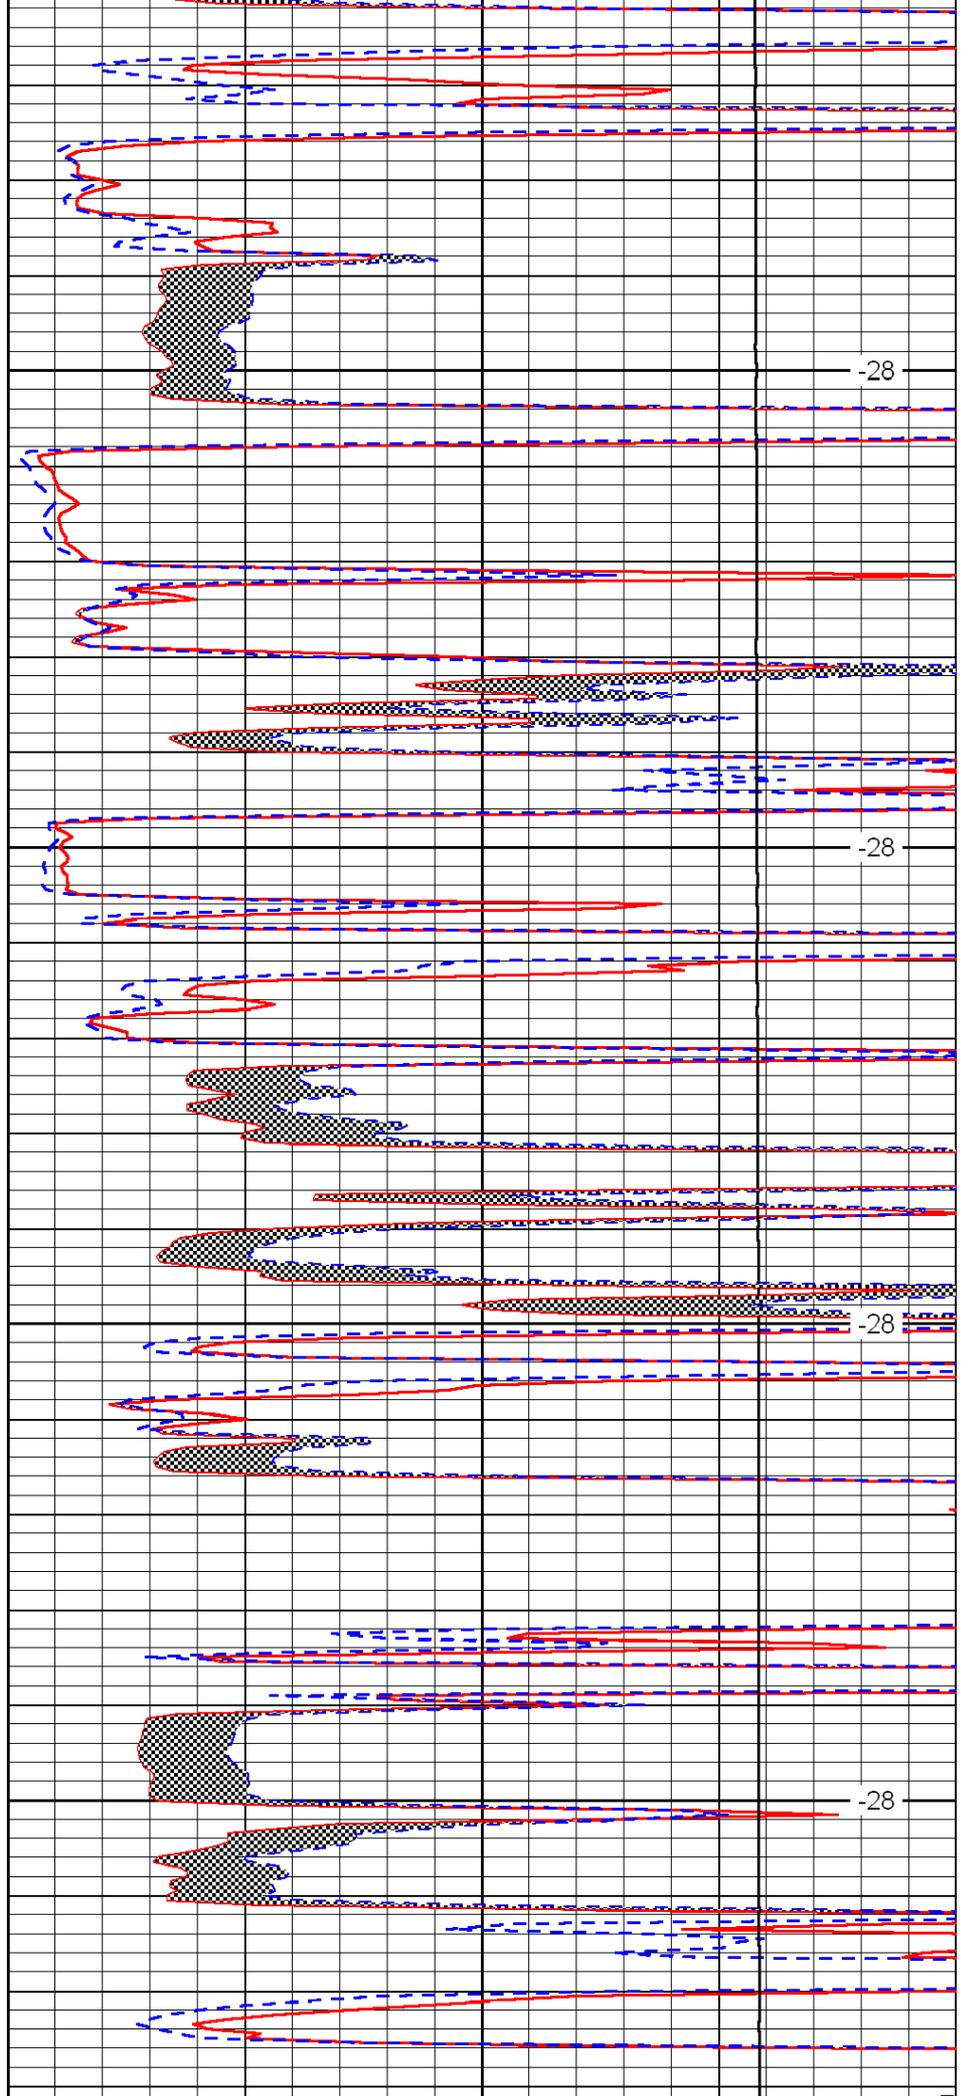

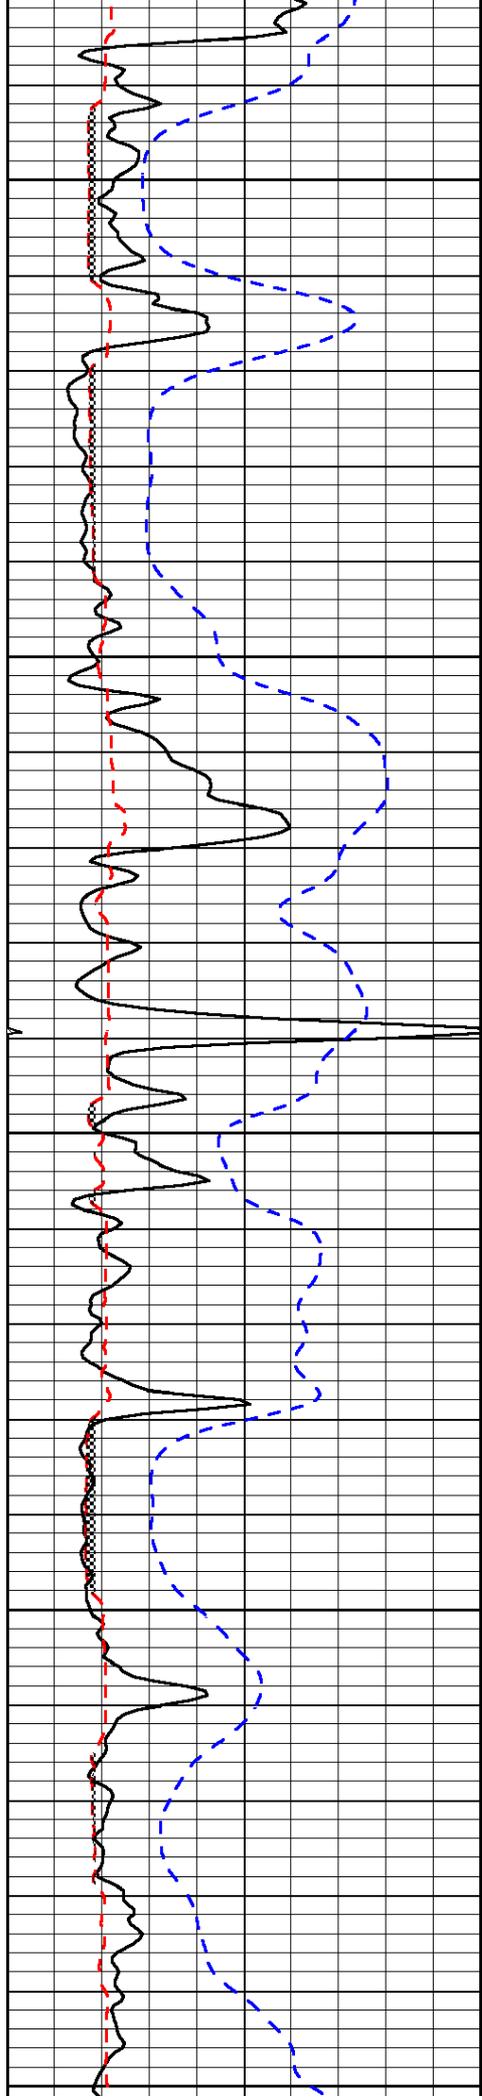


4350

4400

4450

4500

4550

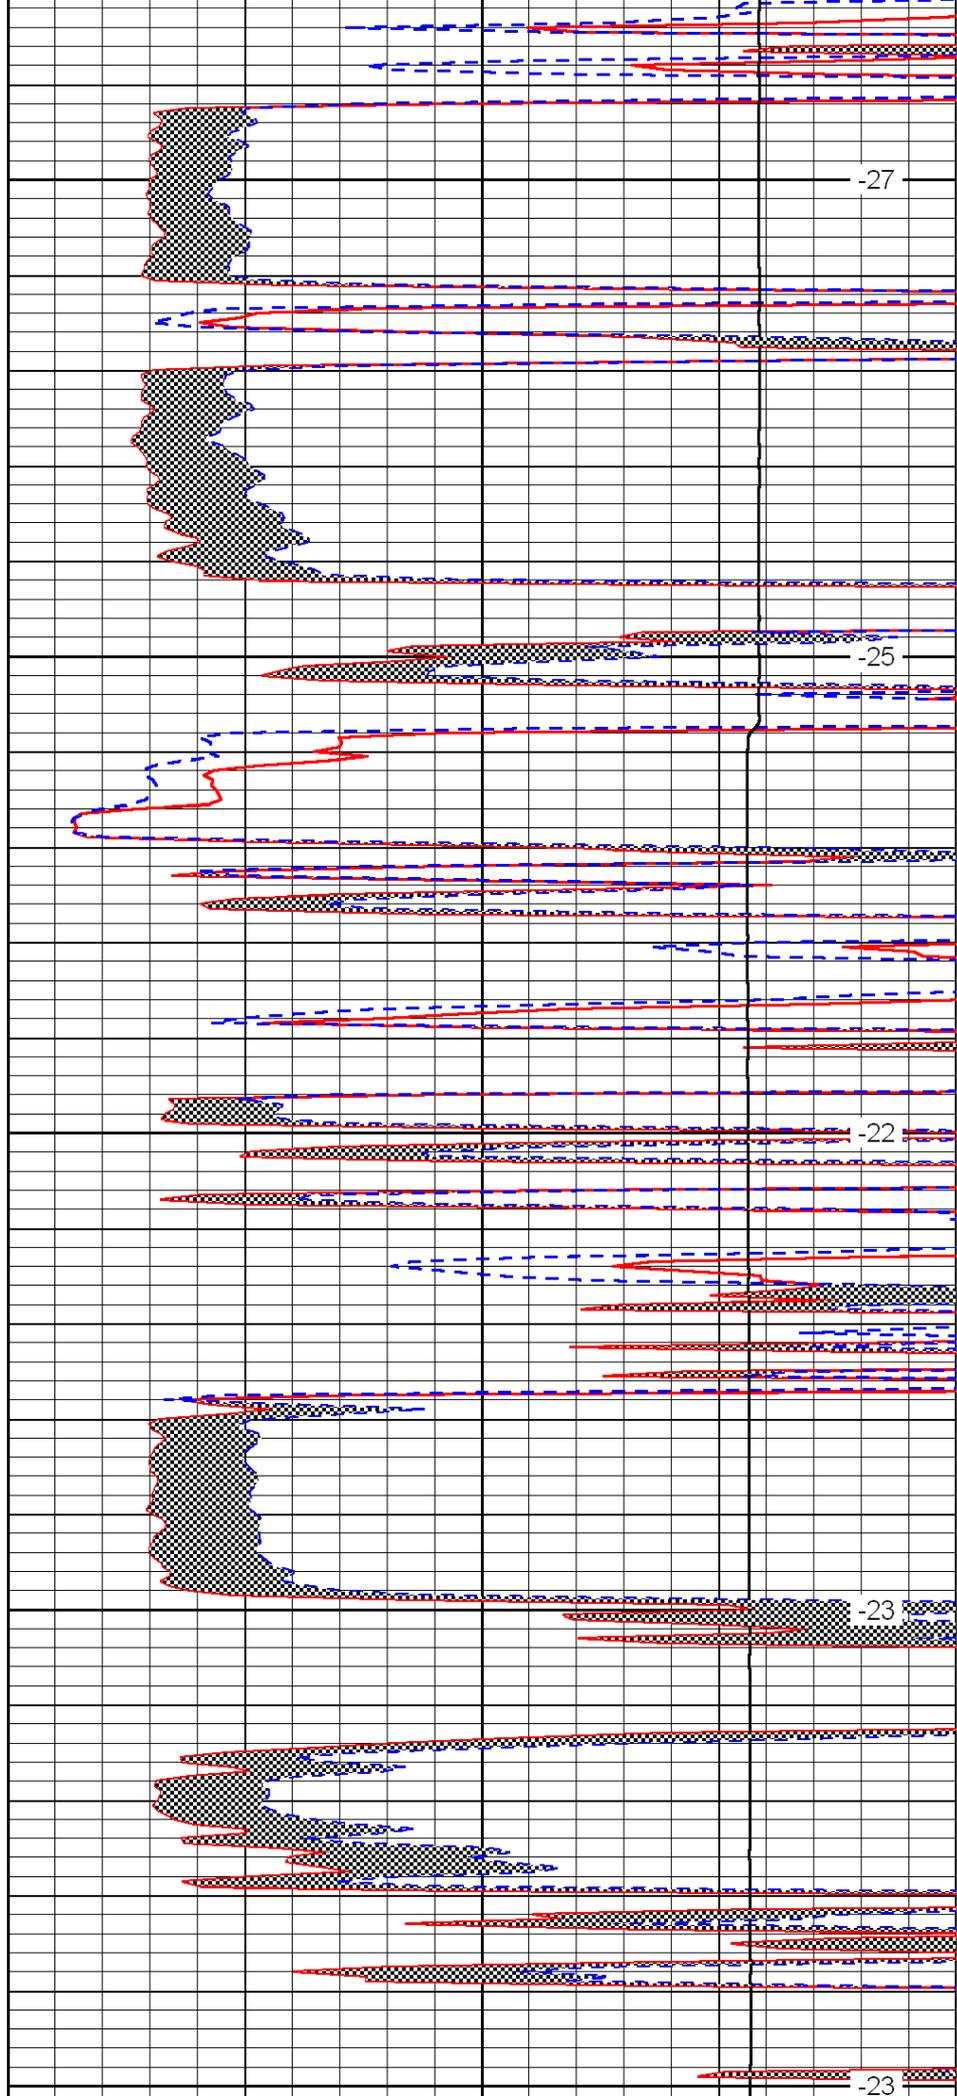


-27

-25

-22

-23

-23

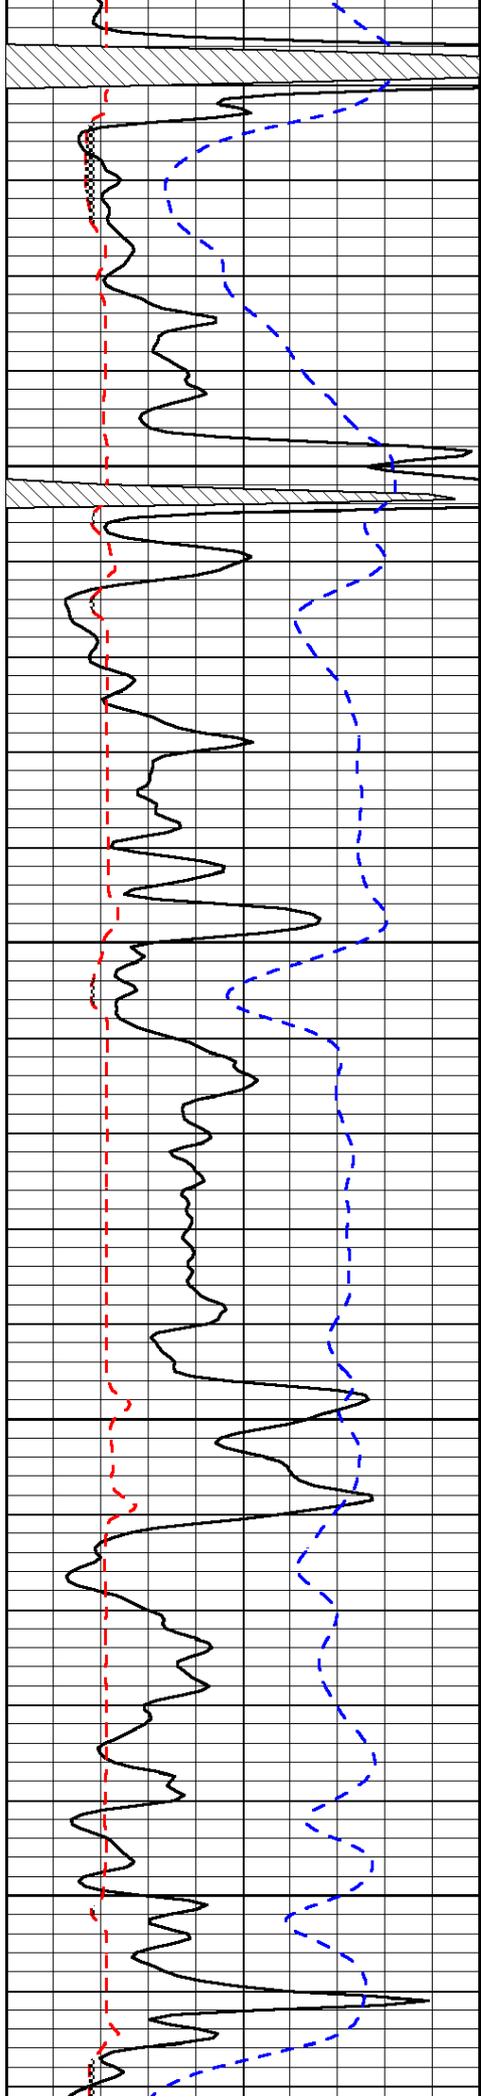


4600

4650

4700

4750

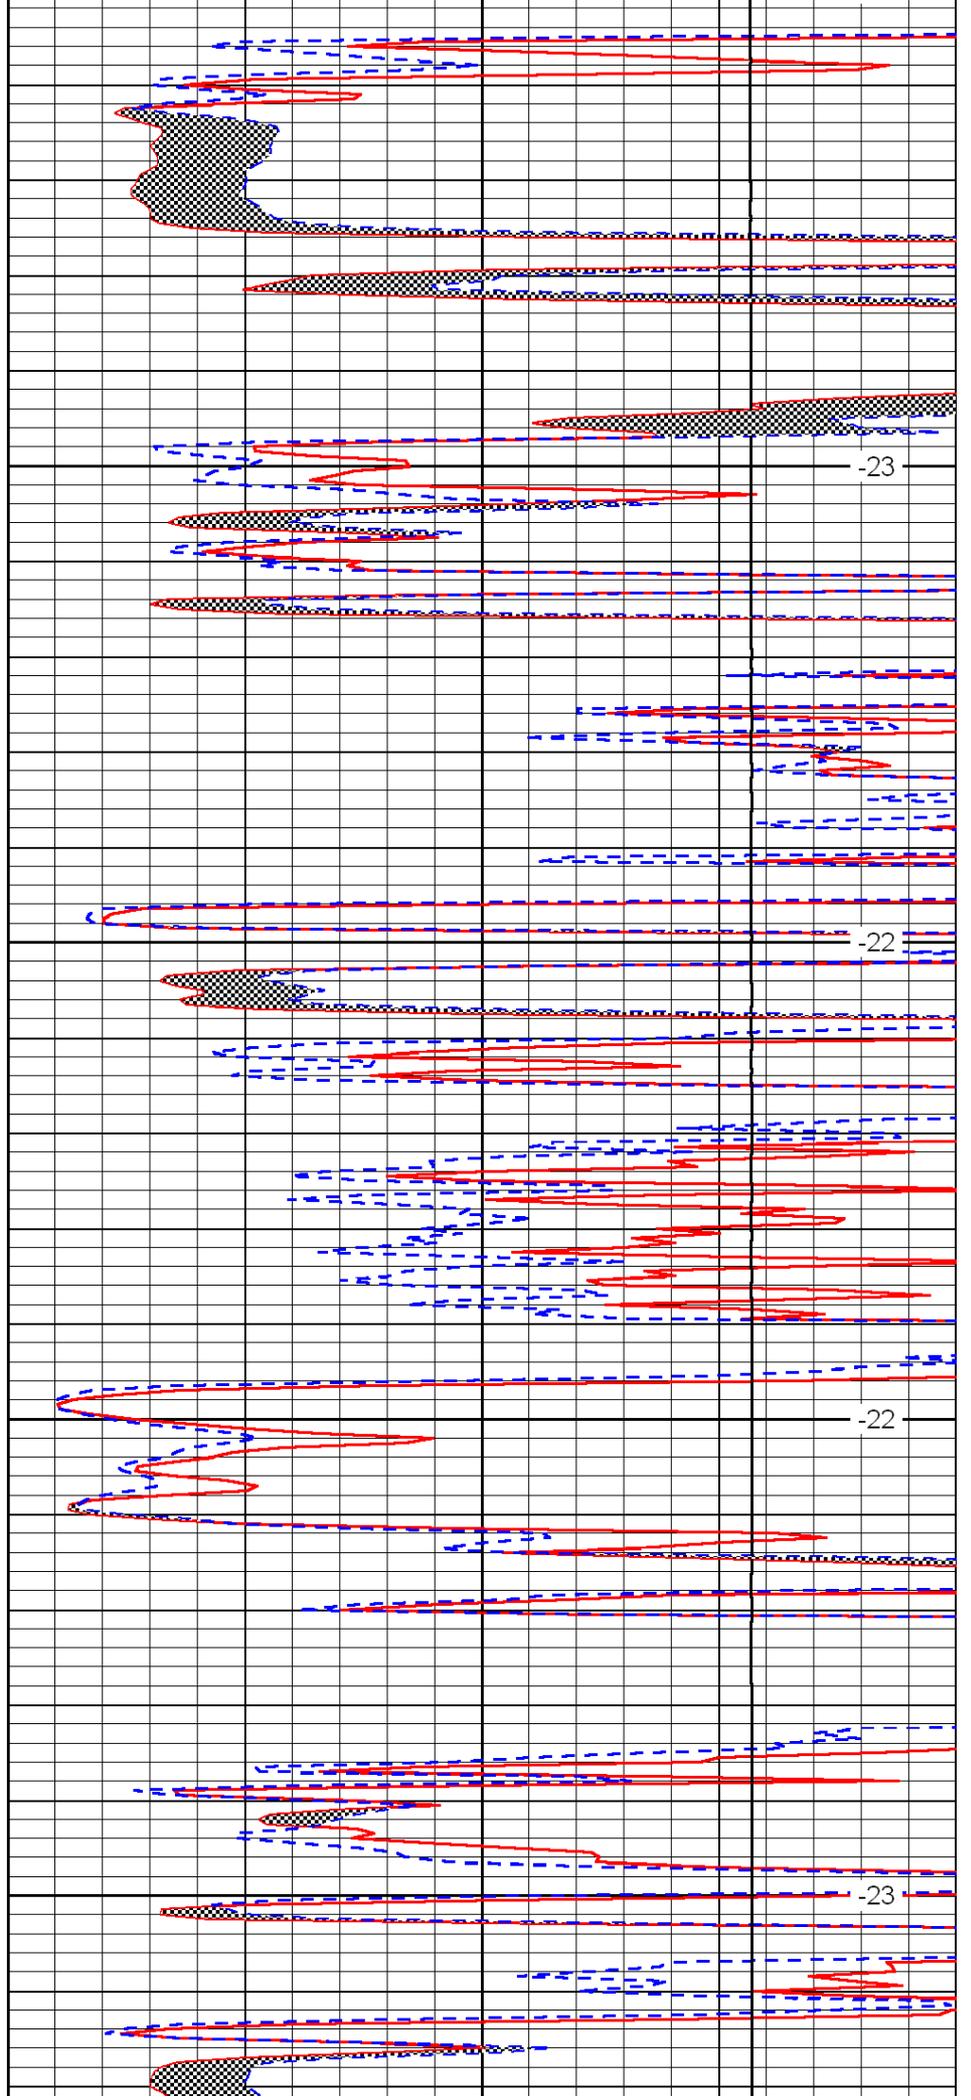


-23

-22

-22

-23

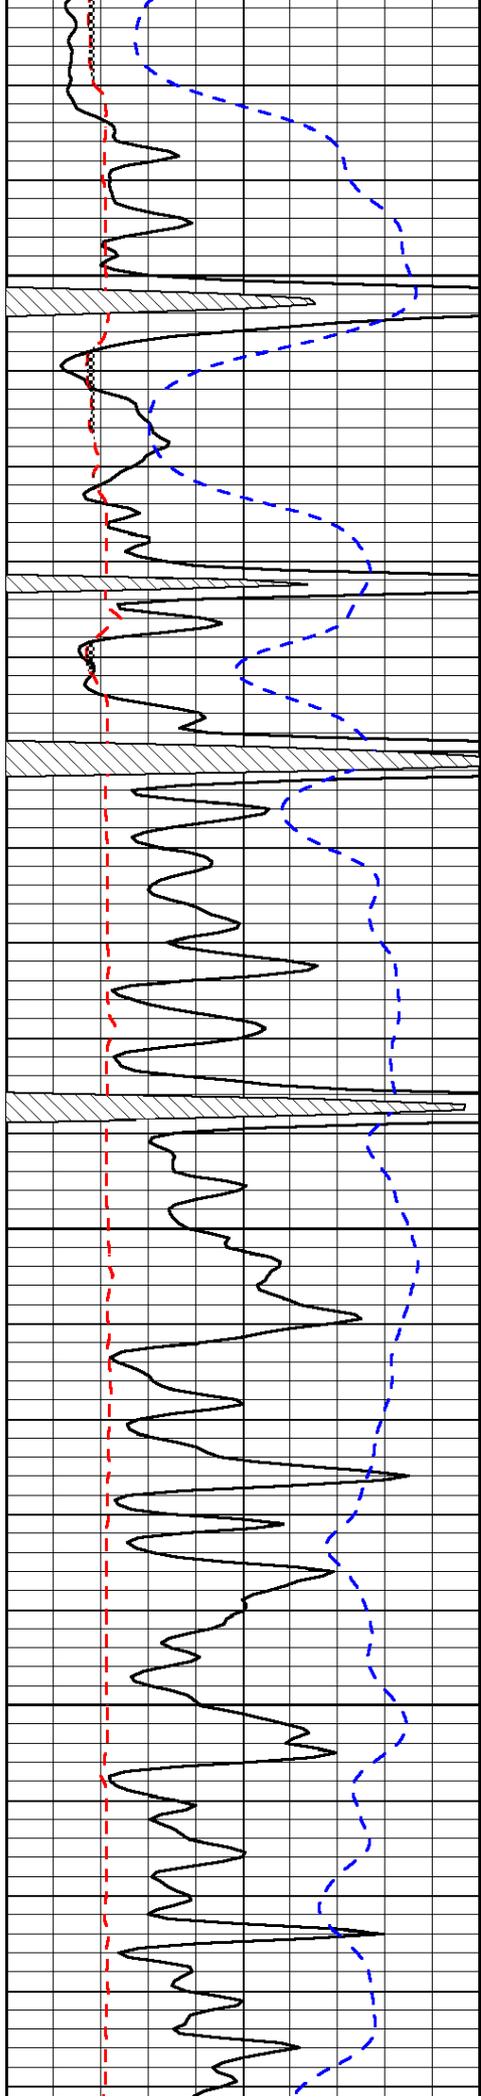


4800

4850

4900

4950

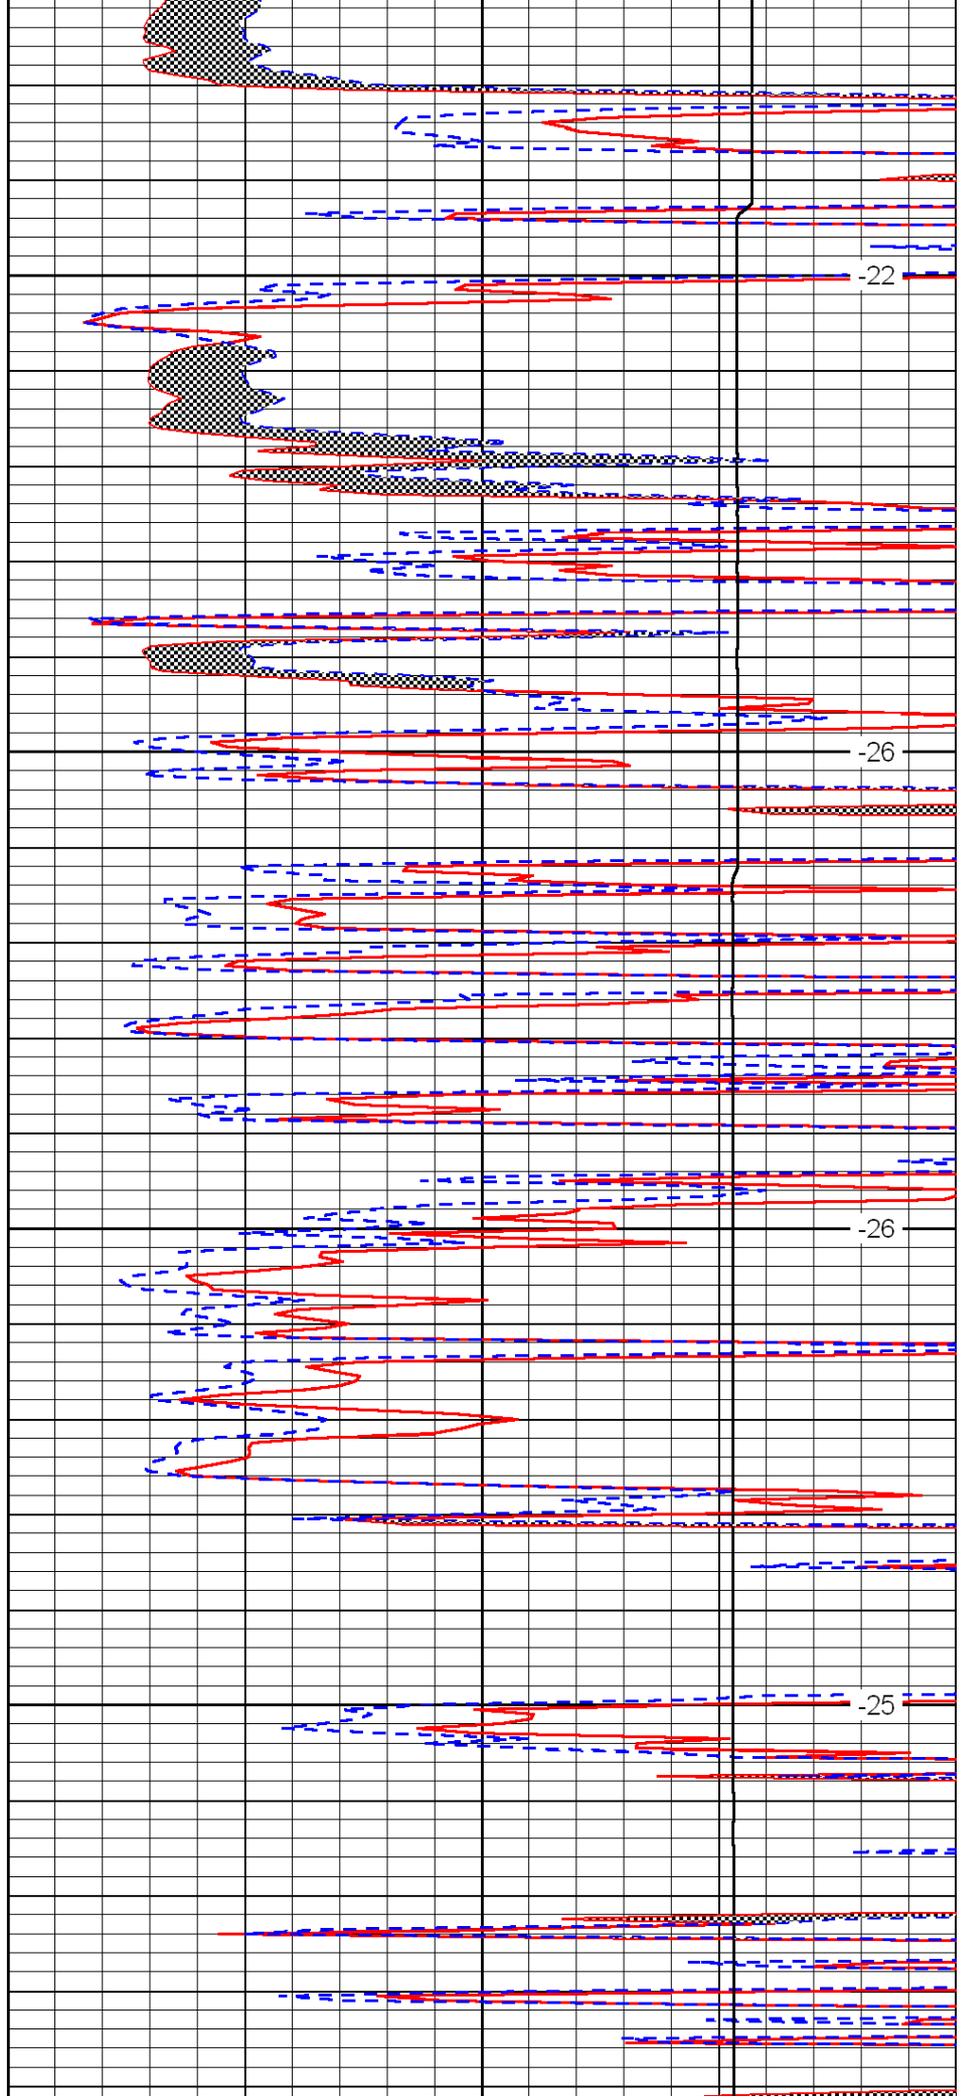


-22

-26

-26

-25

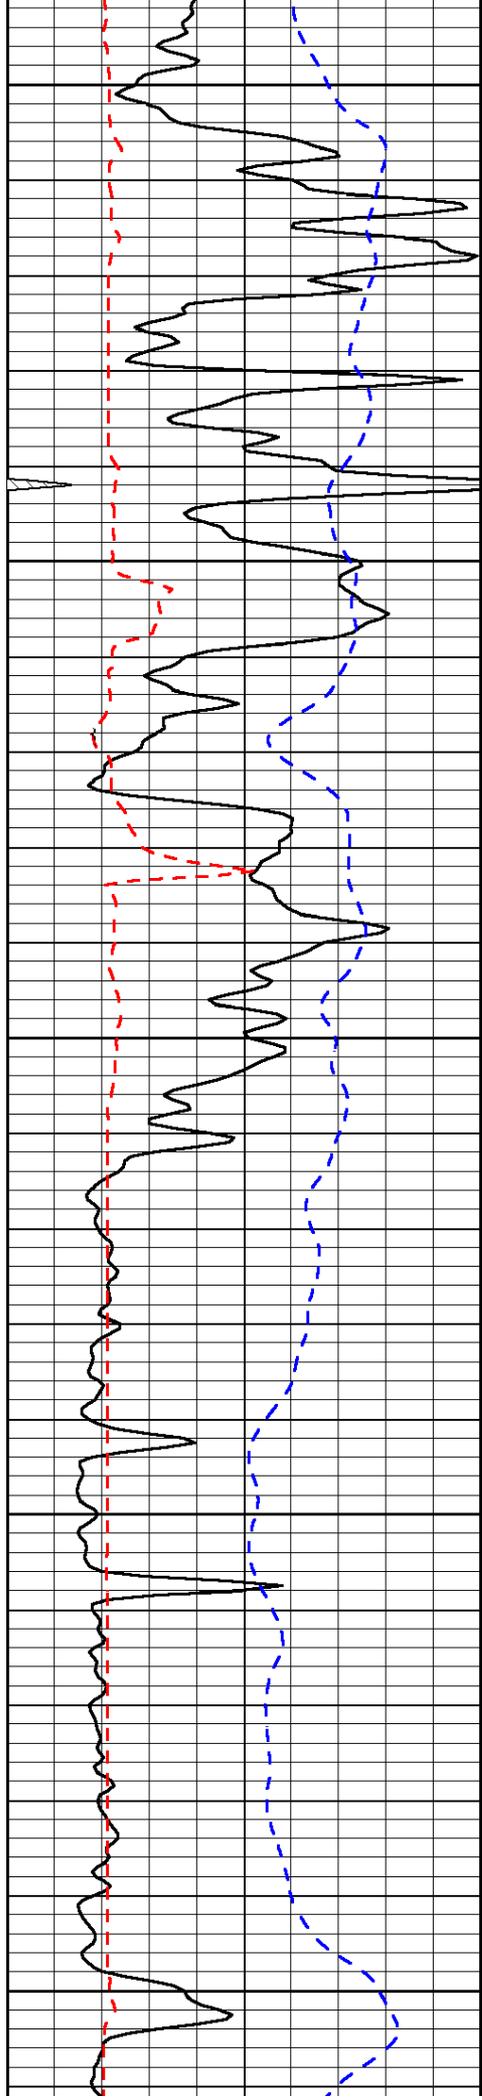


5000

5050

5100

5150

5200

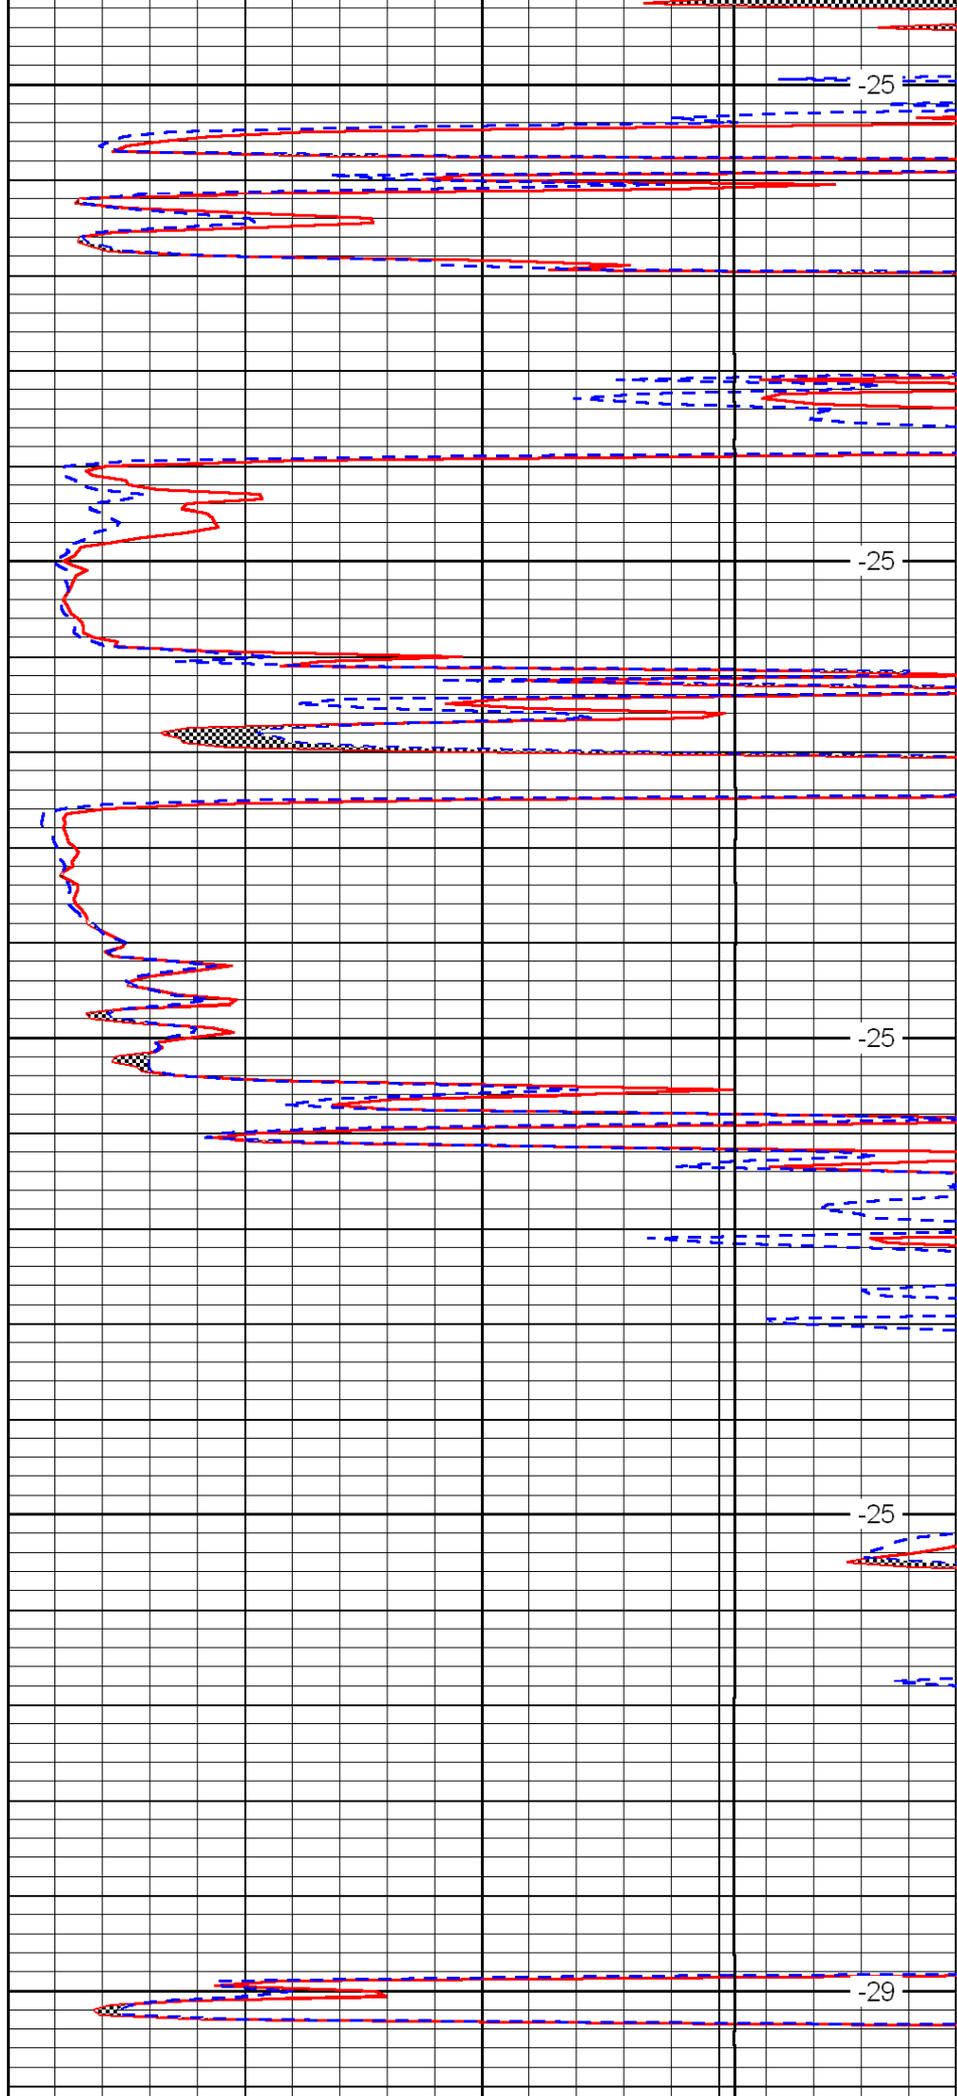


-25

-25


-25

-25

-29

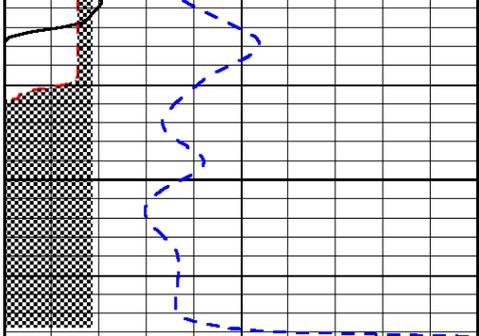

5450

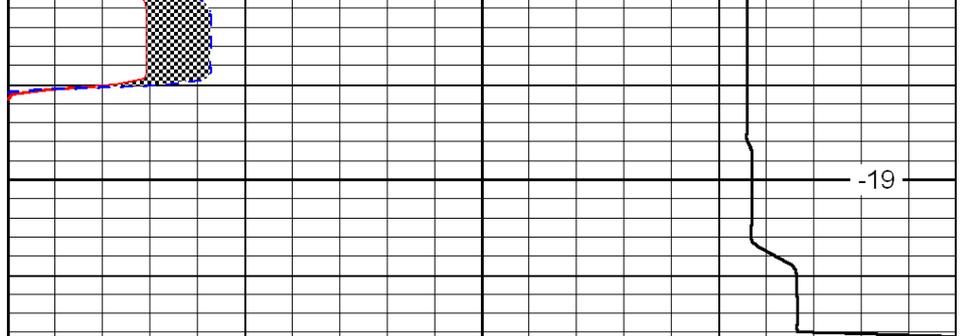

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD