

STATE OF KANSAS 13-163-02442-00-00  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA, KANSAS

WELL PLUGGING APPLICATION FORM

Well Location 330'S 990'E NW Cor. Sec. 6 Twp. 6 Rge. 20 (E) (W) West

Field Name (if any) Ray County Rooks

Lease (Farm Name) Burge Well No. 2

Was well log filed with application? Yes If not, explain circumstances and give available data (Use an additional sheet if necessary)

Log attached.

Date and hour plugging is desired to begin As soon as possible

Plugging of the well will be done in accordance with the Rules and Regulations of the State Corporation Commission, or with the approval of the following exceptions: Explain fully any exceptions desired (Use an additional sheet if necessary)

Name of the person on the lease in charge of well for owner

J. A. Cleverley Address Russell, Kansas

Name of well owner or Acting Agent Cities Service Oil Co.

Address Bartlesville, Oklahoma

Invoice covering assessment for plugging this well should be sent to:

Cities Serv. Oil Co. Address Box 751, Great Bend, Kansas

and payment will be guaranteed by applicant.

6 6 20W  
22 2

[Signature]  
Operator or Acting Agent

Date July 31, 1945

8-1-45

Company Cities Service Oil Co. Well No. 2 Farm Burge  
 Location 330' South and 990' East of NW Cor. Sec. 6 T. 6 R. 30W  
 Elevation 2172 County Rooks State Kansas  
 Initial Prod. dry Contractor H. W. Rice Drilling Co.  
 Acid None Drlg. Comm. June 13, 1944  
 T. D. 3585' Drlg. Comp. June 23, 1944

CASING RECORD:

8-5/8" @ 167' con. 125 ex bulk con.  
 and 200' O. C.  
 5-1/2" @ 3585' con. 100 ex bulk con.

FORMATION RECORD:

surface clay & sand	0-167
shale	450
shale & sand	1420
sand & shale	1685
anhydrite	1715
shale & shales	2280
shale & lime	2590
lime & shale	2725
shale & lime	2970
lime & shale	3040
shale & lime	3245
lime	3240
lime & shale	3302
lime	3515
shale	3545
shale & lime	3567
sand	3575
Granite Wash & granite	3584

3584 Rot. TD = 3585 SLM

Run Schlumberger.

6 6 20W  
 22 2

Corr. Top Heugan	3562'
Corr. Top Granite Wash	3575'
Corr. Top Granite	3578'
Penetration	7'
Total Depth	3585'

7-10-44 Drilled cement to 3585. Perf. 11 shots 3557-61; 300' fluid in 1/2 hour, 850' fluid in 3/4 hour, 1000' fluid (200' oil and 800' wtr.) in 1 hour, 1800' fluid in 2 hours, 2175' fluid (150' oil and 2025' wtr.) in 8 hours.

7-12-44 Set retainer at 3526 and squeezed with 200 sacks cement; 180 sacks through perforations.


7-15-44 Drilled cement to 3582. Perf. 48 shots 3556-64; 2175' fluid (100' oil, 2075' water) in 5 hours.

7-18-44 Set retainer at 3526 and squeezed with 50 sacks cement, 28 sacks into formation.

7-21-44 Drilled cement to 3579. Perf. 24 shots 3560-63; 2100' fluid (20' oil, 2080' water) in 18 hours.

SLOPE TESTS (ACID BOTTLE):

2000' OK  
 2500' OK  
 3100' OK

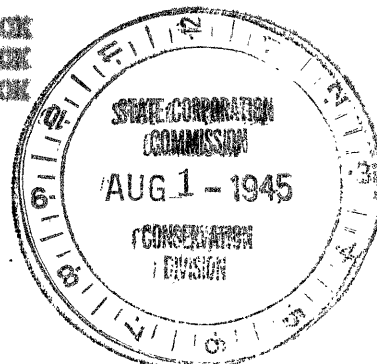

8-7-45



15-163-02442-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
800 BITTING BUILDING  
WICHITA 2, KANSAS

AUG. 6, 1946

IN REPLY PLEASE  
REFER TO THIS  
SUBJECT

Well No.	8
Farm	Surge
Description	INC 6-6-20W
County	Neosho
File:	22-3

Cities Service Oil Co.  
Box 751  
Great Bend  
Kansas

This letter is your permit to plug the above subject well, in accordance with the Rules and Regulations of the STATE CORPORATION COMMISSION.

Very truly yours,

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION

HA

BY:

*J. P. Roberts*  
\_\_\_\_\_  
J. P. ROBERTS

NOTICE:

H.W. Korr  
Box 207  
Great Bend, Kans.