



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	15-185-23,658-00-00		
Company	L.D. Drilling, Inc.		
Well	Dennis No. 8-26		
Field	Max North		
County	Stafford	State	Kansas
Location	NE SW SW SW 460' FSL & 440' FWL		Other Services CNL/CDL DIL/BHCS
Sec: 26	Twp: 21	Rge: 12	Elevation

Permanent Datum	Ground Level	Elevation 1837	
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	K.B. 1842
Drilling Measured From	Kelly Bushing		D.F. 1837
Date	1/21/2011		
Run Number	Two		
Depth Driller	3720		
Depth Logger	3720		
Bottom Logged Interval	3719		
Top Log Interval	1600		
Casing Driller	8.625 @ 339		
Casing Logger	342		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	11000		
Density / Viscosity	9.1 53		
pH / Fluid Loss	9.0 12.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.55 @ 55		
Rmf @ Meas. Temp	.41 @ 55		
Rmc @ Meas. Temp	.74 @ 55		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.27 @ 113		
Operating Rig Time	5 Hours		
Max Rec. Temp. F	113		
Equipment Number	10		
Location	Hays		
Recorded By	J Schuler		
Witnessed By	Josh Austin		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


Thank you for using Log-Tech, Inc.
(785) 625-3858


Great Bend, Kansas
South to K-19, East to 70th Road (1 West of Ike & Joe's)
North 2 1/8 Miles, East Into

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

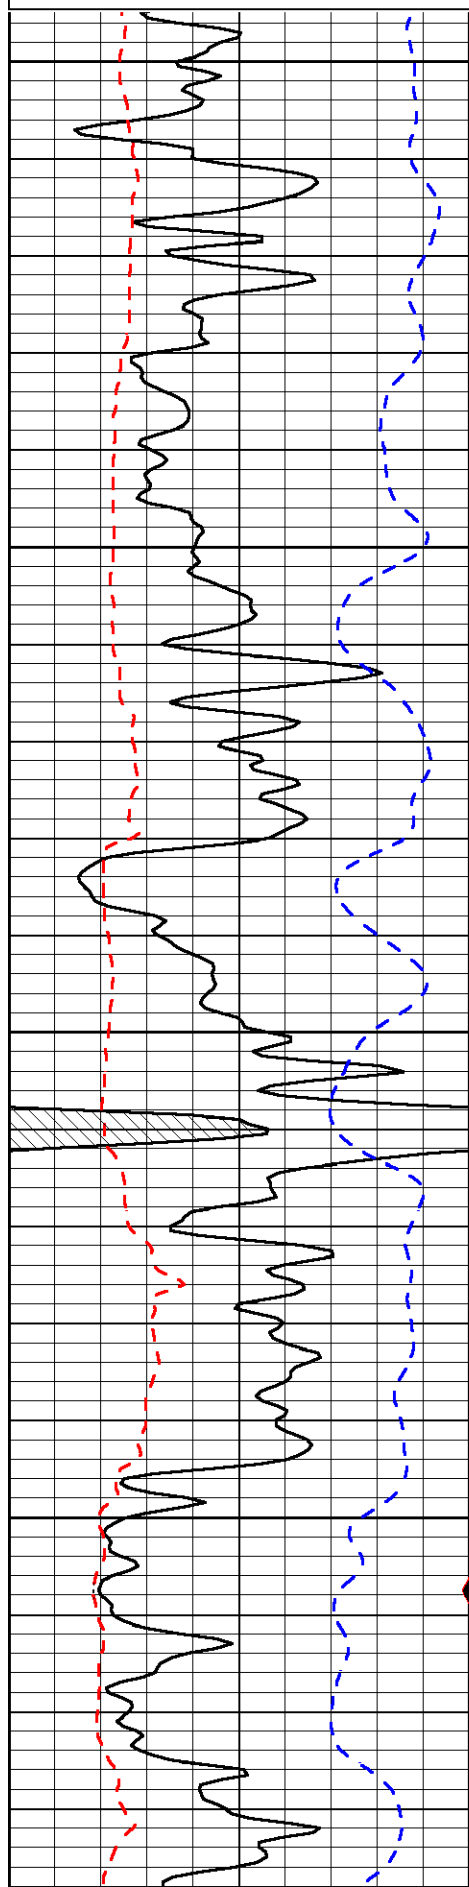

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
10000	Line Weight	0

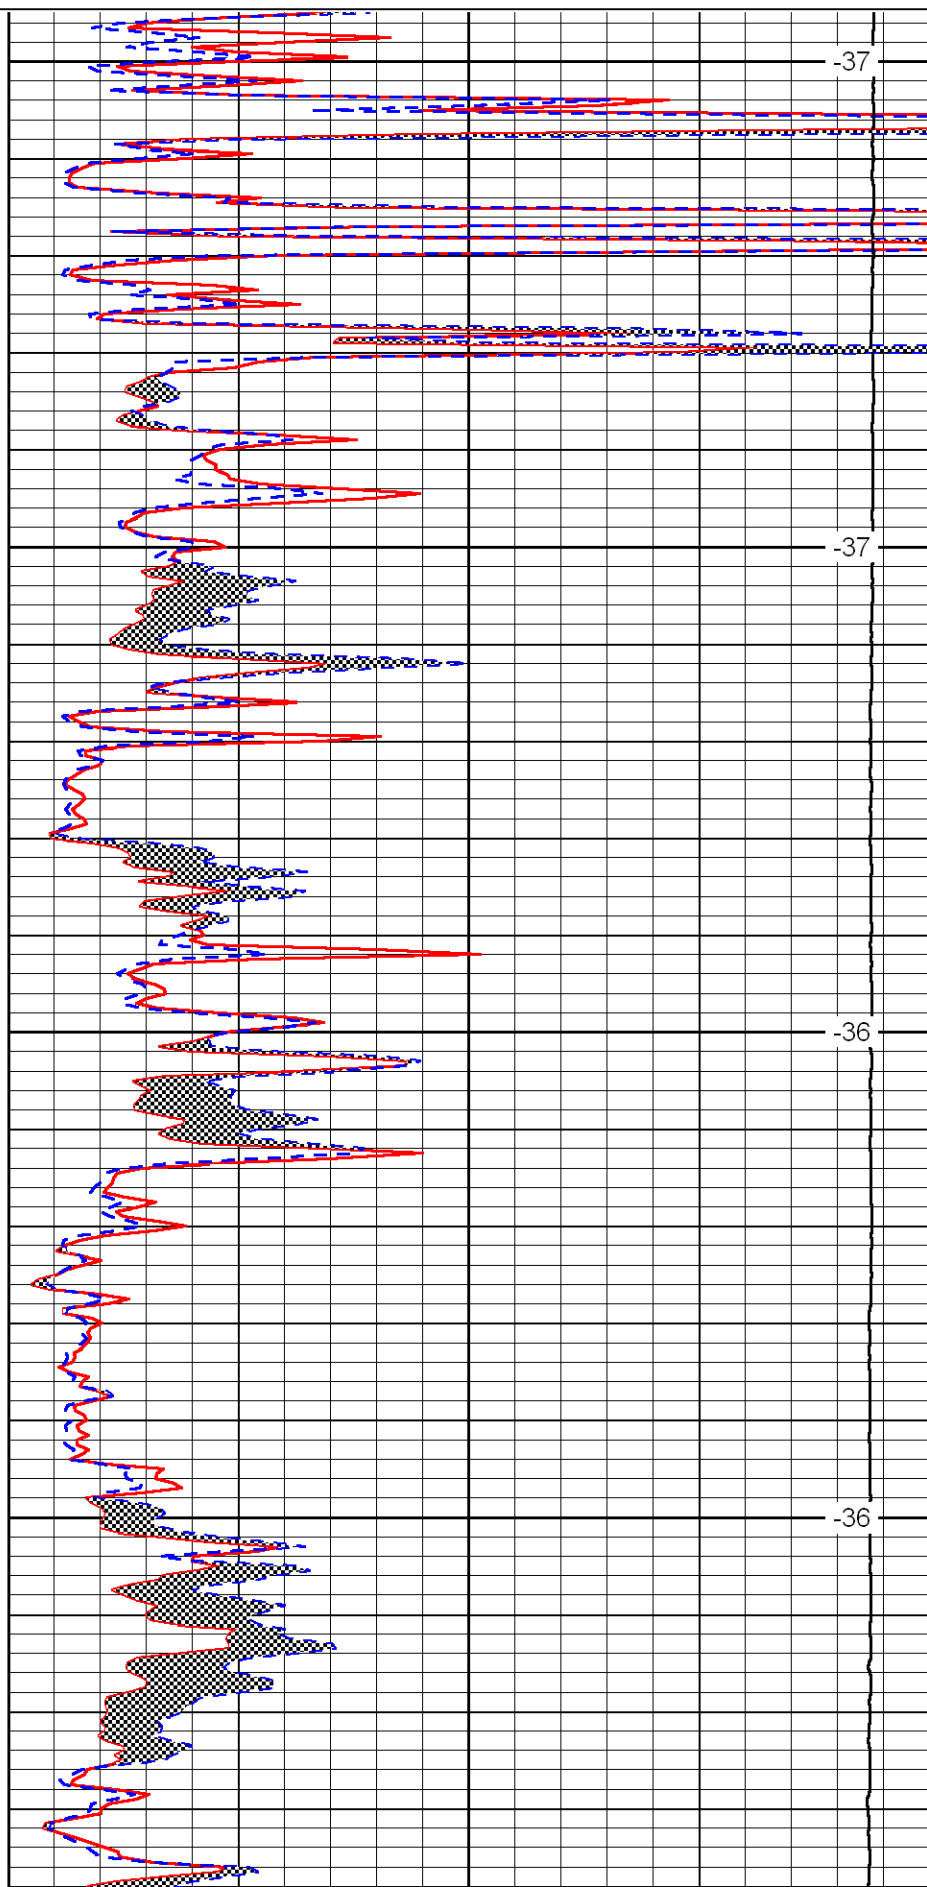

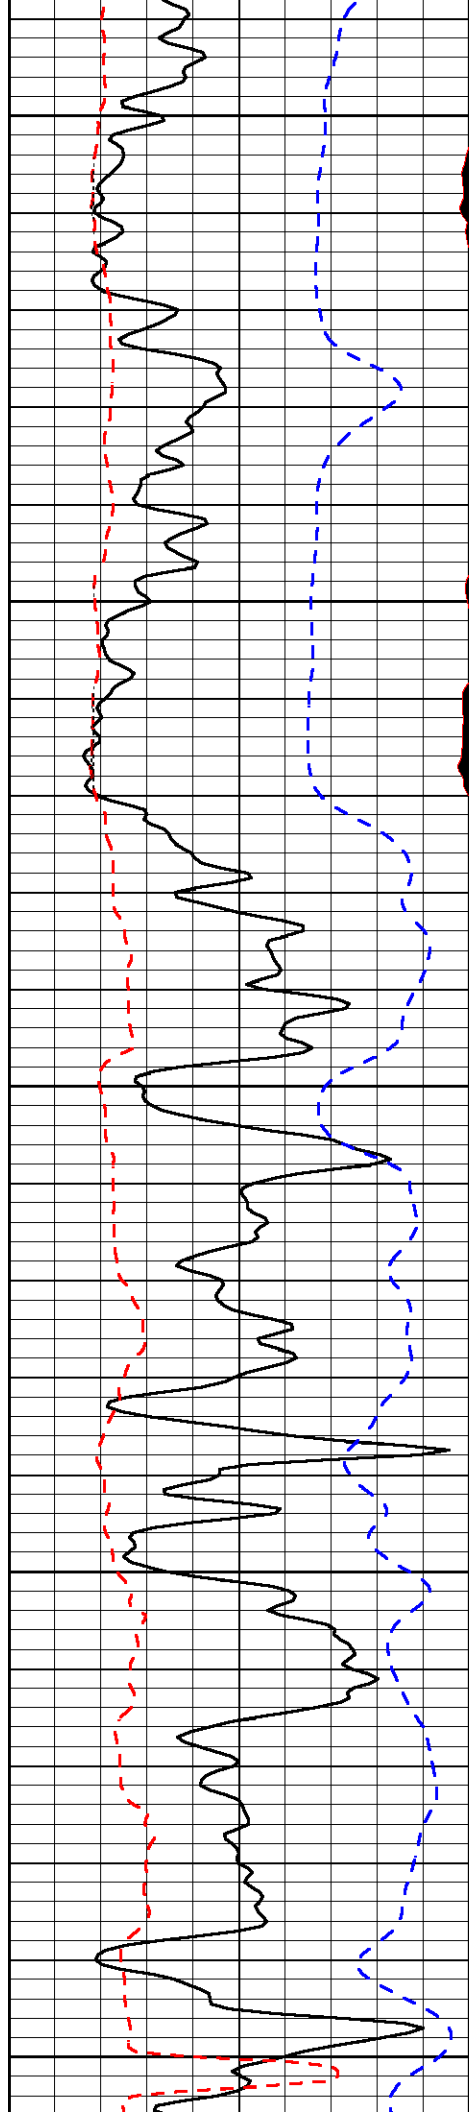


1800

1850

1900

1950

2000

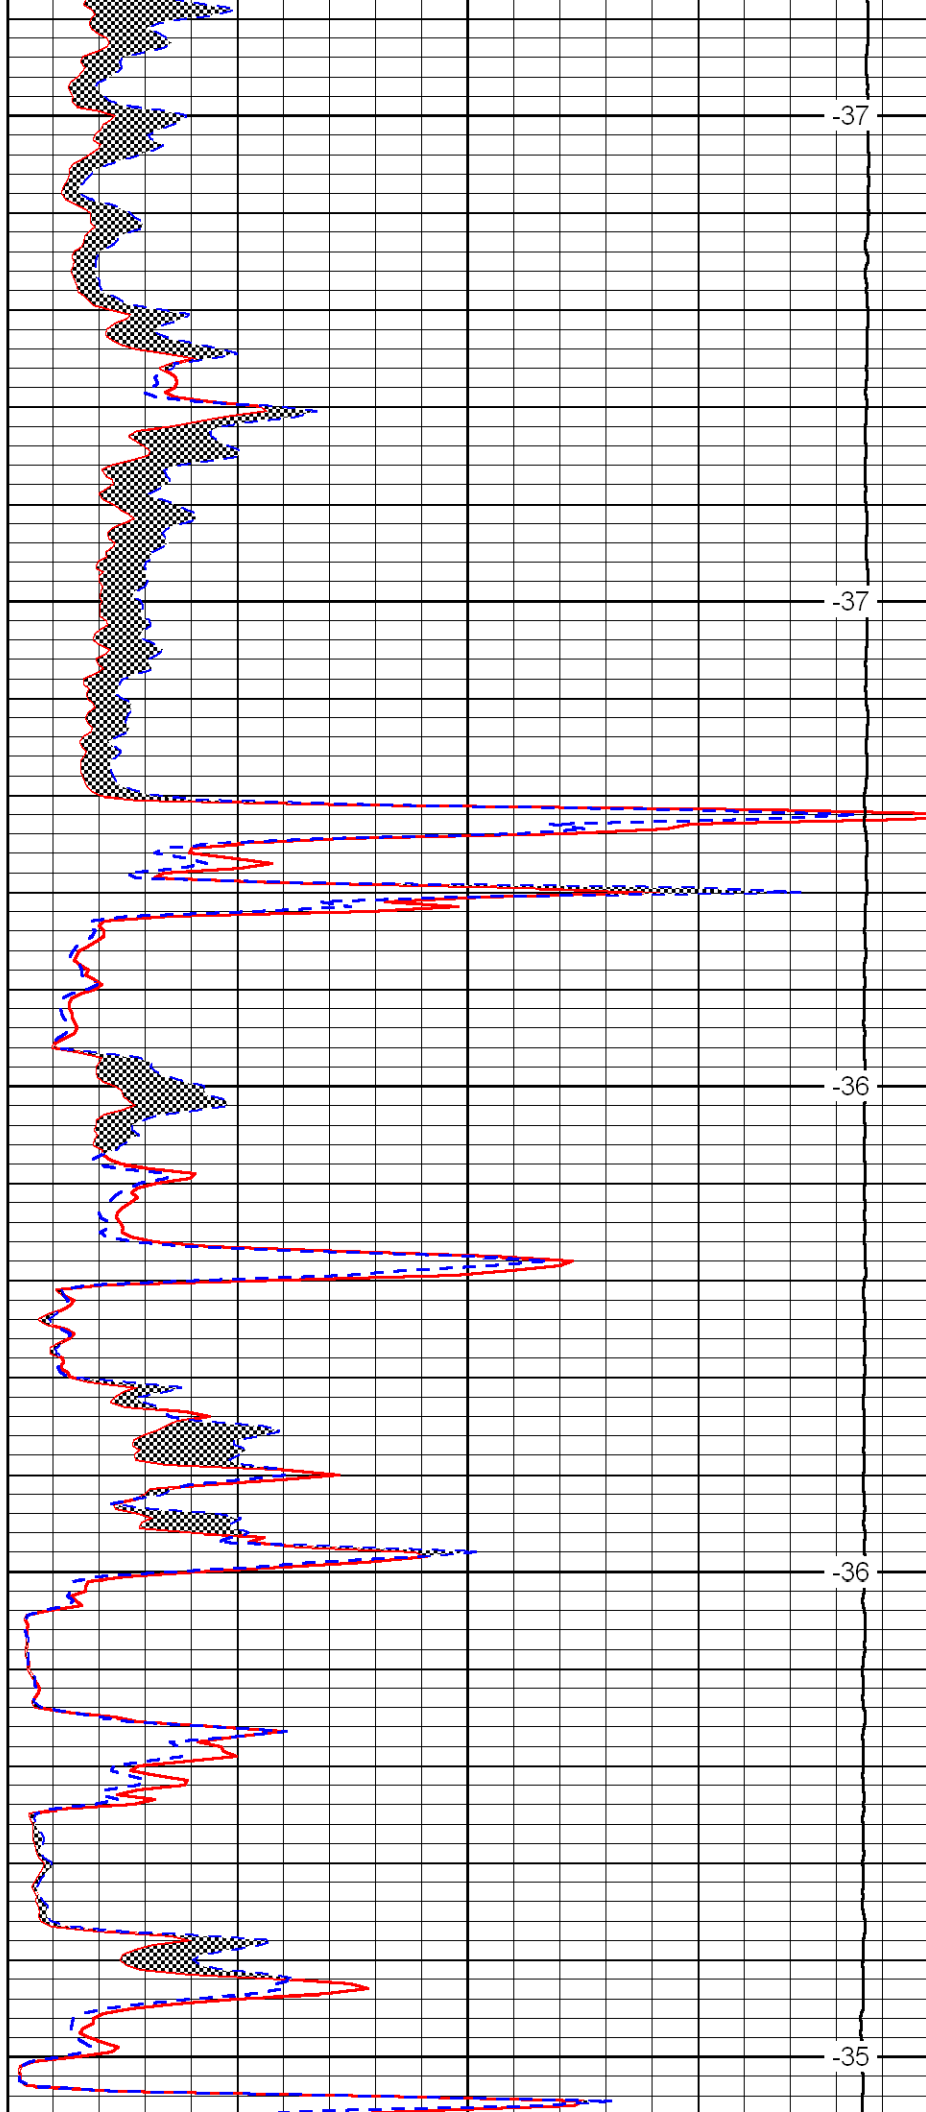



-37


-37

-36

-36

-35

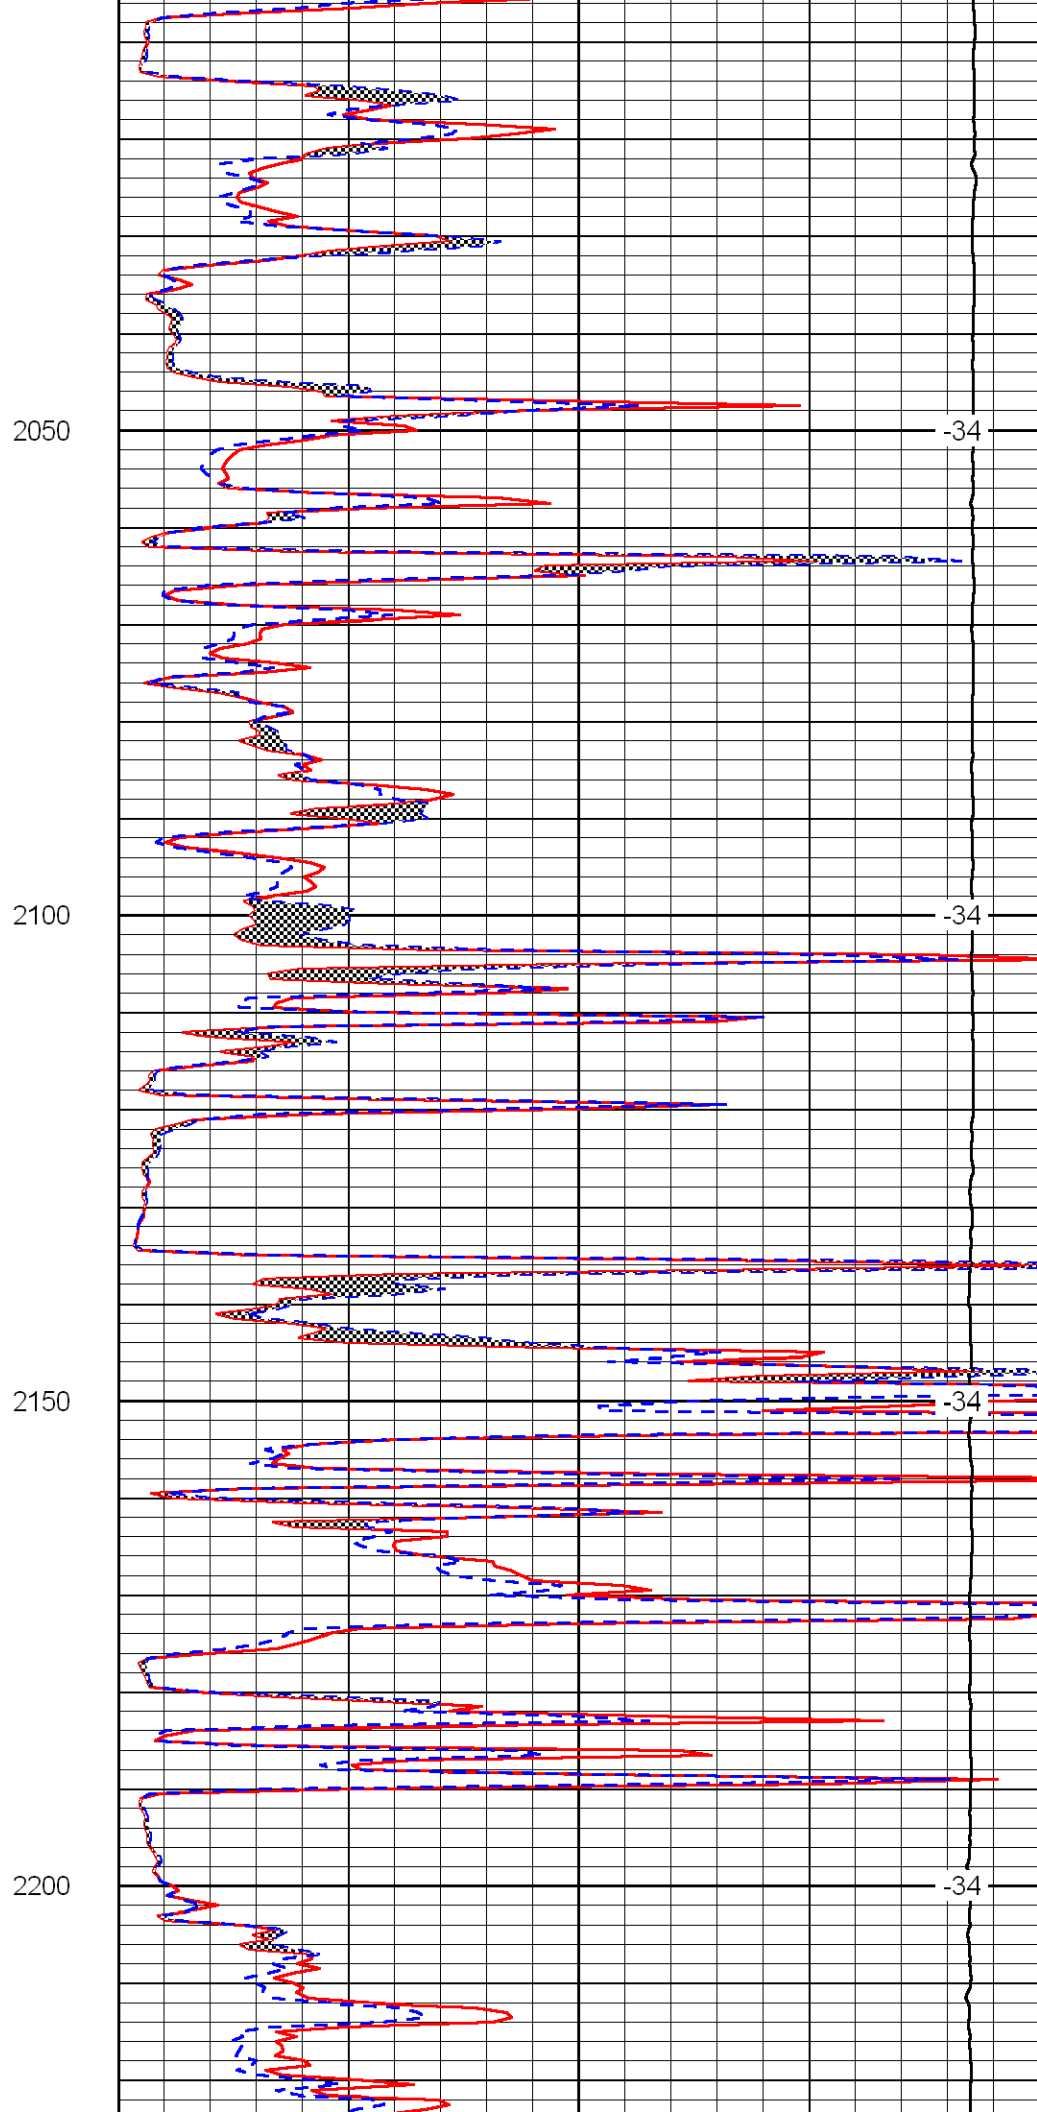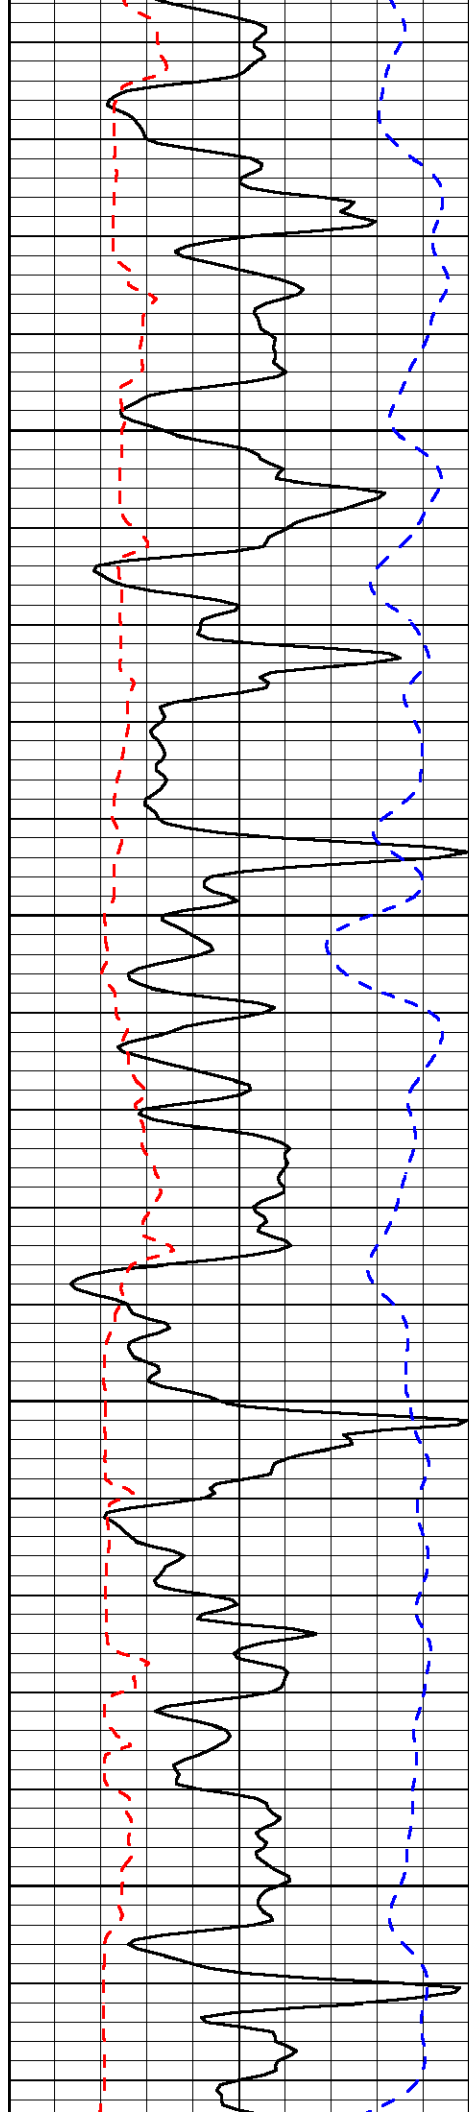

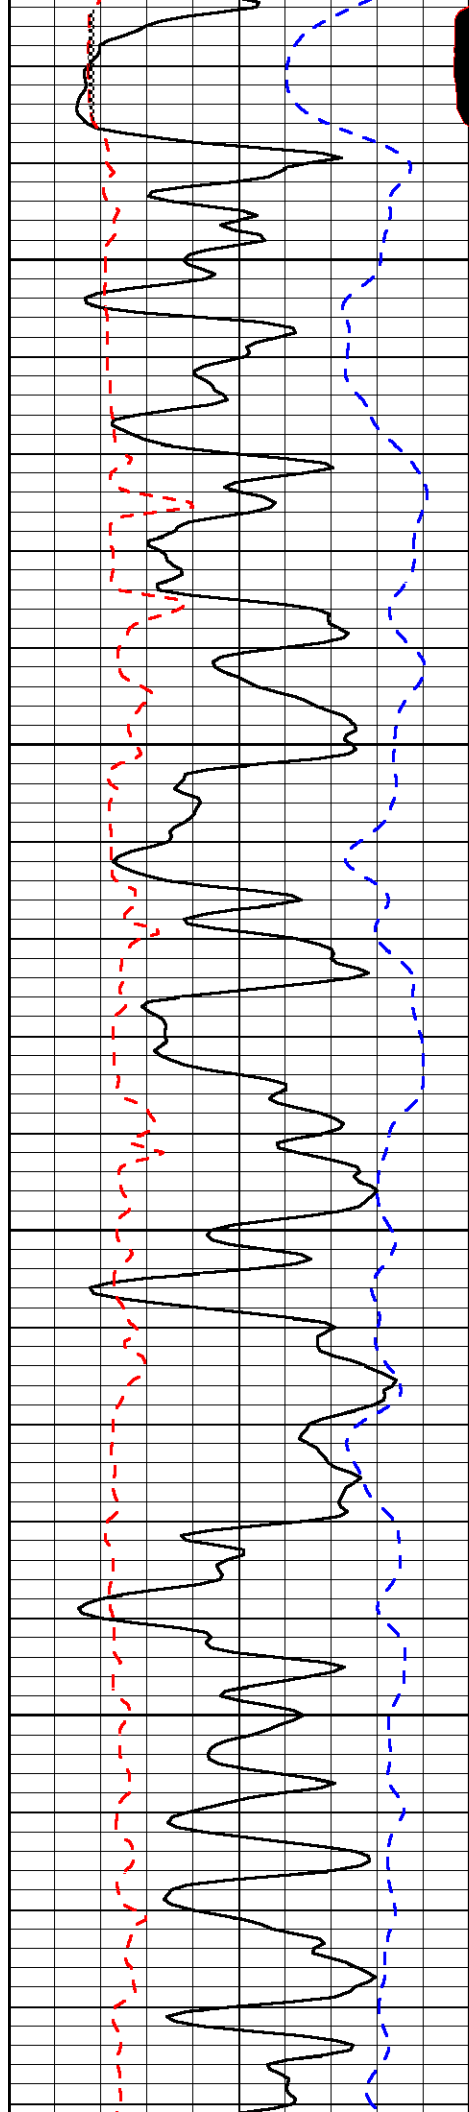

2250

2300

2350


2400


-35

-34

-35

-28

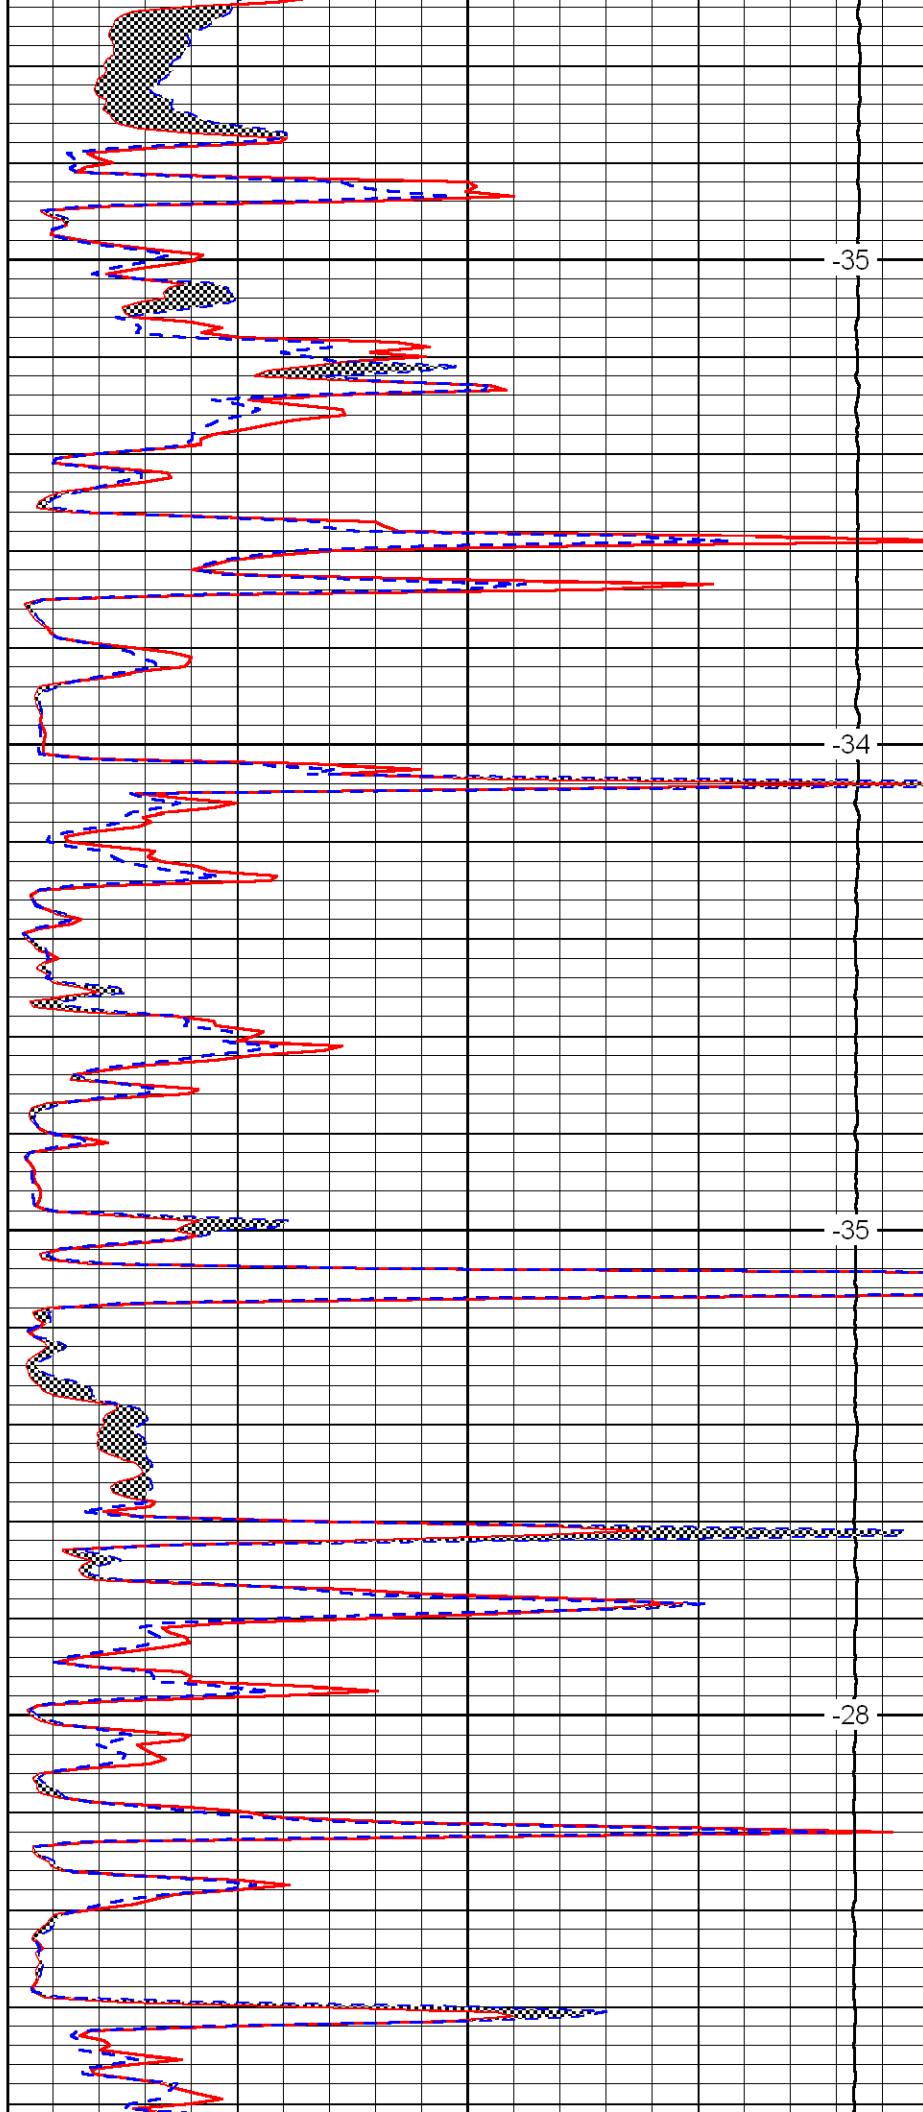

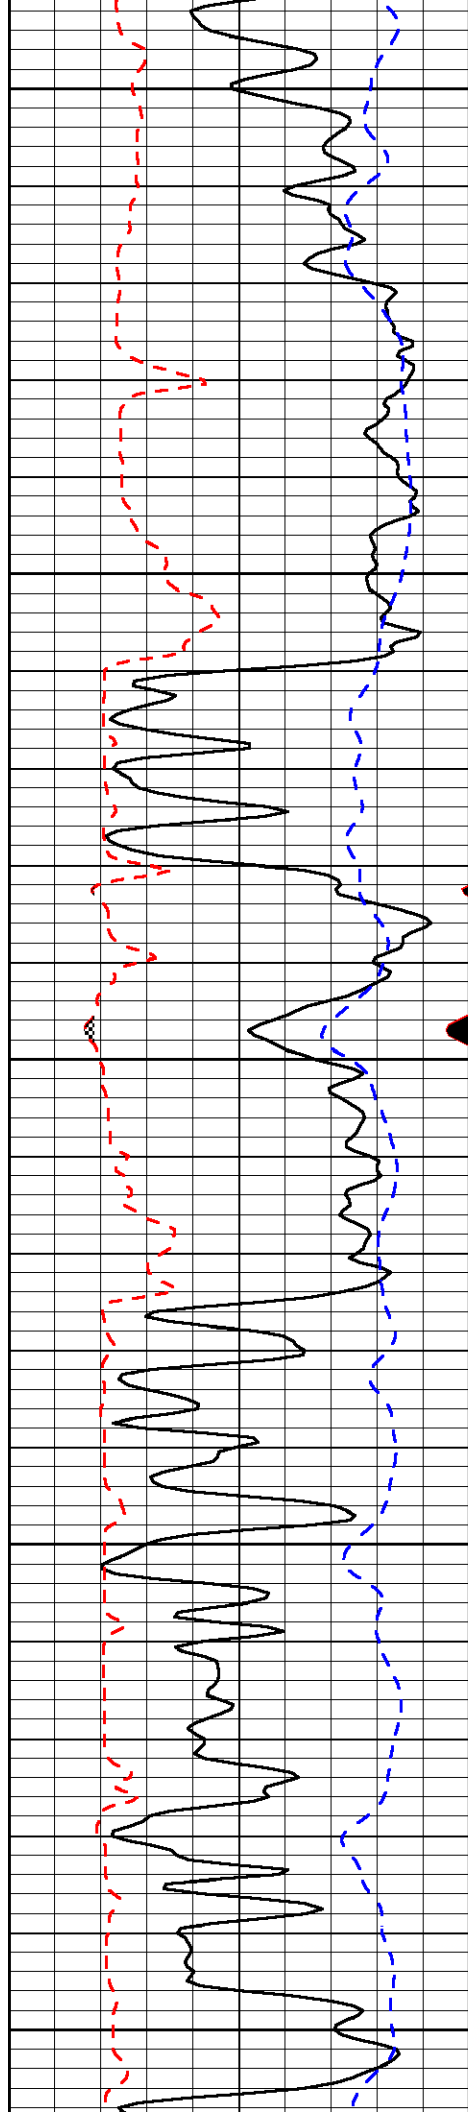


2450

2500

2550

2600

2650

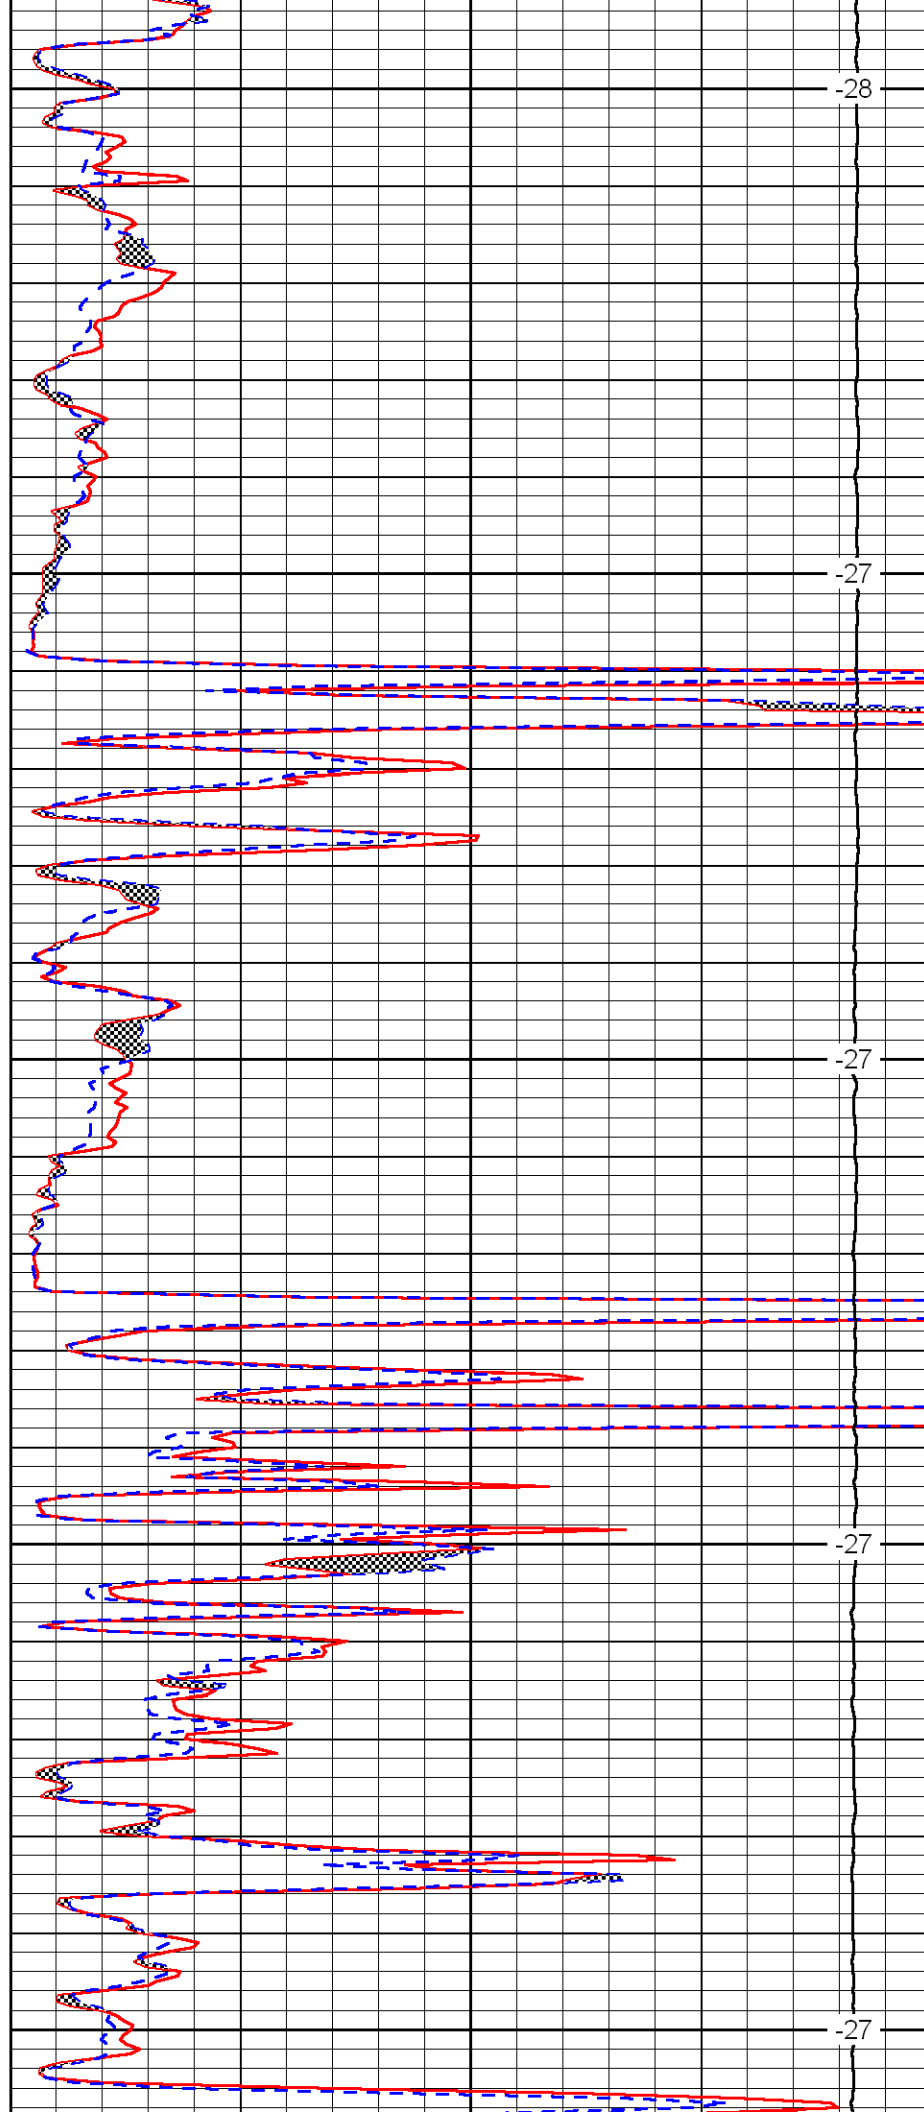


-28

-27

-27

-27

-27

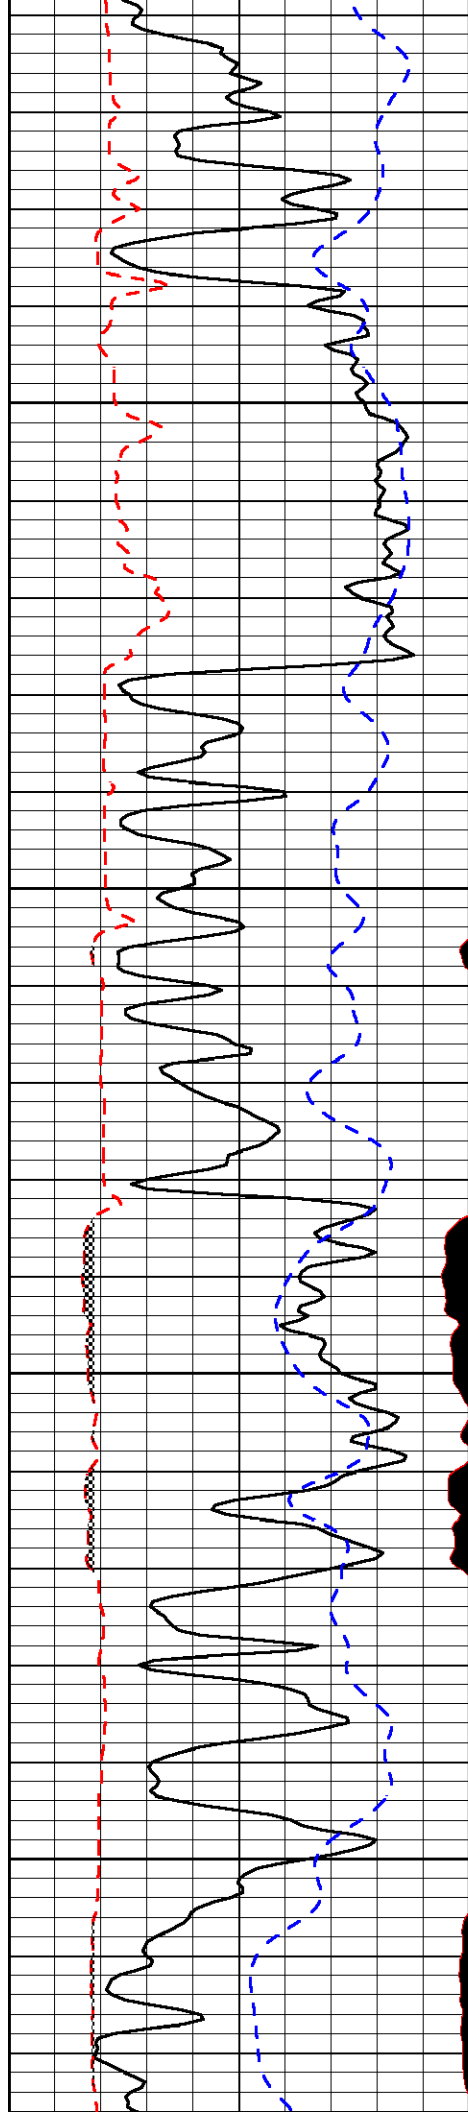



2700

2750

2800

2850

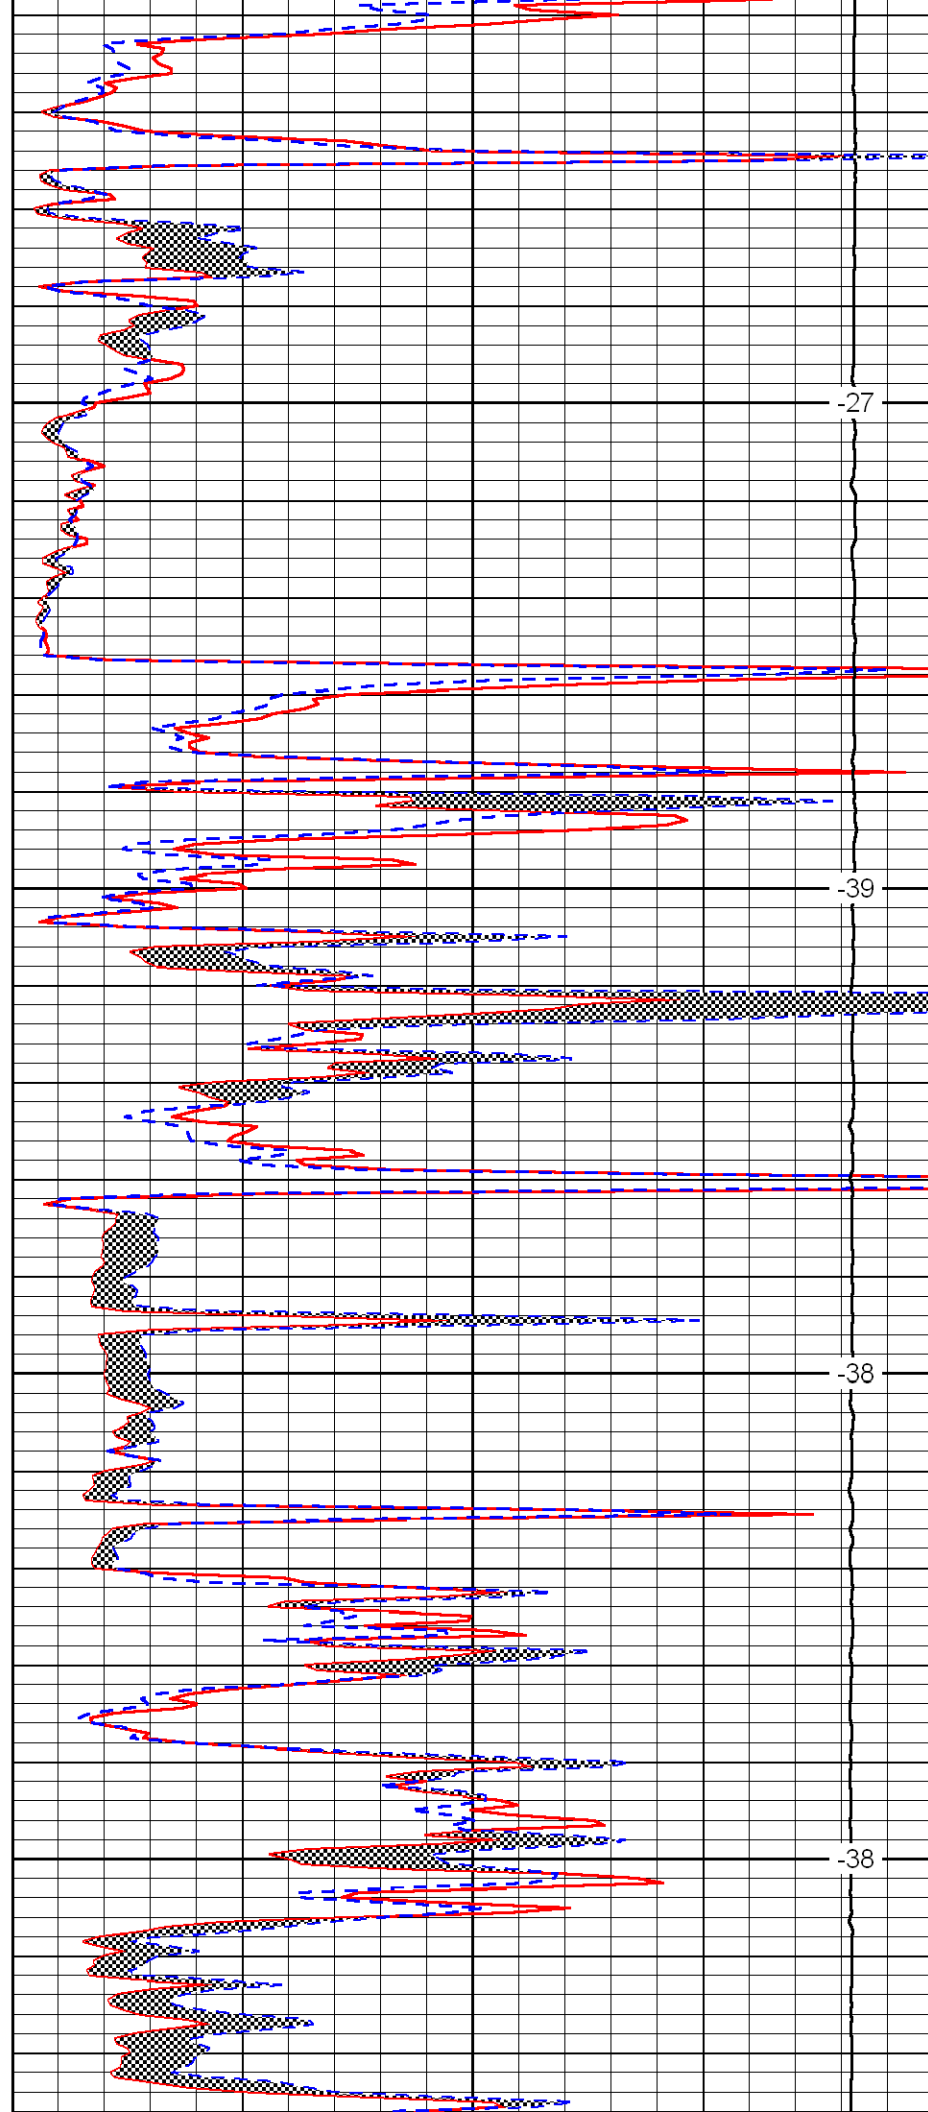

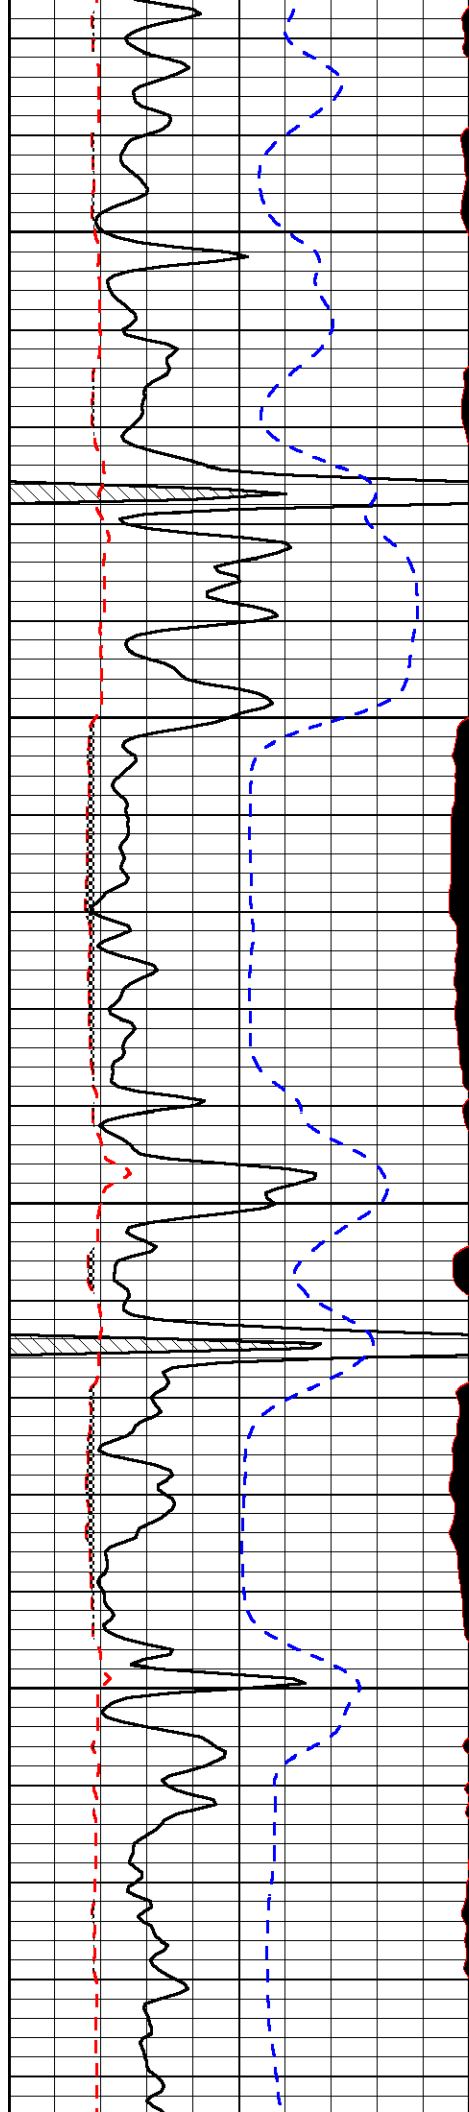


2900

2950

3000

3050

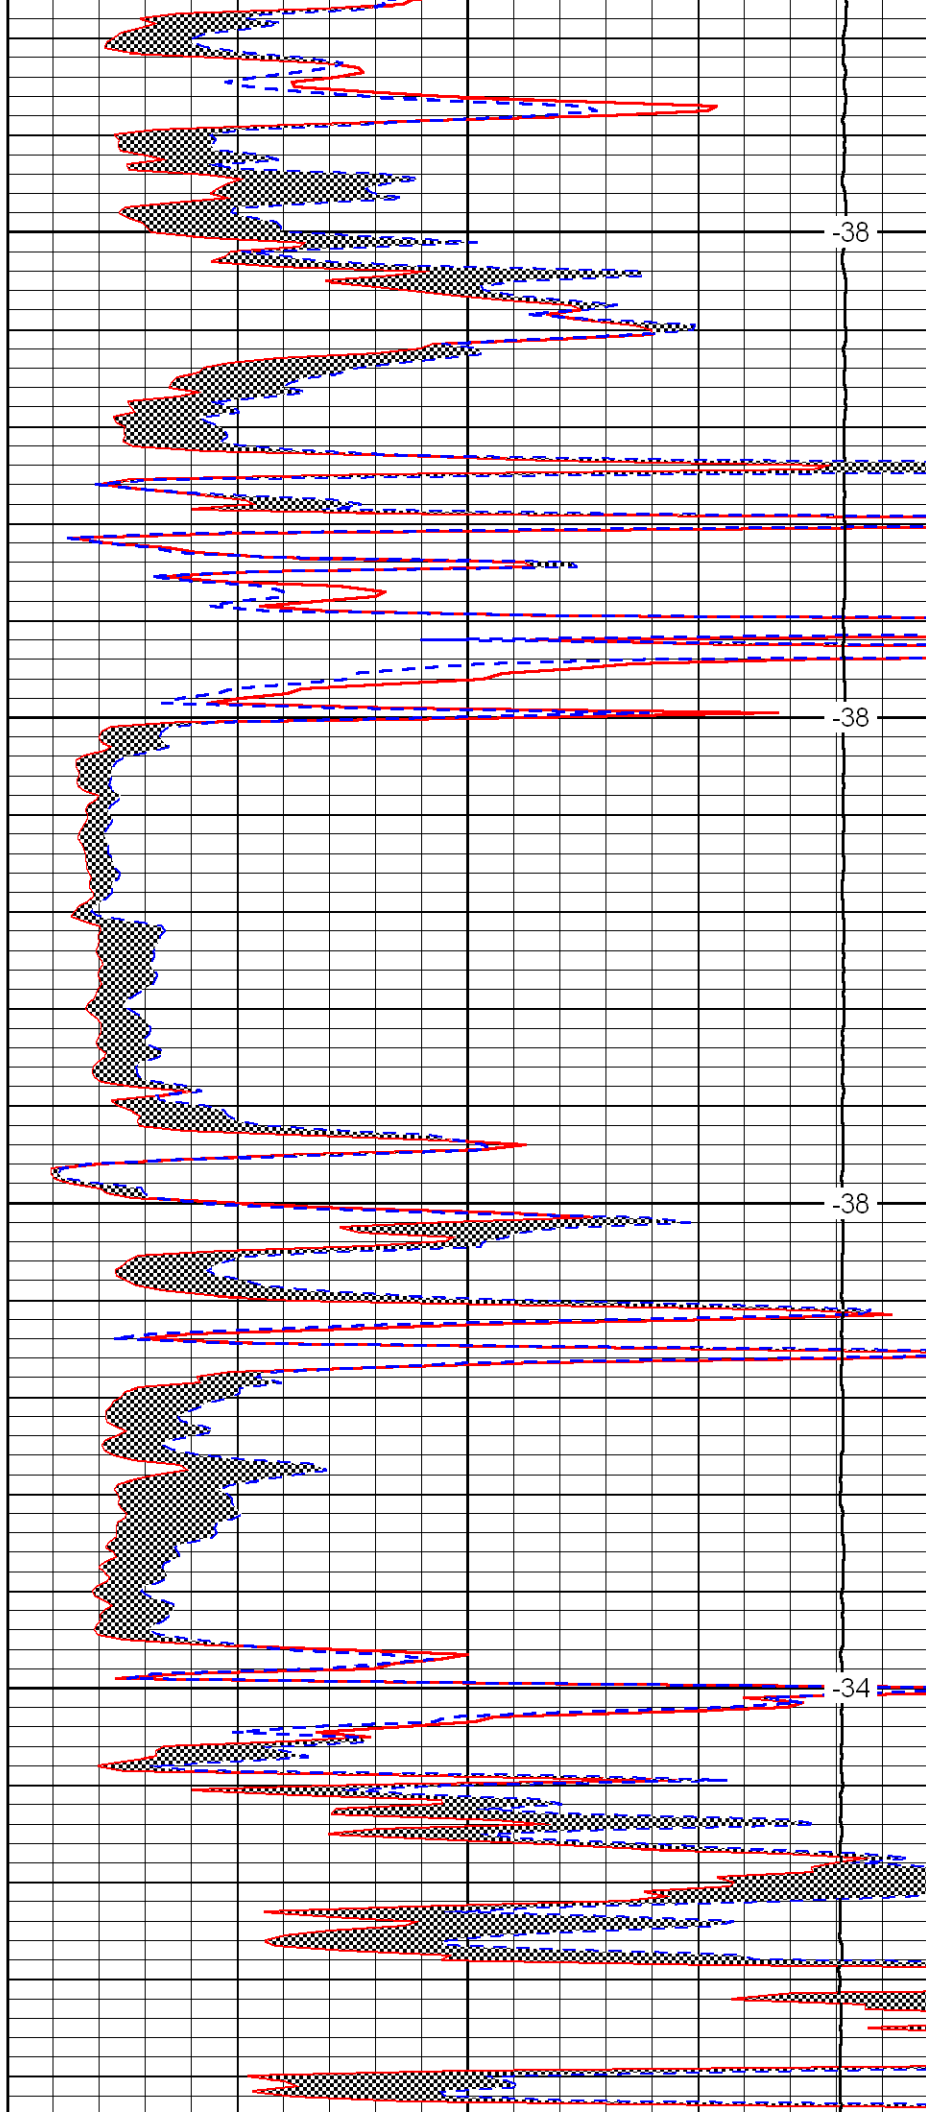


-38

-38

-38

-34

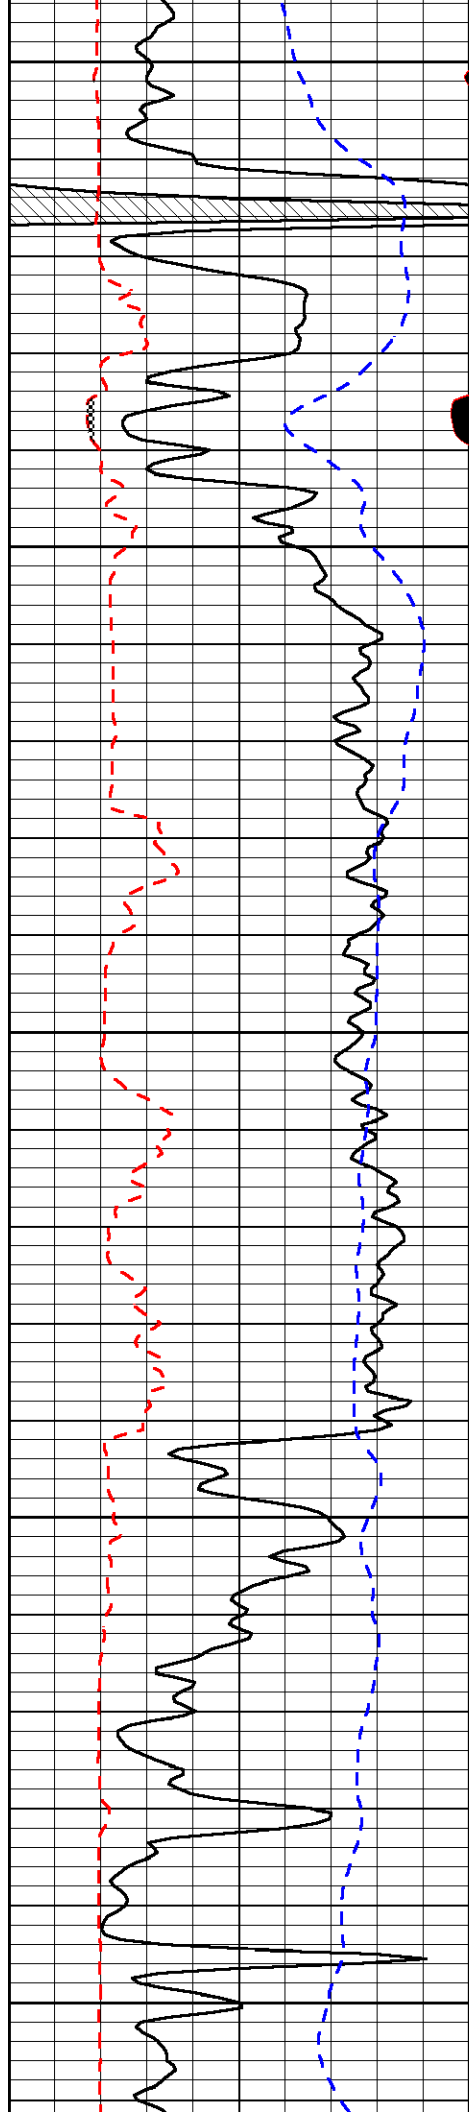


3100

3150

3200

3250

3300

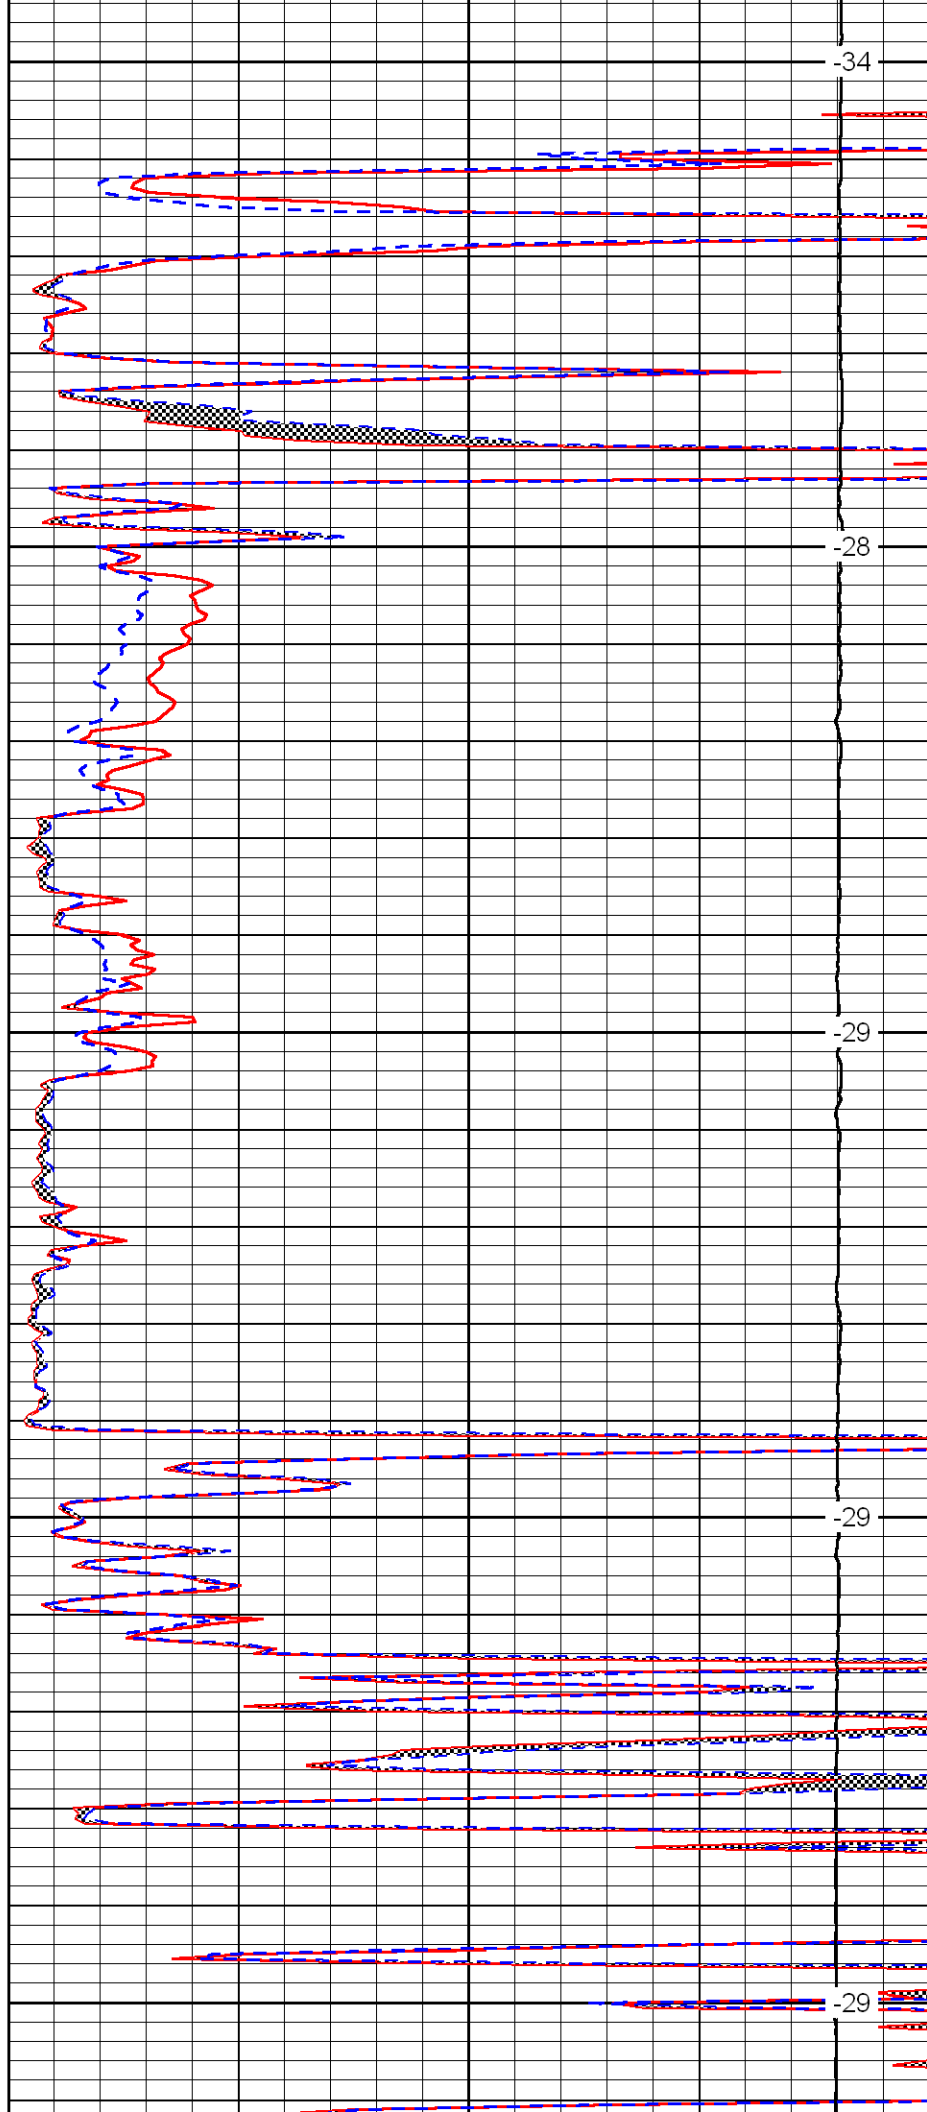


-34

-28

-29

-29

-29

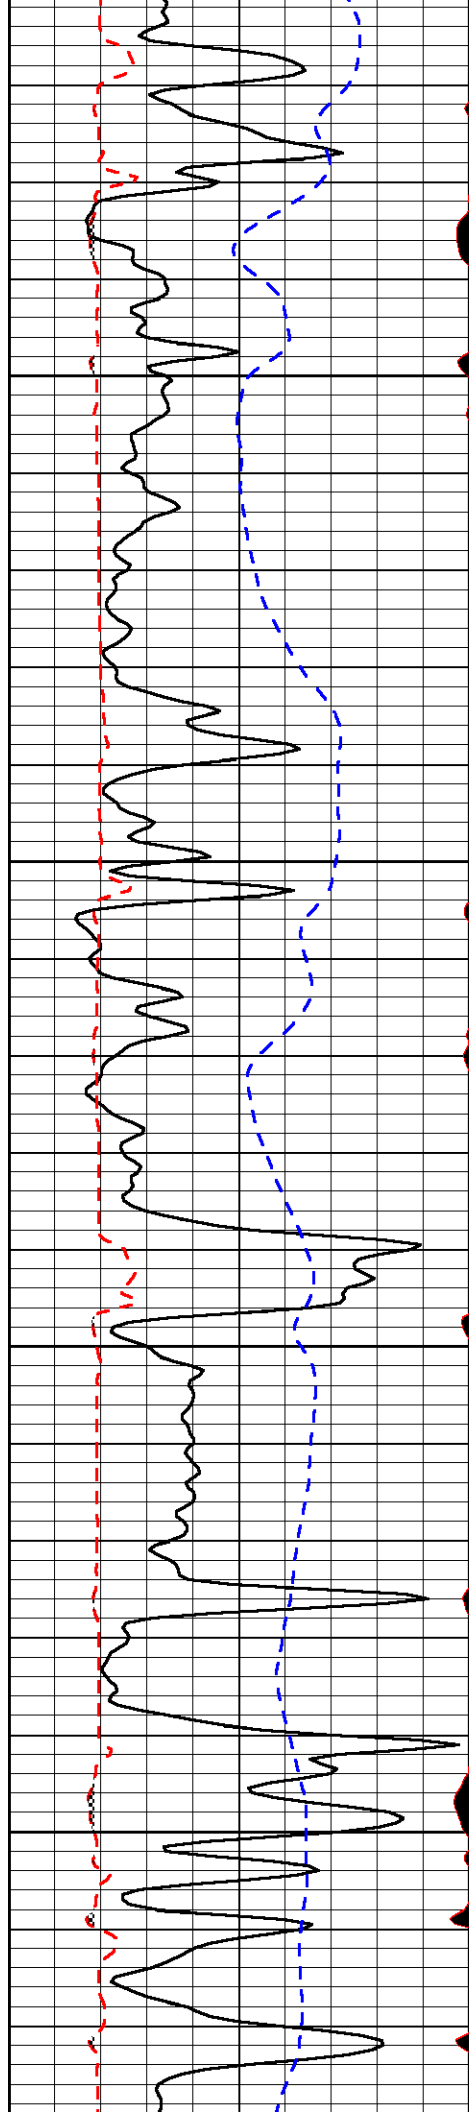



3350

3400


3450

3500

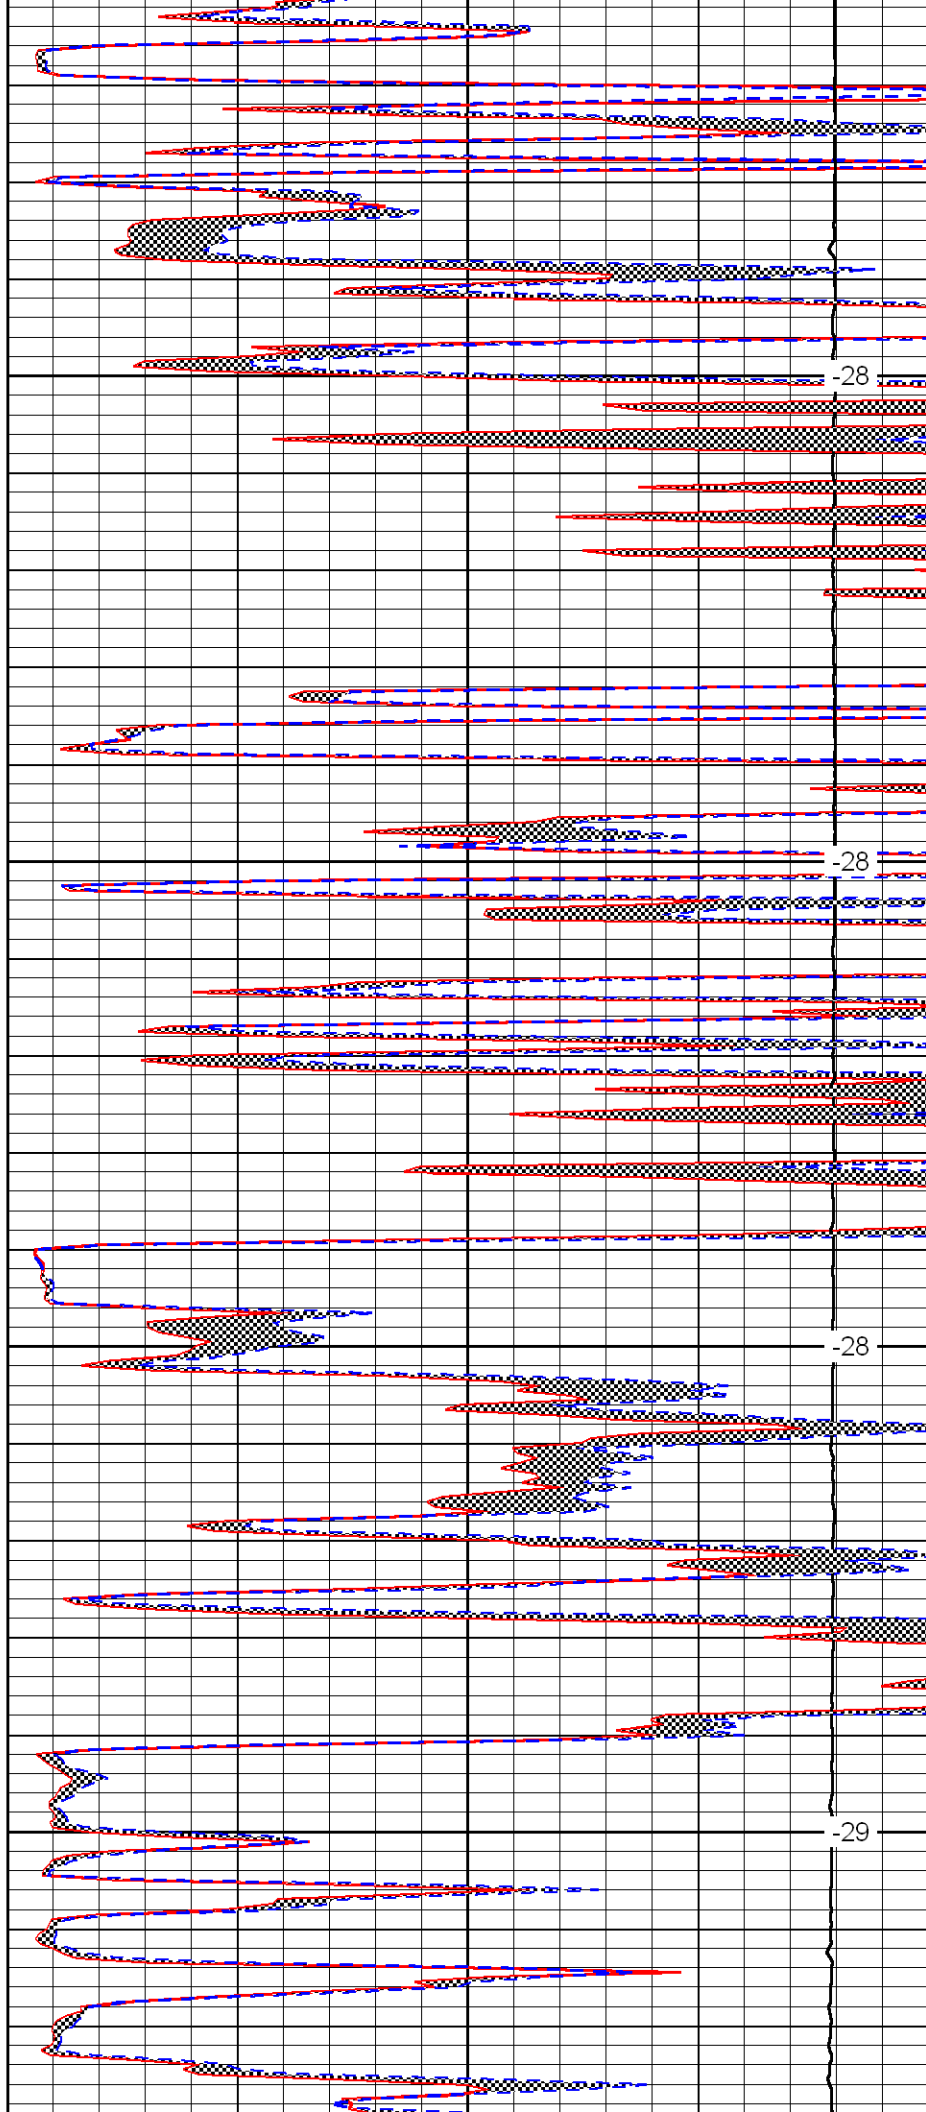

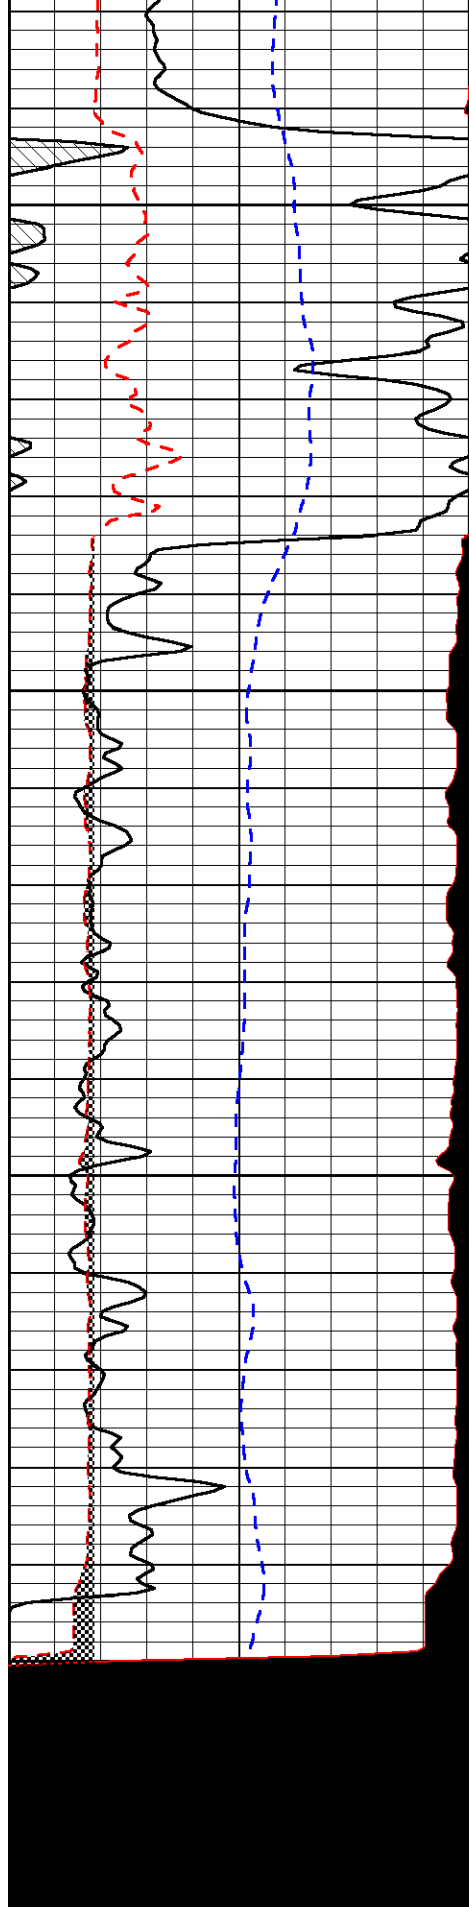

0	Gamma Ray	150
6	MCAL (GAPI)	16
2.875	Mud Cake (GAPI)	7.875
-200	SP	0

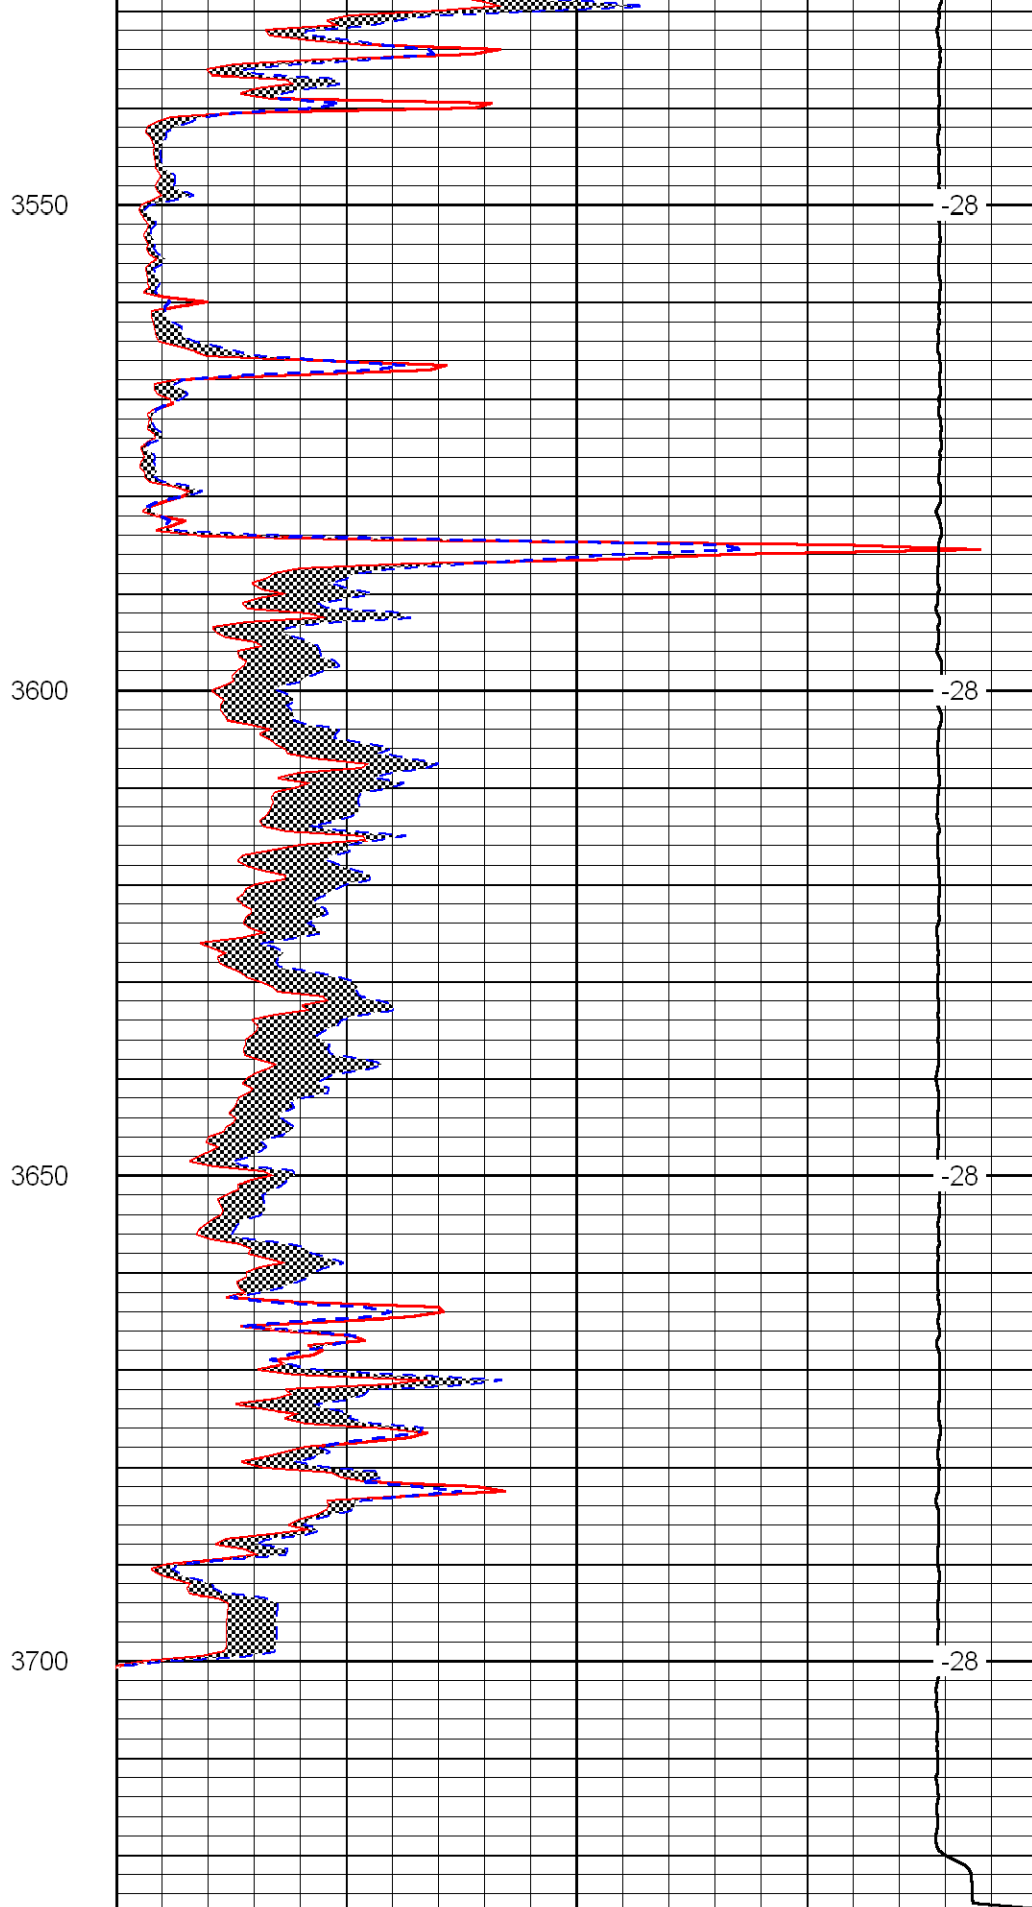

0	Micro Inverse 1 X 1	40
0	Micro Normal 2''	40
10000	Line Weight	0

LSPD

