

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION  
**WELL PLUGGING APPLICATION**  
Please TYPE Form and File ONE Copy

Form CP-1  
September 2003  
This Form must be Typed  
Form must be Signed  
All blanks must be Filled

11/05

API # 15 - 101-21442 - 00-00 (Identifier Number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate original spud or completion date \_\_\_\_\_.

Well Operator: American Warrior Inc. KCC License #: 4058  
(Owner / Company Name) (Operator's)

Address: P.O. Box 399 City: Garden City

State: Kansas Zip Code: 67846 Contact Phone: (620) 272 - 1023

Lease: Eaton Well #: 1-15 Sec. 15 Twp. 17 S. R. 29  East  West

C SW - NE - NE - NE Spot Location / QQQQ County: Lane

4786' Feet (in exact footage) From  North /  South (from nearest outside section corner) Line of Section (Not Lease Line)

494 Feet (in exact footage) From  East /  West (from nearest outside section corner) Line of Section (Not Lease Line)

Check One:  Oil Well  Gas Well  D&A  Cathodic  Water Supply Well  
 SWD Docket # \_\_\_\_\_  ENHR Docket # \_\_\_\_\_  Other: \_\_\_\_\_

Conductor Casing Size: \_\_\_\_\_ Set at: \_\_\_\_\_ Cemented with: \_\_\_\_\_ Sacks

Surface Casing Size: 85/8 Set at: 345' Cemented with: 180sx. Sacks

Production Casing Size: 51/2 Set at: 4583' Cemented with: 185sx. Sacks

List (ALL) Perforations and Bridgeplug Sets: 4456' to 4459'. 4469' to 4475', 4518' to 4521' and 4524' to 4528.

Elevation: 2791 ( G.L. /  K.B.) T.D.: 4610' PBTD: NA Anhydrite Depth: 2179'  
(Stone Corral Formation)

Condition of Well:  Good  Poor  Casing Leak  Junk in Hole

Proposed Method of Plugging (attach a separate page if additional space is needed): Sand off perms, 2sx cement on sand. Shoot casing off below 1200'. Pump 80 sx plug at 1200', 40sx plug at 600', 40sx plug at 350' and a 10sx plug at 40'. Cut casing off. 6' below surface, Cap Back fill.

Is Well Log attached to this application as required?  Yes  No Is ACO-1 filed?  Yes  No

If not explain why? \_\_\_\_\_

RECEIVED  
FEB 08 2005  
KCC WICHITA

Plugging of this Well will be done in accordance with K.S.A. 55-101 et. seq. and the Rules and Regulations of the State Corporation Commission.

List Name of Company Representative authorized to be in charge of plugging operations: Jody Smith

Phone: (620) 272 - 1023

Address: P.O. 399 City / State: Garden City Kansas

Plugging Contractor: Swift Services KCC License #: 32382  
(Company Name) (Contractor's)

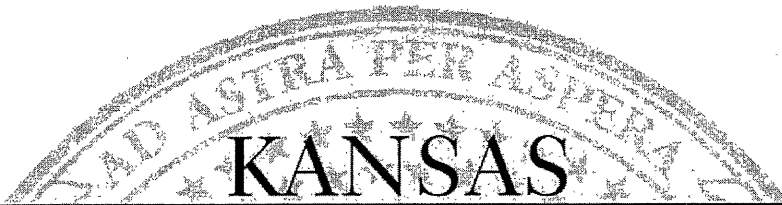
Address: P.O. Box 466 Ness City Ks. 67560 Phone: (785) 798 - 2300

Proposed Date and Hour of Plugging (if known?): NA

Payment of the Plugging Fee (K.A.R. 82-3-118) will be guaranteed by Operator or Agent  
Date: 2/7/05 Authorized Operator / Agent: [Signature]  
(Signature)

Mail to: KCC - Conservation Division, 130 S. Market - Room 2078, Wichita, Kansas 67202

10/05

**NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)**

American Warrior, Inc.  
PO Box 399  
Garden City, KS 67846

February 08, 2005

Re: EATON #1-15  
API 15-101-21442-00-00  
SWNENENE 15-17S-29W, 4786 FSL 494 FEL  
LANE COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

**Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.**

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

**This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.**

Sincerely

David P. Williams  
Production Supervisor

District: #1  
210 E Frontview, Suite A  
Dodge City, KS 67801  
(620) 225-8888