



Radiation Guard Log

DIGITAL LOG (785) 625-3858

API No.		Company L-K Wireline, Inc.	
15-051-26,052-00-00		Well Riedel No. 4	
Field Air Base		County Ellis State Kansas	
Location 2110' FNL & 330' FEL		Other Services NONE	
Sec: 27 Twp: 13 S Rge: 16 W		Elevation	
Permanent Datum Ground Level		K.B. 1958	
Log Measured From Kelly Bushing		D.F. 1953	
Drilling Measured From Kelly Bushing		G.L. 1953	
Date	11/22/2010		
Run Number	One		
Depth Driller	3520		
Depth Logger	3520		
Bottom Logged Interval	3519		
Top Log Interval	250		
Casing Driller	8.625 @ 263		
Casing Logger	263		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	4.100		
Density / Viscosity	9.0 63		
pH / Fluid Loss	10.3 8.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	.80 @ 60		
Rmf @ Meas. Temp	.60 @ 60		
Rmc @ Meas. Temp	1.08 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.42 @ 113		
Operating Rig Time	3 1/2 Hours		
Max Rec. Temp. F	113		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Randy Kilian		


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Hays & I-70, E to Walker Exit, 2 1/4 N, W into

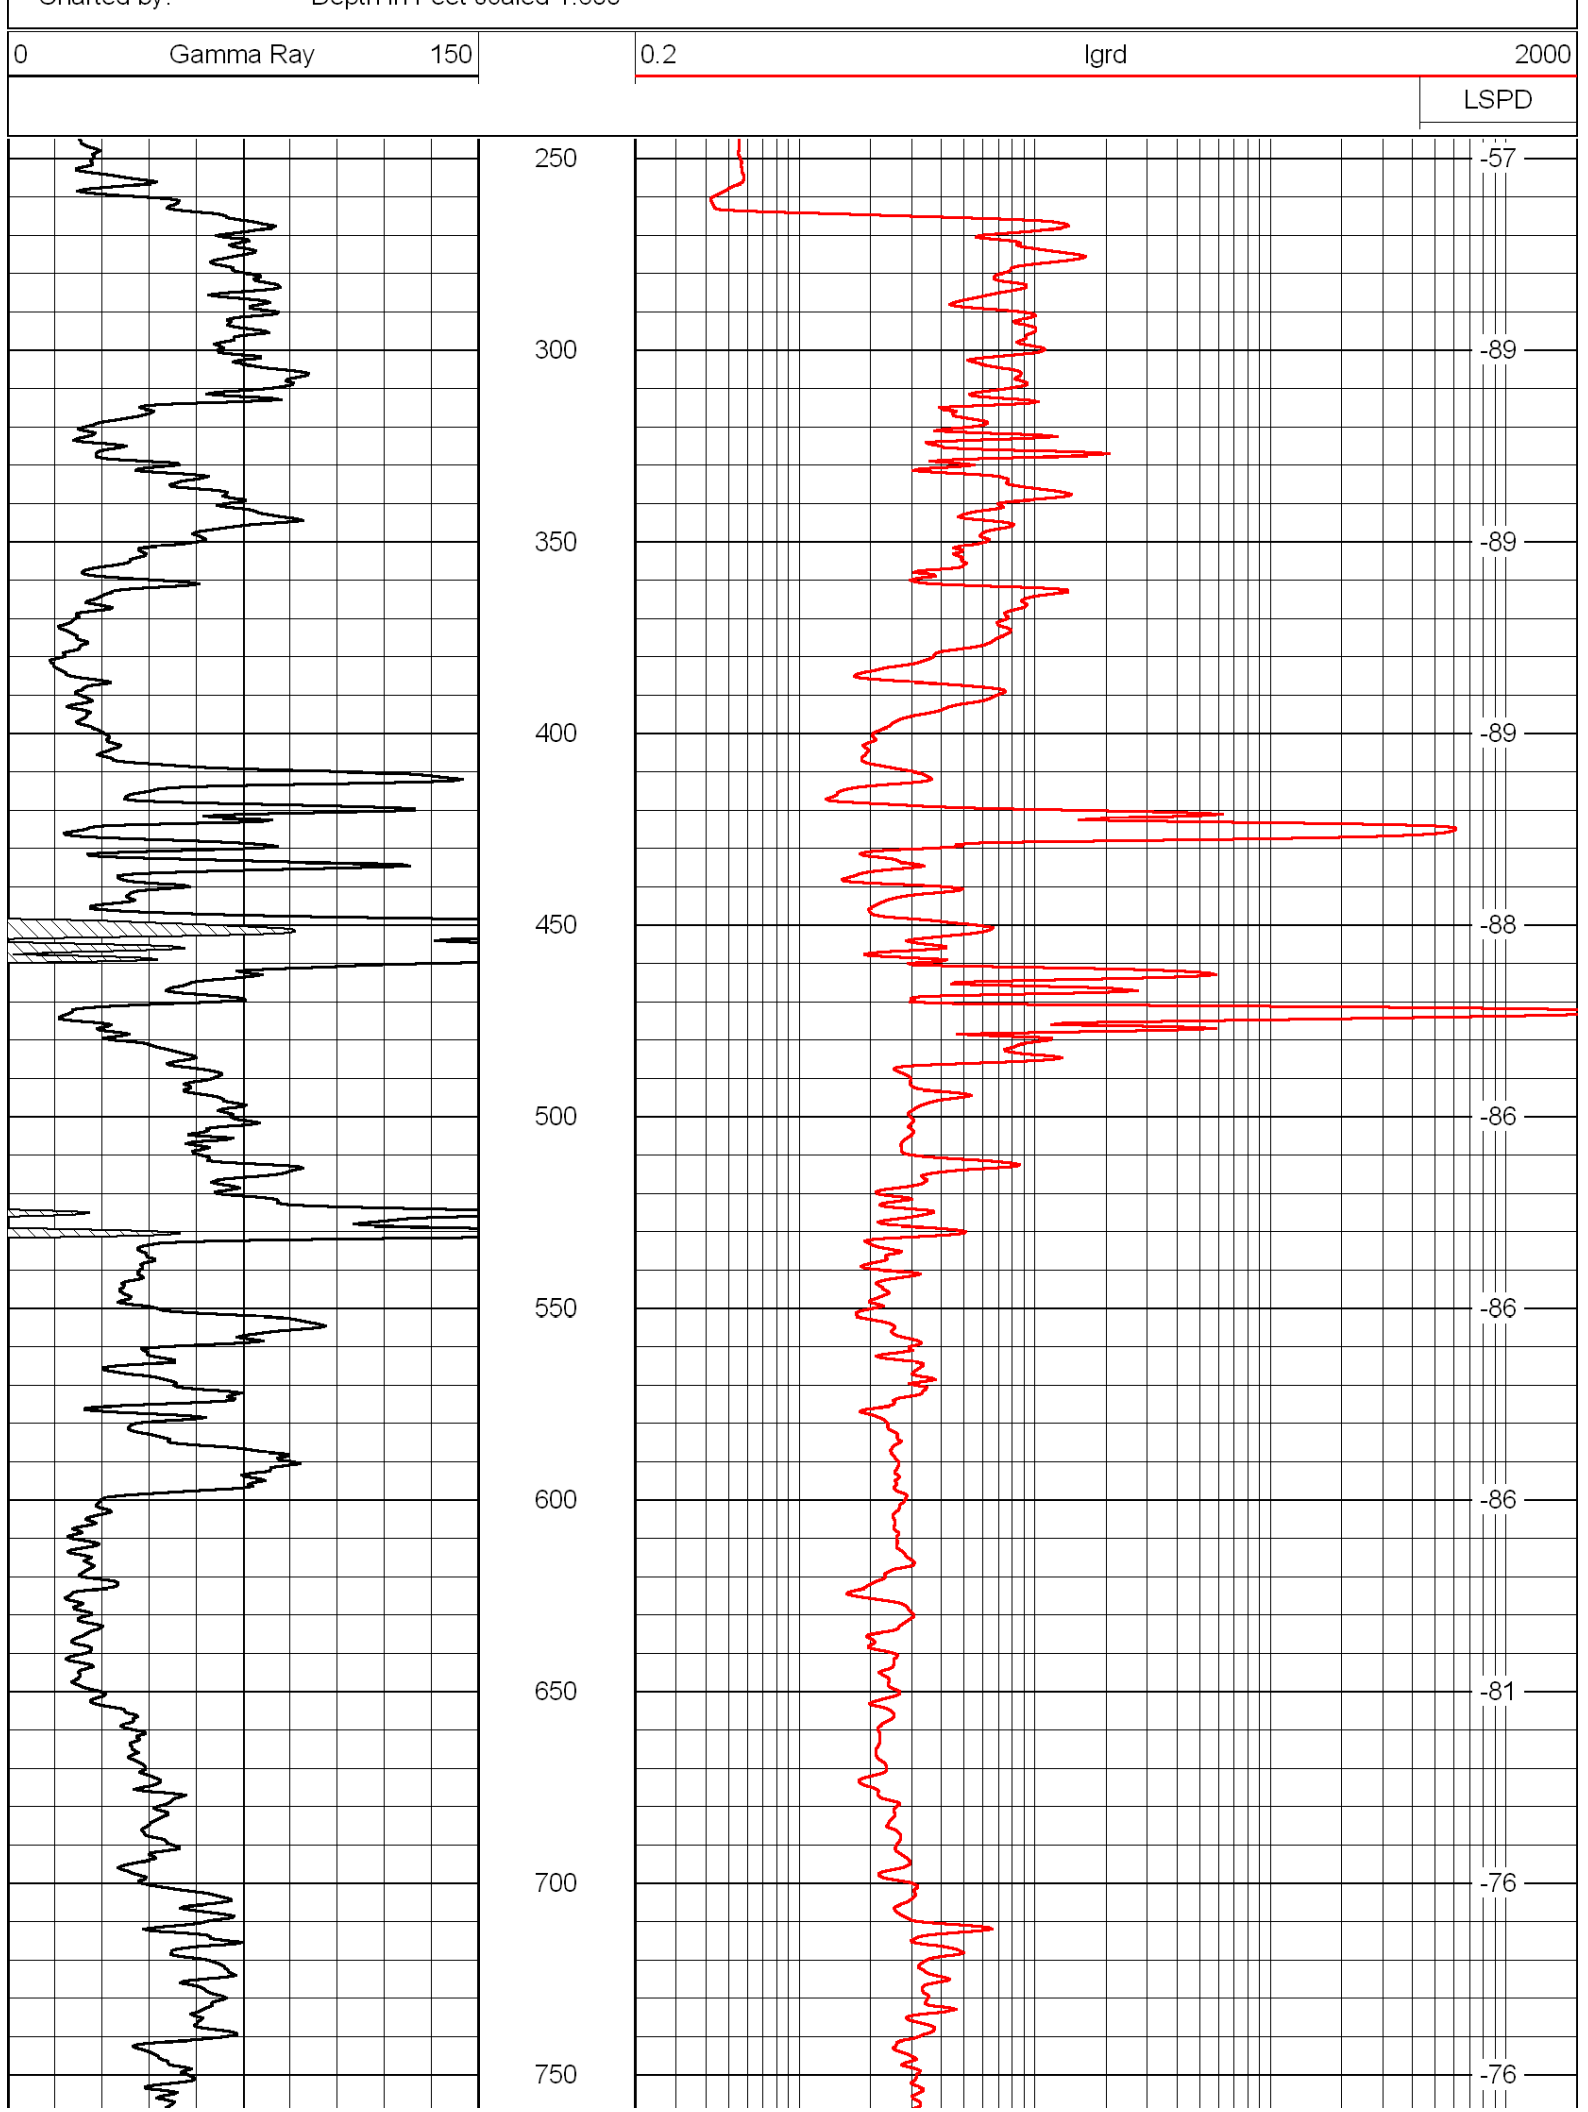

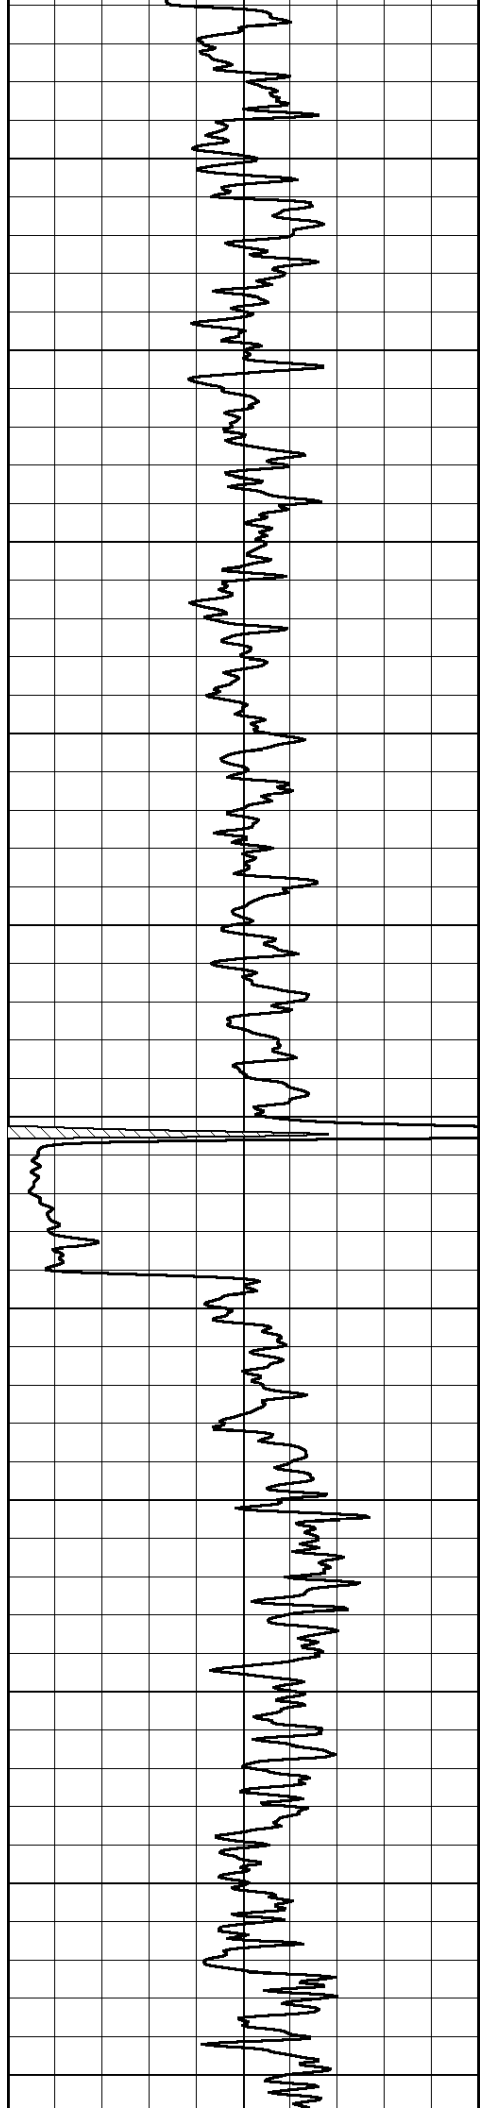

800

850

900

950

1000

1050


1100

1150

1200

1250

1300

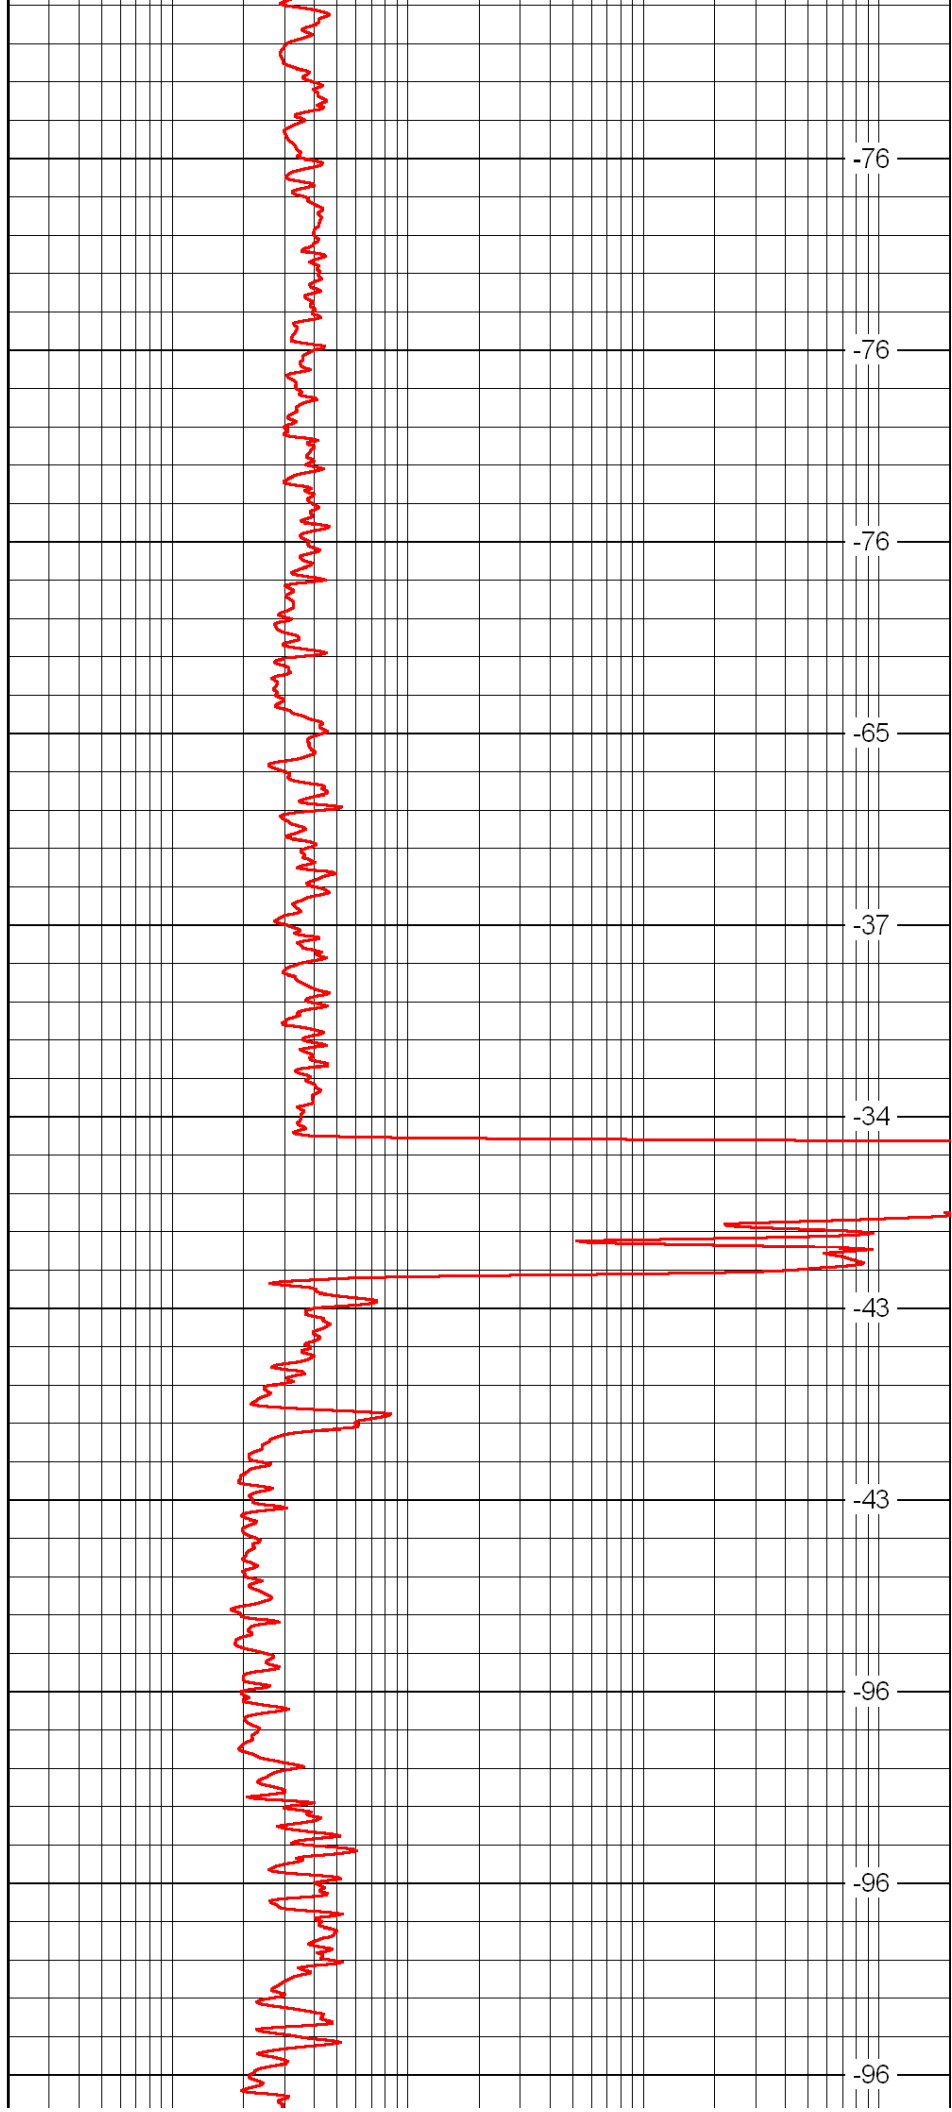

-76

-76

-76

-65

-37

-34



-43


-43

-96

-96

-96

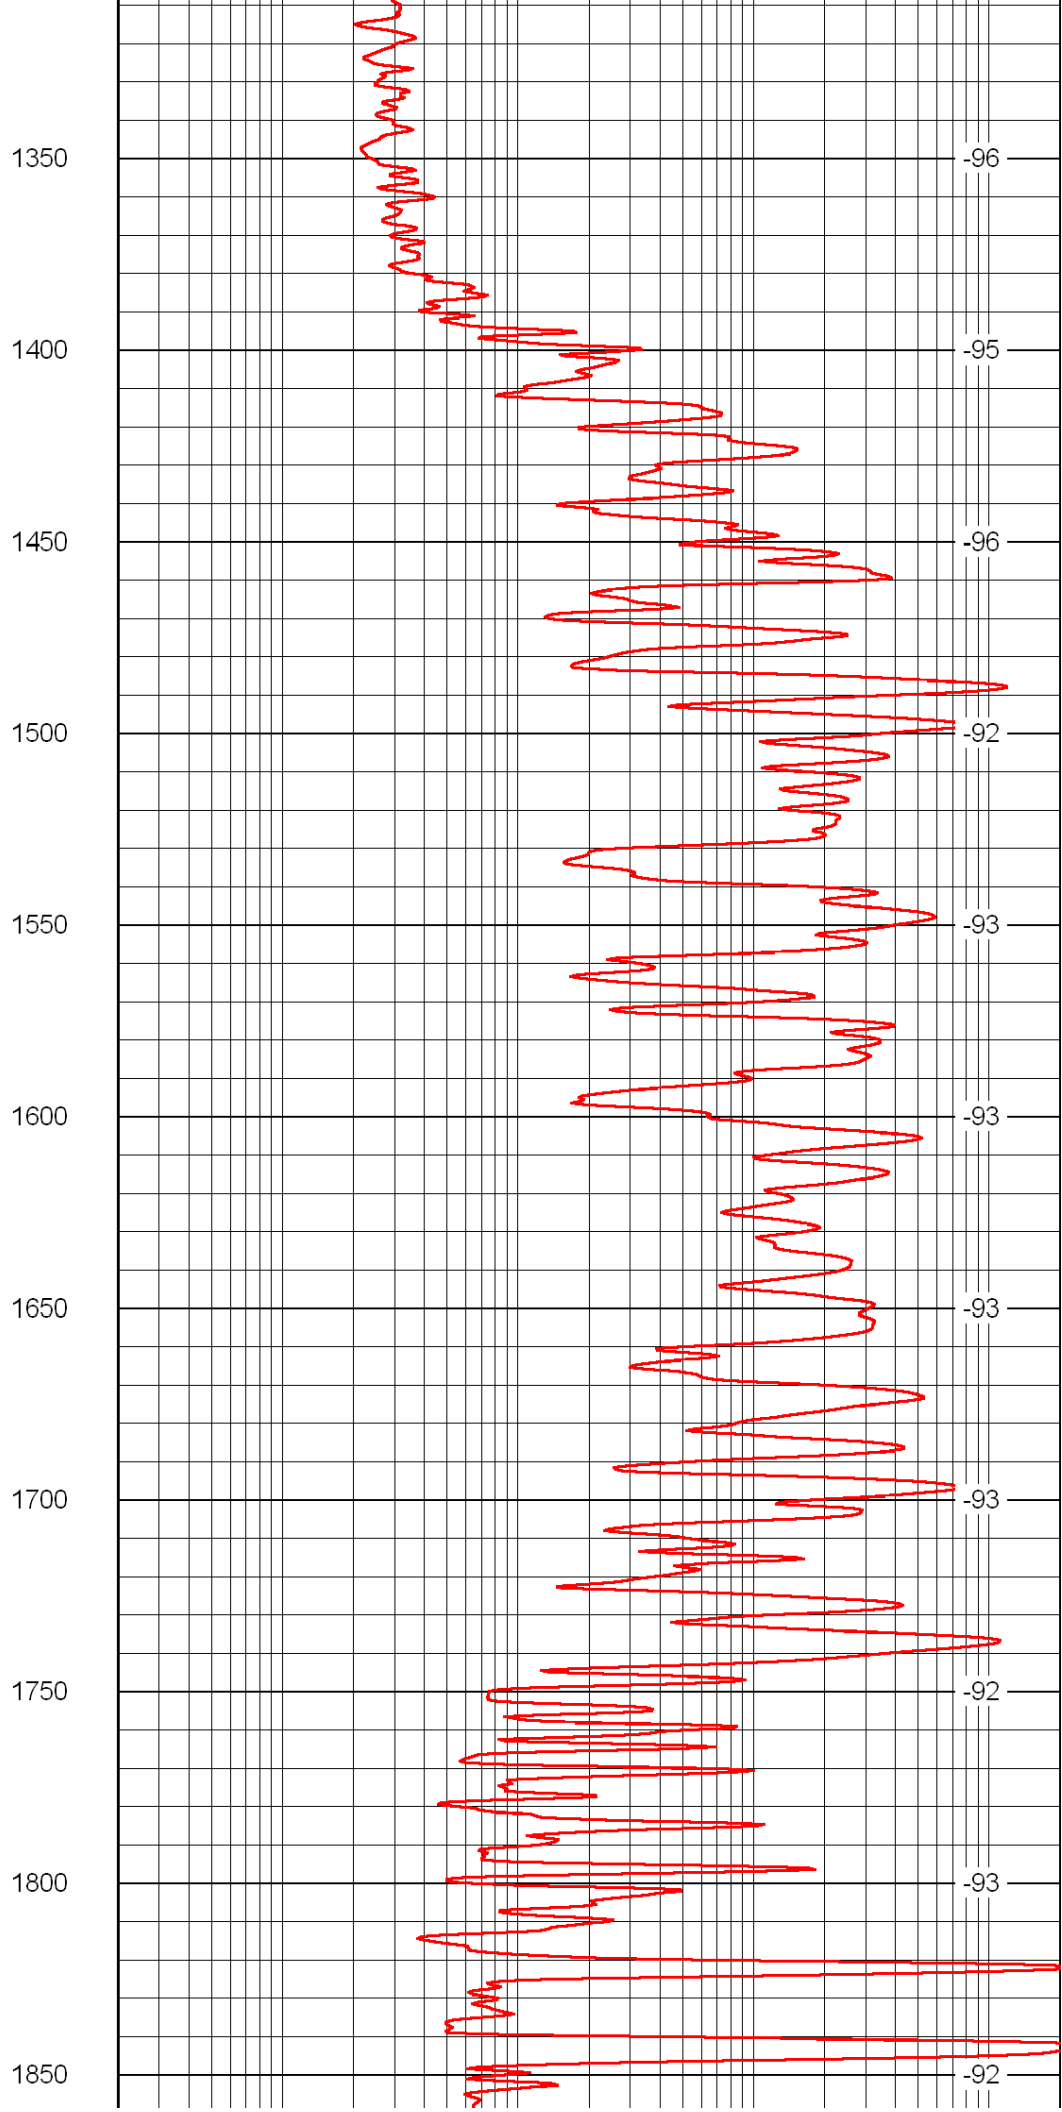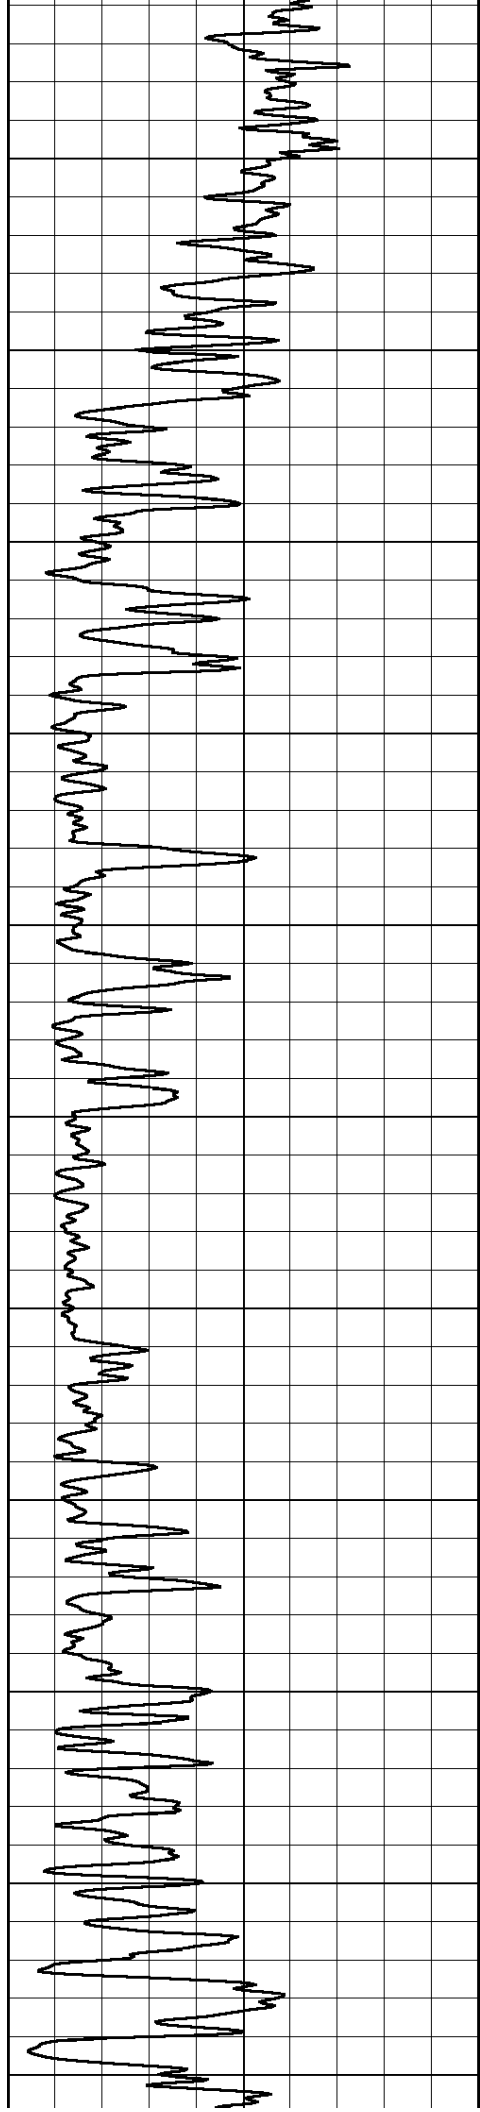

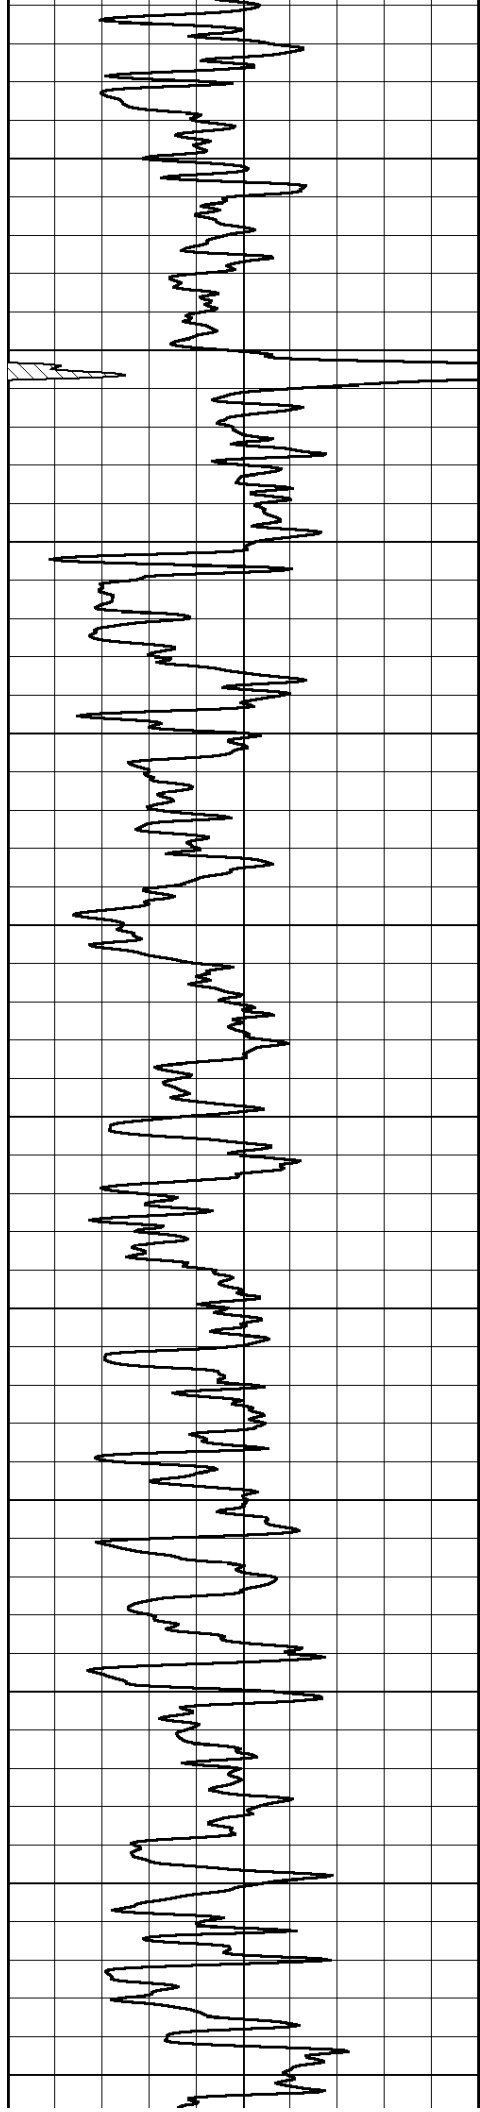

1900

1950

2000

2050

2100

2150


2200

2250

2300

2350

2400

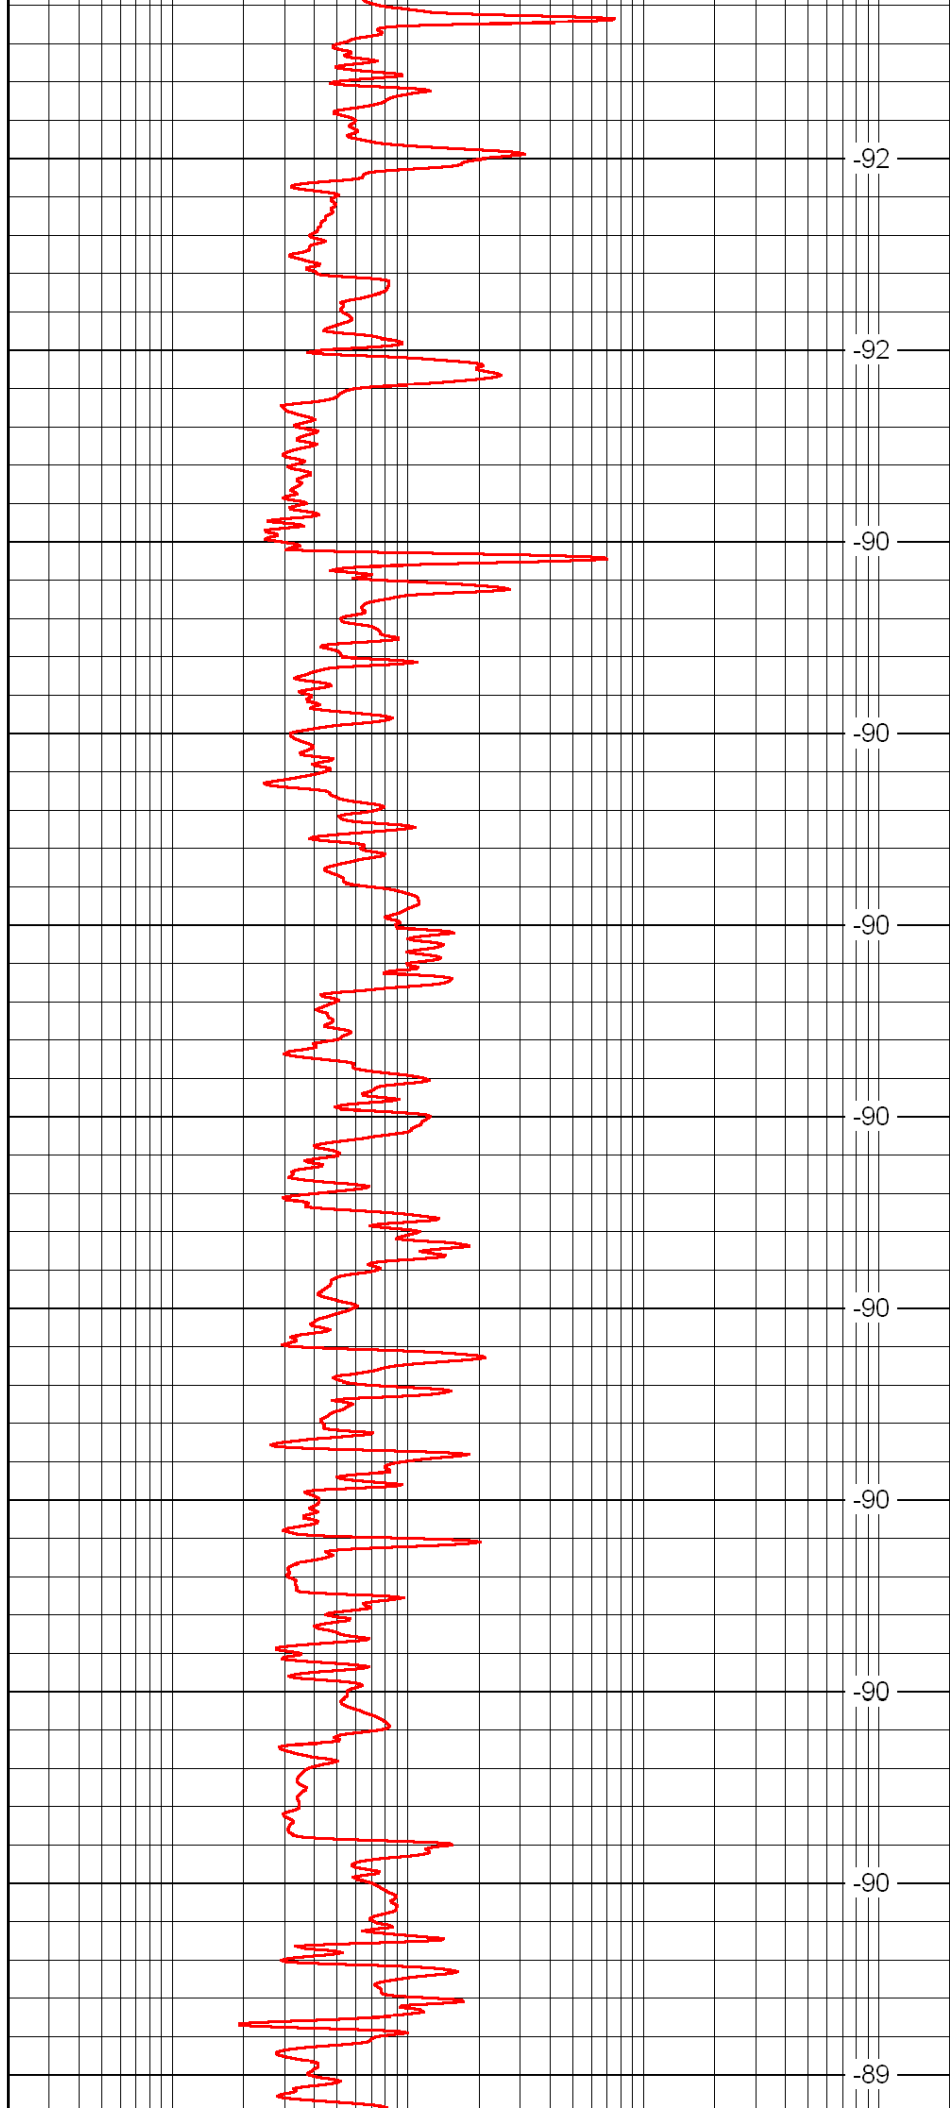

-92

-92

-90

-90

-90

-90


-90

-90

-90

-90

-89

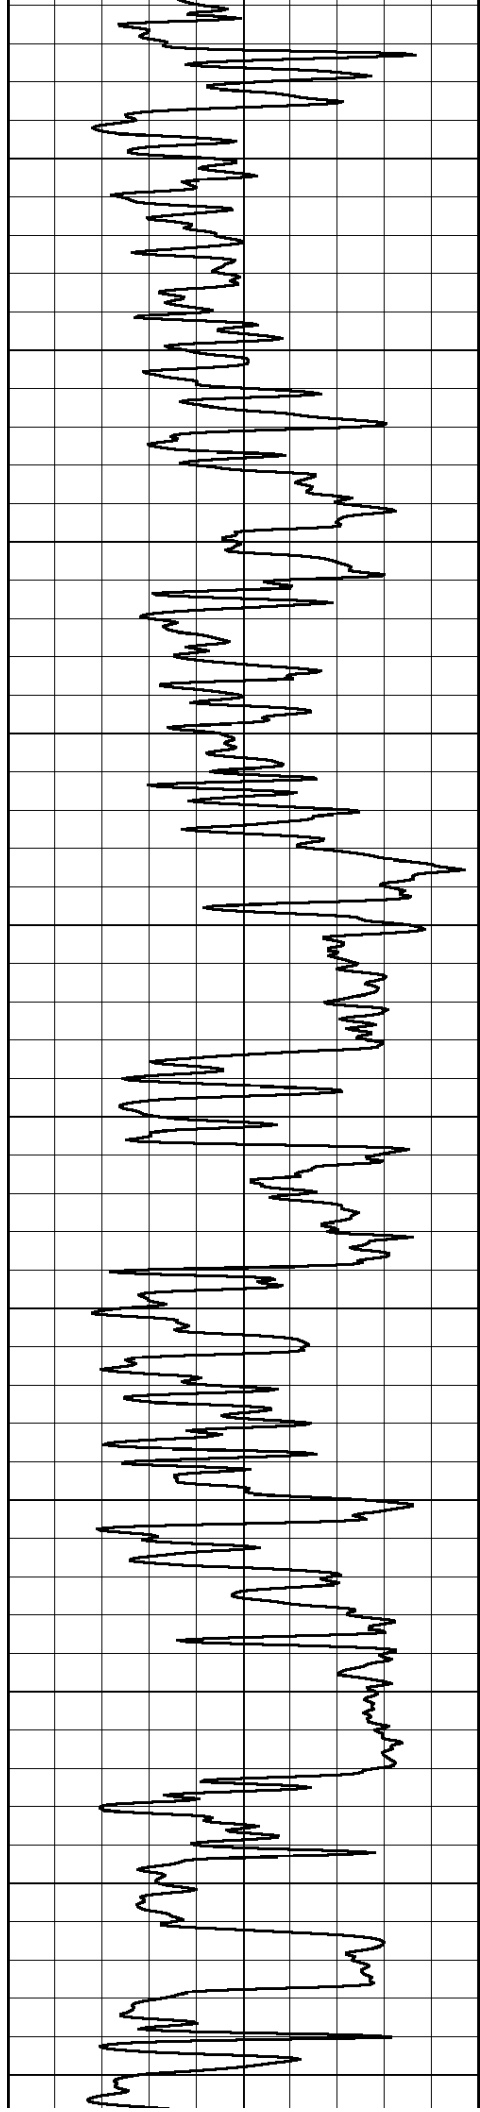

2450

2500

2550

2600

2650

2700


2750

2800

2850

2900

2950

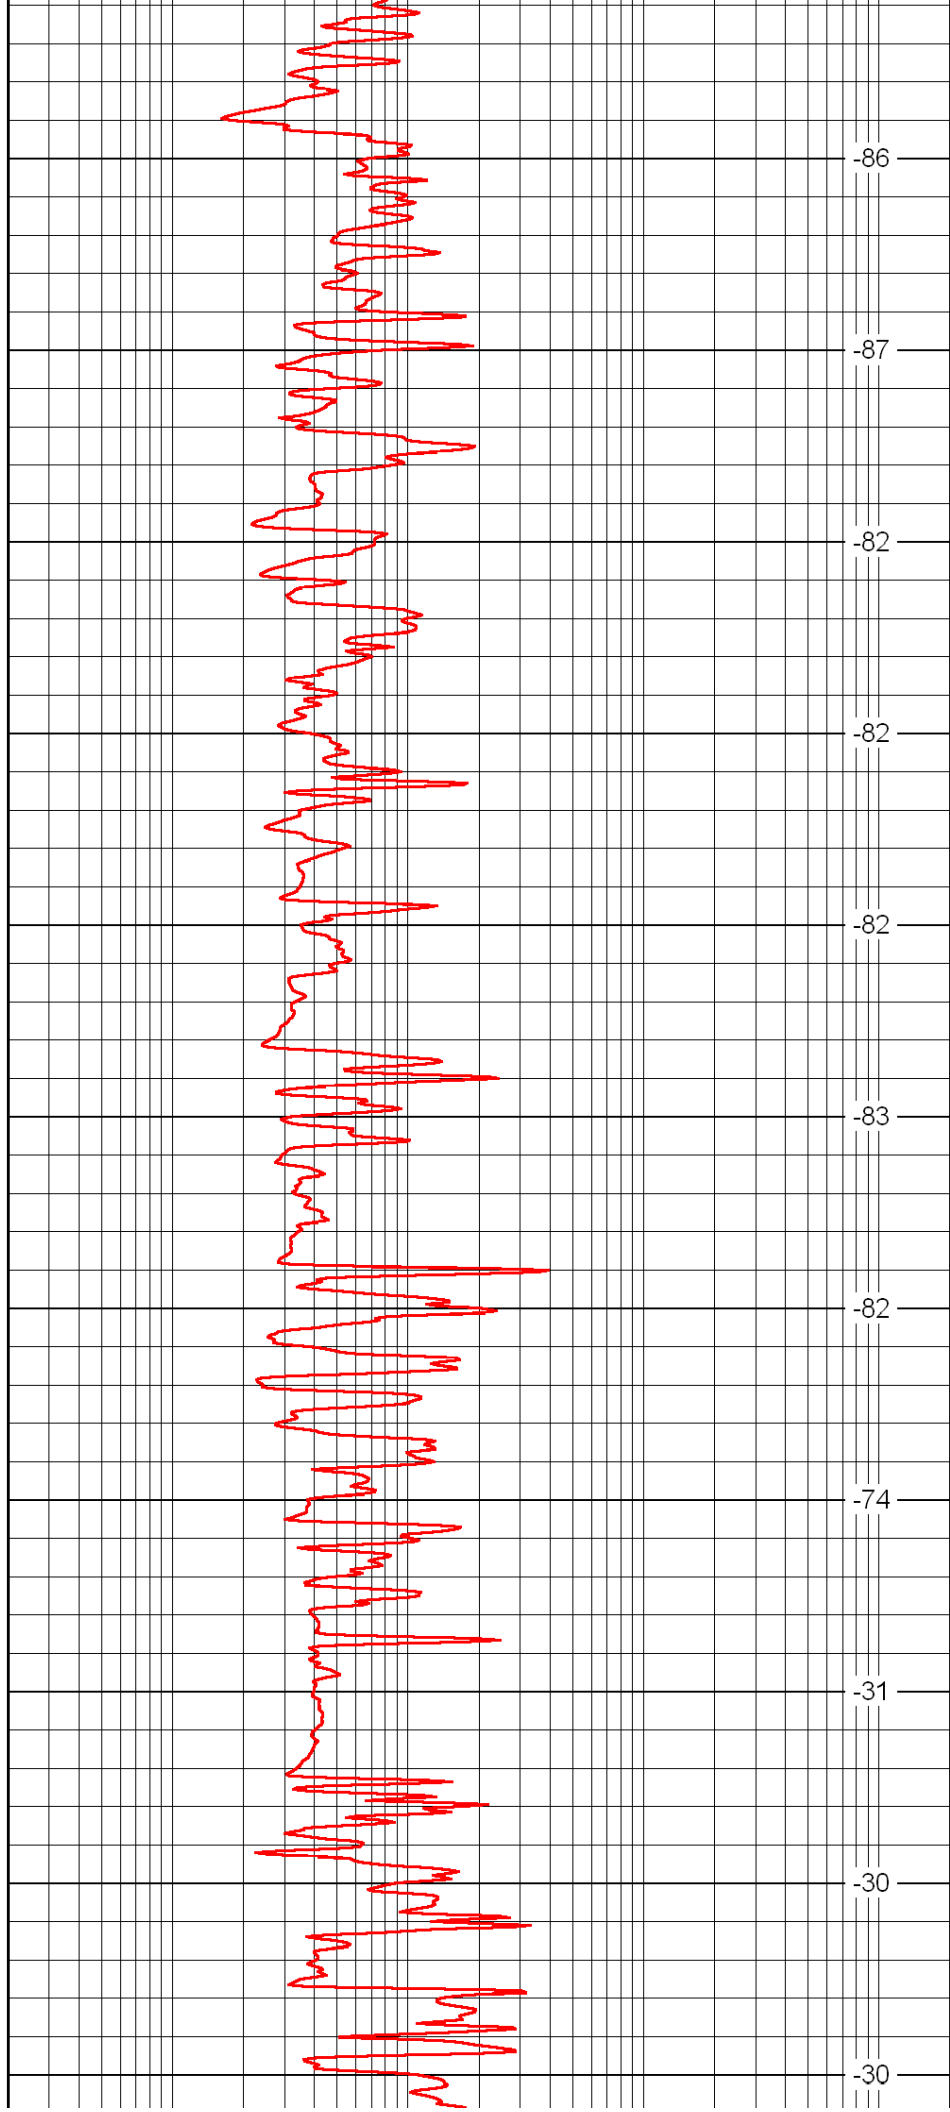

-86

-87

-82

-82

-82

-83


-82

-74

-31

-30

-30

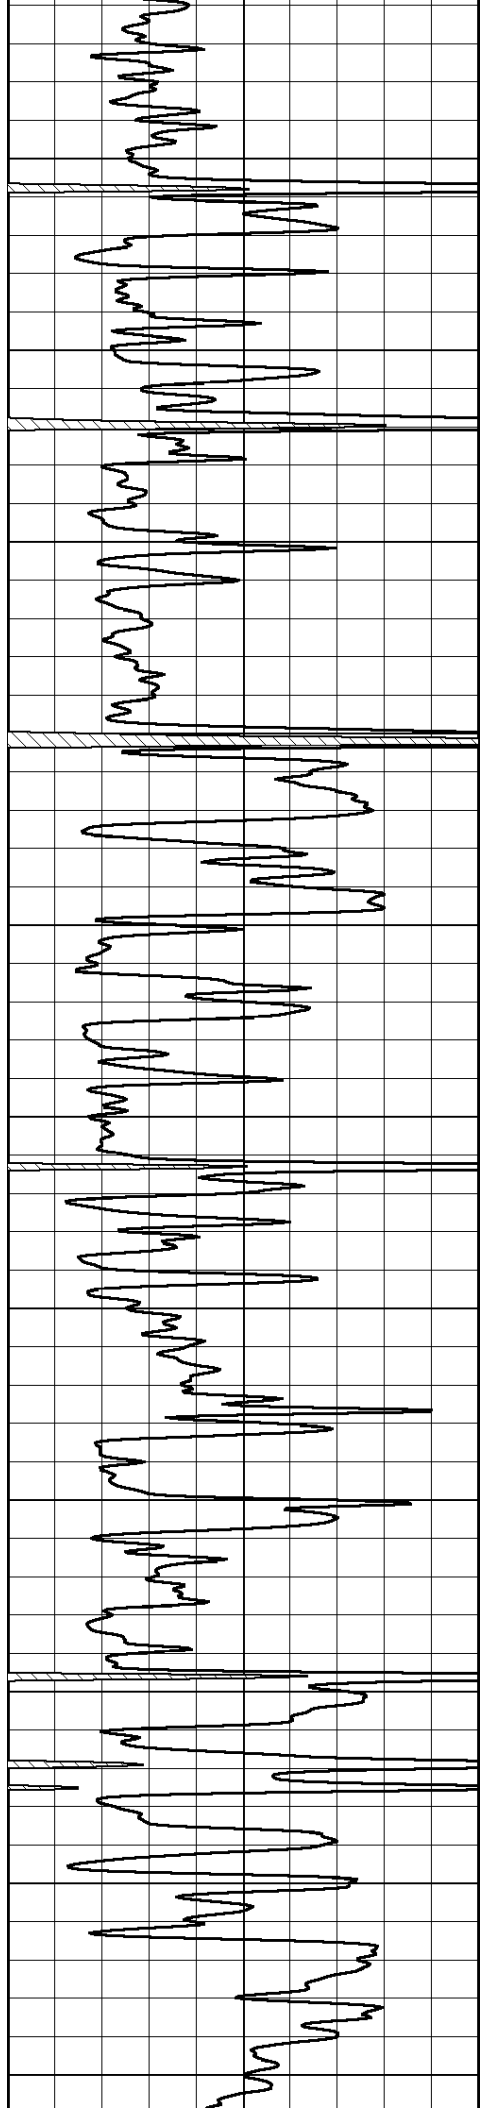

3000

3050

3100

3150

3200

3250


3300

3350

3400

3450

3500

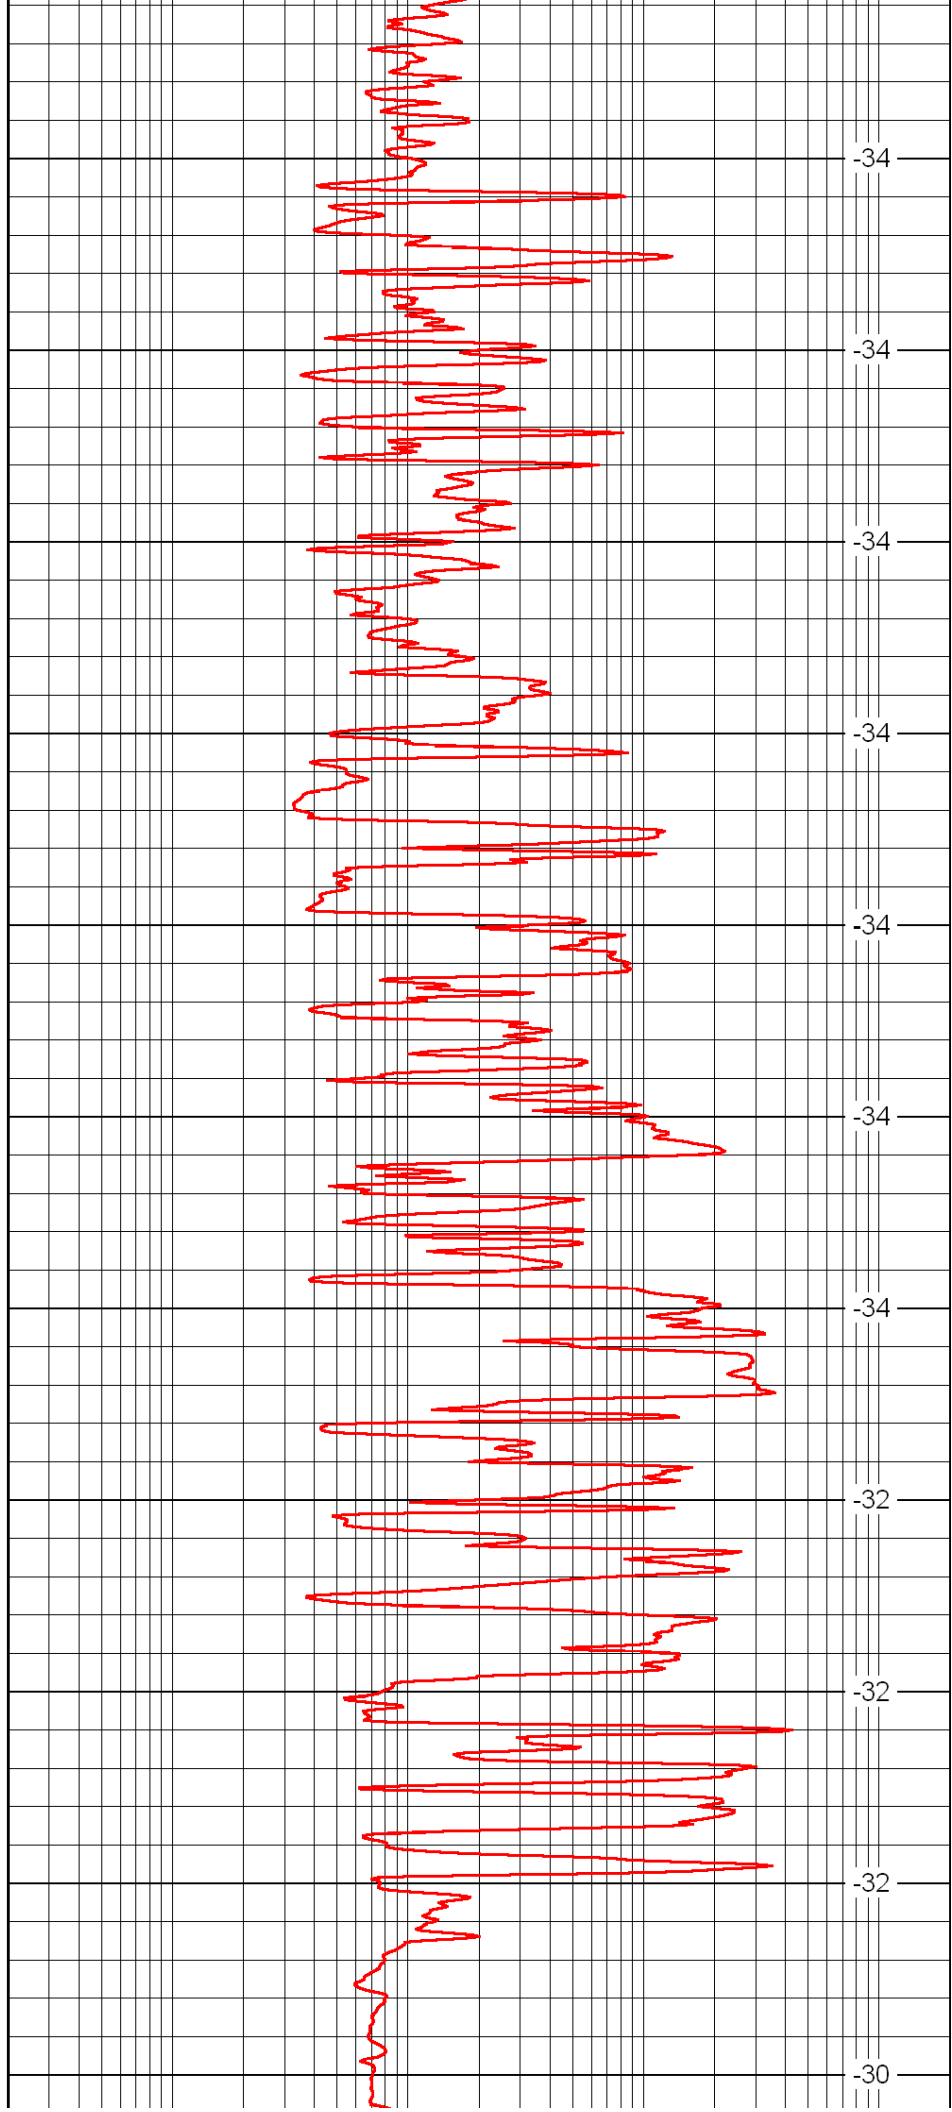

-34

-34

-34

-34

-34

-34





-34


-32


-32

-32

-30

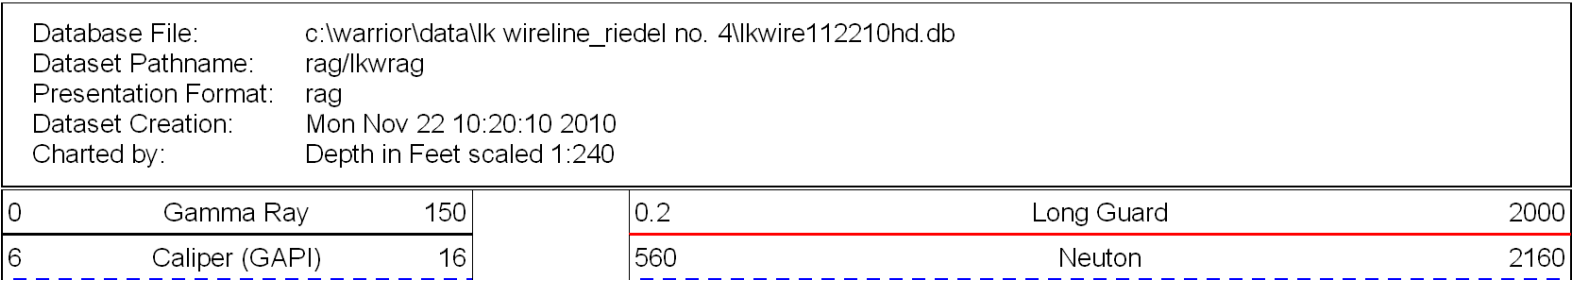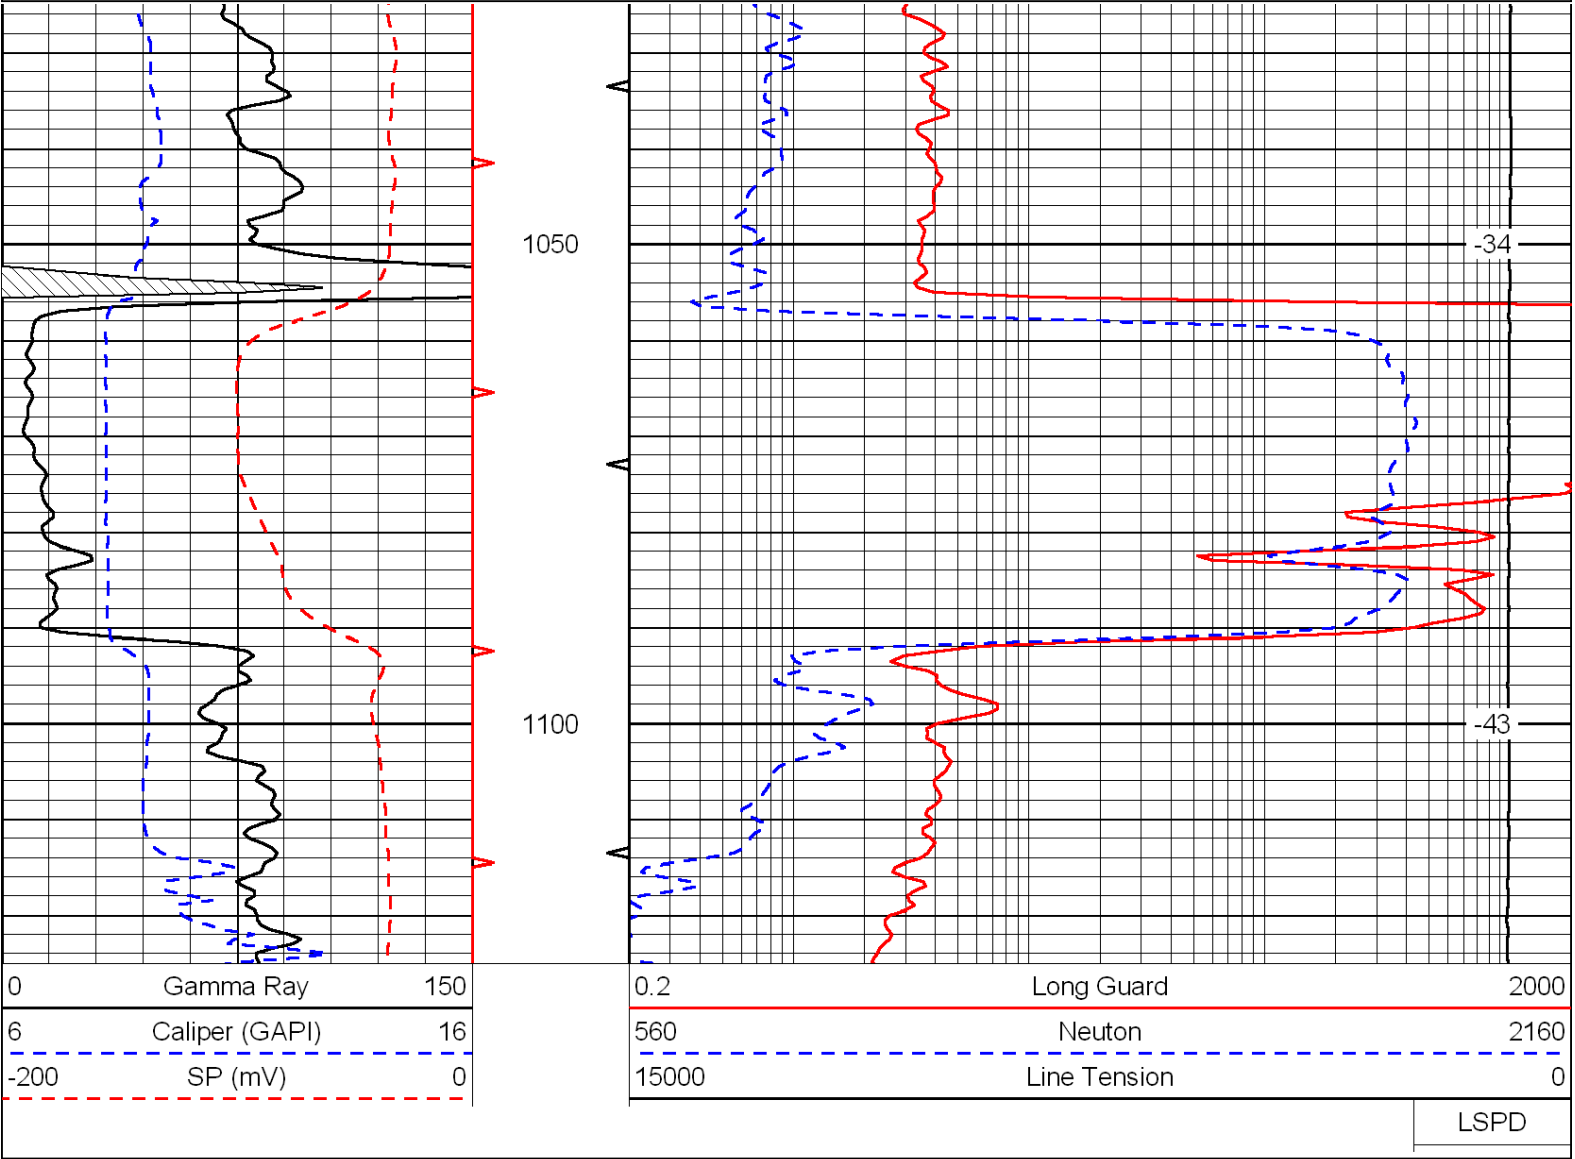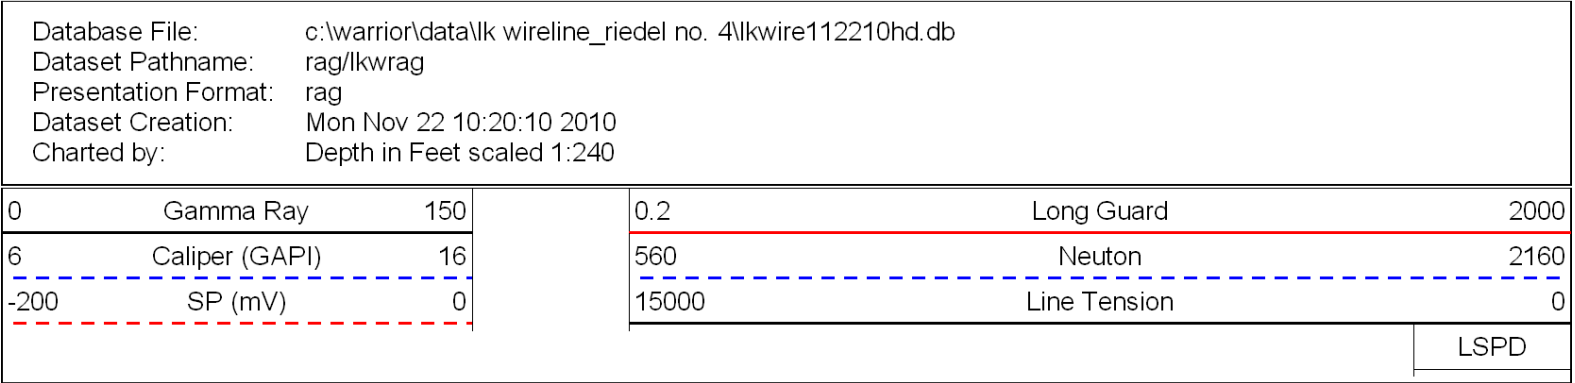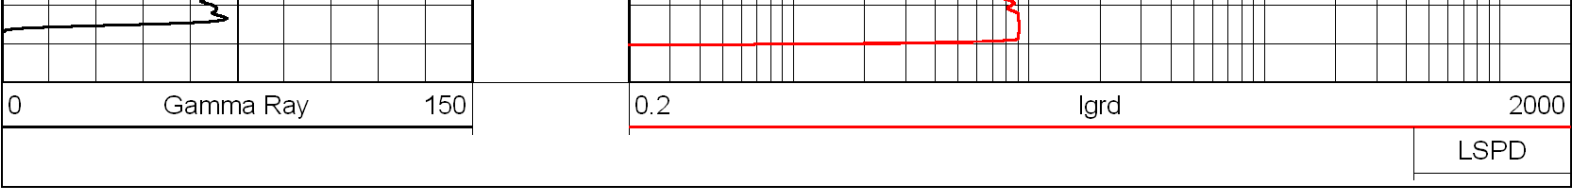

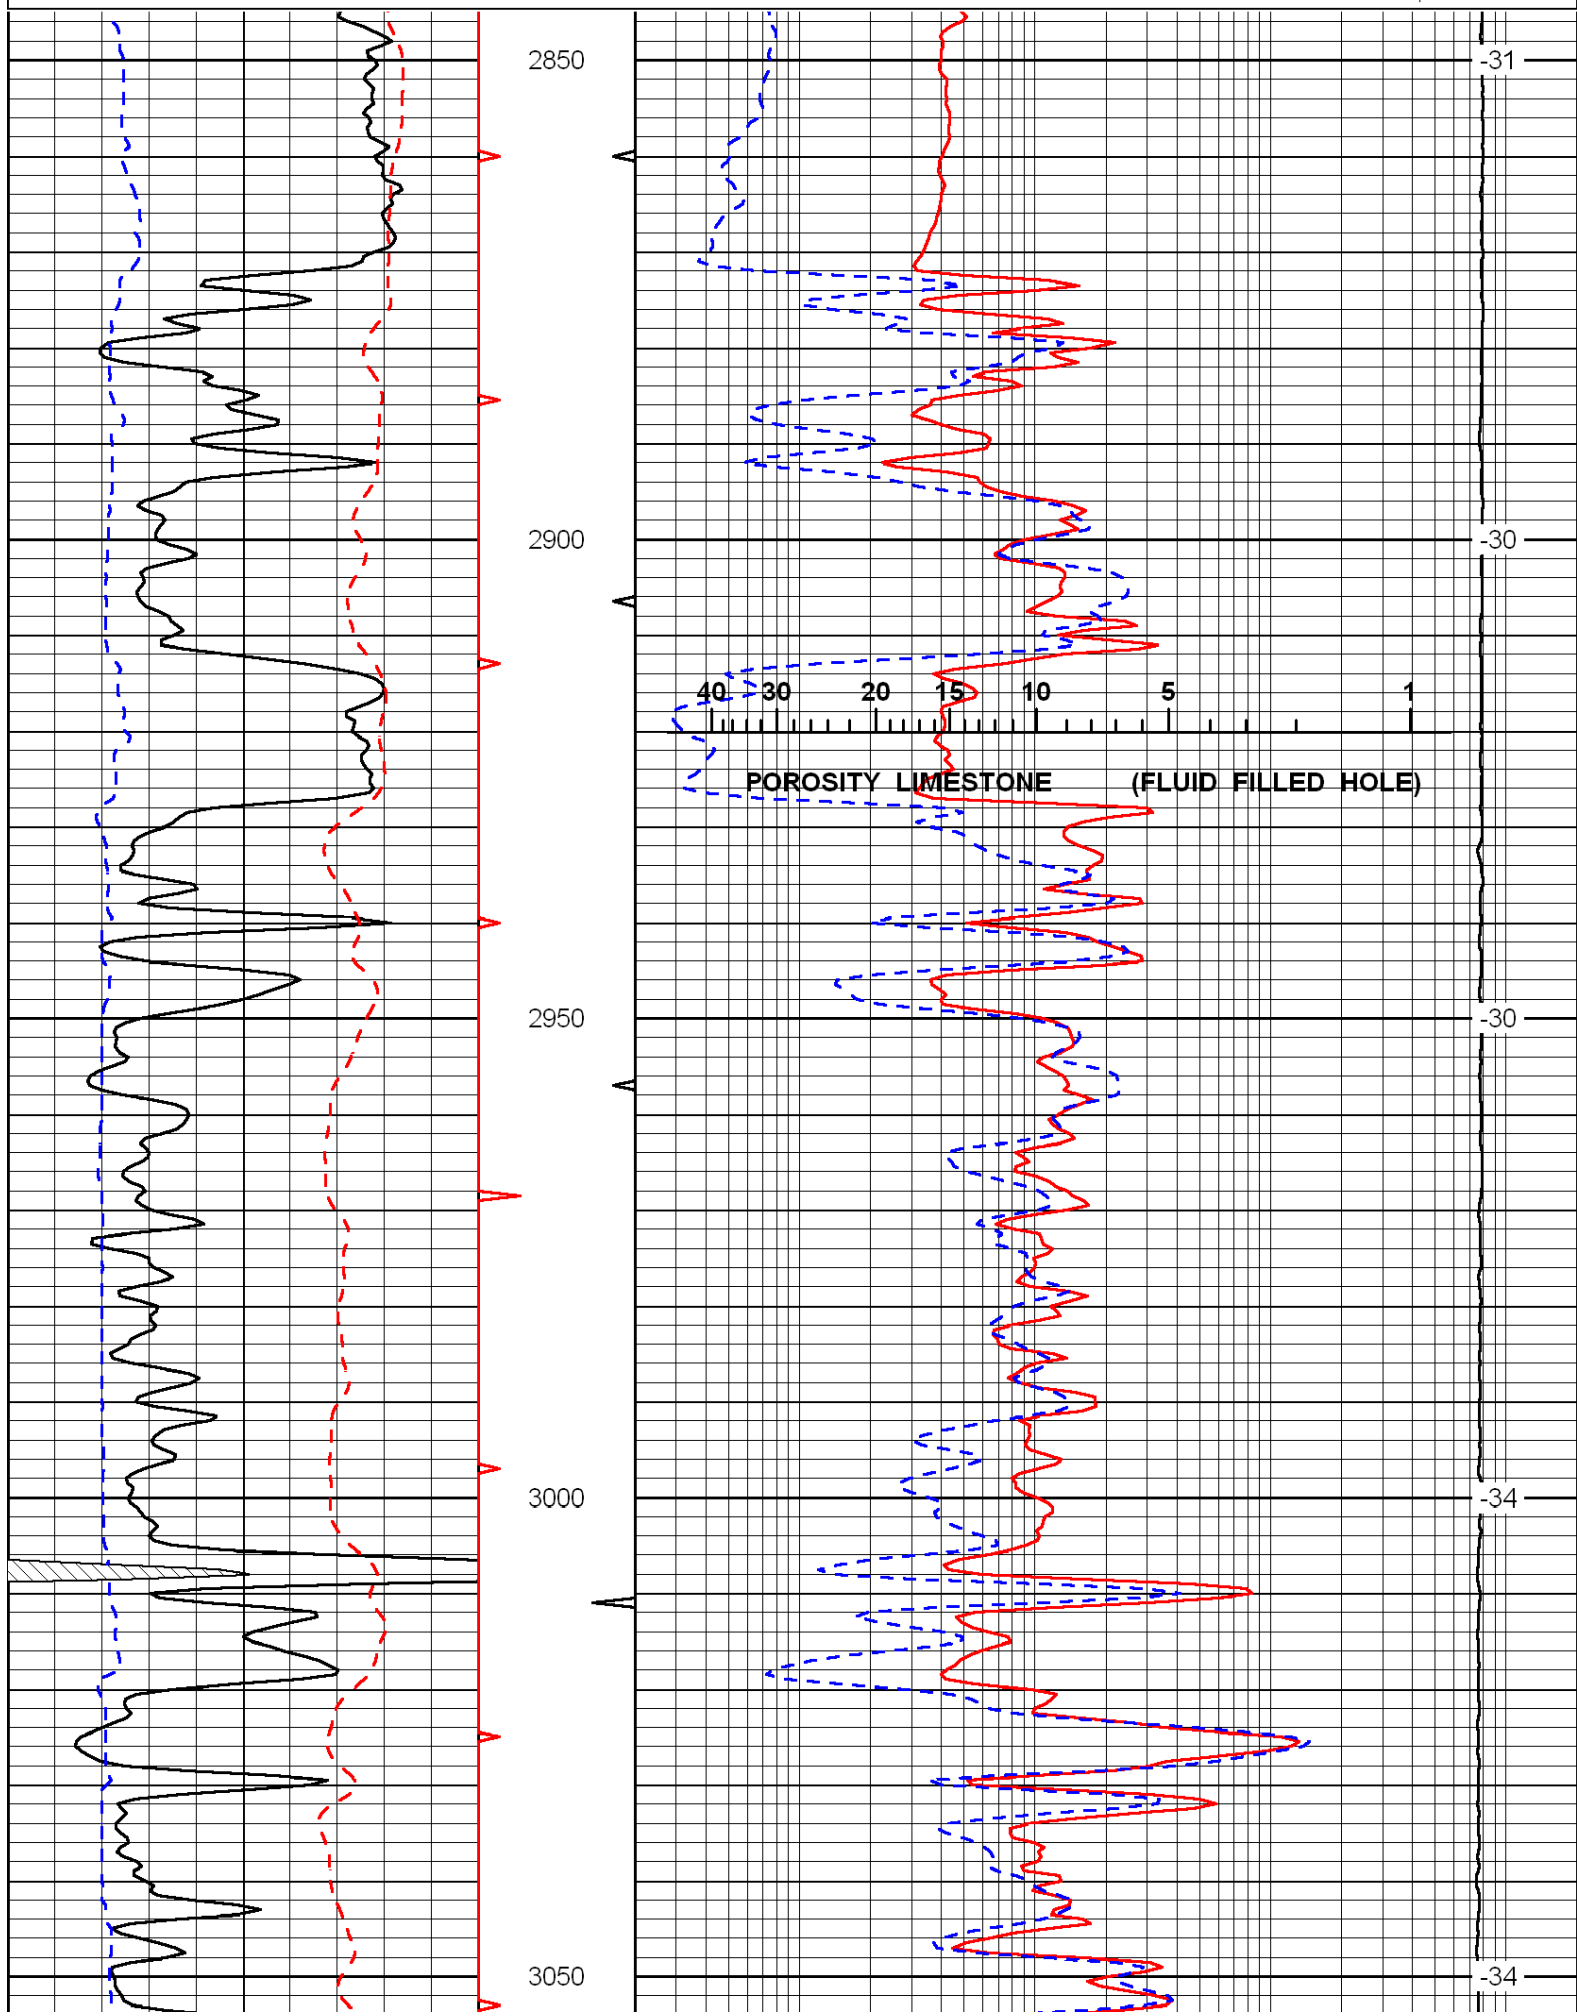

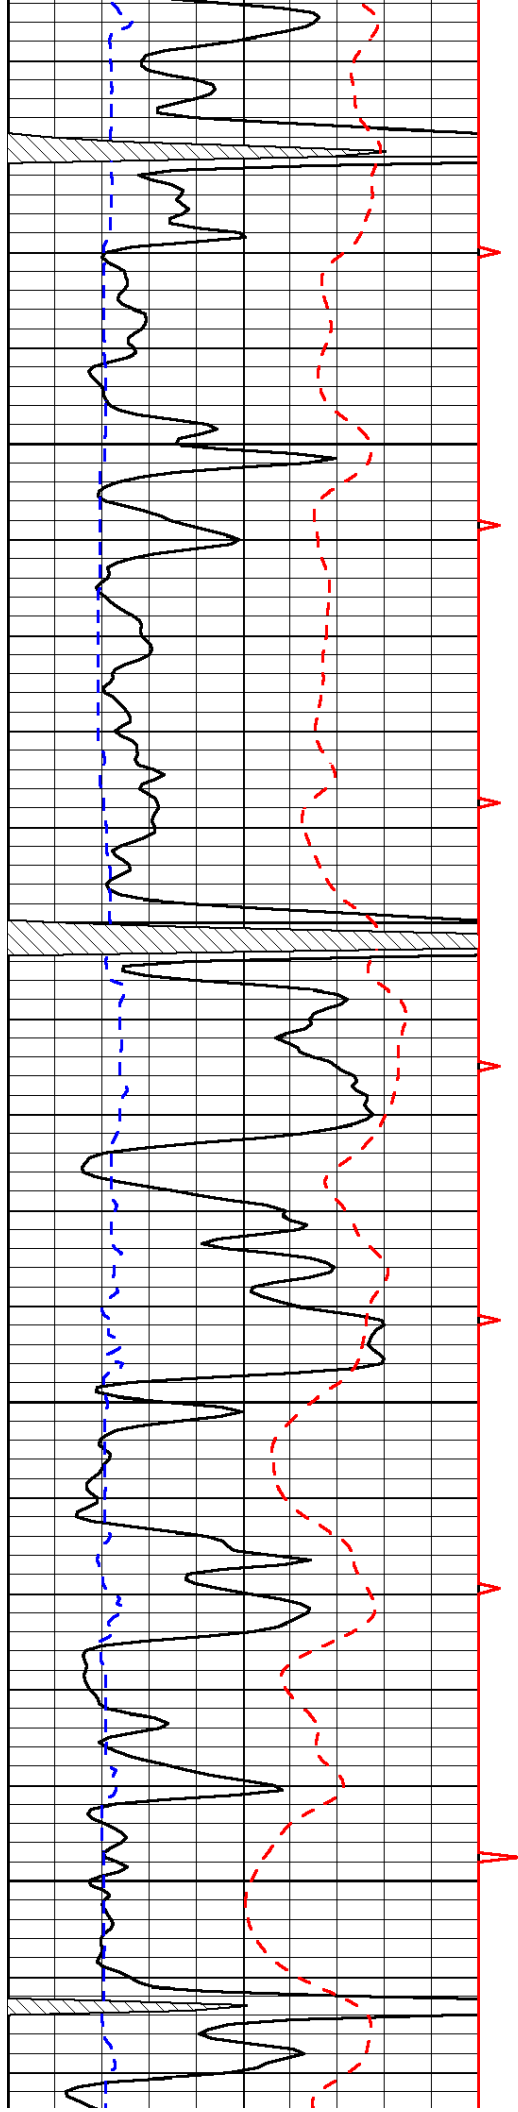


3100

3150

3200

3250

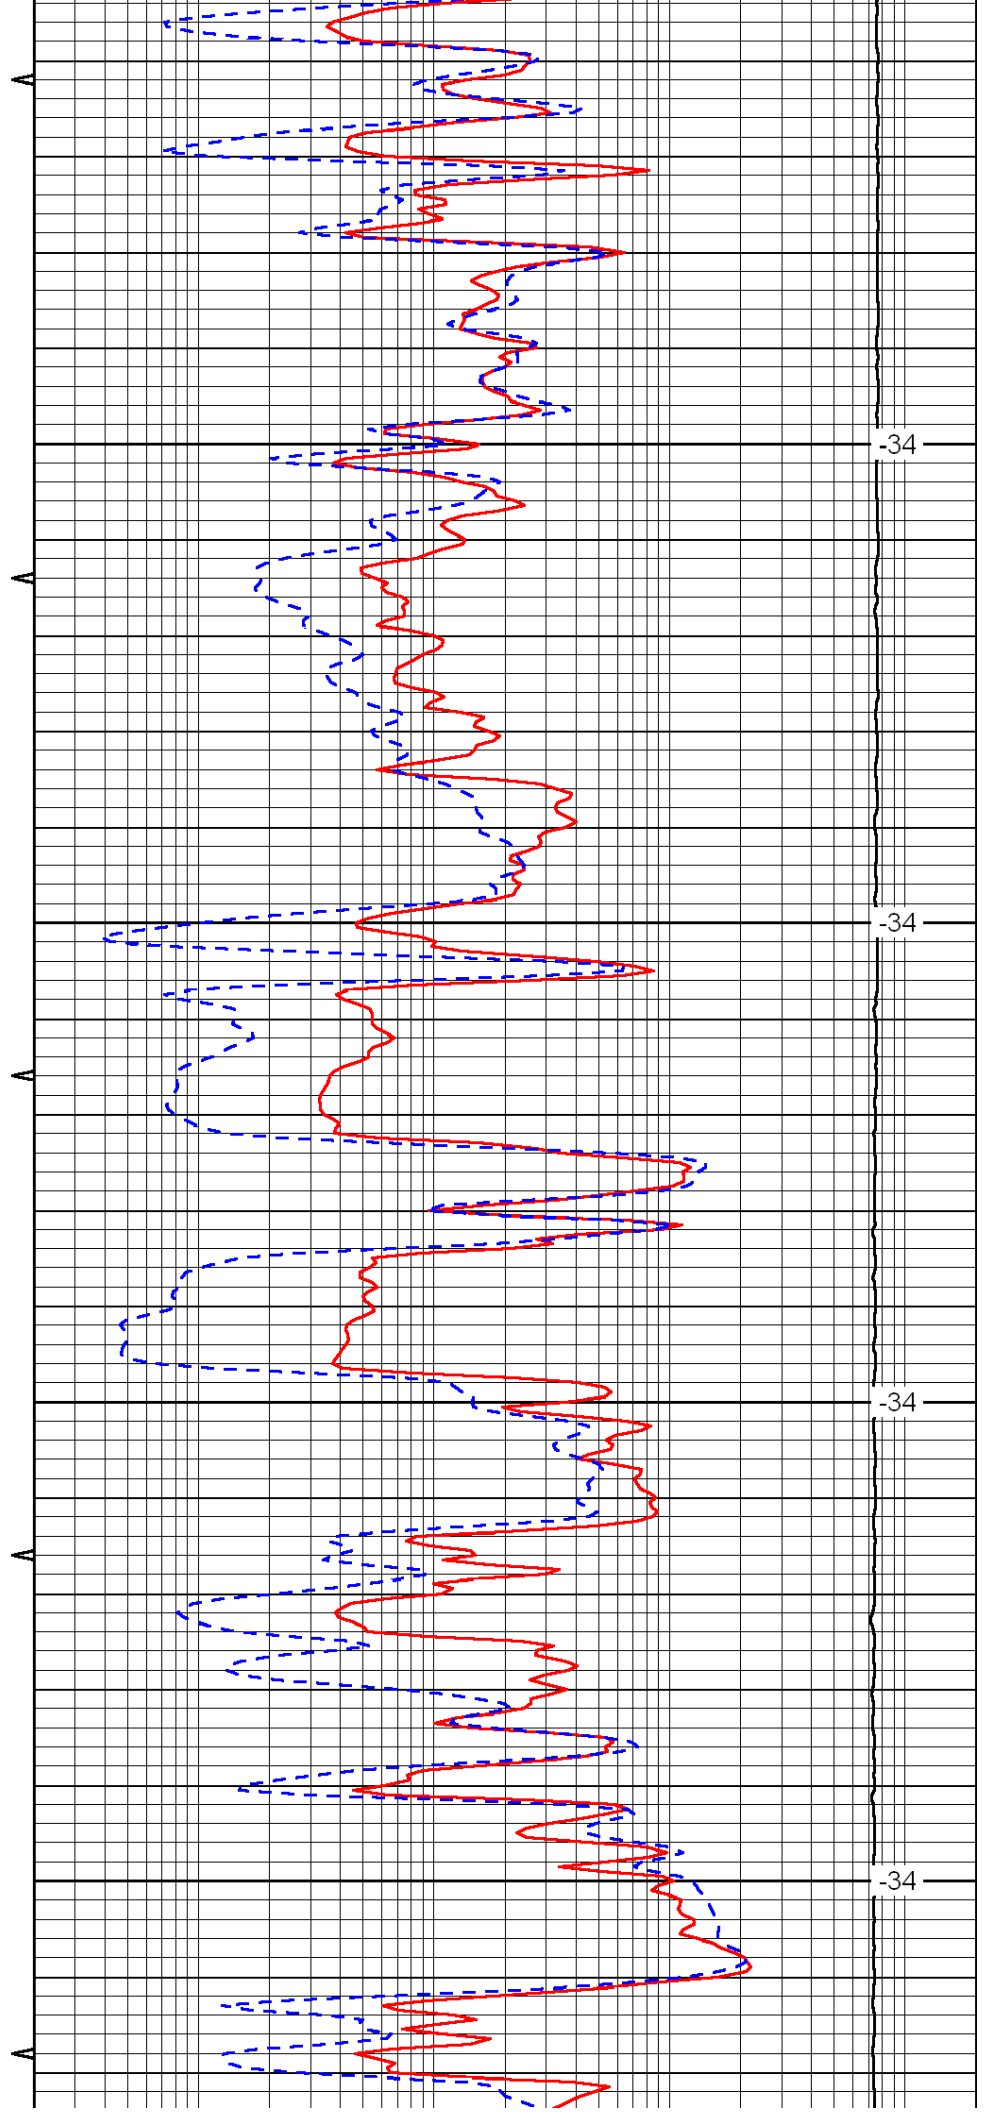



-34

-34

-34


-34

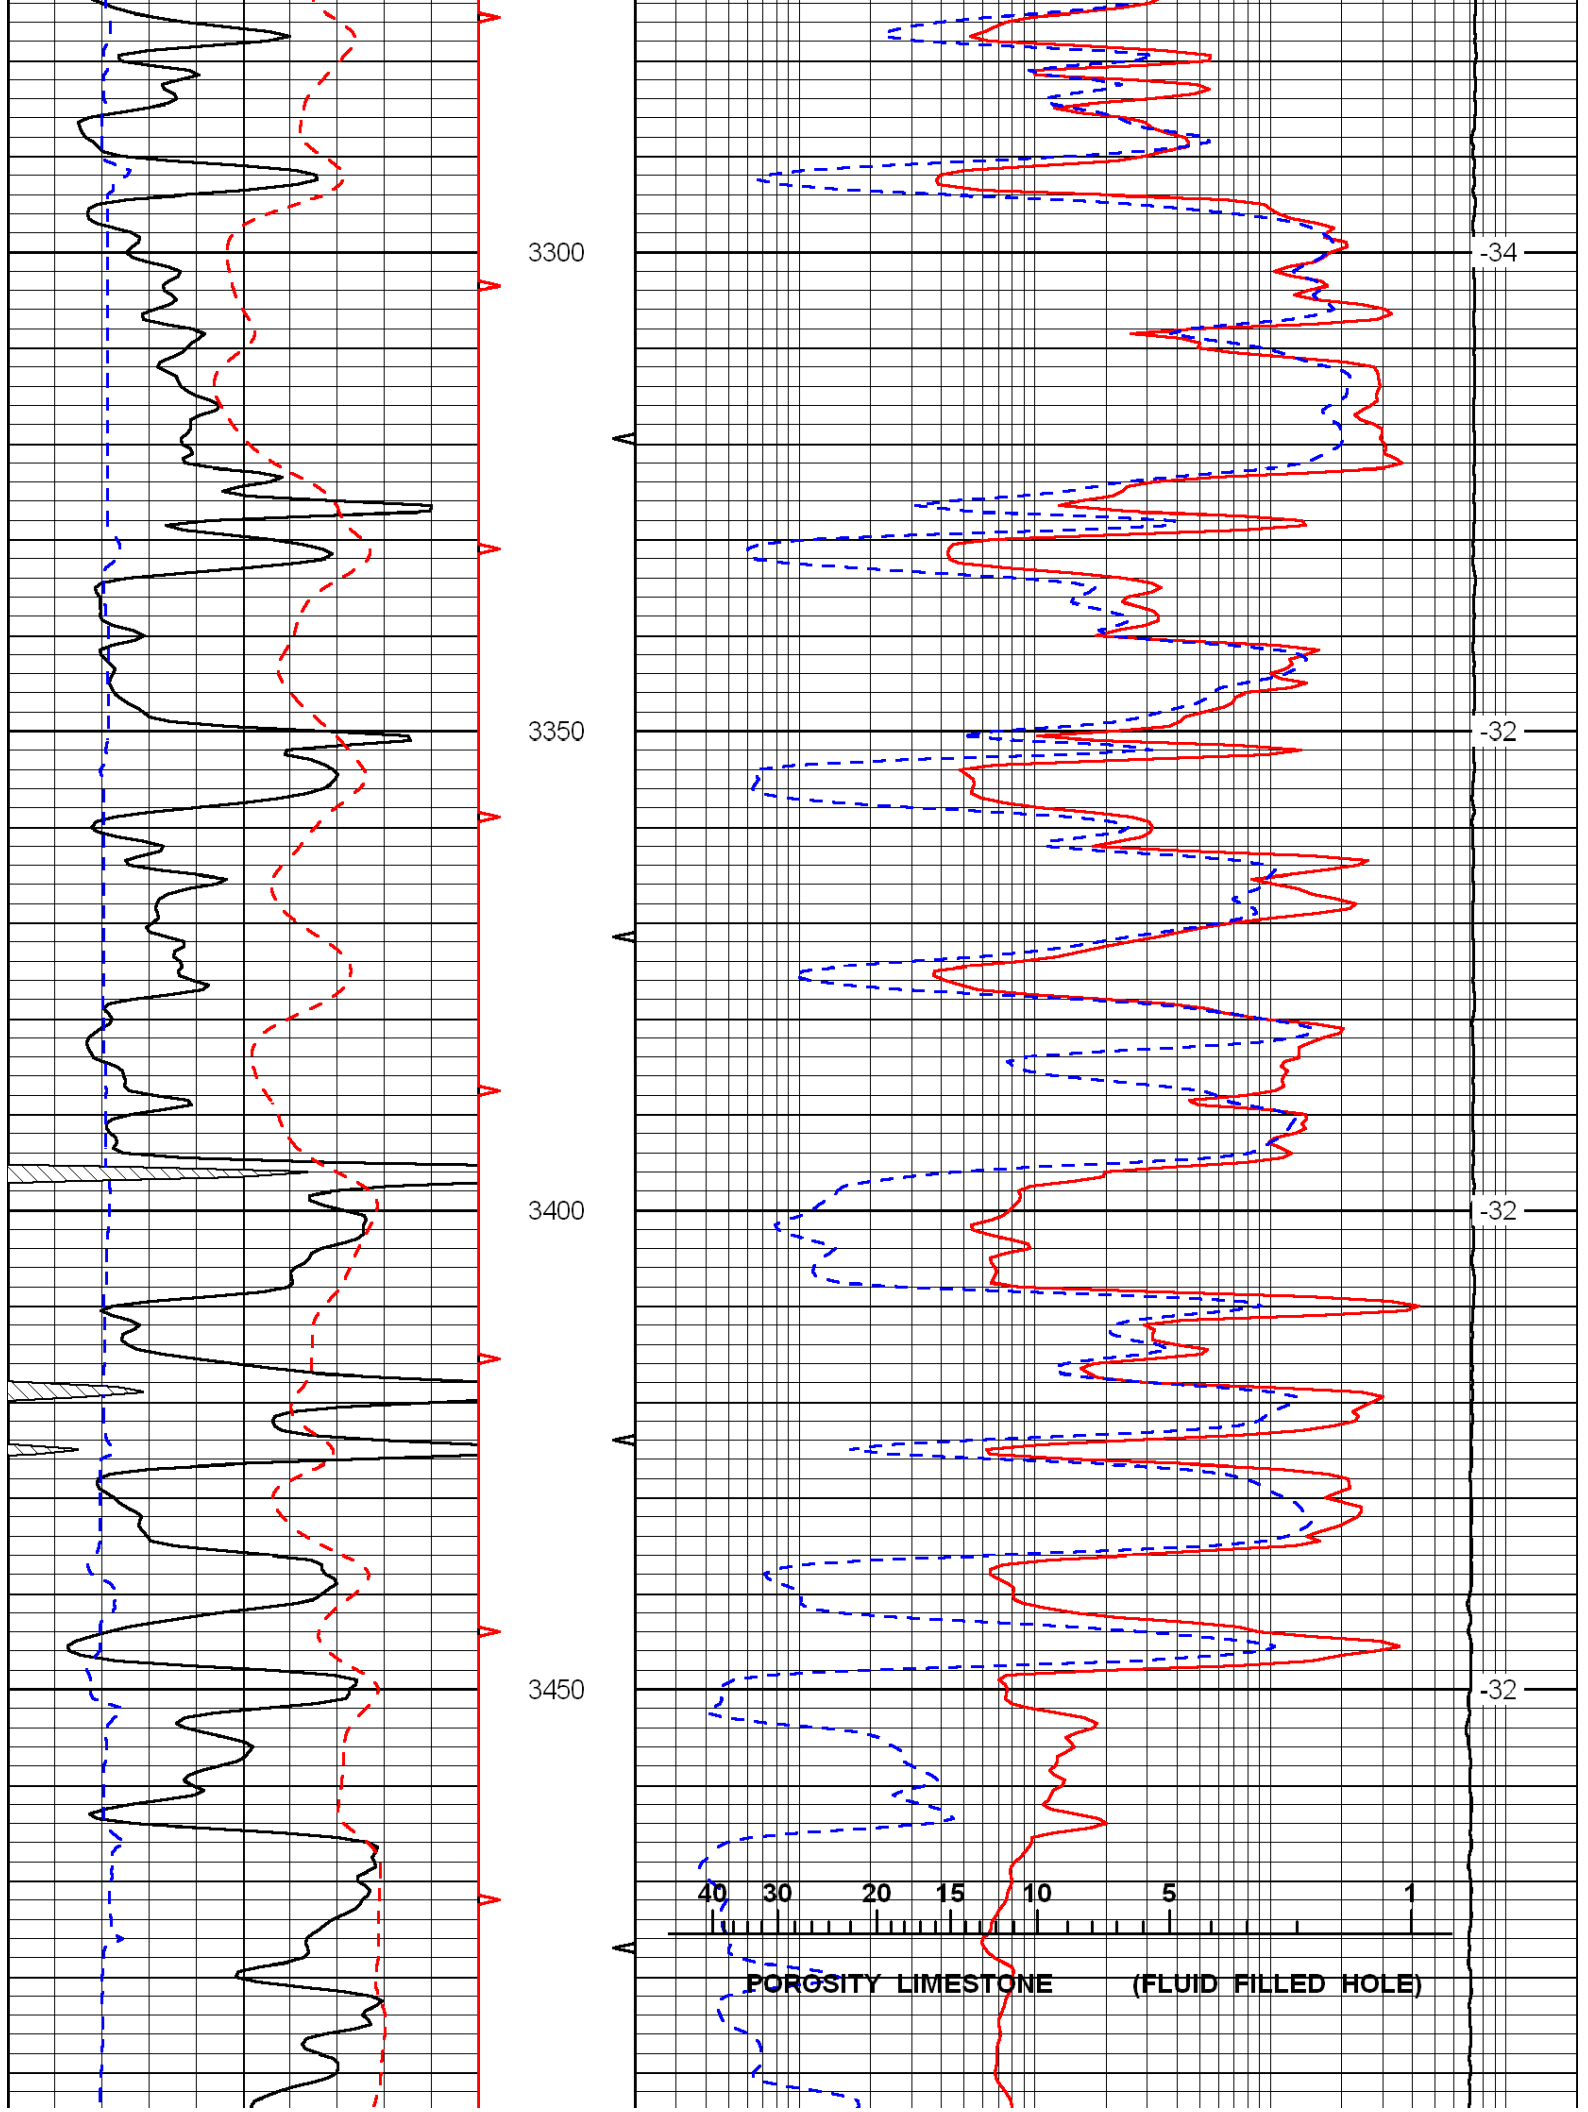

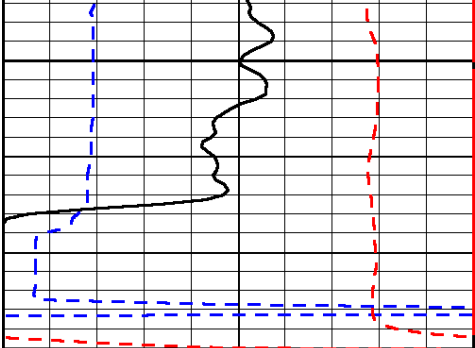

3500

0	Gamma Ray	150
6	Caliper (GAPI)	16
-200	SP (mV)	0

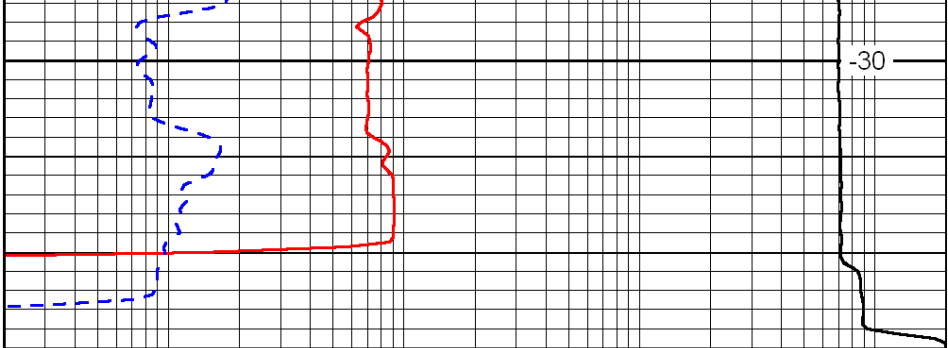

-30

0.2	Long Guard	2000
560	Neutron	2160
15000	Line Tension	0

LSPD