



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company H & B Petroleum Corp.		
15-055-22,086-00-00	Well Garden City 'A' No. 8		
	Field Damme		
	County Finney	State	Kansas
	Location	1615' FSL & 285' FWL	
	Sec: 17	Twp: 23 S	Rge: 33 W
	Permanent Datum Ground Level	Log Measured From Kelly Bushing	Elevation 2891
	Drilling Measured From Kelly Bushing	10 Ft. Above Perm. Datum	K.B. 2901 D.F. 2891 G.L. 2891
Date	10/21/2010		
Run Number	Two		
Depth Driller	4920		
Depth Logger	4920		
Bottom Logged Interval	4919		
Top Log Interval	3600		
Casing Driller	8.625 @ 437		
Casing Logger	436		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	2.400		
Density / Viscosity	9.3 49		
pH / Fluid Loss	9.0 9.6		
Source of Sample	Flowline		
Rm @ Meas. Temp	.75 @ 65		
Rmf @ Meas. Temp	.56 @ 65		
Rmc @ Meas. Temp	1.01 @ 65		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.38 @ 127		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	127		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Jim Musgrove		



<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Scott City, S to Tennis Rd, 5 W to Big Lowe, 1 1/4 S, E into

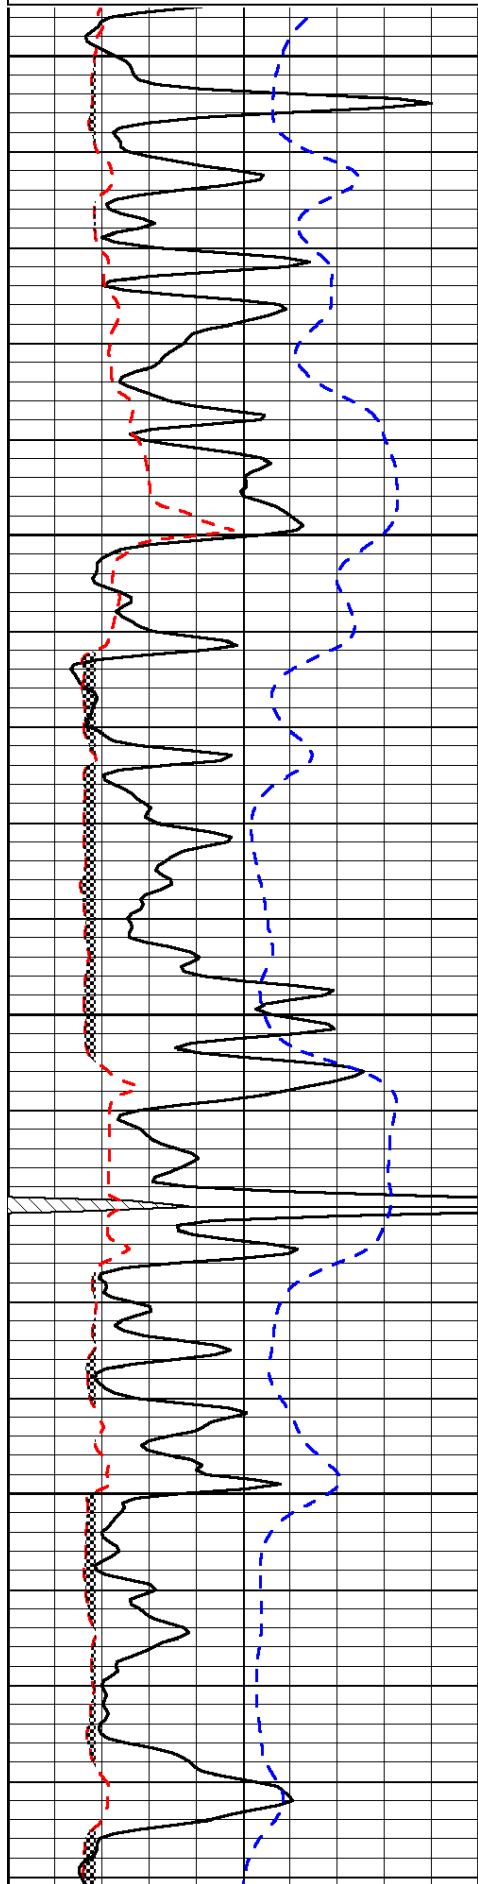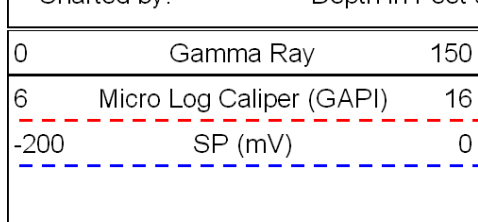

3600
3650
3700
3750

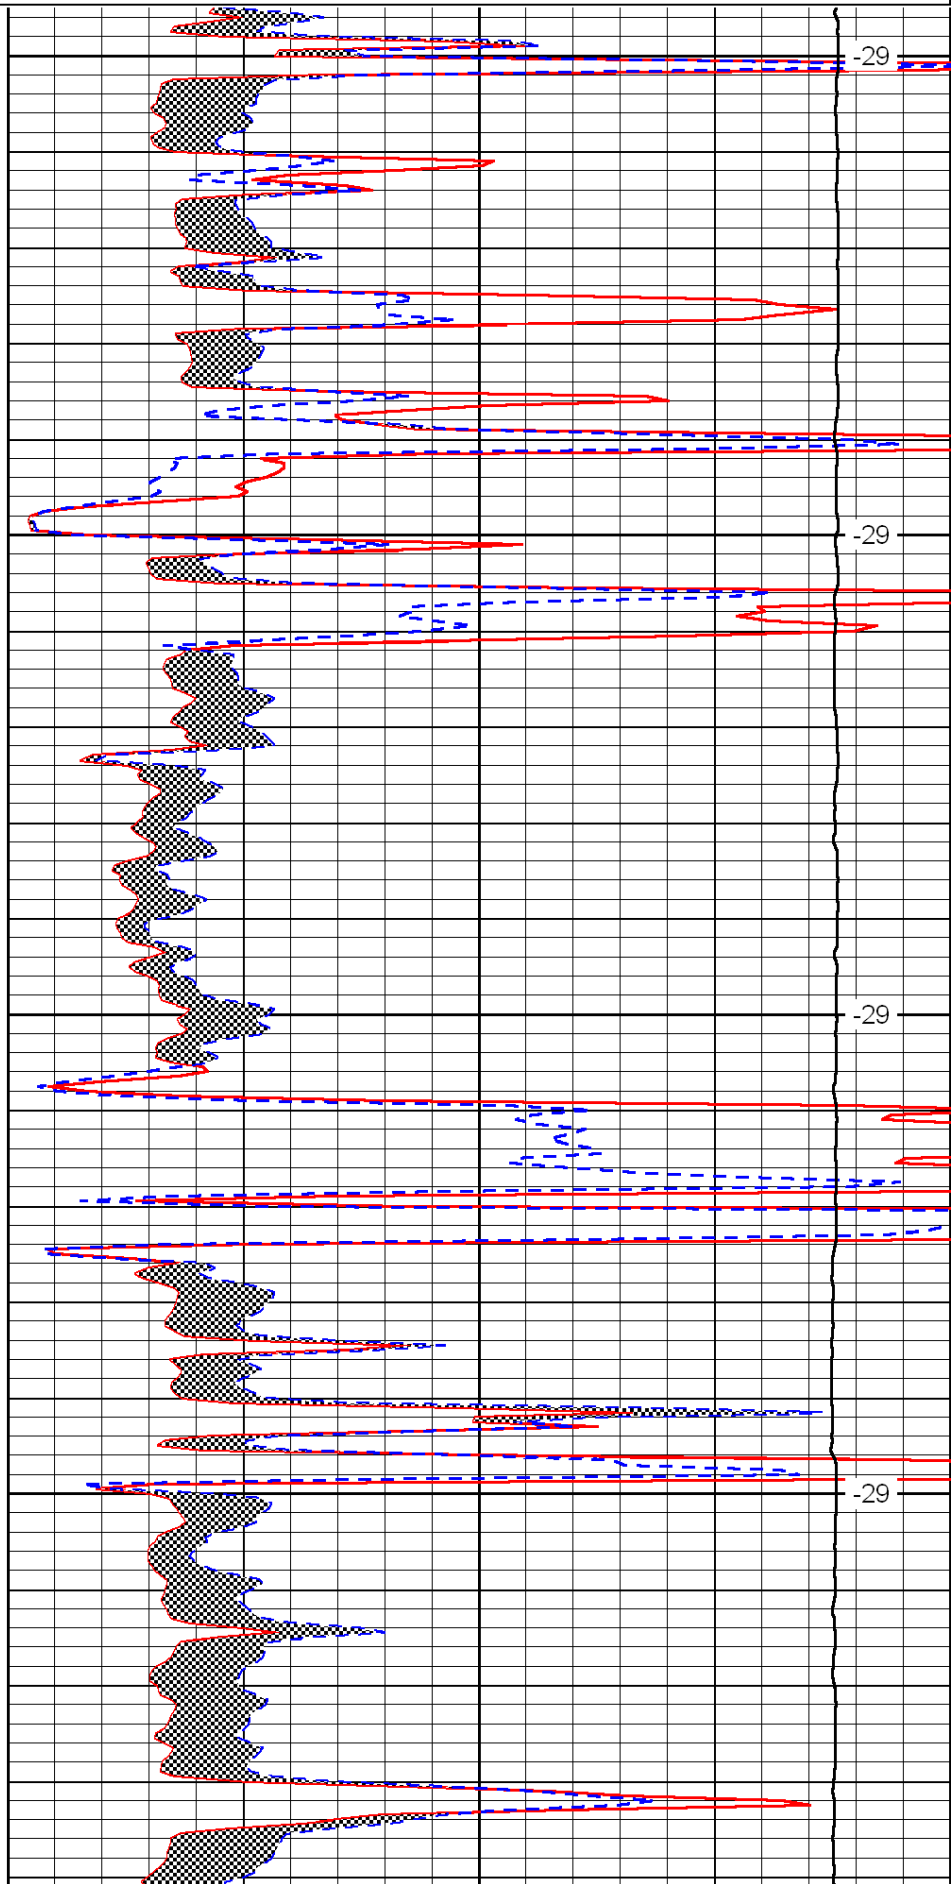

-29
-29
-29
-29

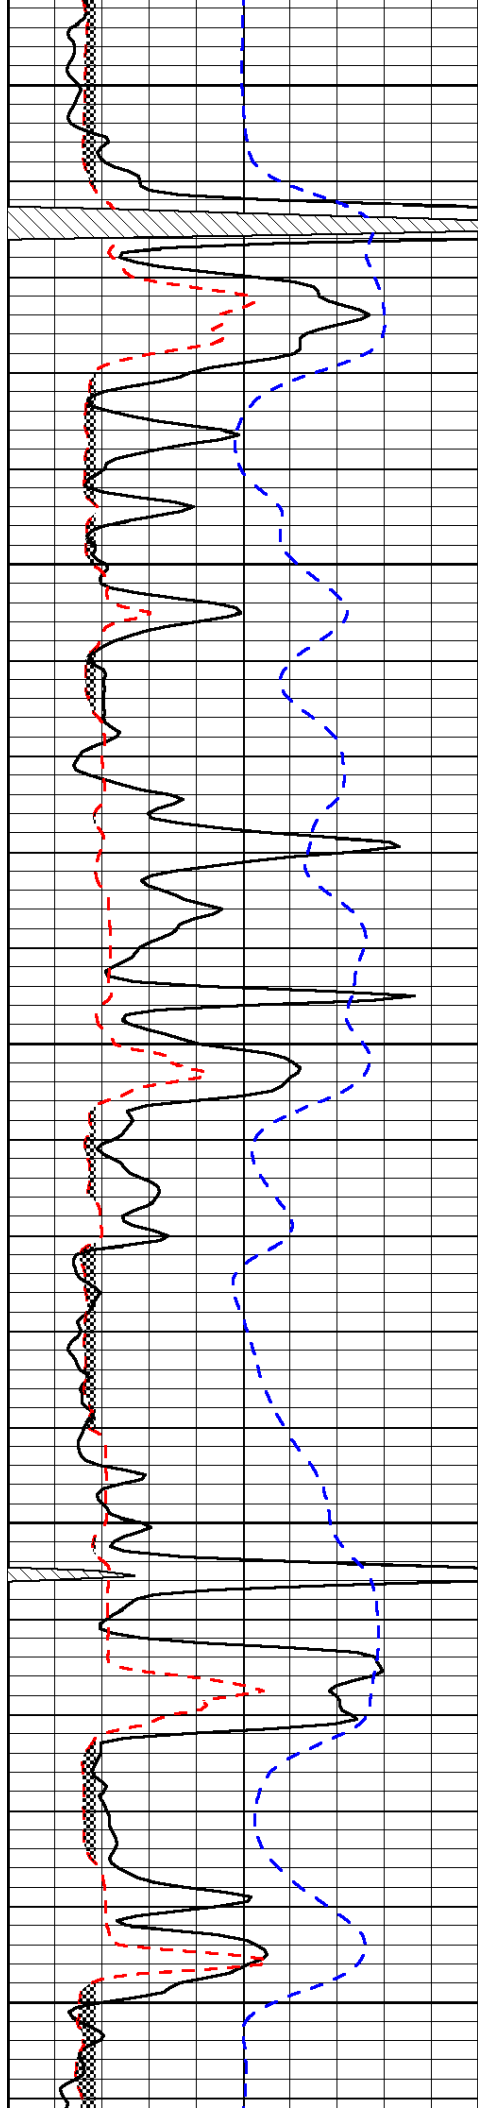


3800

3850

3900

3950

4000

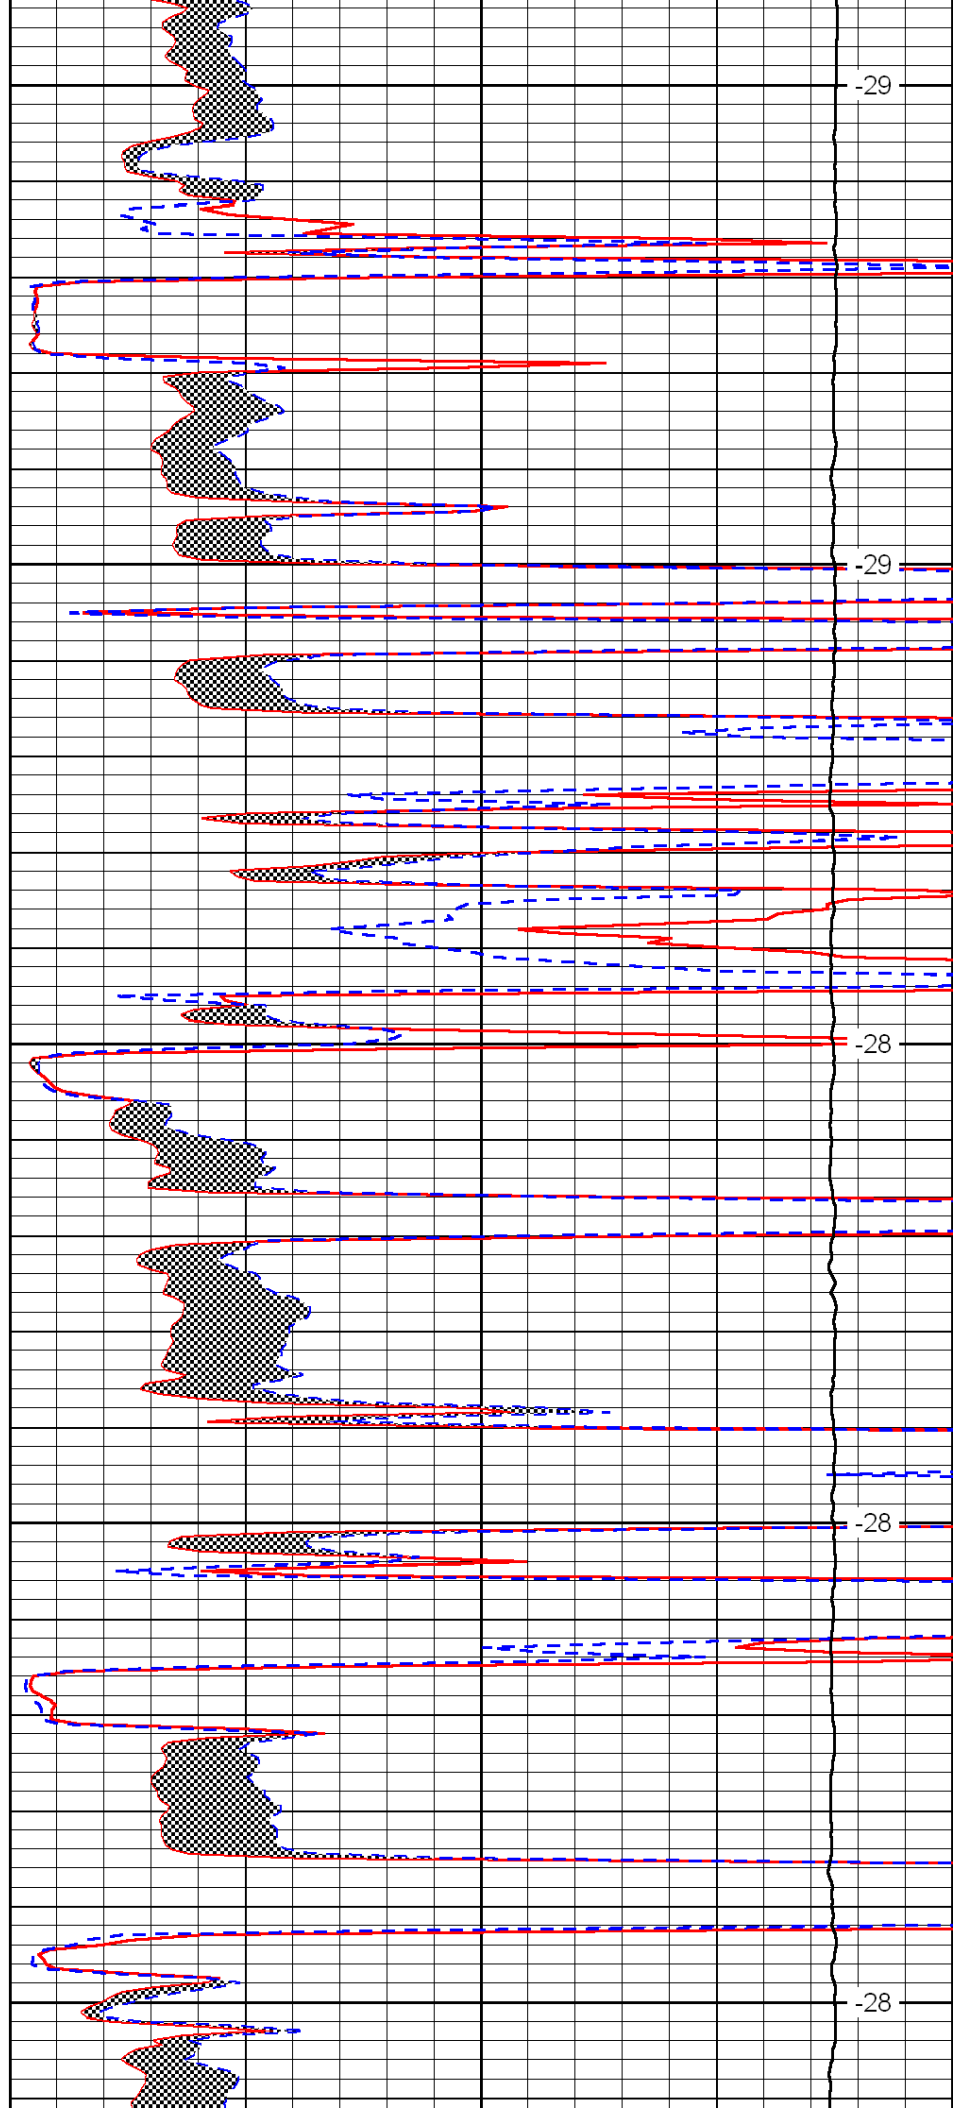


-29

-29

-28

-28

-28

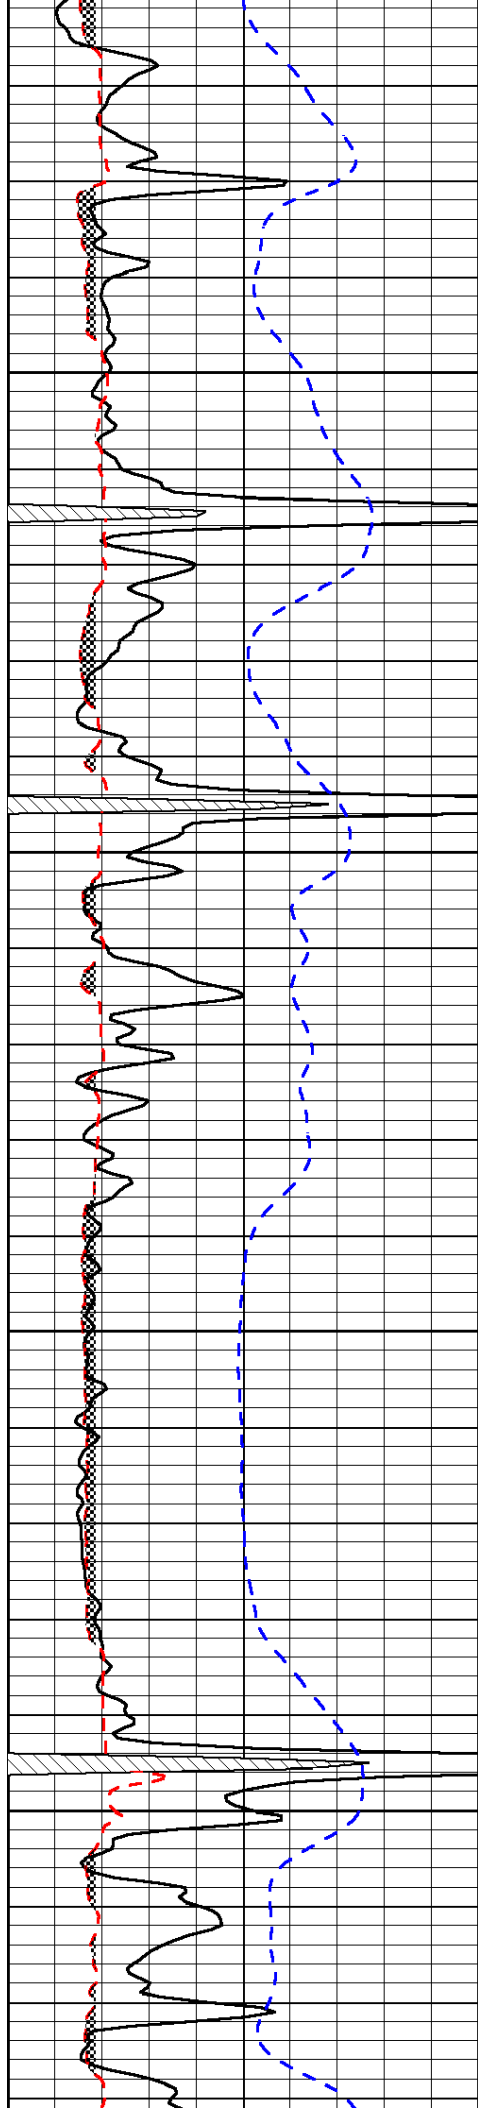


4050

4100

4150

4200

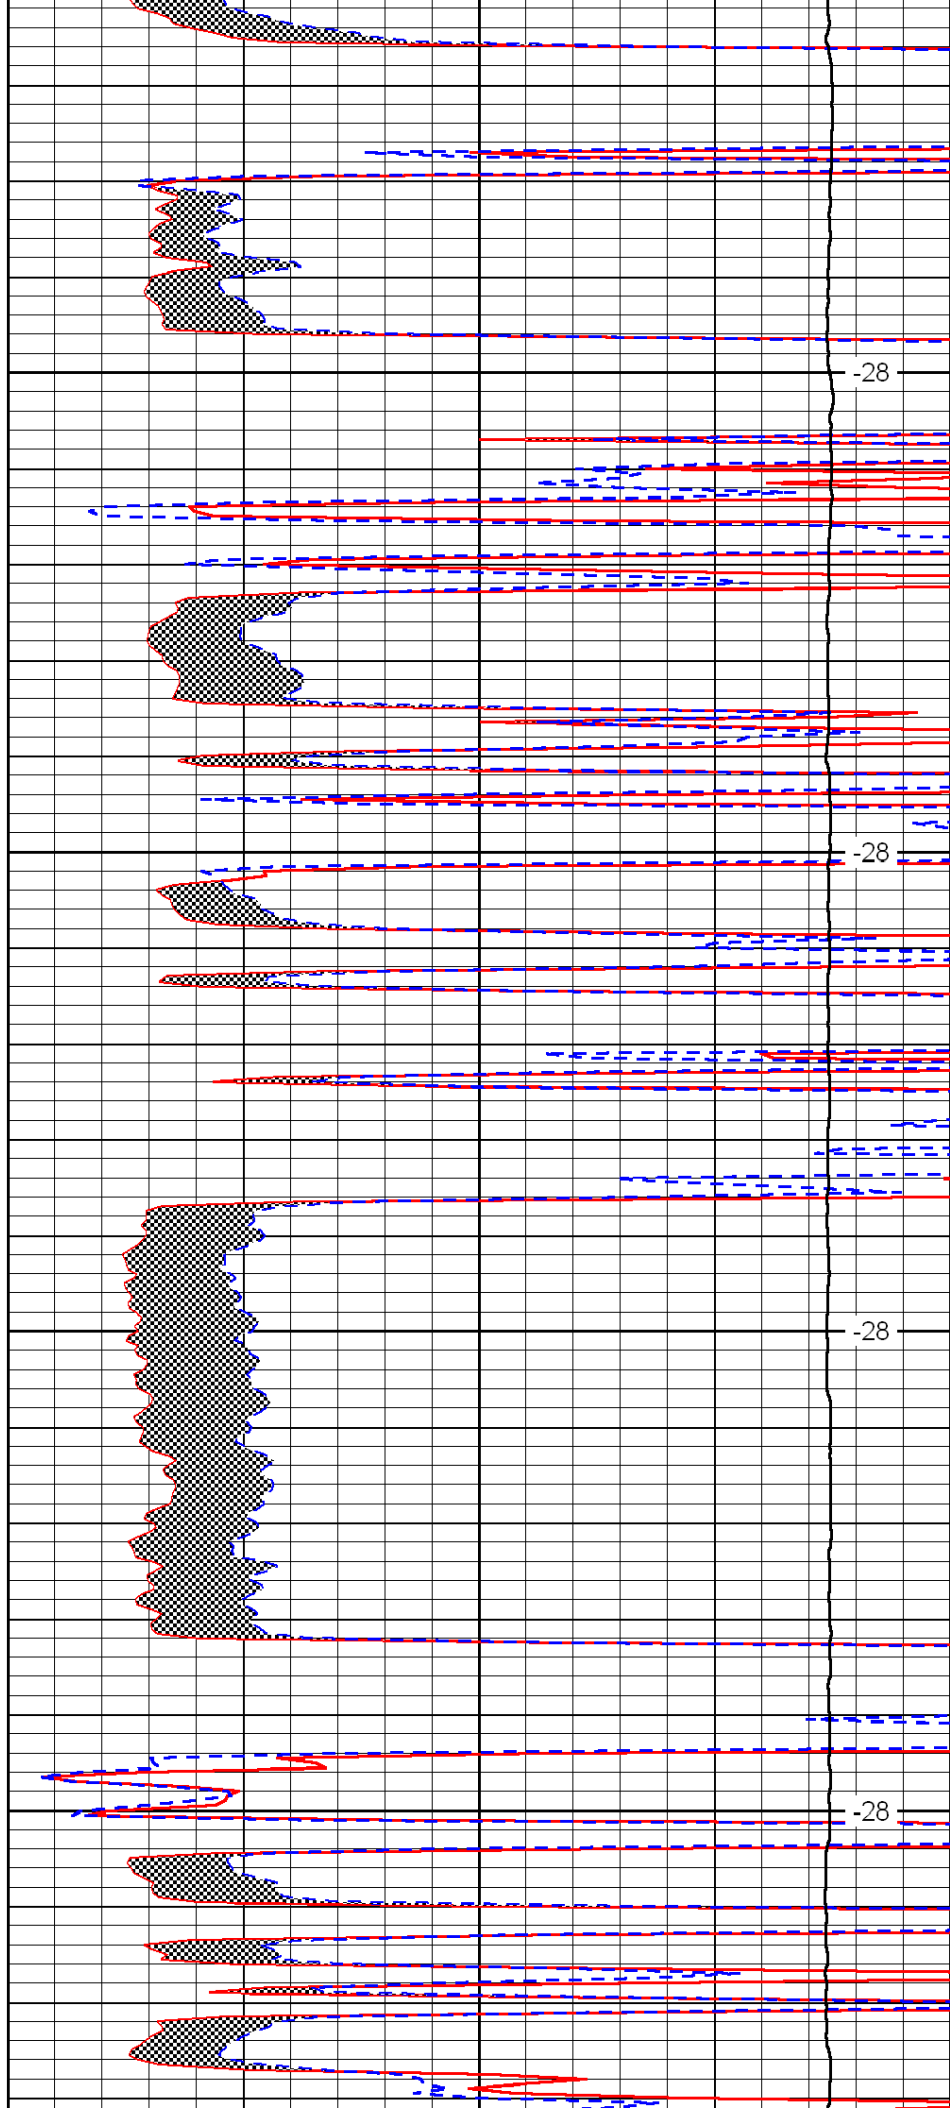


-28

-28

-28

-28

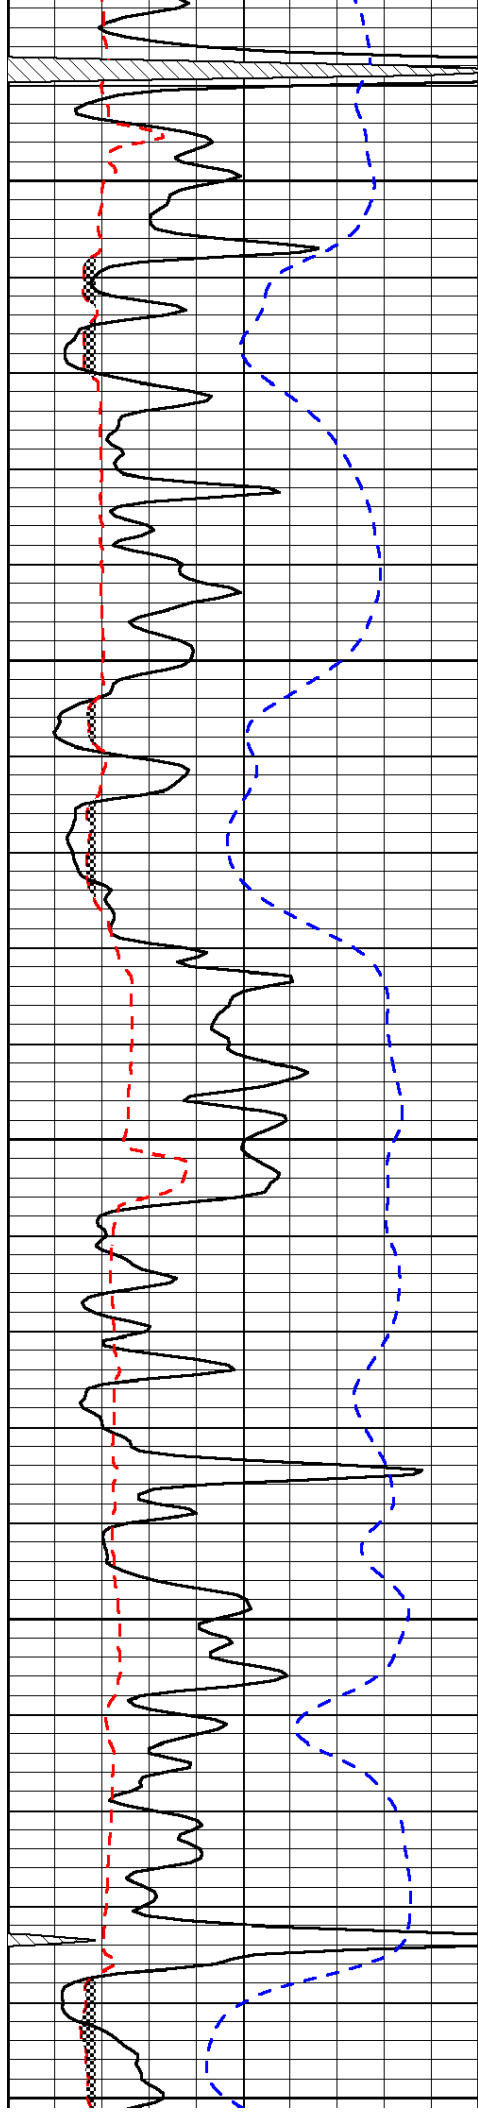


4250

4300

4350

4400

4450

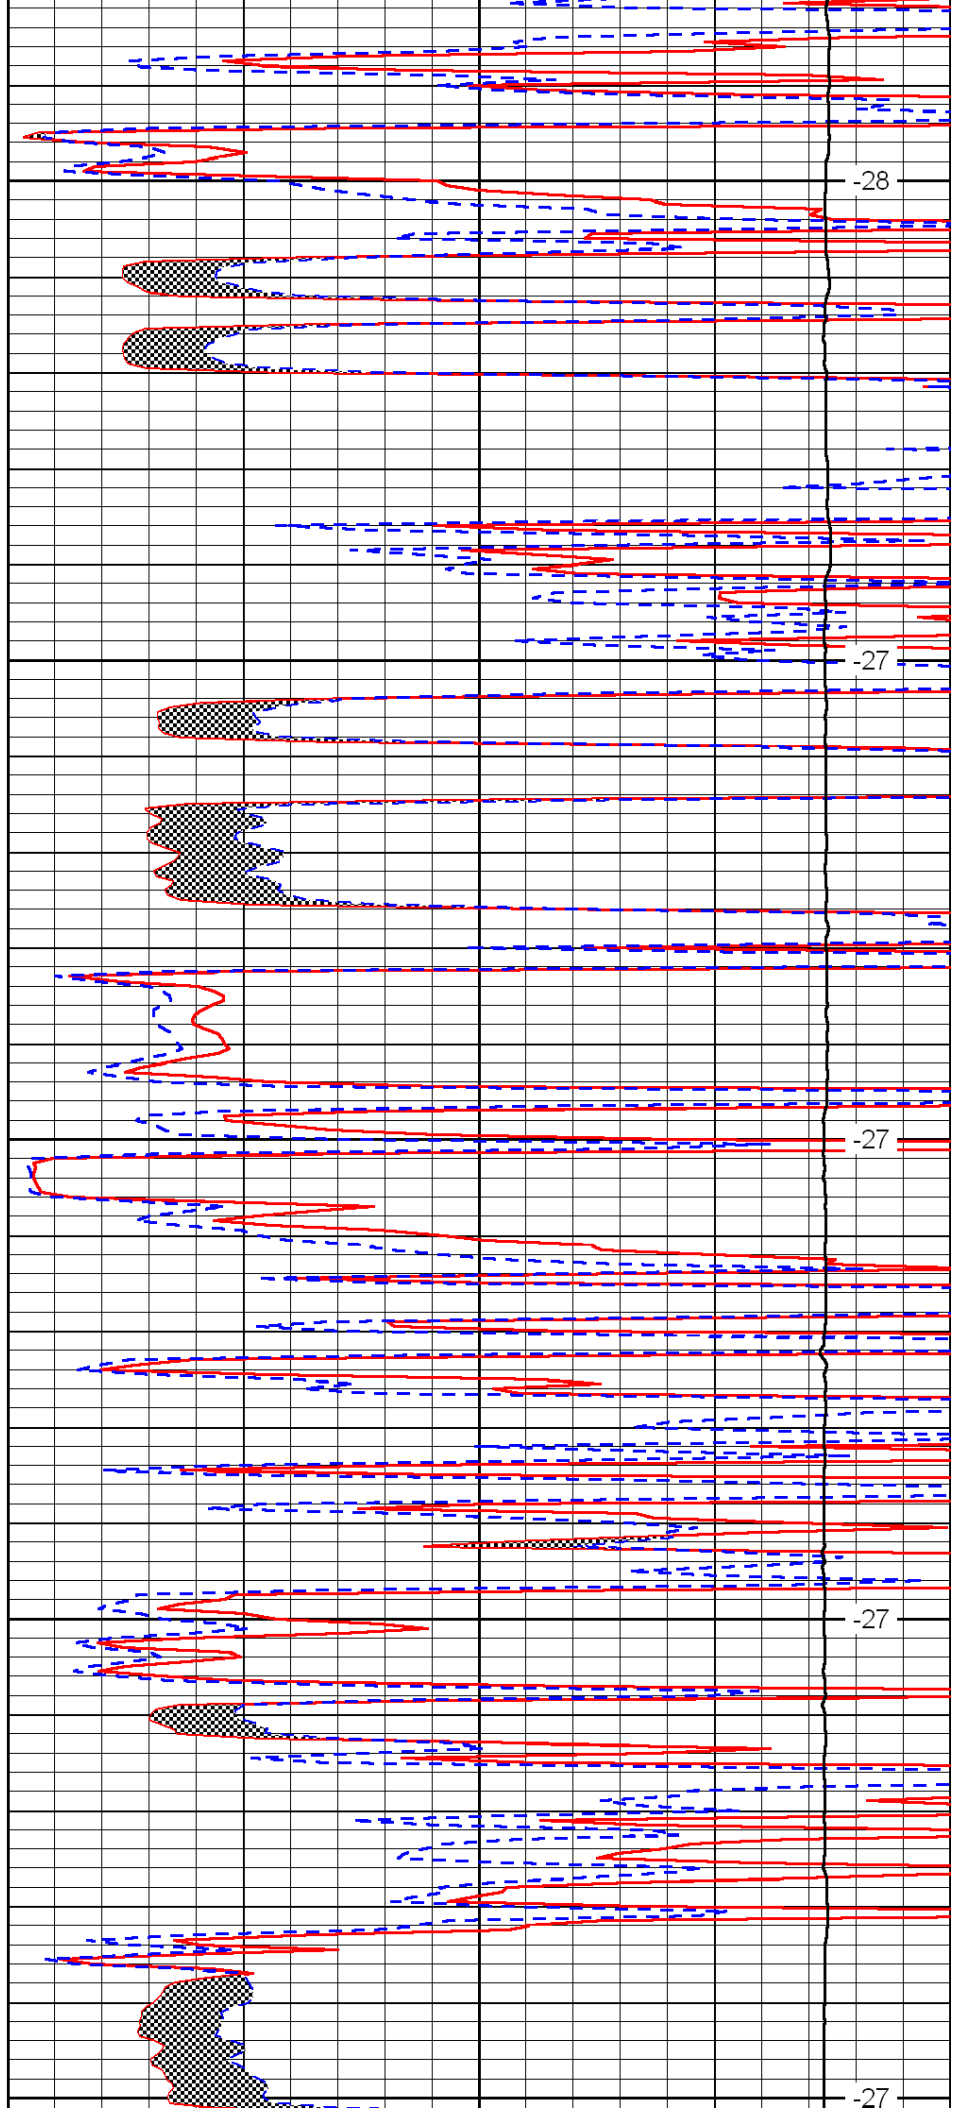


-28

-27

-27

-27

-27

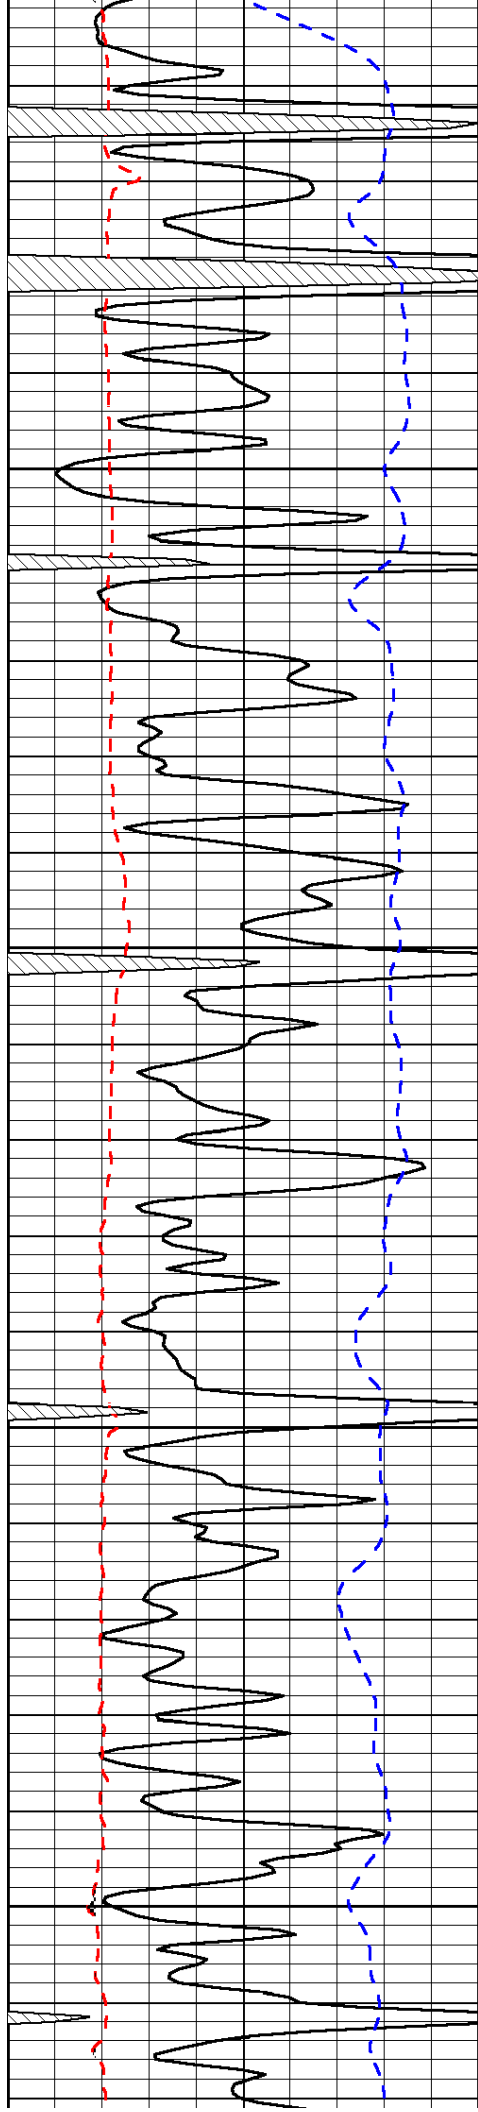


4500

4550

4600

4650


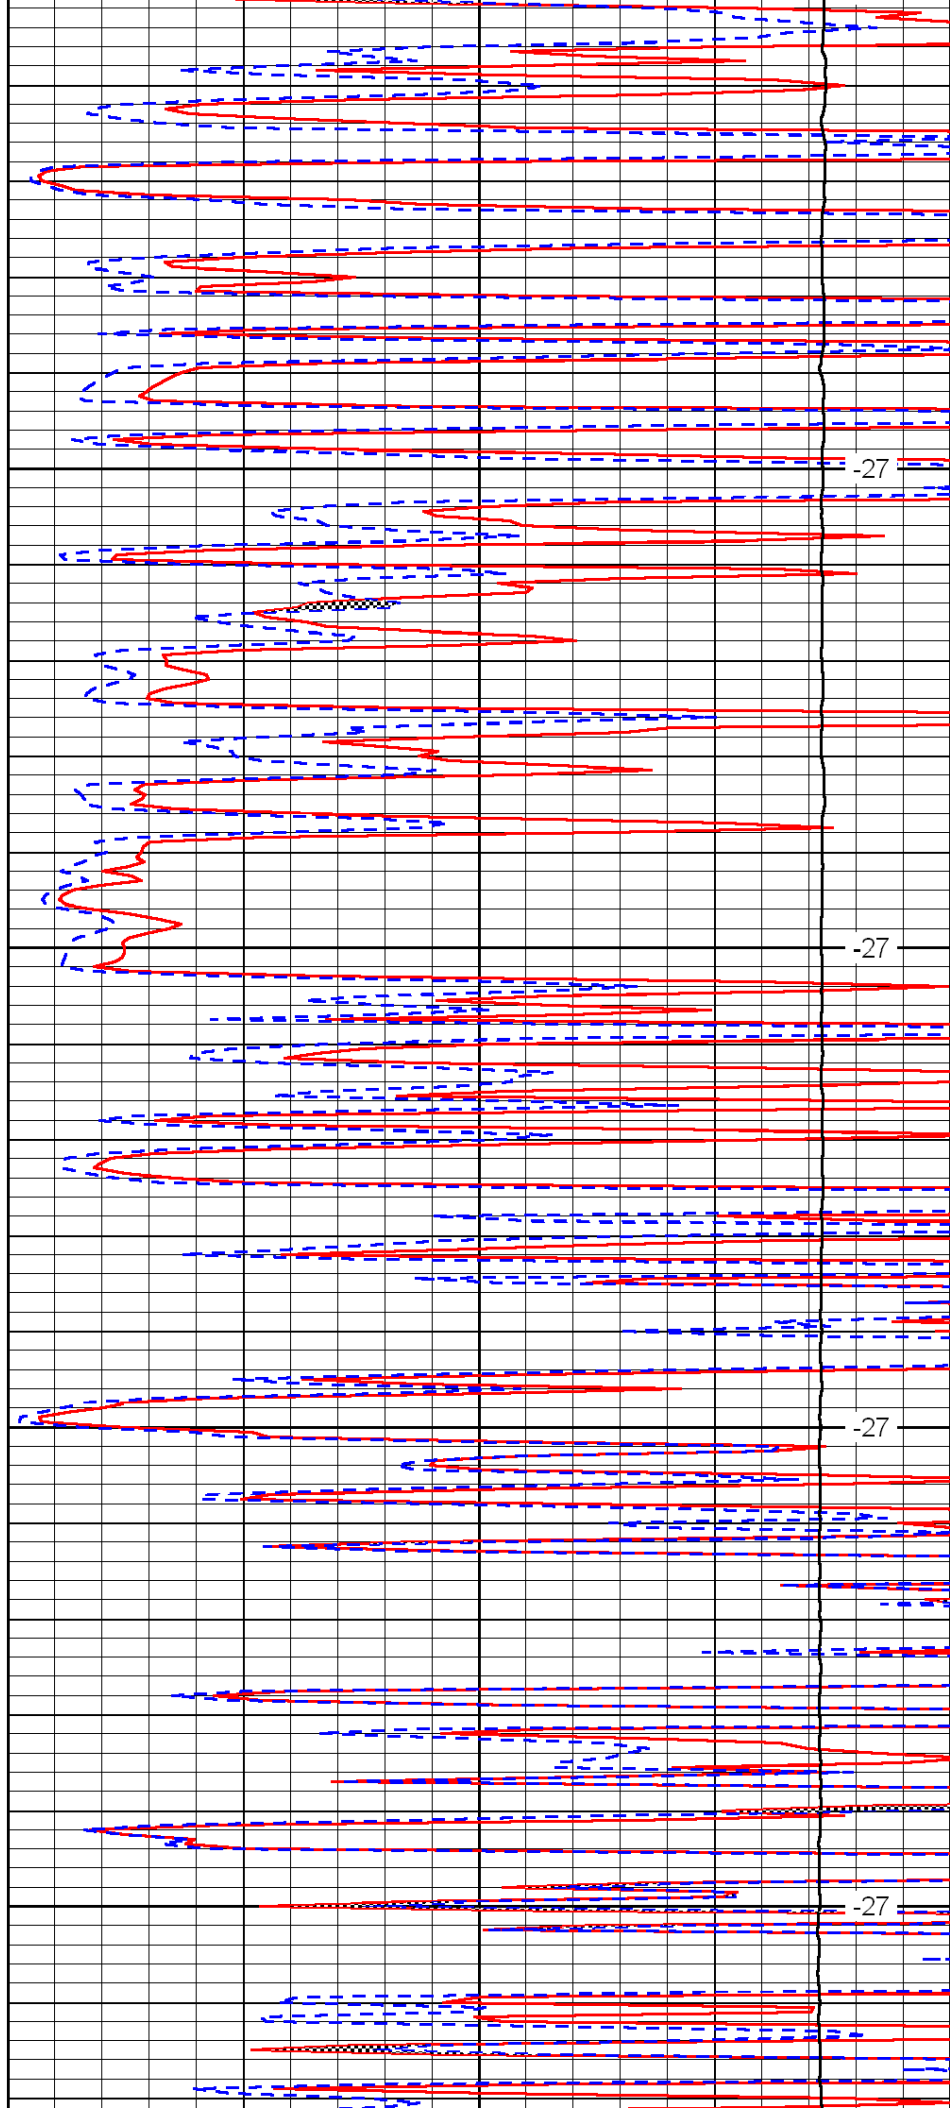



-27

-27


-27

-27

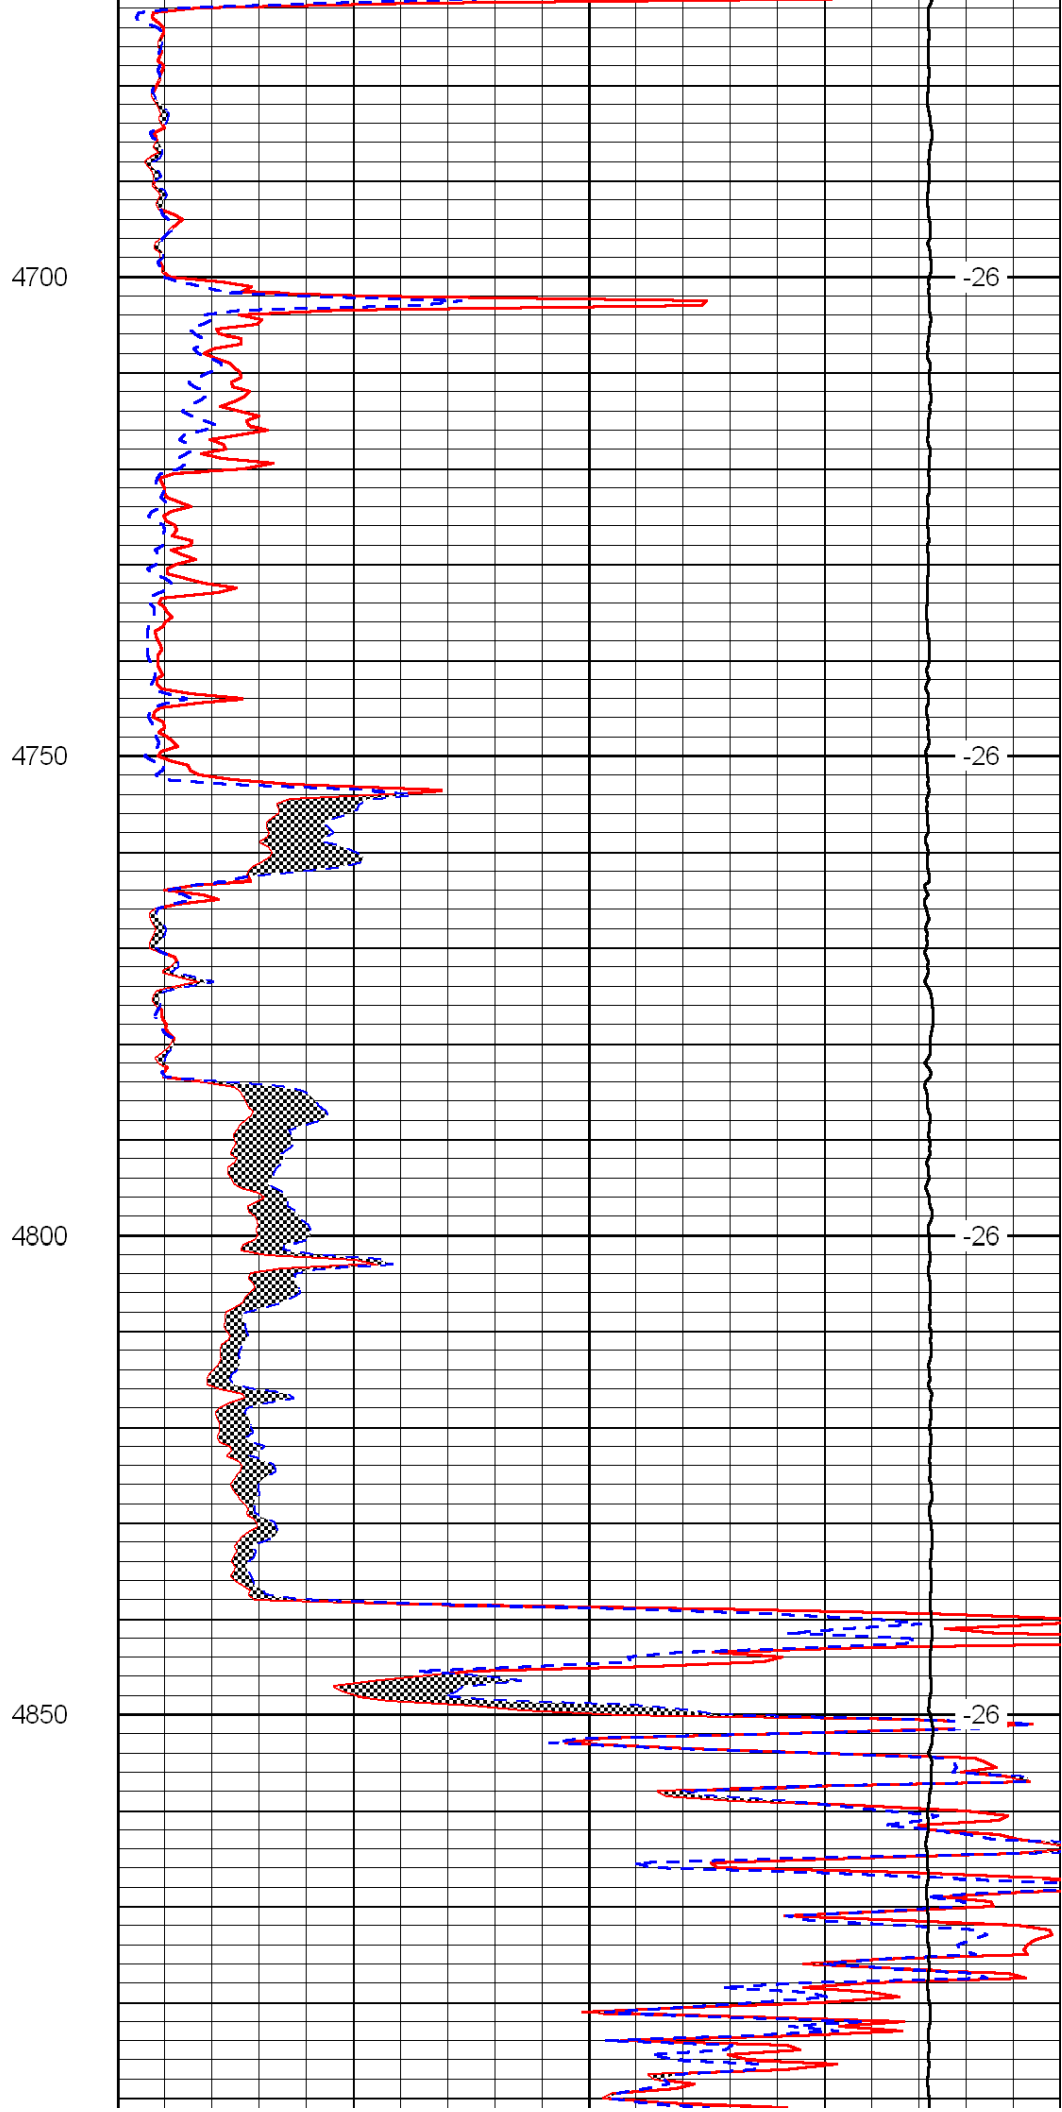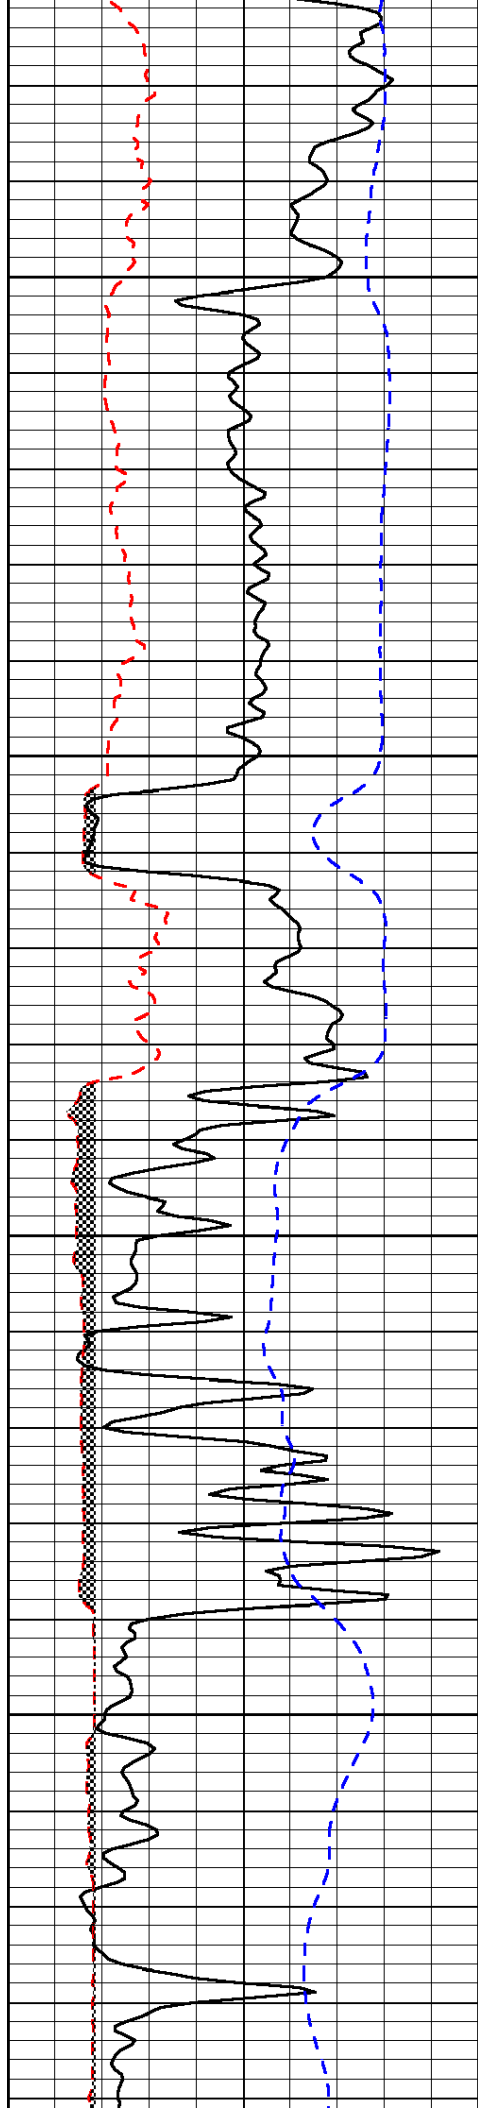

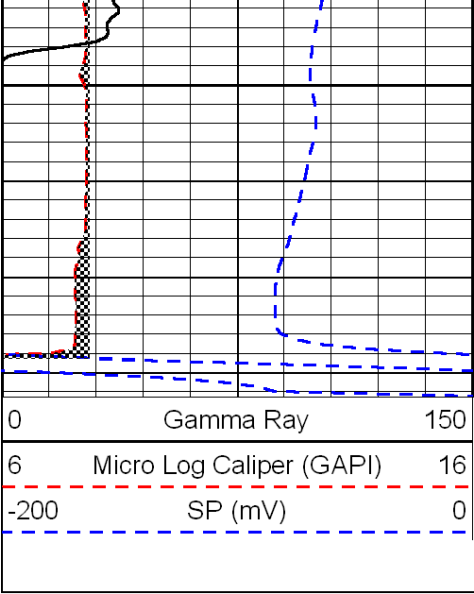

4900

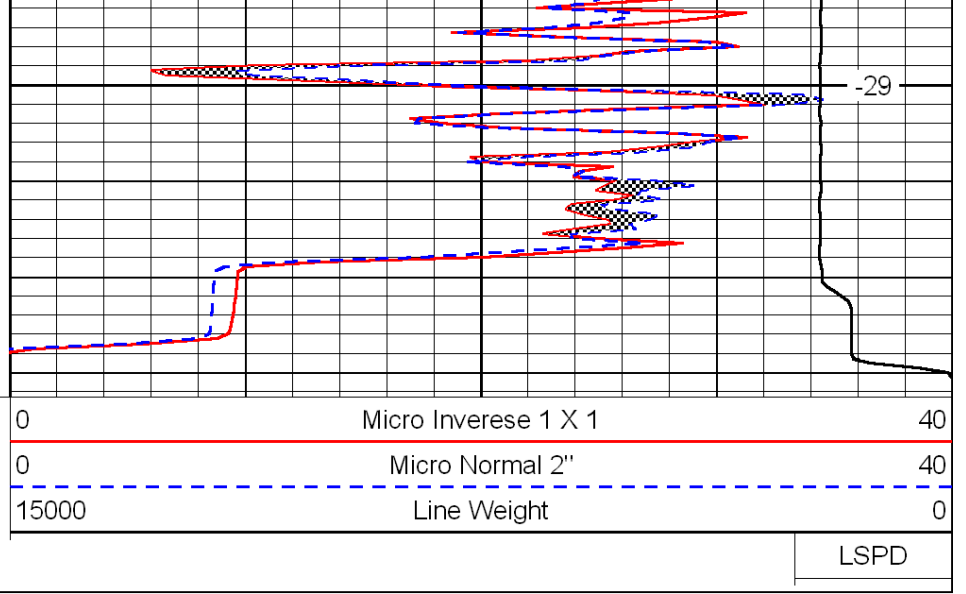

LSPD