


15-163-21063-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Take Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rooks _____ County. Sec. 12 Twp. 6S Rge. 20 XXW
Location as "NE/CNW/SW" or footage from lines _____
C NE SW
Lease Owner Geodessa Corporation
Lease Name Hansen Foundation "A" Well No. #2
Office Address Suite 600 - One Main Place Wichita, KS 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

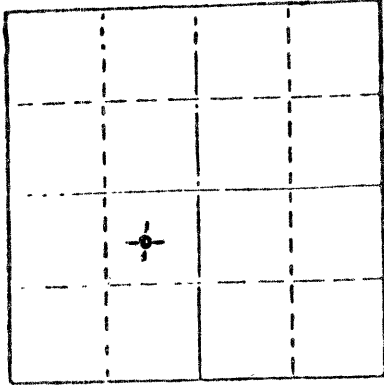

Locate well correctly on above
Section Plat

Date Well completed July 19, 1980 19
Application for plugging filed July 19, 1980 19
Application for plugging approved July 19, 1980 19
Plugging commenced July 19, 1980 19
Plugging completed July 19, 1980 19
Reason for abandonment of well or producing formation _____

No Commercial Production!
If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Marion Schmidt
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
surface casing	common	0	240.50'	8 5/8"	240.50'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plug #1 860' with 70sx
Plug #2 240' with 25 sx
Plug #3 40' with 10 sx solid bridge 1 sx Hulls
5 sx in rathole
50-50 poz 6% gel
Plugdown @ 6:45 p.m.

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1980

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pioneer Drilling, Inc.
308 West Mill Street Plainville, Kansas 67663

STATE OF _____ COUNTY OF _____, ss.

X _____ (employee of owner) or (owner or operator
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) E. C. Schmidt
1125-17th St., Suite 2220
(Address)

SUBSCRIBED AND SWORN TO before me this 19 day of AUGUST, 1980

Deborah A. Lopez
Notary Public.

My commission expires July 27, 1981

15-163-21063-06-00

WELL LOG

OPERATOR: Geodessa Corporation

WELL NAME: Hansen Foundation LOCATION: C NE SW 12-6S-20W

COUNTY: Rooks STATE: Kansas

WELL COMMENCED: July 10, 1980 WELL COMPLETED: July 19, 1980

ELEVATION: 2163' K.B. TOTAL DEPTH: 3650'

PRODUCTION: D & A RIG NO: #3

CASING - 8-5/8": 240.50' of used 8 5/8" 28# cemented with 110 sxs of common 3% cc
2% gel cement circ 12 jts
5-1/2": _____

ALL MEASUREMENTS TAKEN FROM THE TOP OF ROTARY BUSHING:

FROM	TO	FORMATION	DEVIATION FROM VERTICAL	REMARKS:
0'	202'			
202'	250'	sand and clay		
250'	1027'	sand and clay		
1027'	1746'	sand and shale		
1746'	1766'	Anhydrite		
1766'	1776'	Anhydrite		
1776'	1975'	sand and shale		
1975'	1975'	sand and shale	1975' - 3/4 degree	
1975'	1993'			
1993'	2259'	sand and shale		
2259'	2551'	lime and shale and sand		
2551'	2799'	shale and lime		
2799'	2989'	lime and shale		
2989'	3180'	lime and shale		
3180'	3286'	lime and shale		
3286'	3315'	lime and shale		
3315'	3334'	lime and shale		
3334'	3425'	lime and shale		
3425'	3465'	lime and shale		
3465'	3522'	lime and shale		
3522'	3575'	lime and shale		
3575'	3610'	lime and shale		
3610'	3630'	lime and shale		
3630'	3650'	lime and shale		
3650'	RTD			

RECEIVED
STATE CORPORATION COMMISSION
AUG 12 1980
CONSERVATION DIVISION
Wichita, Kansas
8-12-80

STATE OF KANSAS
COUNTY OF _____

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct

PIONEER DRILLING CO., INC.

By Robert J. Lawrence

SUBSCRIBED AND SWORN TO, BEFORE ME, This 11th day of Aug, 1980.

Connie Jo Austin
NOTARY PUBLIC

