



MIDWEST SURVEYS

LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 68, Osawatomie, KS 66064
913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

File No.	Company		Finney Oil Company	
	Well	M. Melander No. A3-11		
	Field	Wayside - Havana		
	County	Montgomery	State Kansas	
	Location	2145' FNL & 2640' FWL N/2-S/2-S/2-N/2		
	Sec. 2	Twp. 34S	Rge. 14E	
	Permanent Datum	GL	Elevation NA	
	Log Measured From	GL	Other Services	
	Drilling Measured From	GL	Perforate	
			Elevation	
			KB NA	
			DF NA	
			GL NA	
Date	04-06-2011			
Run Number	One			
Depth Driller	717.0			
Depth Logger	708.3			
Bottom Logged Interval	707.3			
Top Log Interval	20.0			
Fluid Level	Full			
Type Fluid	Water			
Density / Viscosity	NA			
Salinity - PPM Cl	NA			
Max Recorded Temp	NA			
Estimated Cement Top	0.0			
Equipment No.	107			
Recorded By	Steve Windisch			
Witnessed By	Kyler Finney			
RUN	BORE-HOLE RECORD		CASING RECORD	
No.	BIT	FROM	TO	
One	12.25"	0.0	21.5	
Two	5.875"	21.5	717.0	
		SIZE	WGT.	
		7.00"	0.0	
		2.875"	0.0	
			TO	
			21.43	
			710.0	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.



Comments


Drilling Contractor :
Finney Drilling Company



Database File: minadr3a.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Wed Apr 06 09:55:01 2011 by Log Std Casedhole 07122
Charted by: Depth in Feet scaled 1:240

Gamma Ray (cps)	150	10	Neutron (cps)	2100
-----------------	-----	----	---------------	------



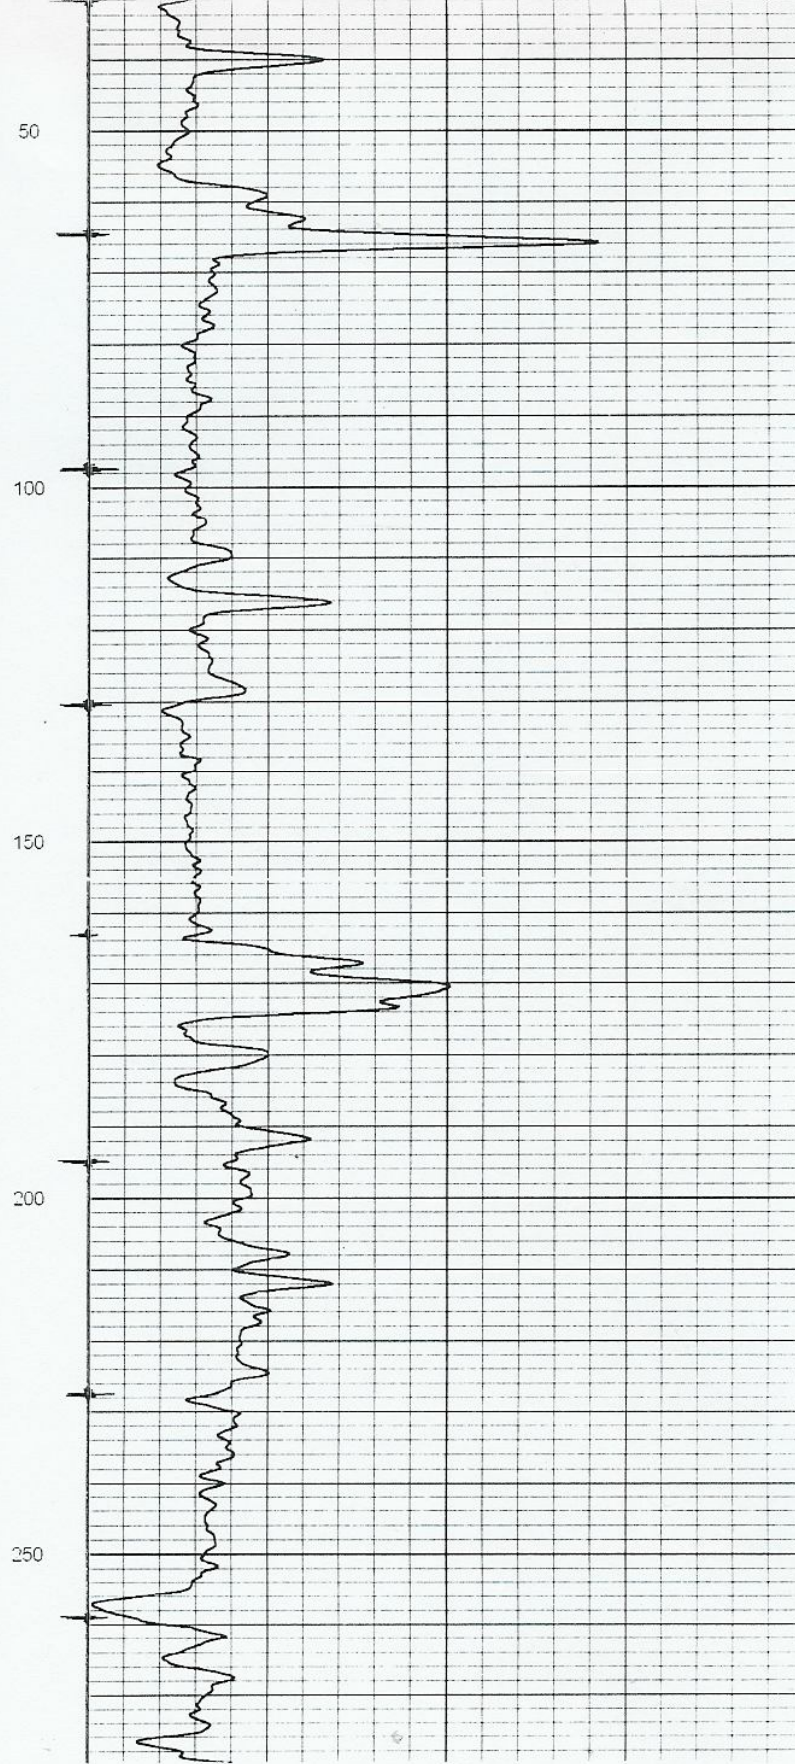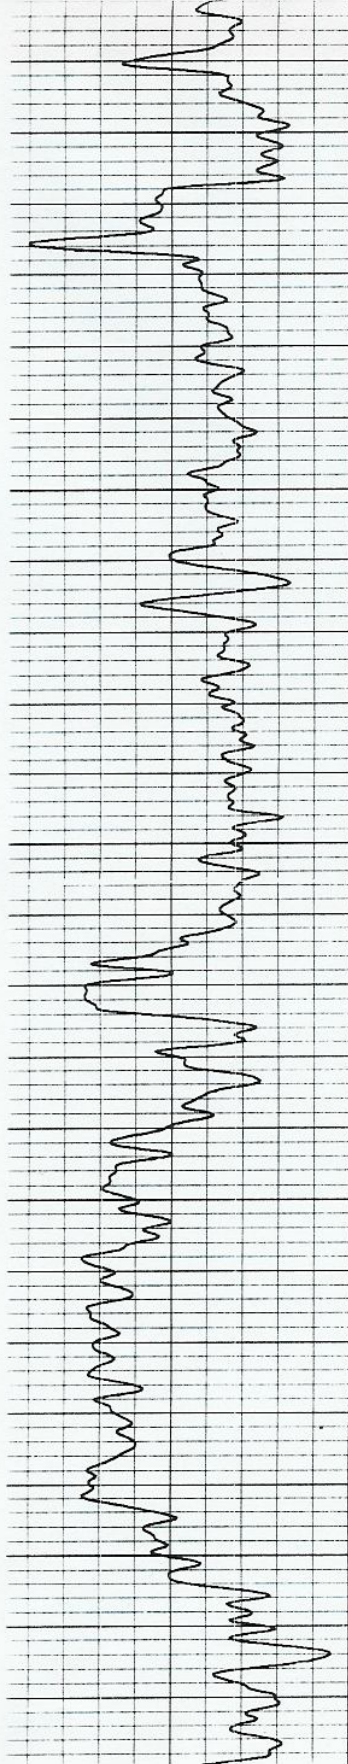

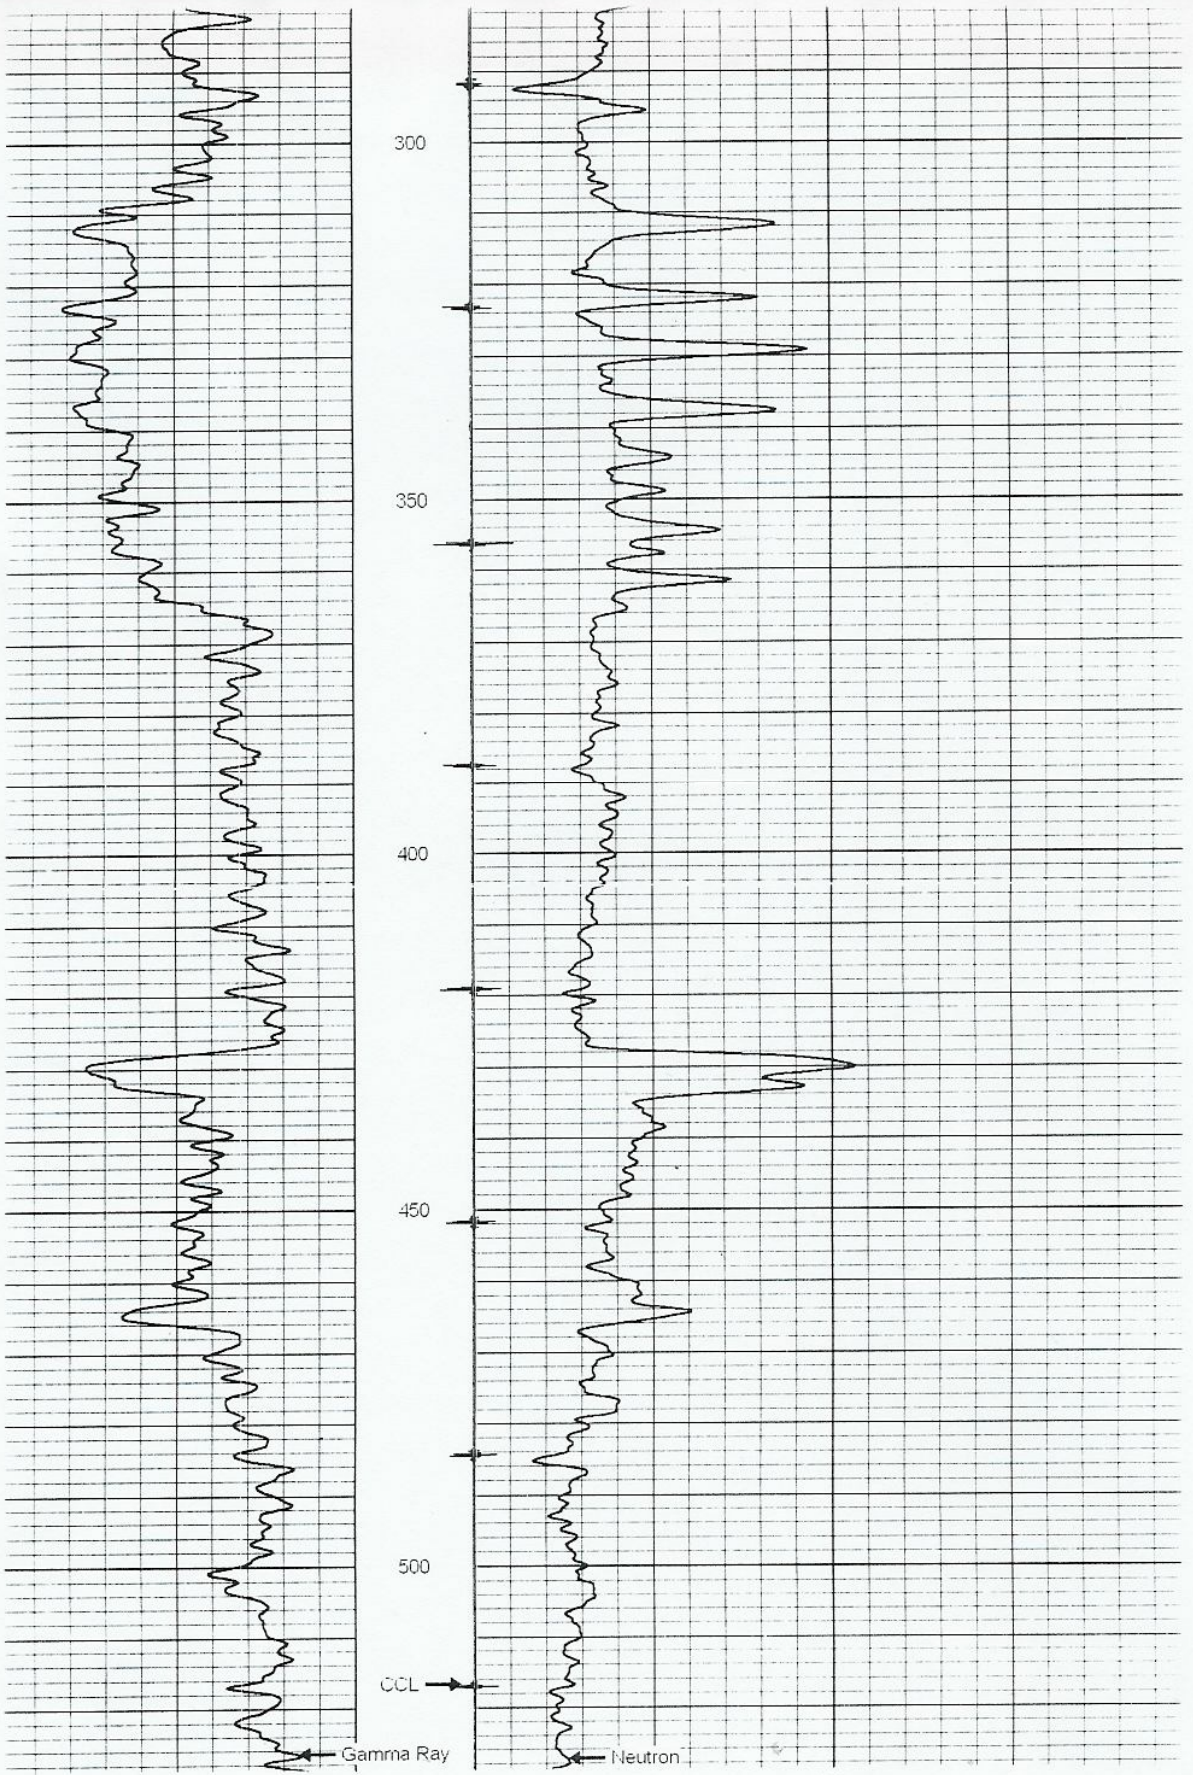

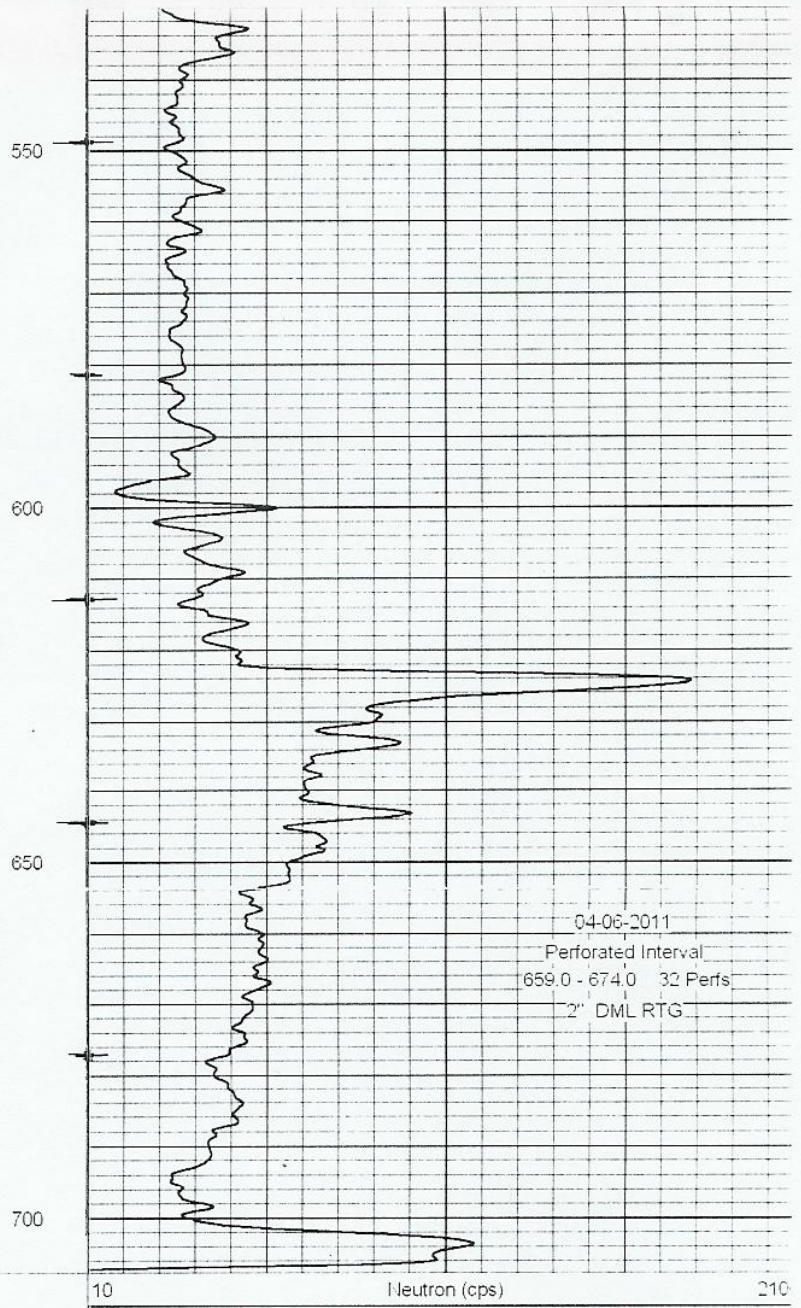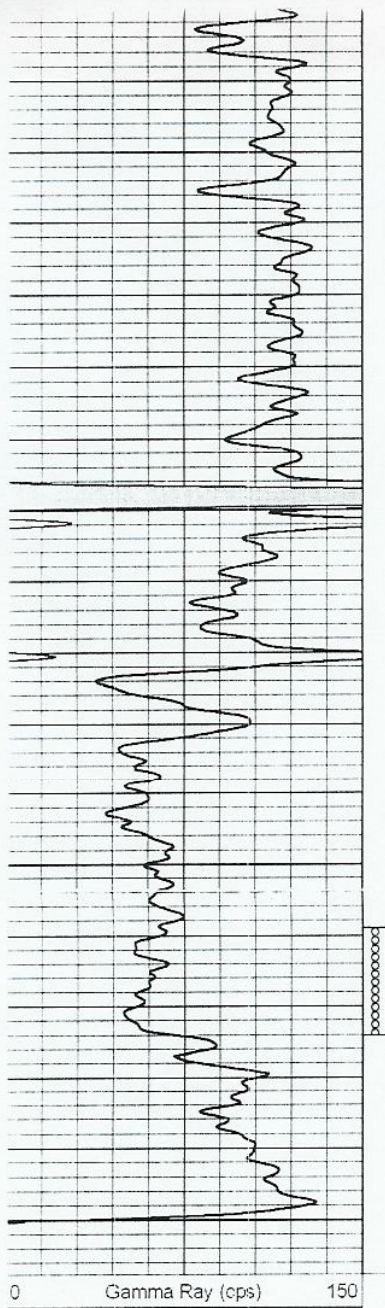

04-06-2011
Perforated Interval
659.0 - 674.0 32 Perfs
2" DML RTG