

# HALLIBURTON

## MICROLOG

COMPANY VAL ENERGY INC.  
WELL TALBOTT #6-9  
FIELD  
COUNTY BARBER  
STATE KANSAS

COMPANY VAL ENERGY INC.  
WELL TALBOTT #6-9  
FIELD  
COUNTY BARBER  
STATE KANSAS

API No. 15-007-23674  
Location 2310' FSL & 825' FEL  
Other Services:  
DSN/SDL  
ACRT

Permanent Datum GL  
Log measured from KB  
Drilling measured from KB  
Date 18-Apr-11  
Run No. 1  
Depth - Driller 4700.00 ft  
Depth - Logger 4691.0 ft  
Bottom - Logged Interval 4688.0 ft  
Top - Logged Interval 3050.0 ft  
Casing - Driller 8.625 in @ 221.0 ft  
Casing - Logger 221.0 ft  
Bit Size 7.875 in  
Type Fluid in Hole WATER BASED MUD  
Density 9.1 ppg  
Viscosity 45.00 s/qt  
PH 9.00  
Fluid Loss 10.4 cpm

Elev. 1358.0 ft  
Elev. K.B. 1369.0 ft  
D.F. 1369.0 ft  
G.L. 1358.0 ft  
Sect. 9 Twp. 34S Rge. 11W  
11.0 ft above Perm. Datum

Source of Sample FLOW LINE  
Rm @ Meas. Temperature 0.548 ohmm @ 75.00 degF  
Rmf @ Meas. Temperature 0.46 ohmm @ 75.00 degF  
Rmc @ Meas. Temperature 0.660 ohmm @ 75.00 degF  
Source Rmf MEAS Rmc MEAS  
Rm @ BHT 0.11 ohmm @ 120.0 degF  
Time Since Circulation 6.0 hr  
Time on Bottom 18-Apr-11 08:02  
Max. Rec. Temperature 120.0 degF @ 4691.0 ft  
Equipment Location 10546896 LIBERAL  
Recorded By J. BOSH  
Witnessed By S. VAN BUSKIRK

Fold here

Service Ticket No.: 8105269		API Serial No.: 15-007-23674		PGM Version: WL INSITE R3.2.0 (Build 7)				
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE				RESISTIVITY SCALE CHANGES				
Date	Sample No.			Type Log	Depth	Scale Up Hole	Scale Down Hole	
Depth-Driller								
Type Fluid in Hole								
Density	Viscosity							
Ph	Fluid Loss							
Source of Sample				RESISTIVITY EQUIPMENT DATA				
Rm @ Meas. Temp	@	@		Run No.	Tool Type & No.	Pad Type	Tool Pos.	Other
Rmf @ Meas. Temp.	@	@		ONE	MICRO P84	RUBBER	ADU	N/A
Rmc @ Meas. Temp.	@	@						
Source Rmf	Rmc							
Rm @ BHT	@	@						
Rmf @ BHT	@	@						
Rmc @ BHT	@	@						
EQUIPMENT DATA								
GAMMA		ACOUSTIC		DENSITY		NEUTRON		
Run No.	ONE	Run No.		Run No.		Run No.		
Serial No.	11039640	Serial No.		Serial No.		Serial No.		
Model No.	GTET	Model No.		Model No.		Model No.		
Diameter	3.625	No. of Cent.		Diameter		Diameter		
Detector Model No.	T-102	Spacing		Log Type		Log Type		
Type	SCINT			Source Type		Source Type		
Length	8"	LSA [Y/N]		Serial No.		Serial No.		
Distance to Source	10'	FWDA [Y/N]		Strength		Strength		
LOGGING DATA								

GENERAL			GAMMA		ACOUSTIC		DENSITY		NEUTRON					
Run	Depth		Speed	Scale		Scale		Matrix	Scale		Matrix	Scale		Matrix
No.	From	To	ft/min	L	R	L	R		L	R		L	R	
ONE	TD	3050	REC	0	150									

DIRECTIONAL INFORMATION

Maximum Deviation @ KOP @

Remarks: ANNULAR HOLE VOLUME CALCULATED FOR 5.5 INCH CASING

CHLORIDES: 6500 PPM

GPS COORDINATES: LAT: 37.06 N LONG: 98.30 W

TODAY'S CREW: A. VAQUERA, K. KELLY

THANK YOU FOR CHOOSING HALLIBURTON ENERGY SERVICES, LIBERAL, KS 620-824-8123


HALLIBURTON DOES NOT GUARANTEE THE ACCURACY OF ANY INTERPRETATION OF THE LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY HALLIBURTON PERSONNEL OR WHICH APPEAR ON THE LOG OR IN ANY OTHER FORM. ANY USER OF SUCH DATA, INTERPRETATIONS, CONVERSIONS, OR RECOMMENDATIONS AGREES THAT HALLIBURTON IS NOT RESPONSIBLE EXCEPT WHERE DUE TO GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, FOR ANY LOSS, DAMAGES, OR EXPENSES RESULTING FROM THE USE THEREOF.


HALLIBURTON

**HALLIBURTON**

Plot Time: 18-Apr-11 10:06:40  
 Plot Range: 3050 ft to 4694.67 ft  
 Data: TALBOTT\_6\_9Well Based\DAQ-0001-0031  
 Plot File: \\LOCAL-1TALBOTT\_6\_9Well Based\MICRO\Microlog\_IQ\_5\_main.lib

**5 INCH MAIN LOG**

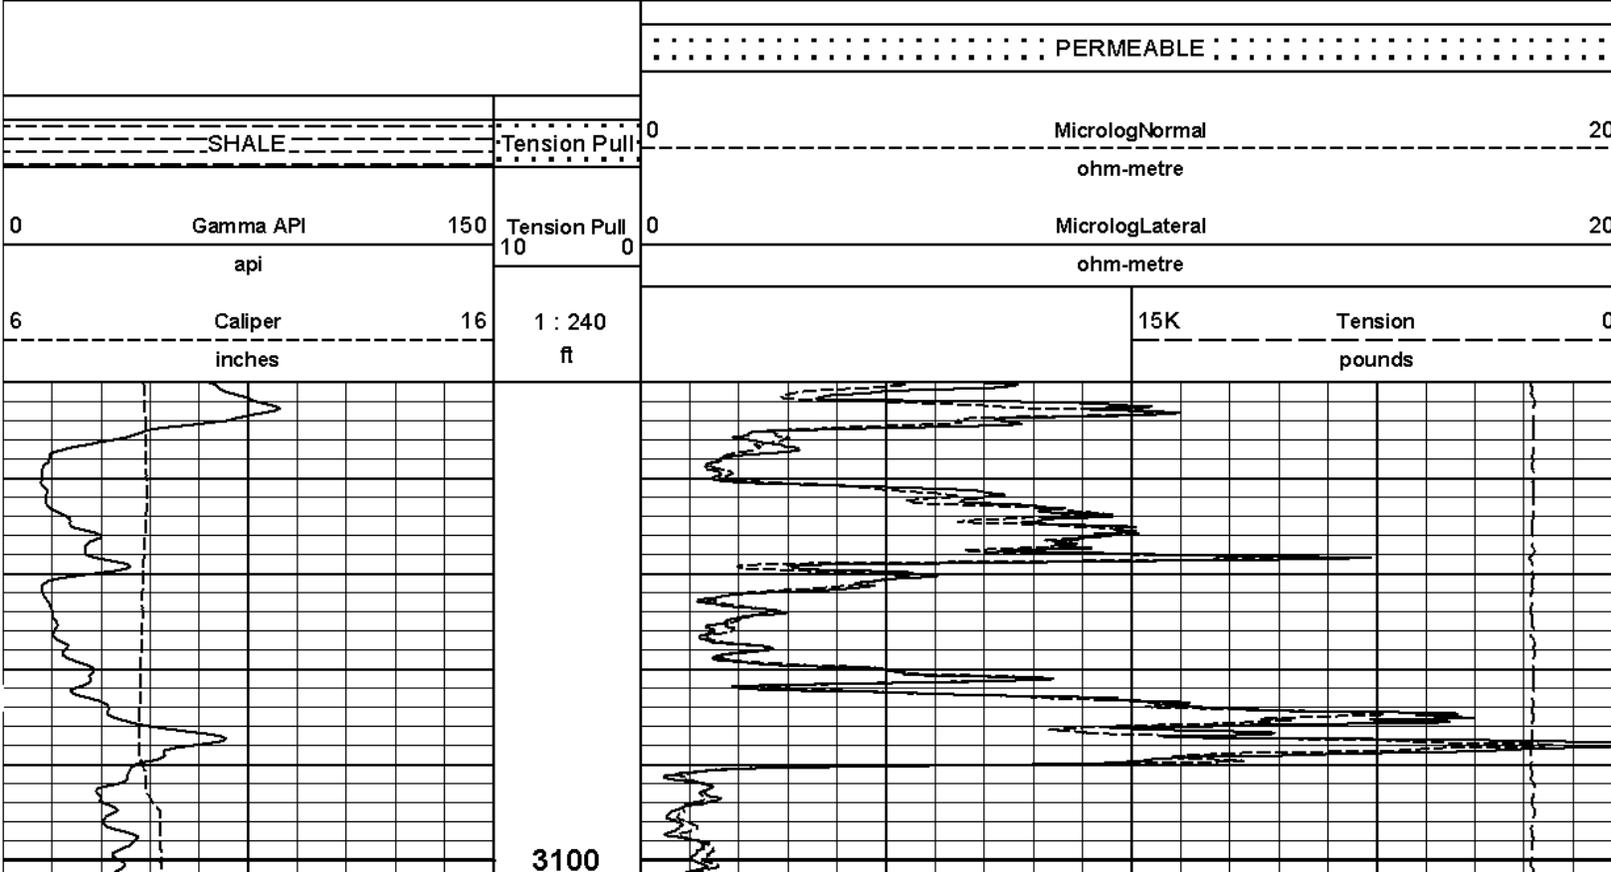

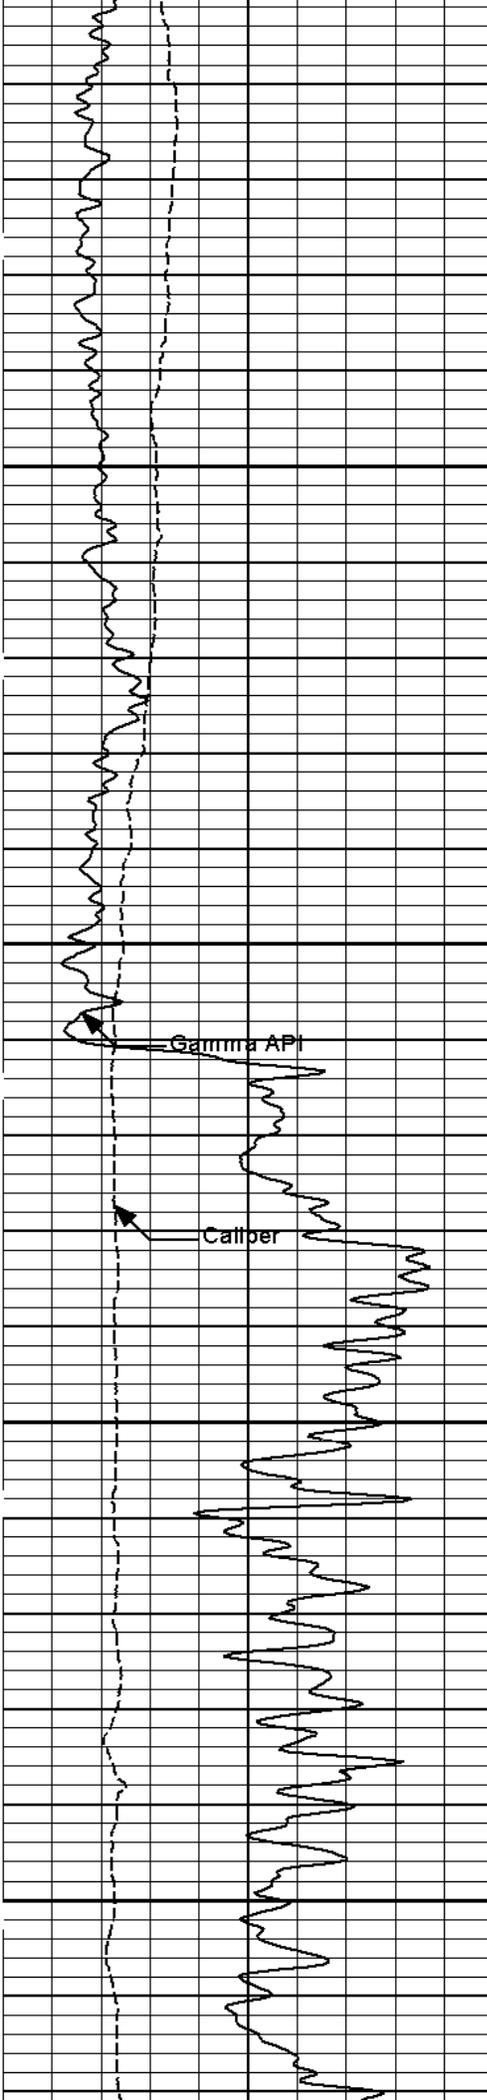


3200

Gamma Ray


Caliber

3300

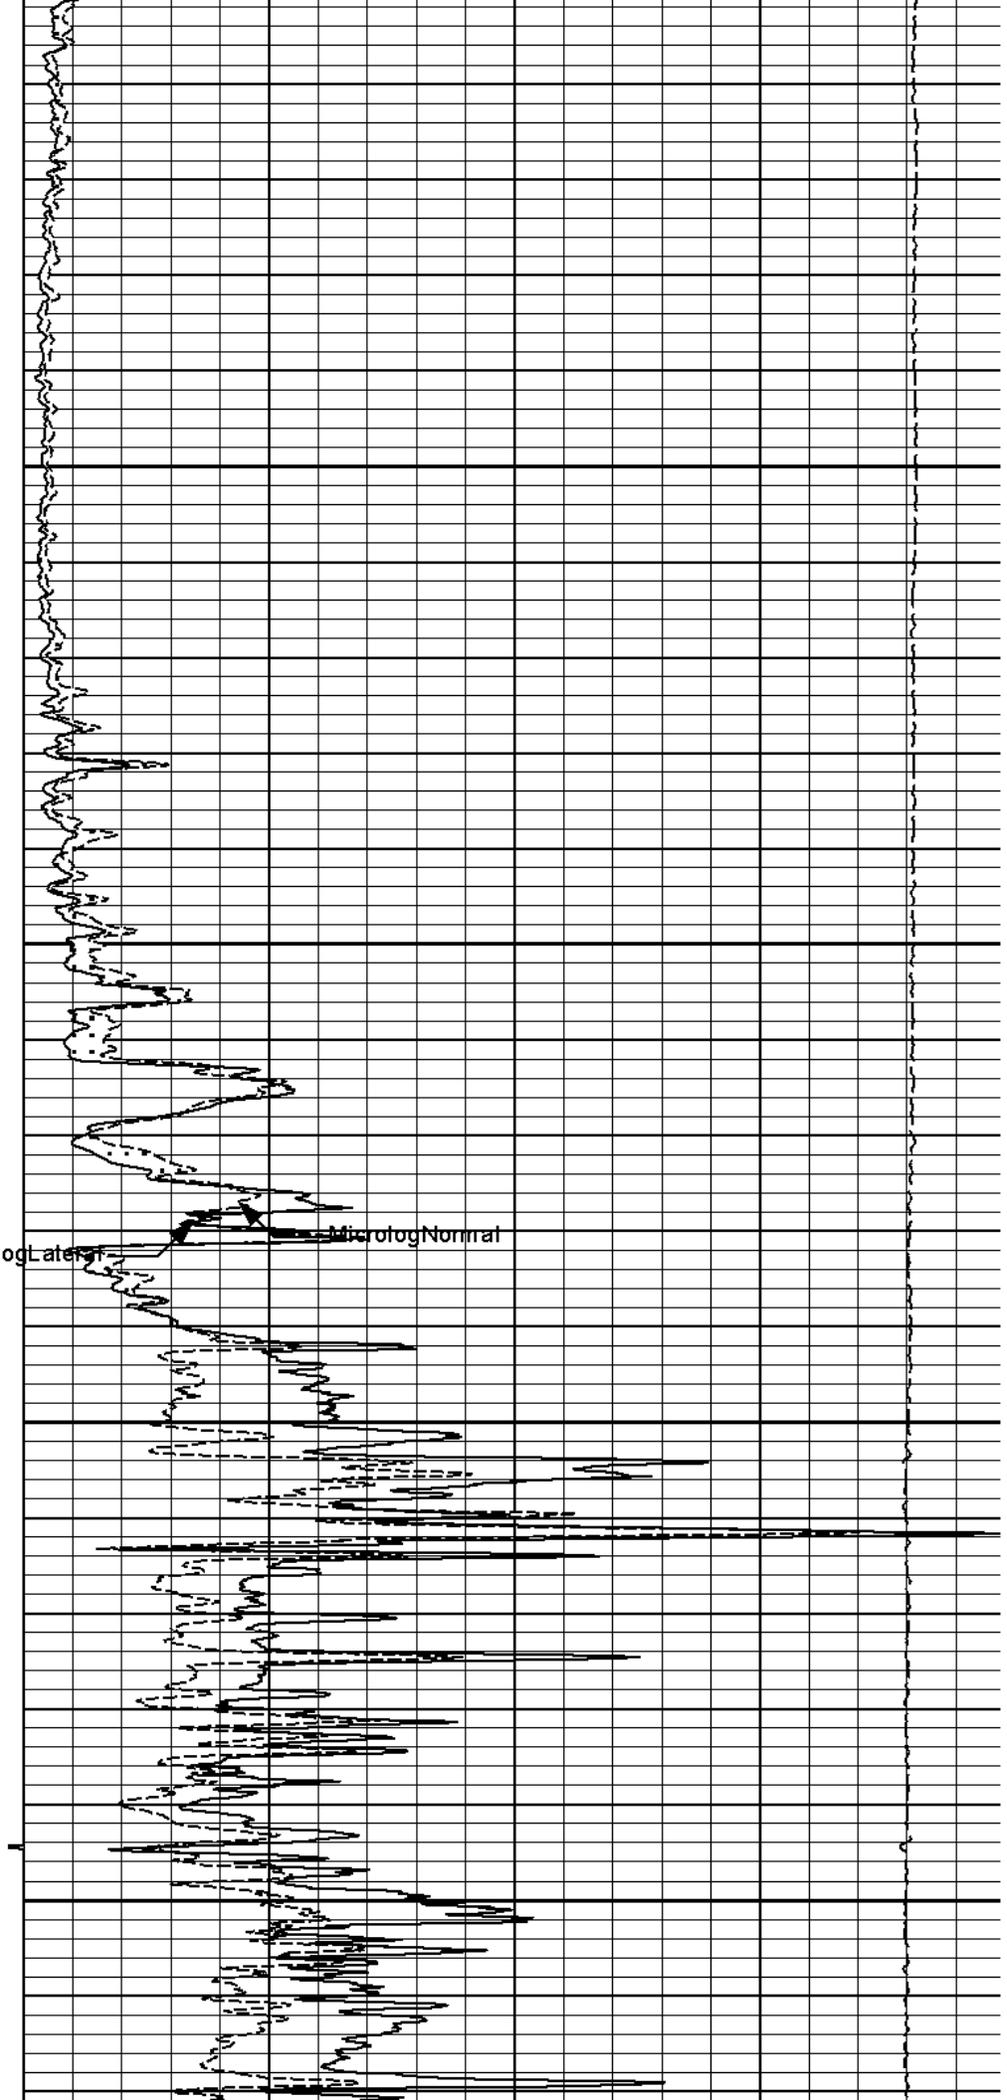

Microlog Lateral

Microlog Normal

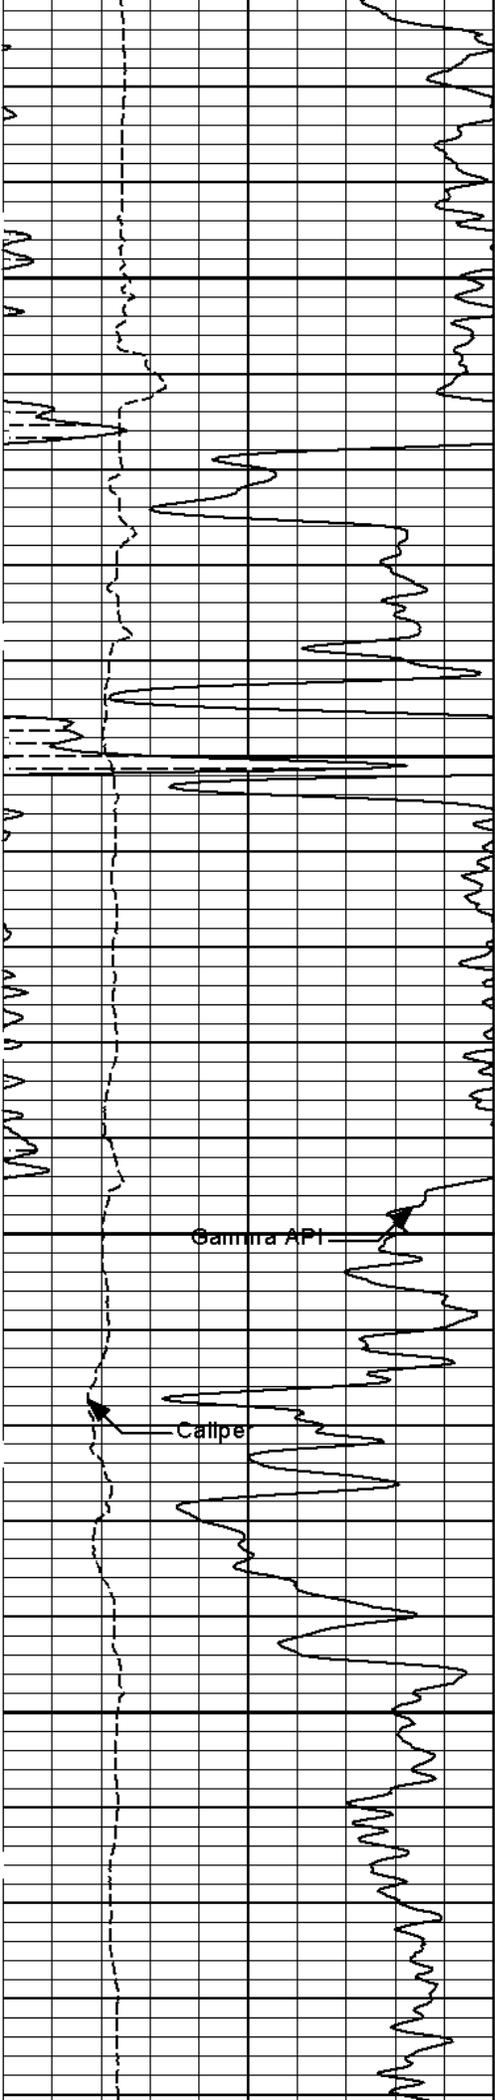


3400

Gamma API


Callpe

3500

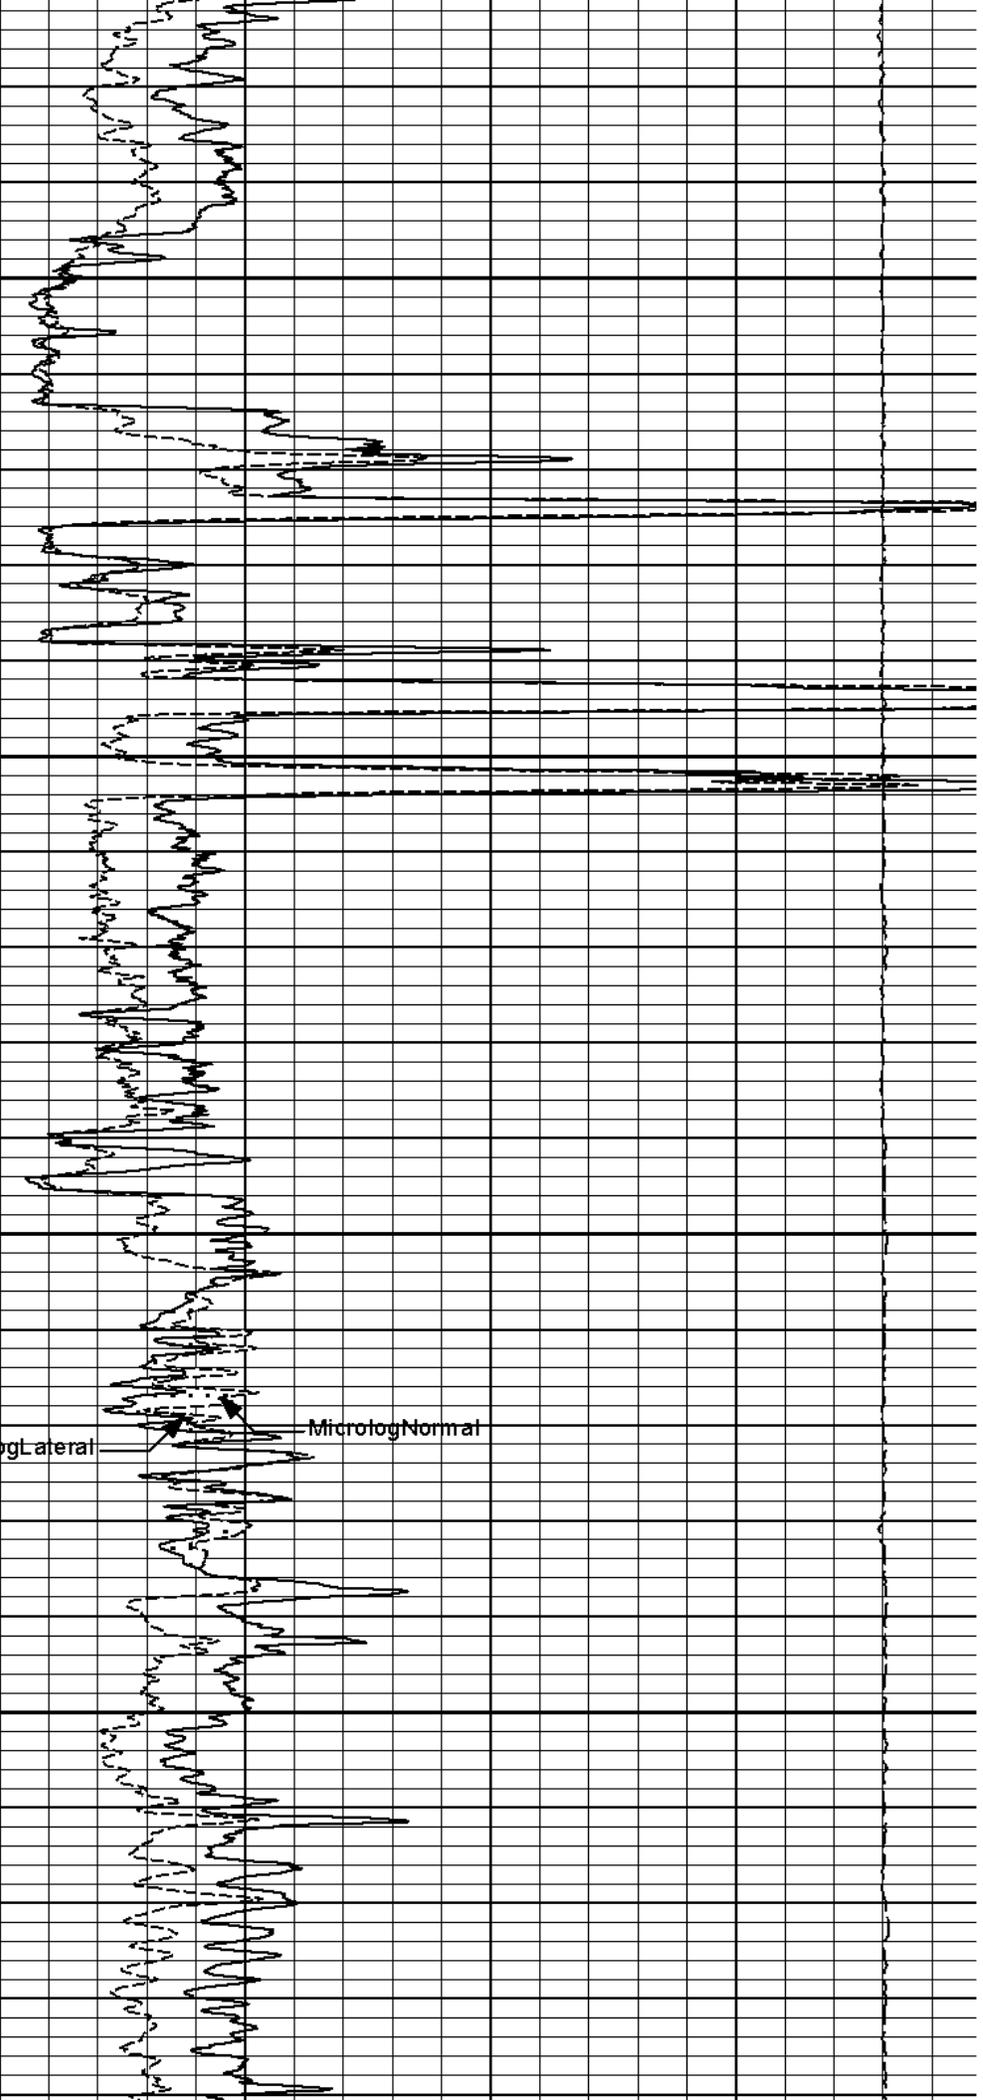

Microlog Lateral

Microlog Normal

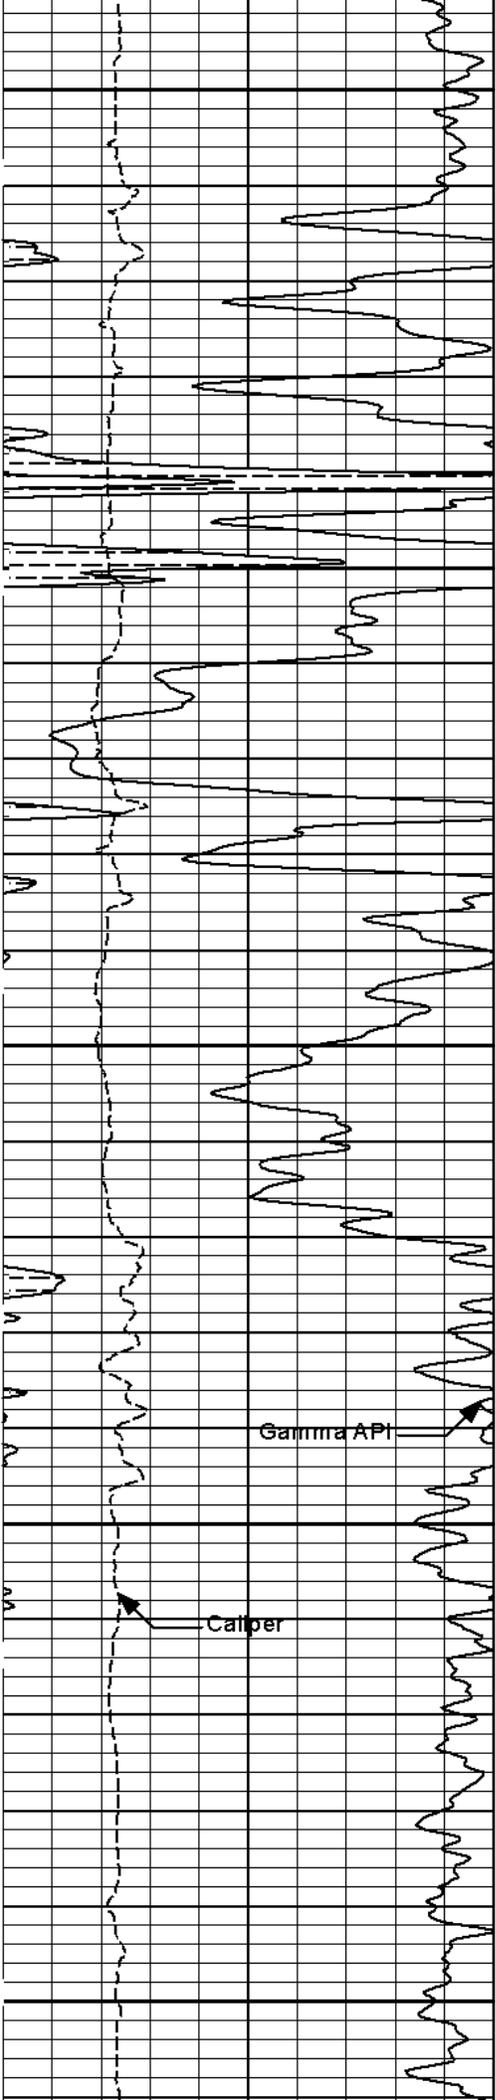


3600

3700


Gamma API

Caliper

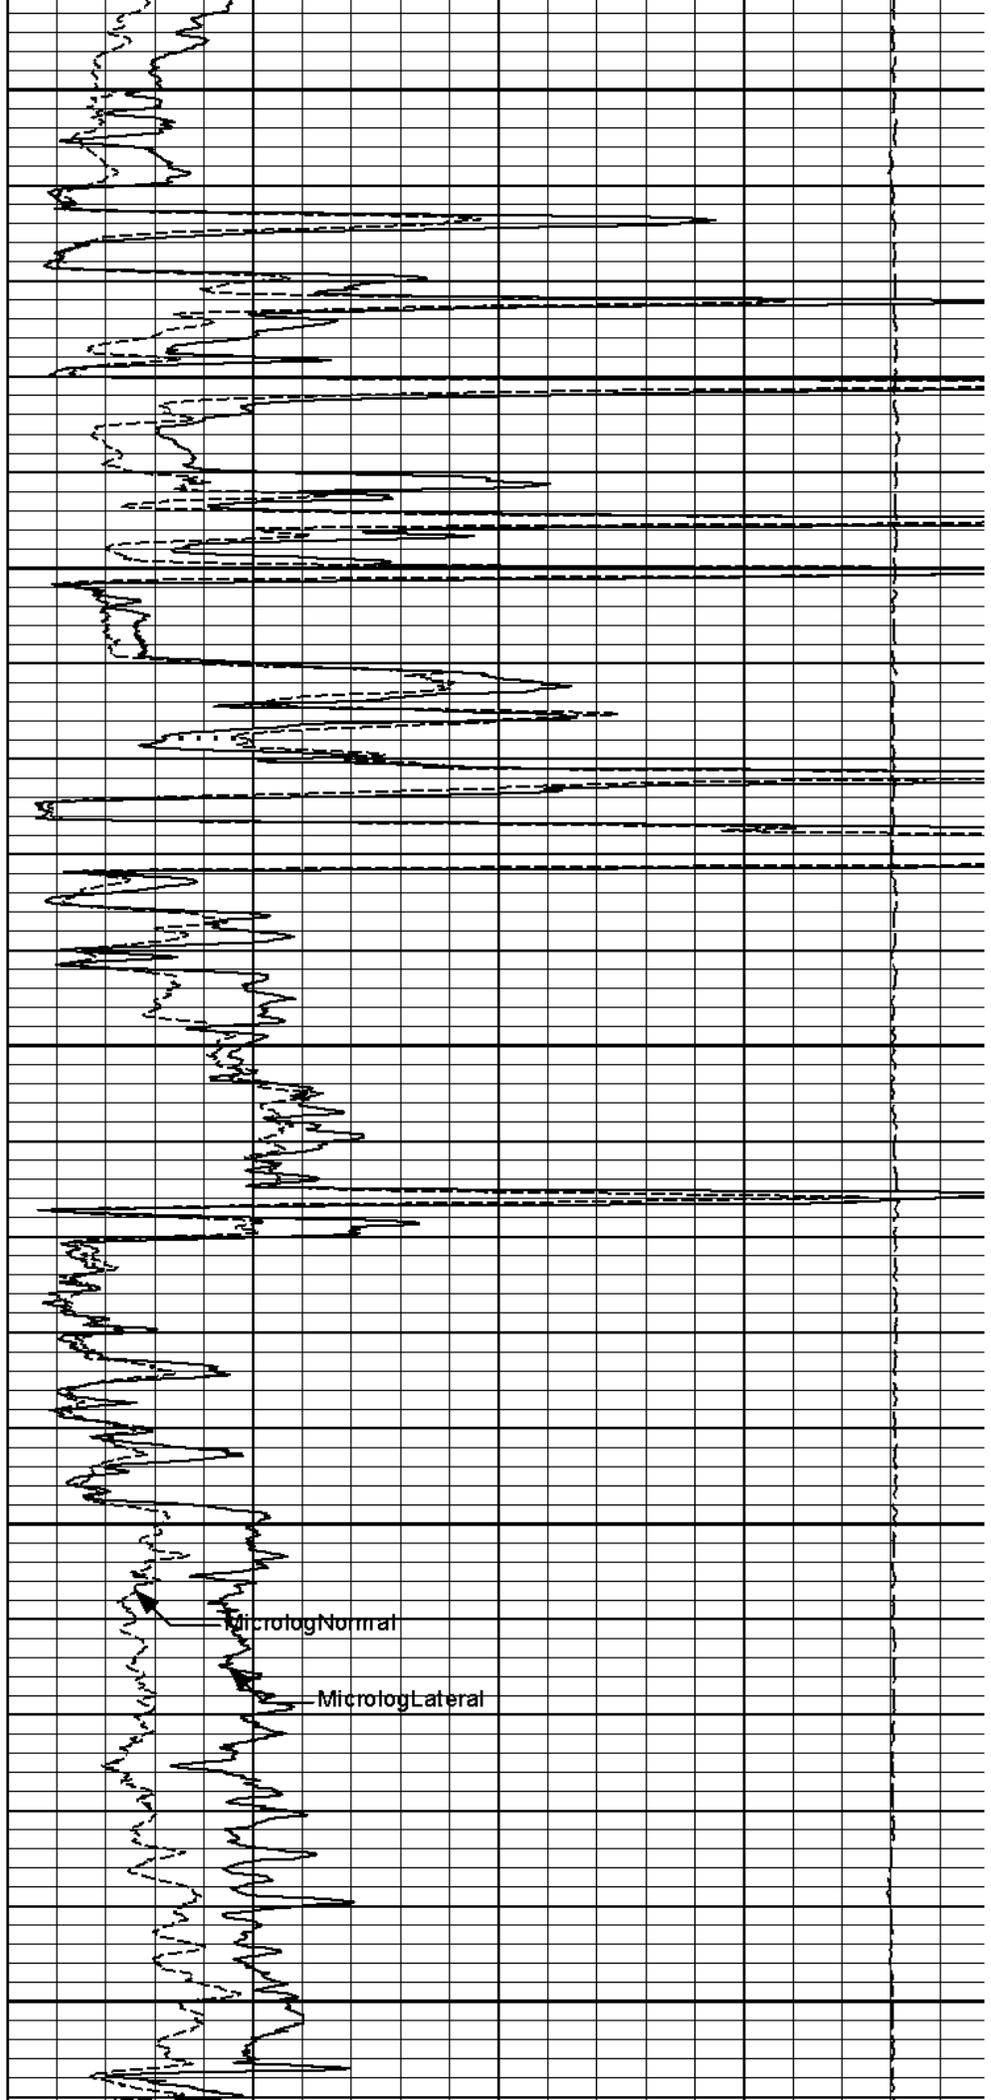

MicrologNormal

MicrologLateral

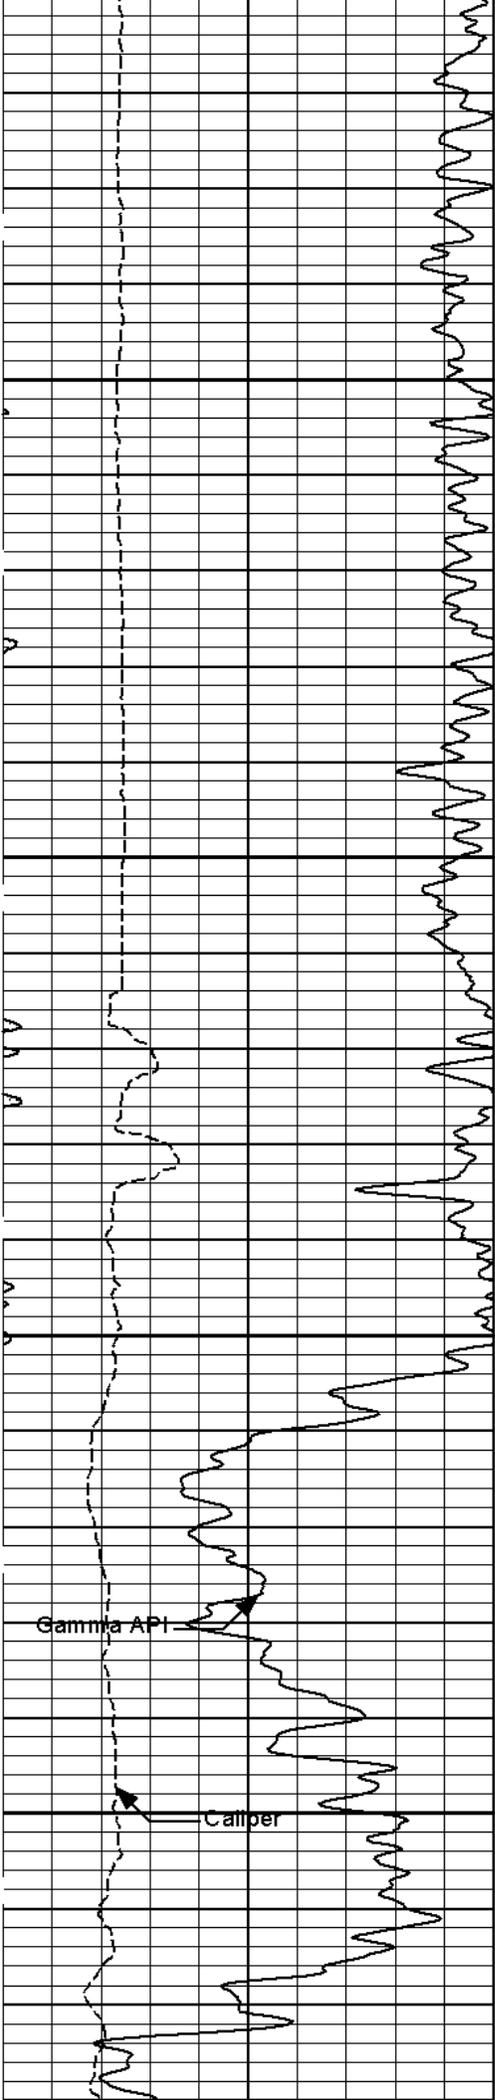


3800

3900


Gamma API

Caliper

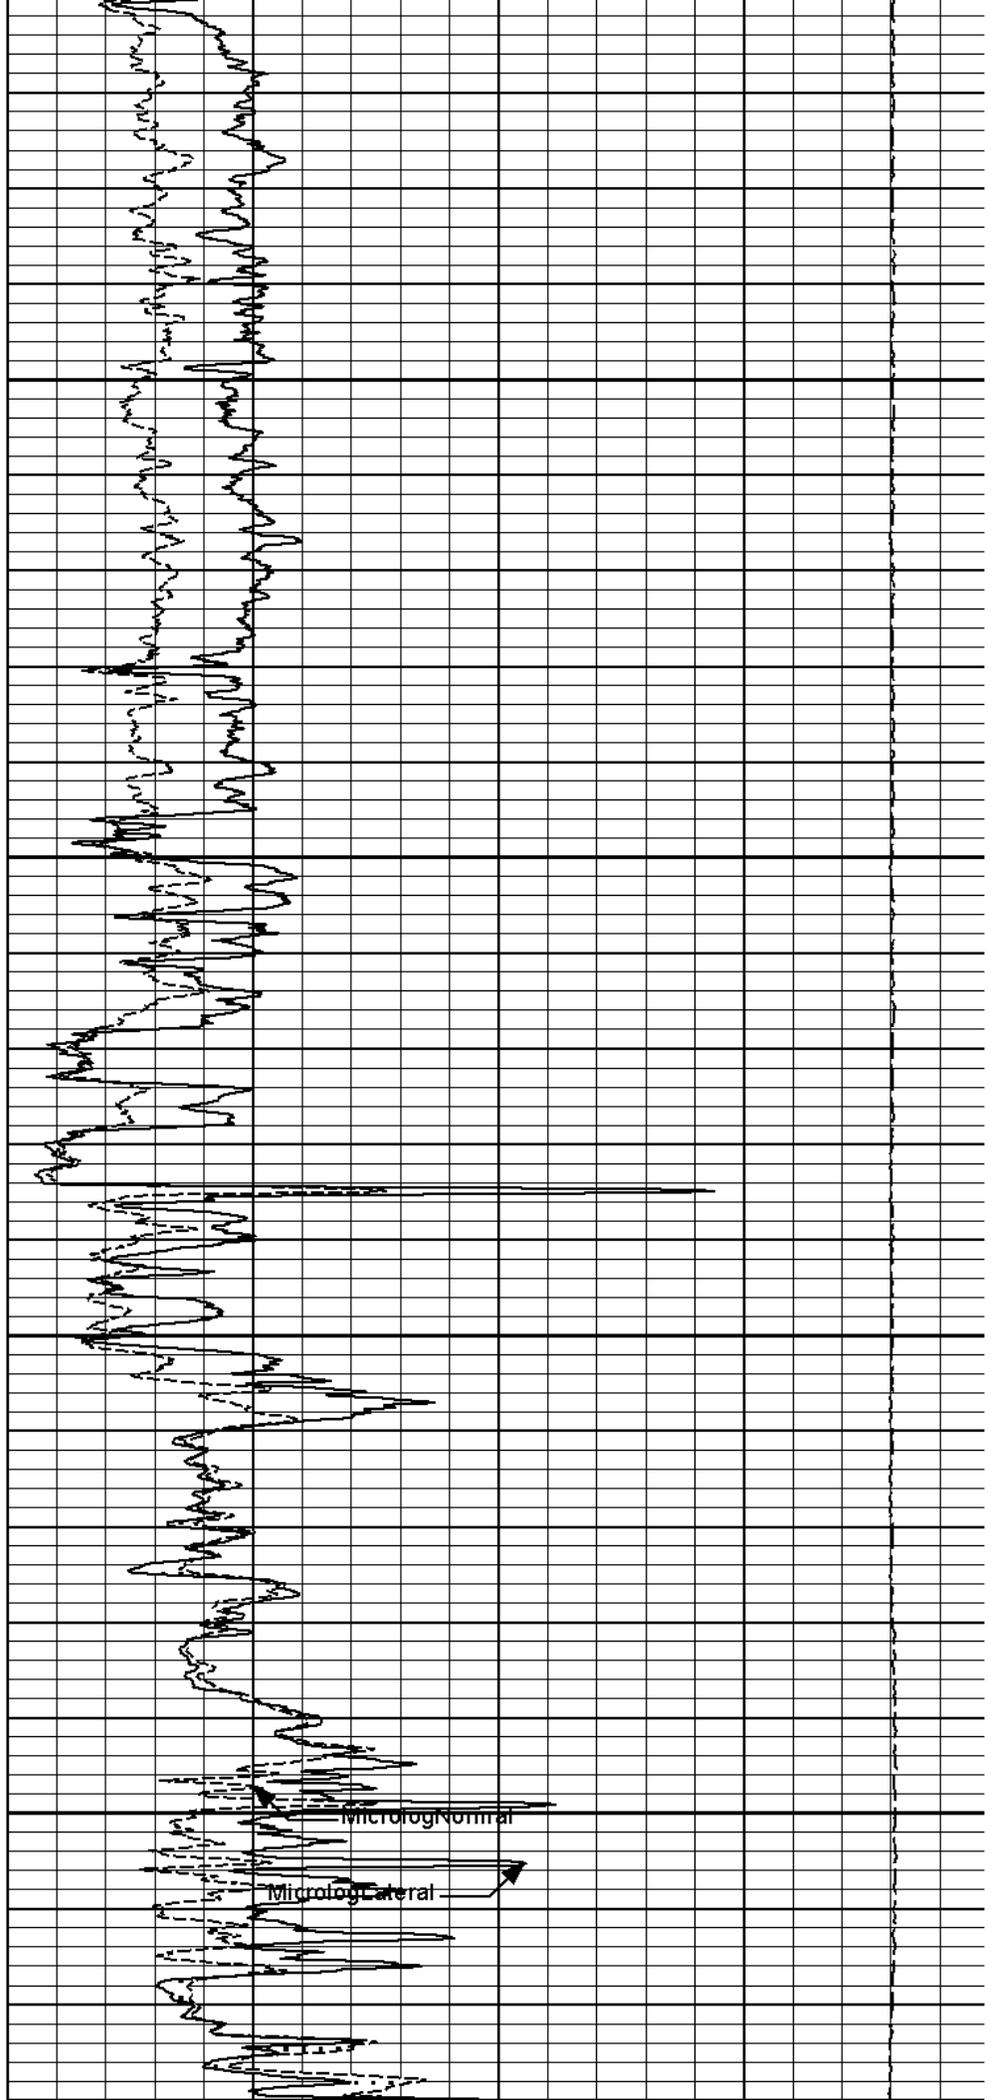

MicrologNormal

MicrologLateral

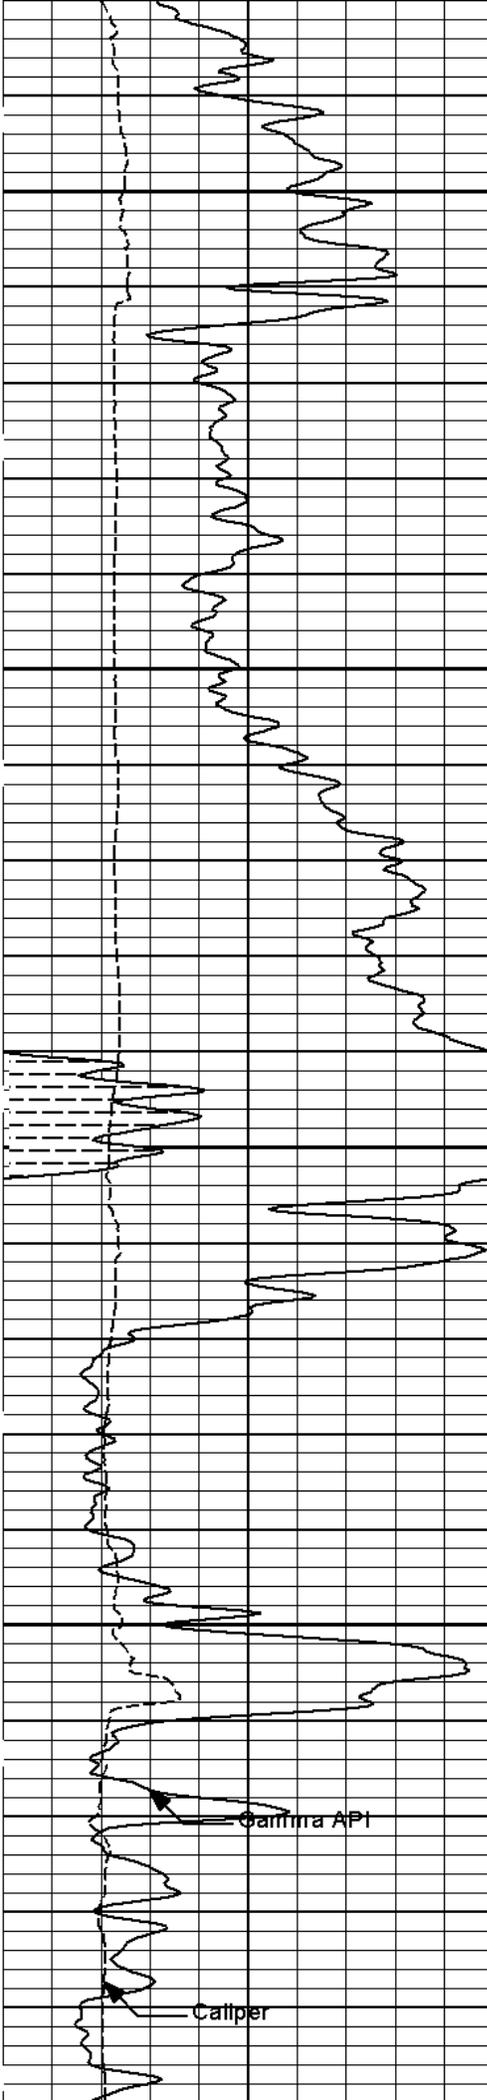


4000

4100

Gamma API

Caliper


4200

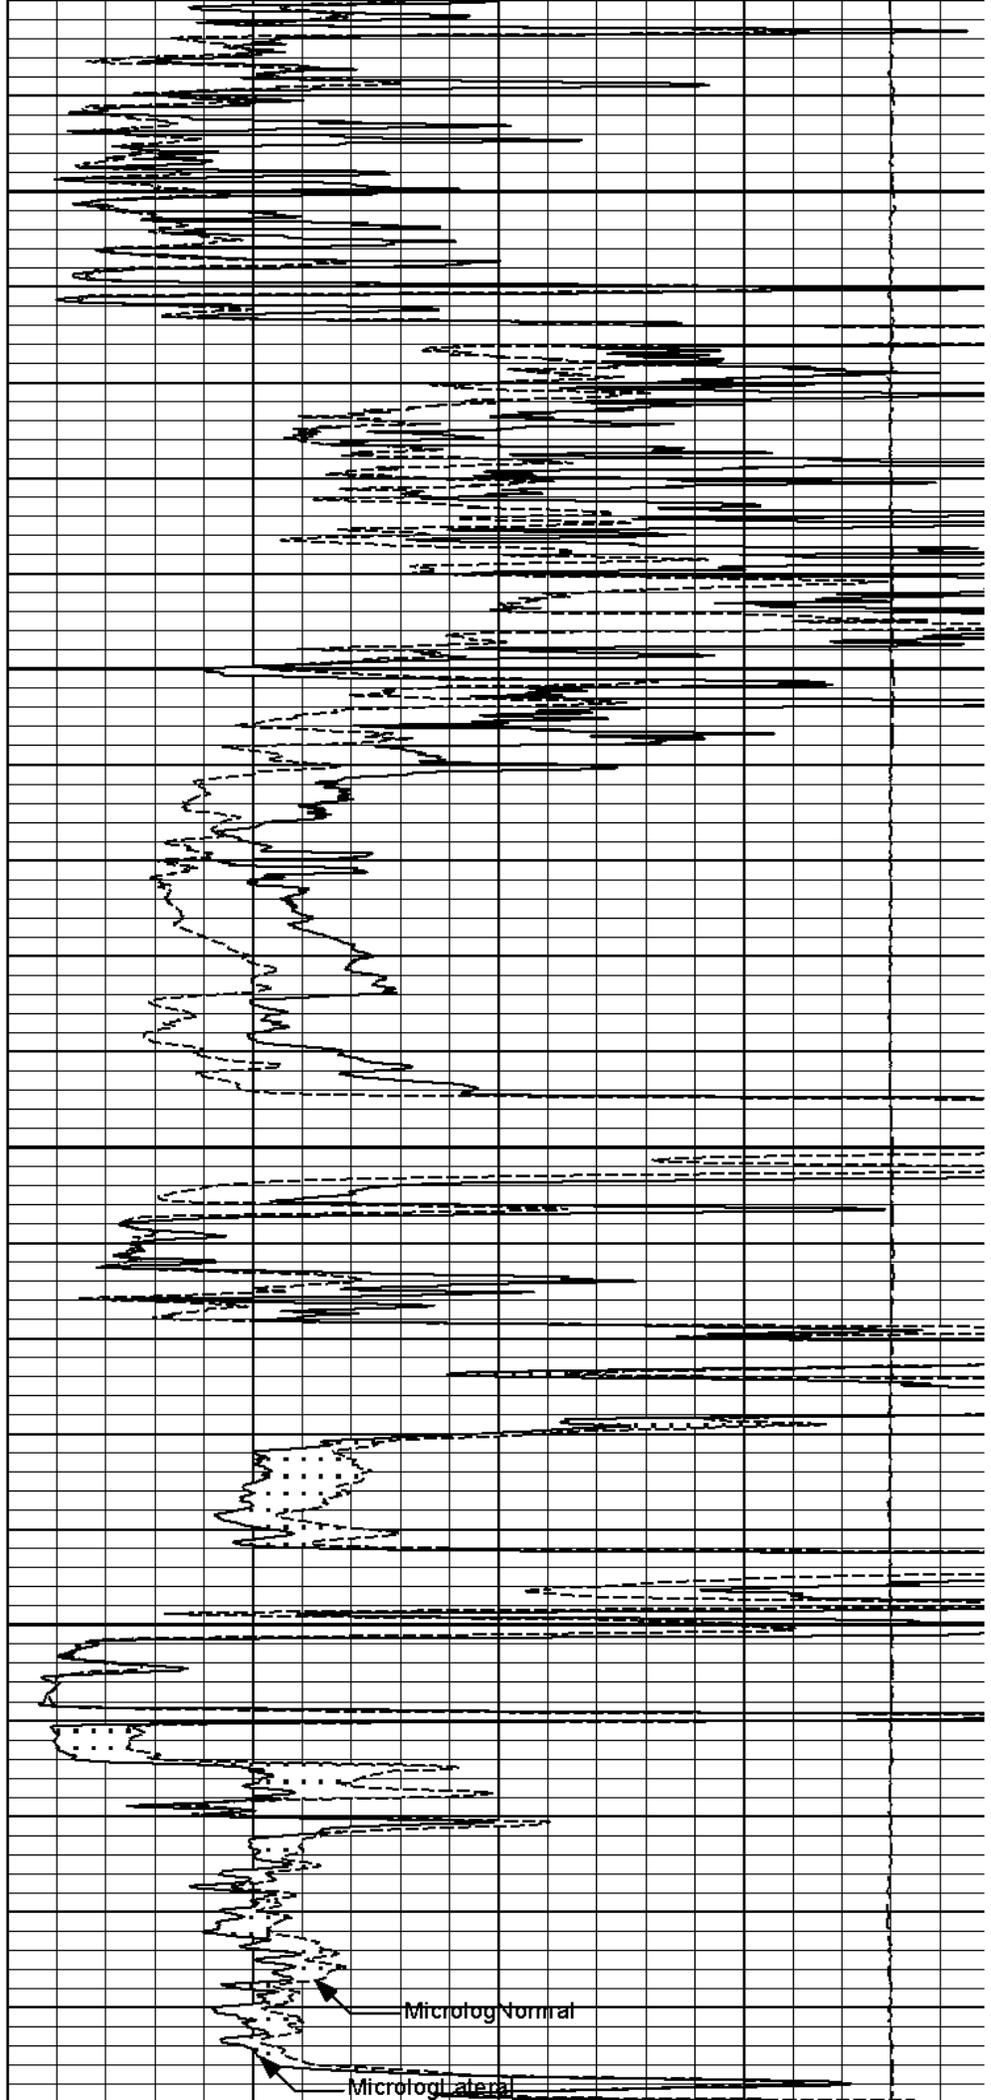


Microlog Normal

Microlog Lateral


4200

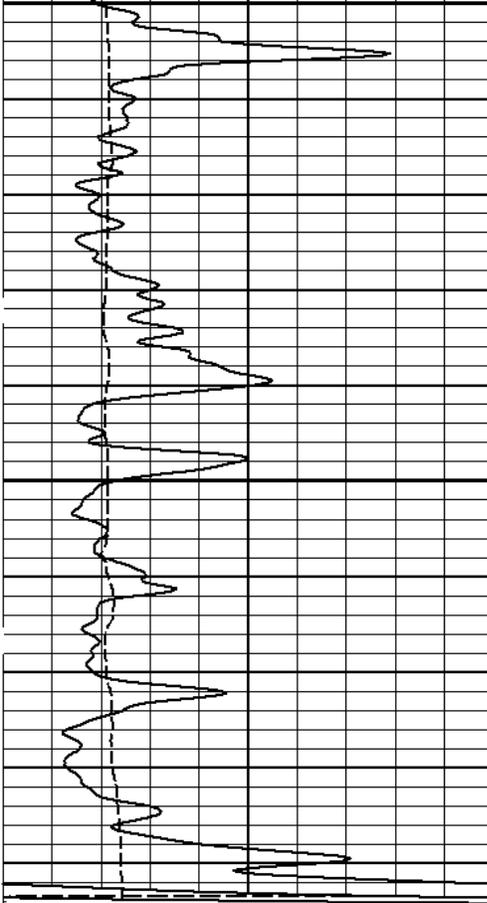


4300

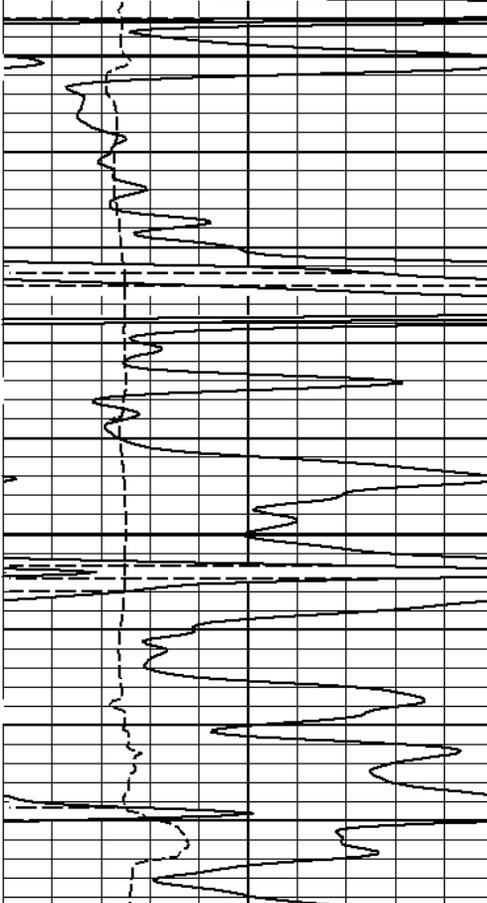


4400

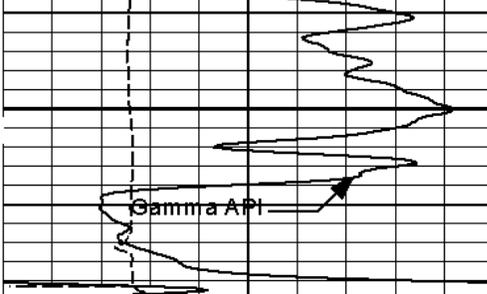


Gamma API


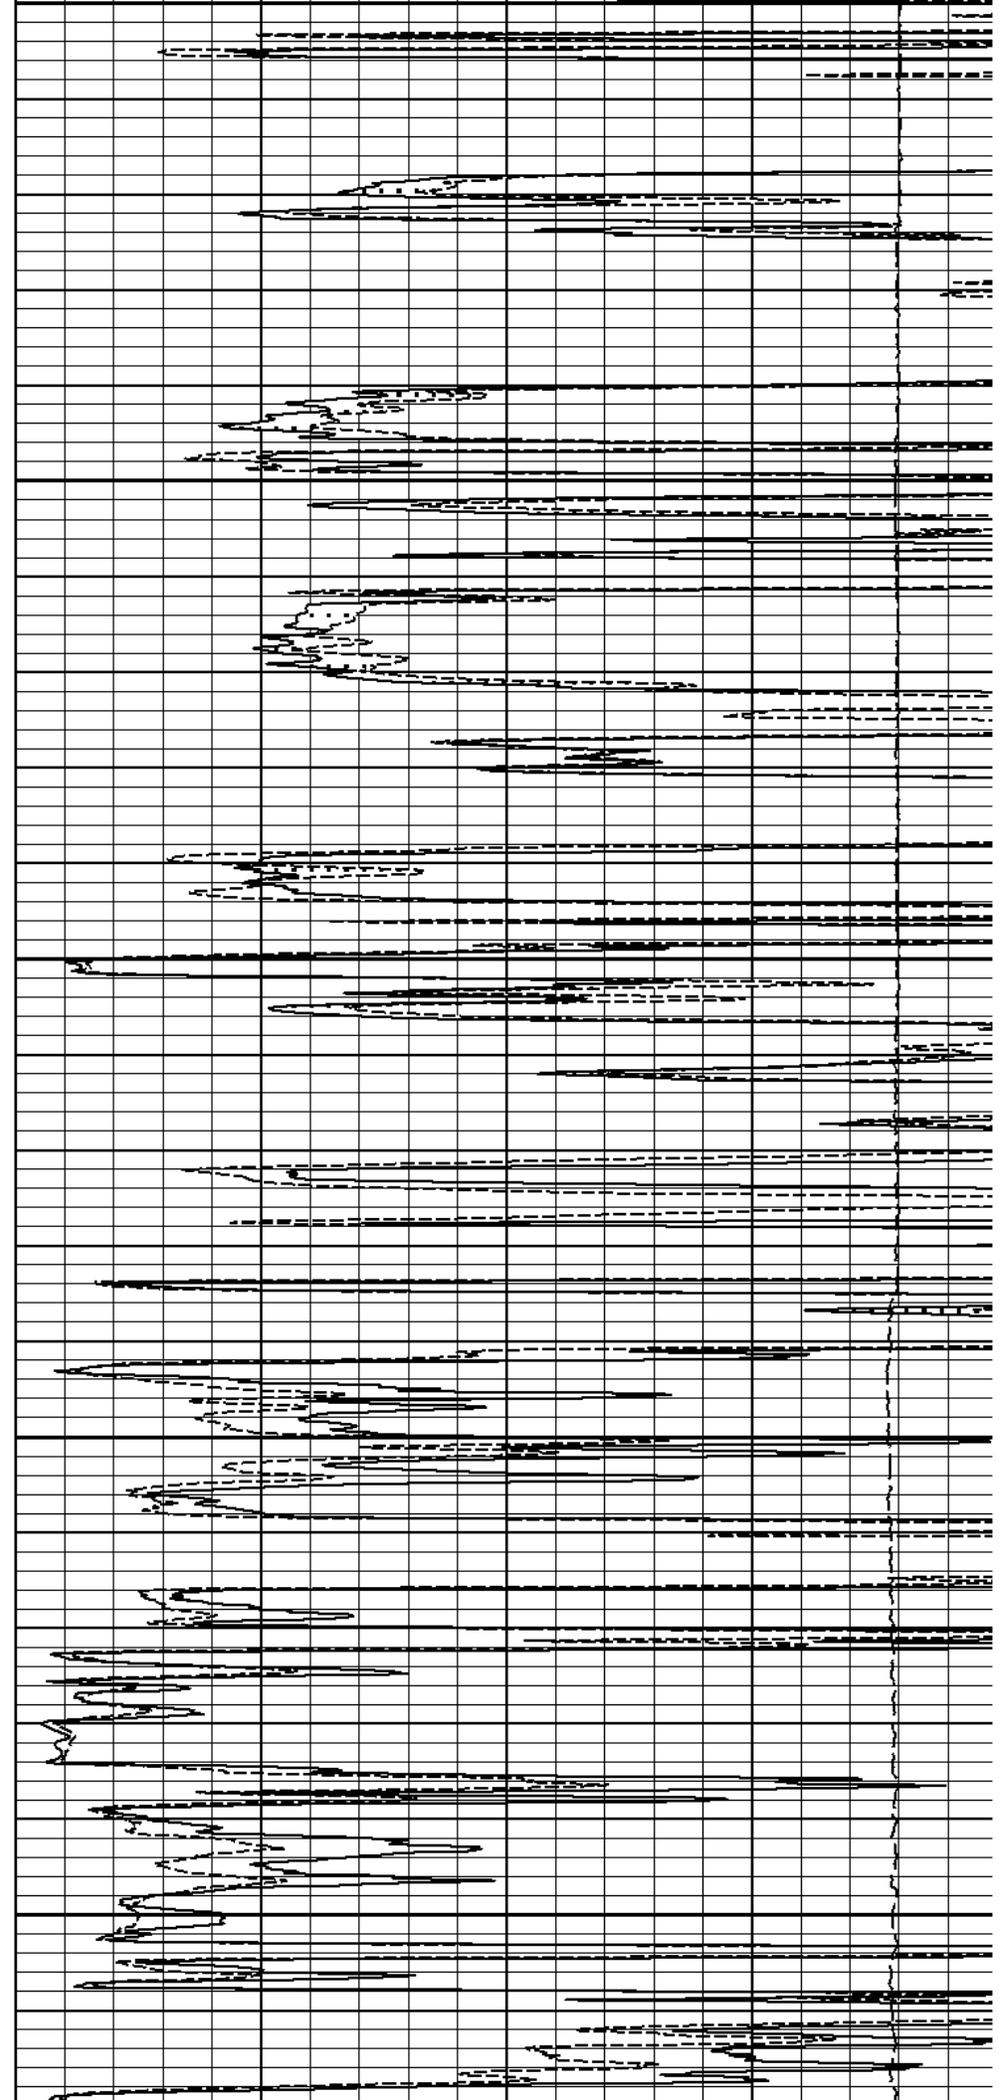


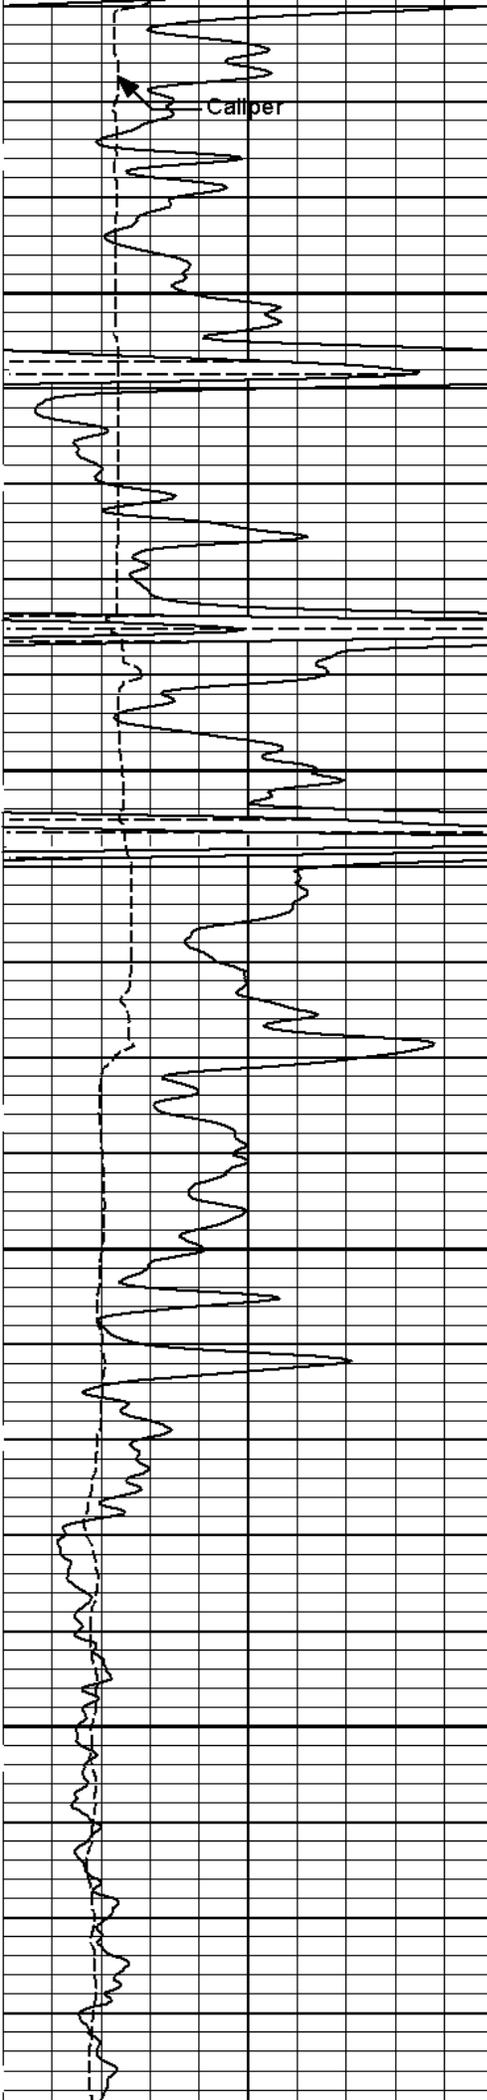

4500

4600

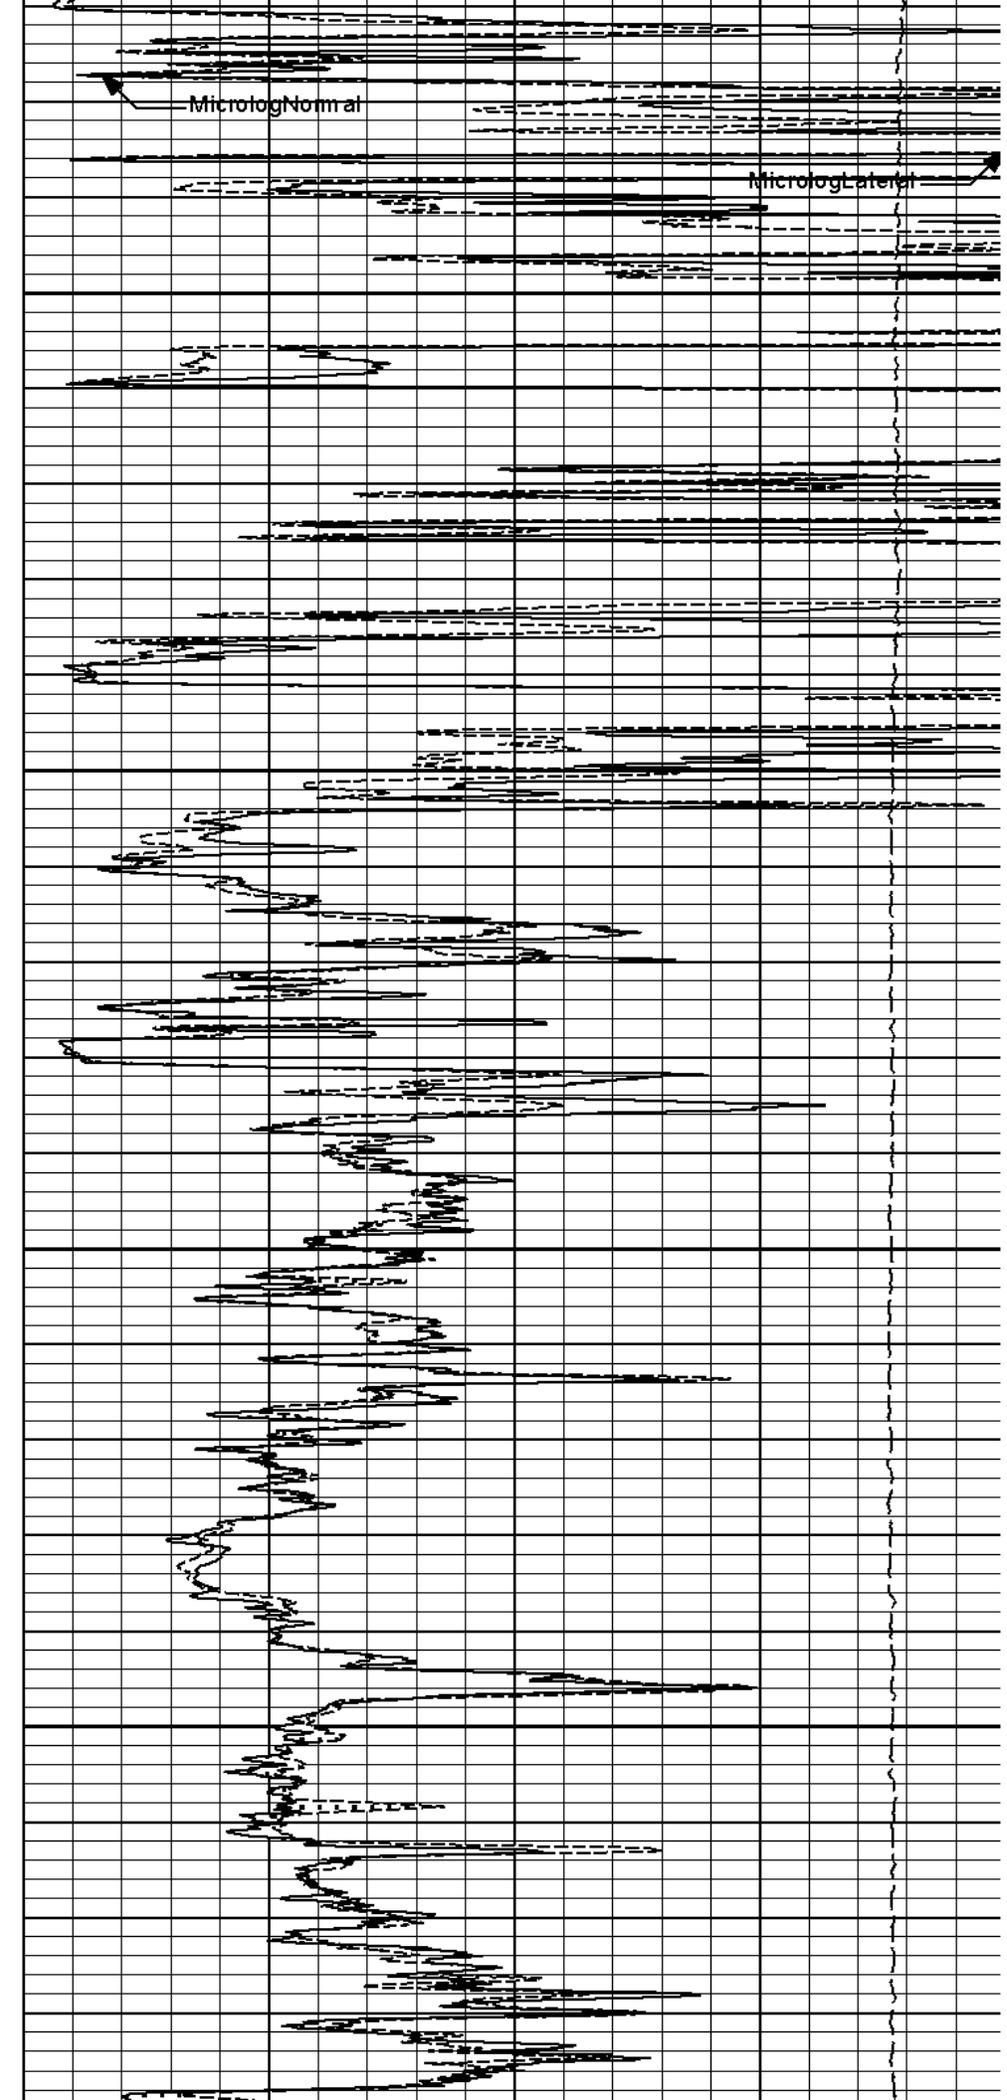

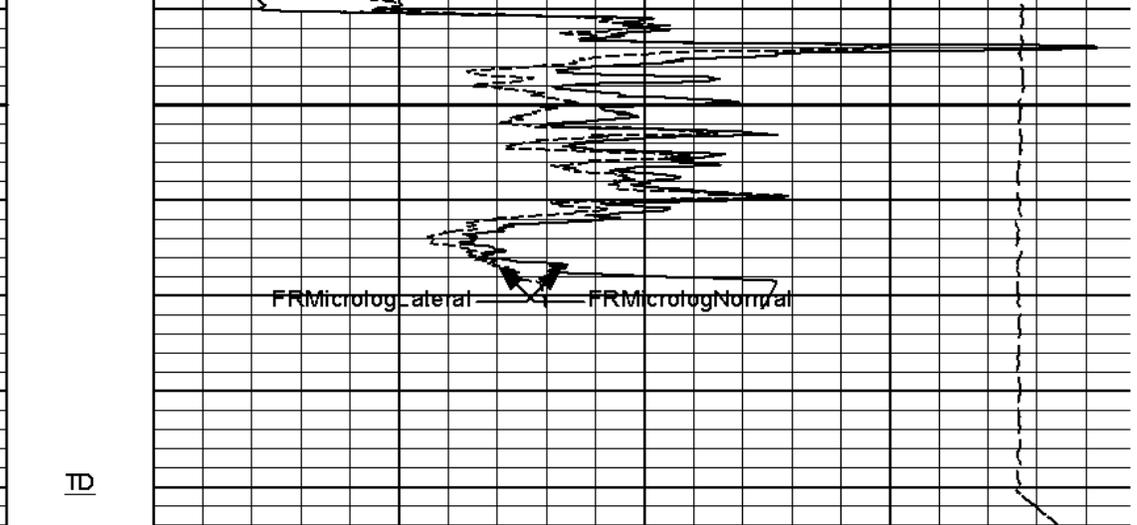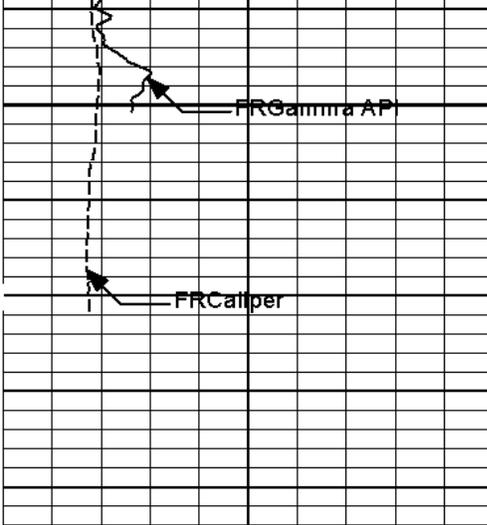

6	Caliper	16	1 : 240 ft	15K	Tension	0
	inches					
0	Gamma API	150	Tension Pull	0	MicrologLateral	20
	api		10		ohm-metre	
	SHALE		Tension Pull	0	MicrologNormal	20
					ohm-metre	
					PERMEABLE	

**HALLIBURTON**

Plot Time: 18-Apr-11 10:06:48  
 Plot Range: 3050 ft to 4694.67 ft  
 Data: TALBOTT\_6\_9\Well Based\DAQ-0001-003\  
 Plot File: \\-LOCAL-TALBOTT\_6\_9\Well Based\MICRO\Microlog\_IQ\_5\_main.lib


### 5 INCH MAIN LOG

**HALLIBURTON**

Plot Time: 18-Apr-11 10:06:48  
 Plot Range: 3500 ft to 4694.33 ft  
 Data: TALBOTT\_6\_9\Well Based\DAQ-0001-002\  
 Plot File: \\-LOCAL-TALBOTT\_6\_9\Well Based\MICRO\Microlog\_IQ\_5\_rep.lib


### REPEAT SECTION


					PERMEABLE	
	SHALE		0	MicrologNormal		20
				ohm-metre		
6	Caliper	16	0	MicrologLateral		20
	inches			ohm-metre		
0	Gamma API	150	1 : 240	15K	Tension	0
	api		ft		pounds	
			3500			

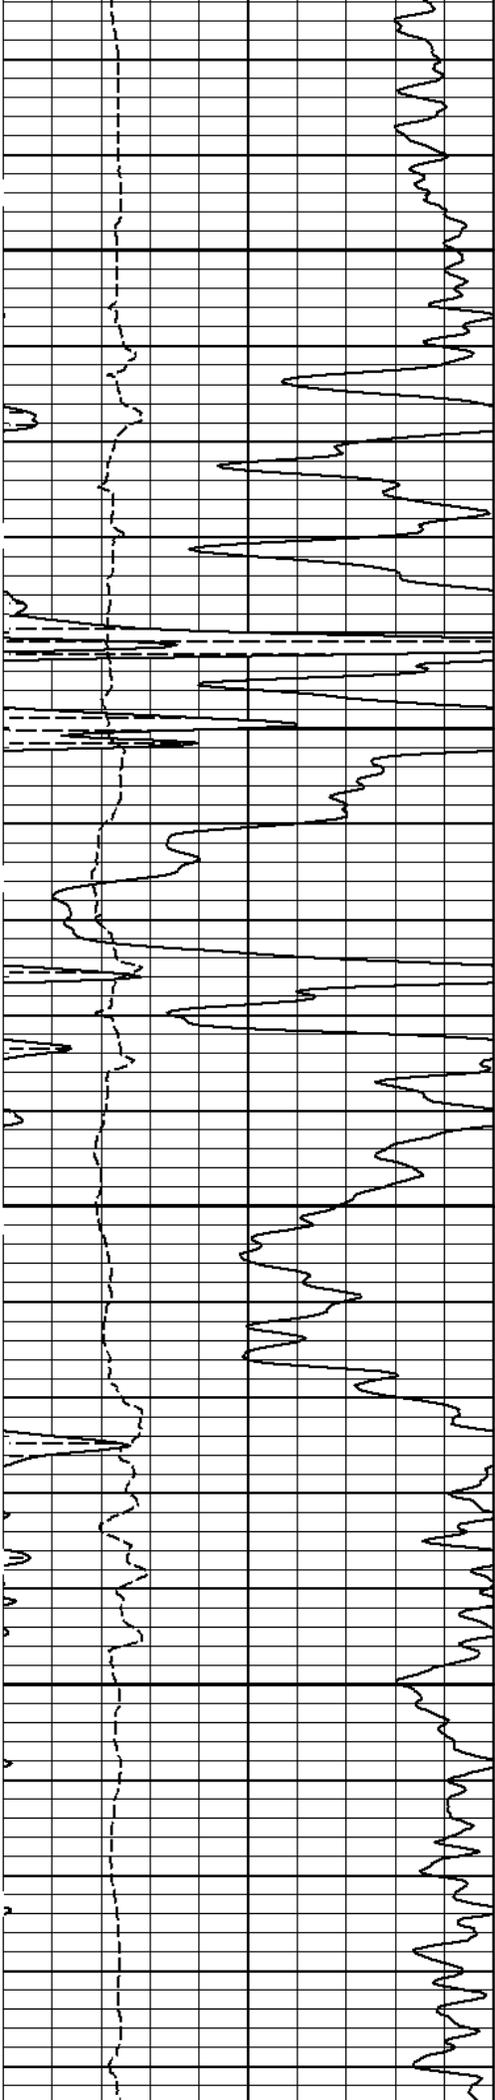

3600


3700

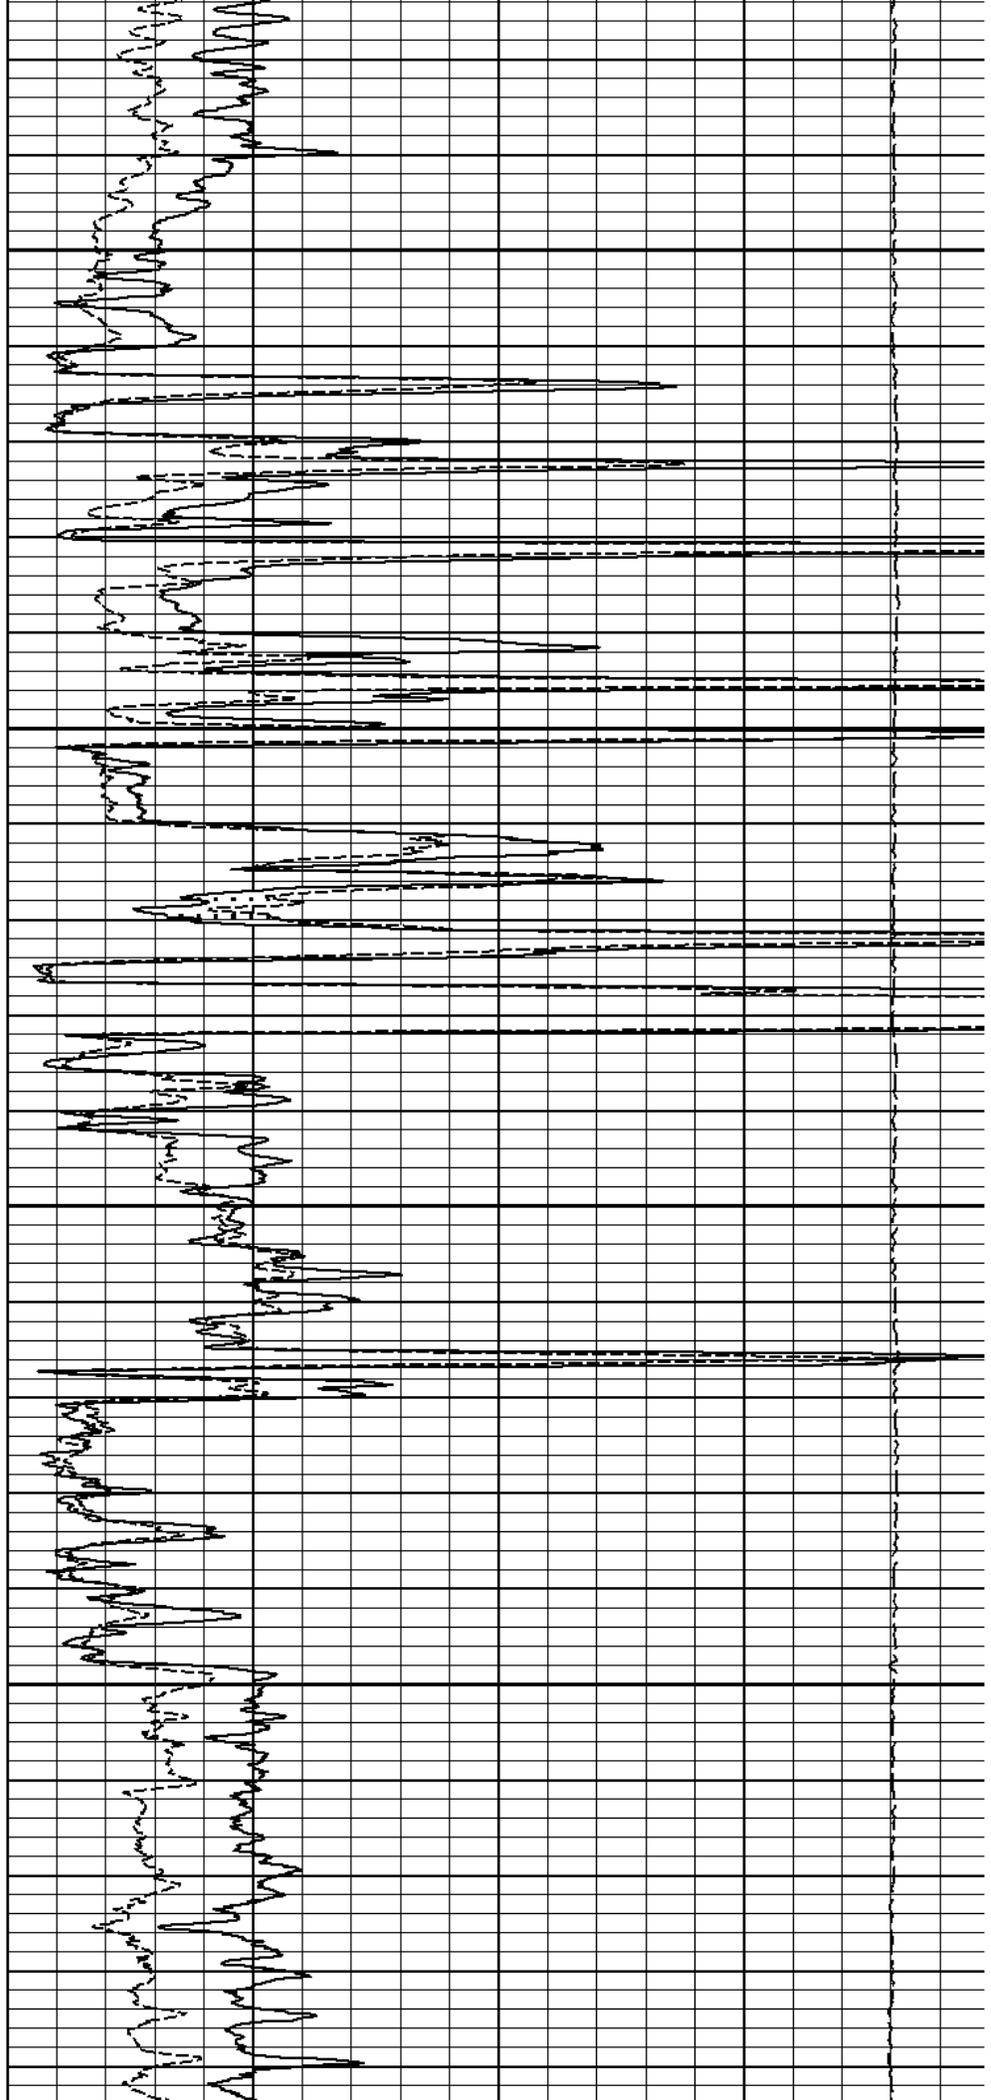


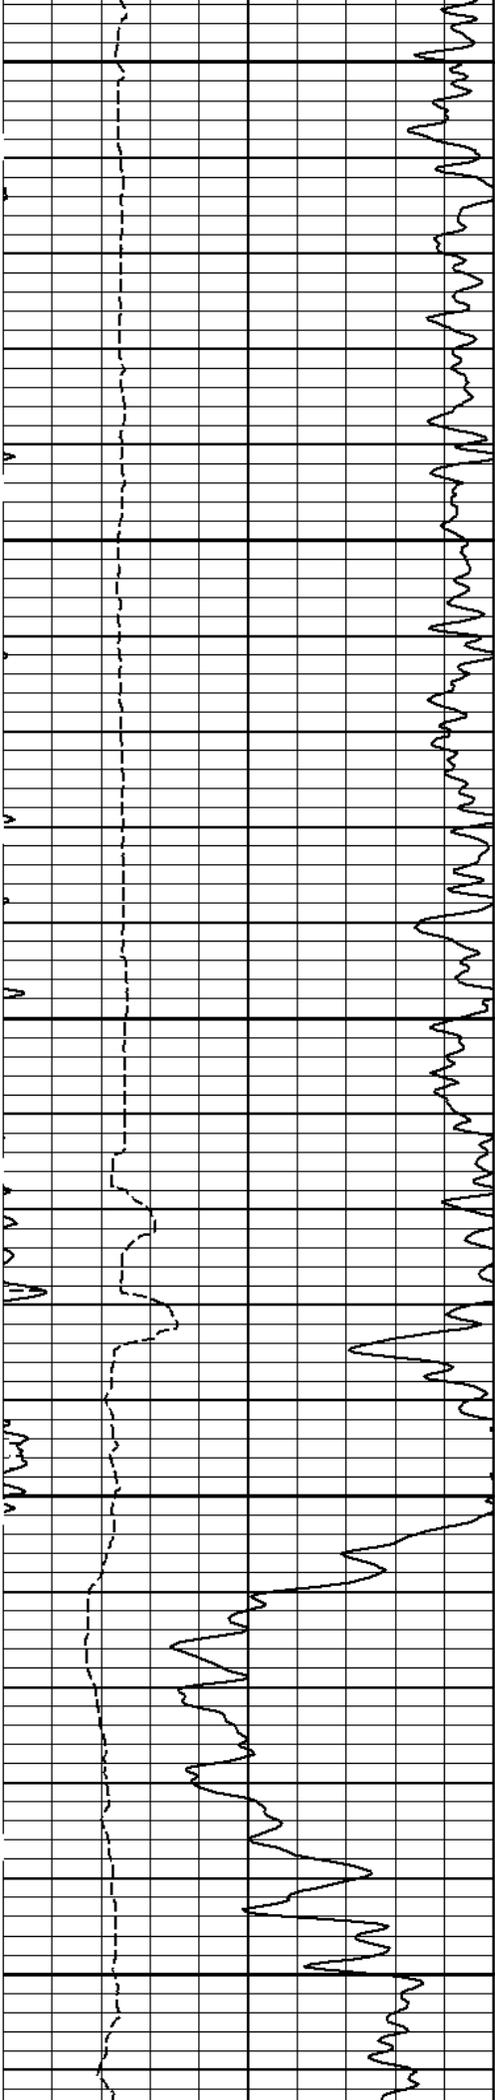

3800


3900

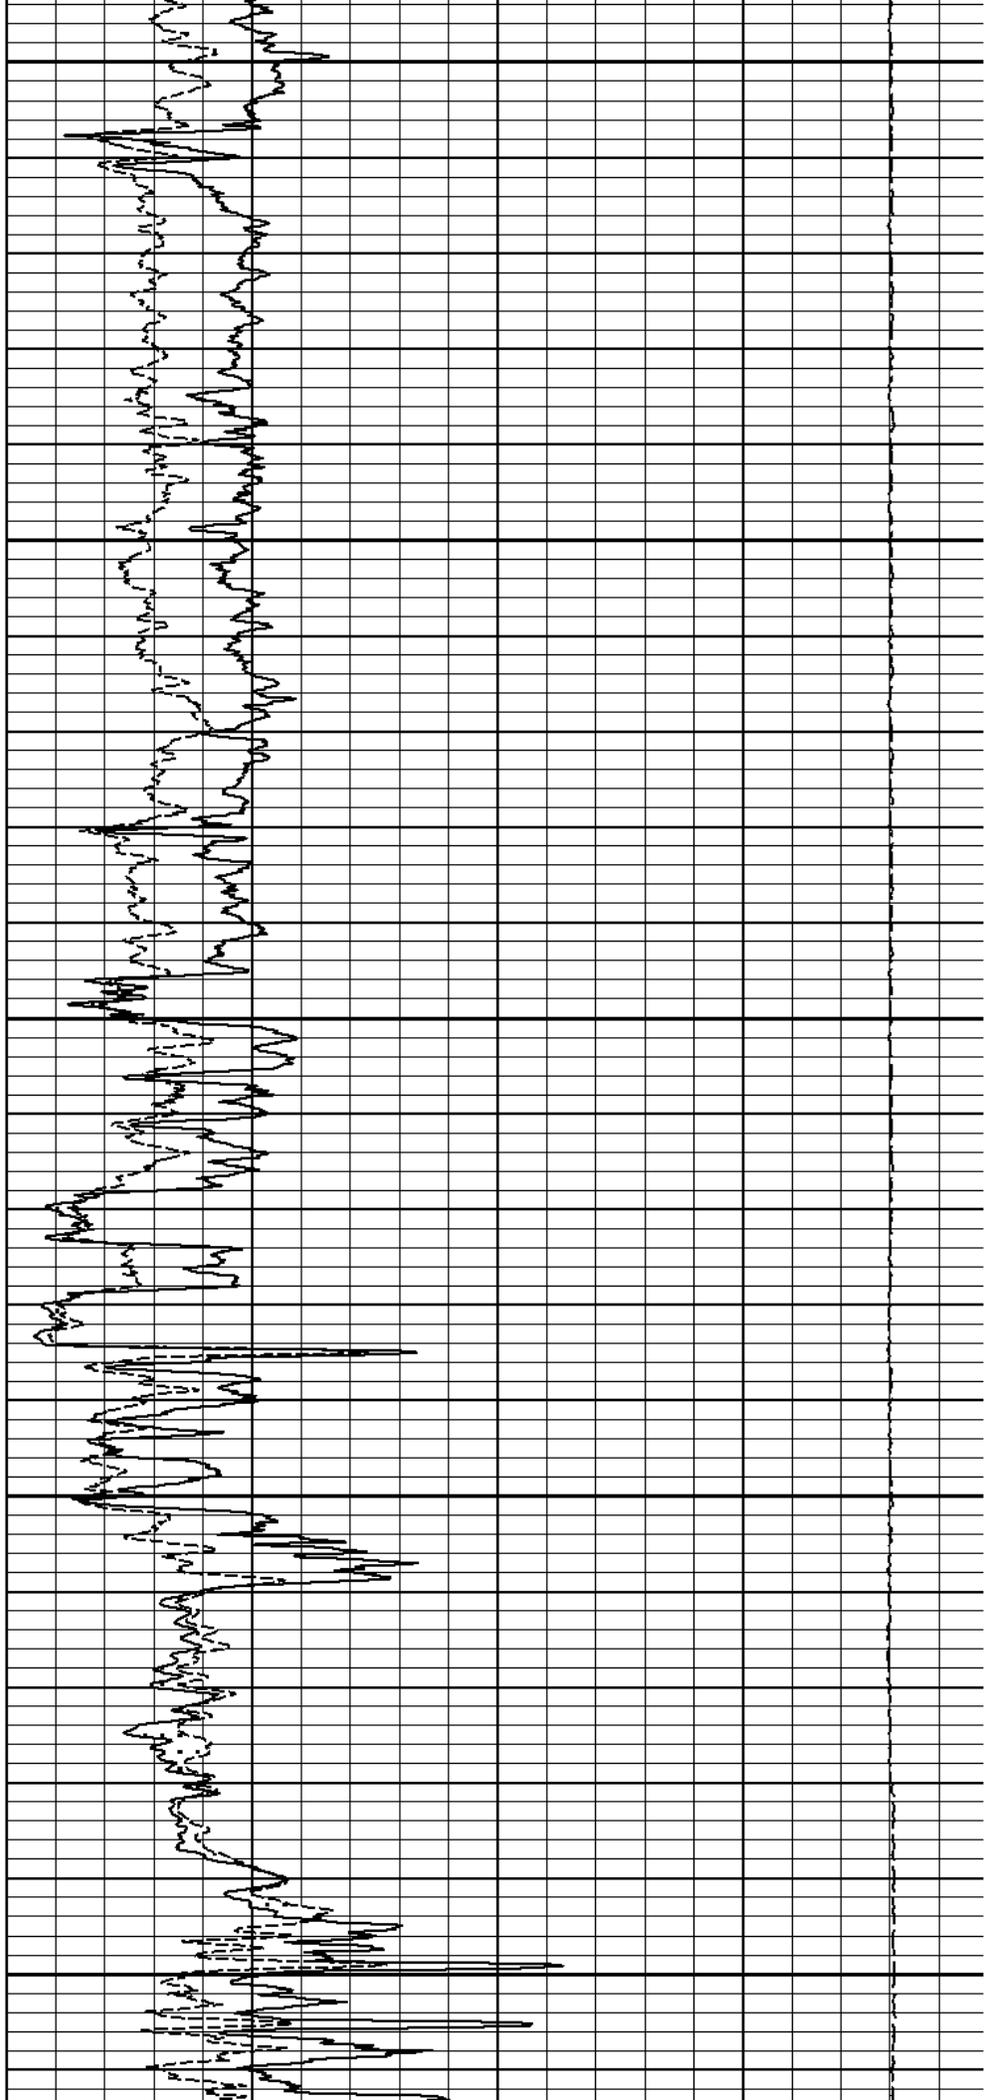


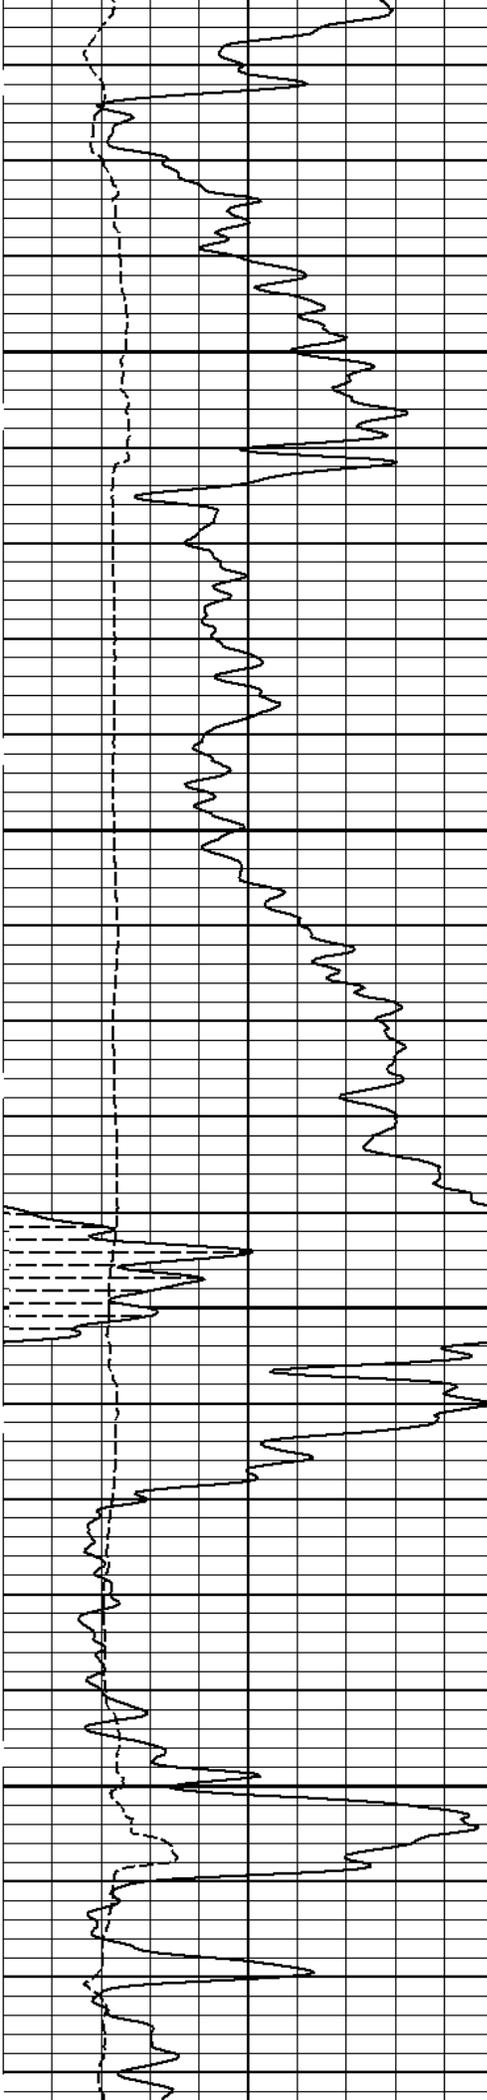

4000

4100

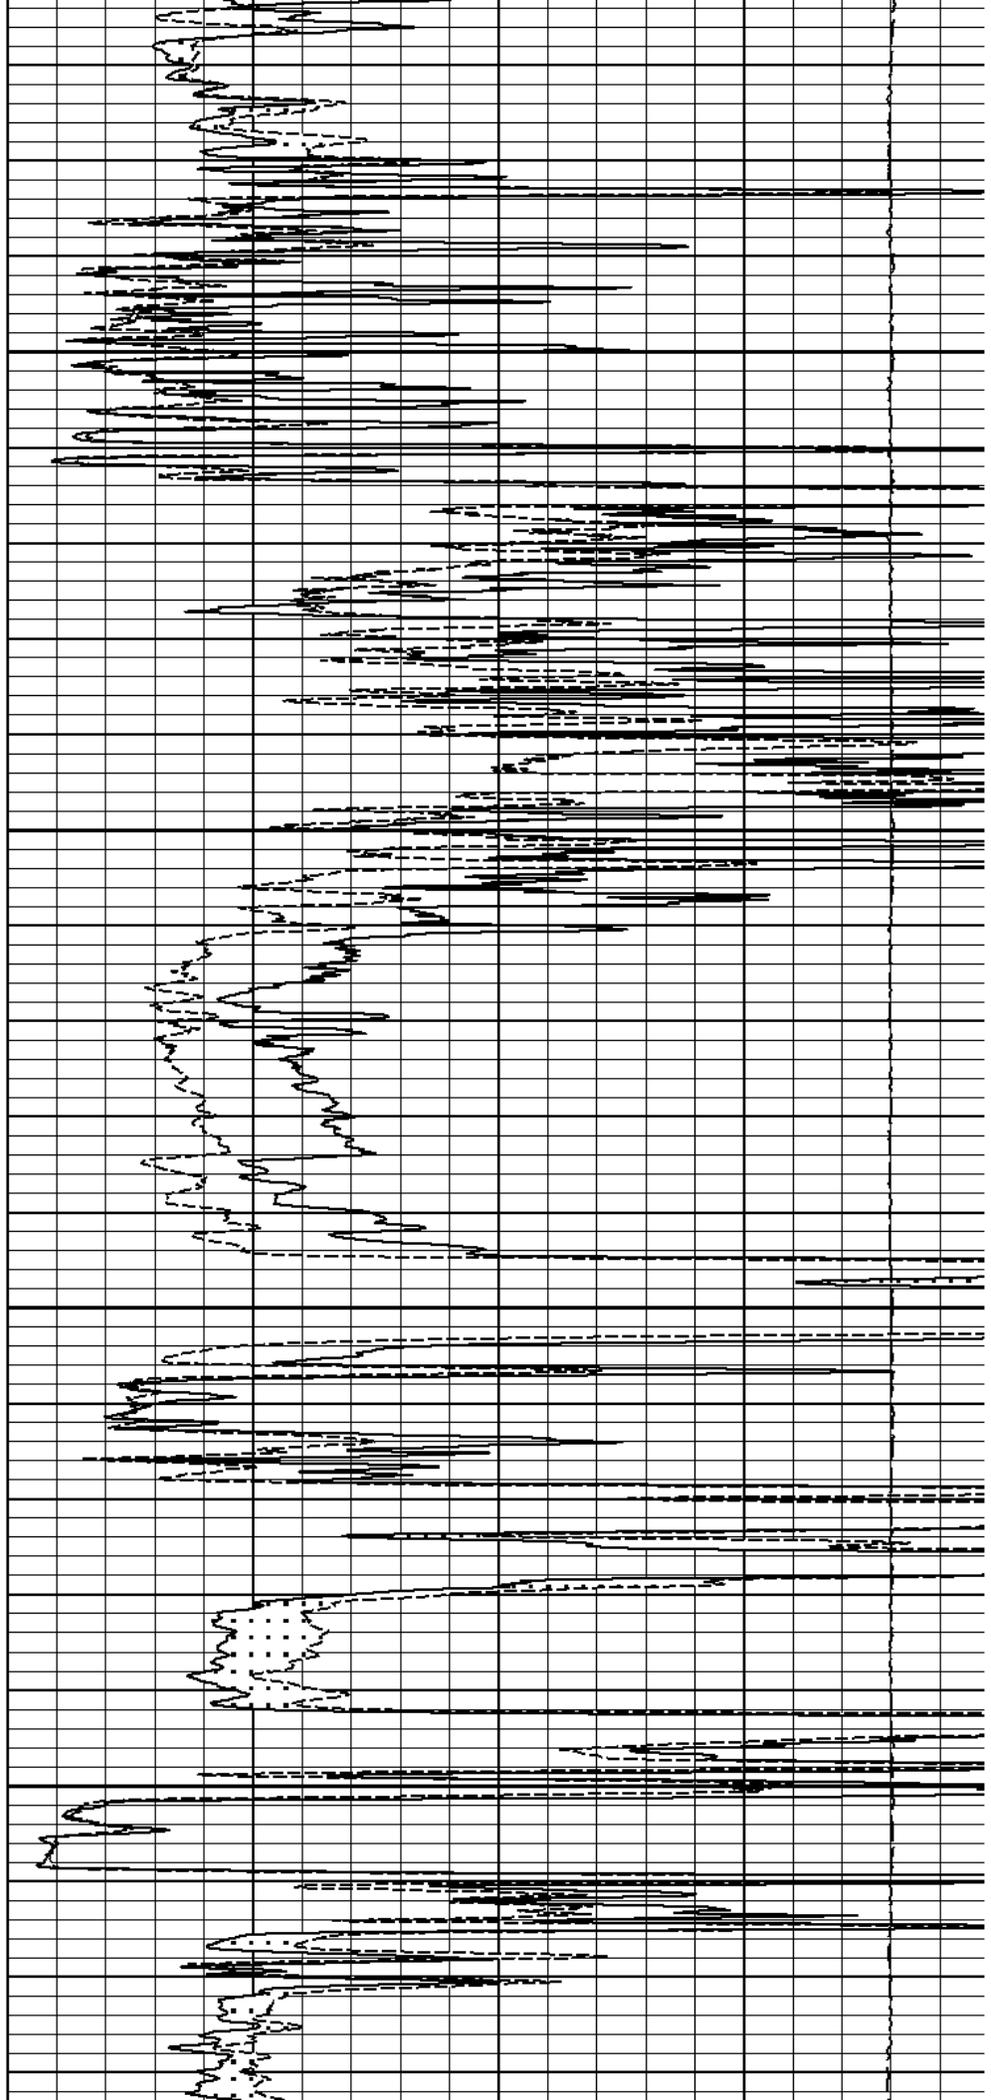


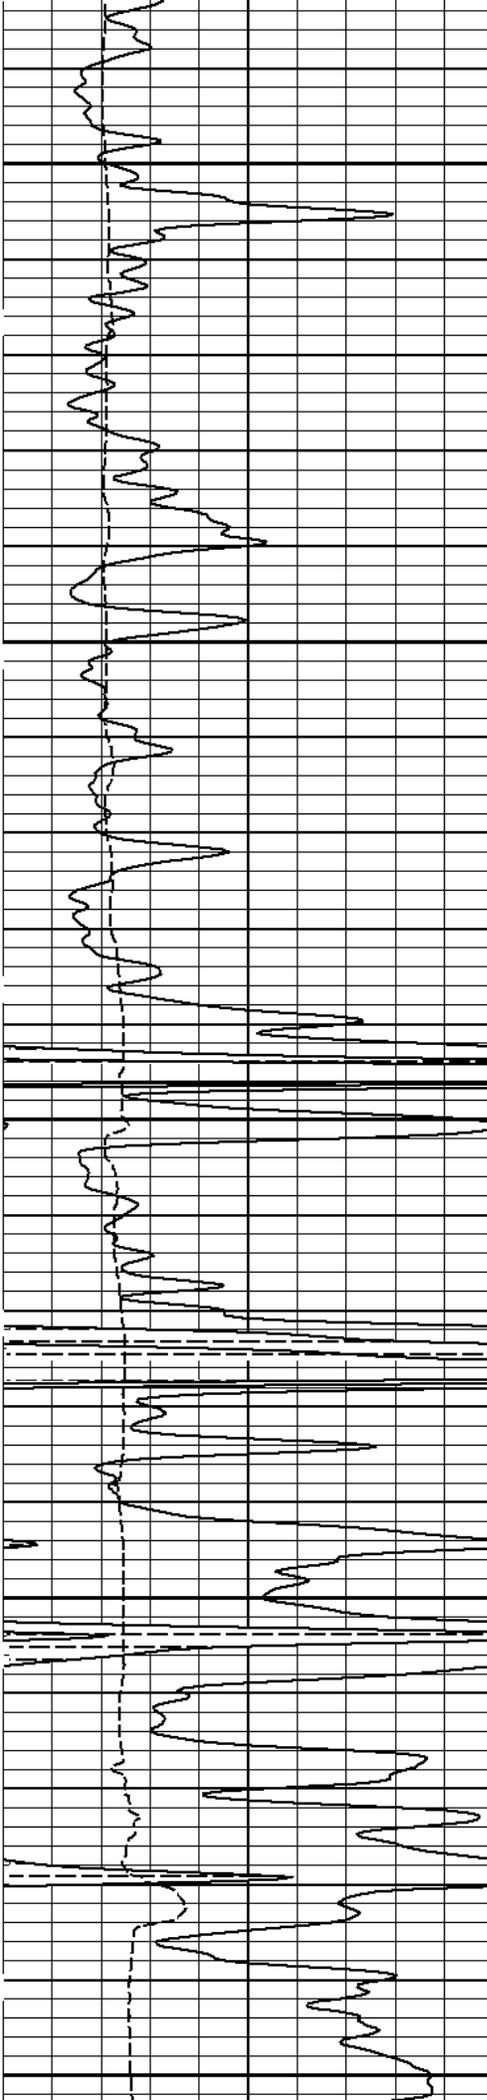


4200

4300


4400

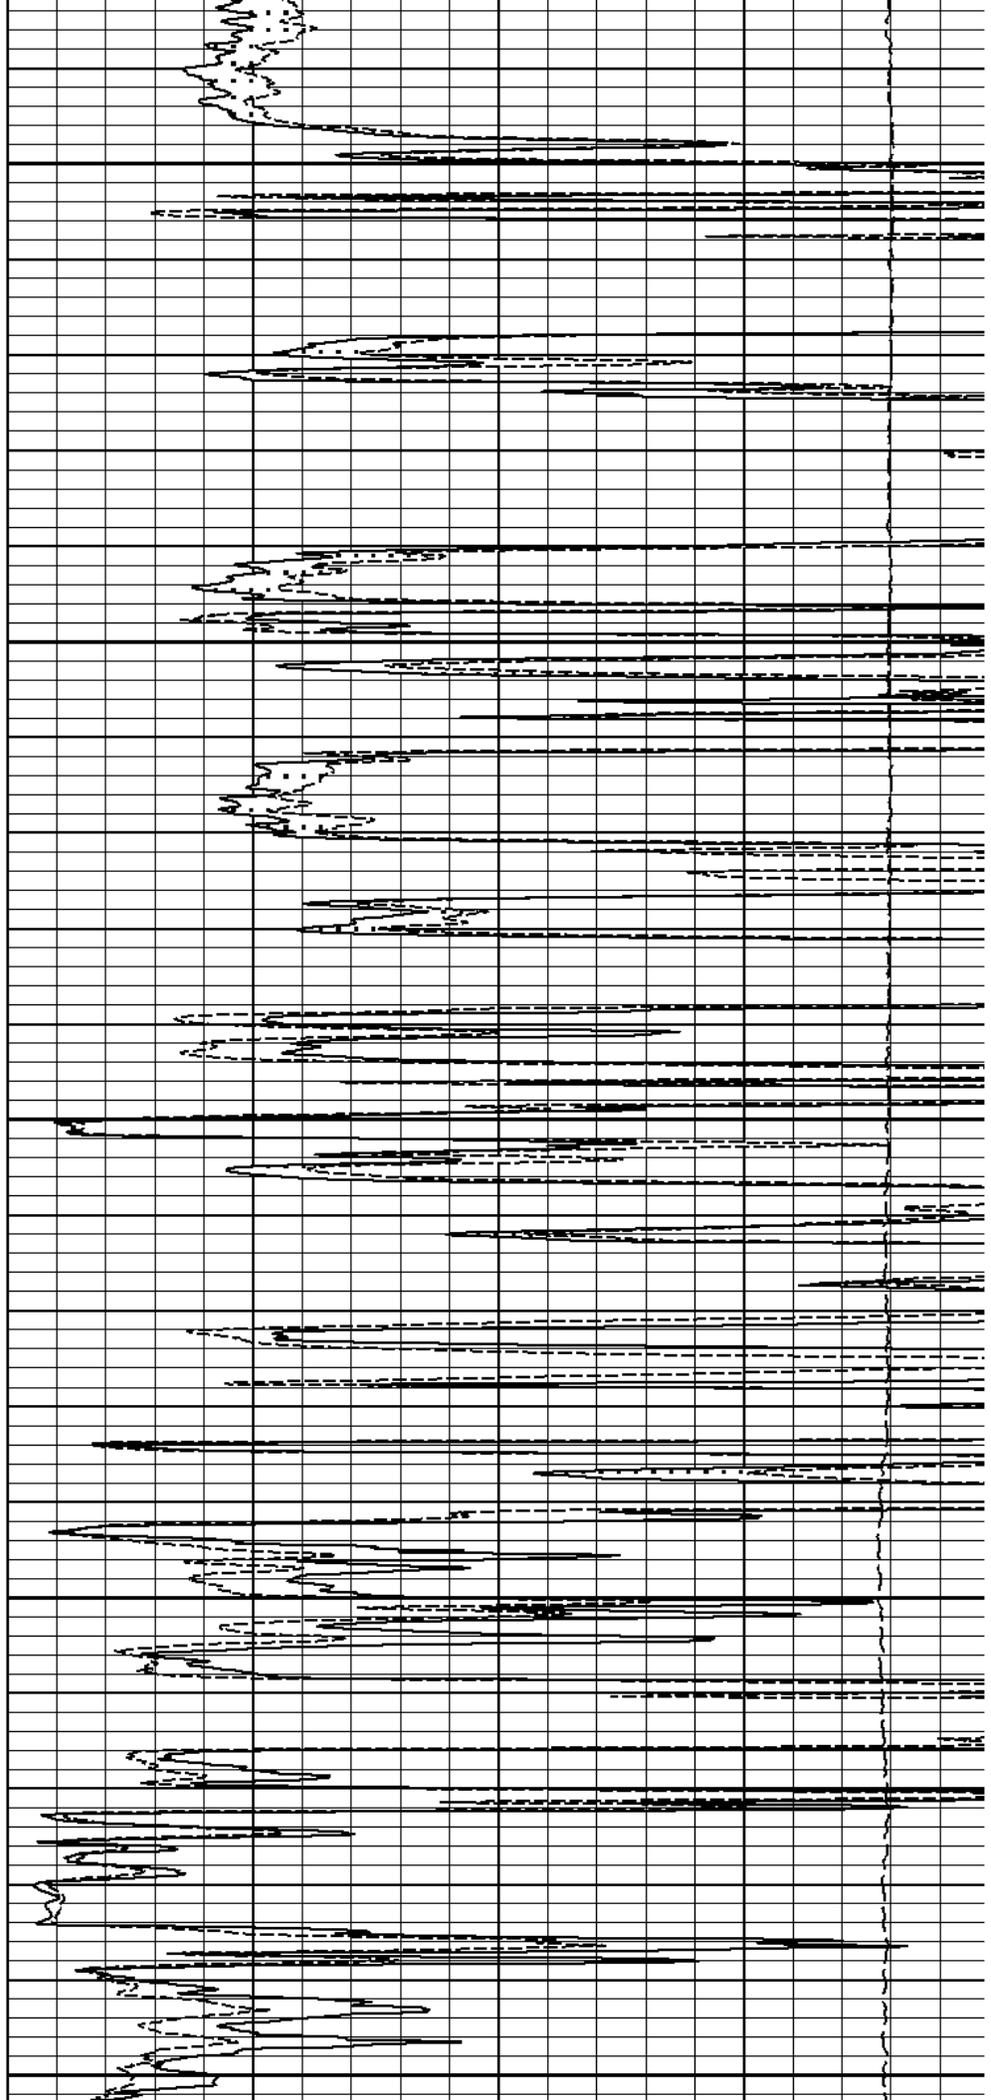

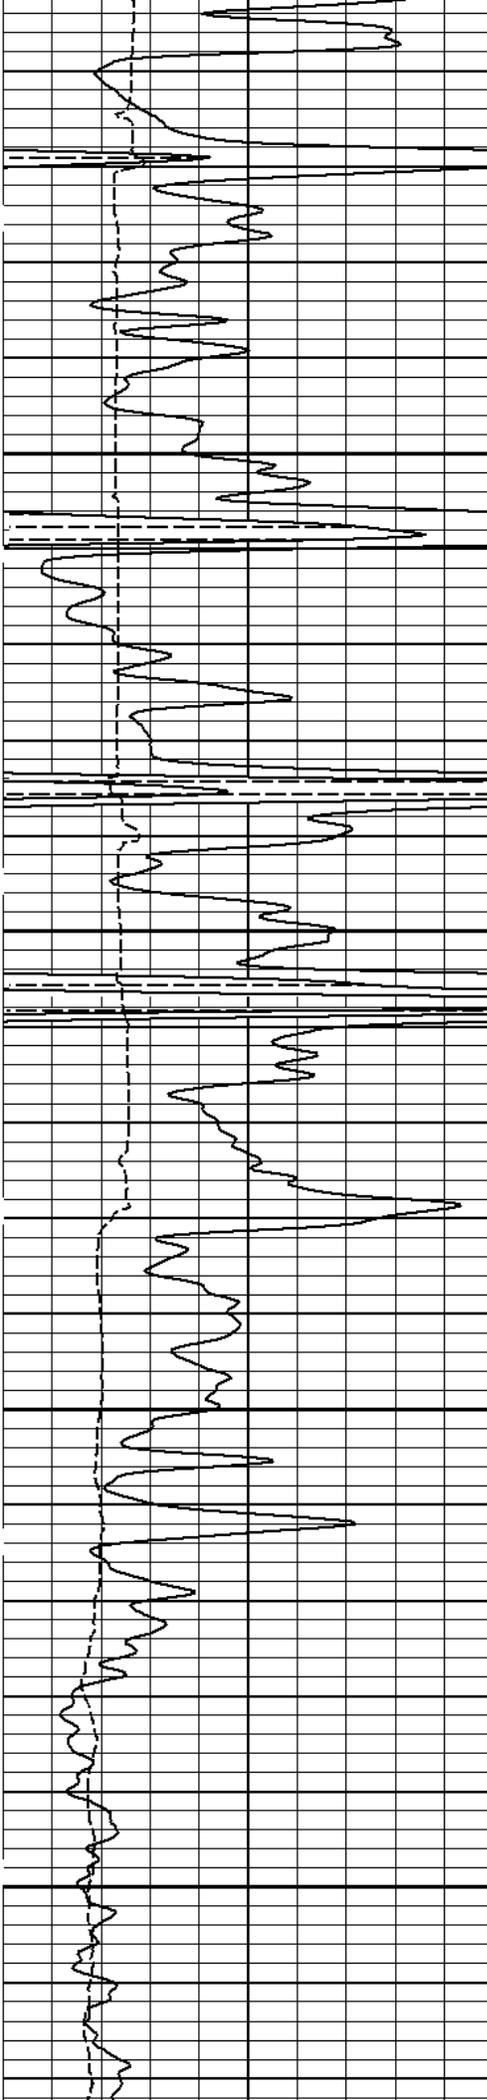


4500

4600

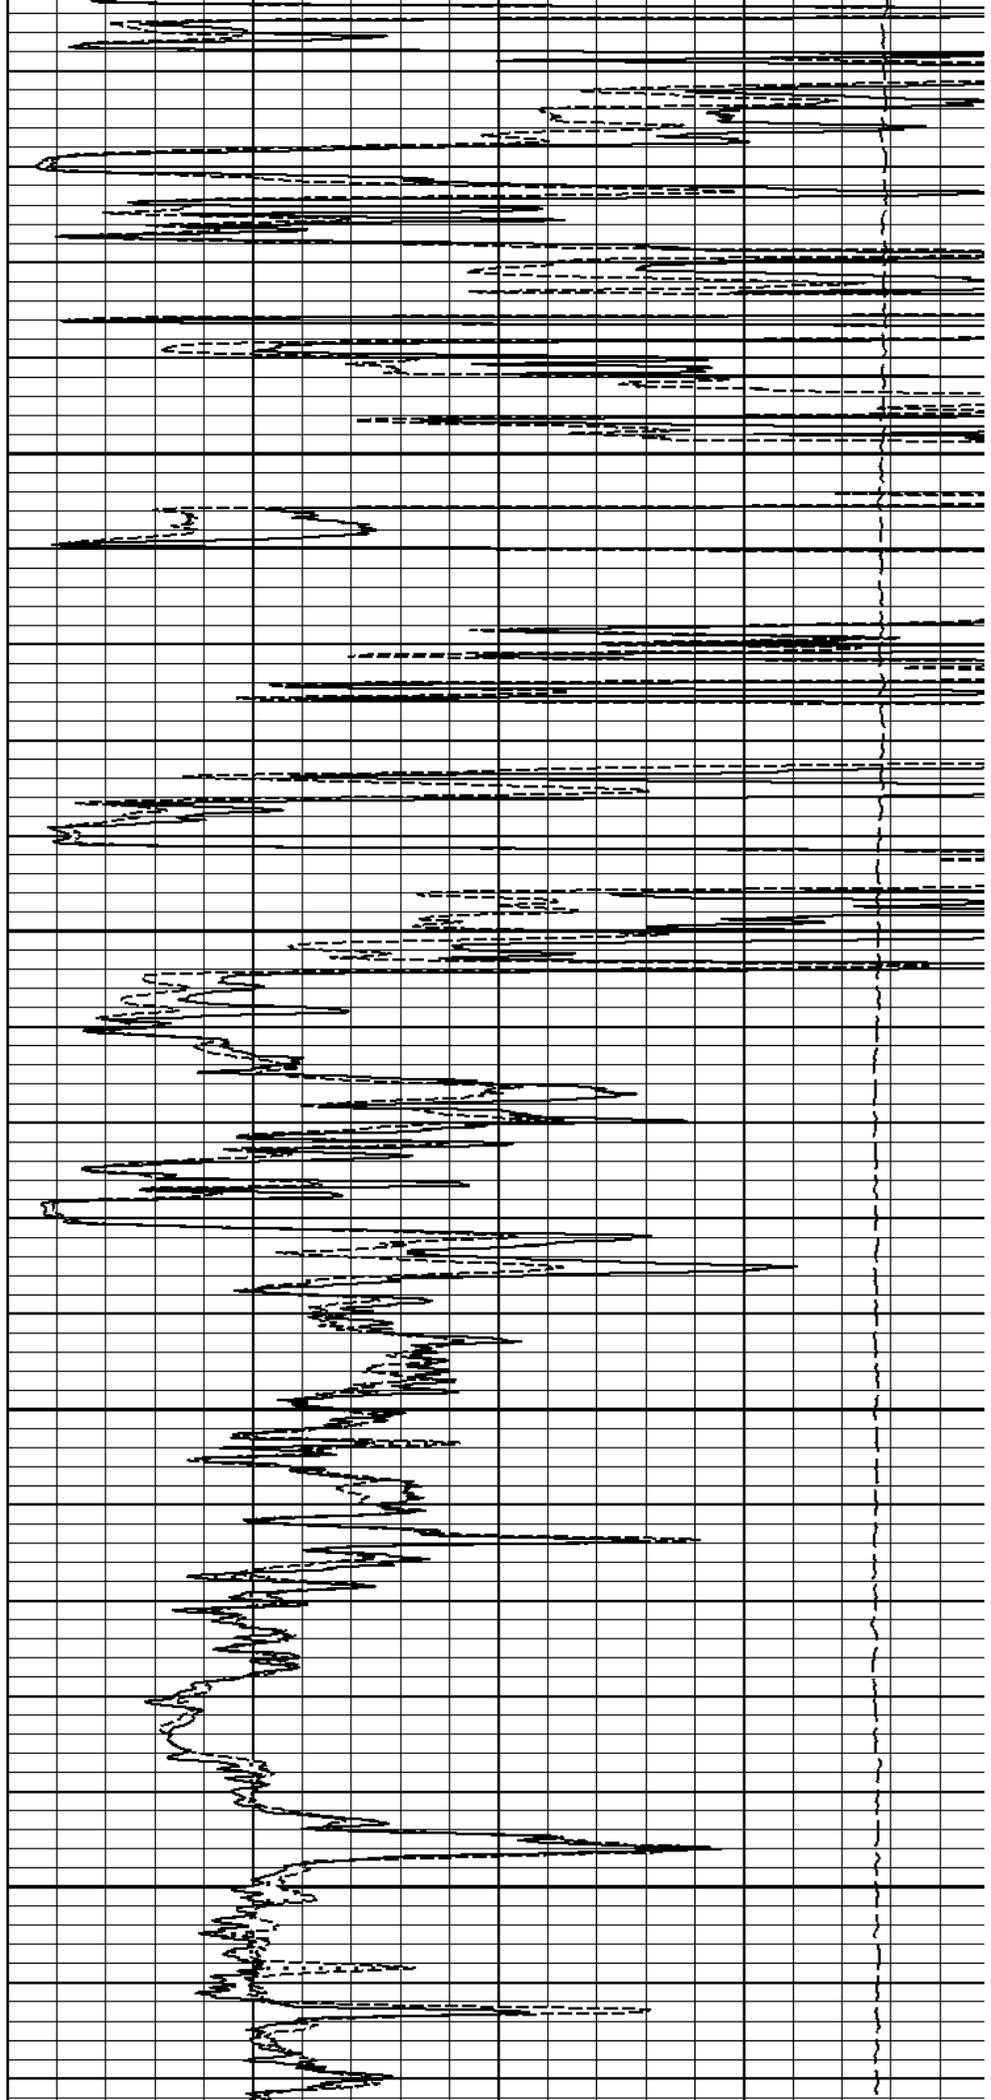



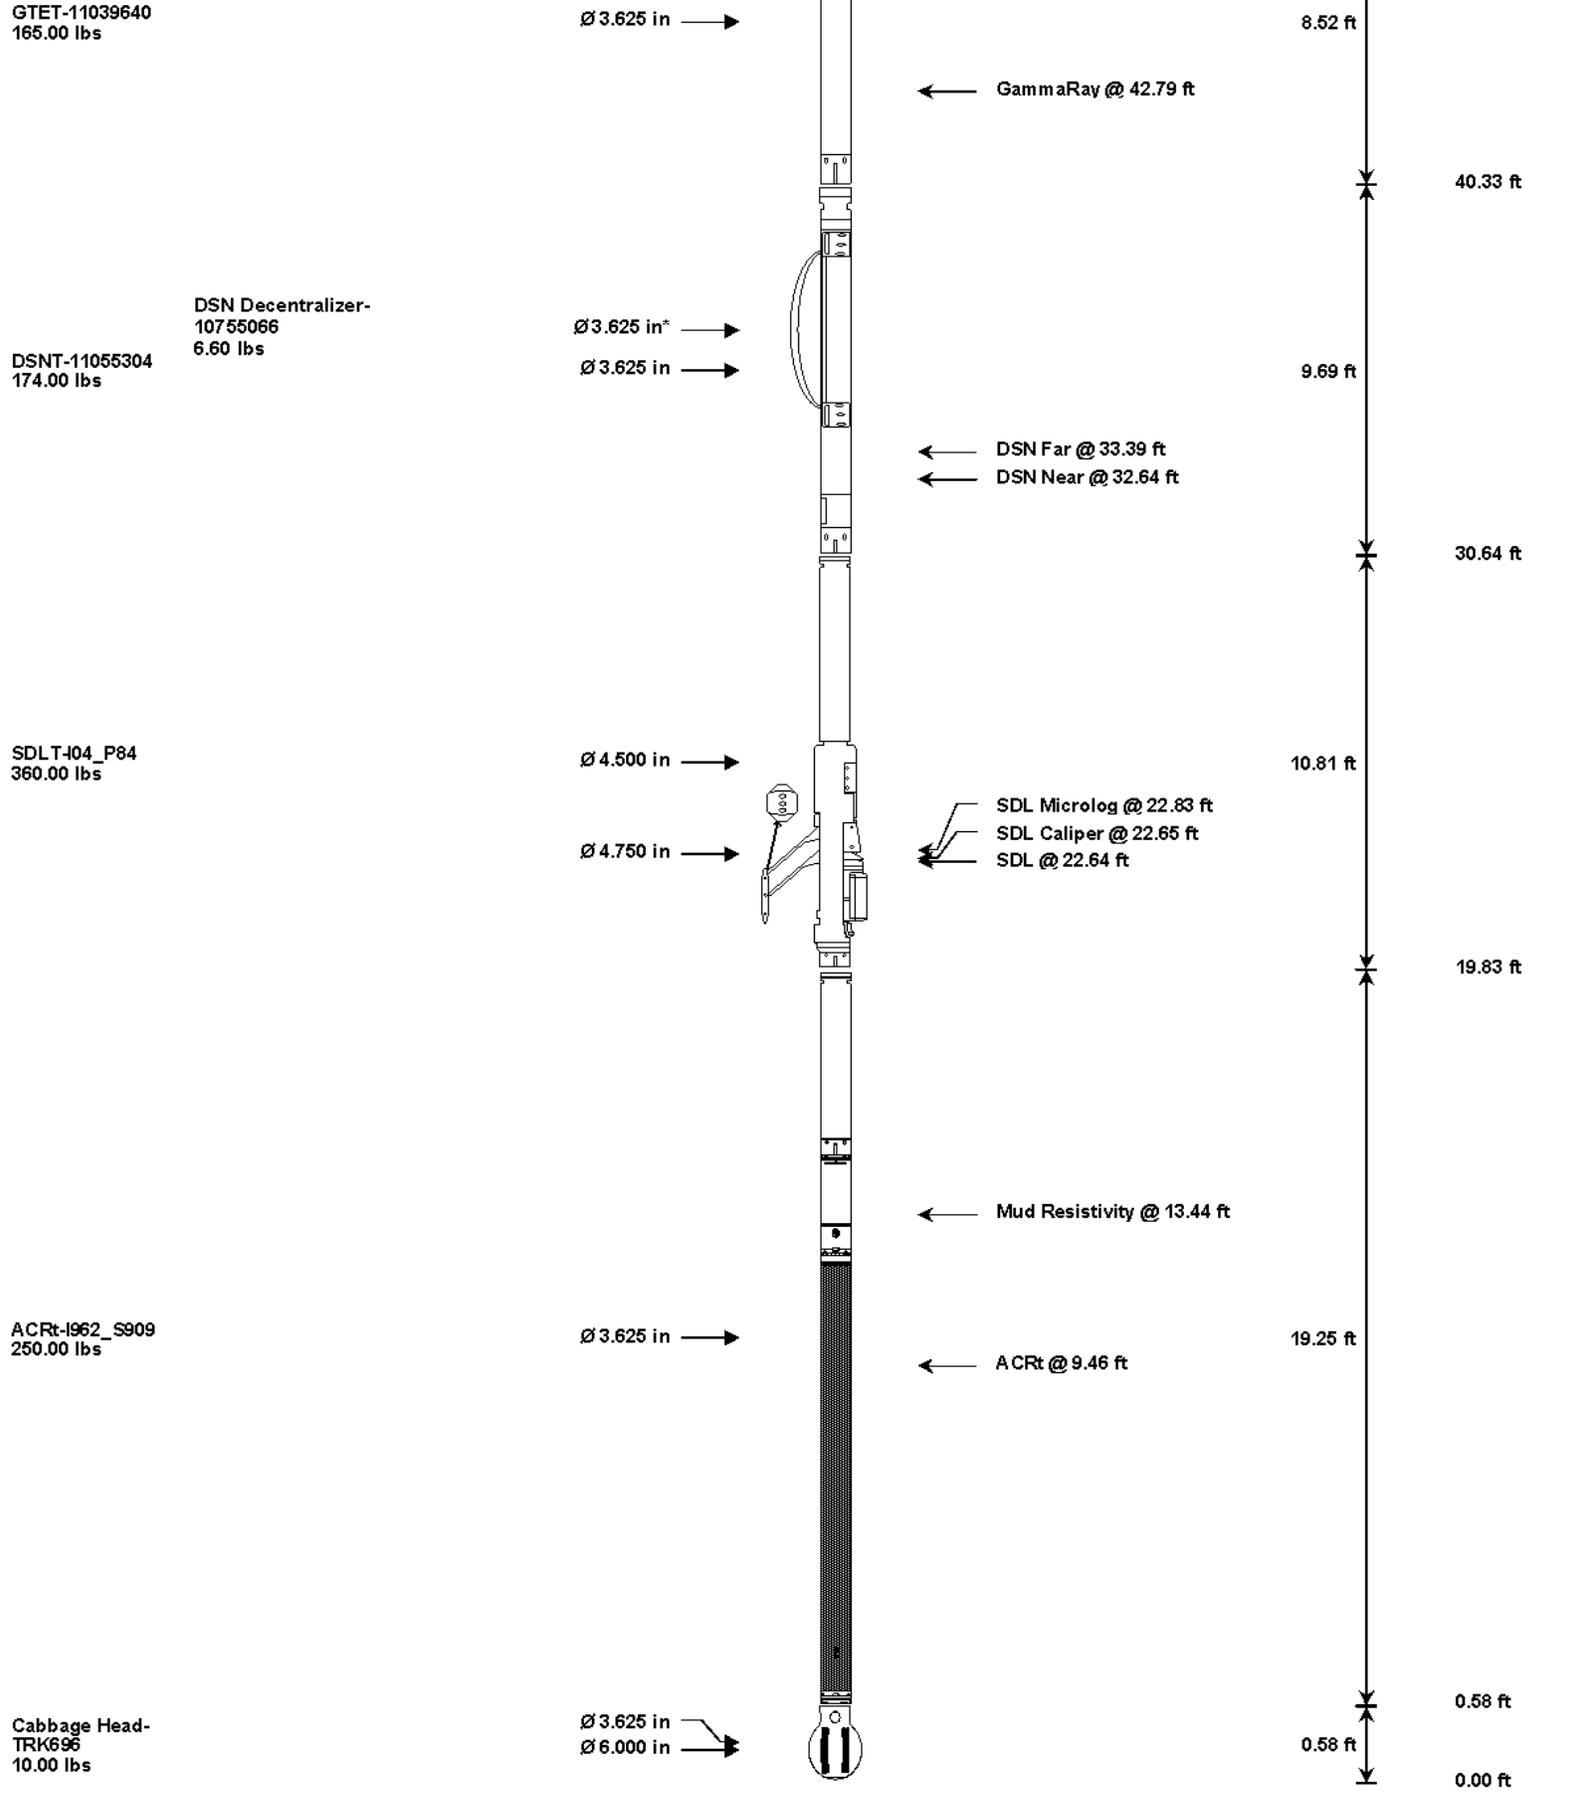

Mnemonic	Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max. Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell	CH_696	37.50	3.03	53.54	300.00
XOHD	Hostile to Dits Cross Over	TRK696	20.00	0.95	52.59	300.00
SP	SP Sub	PROT01	60.00	3.74	48.85	300.00
GTET	Gamma Telemetry Tool	11039640	165.00	8.52	40.33	60.00
DSNT	Dual Spaced Neutron	11055304	174.00	9.69	30.64	60.00
DCNT	DSN Decentralizer	10755066	6.60	5.13	33.97	300.00
SDLT	Spectral Density Tool	I04_P84	360.00	10.81	19.83	60.00

ACRT	Array Compensated True Resistivity	I962_S909	250.00	19.25	0.58	300.00
CBHD	Cabbage Head	TRK696	10.00	0.58	0.00	300.00

**Total** **1,083.10**   **56.57**

\* Not included in Total Length and Length Accumulation.

Data: TALBOTT\_6\_9I0001 SP-GTET-DSN-SDL-ACRT-CHIDLE Date: 18-Apr-11 08:05:37

# HALLIBURTON

## CALIBRATION REPORT

### MICRO LOG SHOP CALIBRATION

<b>Tool Name:</b> SDLT - I04_P84	<b>Reference Calibration Date:</b> 04-Oct-10 13:27:27
<b>Engineer:</b> S. JUNG	<b>Calibration Date:</b> 27-Mar-11 01:14:31
<b>Software Version:</b> WL INSITE R3.2.0 (Build 7)	<b>Calibration Version:</b> 1

### CALIBRATION COEFFICIENT SUMMARY

Measurement	Micro Log Normal		Micro Log Lateral		Units
	Measured	Calibrated	Measured	Calibrated	
Tool Zero	-0.07	-0.07	-0.05	-0.04	ohm m
Calibration Point #1	-0.00	0.00	-0.02	0.00	ohm m
Calibration Point #2	19.99	20.00	19.95	20.00	ohm m
Internal Reference	19.91	19.92	19.88	19.93	ohm m

Measurement	Micro Log Normal	Micro Log Lateral	Units
	Tool Value	Tool Value	
Tool Zero	-0.35	0.00	V
Calibration Point #1	17.52	12.77	V
Calibration Point #2	5358.02	7028.86	V
Internal Reference	5336.86	7004.98	V

### CALIBRATION SUMMARY

Sensor	Shop	Field	Post	Difference	Tolerance	Units
<b>SDLT-I04_P84</b>						
MicroLog Normal	19.92	-----	-----	0.00	-----	ohm m
MicroLog Lateral	19.93	-----	-----	0.00	-----	ohm m

Data: TALBOTT\_6\_9I0001 SP-GTET-DSN-SDL-ACRT-CHIDLE Date: 18-Apr-11 08:26:00

# HALLIBURTON

## PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP	DSNT	DNOK	Process DSN?	No	
	SDLT	DNOK	Process Density?	No	
	SDLT	MLOK	Process MicroLog Outputs?	No	
3040.00	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDBS	Mud Base	Water	

SHARED	MDWT	Borehole Fluid Weight	9.100	ppg
SHARED	WAGT	Weighting Agent	Barite	
SHARED	BSAL	Borehole salinity	0.00	ppm
SHARED	FSAL	Formation Salinity NaCl	0.00	ppm
SHARED	KPCT	Percent K in Mud by Weight?	0.00	%
SHARED	RMUD	Mud Resistivity	0.548	ohm m
SHARED	TRM	Temperature of Mud	75.0	degF
SHARED	CSD	Logging Interval is Cased?	No	
SHARED	ICOD	AHV Casing OD	5.500	in
SHARED	ST	Surface Temperature	75.0	degF
SHARED	TD	Total Well Depth	4691.00	ft
SHARED	BHT	Bottom Hole Temperature	120.0	degF
SHARED	SVTM	Navigation and Survey Master Tool	NONE	
SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
SHARED	TEMM	Temperature Master Tool	NONE	
SHARED	BHSM	Borehole Size Master Tool	NONE	
GTET	GROK	Process Gamma Ray?	Yes	
GTET	GRSO	Gamma Tool Standoff	0.000	in
GTET	GEOK	Process Gamma Ray EVR?	No	
GTET	TPOS	Tool Position	Centered	
DSNT	DNOK	Process DSN?	Yes	
DSNT	DEOK	Process DSN EVR?	No	
DSNT	NLIT	Neutron Lithology	Limestone	
DSNT	DNSO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.300	in
DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	DNOK	Process Density?	Yes	
SDLT	DNOK	Process Density EVR?	No	
SDLT	CB	Logging Calibration Blocks?	No	
SDLT	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT	DTWN	Disable temperature warning	No	
SDLT	DMA	Formation Density Matrix	2.710	g/cc
SDLT	DFL	Formation Density Fluid	1.000	g/cc
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT	MLOK	Process MicroLog Outputs?	Yes	
ACRT	RTOK	Process ACRT?	Yes	
ACRT	MNSO	Minimum Tool Standoff	1.50	in
ACRT	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRT	TPOS	Tool Position	Free Hanging	
ACRT	RMOP	Rmud Source	Mud Cell	
ACRT	RMIN	Minimum Resistivity for MAP	0.20	ohm m
ACRT	RMIN	Maximum Resistivity for MAP	200.00	ohm m
ACRT	THQY	Threshold Quality	0.50	

BOTTOM

Data: TALBOTT\_6\_910001 SP-GTET-DSN-SDL-ACRT-CHIDDLE

Date: 18-Apr-11 09:40:56

## HALLIBURTON

### INPUTS, DELAYS AND FILTERS TABLE

Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
----------	-------------------	------------	-------------	--------------------

## Depth Panel

TENS	Tension		0.00	NO	
<b>CH_HOS</b>					
DHTN	DownholeTension		0.00	BLK	0.000
<b>SP Sub</b>					
PLTC	Plot Control Mask		50.81	NO	
SP	Spontaneous Potential		50.81	BLK	1.250
SPR	Raw Spontaneous Potential		50.81	NO	
SPO	Spontaneous Potential Offset		50.81	NO	
<b>GTET</b>					
TPUL	Tension Pull		42.79	NO	
GR	Natural Gamma Ray API		42.79	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API		42.79	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution		42.79	W	1.416 , 0.750
ACCZ	Accelerometer Z		0.00	BLK	0.083
DEVI	Inclination		0.00	NO	
<b>DSNT</b>					
TPUL	Tension Pull		32.54	NO	
RNDS	Near Detector Telemetry Counts		32.64	BLK	1.417
RFDS	Far Detector Telemetry Counts		33.39	TRI	0.583
DNTT	DSN Tool Temperature		32.64	NO	
DSNS	DSN Tool Status		32.54	NO	
ERND	Near Detector Telemetry Counts EVR		32.64	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR		33.39	BLK	0.000
ENTM	DSN Tool Temperature EVR		32.64	NO	
<b>SDLT</b>					
TPUL	Tension Pull		22.64	NO	
NAB	Near Above		22.46	BLK	0.920
NHI	Near Cesium High		22.46	BLK	0.920
NLO	Near Cesium Low		22.46	BLK	0.920
NVA	Near Valley		22.46	BLK	0.920
NBA	Near Barite		22.46	BLK	0.920
NDE	Near Density		22.46	BLK	0.920
NPK	Near Peak		22.46	BLK	0.920
NLI	Near Lithology		22.46	BLK	0.920
NBAU	Near Barite Unfiltered		22.46	BLK	0.250
NLIU	Near Lithology Unfiltered		22.46	BLK	0.250
FAB	Far Above		22.81	BLK	0.250
FHI	Far Cesium High		22.81	BLK	0.250
FLO	Far Cesium Low		22.81	BLK	0.250
FVA	Far Valley		22.81	BLK	0.250
FBA	Far Barite		22.81	BLK	0.250
FDE	Far Density		22.81	BLK	0.250
FPK	Far Peak		22.81	BLK	0.250
FLI	Far Lithology		22.81	BLK	0.250
PTMP	Pad Temperature		22.65	BLK	0.920
NHV	Near Detector High Voltage		19.83	NO	
FHV	Far Detector High Voltage		19.83	NO	
ITMP	Instrument Temperature		19.83	NO	
DDHV	Detector High Voltage		19.83	NO	
TPUL	Tension Pull		22.65	NO	
PCAL	Pad Caliper		22.65	TRI	0.250

ACAL	Arm Caliper	22.65	TRI	0.250
TPUL	Tension Pull	22.83	NO	
MINV	Microlog Lateral	22.83	BLK	0.750
MNOR	Microlog Normal	22.83	BLK	0.750
<b>ACRt</b>				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	

UDV	Upper Temperature Derivative	2.97	NO
TLDV	Lower Temperature Derivative	2.97	NO
TRBD	Receiver Board Temperature	2.97	NO

Data: TALBOTT\_6\_9\0001 SP-GTET-DSN-SDL-ACRT-CHIDLE Date: 18-Apr-11 08:26:41

COMPANY	<b>VAL ENERGY INC.</b>		
WELL	<b>TALBOTT #6-9</b>		
FIELD			
COUNTY	<b>BARBER</b>	STATE	<b>KANSAS</b>
<b>HALLIBURTON</b>		<b>MICROLOG</b>	