


HALLIBURTON


ARRAY COMPENSATED RESISTIVITY LOG


COMPANY				PIONEER NATURAL RESOURCES			
WELL				EVANS 4-25			
FIELD				GRANT			
COUNTY				KANSAS			
STATE				KANSAS			
Permanent Datum				GROUND LEVEL			
Log measured from				KELLY BUSHING			
Drilling measured from				KELLY BUSHING			
Date				05-Aug-10			
Run No.				ONE			
Depth - Driller				3025.00 ft			
Depth - Logger				2964.0 ft			
Bottom - Logged Interval				2941.0 ft			
Top - Logged Interval				604.0 ft			
Casing - Driller				8.625 in @ 606.0 ft			
Casing - Logger				604.0 ft			
Bit Size				7.875 in @			
Type Fluid in Hole				WATER BASED MUD			
Density				8.9 ppg 38.00 s/qt			
PH				12.00 pH 6.6 cp/m			
Source of Sample				MUD PIT			
Rm @ Meas. Temperature				0.190 ohmm @ 90.00 degF @			
Rmf @ Meas. Temperature				0.17 ohmm @ 90.00 degF @			
Rmc @ Meas. Temperature				0.230 ohmm @ 90.00 degF @			
Source Rmf				MEAS. MEAS.			
Rm @ BHT				0.18 ohmm @ 110.0 degF @			
Time Since Circulation				4.0 hr			
Time on Bottom				05-Aug-10 03:04			
Max. Rec. Temperature				110.0 degF @ 2964.0 ft @			
Equipment				10546696 LIBERAL			
Recorded By				T. BRIDGEMAN			
Witnessed By				D. BERRY			

Fold here


Service Ticket No.: 7480946										API Serial No.: 15-081-21713										PGM Version: WL INSITE R3.0.7 (Build 3)																			
CHANGE IN MUD TYPE OR ADDITIONAL SAMPLE															RESISTIVITY SCALE CHANGES																								
Date					Sample No.										Type Log					Depth					Scale Up Hole					Scale Down Hole									
Depth-Driller																																							
Type Fluid in Hole																																							
Density					Viscosity																																		
Ph					Fluid Loss																																		
Source of Sample															RESISTIVITY EQUIPMENT DATA																								
Rm @ Meas. Temp					@					@					Run No.					Tool Type & No.					Pad Type					Tool Pos.					Other				
Rmf @ Meas. Temp.					@					@					ONE					ACRT S8385					N/A					1.5" S.O.					N/A				
Rmc @ Meas. Temp.					@					@																													
Source Rmf					Rmc																																		
Rm @ BHT					@					@																													
Rmf @ BHT					@					@																													
Rmc @ BHT					@					@																													
EQUIPMENT DATA																																							
GAMMA					ACOUSTIC					DENSITY					NEUTRON																								
Run No.					ONE					Run No.										Run No.										Run No.									
Serial No.					11048627					Serial No.										Serial No.										Serial No.									
Model No.					GTET					Model No.										Model No.										Model No.									
Diameter					3.625"					No. of Cent.										Diameter										Diameter									
Detector Model No.					T-102					Spacing										Log Type										Log Type									
Type					SCINT															Source Type										Source Type									
Length					8"					LSA [Y/N]										Serial No.										Serial No.									
Distance to Source					10'					FWDA [Y/N]										Strength										Strength									
LOGGING DATA																																							
GENERAL					GAMMA					ACOUSTIC					DENSITY					NEUTRON																			

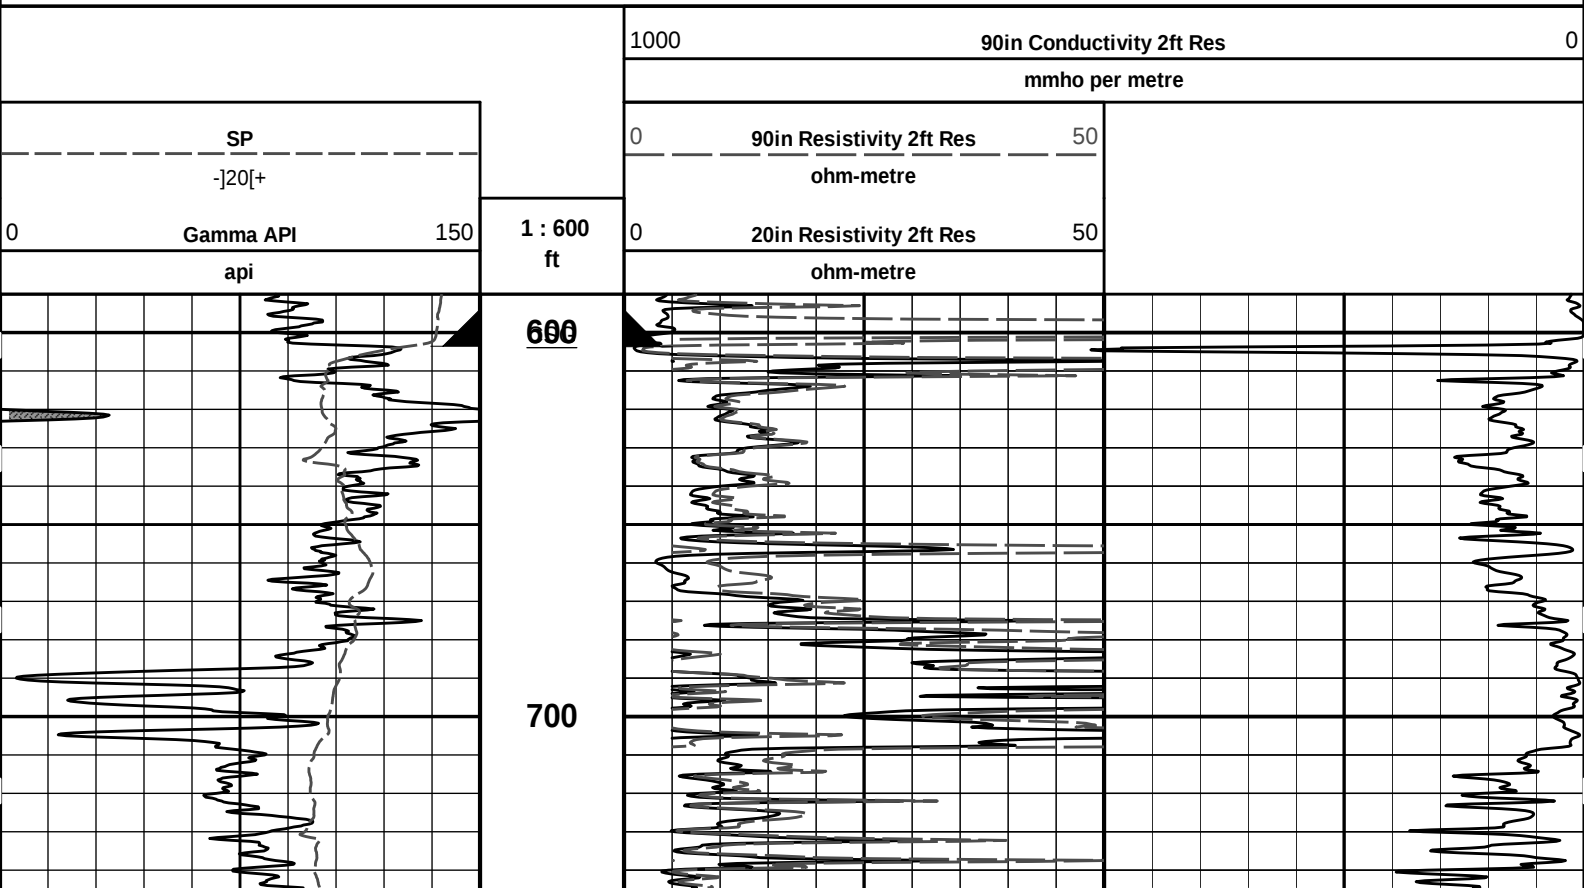

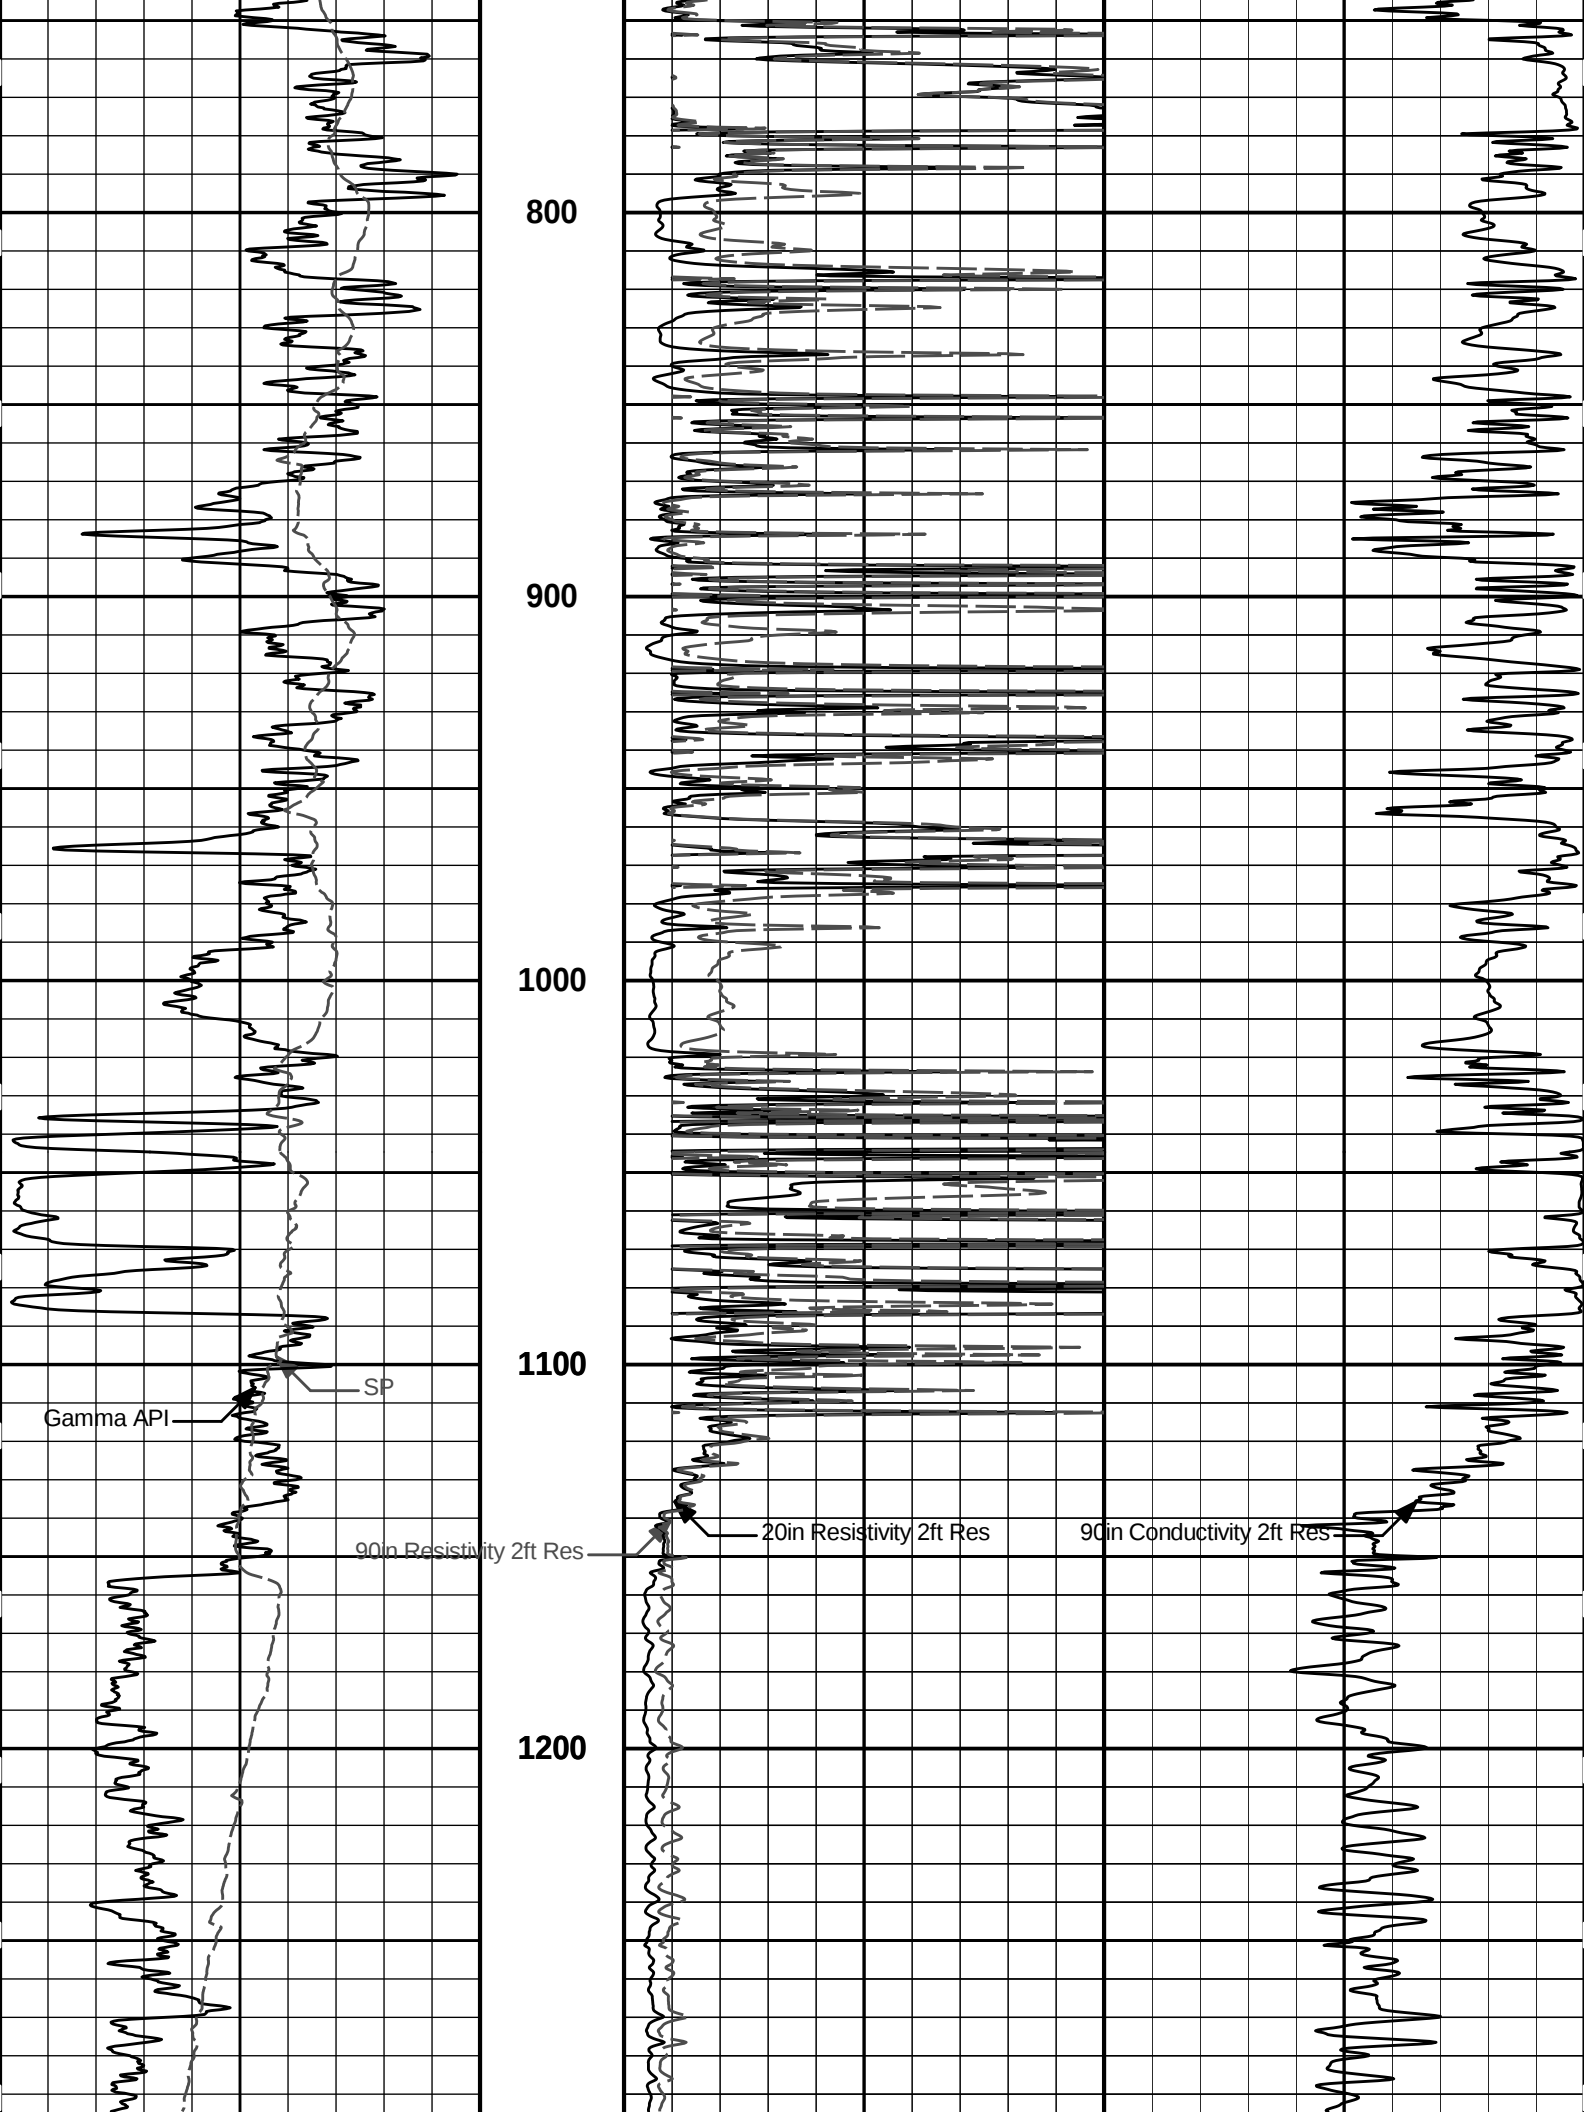

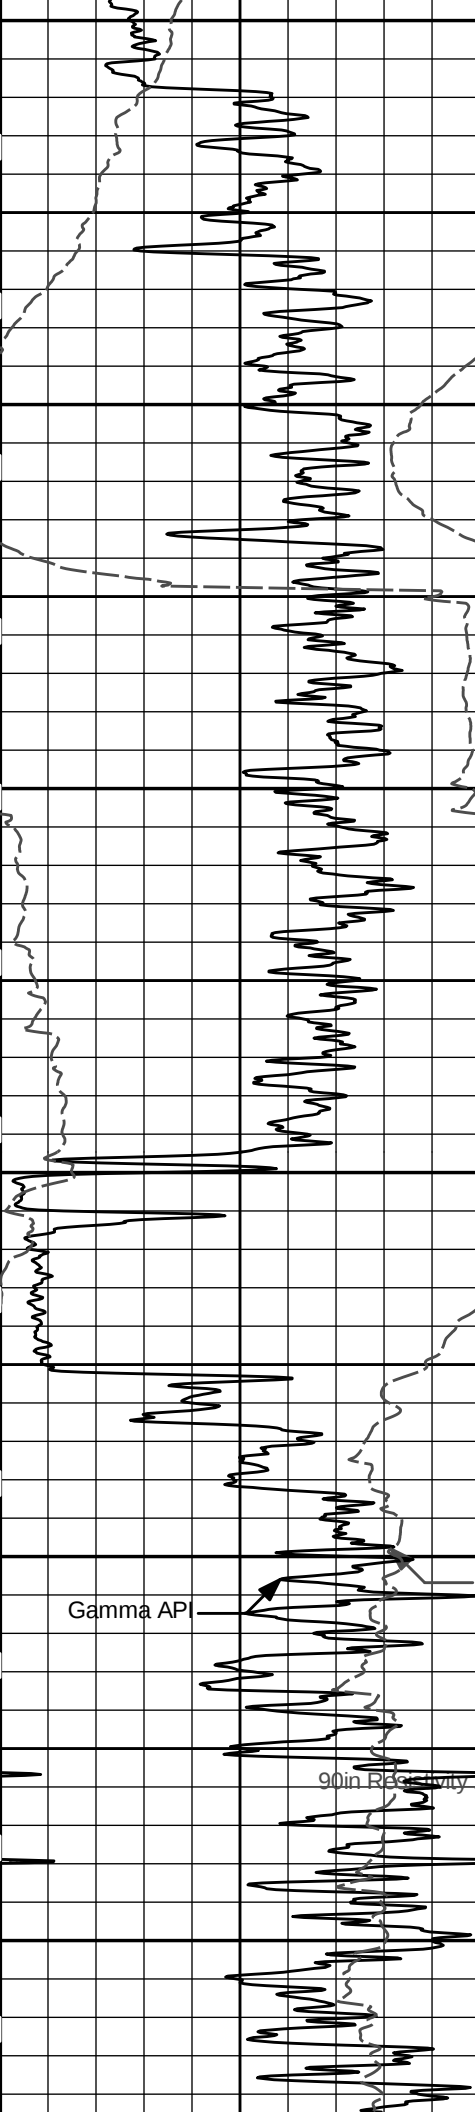

1300
1400
1500
1600
1700
1800

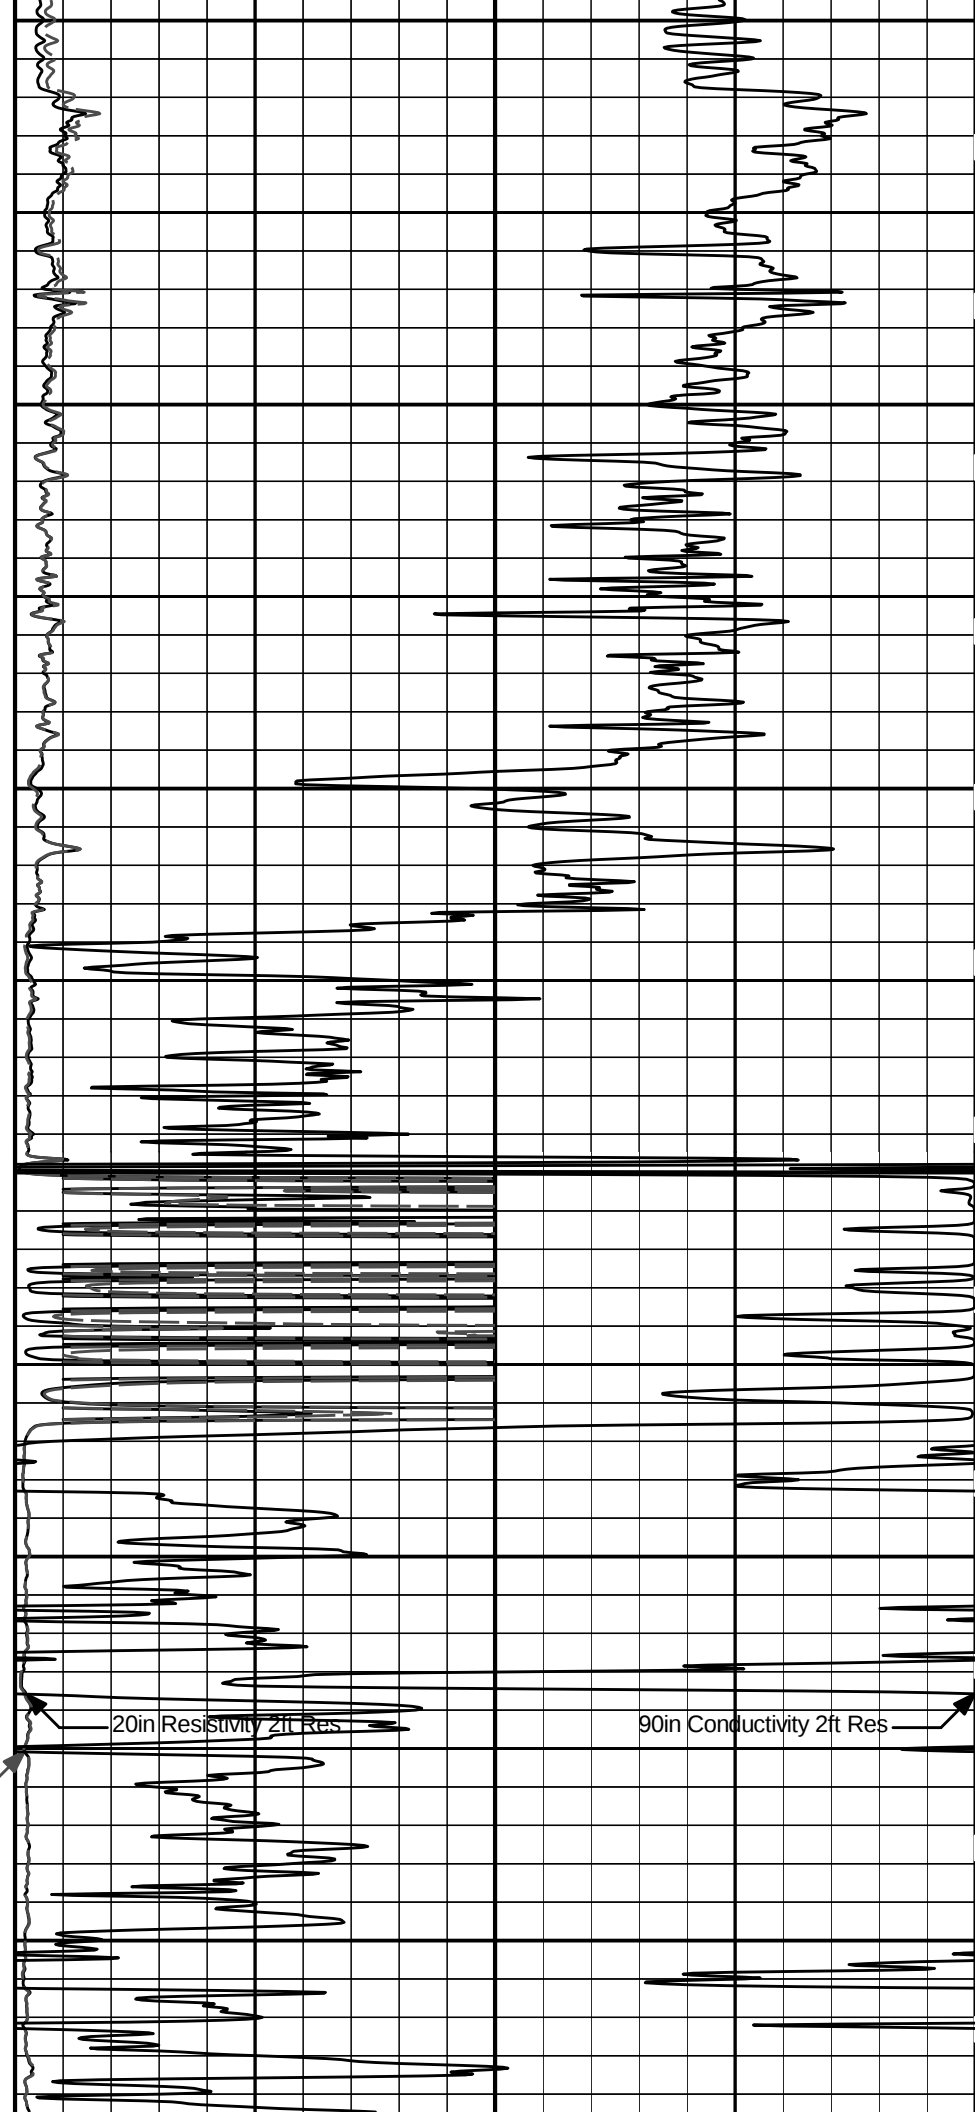


Gamma API

SP

90in Resistivity 2ft Res

20in Resistivity 2ft Res

90in Conductivity 2ft Res

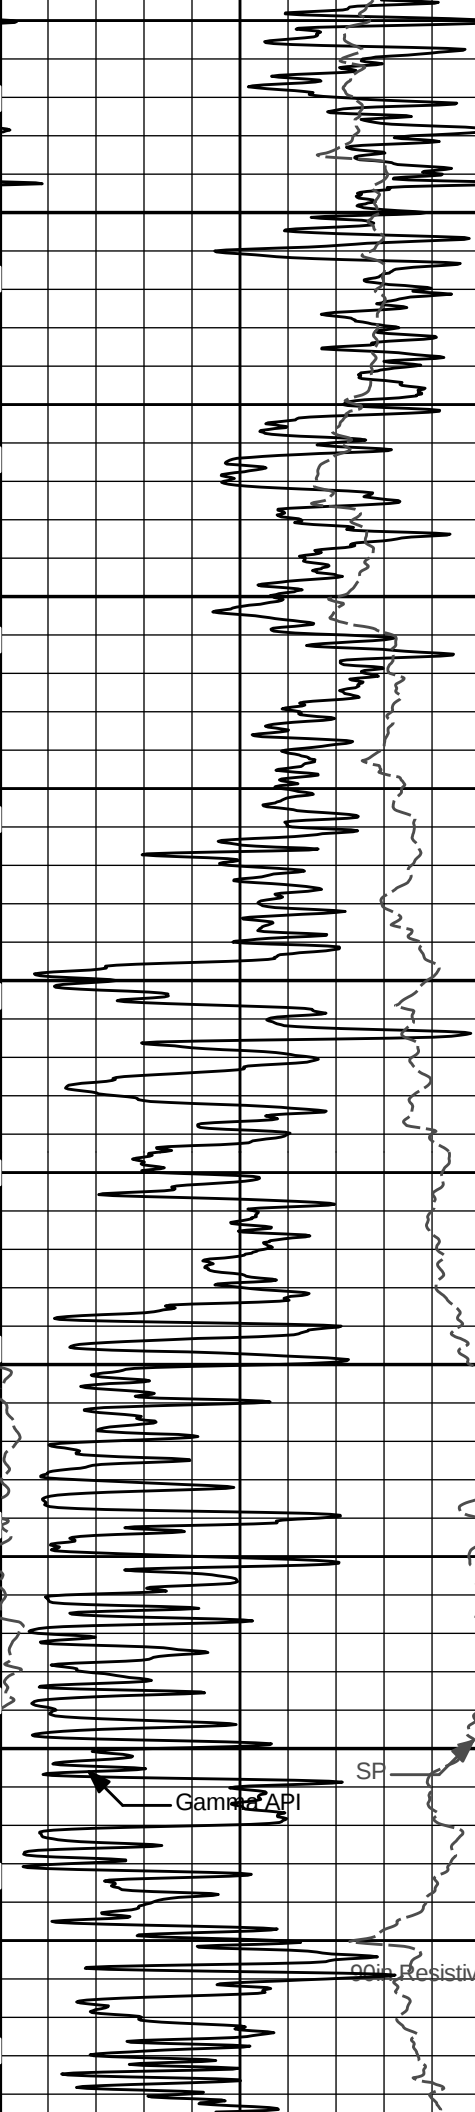

1900

2000

2100


2200

2300

Gamma API


SP


90in Resistivity 2ft Res

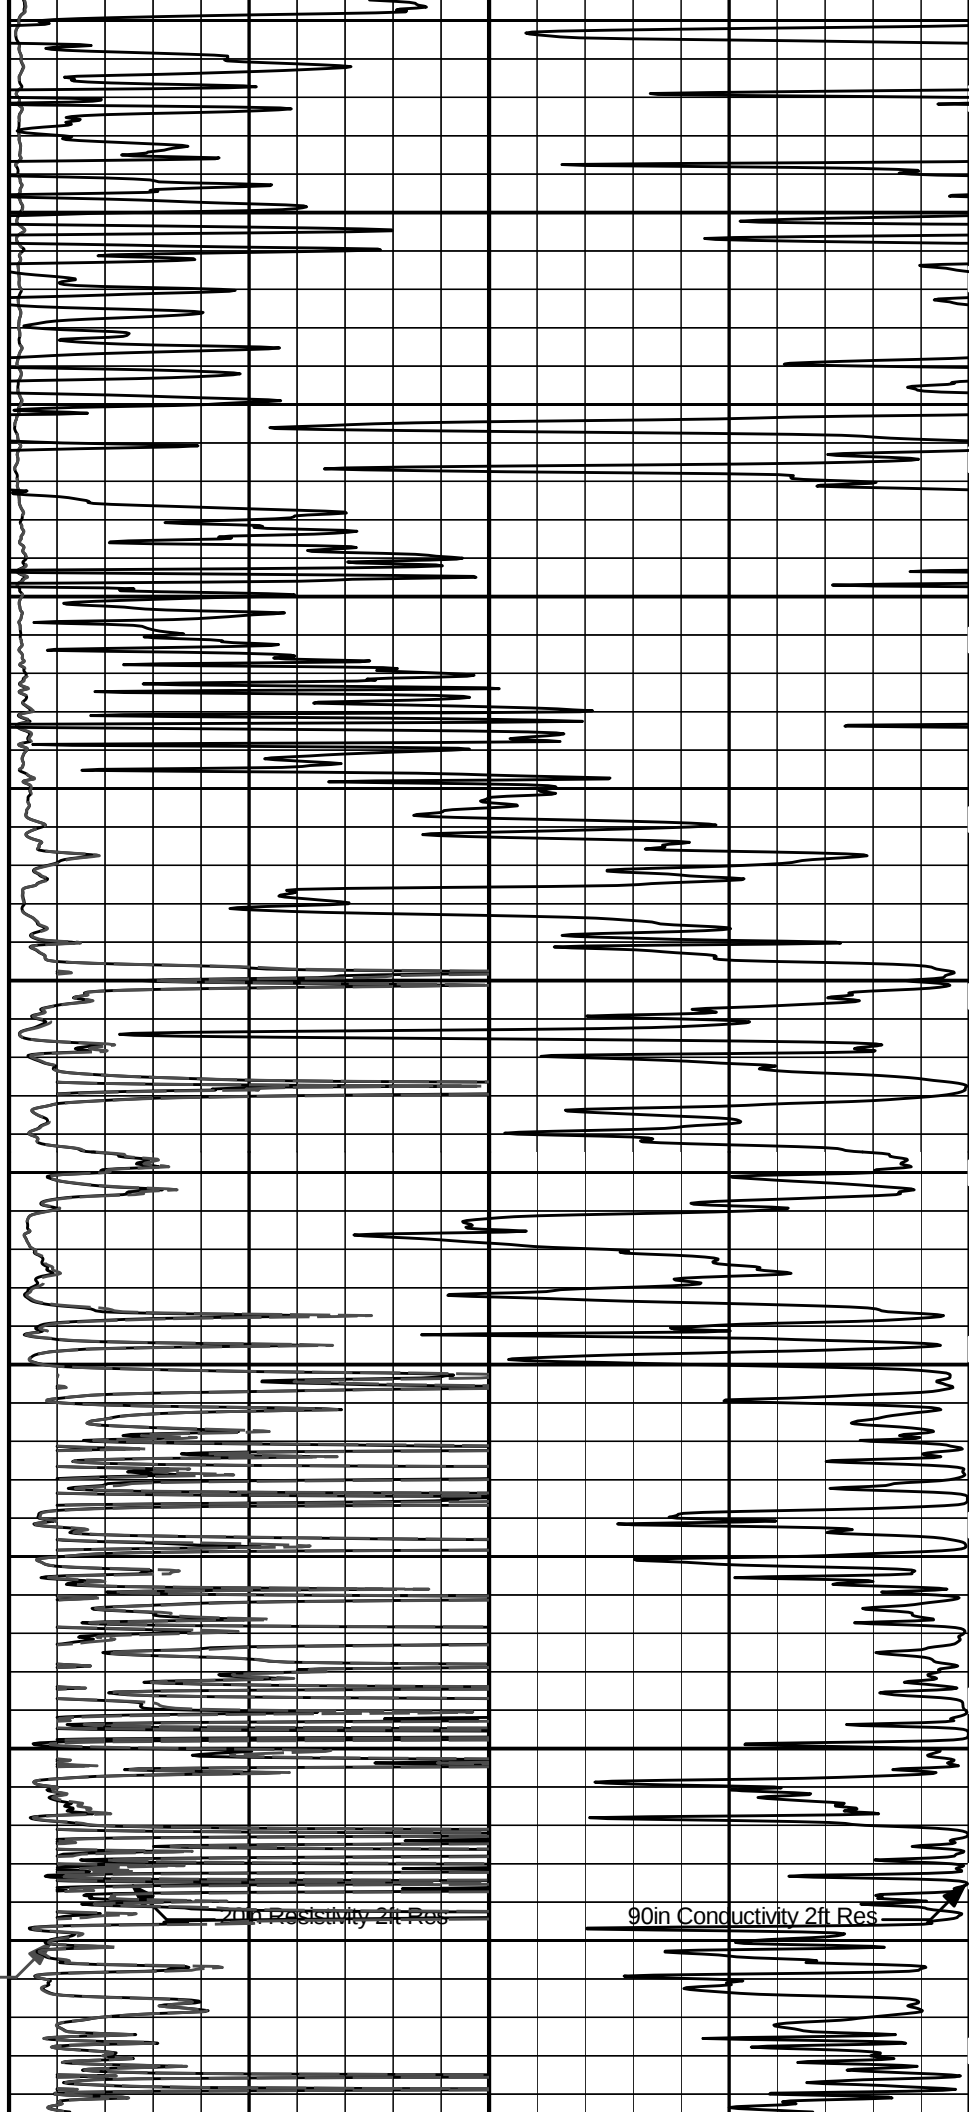

7in Resistivity 2ft Res


90in Conductivity 2ft Res

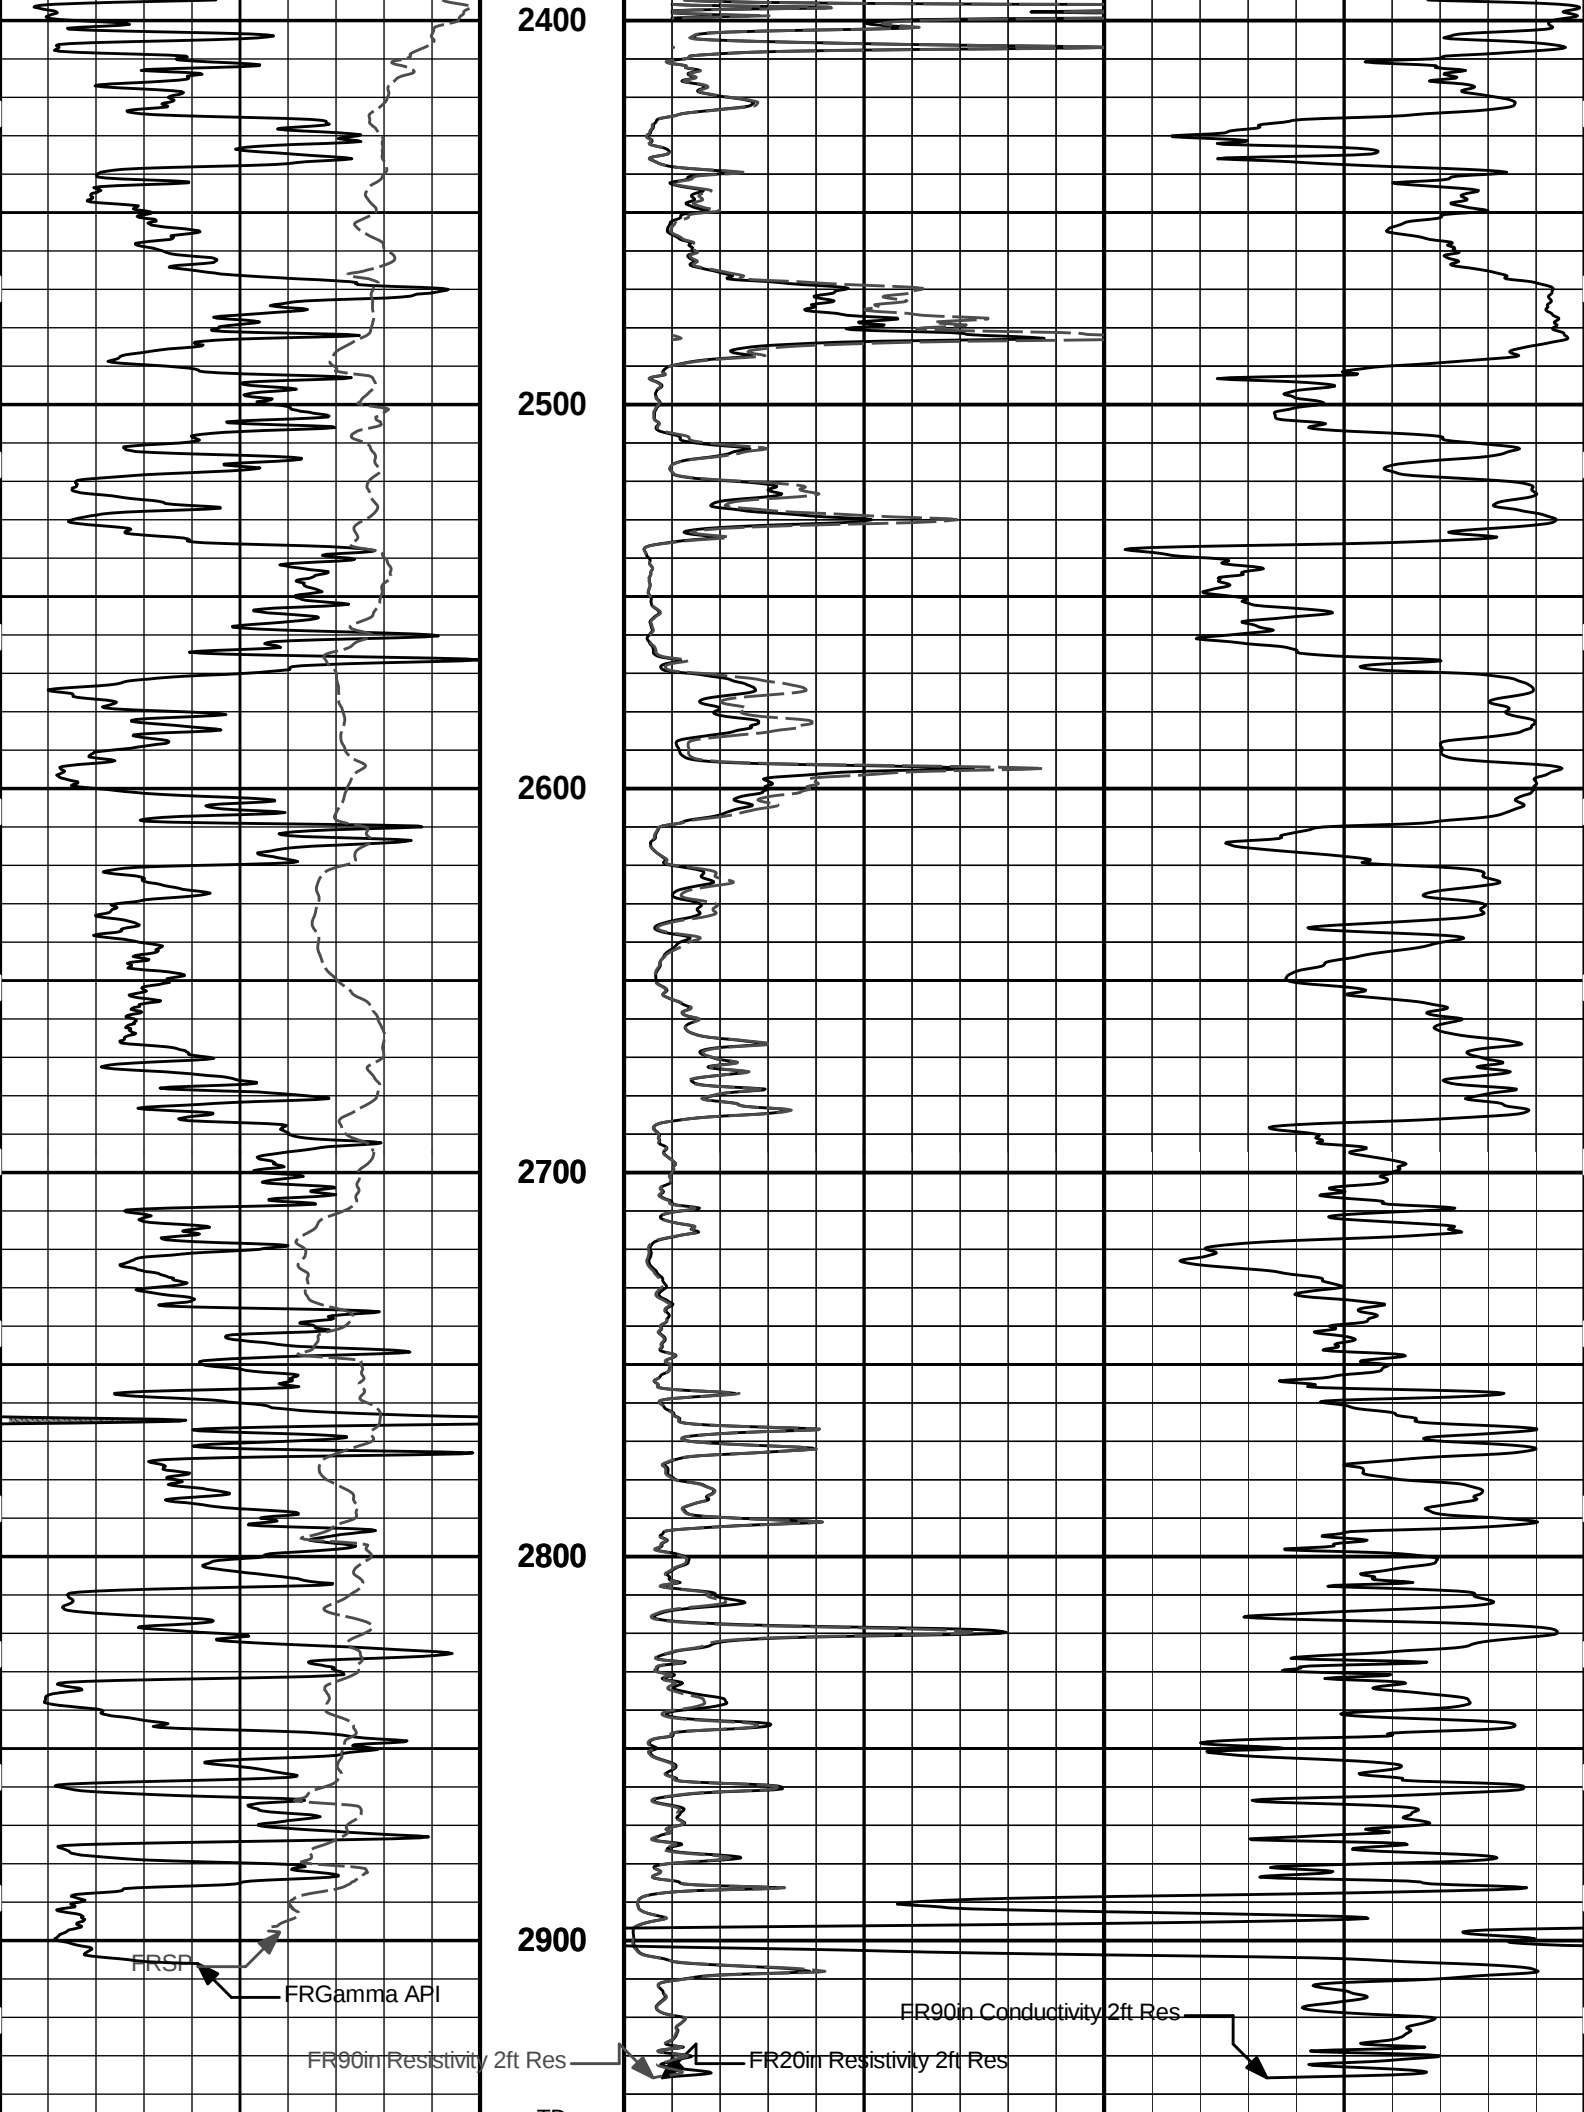


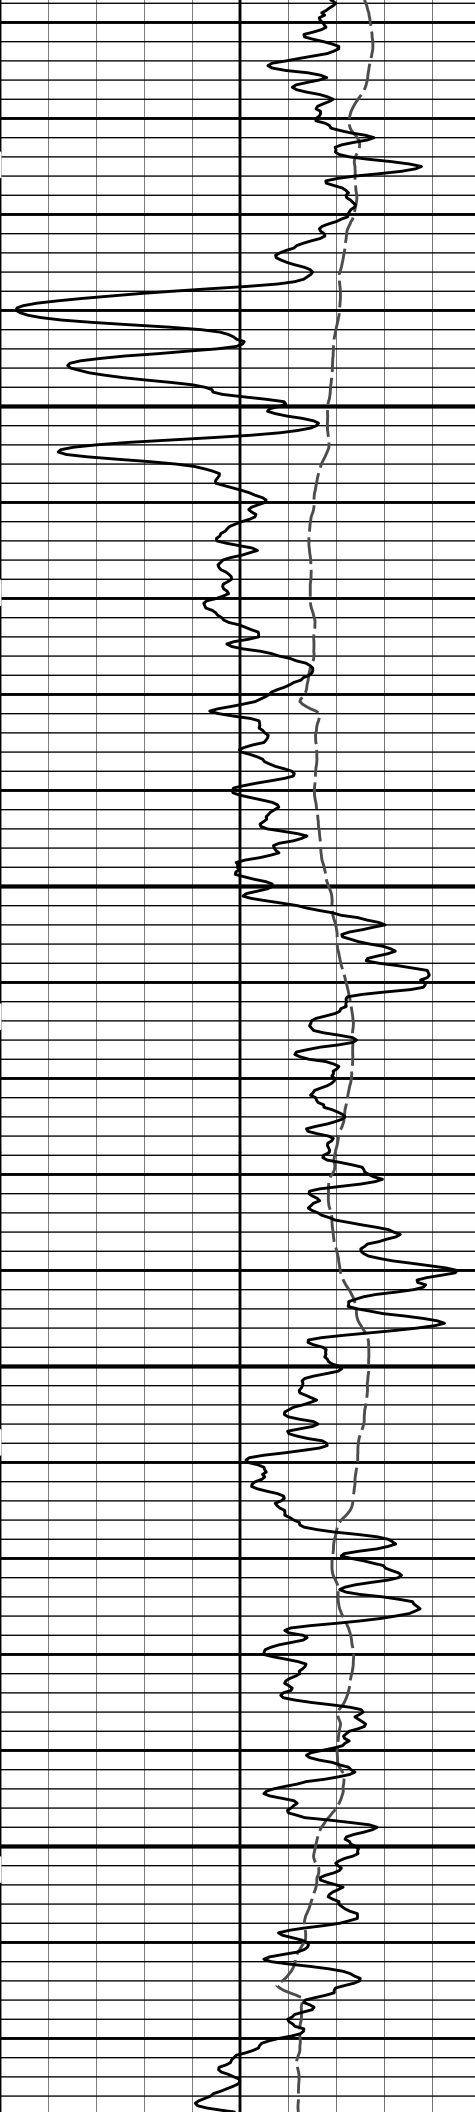

700


800

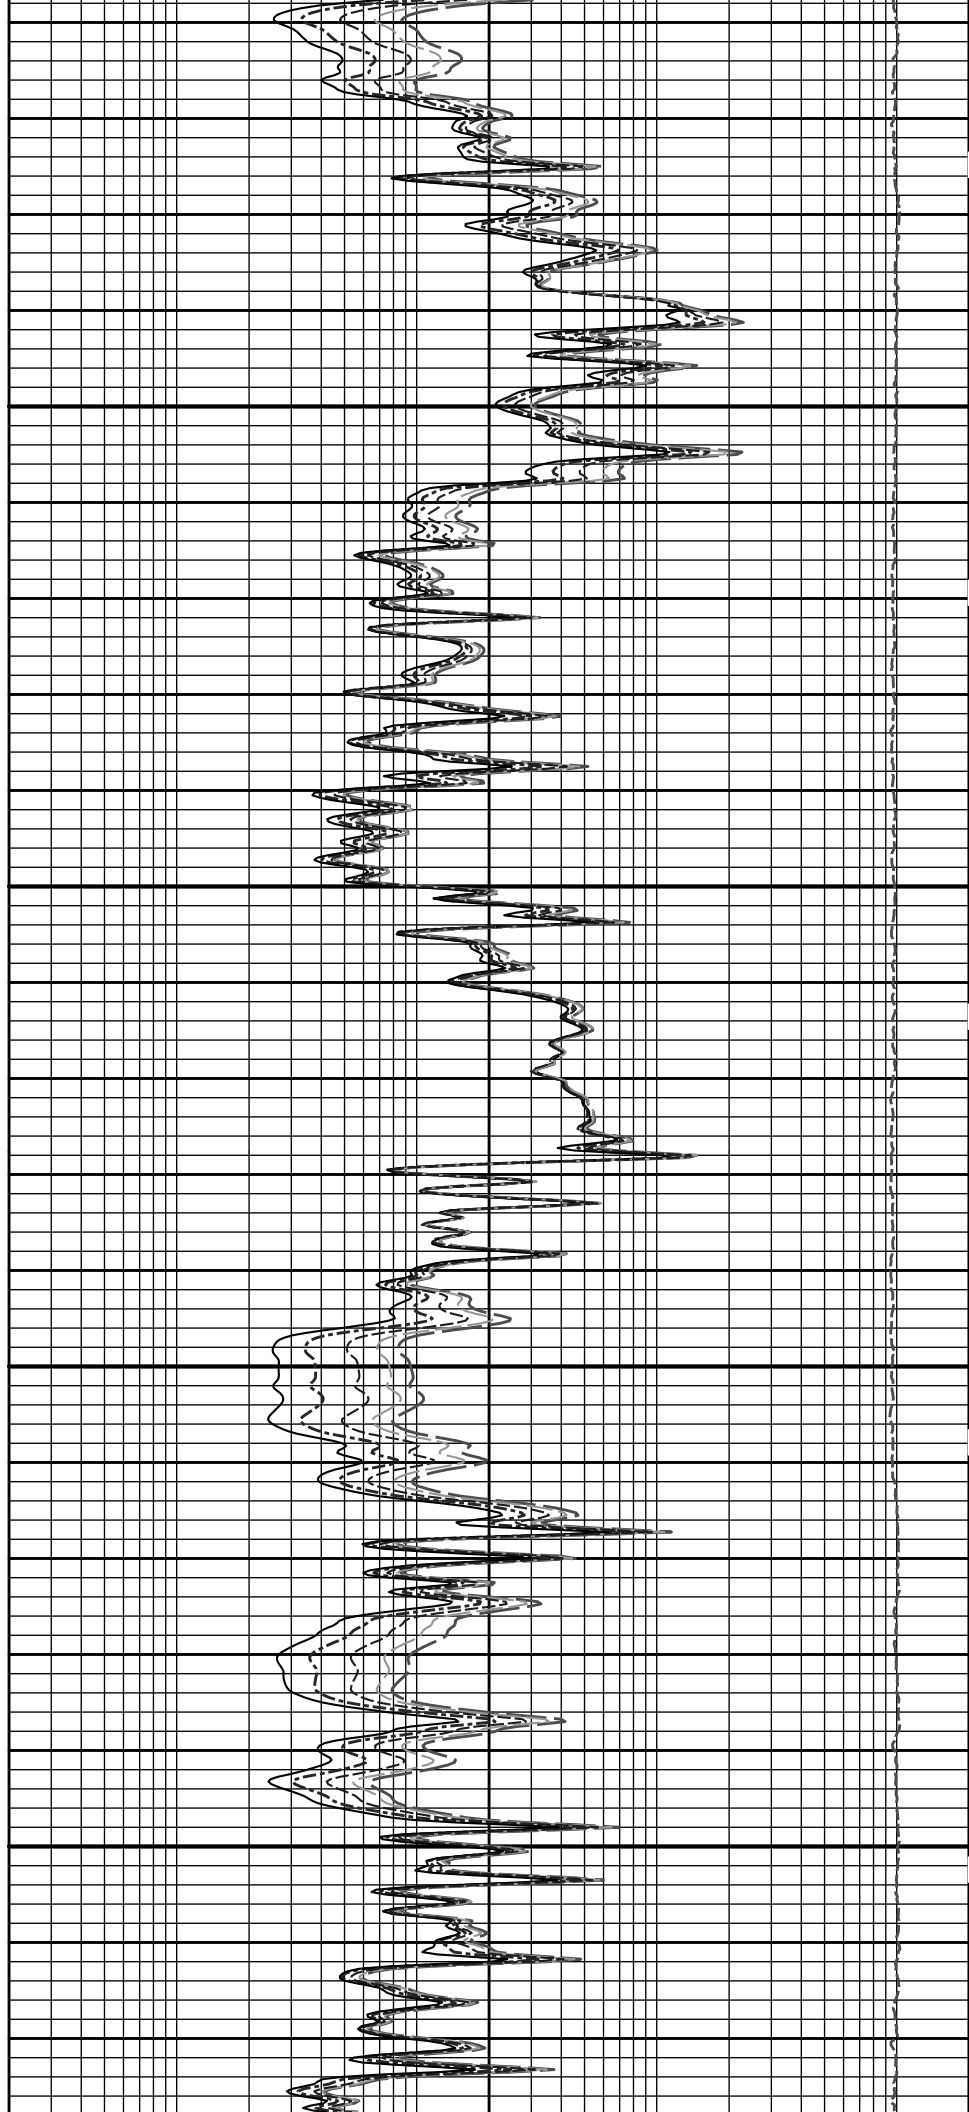

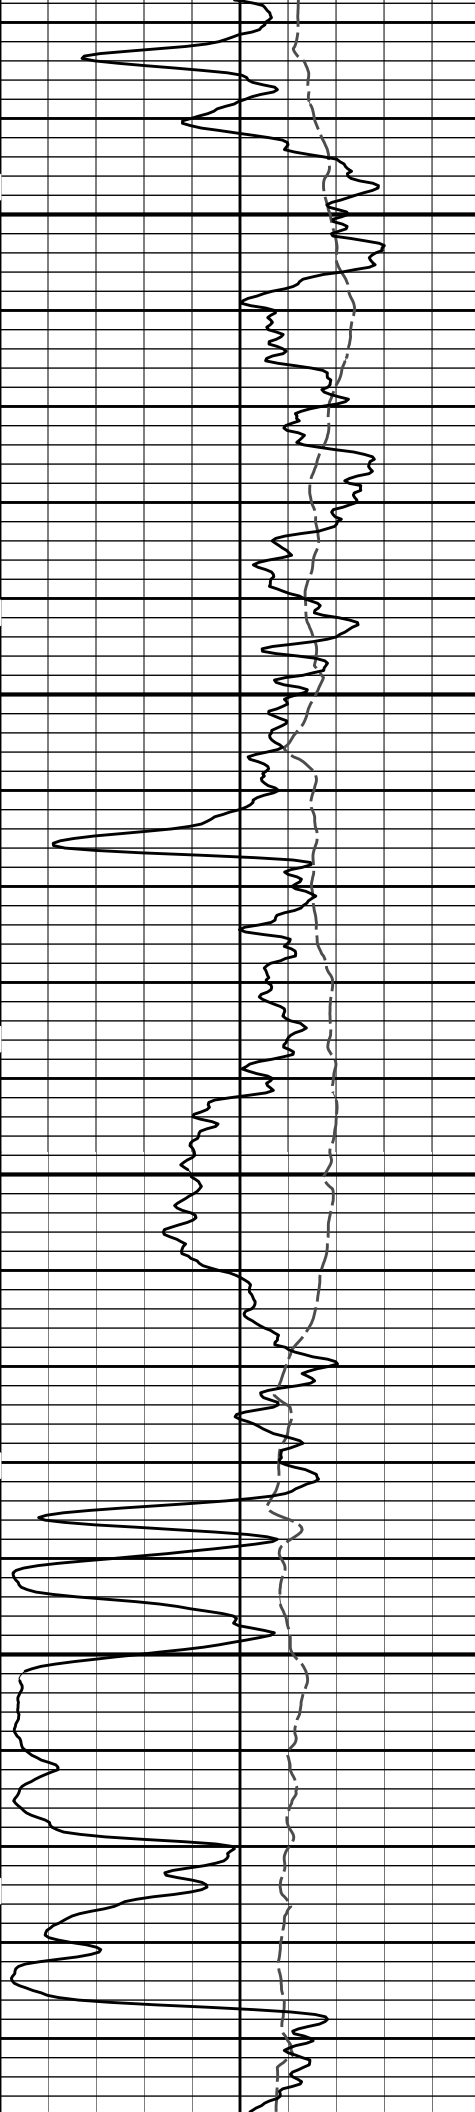


900

1000

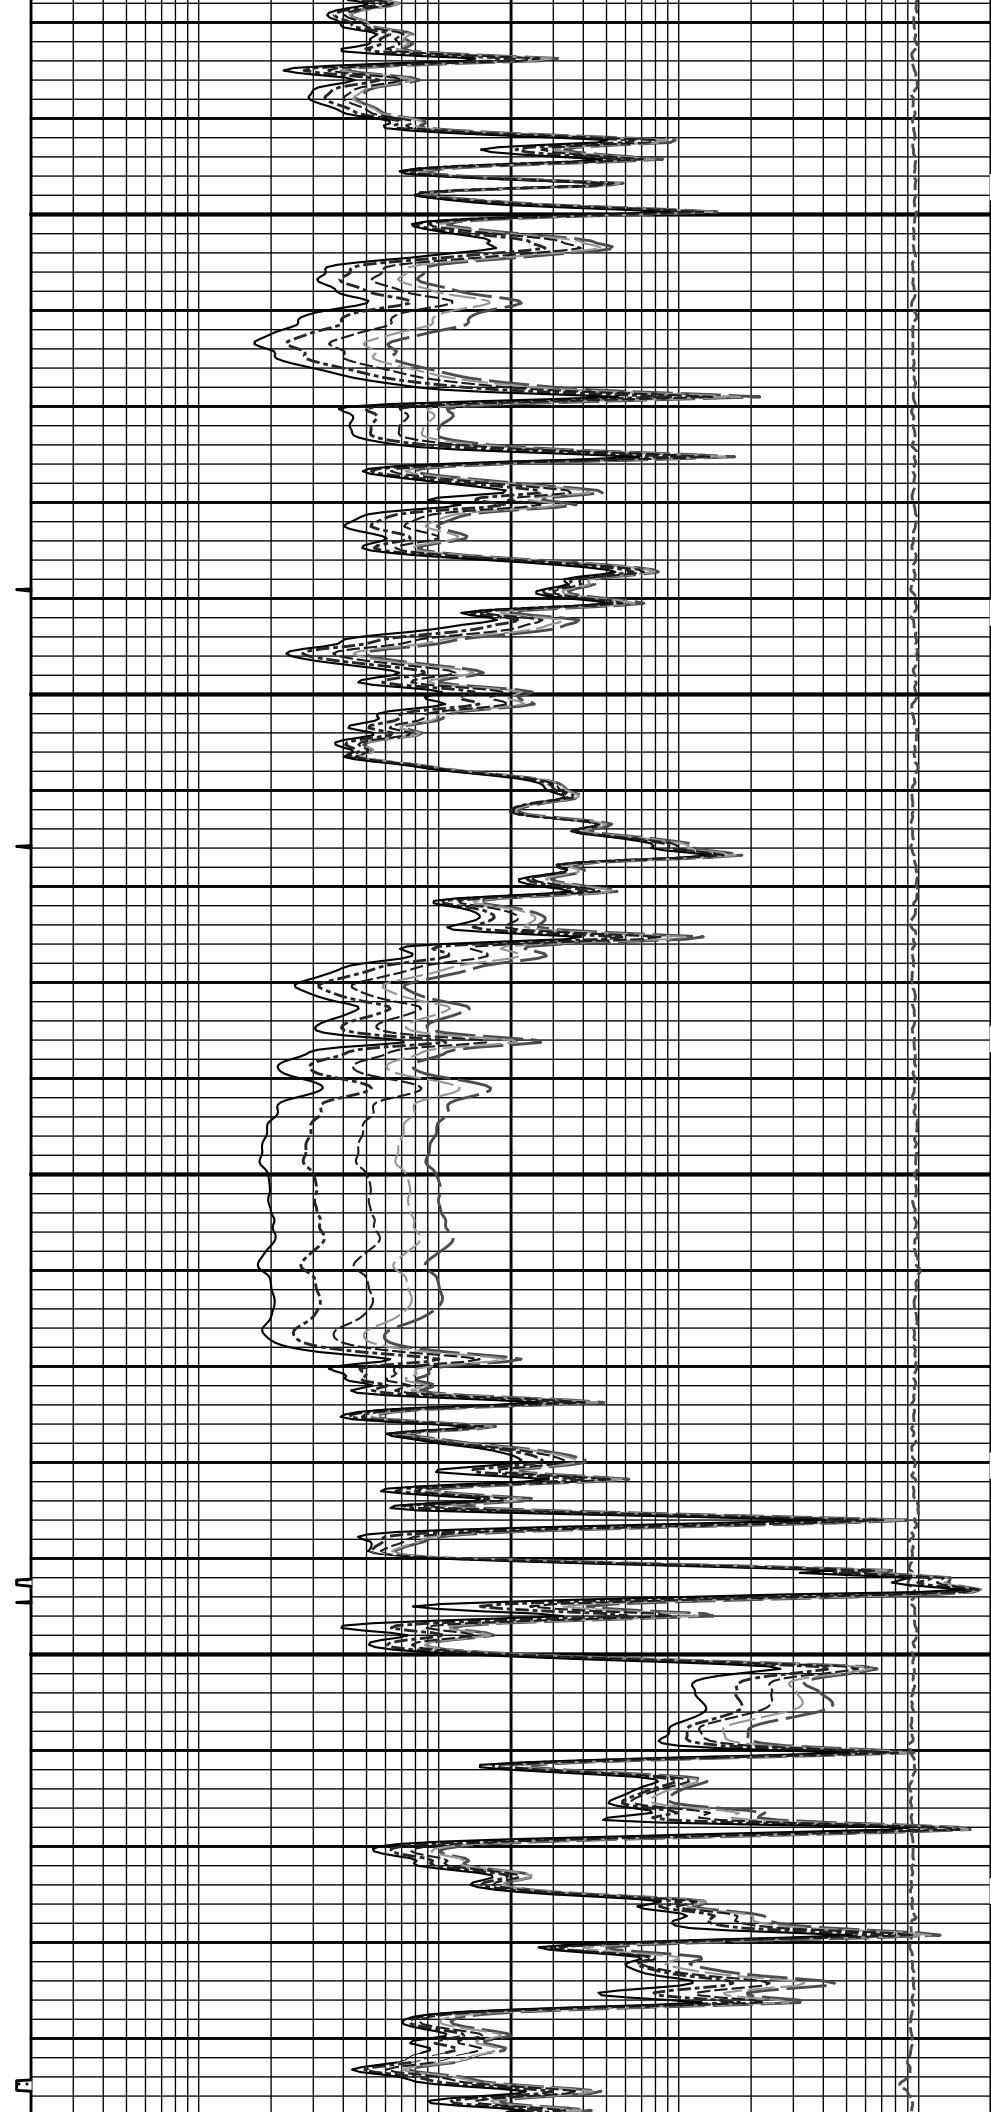




1100

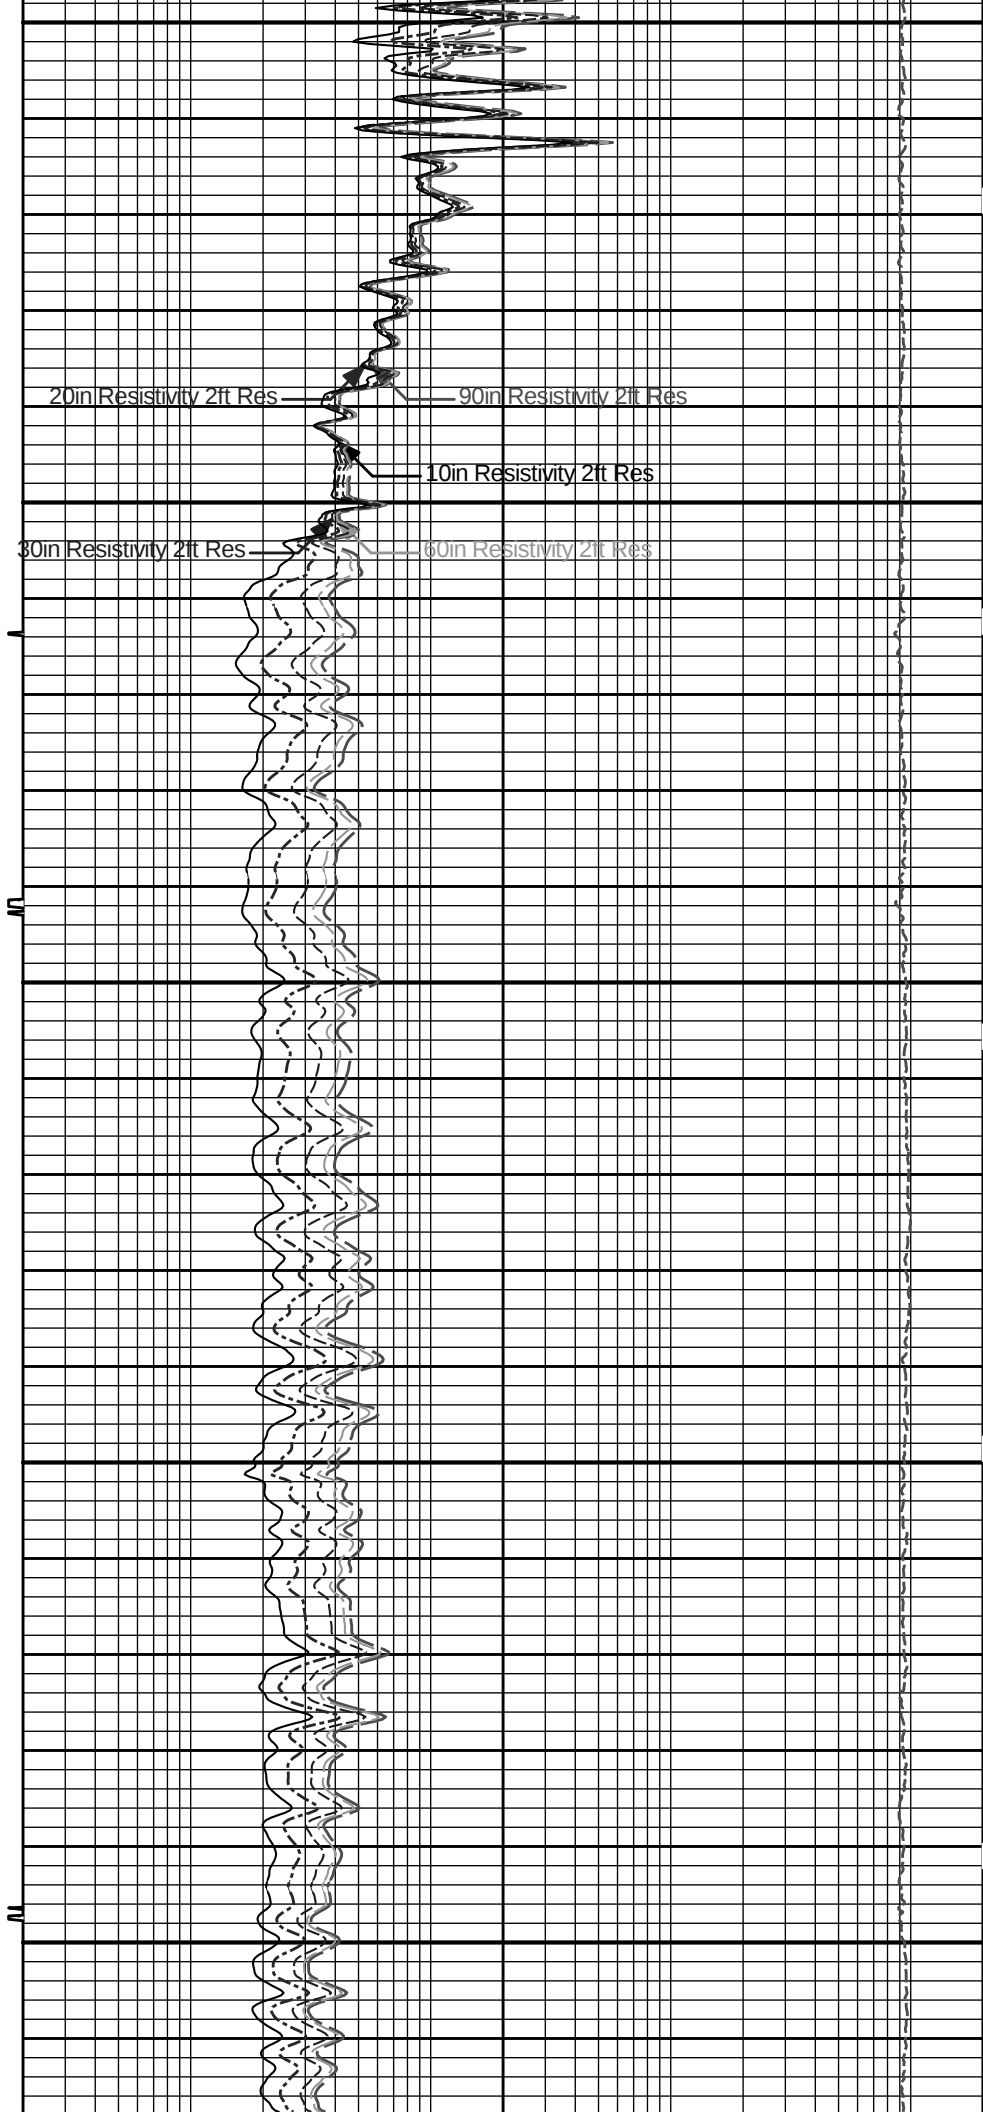


1200


1300

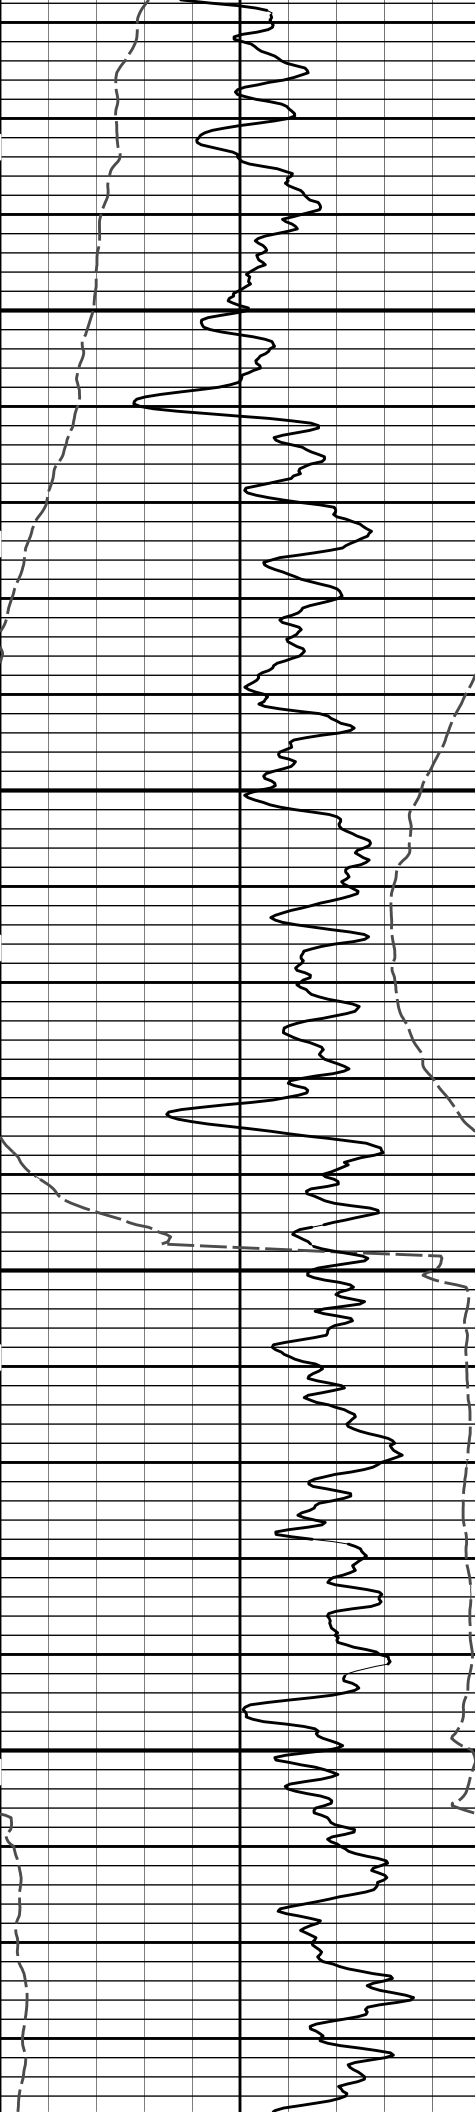

1400


1500

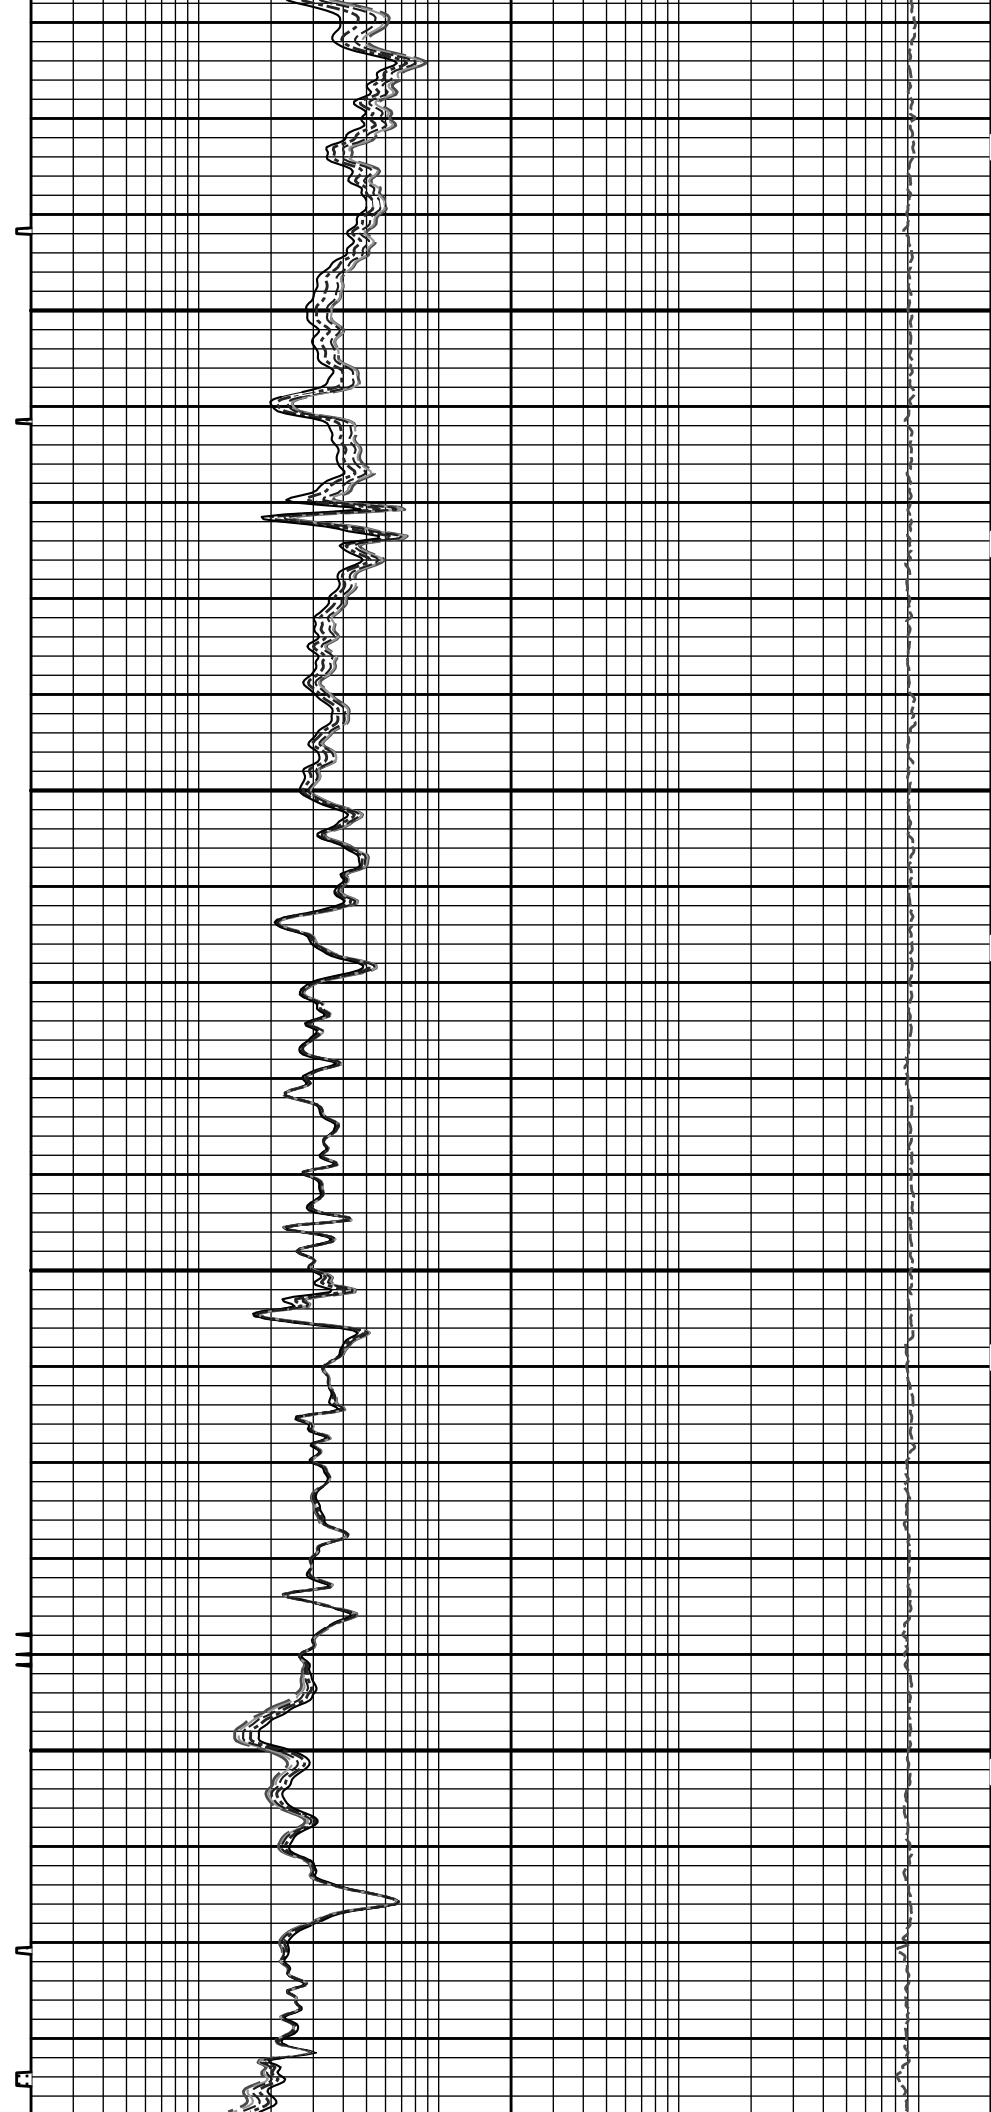


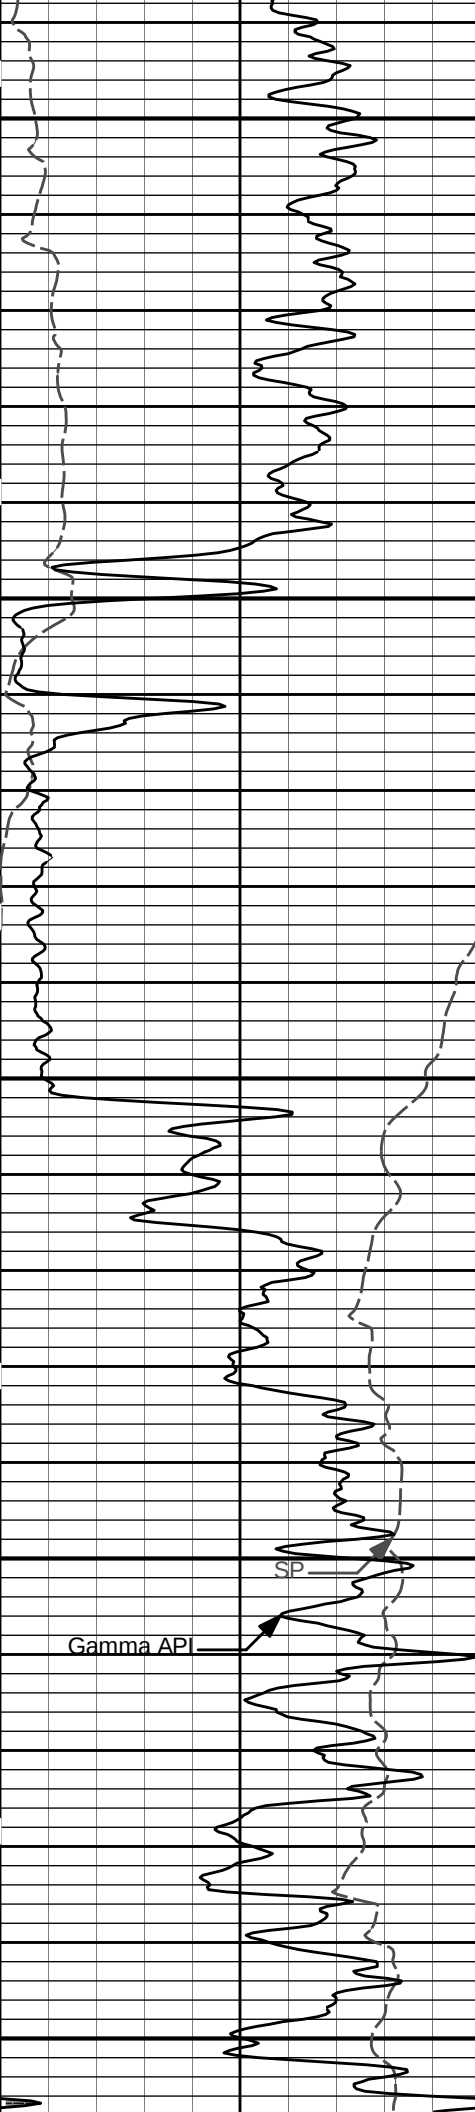

1600


1700

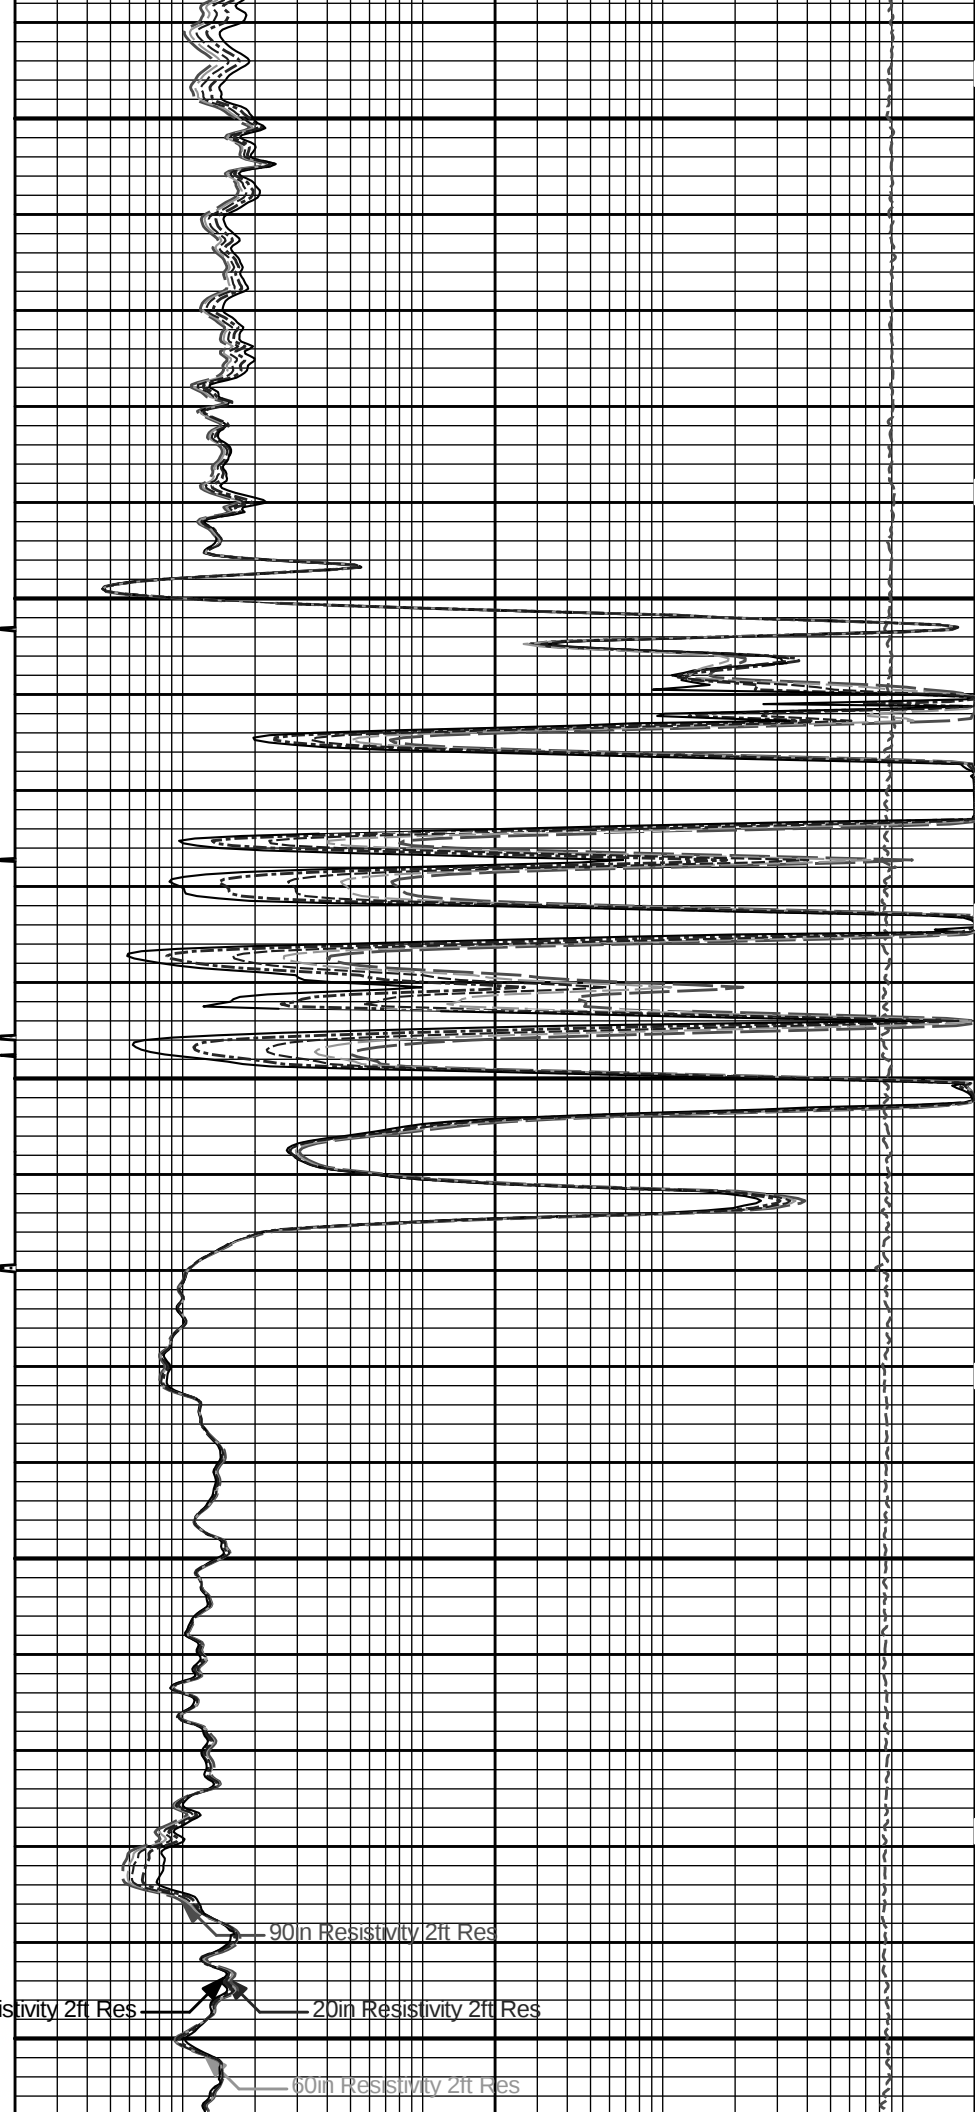


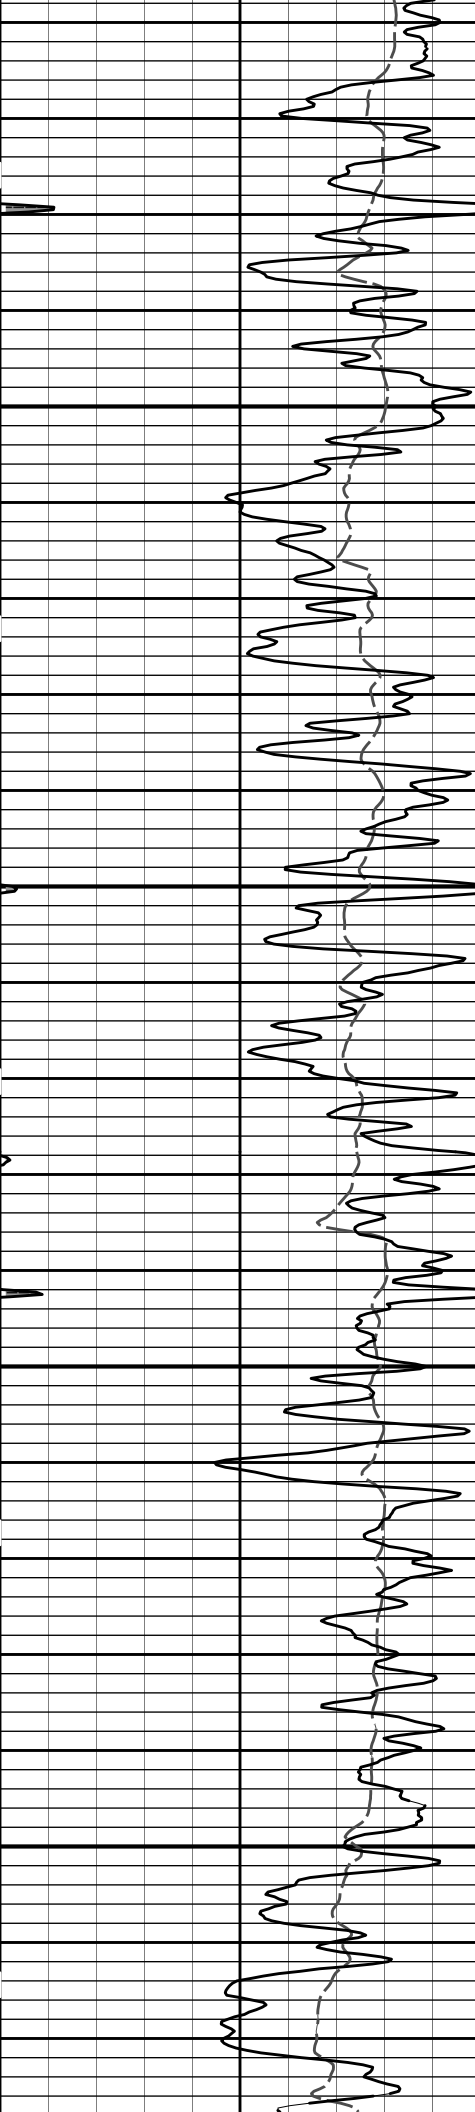

1800


1900

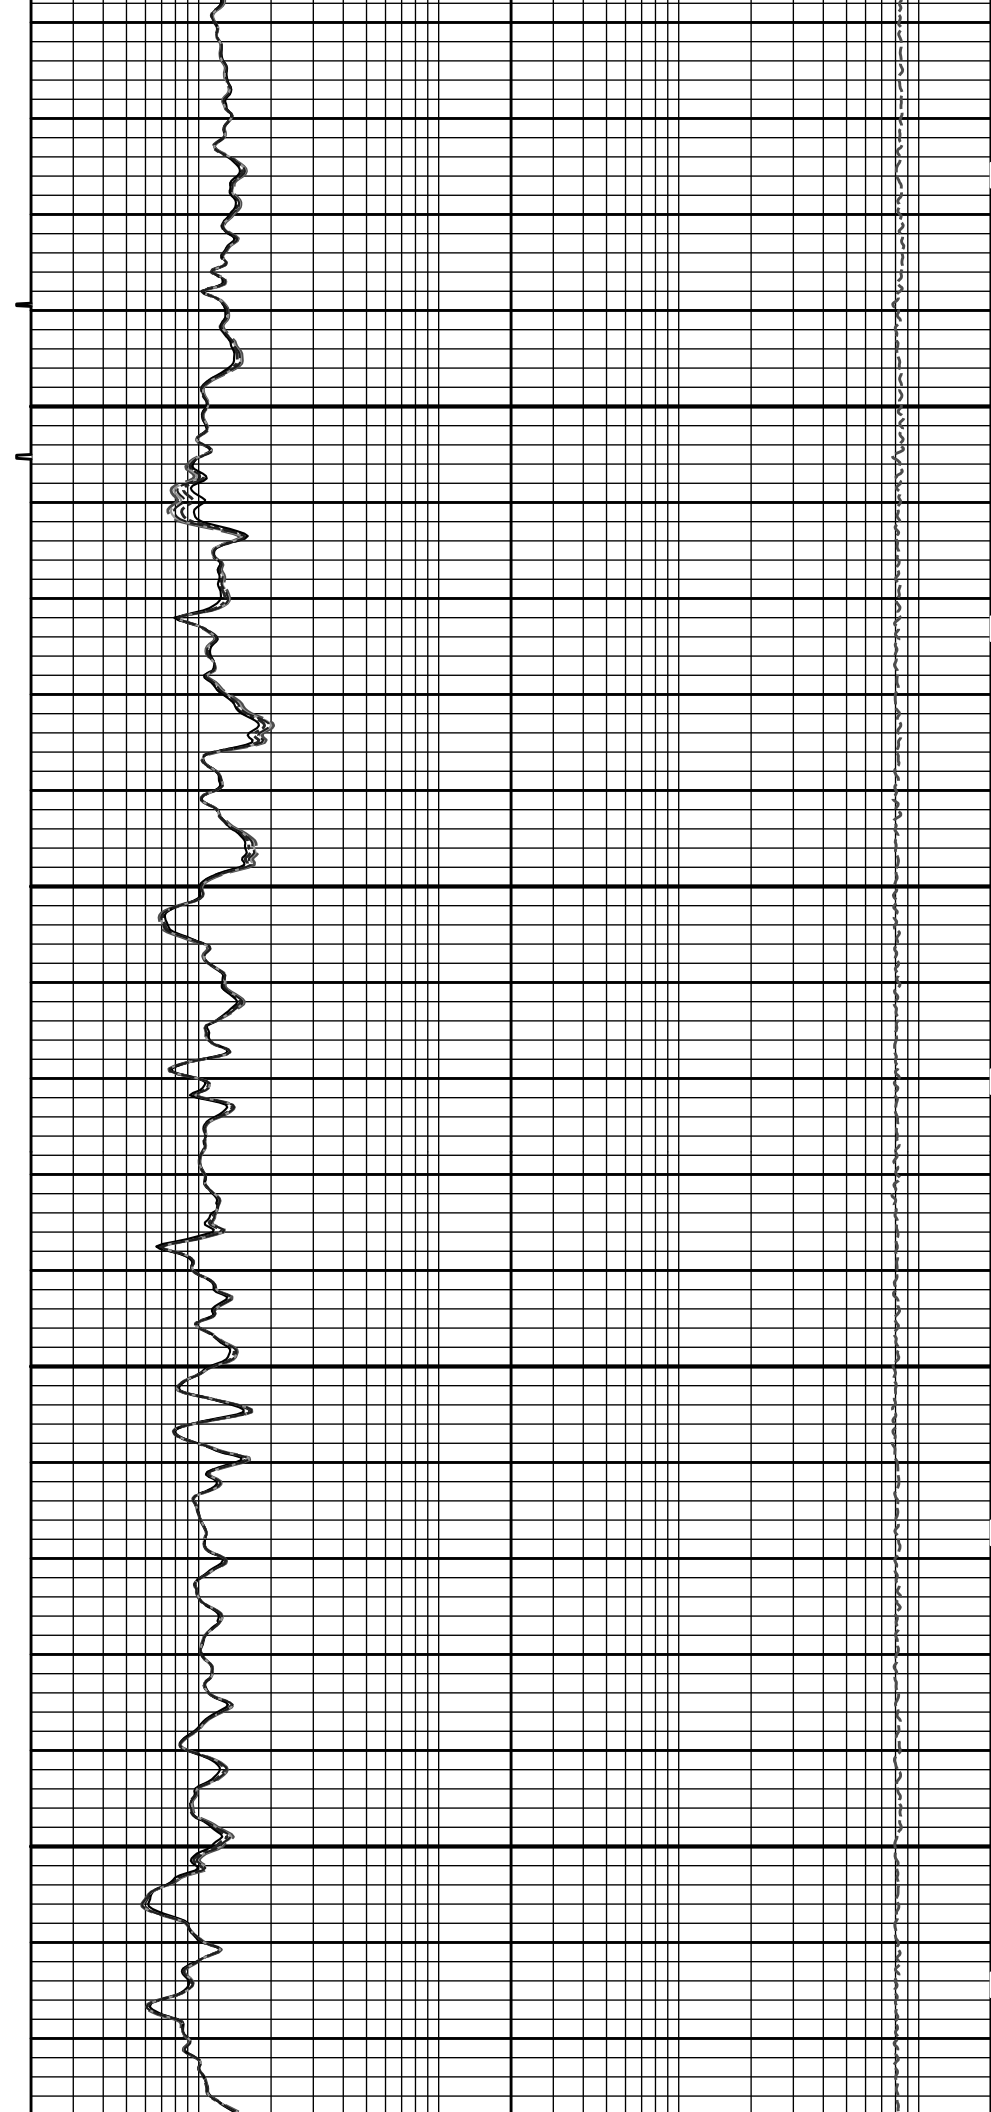


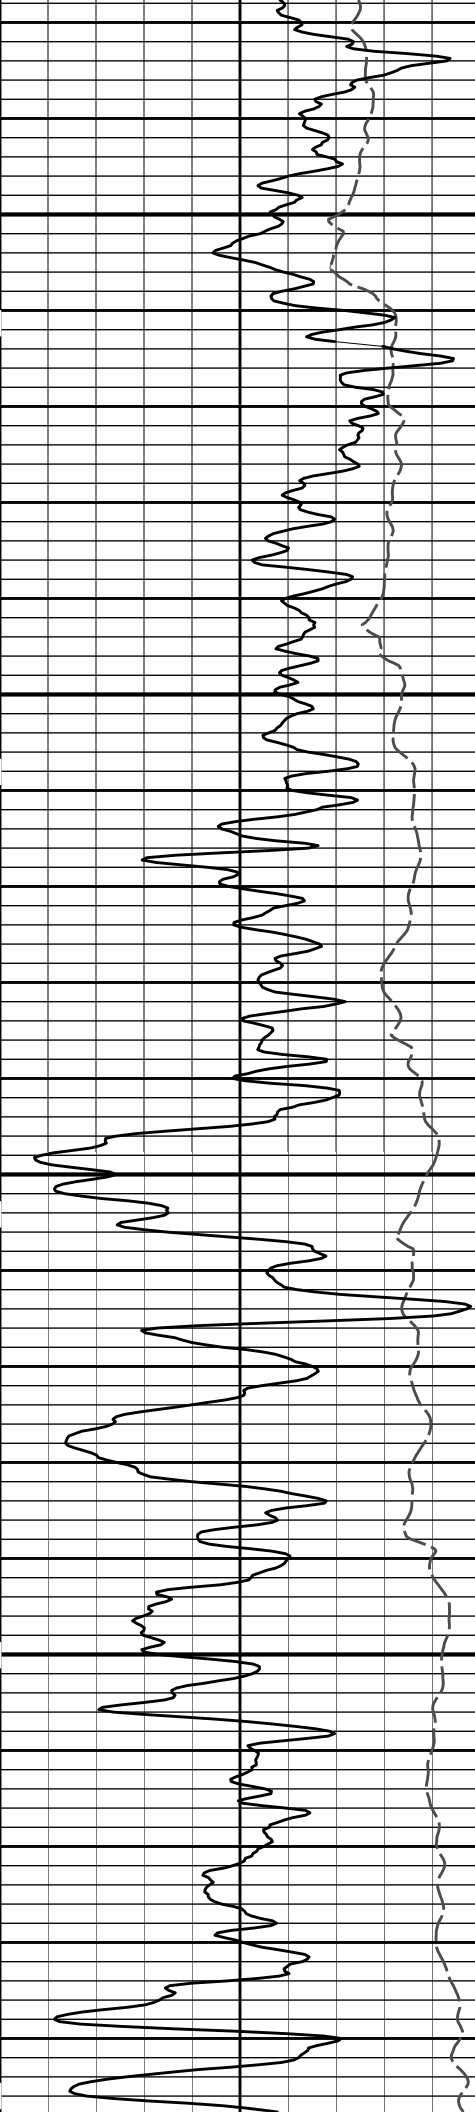

2000

2100

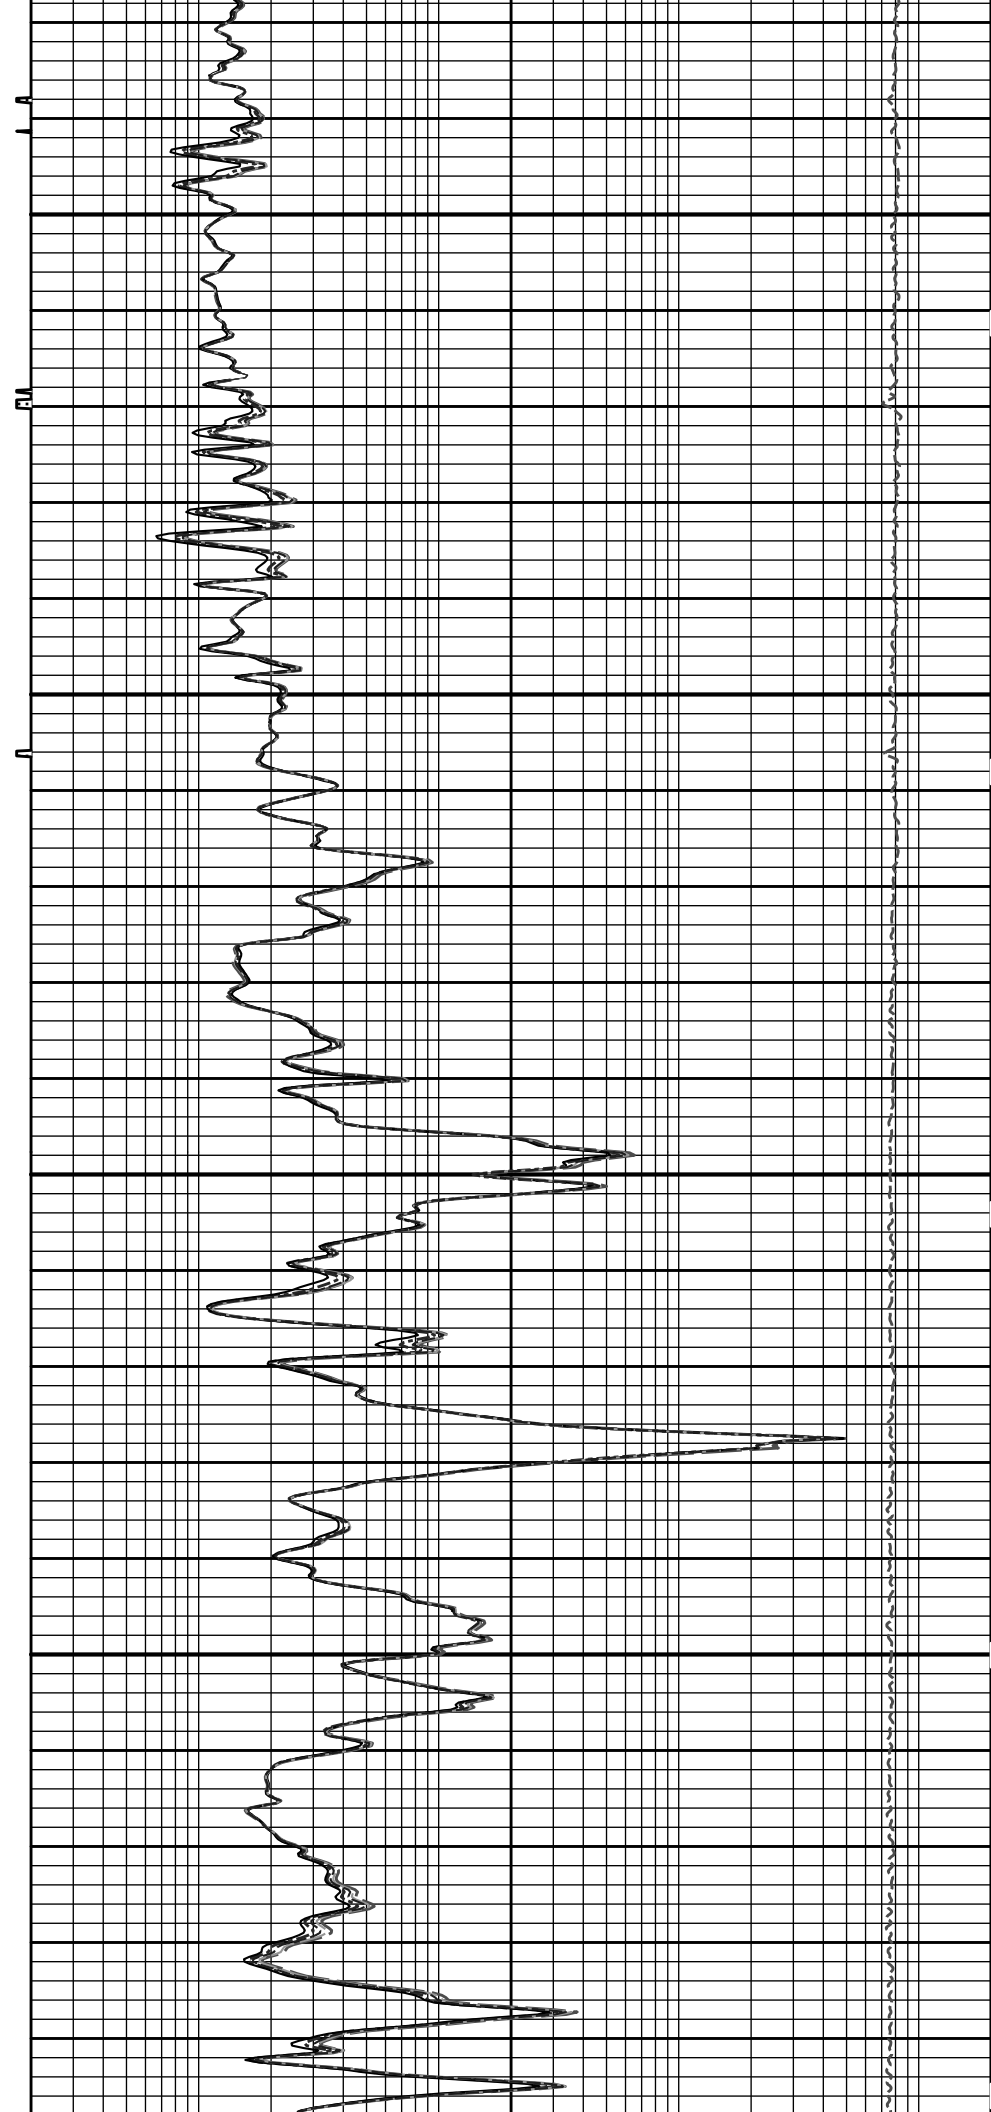

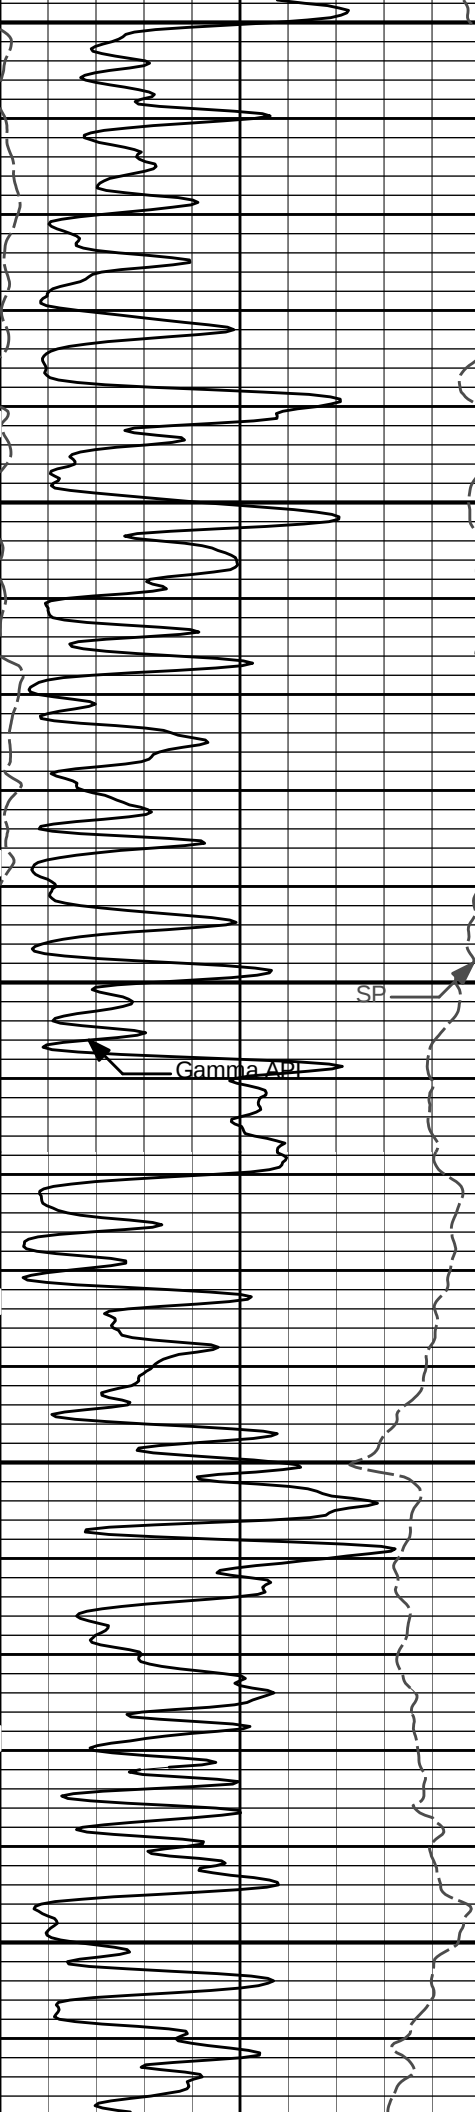


2200

2300

2400

Gamma Ray

SP

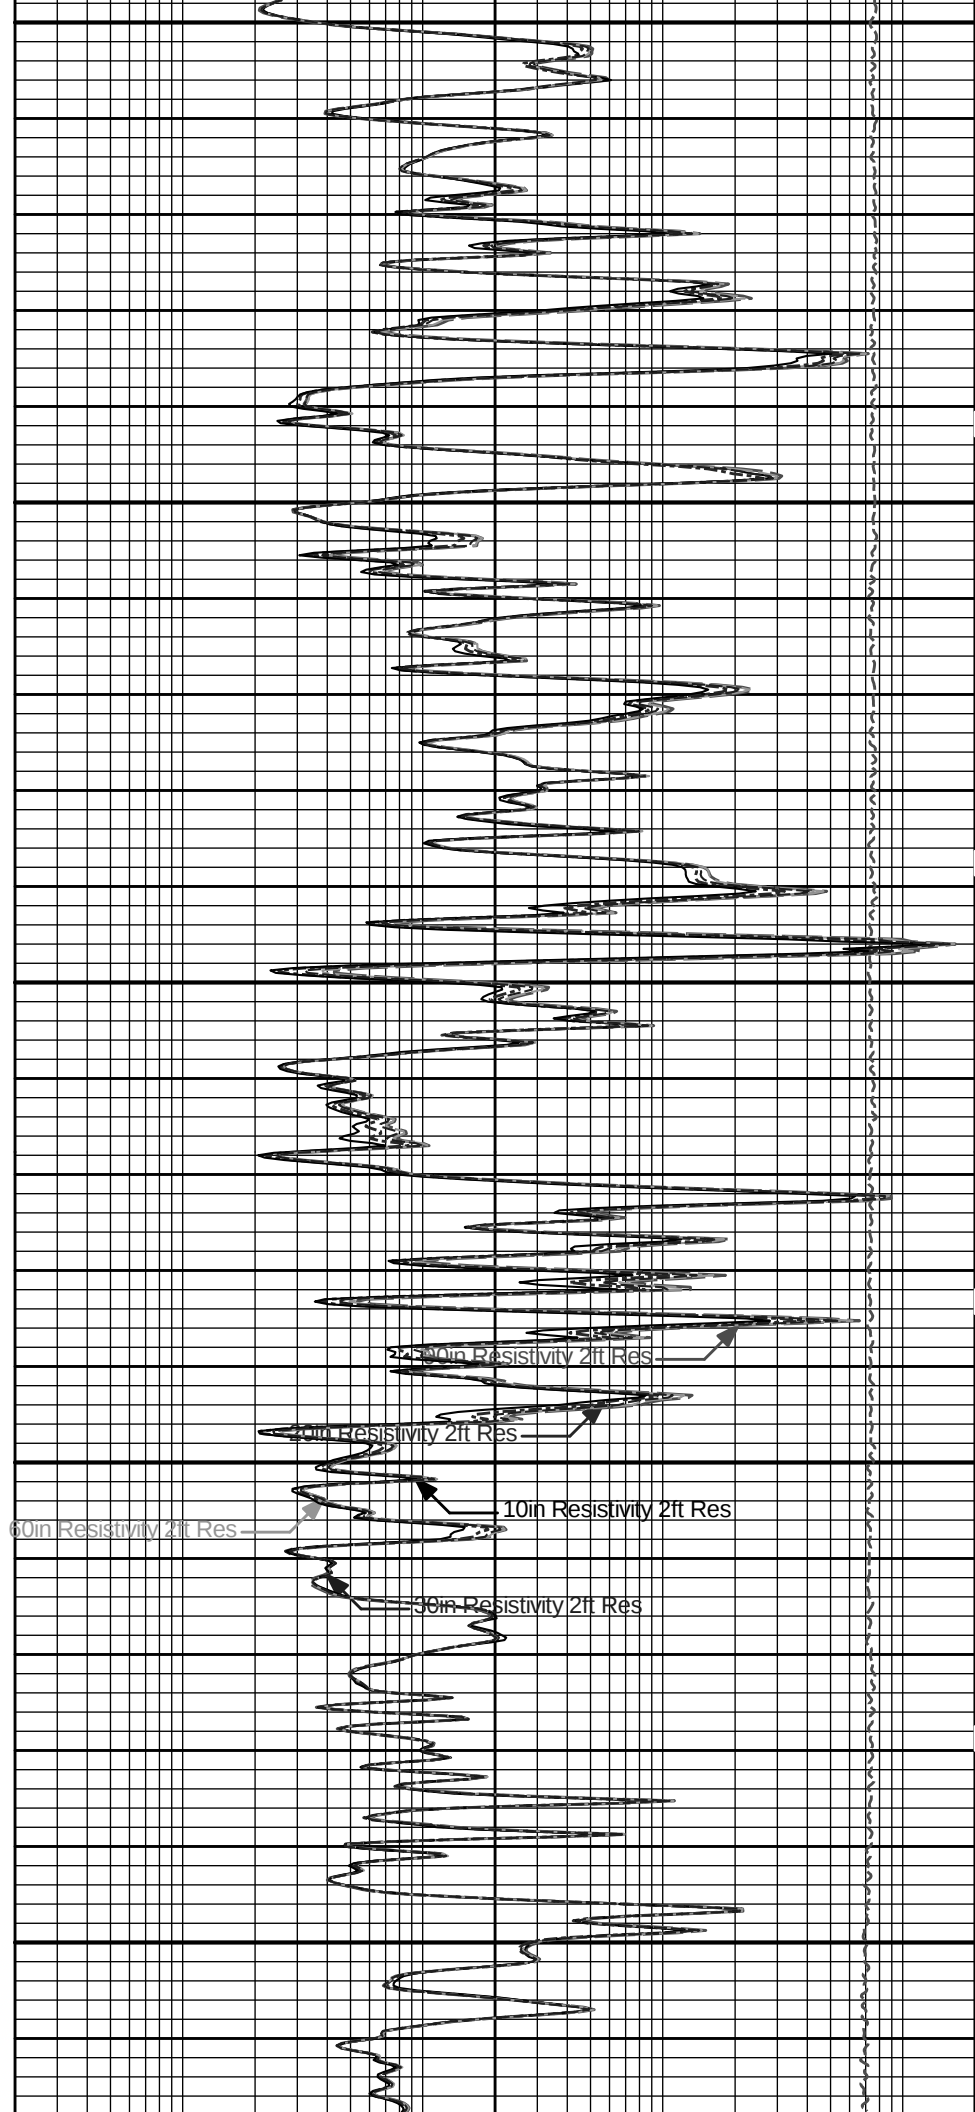


24in Resistivity 2ft Res

10in Resistivity 2ft Res

10in Resistivity 2ft Res


30in Resistivity 2ft Res


60in Resistivity 2ft Res

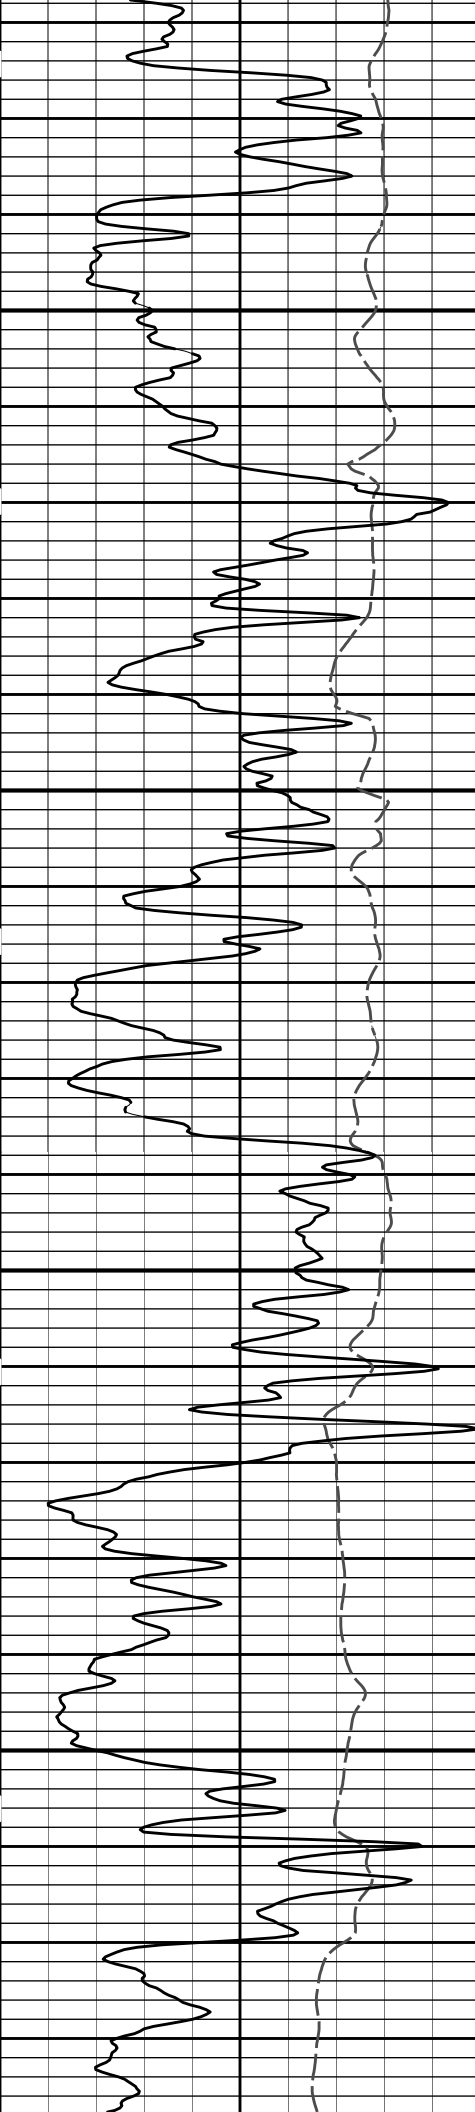

2500


2600

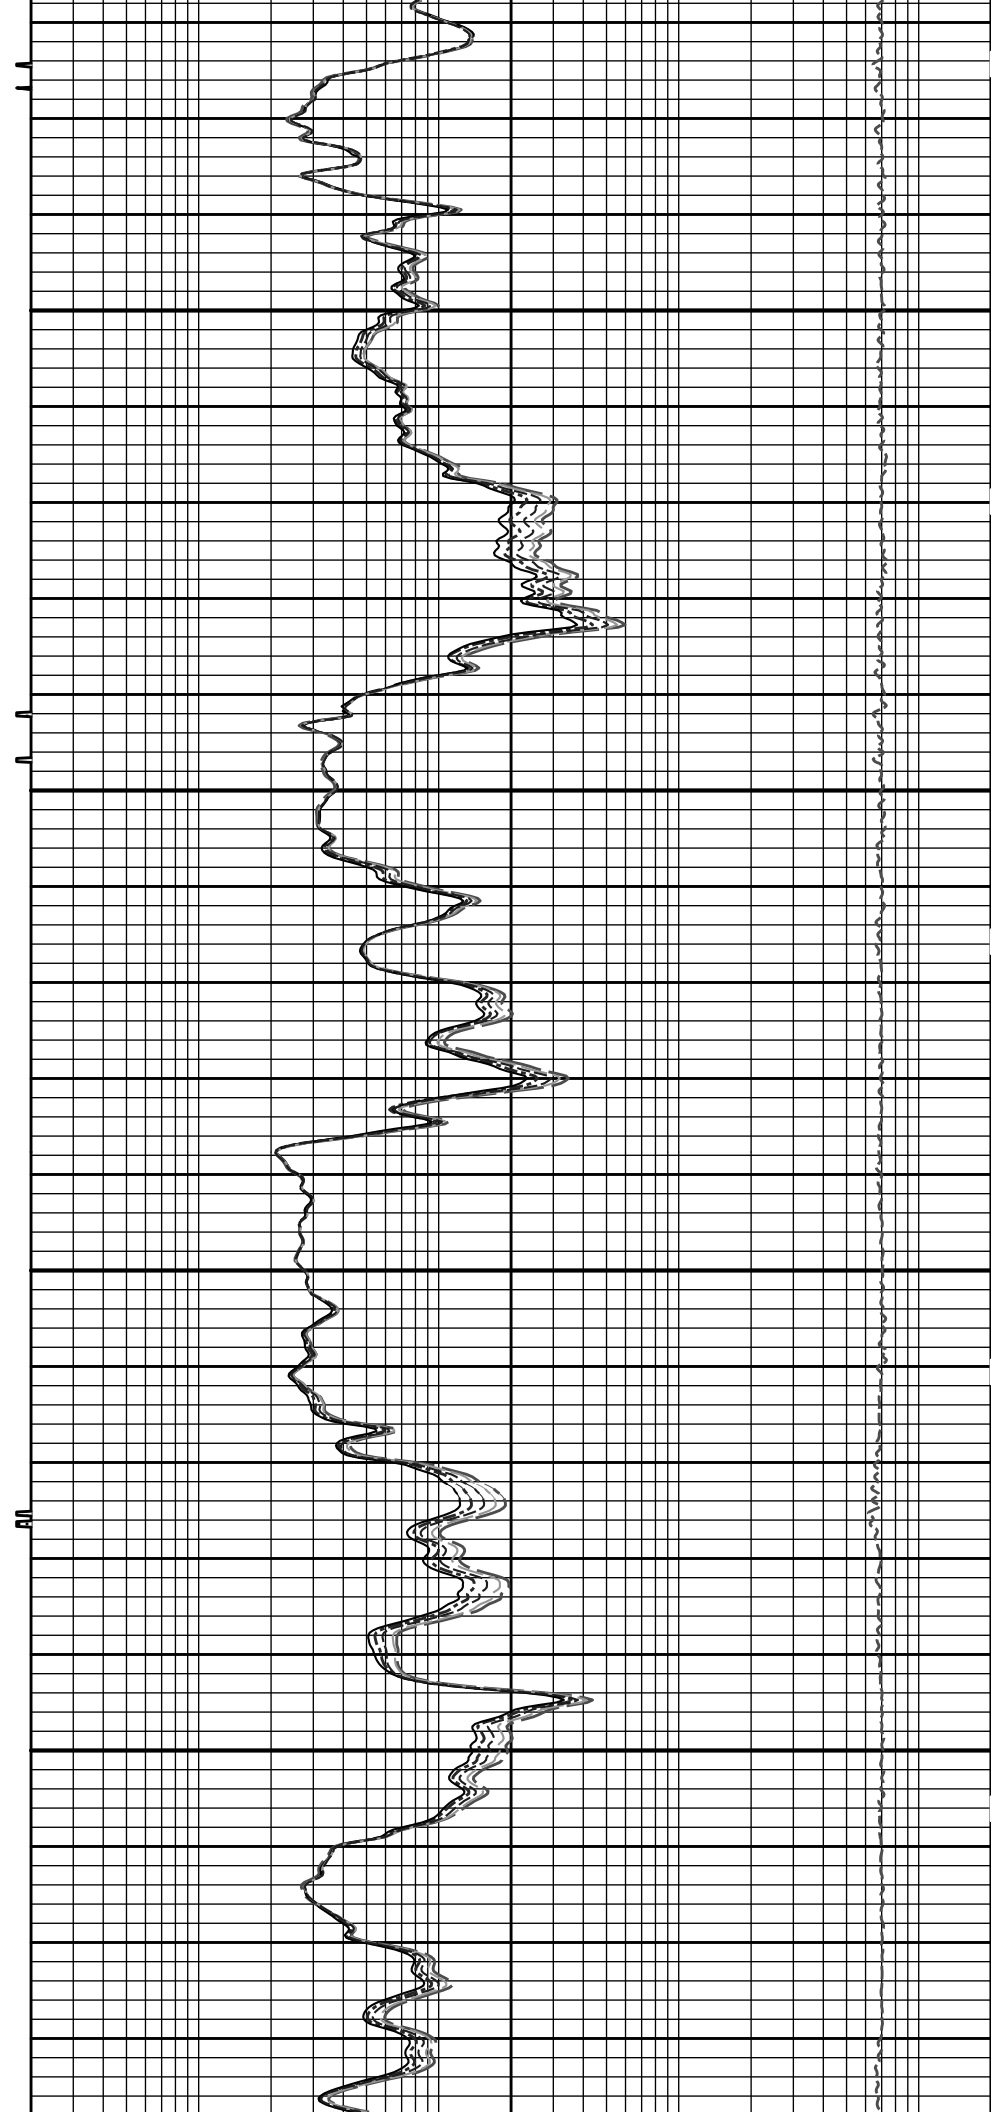


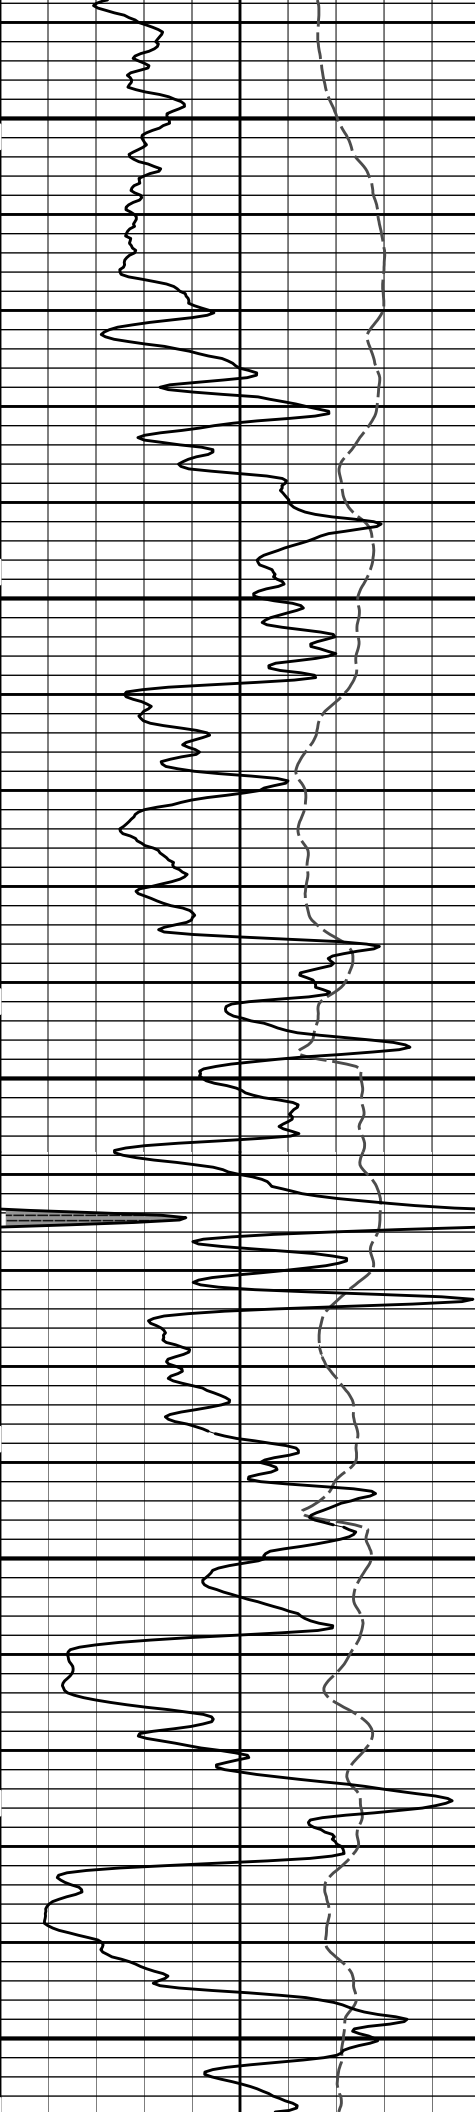

2700

2800

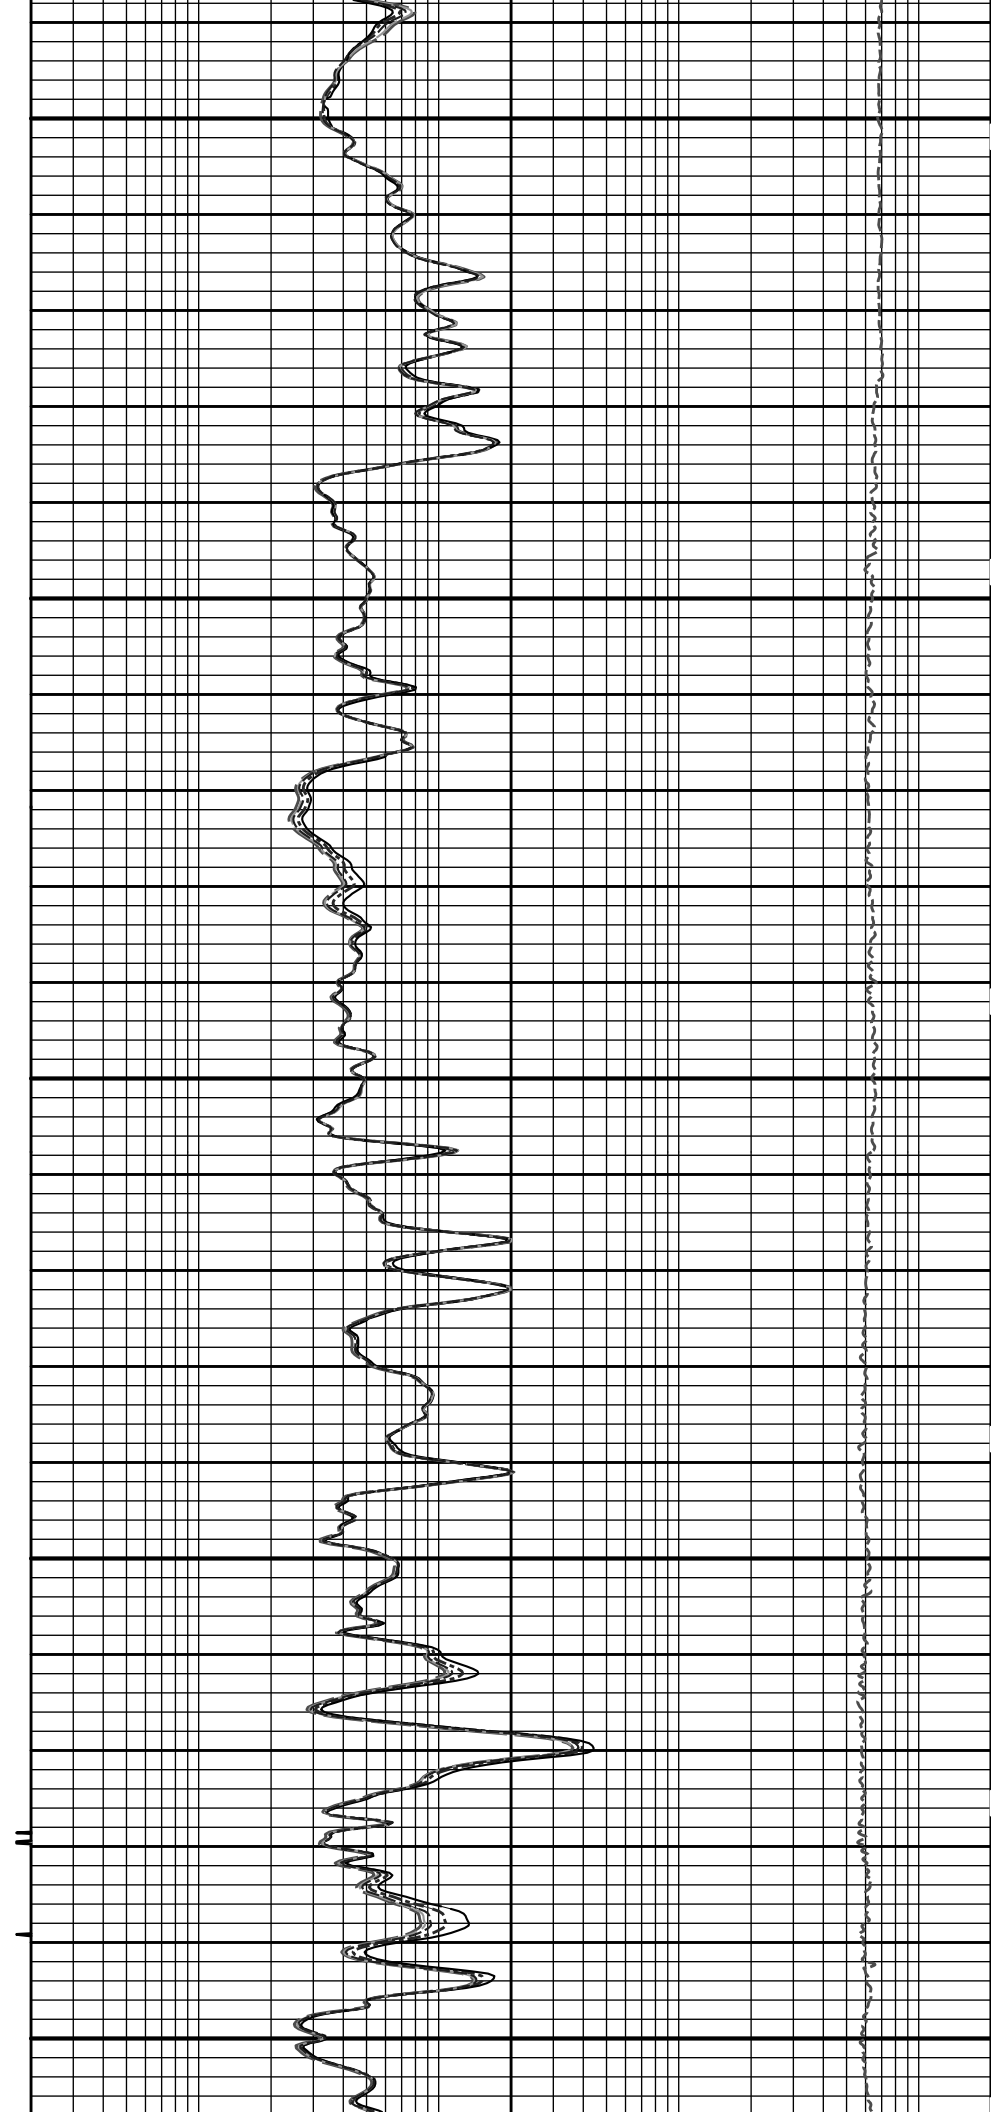

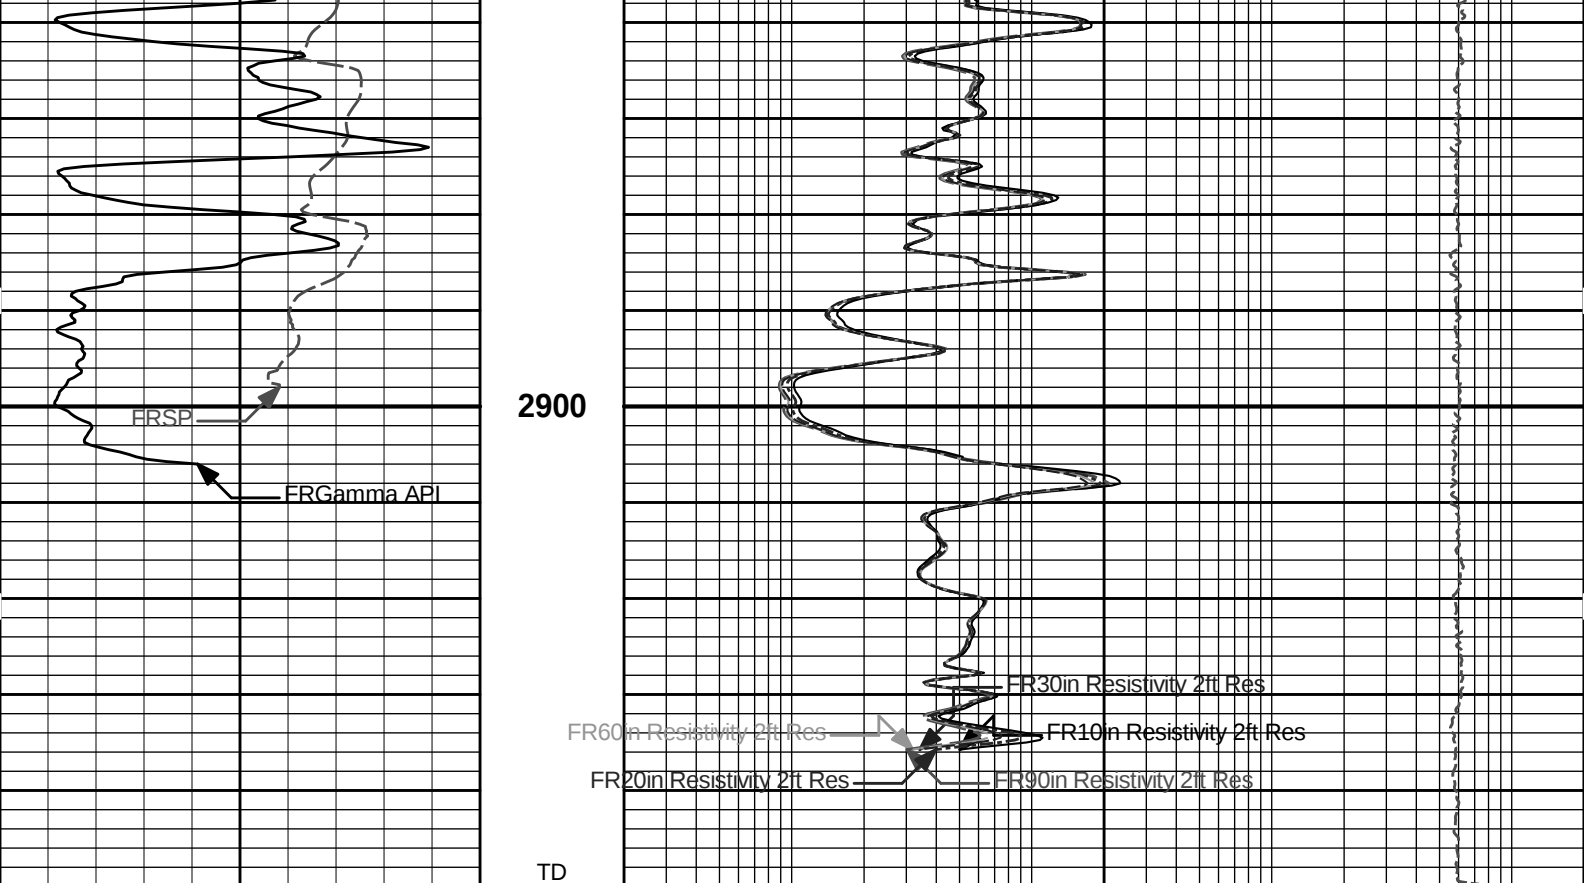

SP		1 : 240 ft	10K		Tension	0
-]20[+			pounds			
0	Gamma API	150	Tension Pull	0.2	10in Resistivity 2ft Res	2000
	api		10		ohmm	
SHALE		Tension Pull	0.2	20in Resistivity 2ft Res	ohmm	2000
			0.2	30in Resistivity 2ft Res	ohm-metre	2000
		0.2	60in Resistivity 2ft Res	ohmm	2000	
		0.2	90in Resistivity 2ft Res	ohmm	2000	

HALLIBURTON

Plot Time: 05-Aug-10 04:59:13
Plot Range: 590 ft to 2949.83 ft
Data: EVANS_4_25\Well Based\DAQ-0001-003\
Plot File: \\-LOCAL-\\EVANS_4_25\\0001 SP-GTET-DSNT-SDLT-ACRT-CHACRT\\ACRT_5_main.lib

5 INCH MAIN LOG


HALLIBURTON

Plot Time: 05-Aug-10 04:59:13
Plot Range: 2690 ft to 2965.25 ft
Data: EVANS_4_25\Well Based\DAQ-0001-002\
Plot File: \\-LOCAL-\\EVANS_4_25\\0001 SP-GTET-DSNT-SDLT-ACRT-CHACRT\\ACRT_5_repeat.lib

REPEAT SECTION

	0.2	90in Resistivity 2ft Res	2000

[illegible]

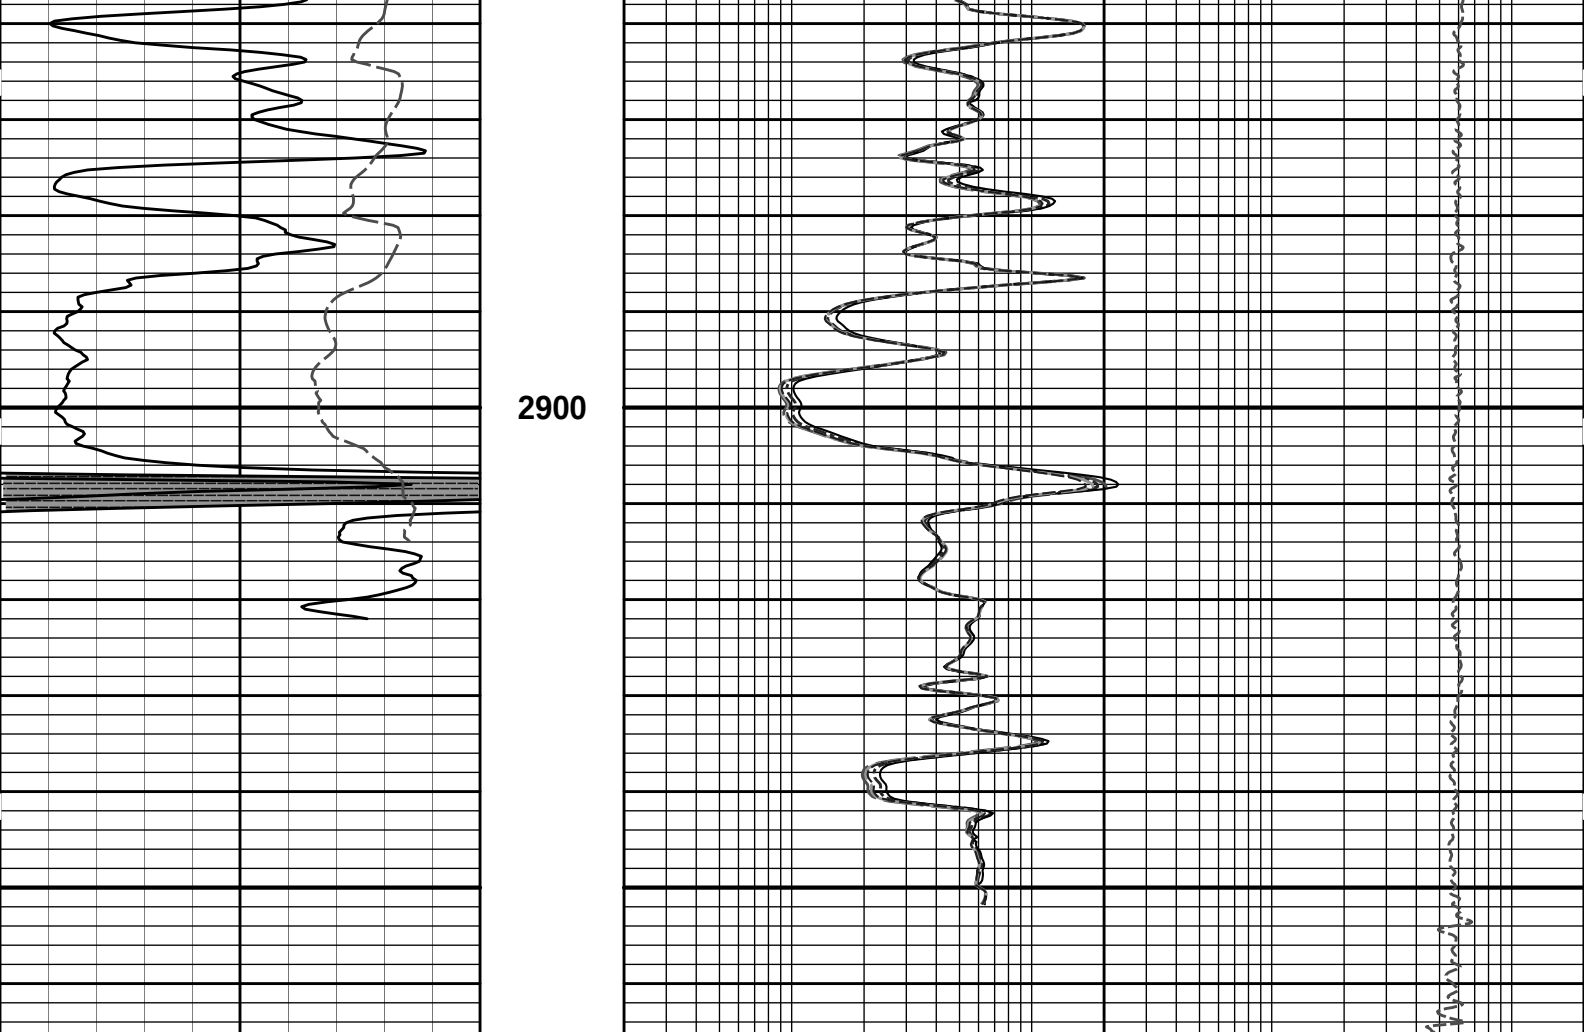

SP -]20[+	1 : 240 ft	10K	Tension		0
			pounds		
0	Gamma API api	0.2	10in Resistivity 2ft Res		2000
			ohmm		
		0.2	20in Resistivity 2ft Res		2000
			ohmm		
		0.2	30in Resistivity 2ft Res		2000
			ohm-metre		
	SHALE	0.2	60in Resistivity 2ft Res		2000
			ohmm		
		0.2	90in Resistivity 2ft Res		2000
			ohmm		

HALLIBURTON

Plot Time: 05-Aug-10 04:59:19

Plot Range: 2690 ft to 2965.25 ft

Data: EVANS_4_25\Well Based\DAQ-0001-002\


Plot File: \\-LOCAL-\\EVANS_4_25\0001 SP-GTET-DSNT-SDLT-ACRT-CH\ACRT\ACRT_5_repeat_lib

REPEAT SECTION

HALLIBURTON

TOOL STRING DIAGRAM REPORT

Description	Overbody Description	O.D.	Diagram	Sensors @ Delays	Length	Accumulated Length
-------------	----------------------	------	---------	------------------	--------	--------------------

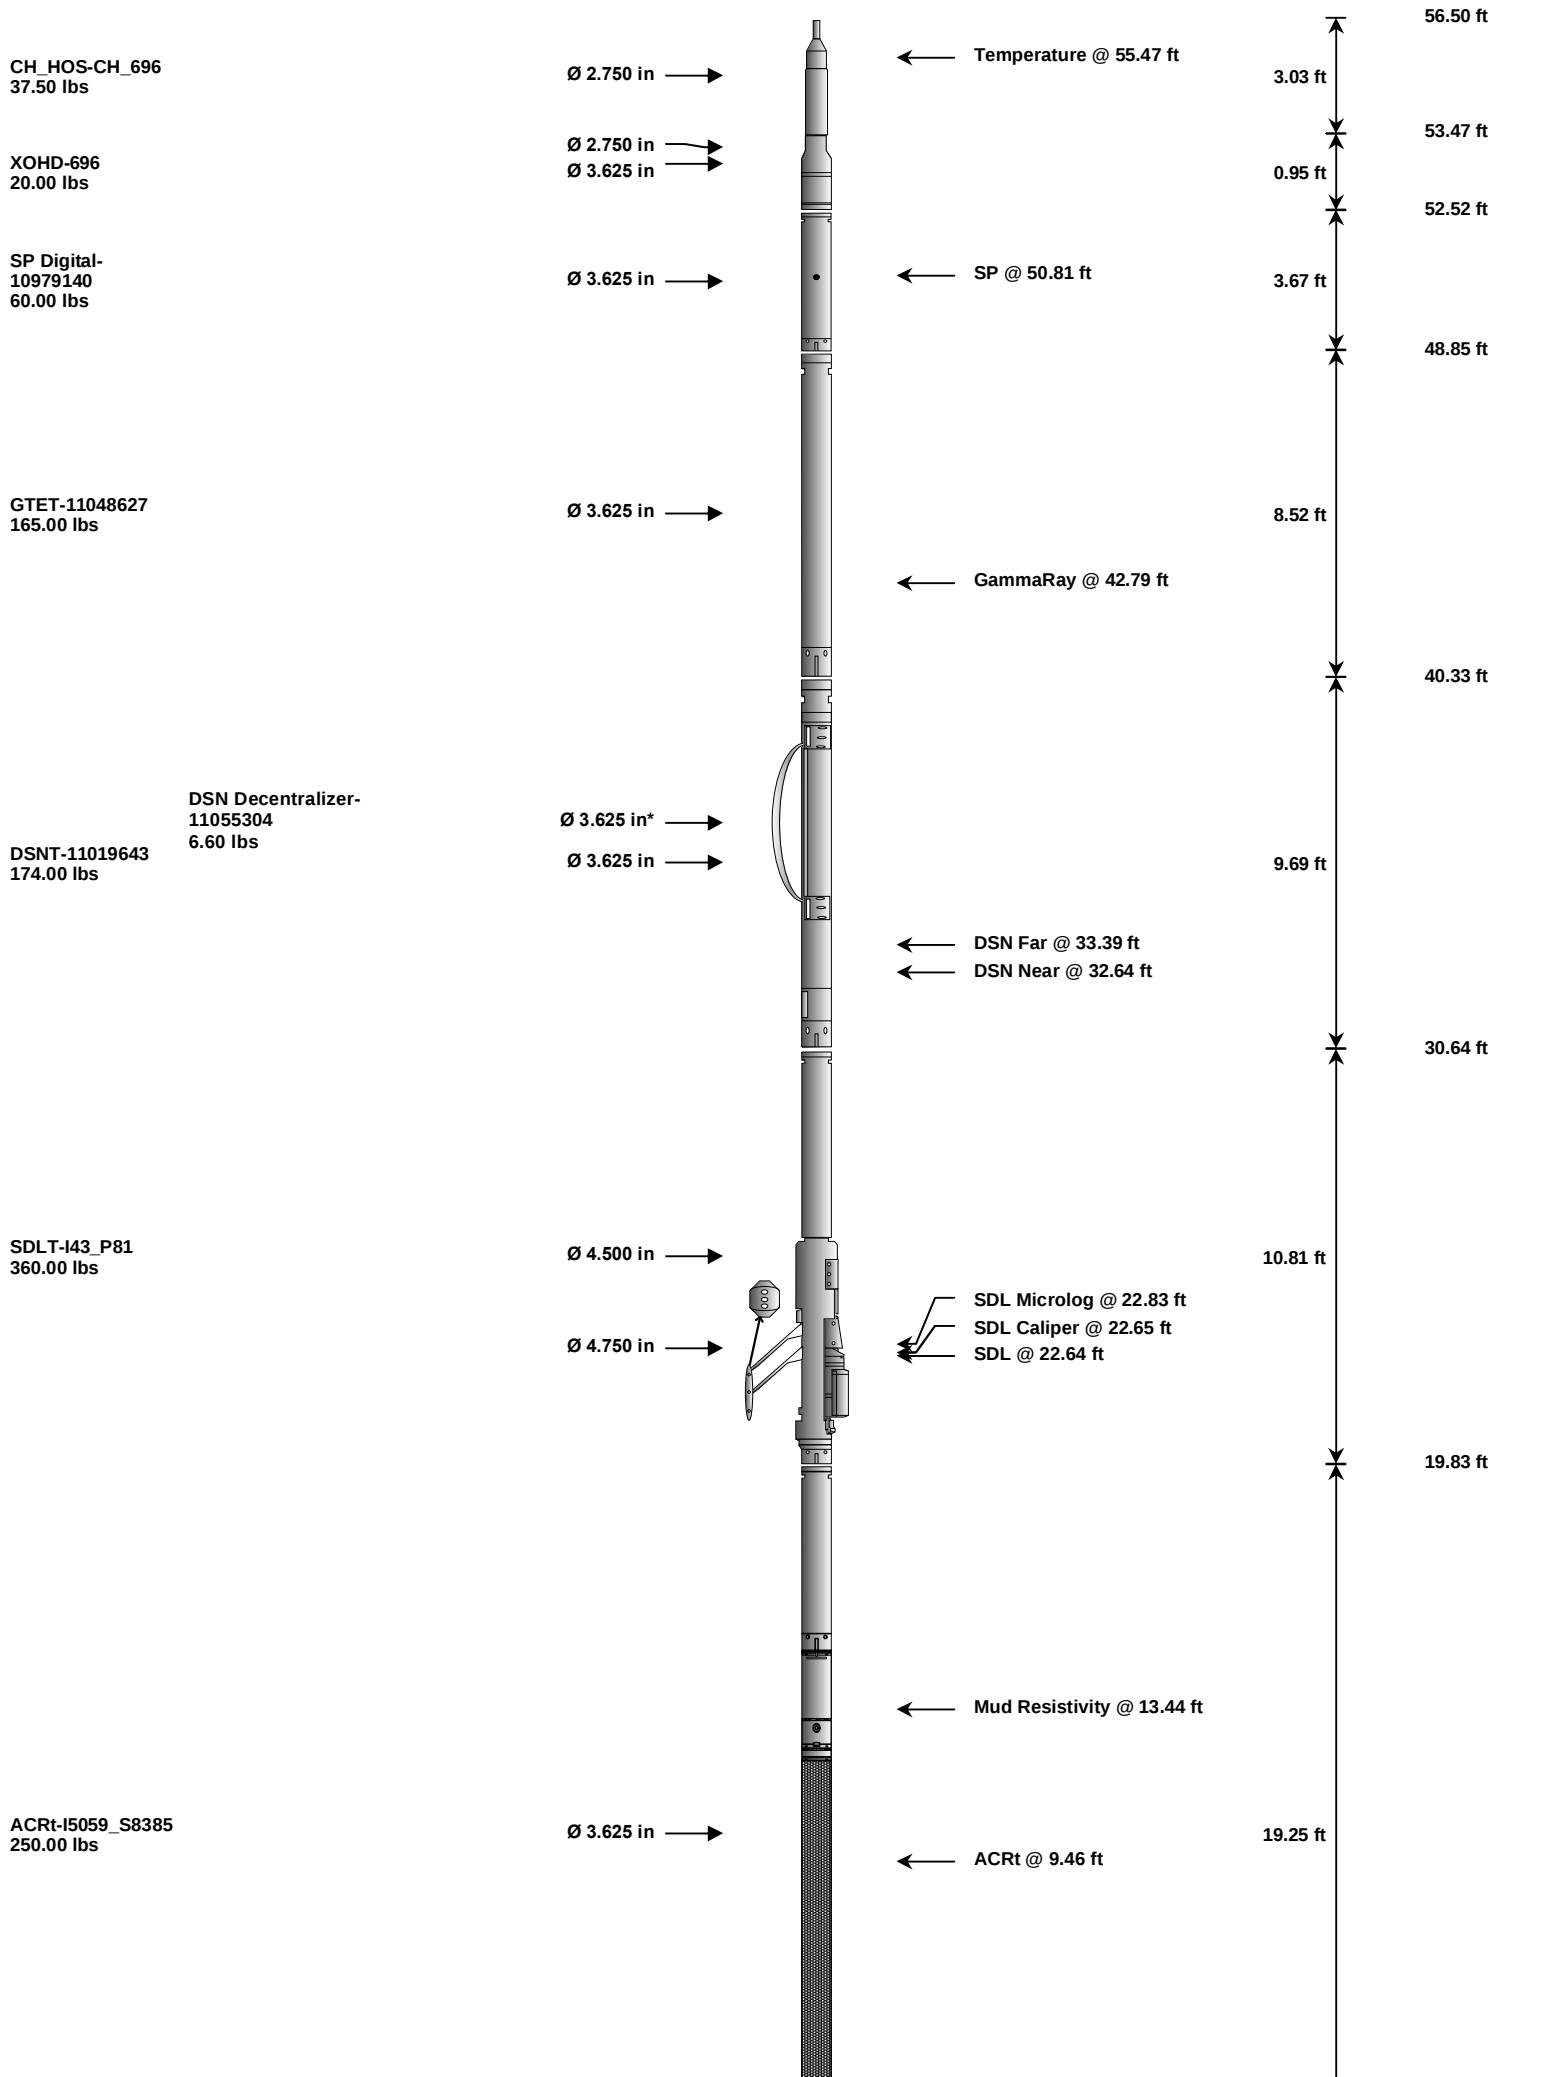

Cabbage Head-696
10.00 lbs

Ø 3.625 in
Ø 6.000 in



0.58 ft
0.58 ft
0.00 ft

Mnemonic		Tool Name	Serial Number	Weight (lbs)	Length (ft)	Accumulated Length (ft)	Max.Log. Speed (fpm)
CH_HOS	Hostile Cable Head with Load Cell		CH_696	37.50	3.03	53.47	300.00
XOHD	Hostile to Dits Cross Over		696	20.00	0.95	52.52	300.00
SP	Digital Downhole Measured SP		10979140	60.00	3.67	48.85	300.00
GTET	Gamma Telemetry Tool		11048627	165.00	8.52	40.33	60.00
DSNT	Dual Spaced Neutron		11019643	174.00	9.69	30.64	60.00
DCNT	DSN Decentralizer		11055304	6.60	5.13	*	33.97
SDLT	Spectral Density Tool		I43 P81	360.00	10.81	19.83	60.00
ACRt	Array Compensated True Resistivity		I5059_S8385	250.00	19.25	0.58	300.00
CBHD	Cabbage Head		696	10.00	0.58	0.00	300.00
Total				1,083.10	56.50		
* Not included in Total Length and Length Accumulation.							
Data: EVANS_4_25I0001 SP-GTET-DSNT-SDLT-ACRT-CHIDLE						Date: 05-Aug-10 02:10:24	

HALLIBURTON

CALIBRATION REPORT

ARRAY COMPENSATED TRUE RESISTIVITY SHOP CALIBRATION

Tool Name: ACRt - I5059_S8385

Reference Calibration Date: 21-Jun-10 11:23:49

Engineer: W.MILLER

Calibration Date: 22-Jul-10 10:53:07

Software Version: WL INSITE R3.0.4 (Build 6)

Calibration Version: 1

TYPICAL GAIN RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	0.95	1.0250	1.05	0.95	1.0322	1.05	0.95	1.0354	1.05
A2 (50")	0.95	1.0133	1.05	0.95	1.0197	1.05	0.95	1.0246	1.05
A3 (29")	0.95	1.0017	1.05	0.95	1.0082	1.05	0.95	1.0093	1.05
A4 (17")	0.95	1.0033	1.05	0.95	1.0071	1.05	0.95	1.0098	1.05
A5 (10")	N/A	N/A	N/A	0.95	1.0009	1.05	0.95	1.0028	1.05
A6 (6")	N/A	N/A	N/A	0.95	0.9841	1.05	0.95	0.9865	1.05

TYPICAL SONDE OFFSET RANGE

Subarray	R12KHz			R36KHz			R72KHz		
	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper	Lower	(mmho/m)	Upper
A1 (80")	-5	-0.358	2	-6	-3.303	-2	-8	-4.714	-2
A2 (50")	-7	-2.240	-1	-6	-3.731	-2	-7	-4.218	-2
A3 (29")	-27	-12.875	-9	-9	-3.394	-3	-7	-2.305	-1
A4 (17")	-180	-102.687	-60	-45	-31.810	-15	-39	-25.284	-13
A5 (10")	N/A	N/A	N/A	-150	-80.667	-50	-80	-40.869	-10
A6 (6")	N/A	N/A	N/A	175	338.045	525	90	168.870	270

TRANSMITTER CURRENT GAIN

Signal	Lower	R	Upper
--------	-------	---	-------

R-MUD VERIFICATION

Signal	Lower (ohm-m)	Measured (ohm-m)	Upper (ohm-m)
--------	---------------	------------------	---------------

12K	0.6	0.9053	1.3	Mud Cell	0.95	1.004	1.05
36K	1.0	1.3553	2.0				
72K	1.0	1.6212	2.0				
CALIBRATION SUMMARY							
Sensor	Shop	Field	Post	Difference	Tolerance	Units	
ACRt-I5059_S8385							
Mud Cell	1.004	-----	-----	0.000	-----	ohm-m	
Data: EVANS_4_25\0001 SP-GTET-DSNT-SDLT-ACRT-CHIDLE						Date: 05-Aug-10 02:09:27	

HALLIBURTON

PARAMETERS REPORT

Depth (ft)	Tool Name	Mnemonic	Description	Value	Units
TOP					
	SHARED	BS	Bit Size	7.875	in
	SHARED	UBS	Use Bit Size instead of Caliper for all applications.	No	
	SHARED	MDWT	Borehole Fluid Weight	8.900	ppg
	SHARED	OBM	Oil Based Mud System?	No	
	SHARED	RMUD	Mud Resistivity	0.190	ohmm
	SHARED	TRM	Temperature of Mud	90.0	degF
	SHARED	CSD	Logging Interval is Cased?	No	
	SHARED	ICOD	AHV Casing OD	5.500	in
	SHARED	ST	Surface Temperature	75.0	degF
	SHARED	TD	Total Well Depth	3025.00	ft
	SHARED	BHT	Bottom Hole Temperature	115.0	degF
	SHARED	SVTM	Navigation and Survey Master Tool	NONE	
	SHARED	AZTM	High Res Z Accelerometer Master Tool	GTET	
	SHARED	TEMM	Temperature Master Tool	NONE	
	SHARED	BHSM	Borehole Size Master Tool	NONE	
	Rwa / CrossPlot	XPOK	Process Crossplot?	Yes	
	Rwa / CrossPlot	FCHO	Select Source of F	Automatic	
	Rwa / CrossPlot	AFAC	Archie A factor	0.6200	
	Rwa / CrossPlot	MFAC	Archie M factor	2.1500	
	Rwa / CrossPlot	RMFR	Rmf Reference	0.17	ohmm
	Rwa / CrossPlot	TMFR	Rmf Ref Temp	90.00	degF
	Rwa / CrossPlot	RWA	Resistivity of Formation Water	0.05	ohmm
	Rwa / CrossPlot	ADP	Use Air Porosity to calculate CrossplotPhi	No	
	GTET	GROK	Process Gamma Ray?	Yes	
	GTET	GRSO	Gamma Tool Standoff	0.000	in
	GTET	GEOK	Process Gamma Ray EVR?	No	
	GTET	POTA	Potassium	0.00	%
	GTET	MDTP	Mud Type	Natural	
	GTET	TPOS	Tool Position	Standoff	
	DSNT	DNOK	Process DSN?	Yes	
	DSNT	DEOK	Process DSN EVR?	No	
	DSNT	NLIT	Neutron Lithology	Limestone	
	DSNT	DSNO	DSN Standoff - 0.25 in (6.35 mm) Recommended	0.300	in

DSNT	DNTP	Temperature Correction Type	None	
DSNT	DPRS	DSN Pressure Correction Type	None	
DSNT	SHCO	View More Correction Options	No	
DSNT	UTVD	Use TVD for Gradient Corrections?	No	
DSNT	LHWT	Logging Horizontal Water Tank?	No	
SDLT	DNOK	Process Density?	Yes	
SDLT	DNOK	Process Density EVR?	No	
SDLT	AD	Is Hole Air Drilled?	No	
SDLT	CB	Logging Calibration Blocks?	No	
SDLT	SPVT	SDLT Pad Temperature Valid?	Yes	
SDLT	DTWN	Disable temperature warning	No	
SDLT	MDTP	Weighted Mud Correction Type?	None	
SDLT	DMA	Formation Density Matrix	2.710	g/cc
SDLT	DFL	Formation Density Fluid	1.000	g/cc
SDLT	CLOK	Process Caliper Outputs?	Yes	
SDLT	MLOK	Process MicroLog Outputs?	Yes	
ACRt	RTOK	Process ACRt?	Yes	
ACRt	MNSO	Minimum Tool Standoff	1.50	in
ACRt	TCS1	Temperature Correction Source	FP Lwr & FP Up	
ACRt	TPOS	Tool Position	Free Hanging	
ACRt	RMOP	Rmud Source	Mud Cell	
ACRt	RMIN	Minimum Resistivity for MAP	0.20	ohmm
ACRt	RMIN	Maximum Resistivity for MAP	200.00	ohmm
ACRt	THQY	Threshold Quality	0.50	
BOTTOM				
Data: EVANS_4_25I0001 SP-GTET-DSNT-SDLT-ACRT-CHIDLE			Date: 05-Aug-10 03:35:49	

HALLIBURTON				
INPUTS, DELAYS AND FILTERS TABLE				
Mnemonic	Input Description	Delay (ft)	Filter Type	Filter Length (ft)
Depth Panel				
TENS	Tension	0.00	NO	
CH_HOS				
DHTN	DownholeTension	0.00	BLK	0.000
SP Digital				
PLTC	Plot Control Mask	50.81	NO	
SP	Spontaneous Potential	50.81	BLK	1.250
SPR	Raw Spontaneous Potential	50.81	NO	
SPO	Spontaneous Potential Offset	50.81	NO	
GTET				
TPUL	Tension Pull	42.79	NO	
GR	Natural Gamma Ray API	42.79	TRI	1.750
GRU	Unfiltered Natural Gamma Ray API	42.79	NO	
EGR	Natural Gamma Ray API with Enhanced Vertical Resolution	42.79	W	1.416 , 0.750
ACCZ	Accelerometer Z	0.00	BLK	0.083
DEVI	Inclination	0.00	NO	
DSNT				
TPUL	Tension Pull	33.54	NO	


TPUL	Tension Pull	32.34	NO	
RNDS	Near Detector Telemetry Counts	32.64	BLK	1.417
RFDS	Far Detector Telemetry Counts	33.39	TRI	0.583
DNTT	DSN Tool Temperature	32.64	NO	
DSNS	DSN Tool Status	32.54	NO	
ERND	Near Detector Telemetry Counts EVR	32.64	BLK	0.000
ERFD	Far Detector Telemetry Counts EVR	33.39	BLK	0.000
ENTM	DSN Tool Temperature EVR	32.64	NO	
SDLT				
TPUL	Tension Pull	22.64	NO	
NAB	Near Above	22.46	BLK	0.920
NHI	Near Cesium High	22.46	BLK	0.920
NLO	Near Cesium Low	22.46	BLK	0.920
NVA	Near Valley	22.46	BLK	0.920
NBA	Near Barite	22.46	BLK	0.920
NDE	Near Density	22.46	BLK	0.920
NPK	Near Peak	22.46	BLK	0.920
NLI	Near Lithology	22.46	BLK	0.920
NBAU	Near Barite Unfiltered	22.46	BLK	0.250
NLIU	Near Lithology Unfiltered	22.46	BLK	0.250
FAB	Far Above	22.81	BLK	0.250
FHI	Far Cesium High	22.81	BLK	0.250
FLO	Far Cesium Low	22.81	BLK	0.250
FVA	Far Valley	22.81	BLK	0.250
FBA	Far Barite	22.81	BLK	0.250
FDE	Far Density	22.81	BLK	0.250
FPK	Far Peak	22.81	BLK	0.250
FLI	Far Lithology	22.81	BLK	0.250
PTMP	Pad Temperature	22.65	BLK	0.920
NHV	Near Detector High Voltage	19.83	NO	
FHV	Far Detector High Voltage	19.83	NO	
ITMP	Instrument Temperature	19.83	NO	
TPUL	Tension Pull	22.65	NO	
PCAL	Pad Caliper	22.65	TRI	0.250
ACAL	Arm Caliper	22.65	TRI	0.250
TPUL	Tension Pull	22.83	NO	
MINV	Microlog Lateral	22.83	BLK	0.750
MNOR	Microlog Normal	22.83	BLK	0.750
ACRt				
TPUL	Tension Pull	2.97	NO	
F1R1	ACRT 12KHz - 80in R value	9.22	BLK	0.000
F1X1	ACRT 12KHz - 80in X value	9.22	BLK	0.000
F1R2	ACRT 12KHz - 50in R value	6.72	BLK	0.000
F1X2	ACRT 12KHz - 50in X value	6.72	BLK	0.000
F1R3	ACRT 12KHz - 29in R value	5.22	BLK	0.000
F1X3	ACRT 12KHz - 29in X value	5.22	BLK	0.000
F1R4	ACRT 12KHz - 17in R value	4.22	BLK	0.000
F1X4	ACRT 12KHz - 17in X value	4.22	BLK	0.000
F1R5	ACRT 12KHz - 10in R value	3.72	BLK	0.000
F1X5	ACRT 12KHz - 10in X value	3.72	BLK	0.000
F1R6	ACRT 12KHz - 6in R value	3.47	BLK	0.000
F1X6	ACRT 12KHz - 6in X value	3.47	BLK	0.000
F2R1	ACRT 36KHz - 80in R value	9.22	BLK	0.000
F2X1	ACRT 36KHz - 80in X value	9.22	BLK	0.000
F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000


F2R2	ACRT 36KHz - 50in R value	6.72	BLK	0.000
F2X2	ACRT 36KHz - 50in X value	6.72	BLK	0.000
F2R3	ACRT 36KHz - 29in R value	5.22	BLK	0.000
F2X3	ACRT 36KHz - 29in X value	5.22	BLK	0.000
F2R4	ACRT 36KHz - 17in R value	4.22	BLK	0.000
F2X4	ACRT 36KHz - 17in X value	4.22	BLK	0.000
F2R5	ACRT 36KHz - 10in R value	3.72	BLK	0.000
F2X5	ACRT 36KHz - 10in X value	3.72	BLK	0.000
F2R6	ACRT 36KHz - 6in R value	3.47	BLK	0.000
F2X6	ACRT 36KHz - 6in X value	3.47	BLK	0.000
F3R1	ACRT 72KHz - 80in R value	9.22	BLK	0.000
F3X1	ACRT 72KHz - 80in X value	9.22	BLK	0.000
F3R2	ACRT 72KHz - 50in R value	6.72	BLK	0.000
F3X2	ACRT 72KHz - 50in X value	6.72	BLK	0.000
F3R3	ACRT 72KHz - 29in R value	5.22	BLK	0.000
F3X3	ACRT 72KHz - 29in X value	5.22	BLK	0.000
F3R4	ACRT 72KHz - 17in R value	4.22	BLK	0.000
F3X4	ACRT 72KHz - 17in X value	4.22	BLK	0.000
F3R5	ACRT 72KHz - 10in R value	3.72	BLK	0.000
F3X5	ACRT 72KHz - 10in X value	3.72	BLK	0.000
F3R6	ACRT 72KHz - 6in R value	3.47	BLK	0.000
F3X6	ACRT 72KHz - 6in X value	3.47	BLK	0.000
RMUD	Mud Resistivity	12.76	BLK	0.000
F1RT	Transmitter Reference 12 KHz Real Signal	2.97	BLK	0.000
F1XT	Transmitter Reference 12 KHz Imaginary Signal	2.97	BLK	0.000
F2RT	Transmitter Reference 36 KHz Real Signal	2.97	BLK	0.000
F2XT	Transmitter Reference 36 KHz Imaginary Signal	2.97	BLK	0.000
F3RT	Transmitter Reference 72 KHz Real Signal	2.97	BLK	0.000
F3XT	Transmitter Reference 72 KHz Imaginary Signal	2.97	BLK	0.000
TFPU	Upper Feedpipe Temperature Calculated	2.97	BLK	0.000
TFPL	Lower Feedpipe Temperature Calculated	2.97	BLK	0.000
ITMP	Instrument Temperature	2.97	BLK	0.000
TCVA	Temperature Correction Values Loop Off	2.97	NO	
TIDV	Instrument Temperature Derivative	2.97	NO	
TUDV	Upper Temperature Derivative	2.97	NO	
TLDV	Lower Temperature Derivative	2.97	NO	
TRBD	Receiver Board Temperature	2.97	NO	
Data: EVANS_4_25\0001 SP-GTET-DSNT-SDLT-ACRT-CH\IDLE				Date: 05-Aug-10 02:09:48


COMPANY	PIONEER NATURAL RESOURCES		
WELL	EVANS 4-25		
FIELD			
COUNTY	GRANT	STATE	KANSAS
HALLIBURTON		ARRAY COMPENSATED RESISTIVITY LOG	

HALLIBURTON
Plot Time: 05-Aug-10 04:59:23
Plot Range: 590 ft to 2935.75 ft
Data: EVANS_4_25\Well Based\DAQ-0001-003\
Plot File: \\LOCAL-1\EVANS_4_25\0001 SP-GTET-DSNT-SDLT-ACRT-CH\ACRT1\ACRT_1.lib

1 INCH MAIN LOG

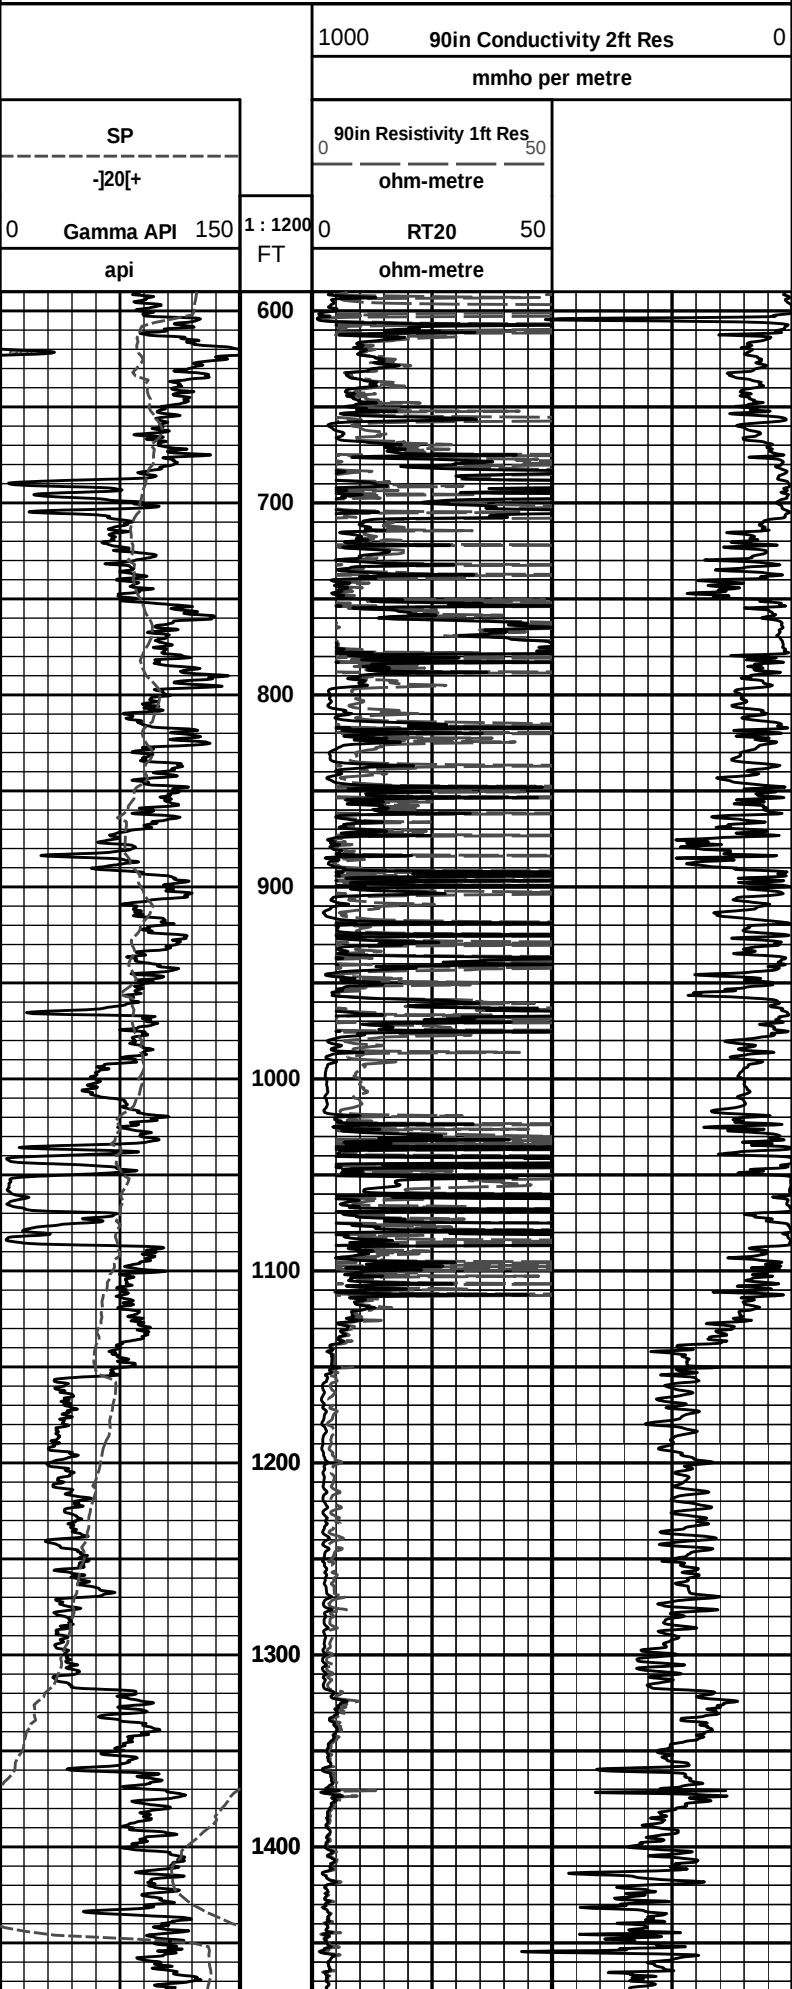

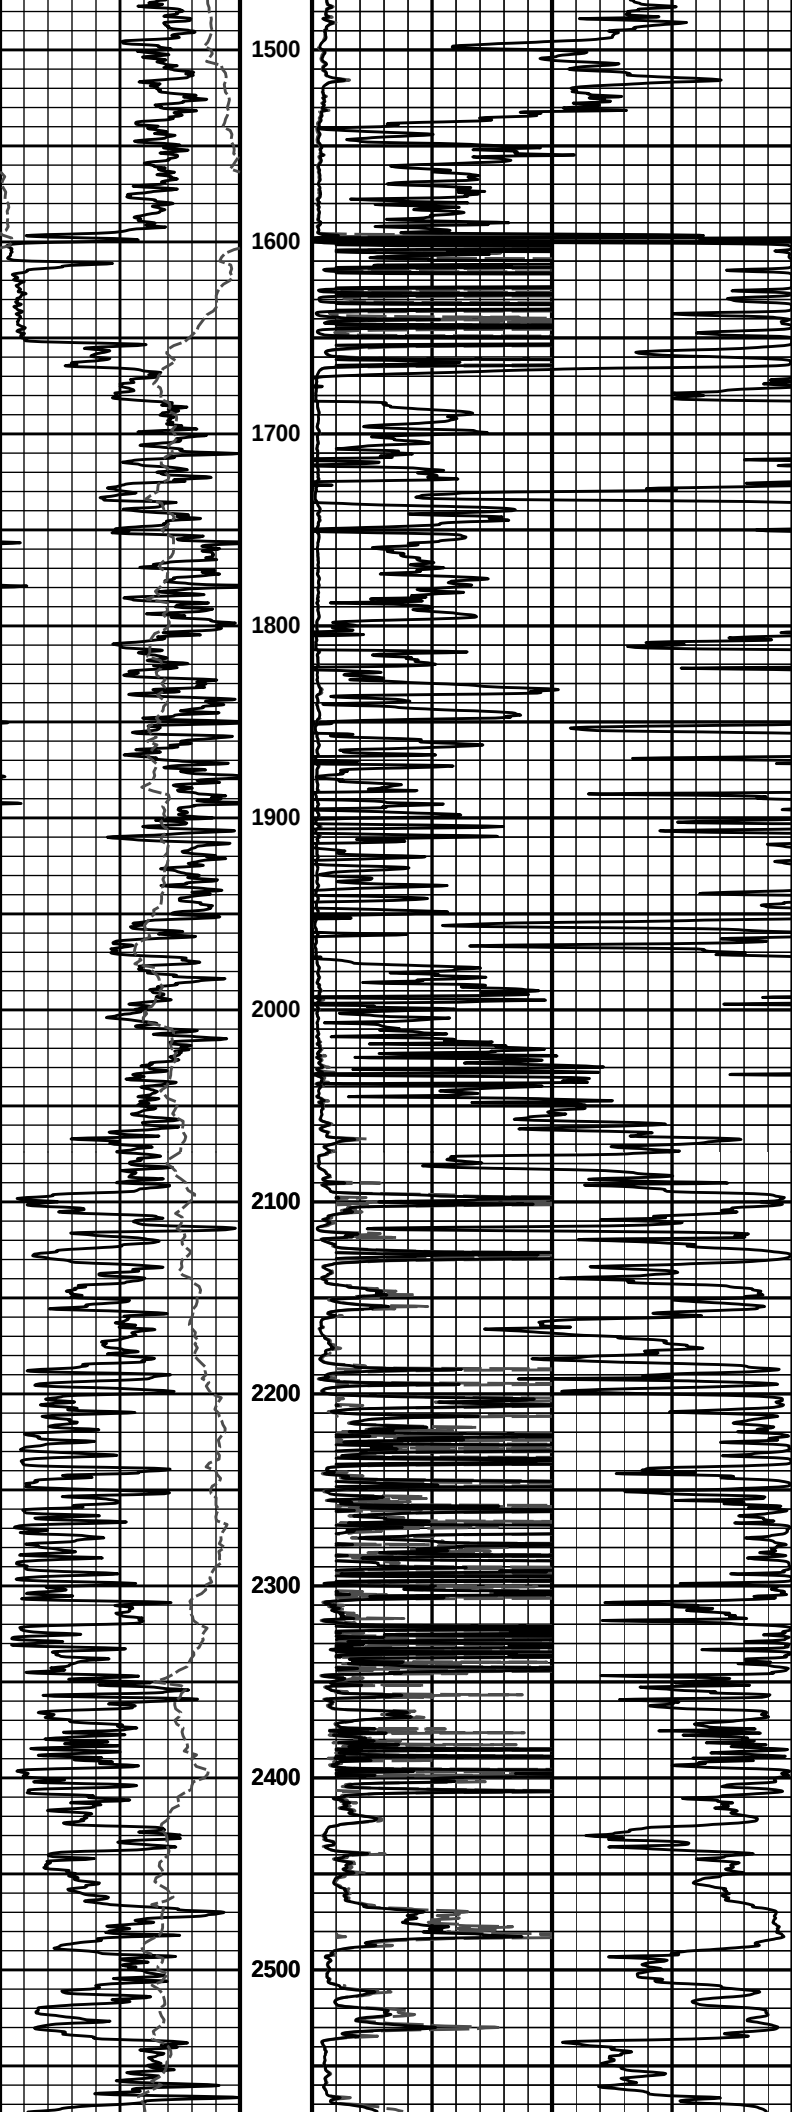

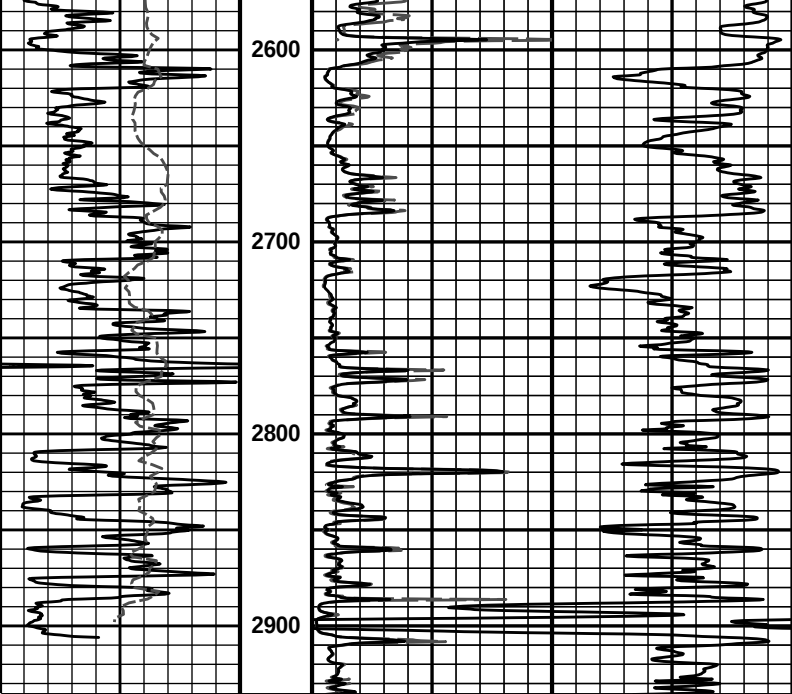

0	Gamma API	150	1 : 1200	0	RT20	50	
	api		FT		ohm-metre		
	SP				90in Resistivity 1ft Res	50	
	- 20 +				ohm-metre		
				1000	90in Conductivity 2ft Res	0	
					mmho per metre		

HALLIBURTON

Plot Time: 05-Aug-10 04:59:26
Plot Range: 590 ft to 2935.75 ft
Data: EVANS_4_25\Well Based\DAQ-0001-003\
Plot File: \\-LOCAL-IEVANS_4_25\0001 SP-GTET-DSNT-SDLT-ACRT-CH\ACRT\ACRT_1.lib

1 INCH MAIN LOG