



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Jason Oil Company, LLC.		
	Well Willson No. 1		
	Field Hall-Gurney		
	County Russell	State	Kansas
15-167-23,665-00-00	Location 330' FSL & 2310' FWL	Other Services RAG	
	Sec: 29	Twp: 14 S	Rge: 12 W
Permanent Datum	Ground Level	Elevation 1705	
Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	Elevation K.B. 1712 D.F. 1705 G.L. 1705	
Date	9/27/2010		
Run Number	Two		
Depth Driller	3250		
Depth Logger	3250		
Bottom Logged Interval	3249		
Top Log Interval	2500		
Casing Driller	8.625 @ 560		
Casing Logger	560		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3.600		
Density / Viscosity	9.4 60		
pH / Fluid Loss	9.0 8.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.95 @ 78		
Rmf @ Meas. Temp	.71 @ 78		
Rmc @ Meas. Temp	1.28 @ 78		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.67 @ 110		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	110		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Herb Deines		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Bunker Hill, 4 1/2 S to "T", 2 E, 1/2 N, 1/2 W, N into

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

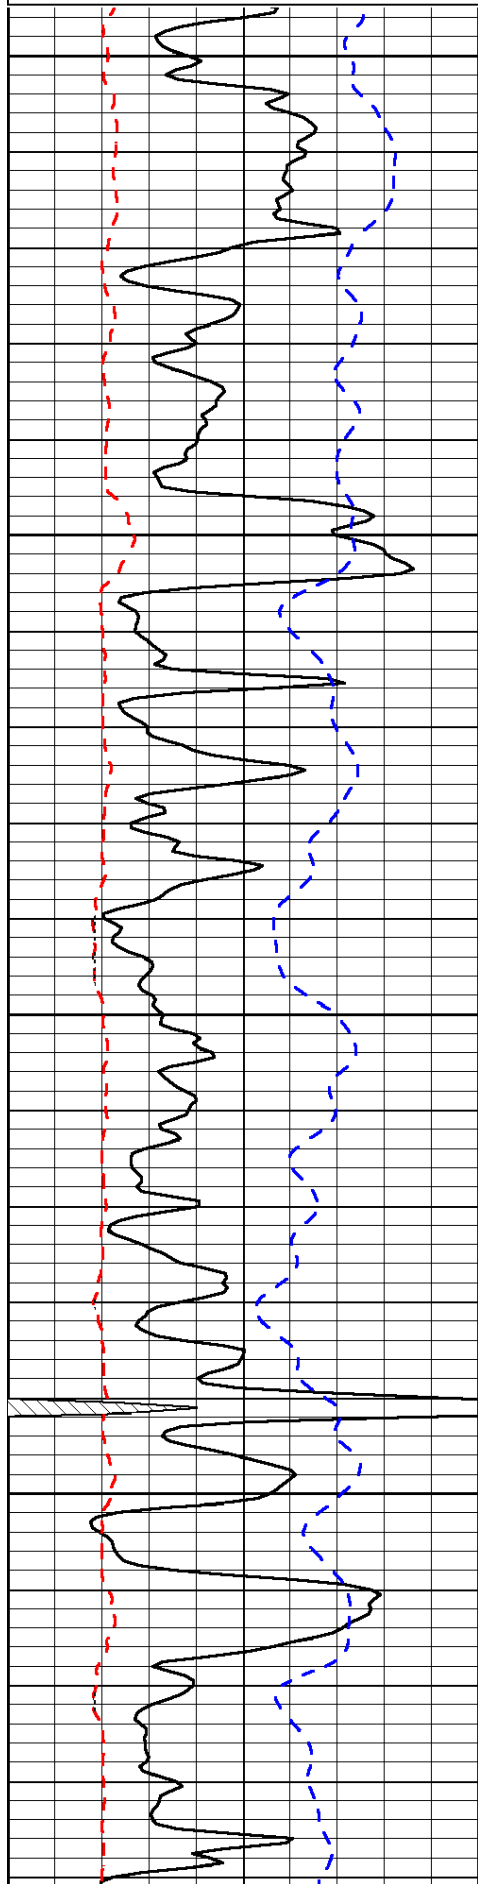

2500


2550

2600

2650

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD

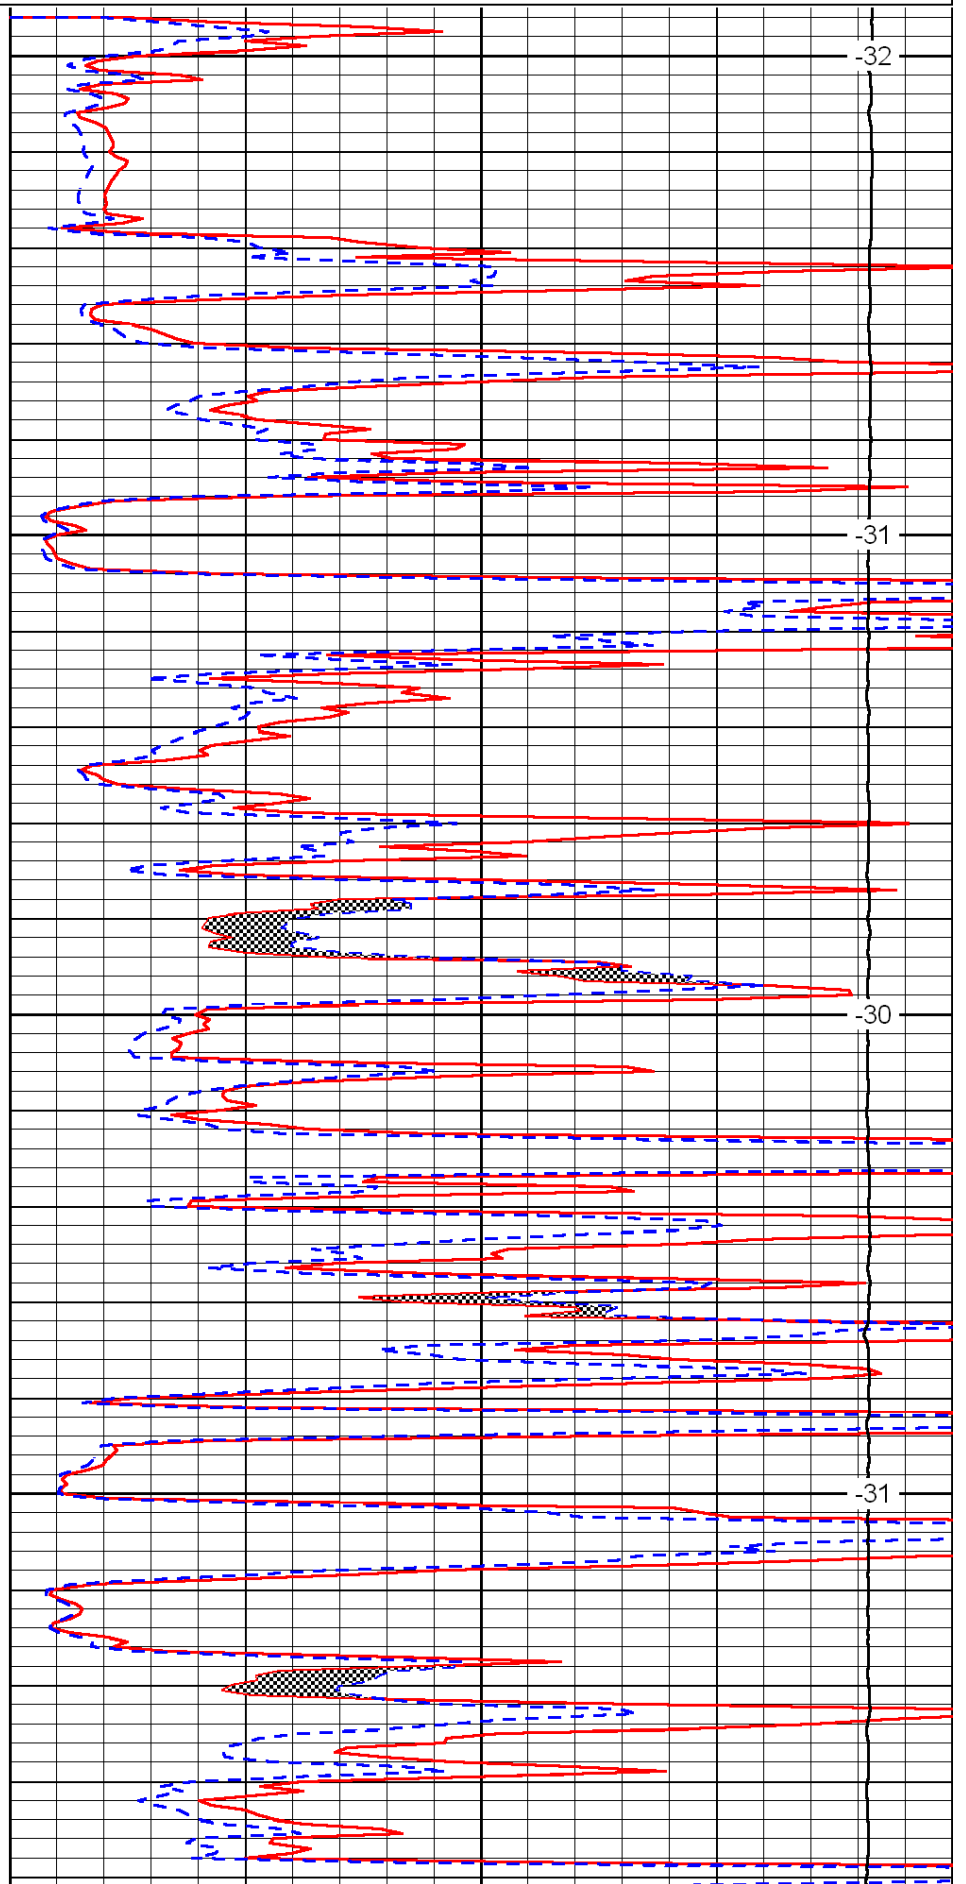


-32

-31

-30

-31

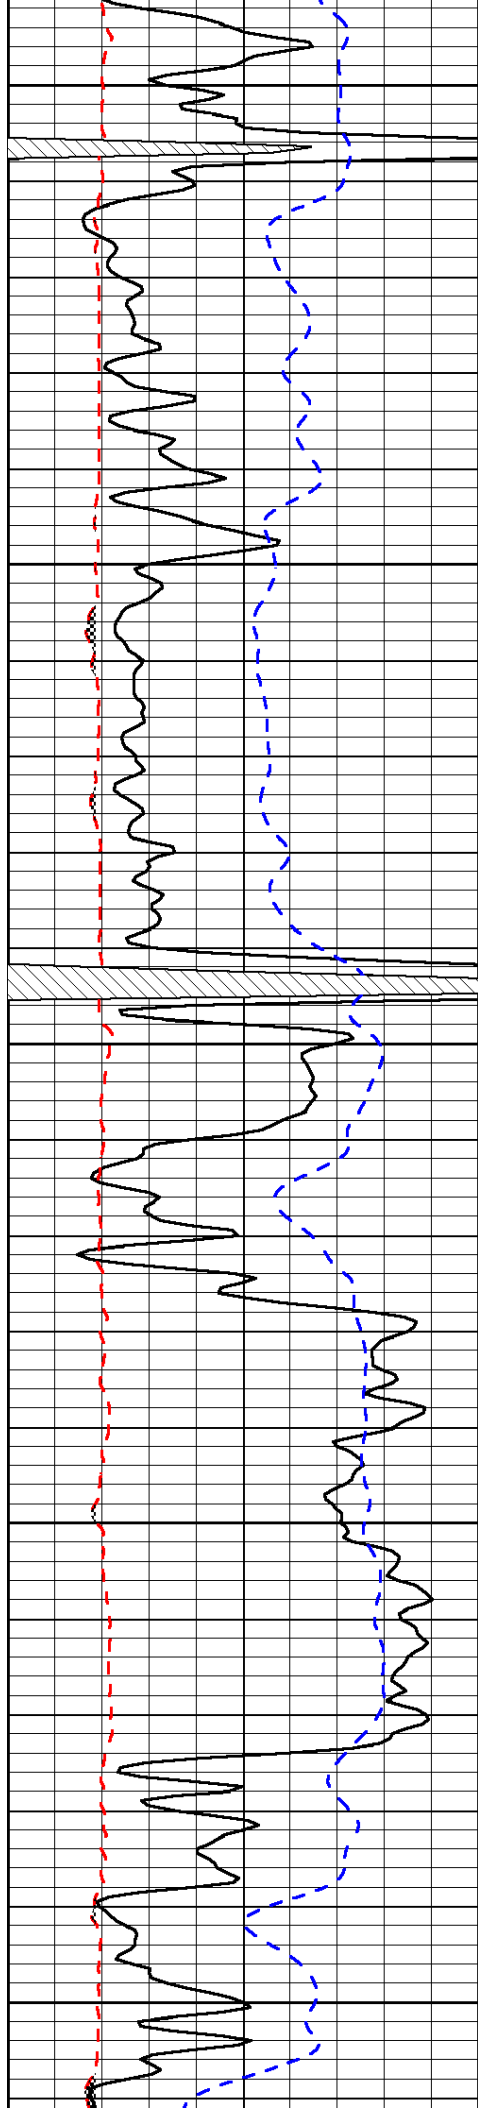


2700

2750

2800

2850

2900

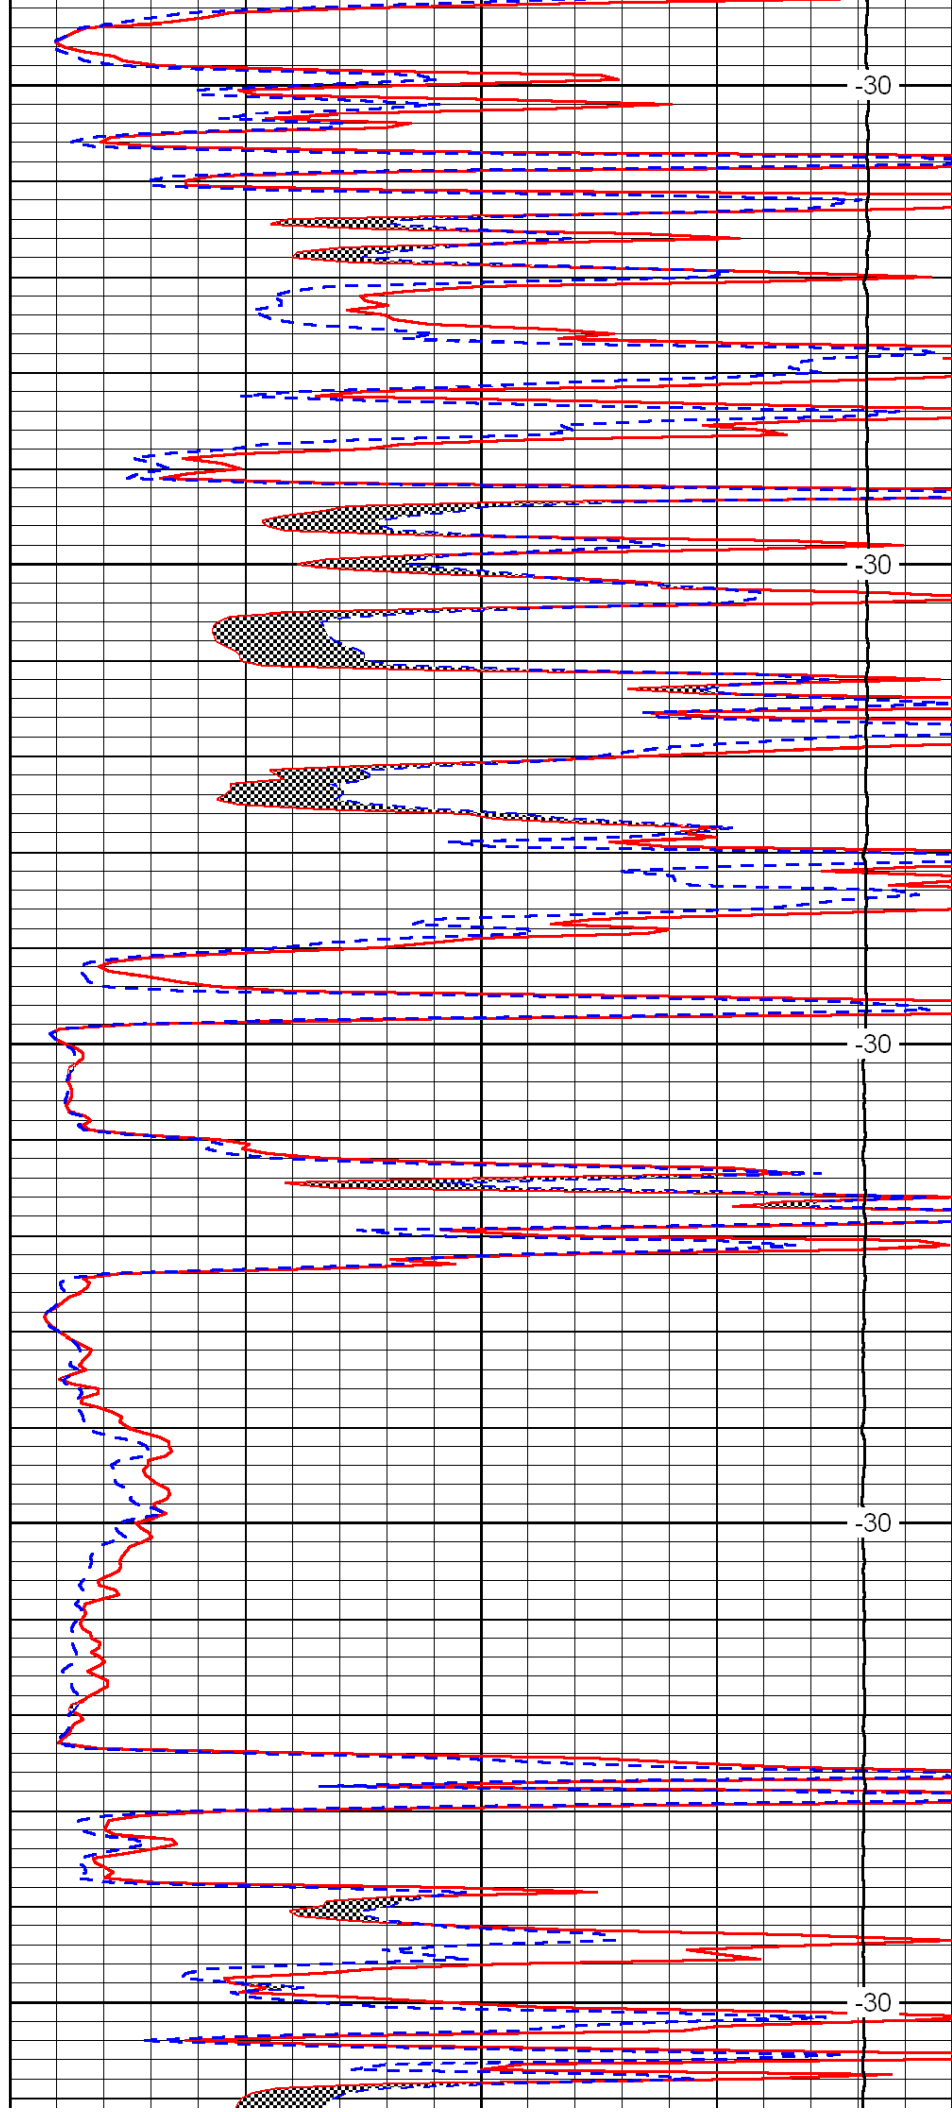


-30

-30

-30

-30

-30

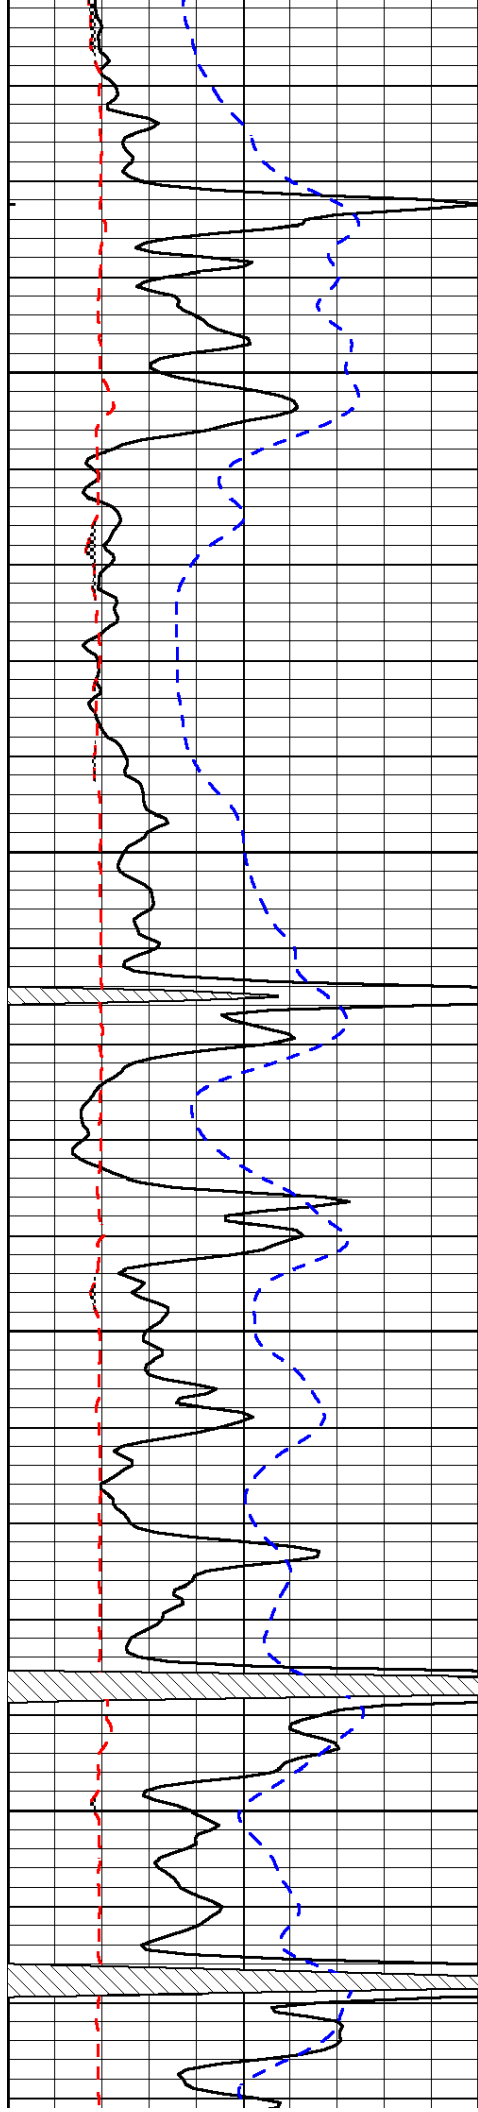




2950

3000

3050

3100

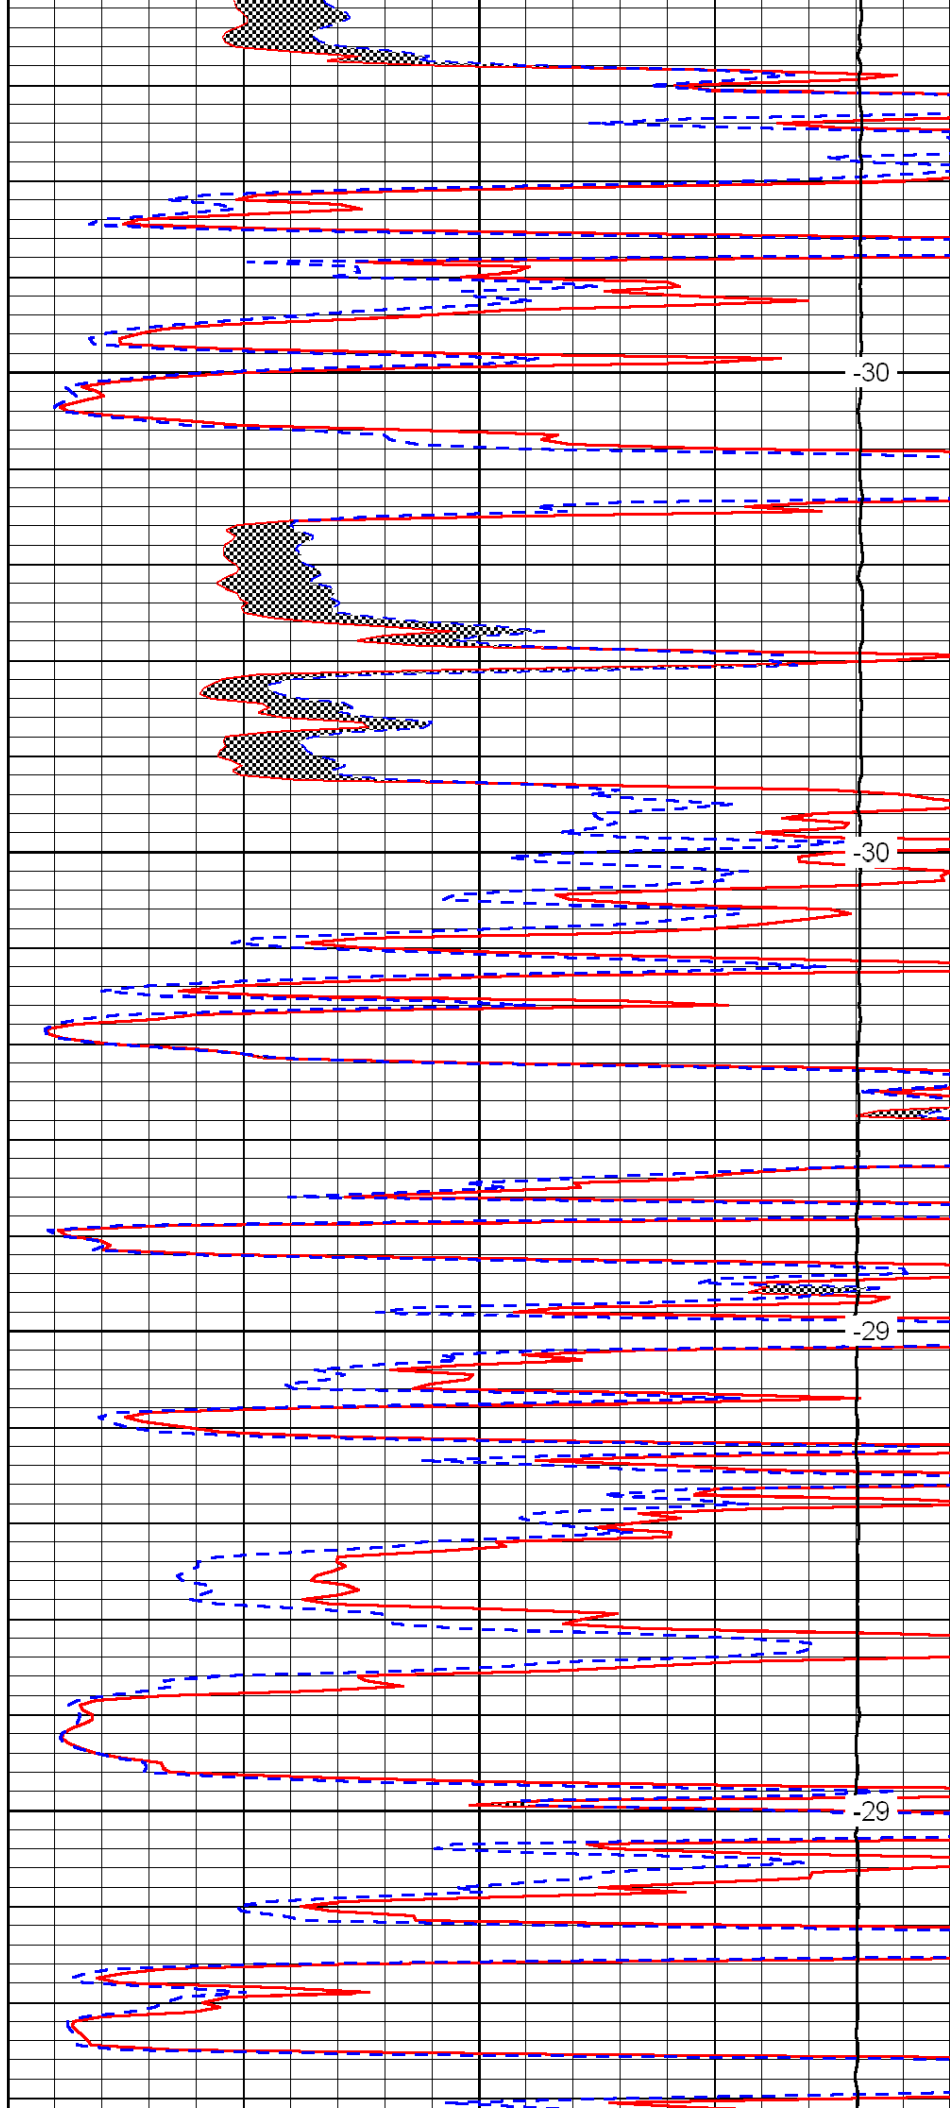

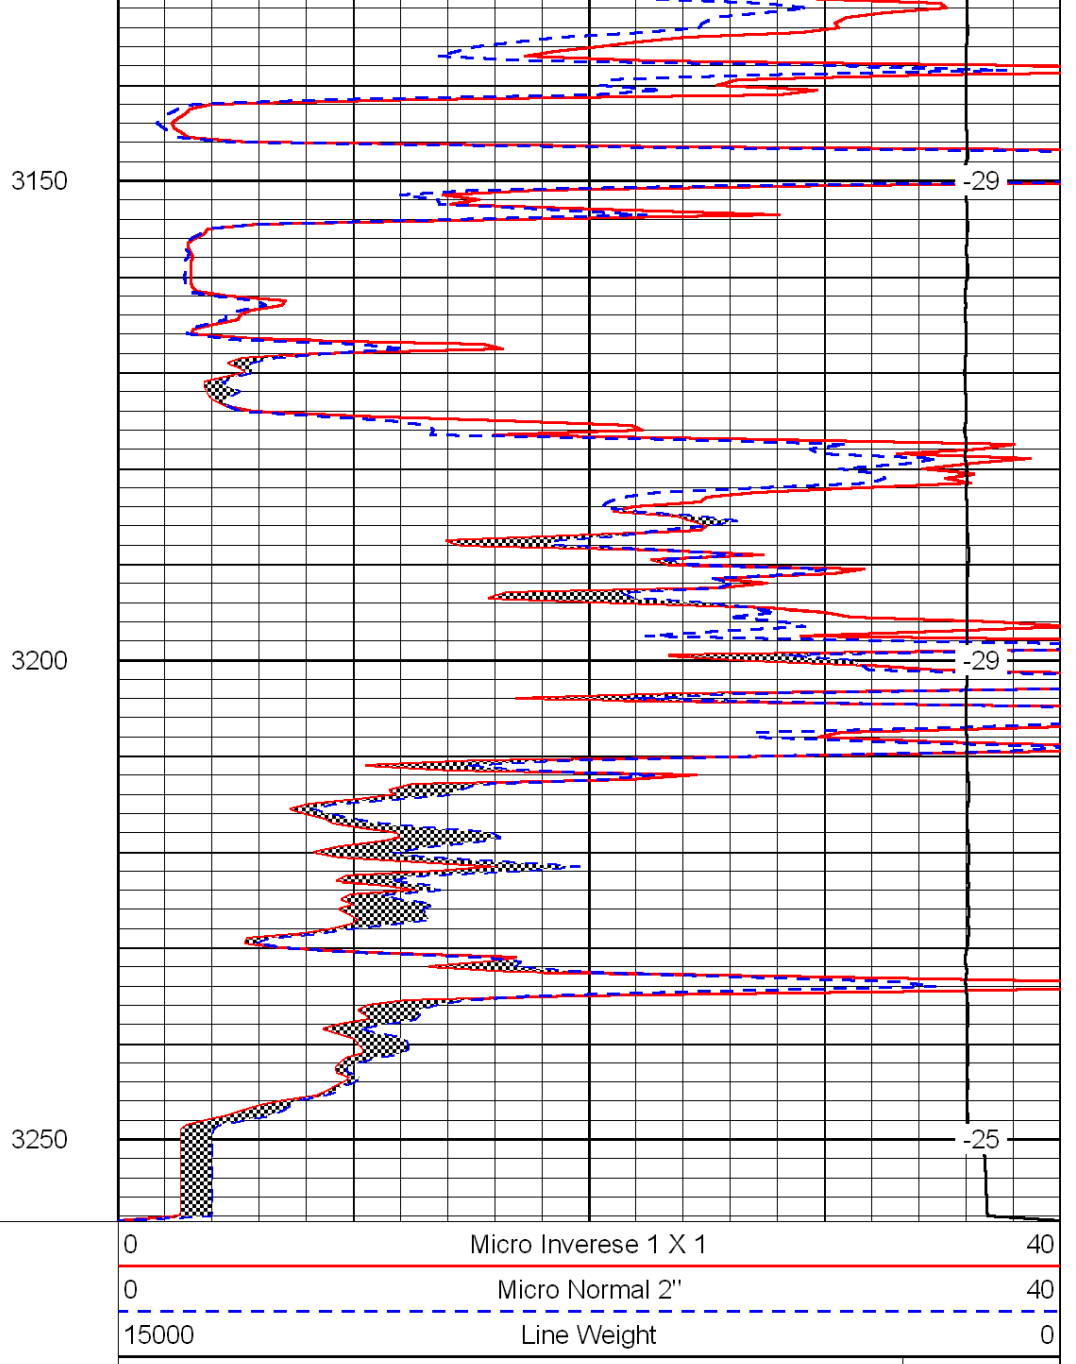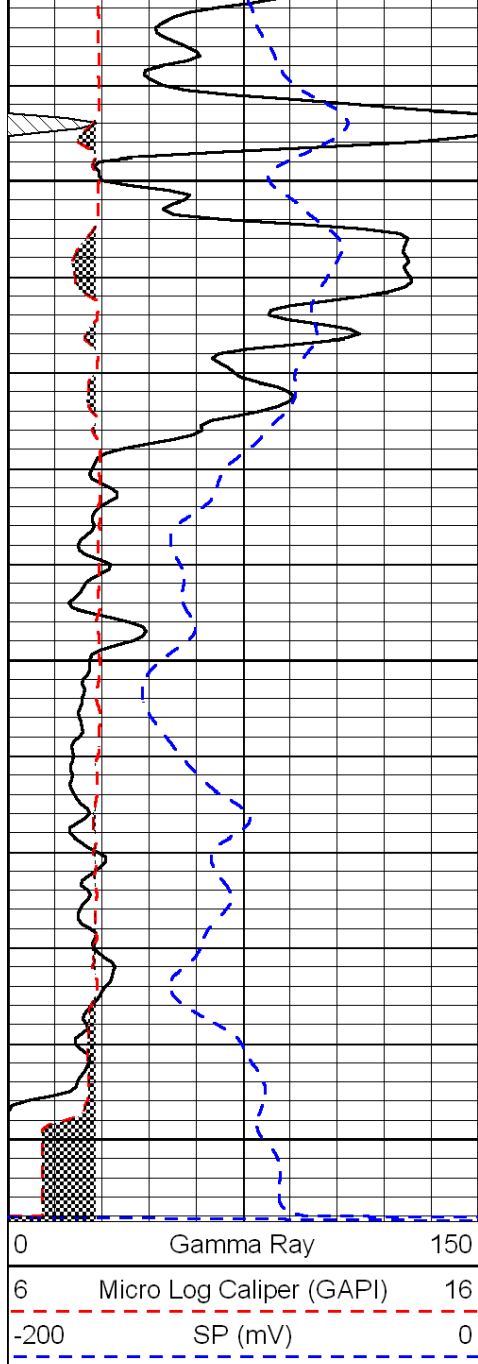

LSPD