



Weatherford

COMPACT PHOTO DENSITY COMPENSATED NEUTRON MICRORESISTIVITY LOG

COMPANY GRAND MESA OPERATING COMPANY


WELL HUND #1-9

FIELD WILDCAT

PROVINCE/COUNTY GOVE

COUNTRY/STATE U.S.A./KANSAS

LOCATION 1482' FSL & 1873' FWL



SEC 9 TWP 14S RGE 31W Other Services MA/MFE

API Number 15-063-21890

Permit Number Permanent Datum G.L., Elevation 2946 feet

Log Measured From K.B. @ 5 FEET above Permanent Datum

Drilling Measured From K.B.

Date 26-FEB-2011

Run Number ONE

Depth Driller 4690.00 feet

Depth Logger 4688.00 feet

First Reading 4667.00 feet

Last Reading 3600.00 feet

Casing Driller 222.00 feet

Casing Logger 217.00 feet

Bit Size 7.880 inches

Hole Fluid Type CHEMICAL

Density / Viscosity 9.10 lb/USg 55.00 CP

PH / Fluid Loss 10.00 7.20 ml/30Min

Sample Source FLOWLINE

Rm @ Measured Temp 0.84 @ 78.0 ohm-m

Rmf @ Measured Temp 0.67 @ 78.0 ohm-m

Rmc @ Measured Temp 1.01 @ 78.0 ohm-m

Source Rmf / Rmc CALC CALC

Rm @ BHT 0.62 @106.0 ohm-m

Time Since Circulation 3 HOURS

Max Recorded Temp 106.00 deg F

Equipment Name COMPACT

Equipment / Base 13057 LIB

Recorded By SHAWN NUTT

Witnessed By MACKLIN ARMSTRONG

S.O.#/JOB# 3529062 LB11-037

Elevations:
KB 2951.00
DF 2950.00
GL 2946.00

BOREHOLE RECORD

Last Edited: 01-JAN-2003 07:12

Bit Size inches	Depth From feet	Depth To feet
7.880	217.00	4688.00

CASING RECORD

Type	Size inches	Depth From feet	Shoe Depth feet	Weight pounds/ft
SURFACE	8.625	0.00	217.00	24.00

REMARKS

Tools Used: MAI, MPD, MCG, MDN, MML, MFE, SKJ
 Hardware: MPD: 4 inch profile plate. MAI and MFE: 0.5 Inch standoffs used. MDN: Dual Bowspring used.
 2.71 G/CC Limestone density matrix used to calculate porosity.
 Sonic porosity calculated on a limestone scale (47.5 usec/ft).
 Borehole rugosity, tight pulls, and washouts will affect data quality.
 All intervals logged and scaled per customer's request.
 Annular volume with 5.5 inch production casing = 235 cu. ft.
 Service order #3529062
 Rig: Murfin #24
 Engineer: Shawn Nutt
 Operator(s): Ken Rinehart, Nick Adame

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

5 INCH MAIN PASS


Depth Based Data - Maximum Sampling Increment 10.0cm


Plotted on 20-APR-2011 10:25

Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta

Recorded on 01-JAN-2003 07:11

System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

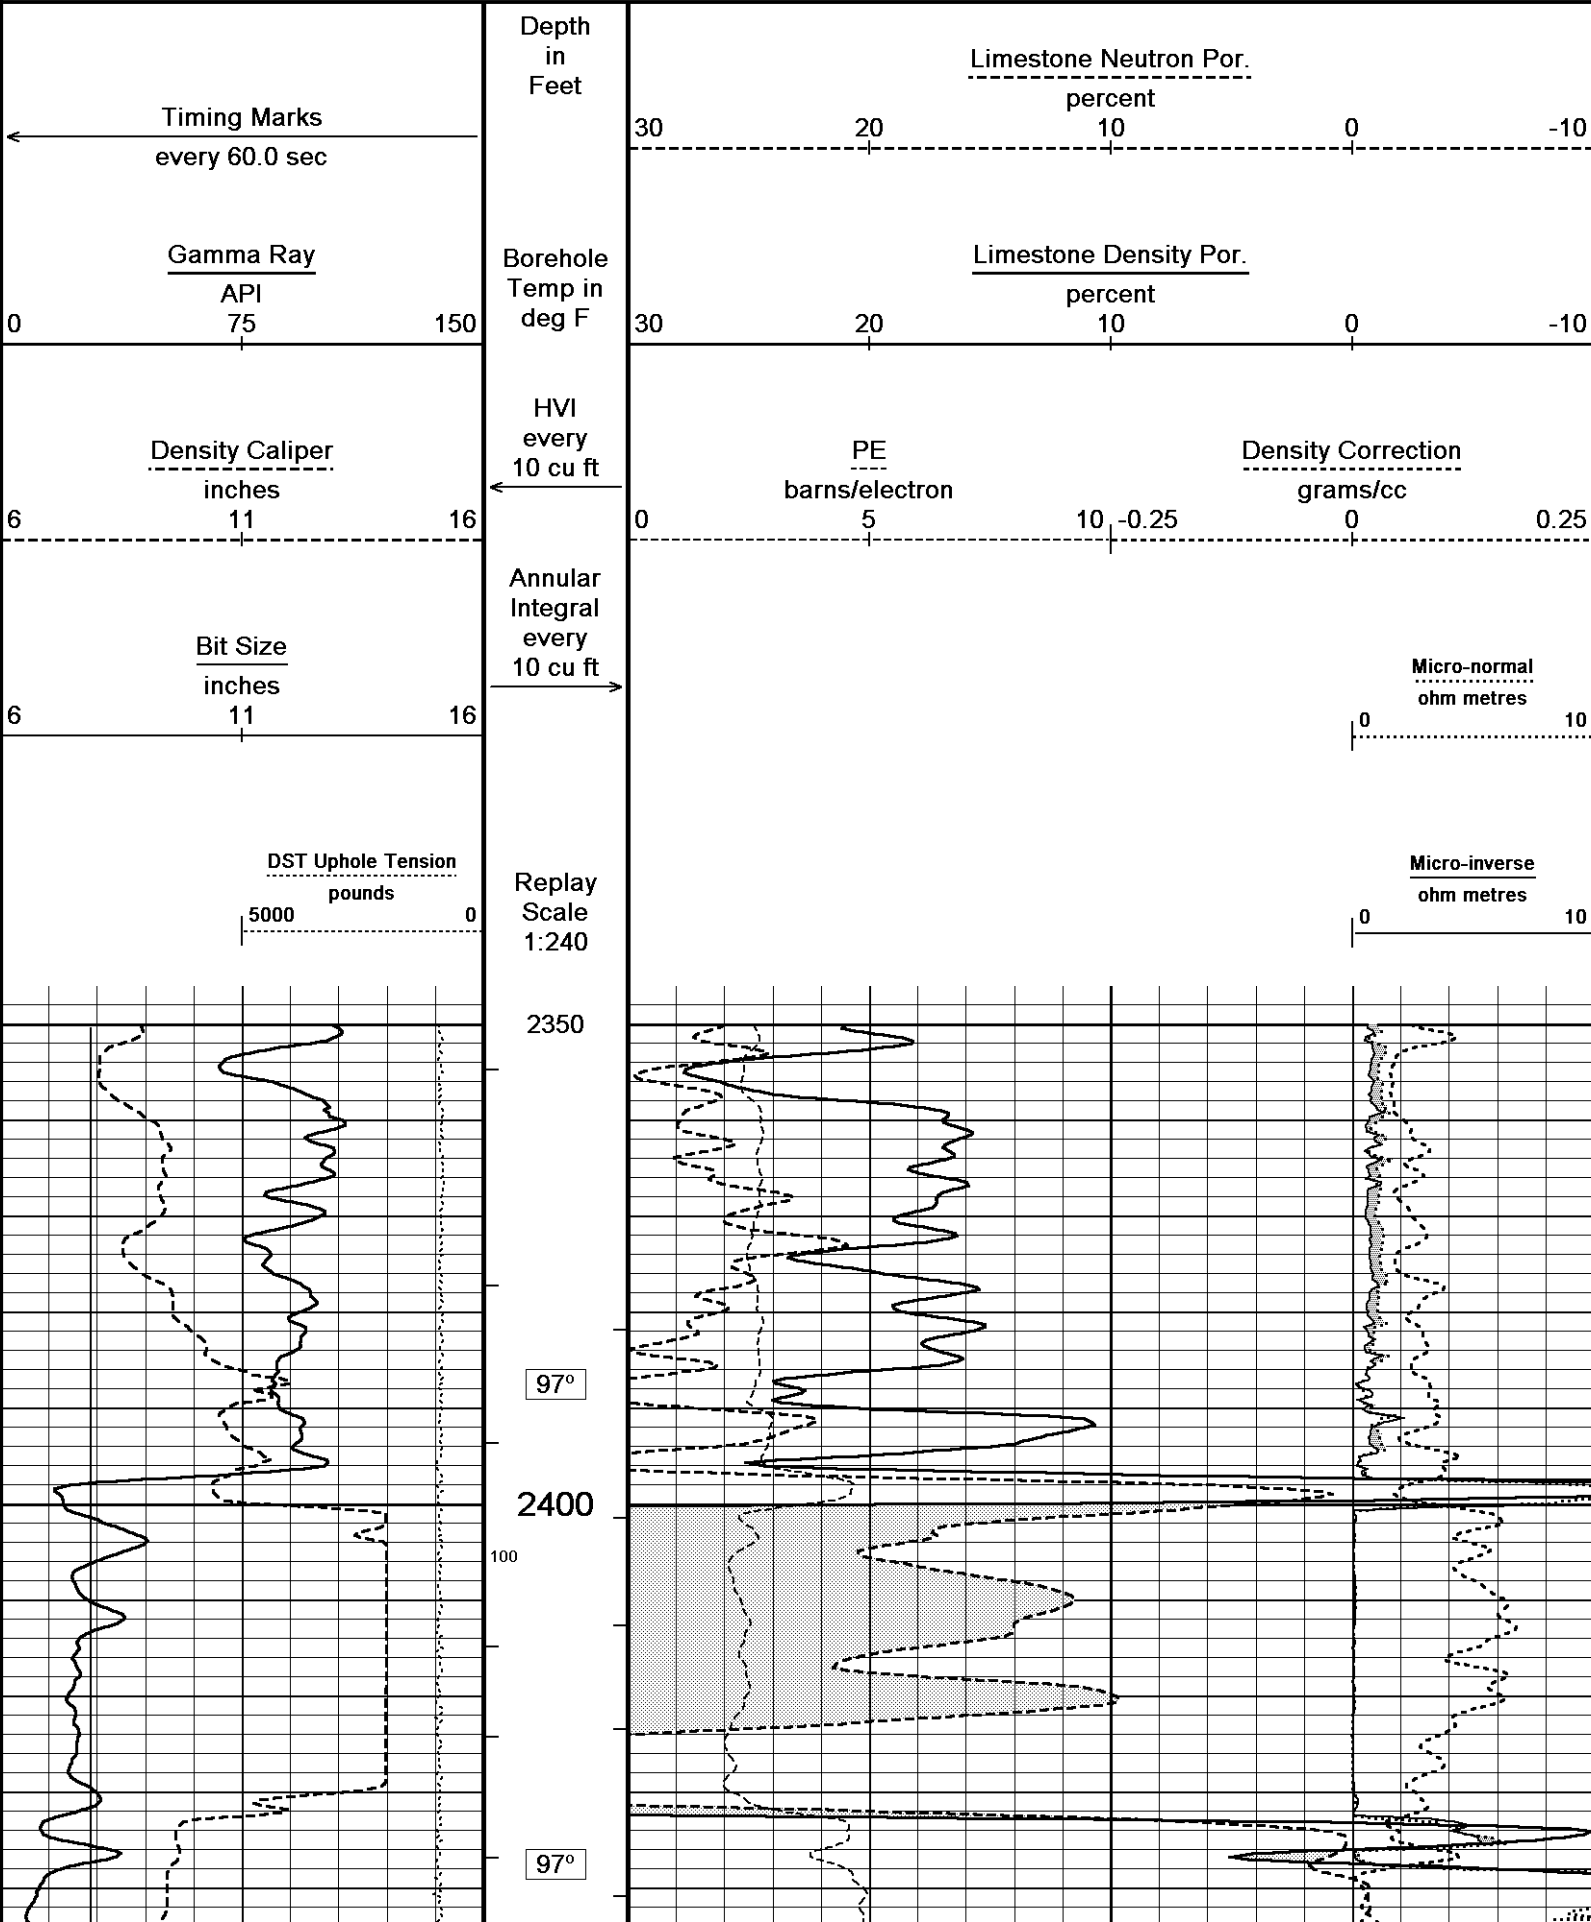

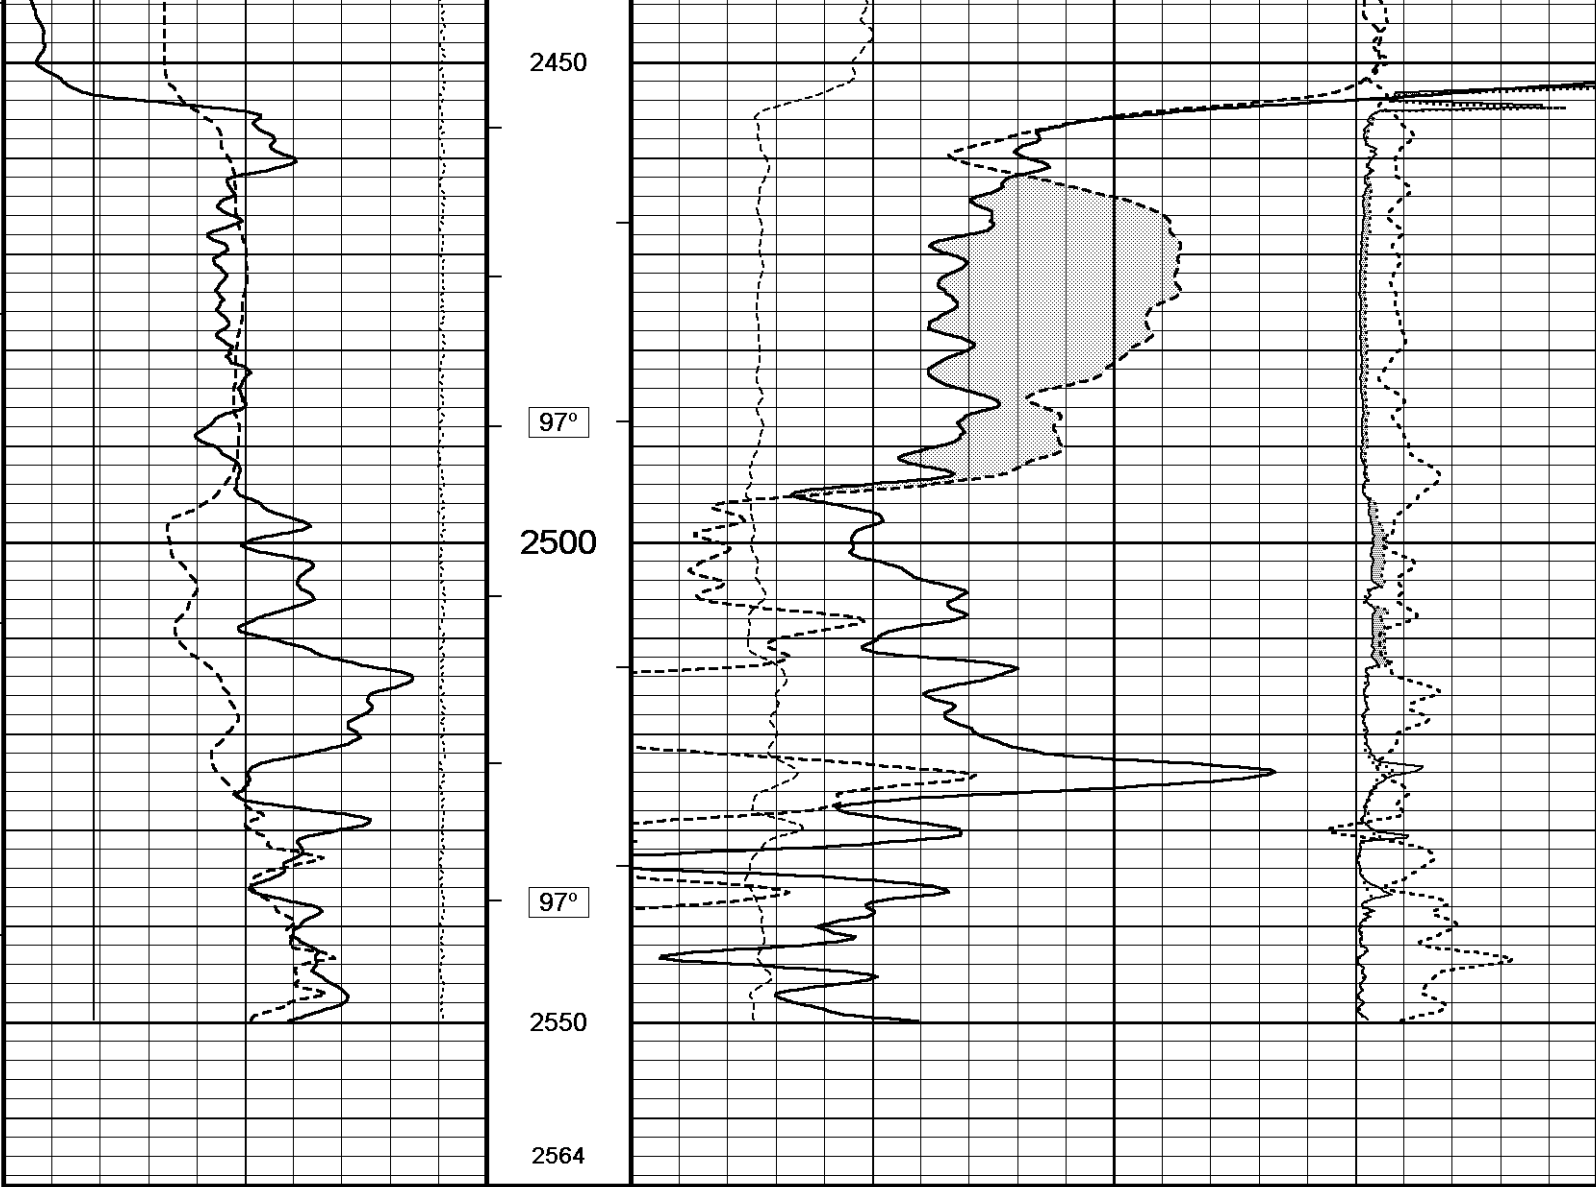

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164


Plotted on 20-APR-2011 10:25
 Recorded on 01-JAN-2003 07:11


↑ 5 INCH MAIN PASS ↑


↓ 5 INCH MAIN PASS ↓


Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

Plotted on 20-APR-2011 10:25
 Recorded on 01-JAN-2003 07:11

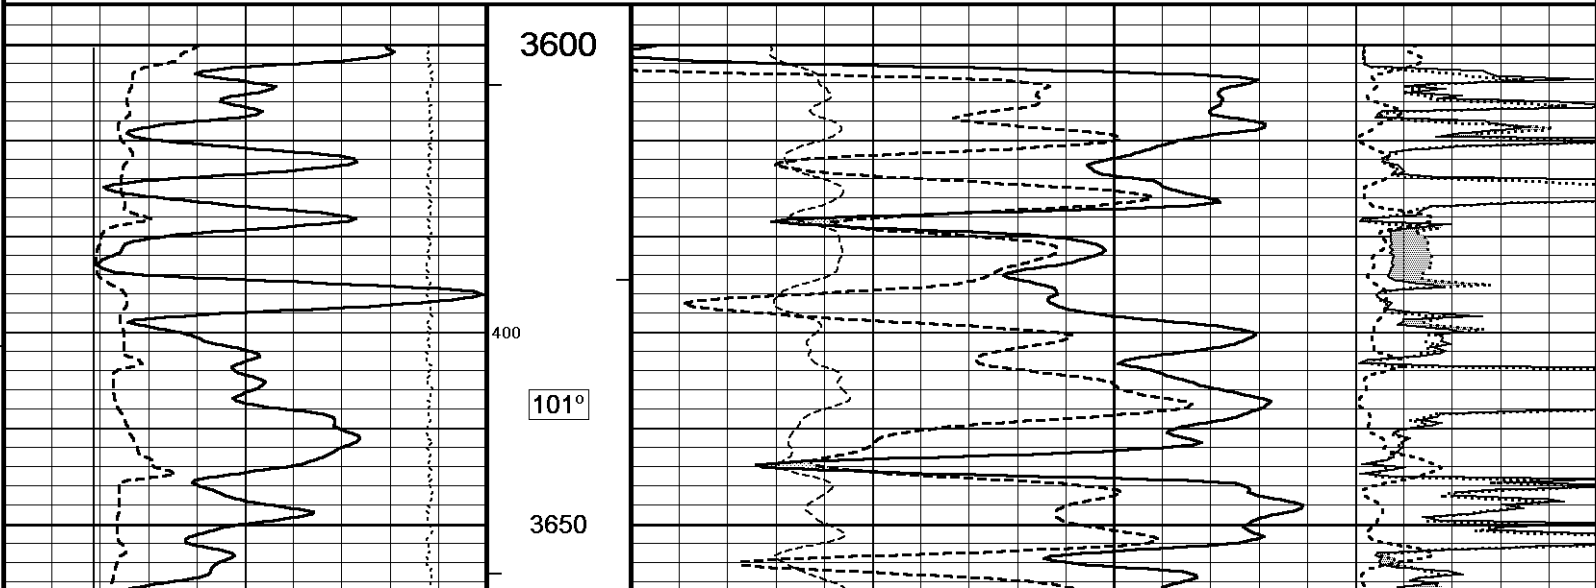

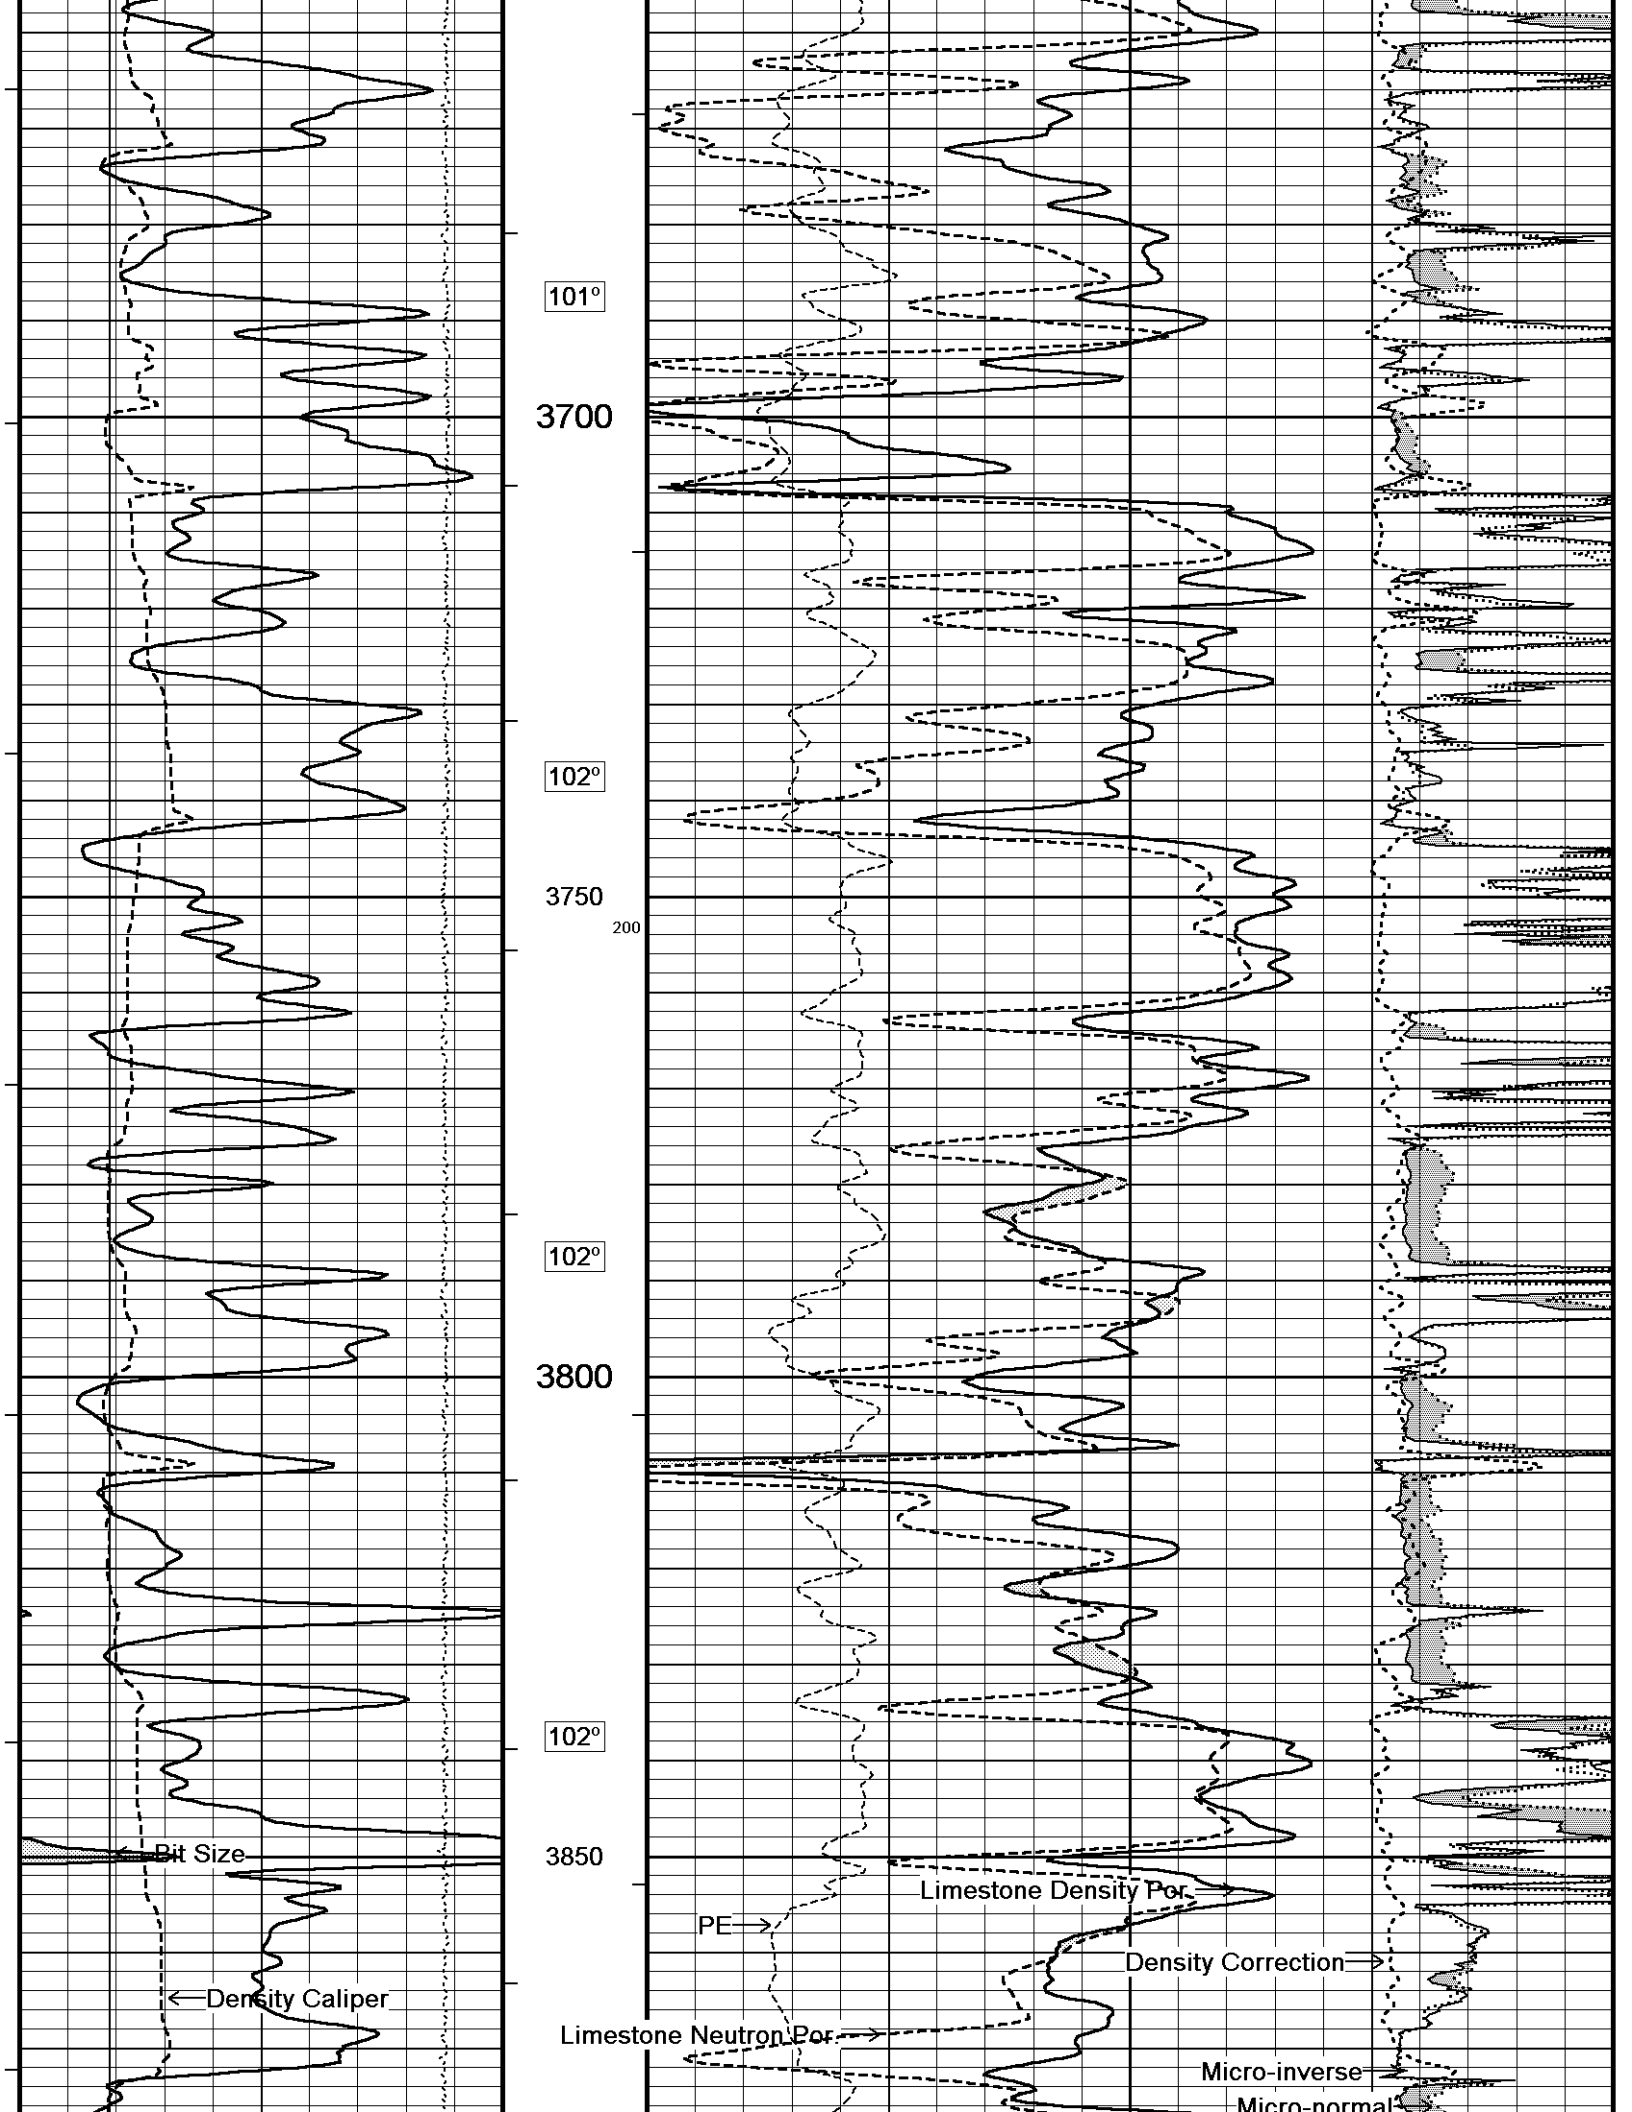

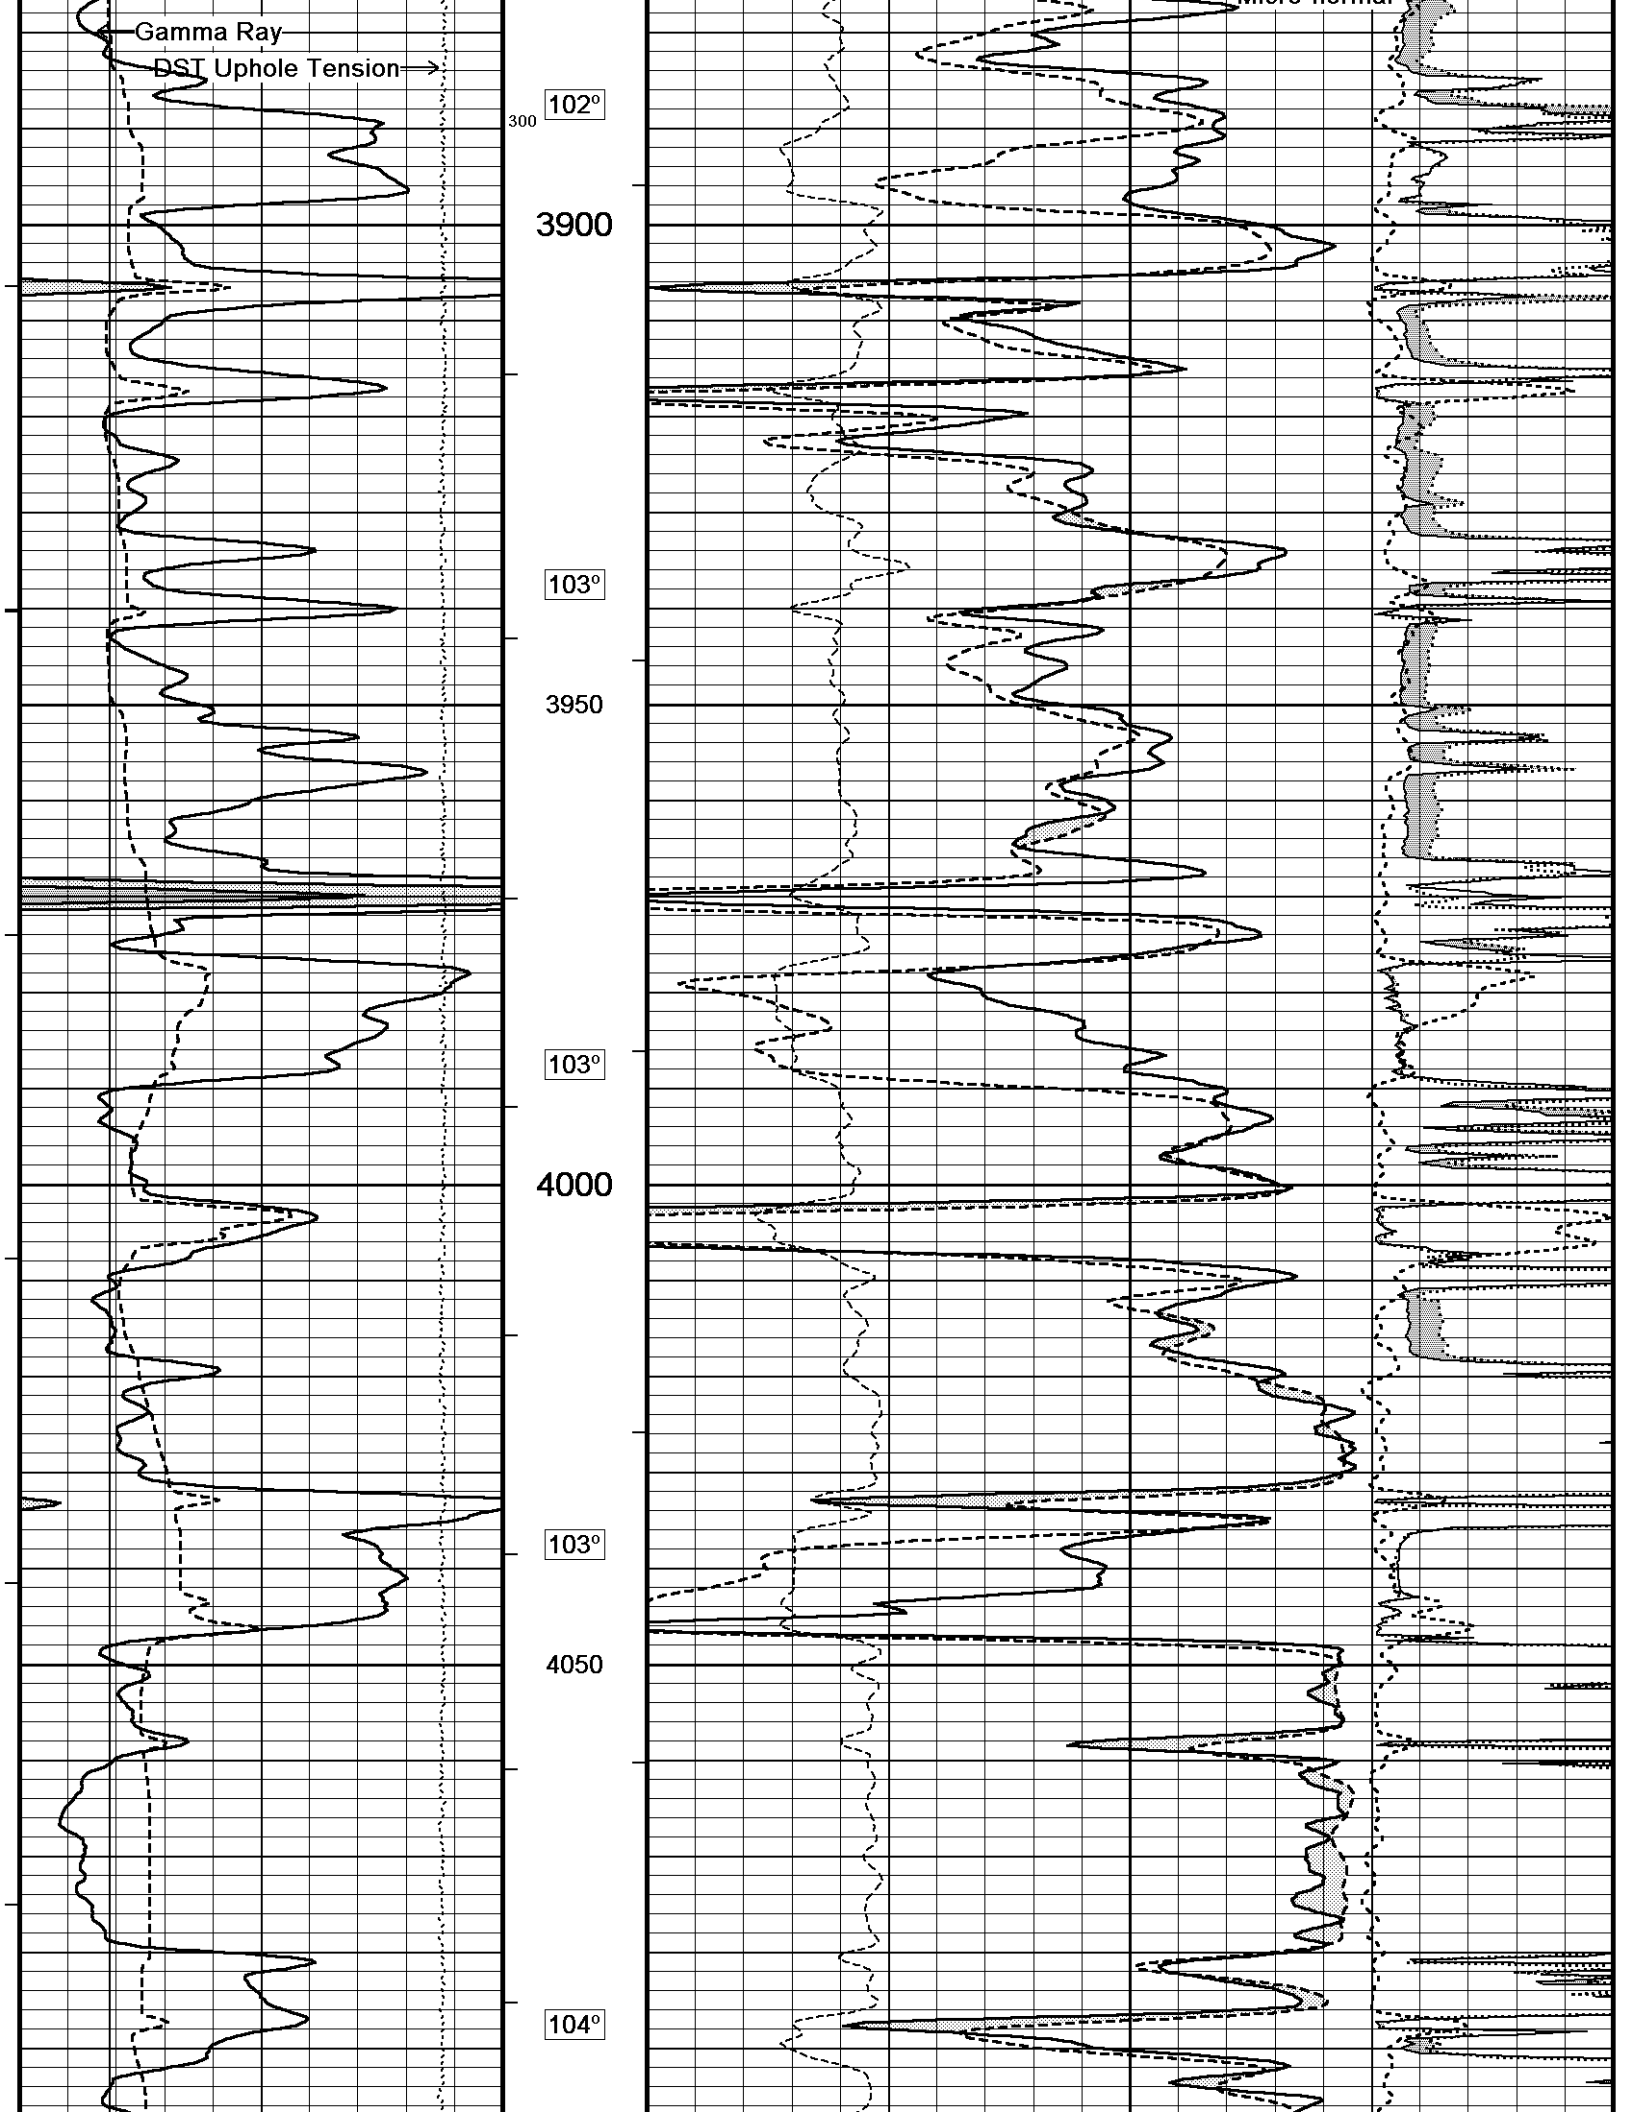

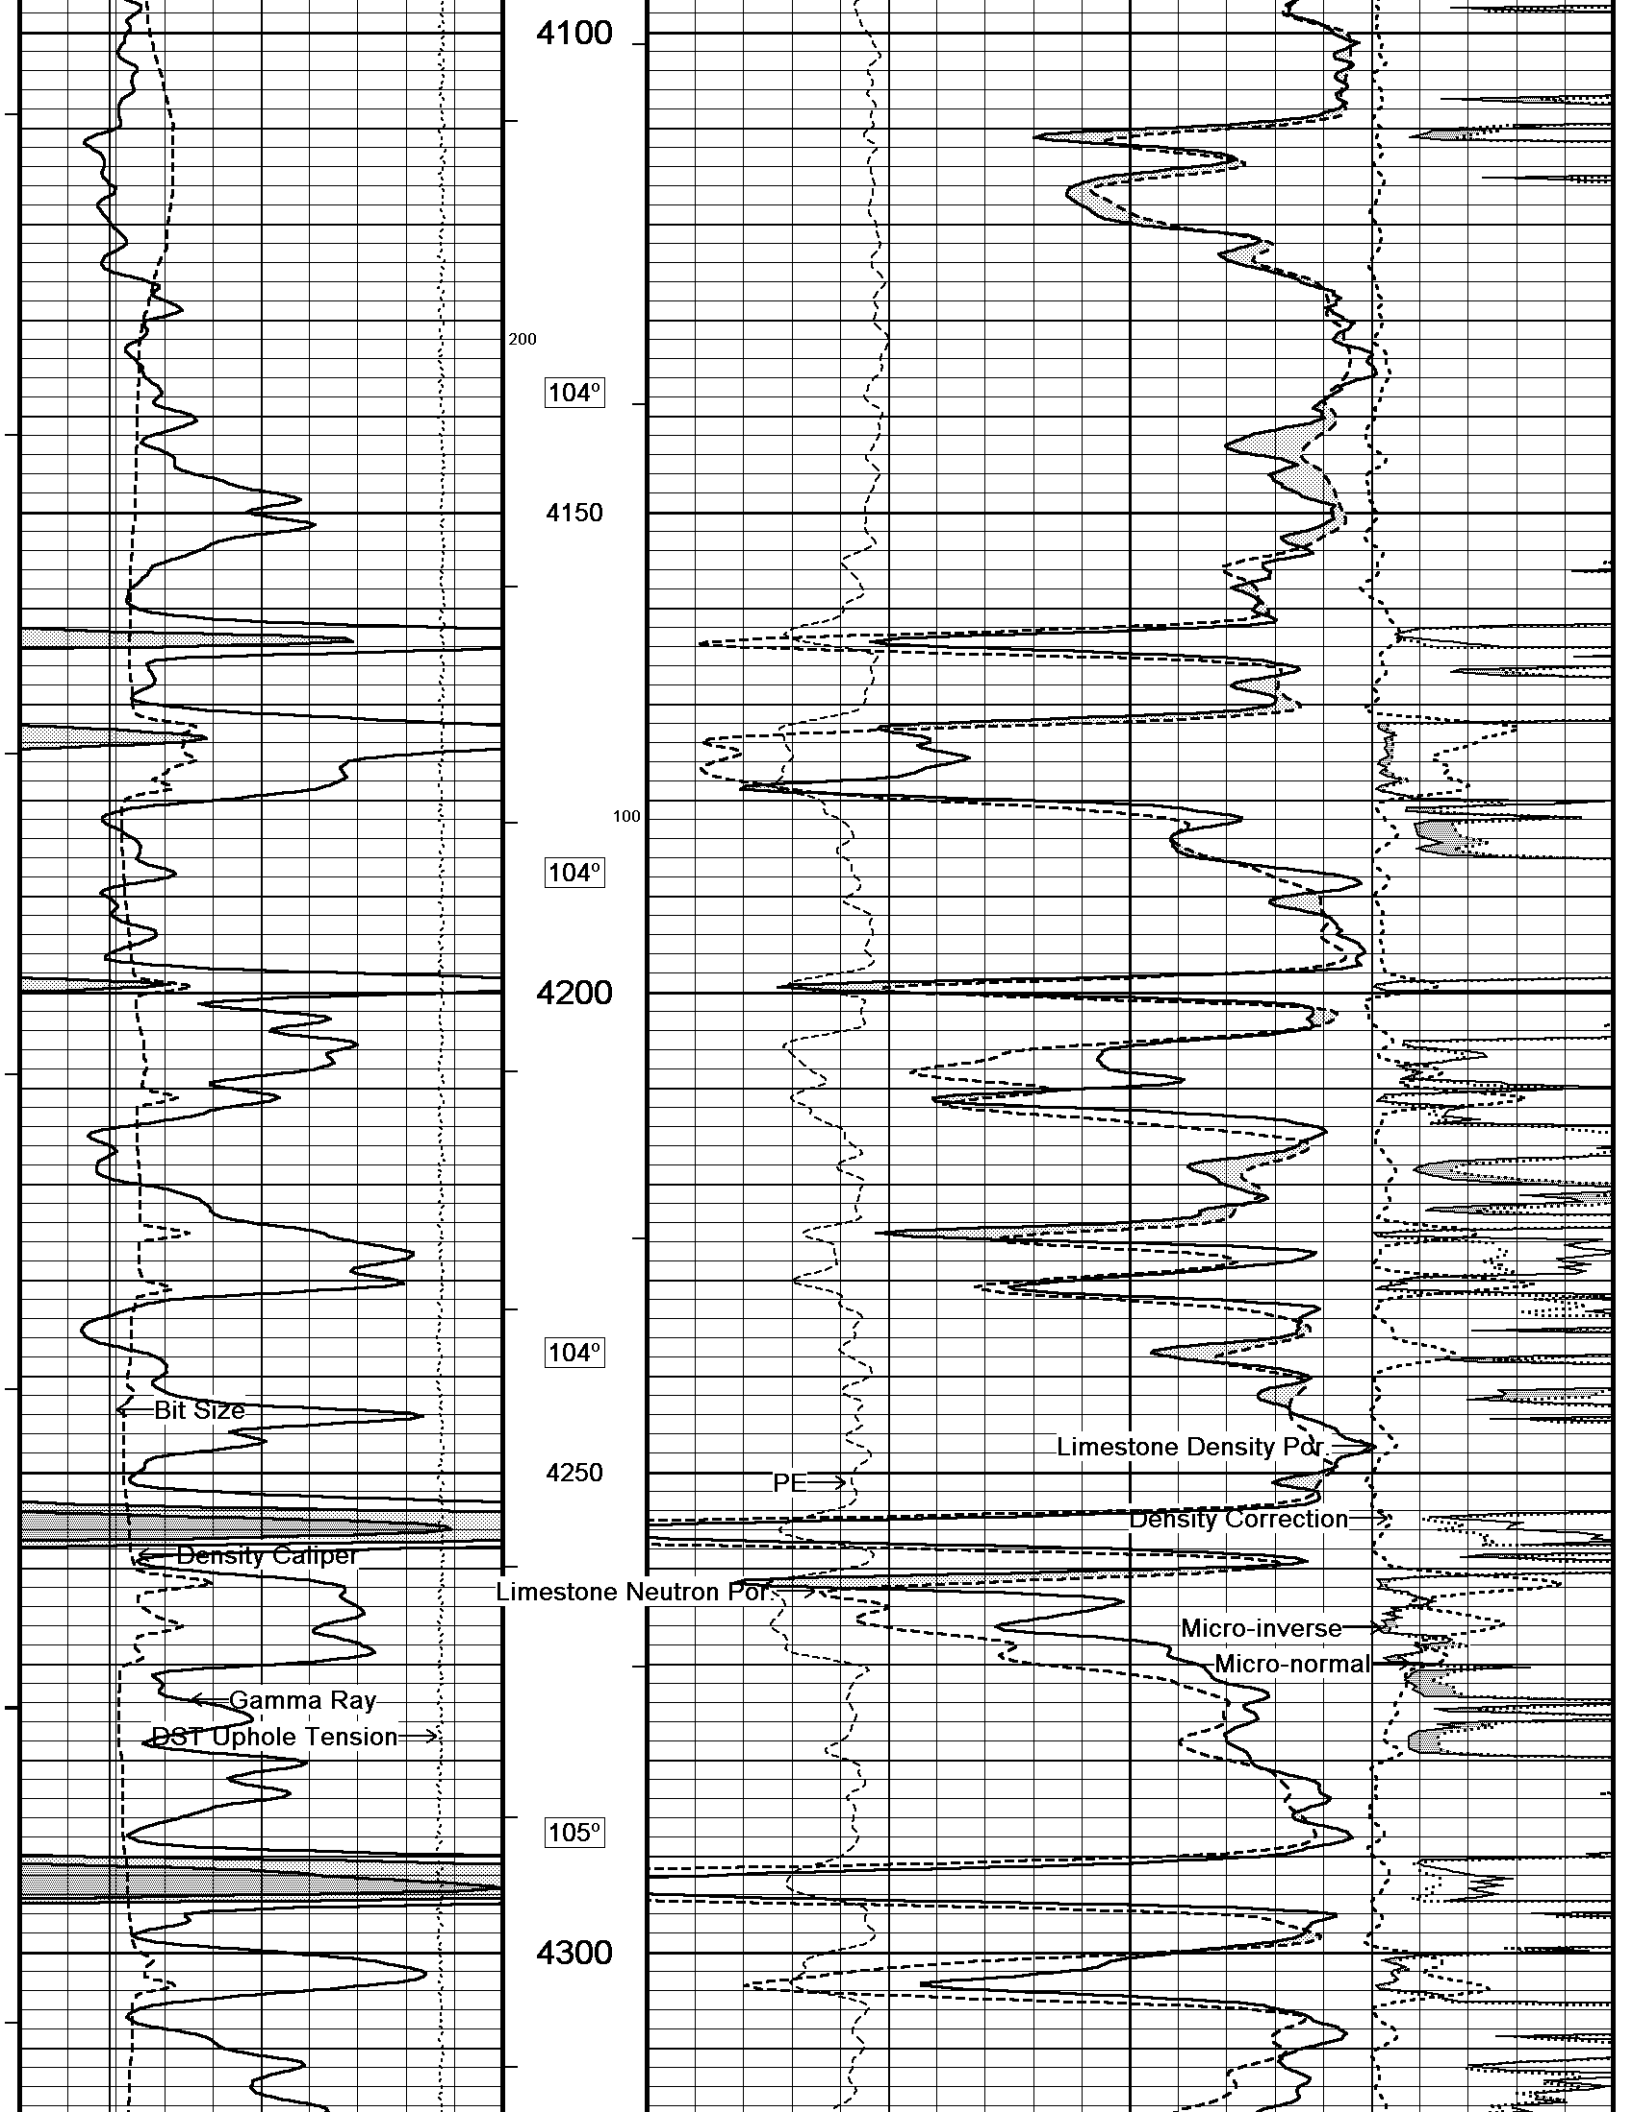

4100

200

104°

4150

104°

4200

100

104°

4250

PE

Limestone Density Por

Density Correction

Limestone Neutron Por

Micro-inverse

Micro-normal

Bit Size


Density Caliper





Gamma Ray


DST Uphole Tension

105°

4300

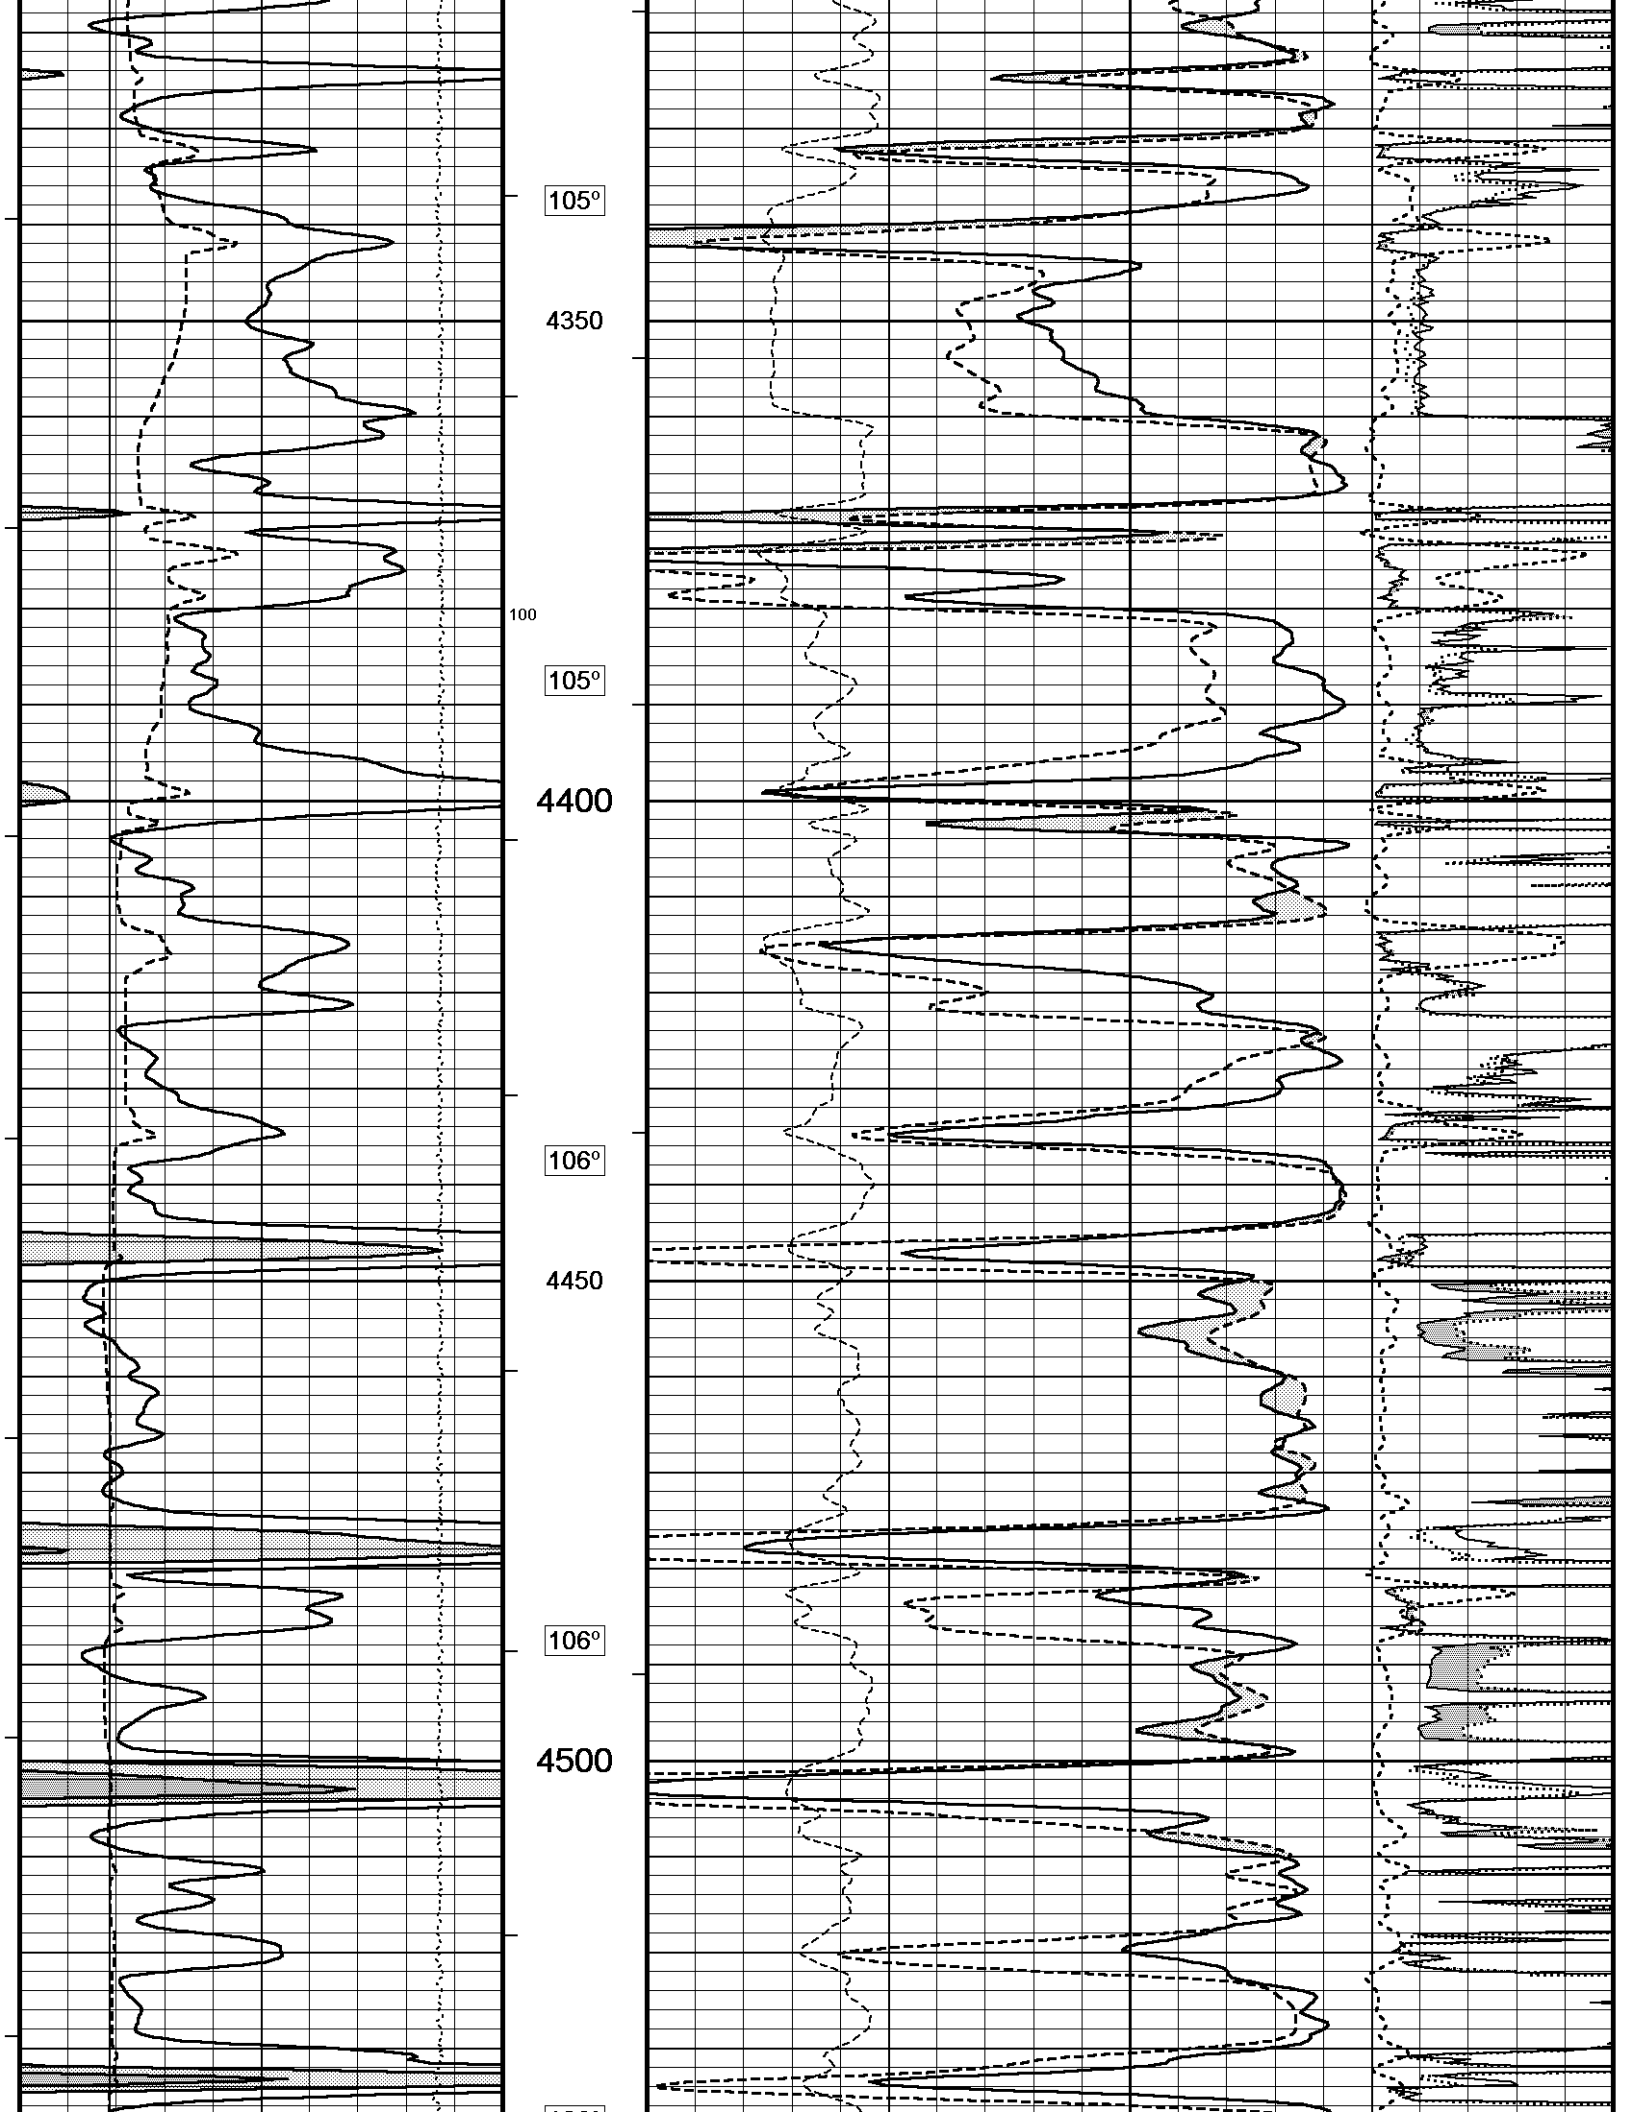

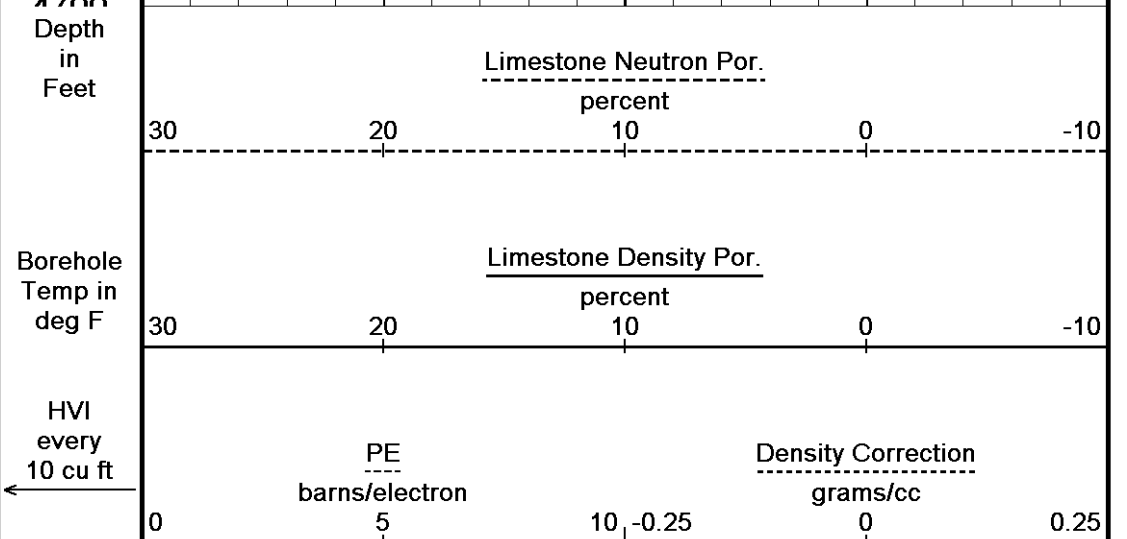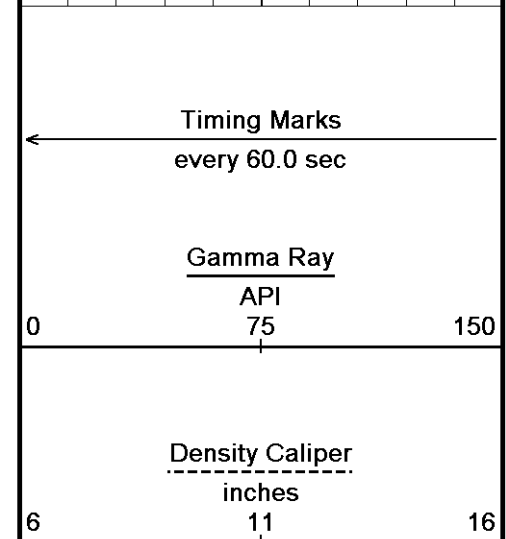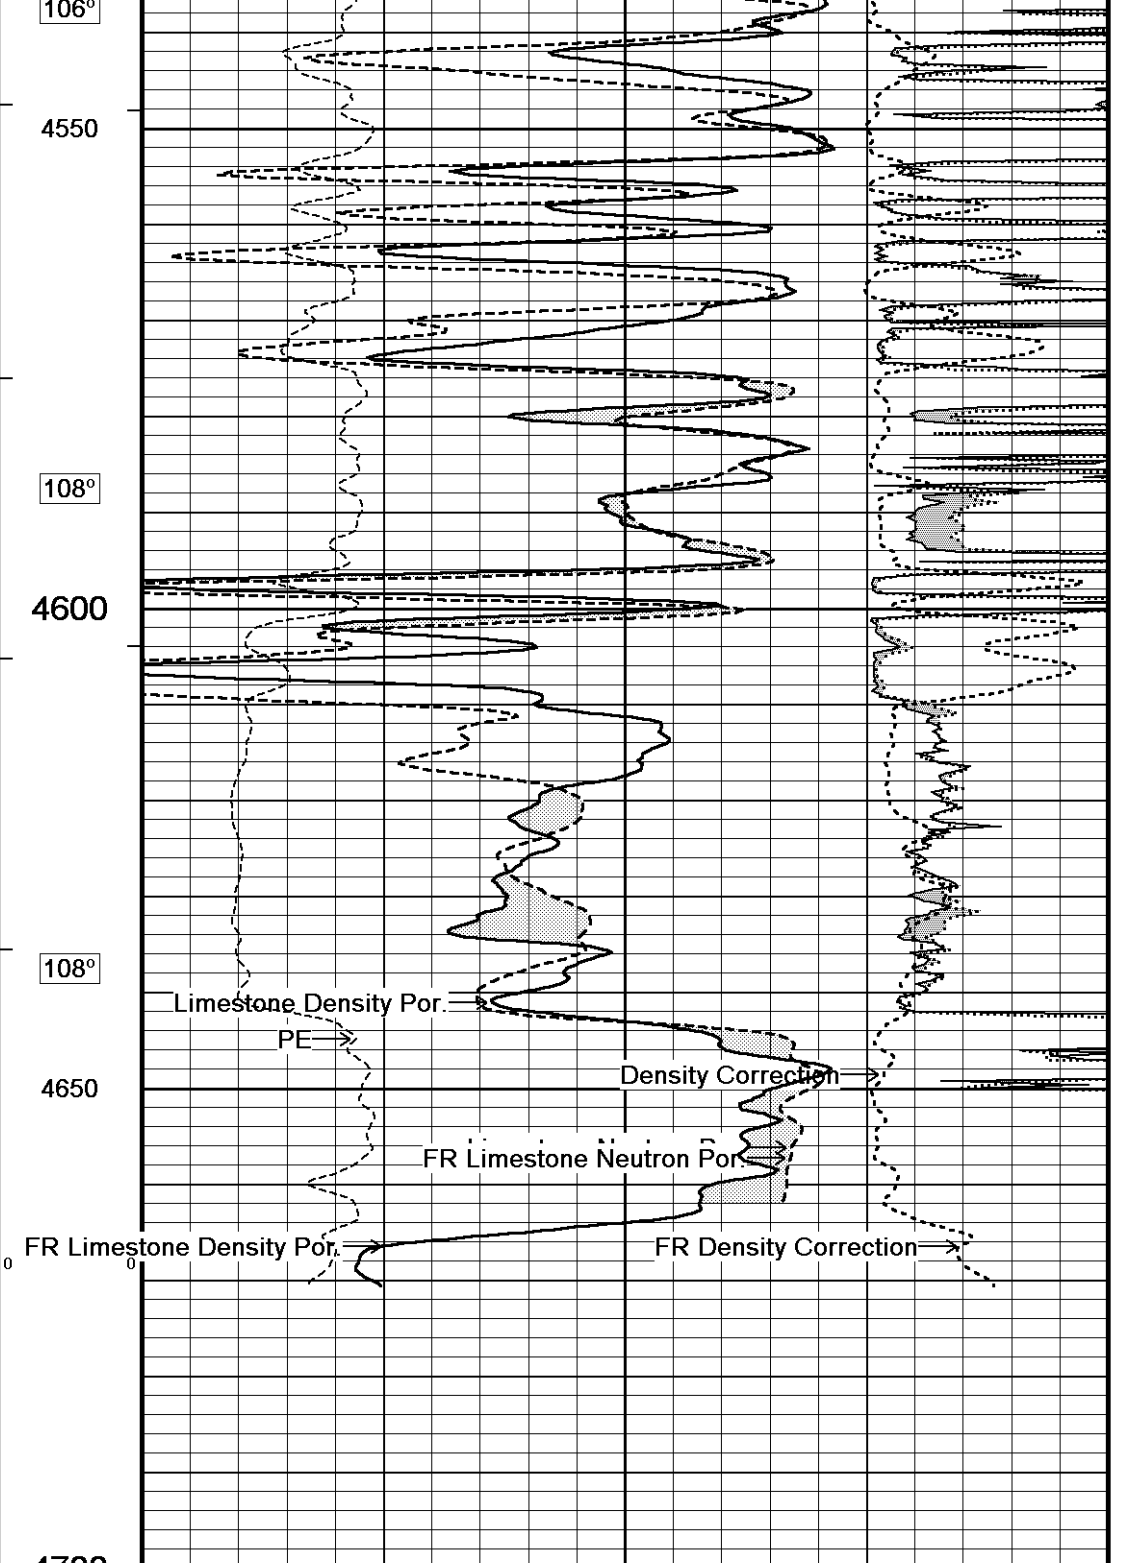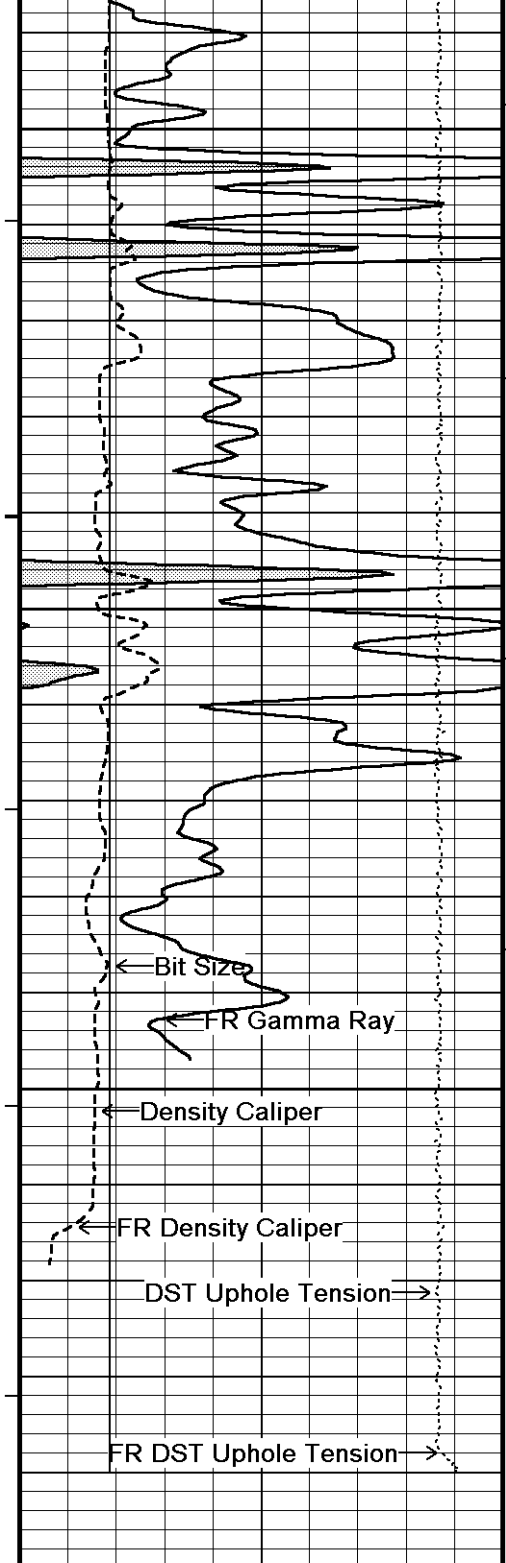

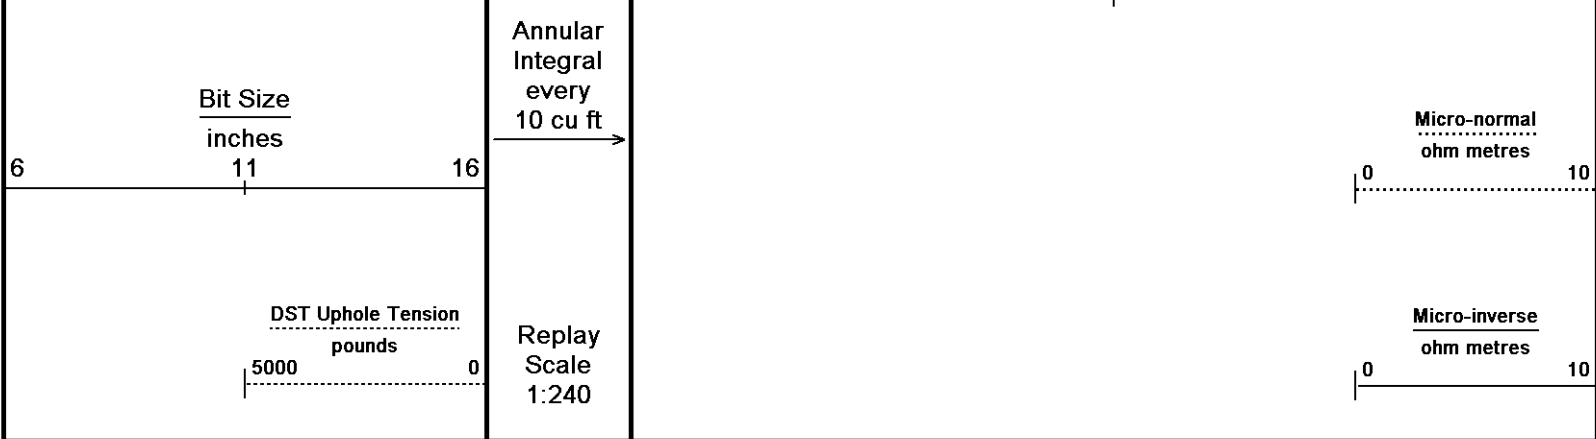



Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta Recorded on 01-JAN-2003 07:11
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164


↑ **5 INCH MAIN PASS** ↑

↓ **5 INCH REPEAT PASS** ↓

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreVie...Copy of Hund #1-9_001.dta Recorded on 01-JAN-2003 05:44
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

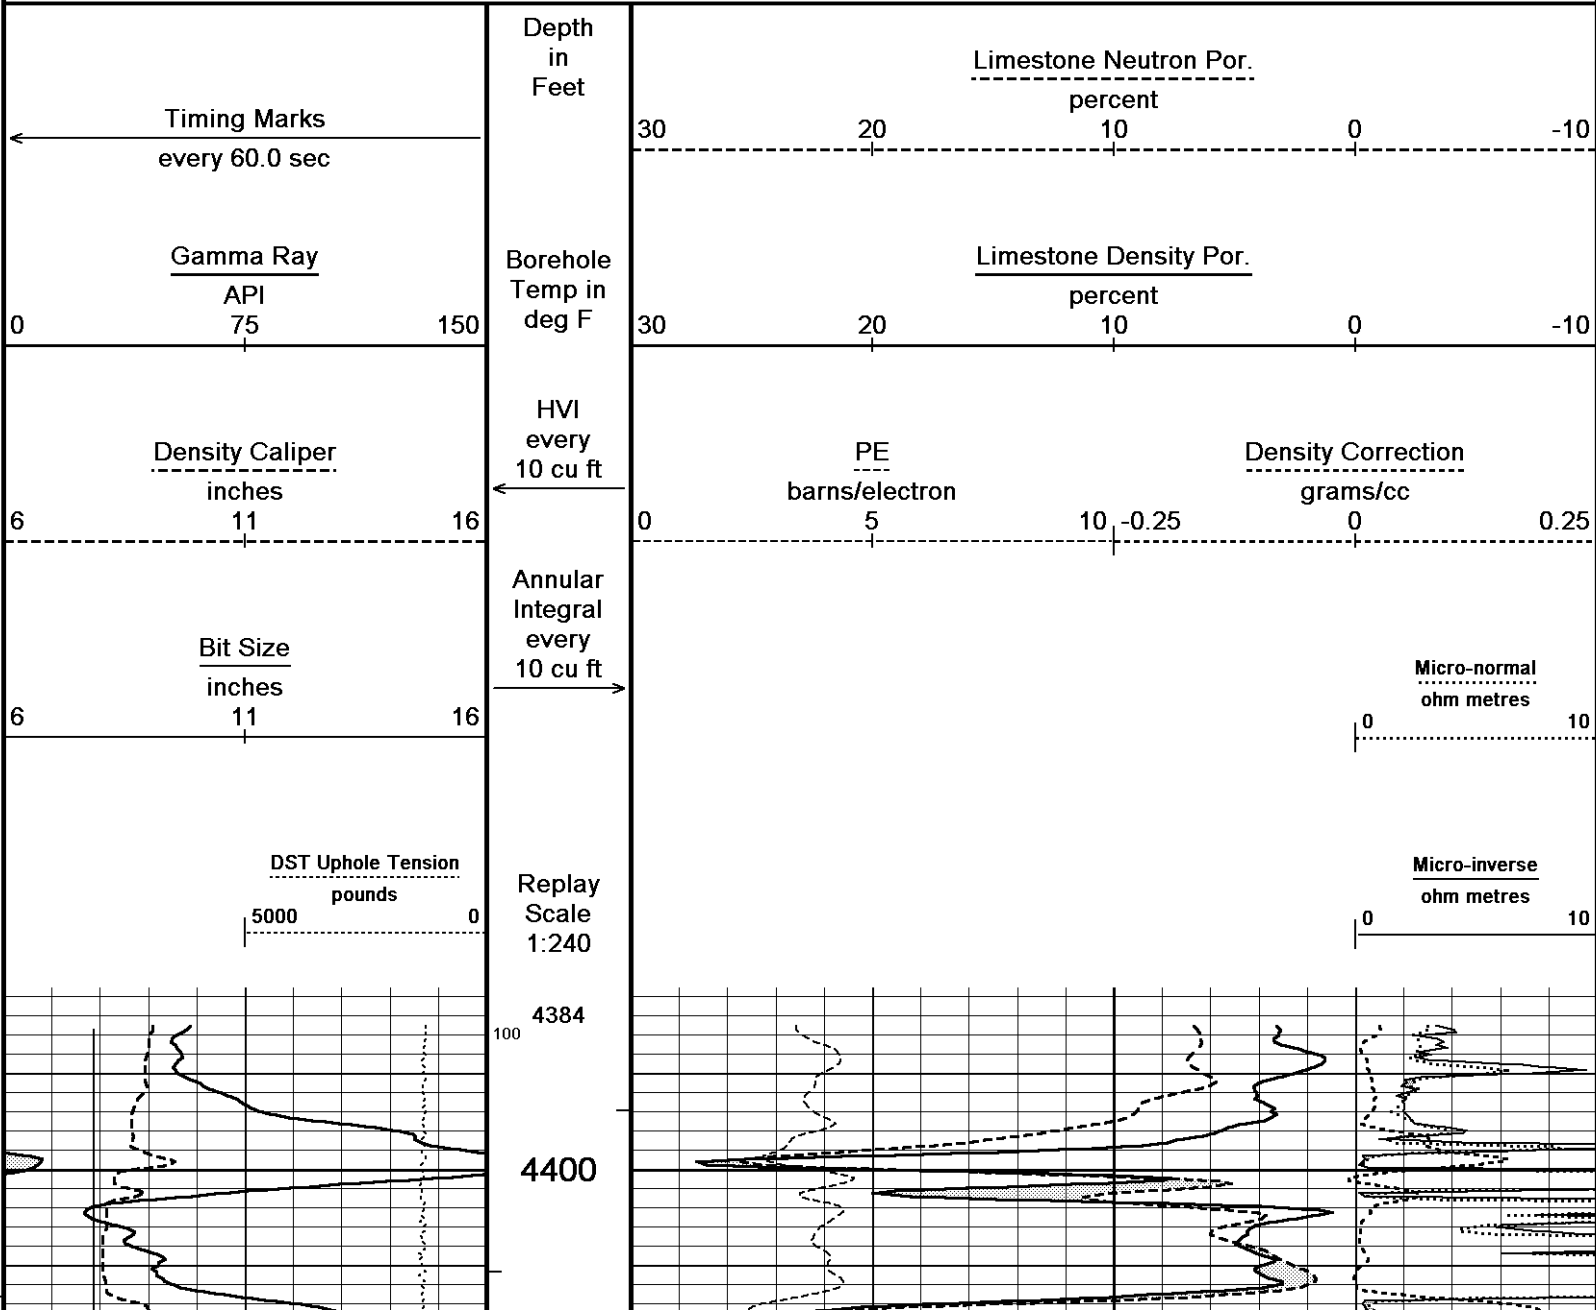

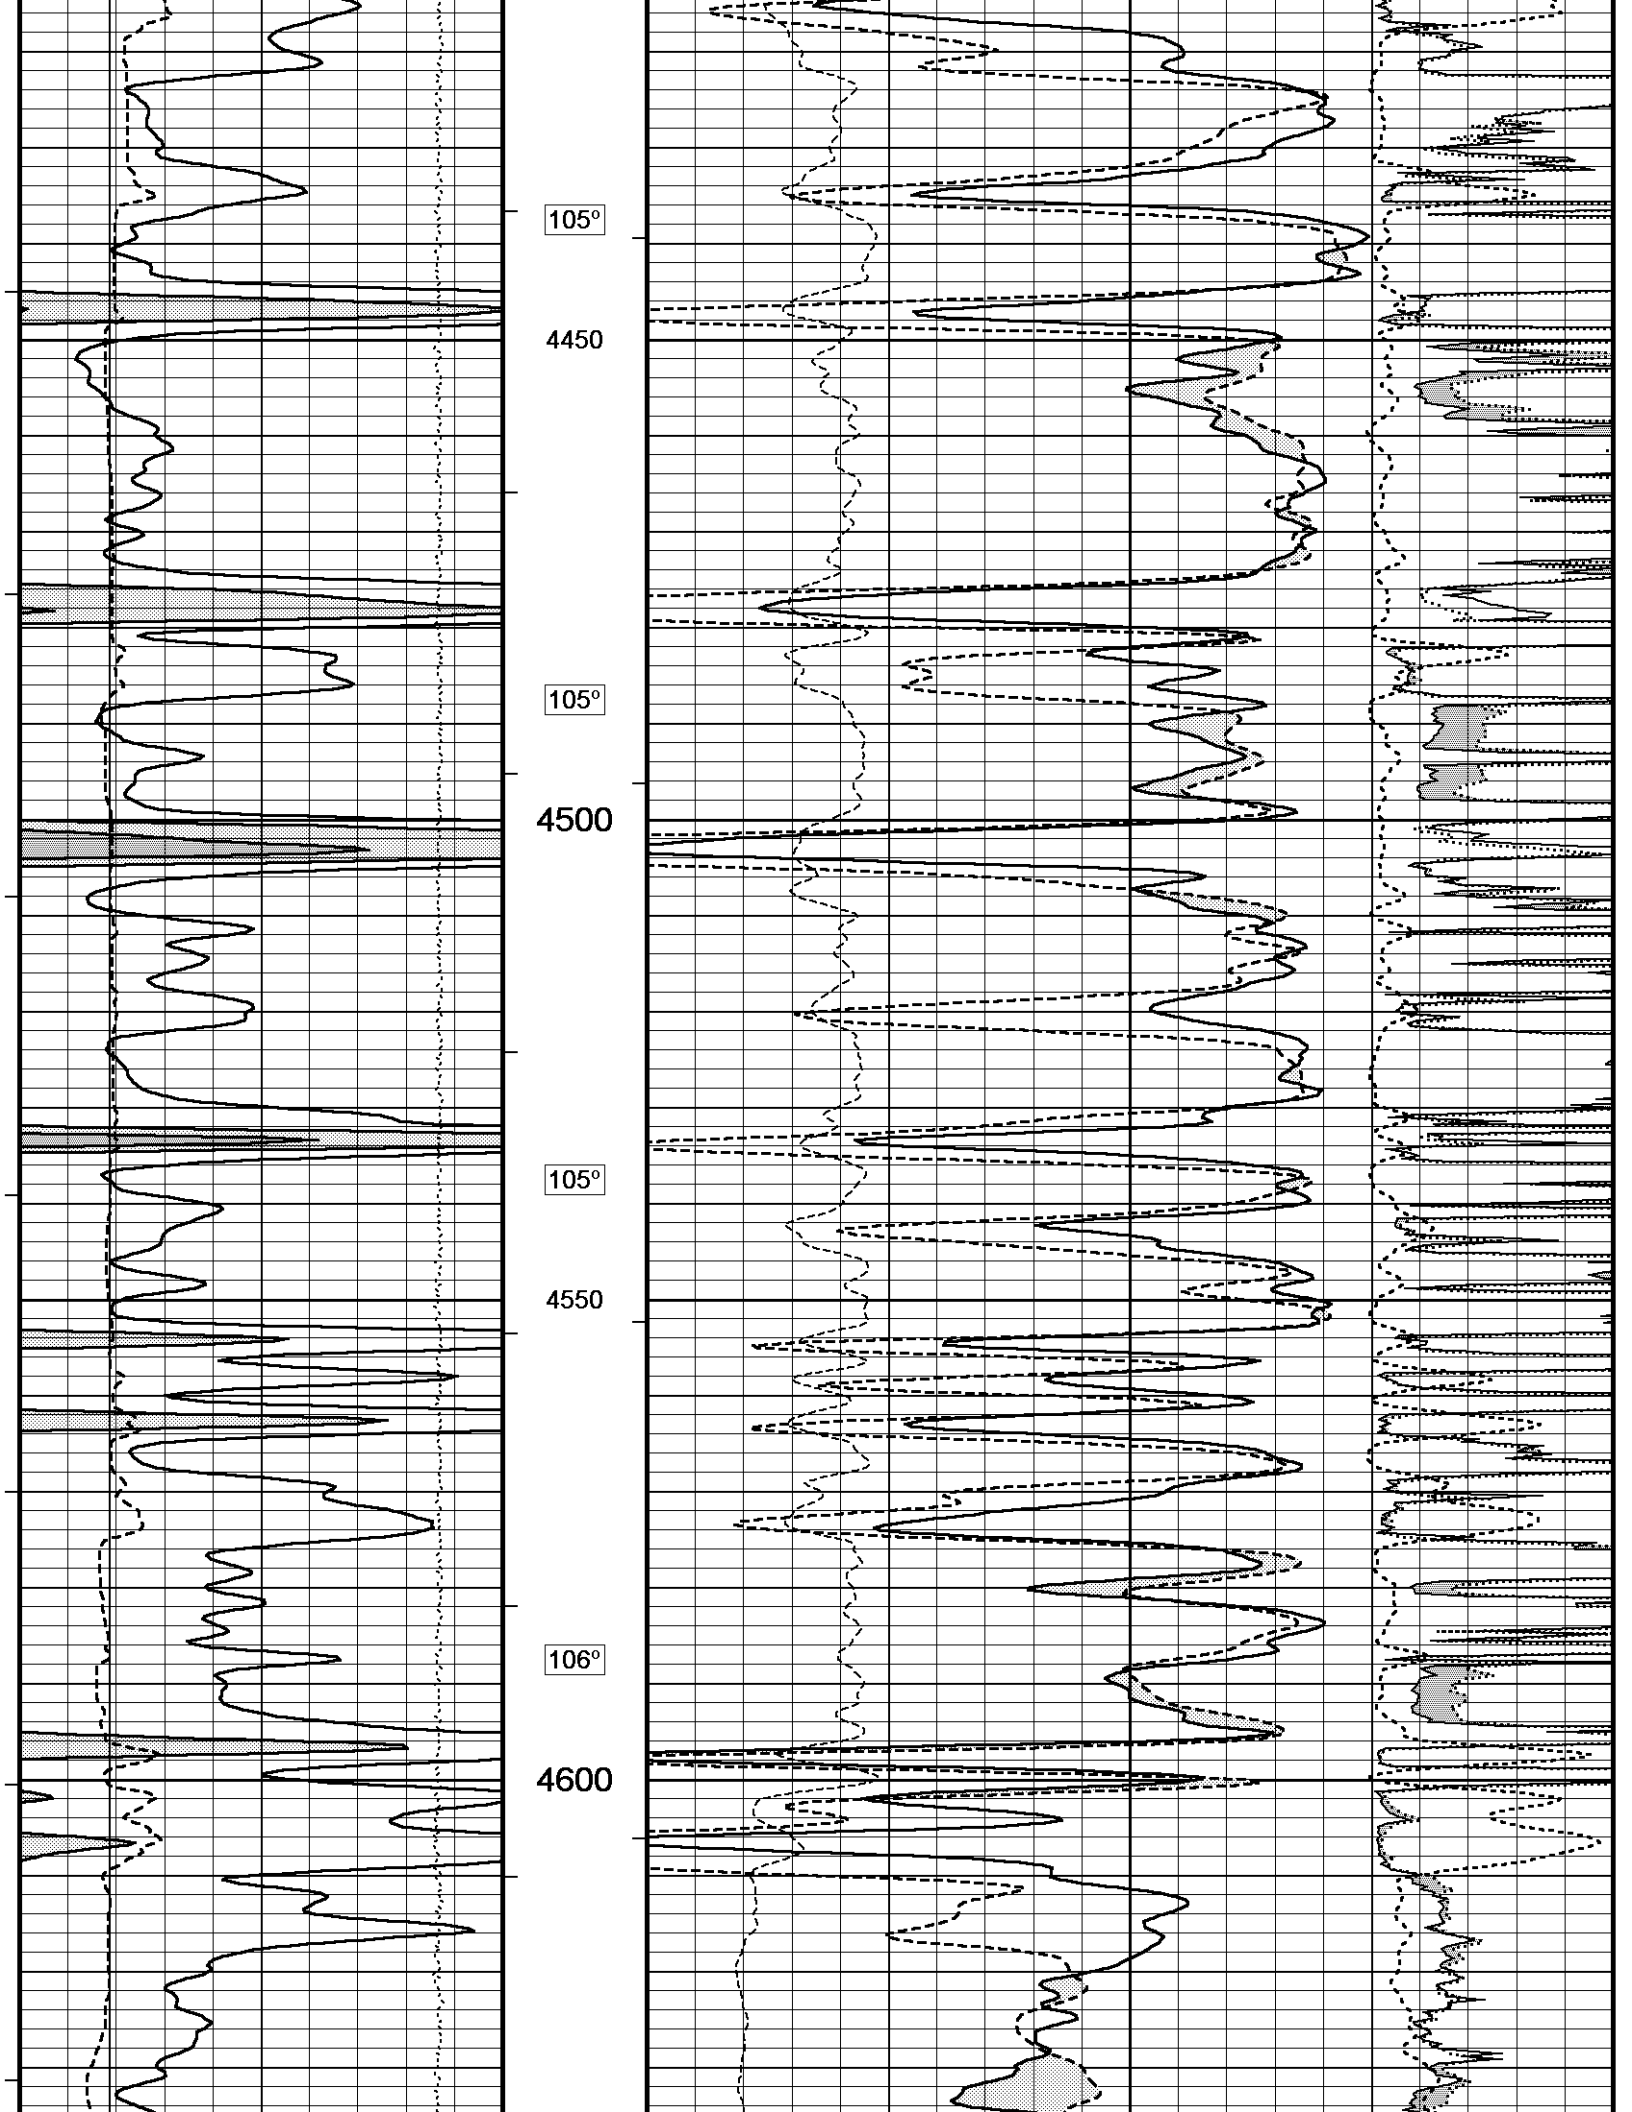

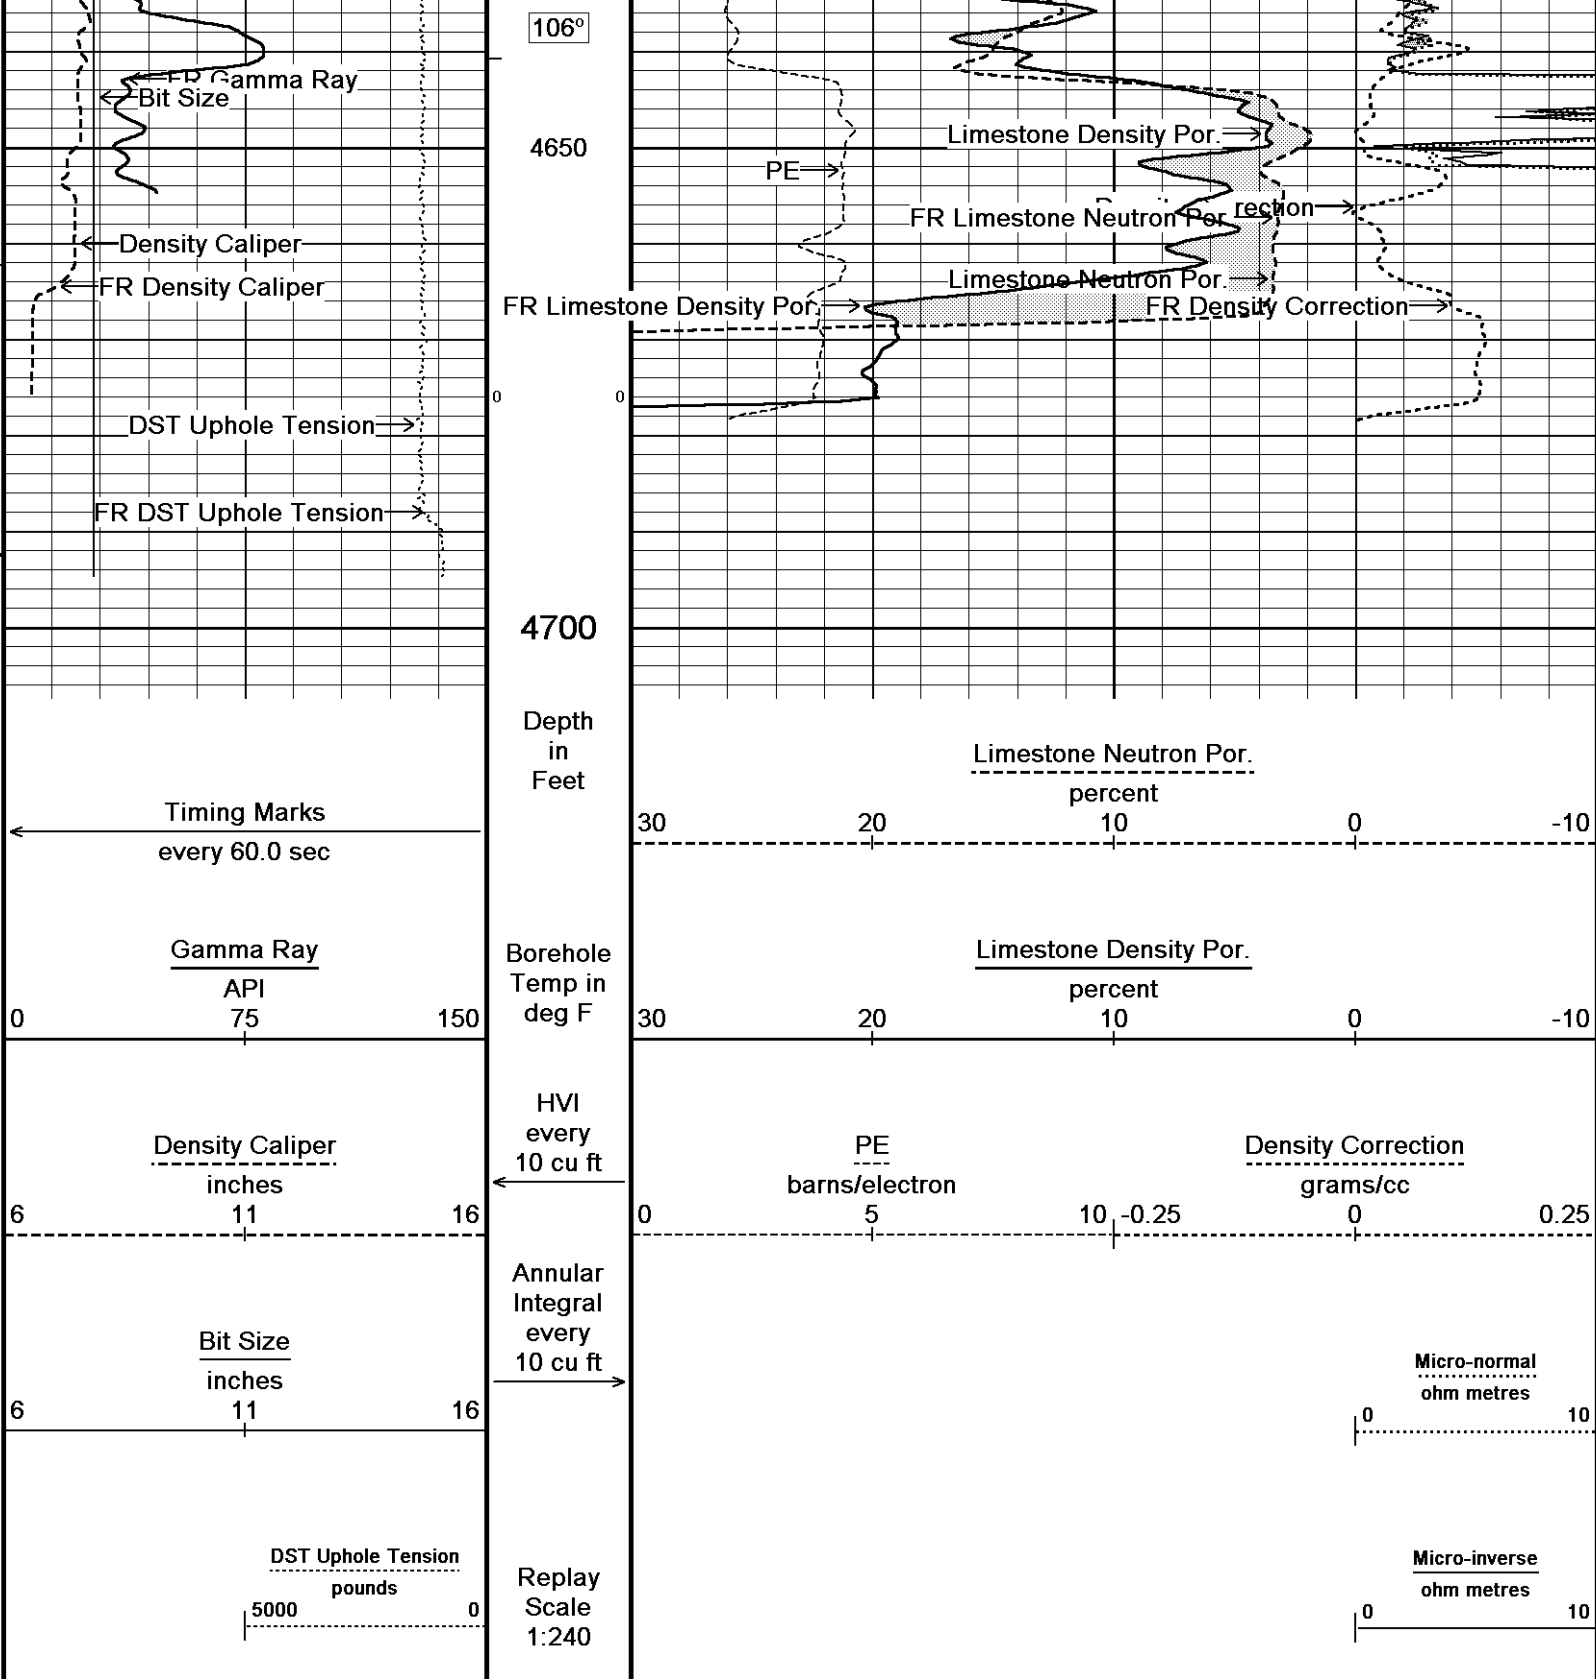

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreVie...\Copy of Hund #1-9_001.dta
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

Plotted on 20-APR-2011 10:25
 Recorded on 01-JAN-2003 05:44


5 INCH REPEAT PASS

5 INCH MAIN PASS

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...\Hund #1-9_002 spooled section.dta
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

Plotted on 20-APR-2011 10:25
 Recorded on 01-JAN-2003 07:11

Depth in	Compensated Density
----------	---------------------

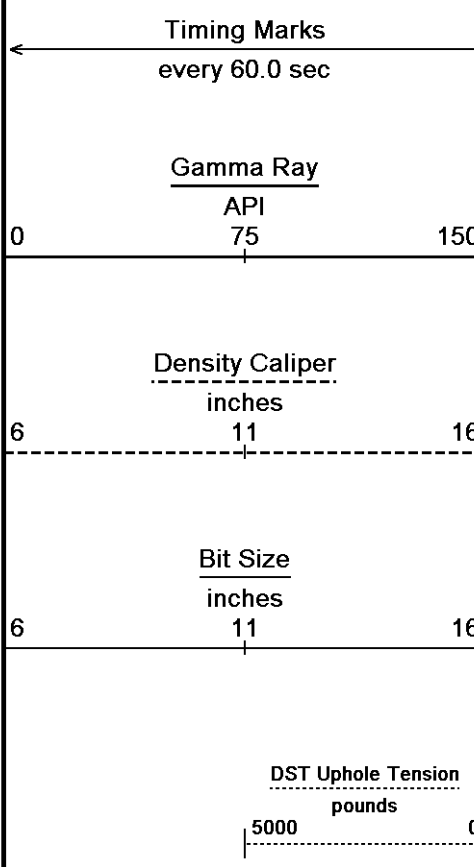



Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

Replay Scale 1:240

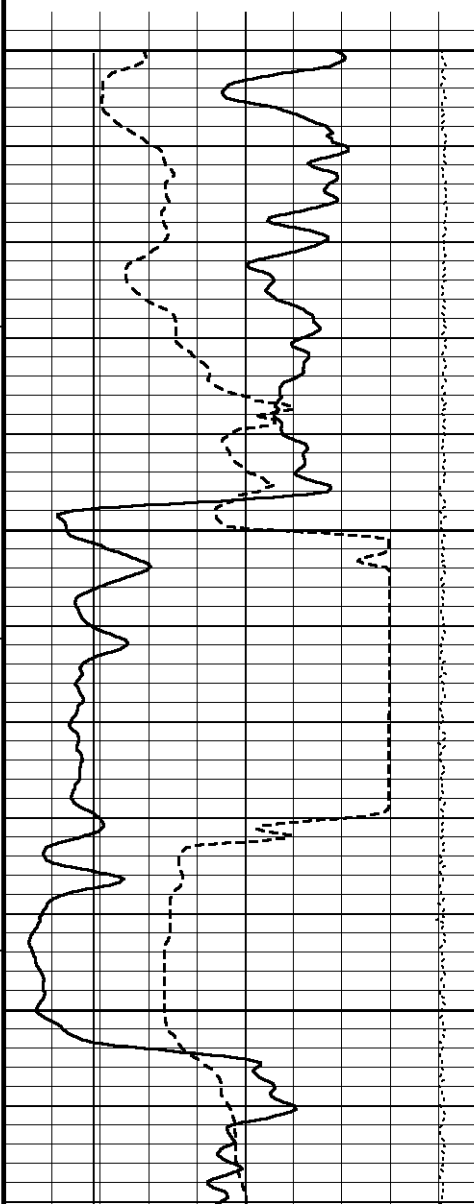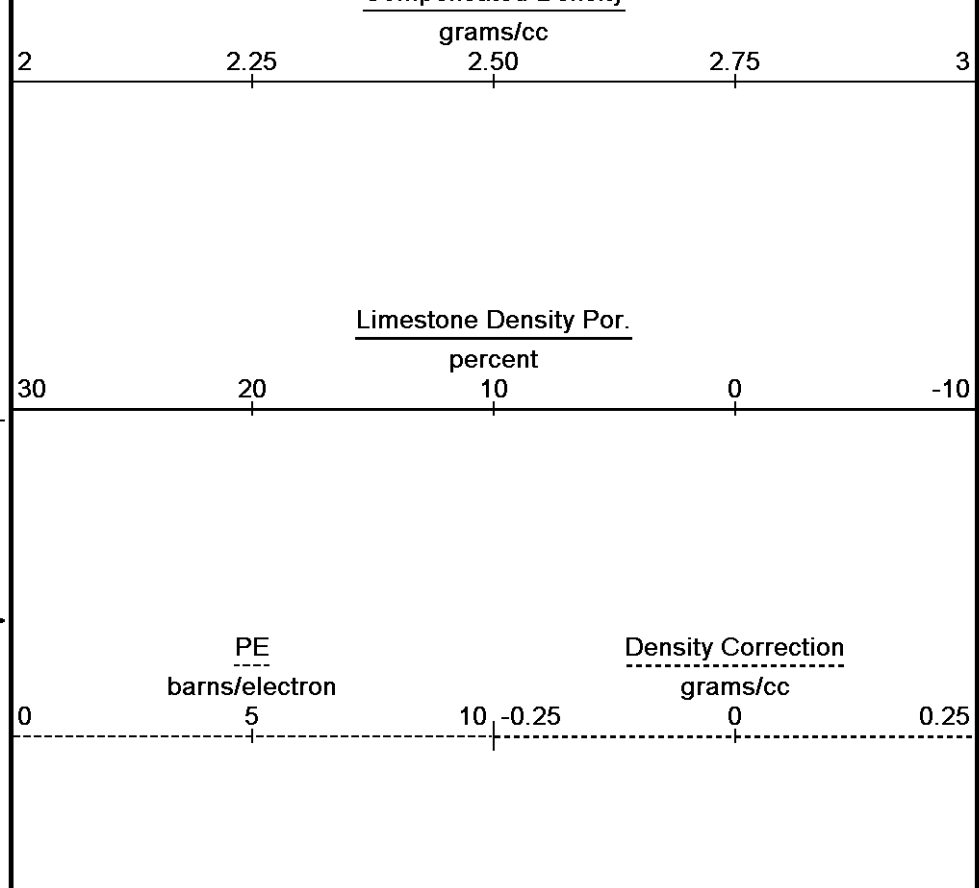

2350


97°


2400

100

97°

2450

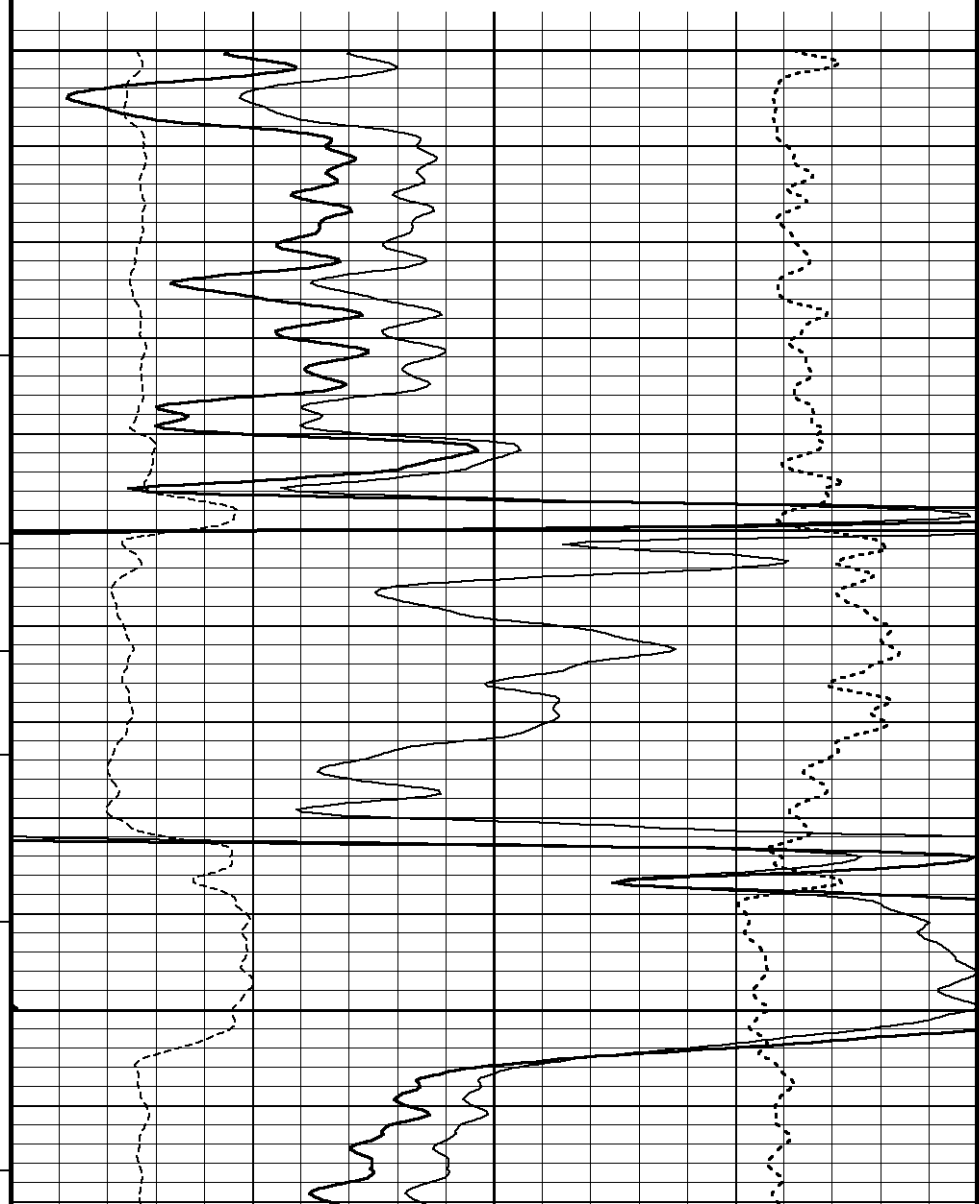

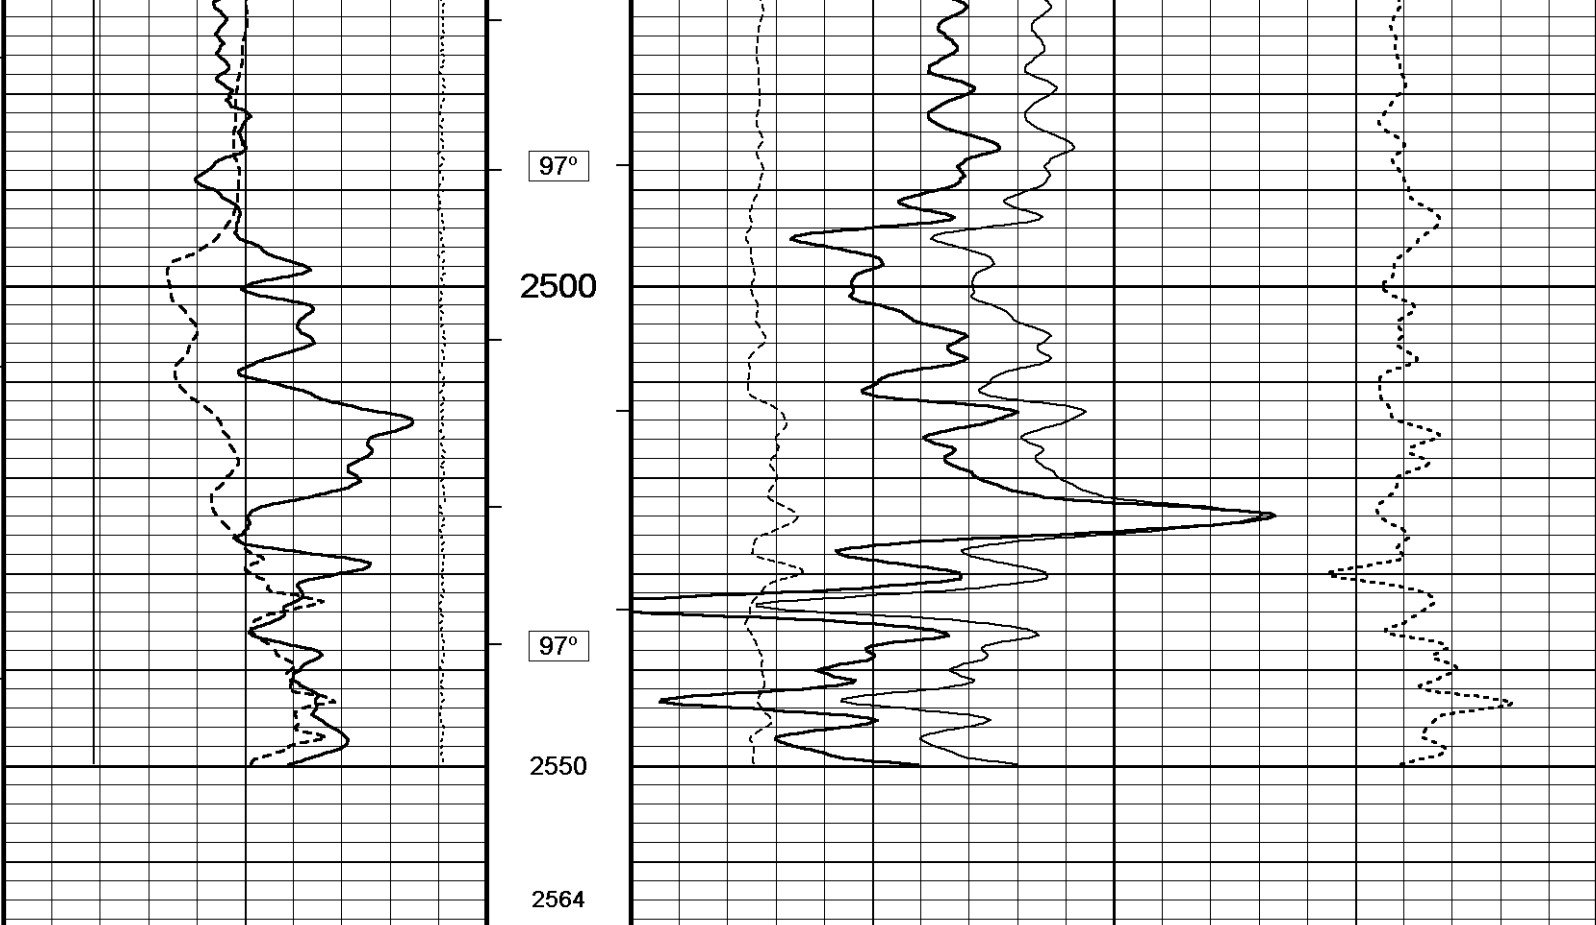



Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta Recorded on 01-JAN-2003 07:11
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164


↑ **5 INCH MAIN PASS** ↑


↓ **5 INCH MAIN PASS** ↓



Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta Recorded on 01-JAN-2003 07:11
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

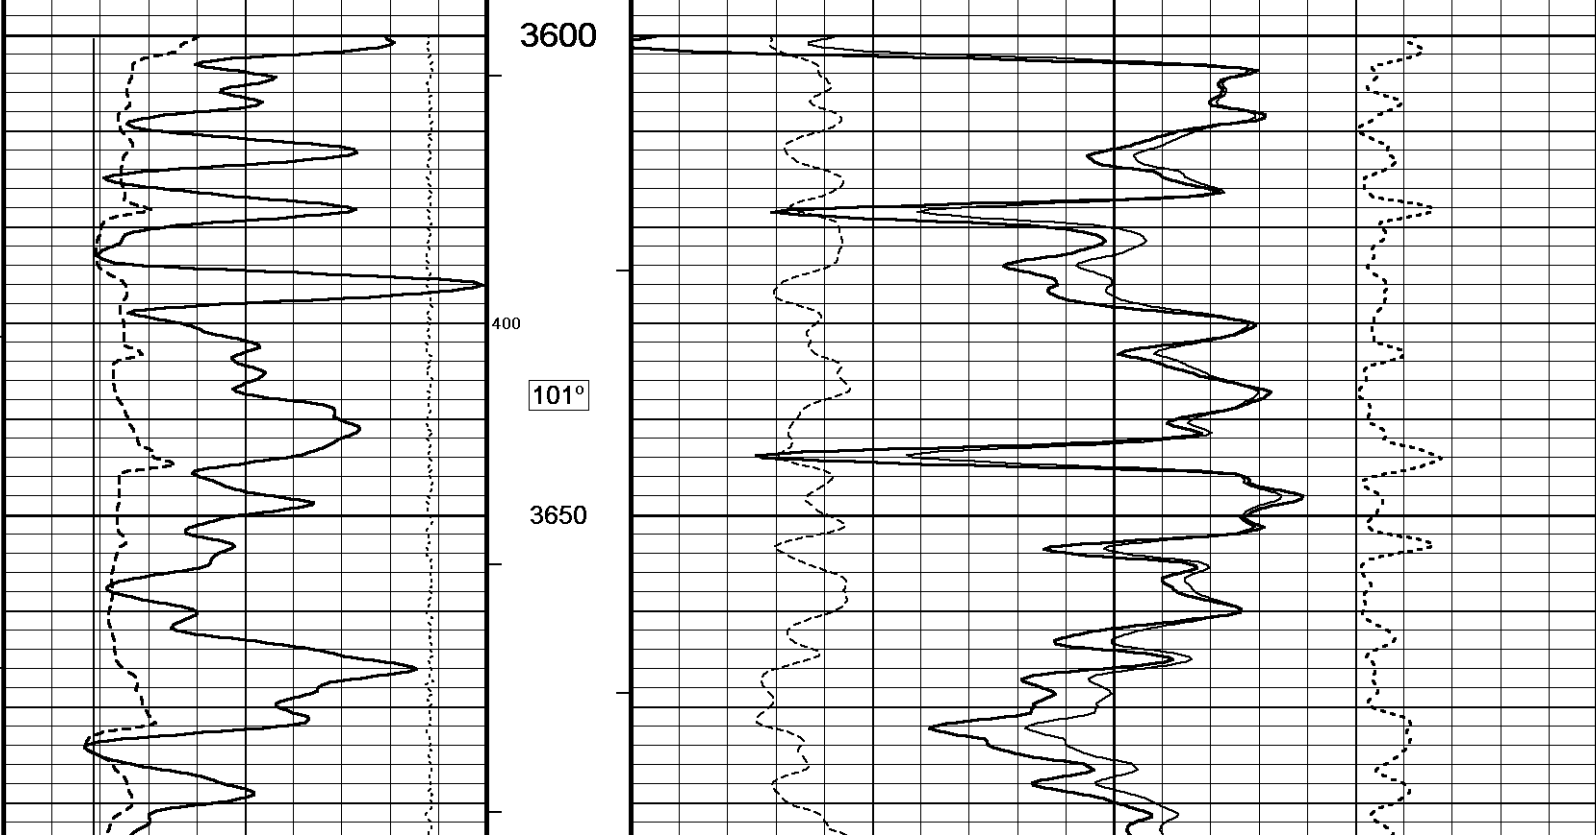


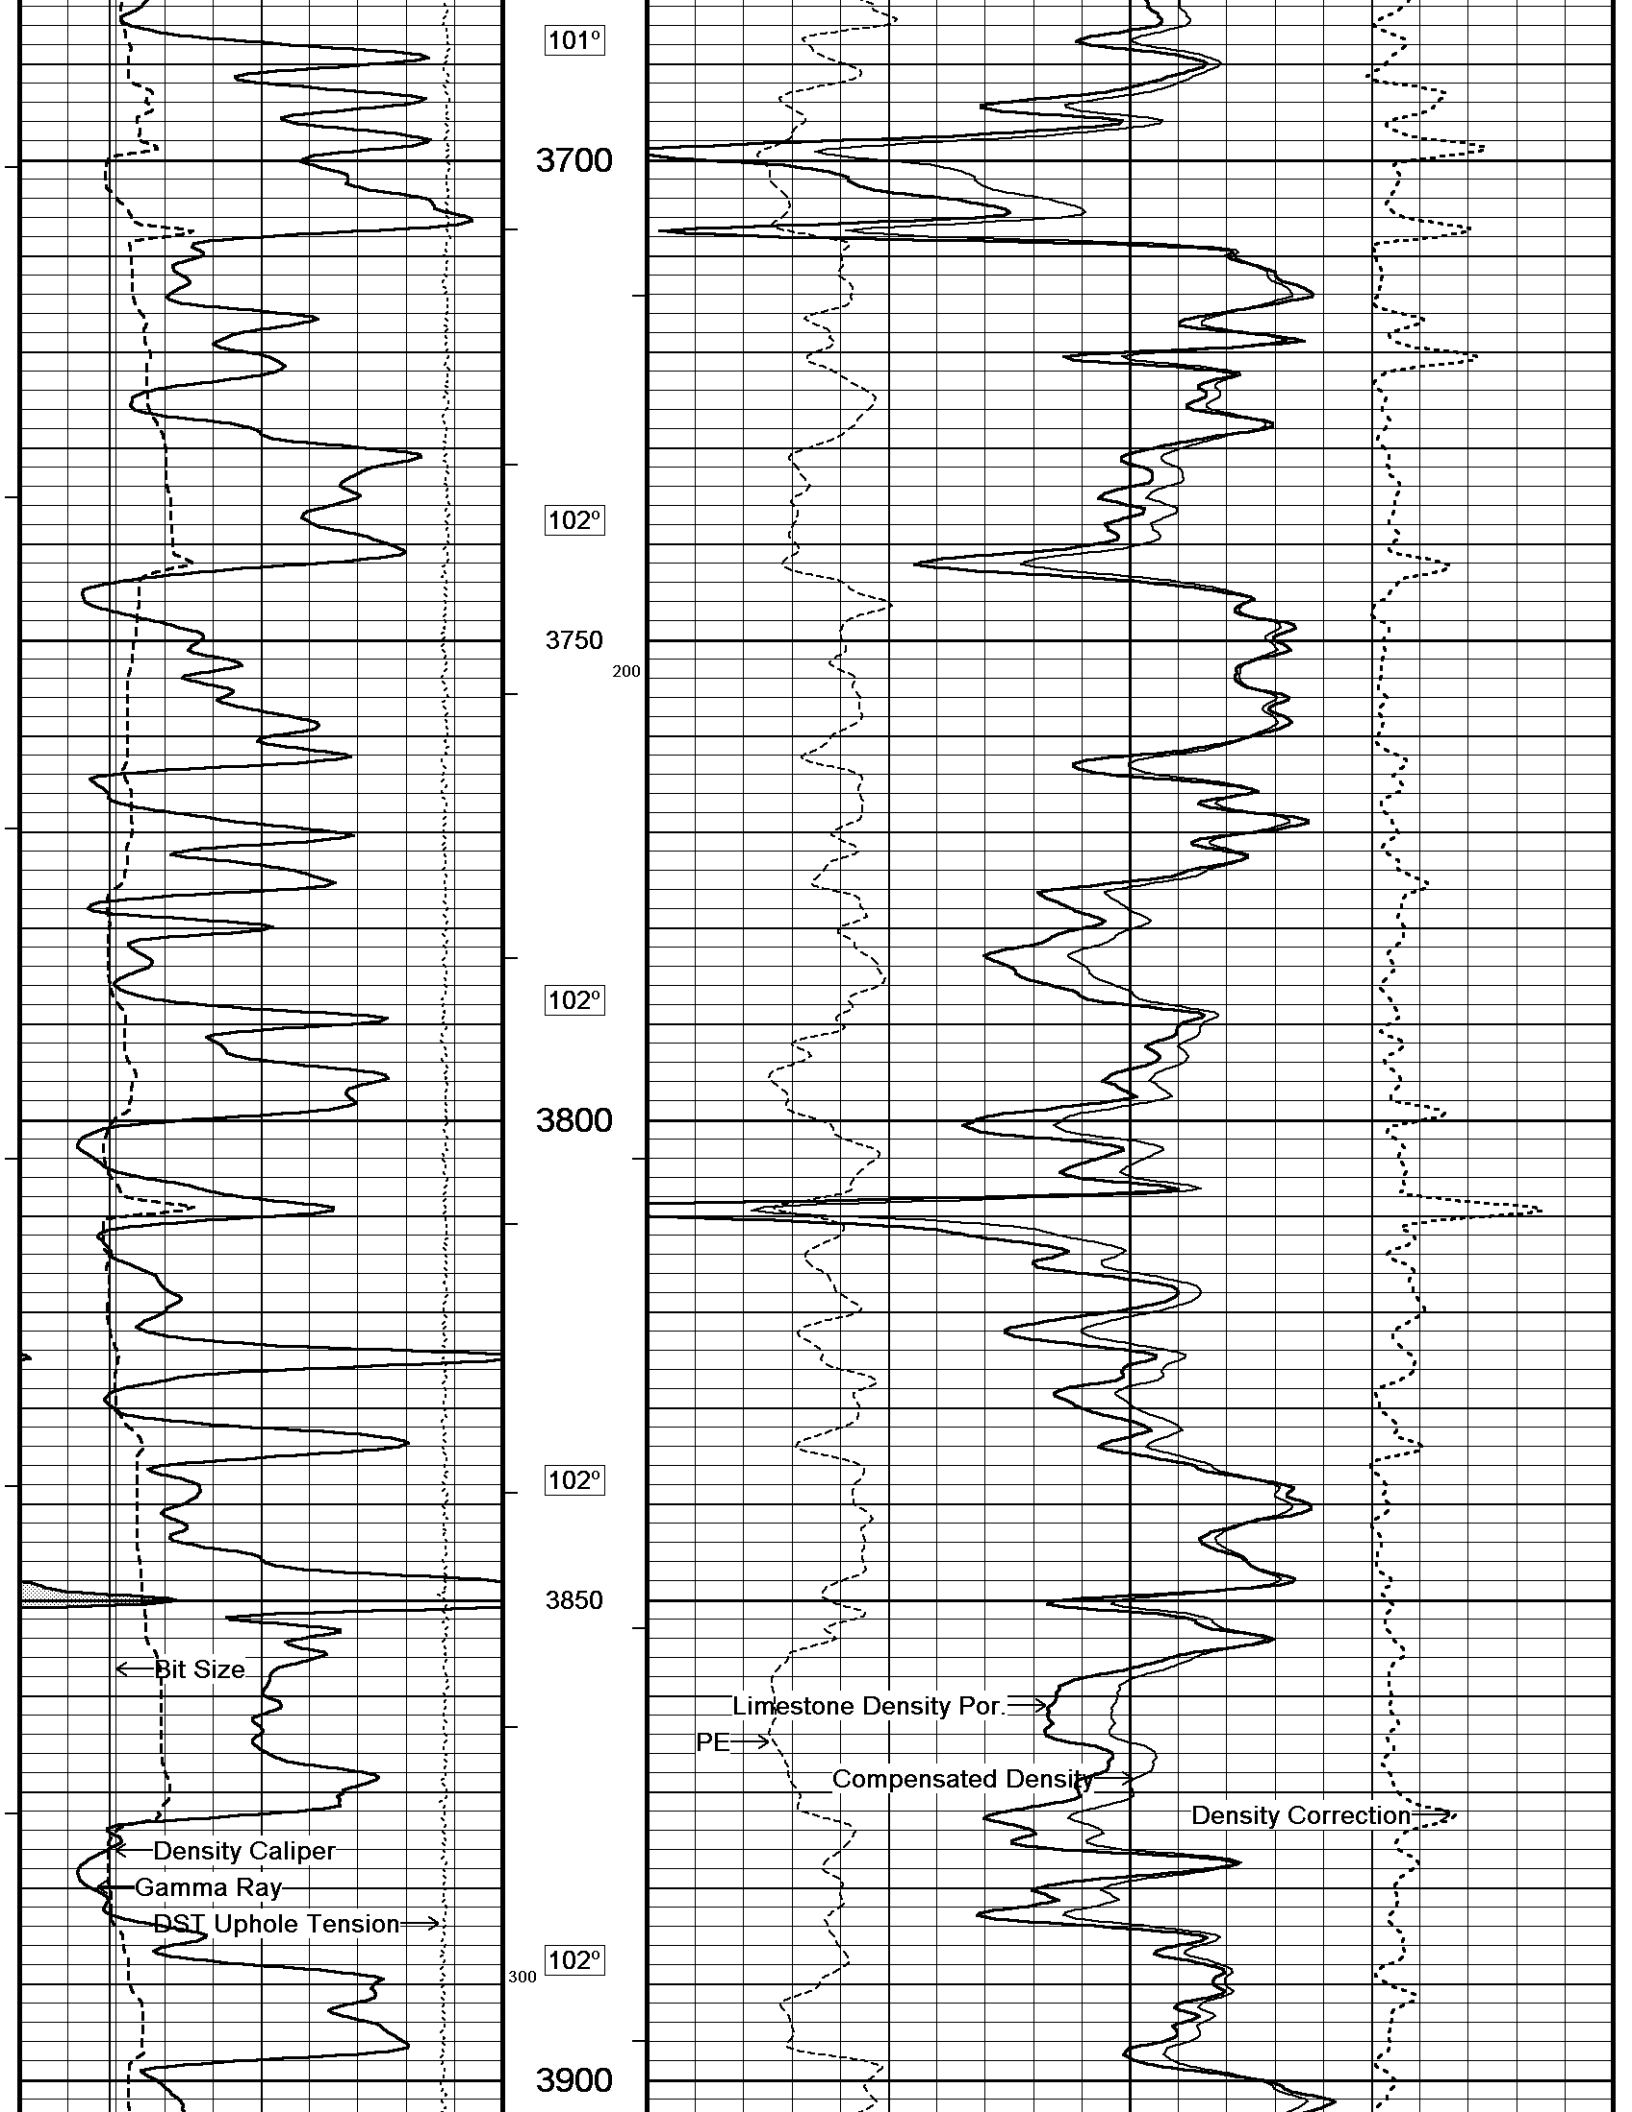

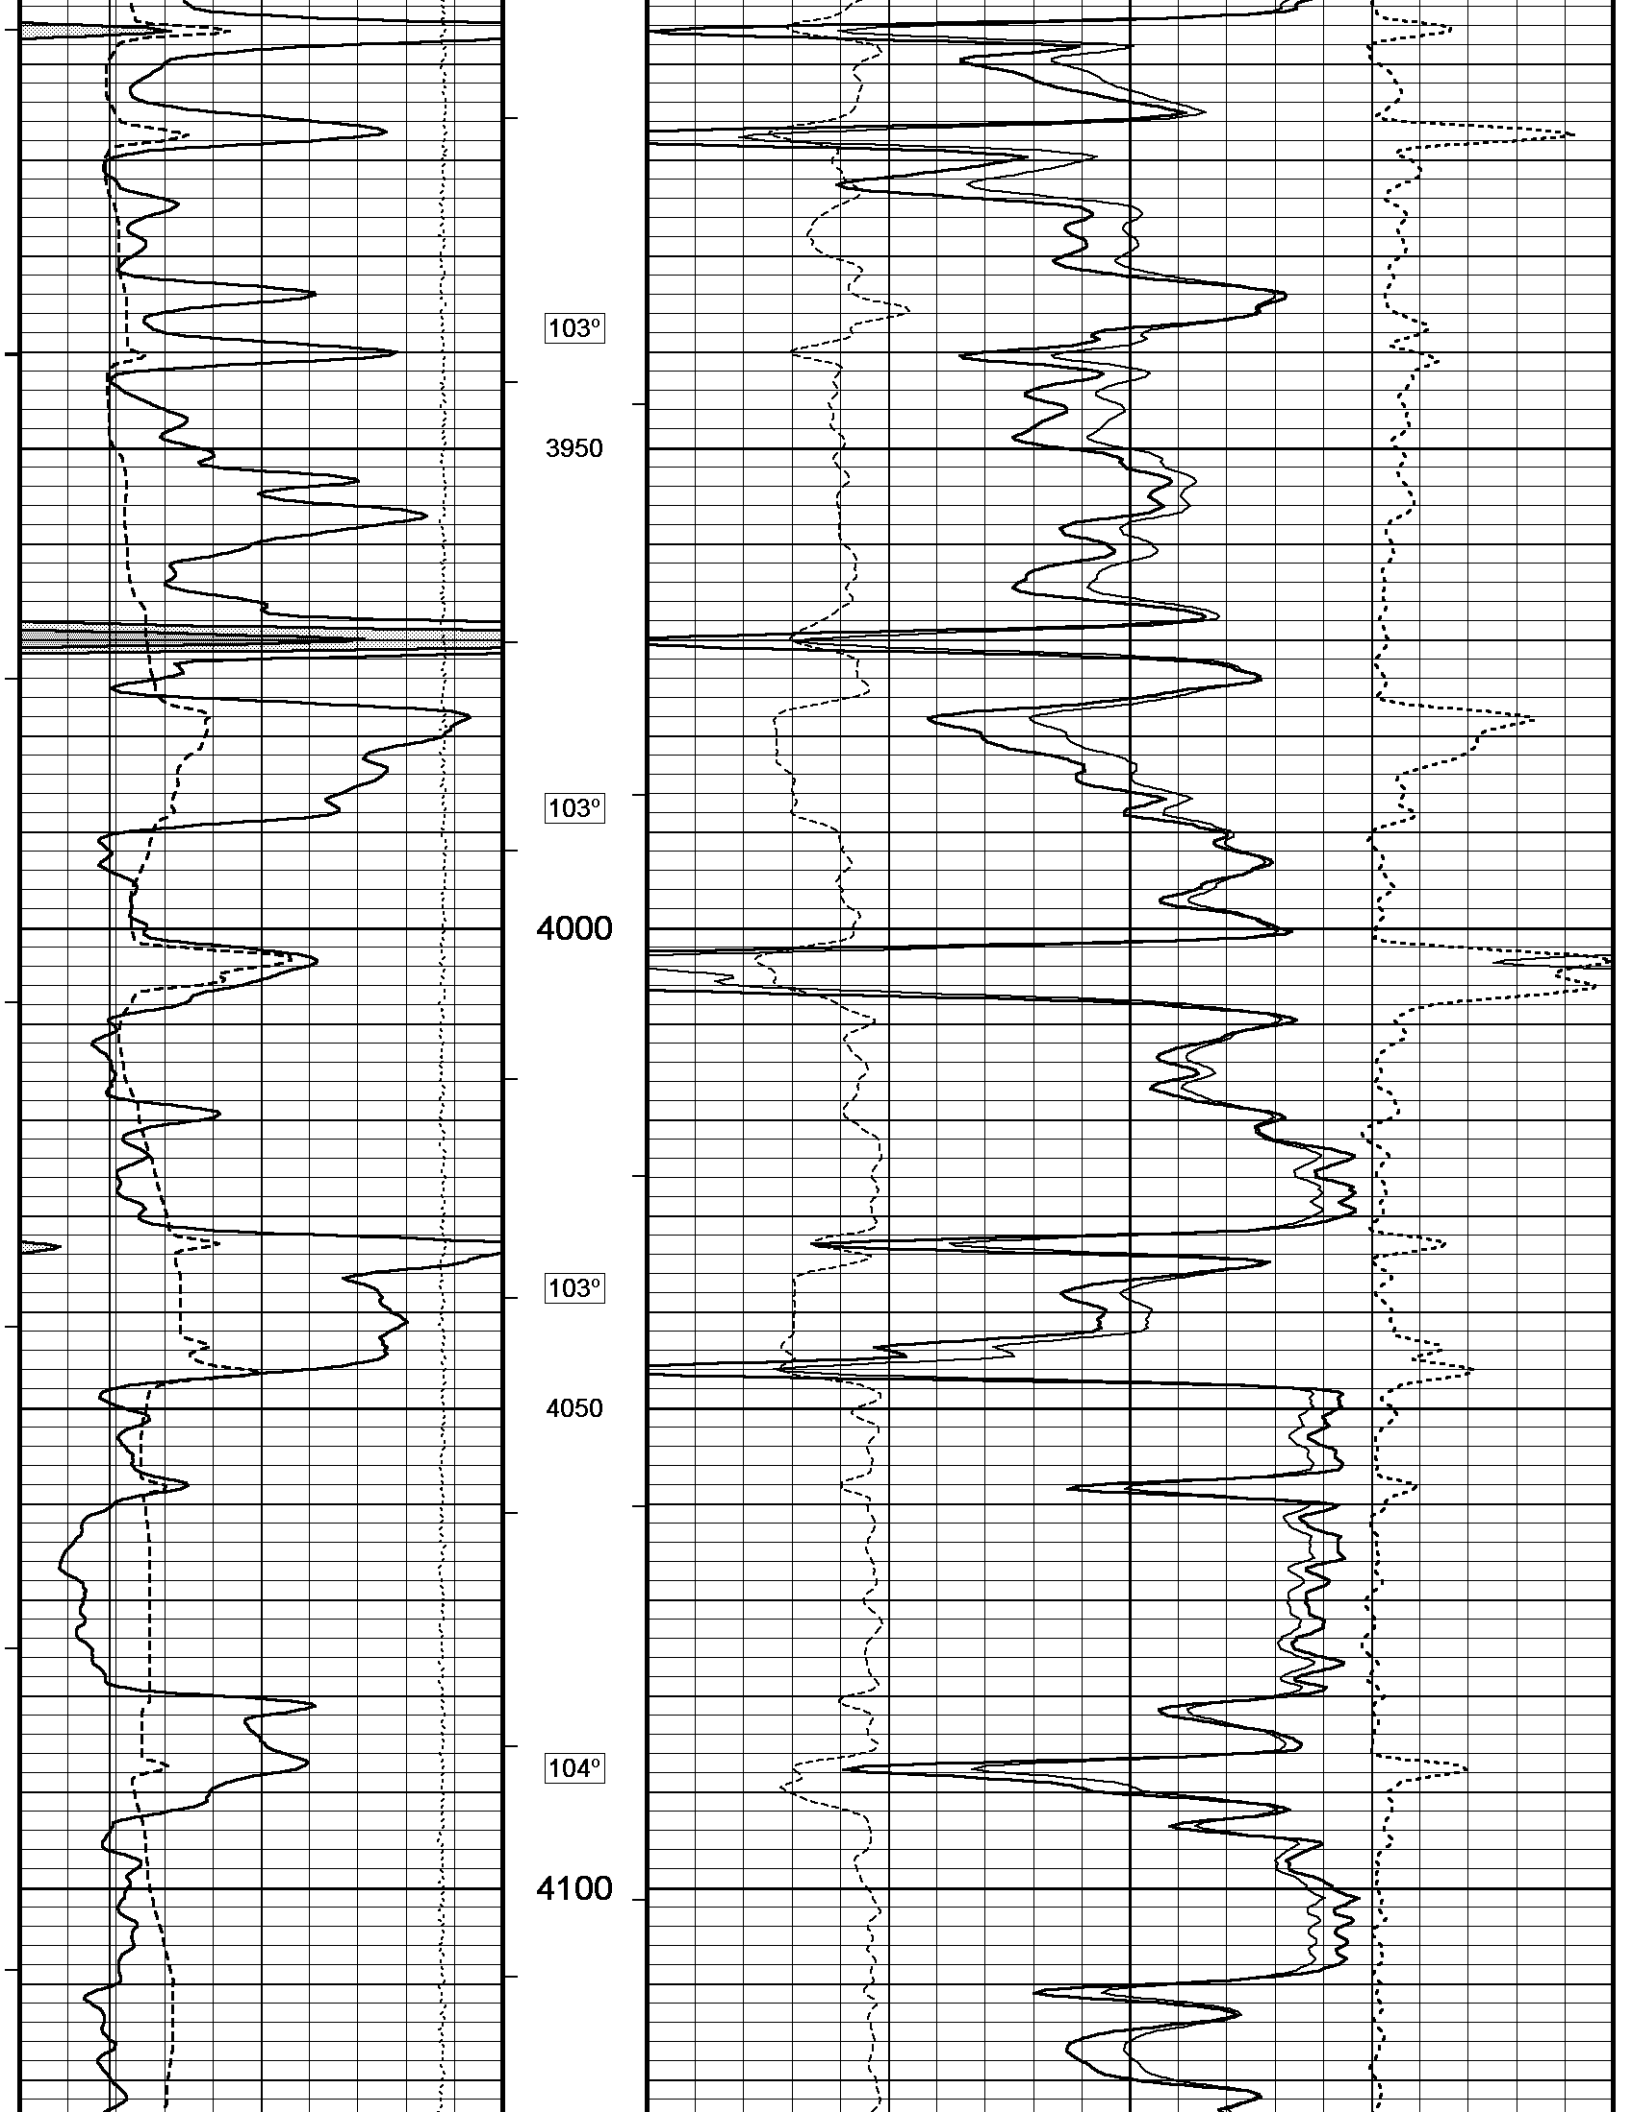

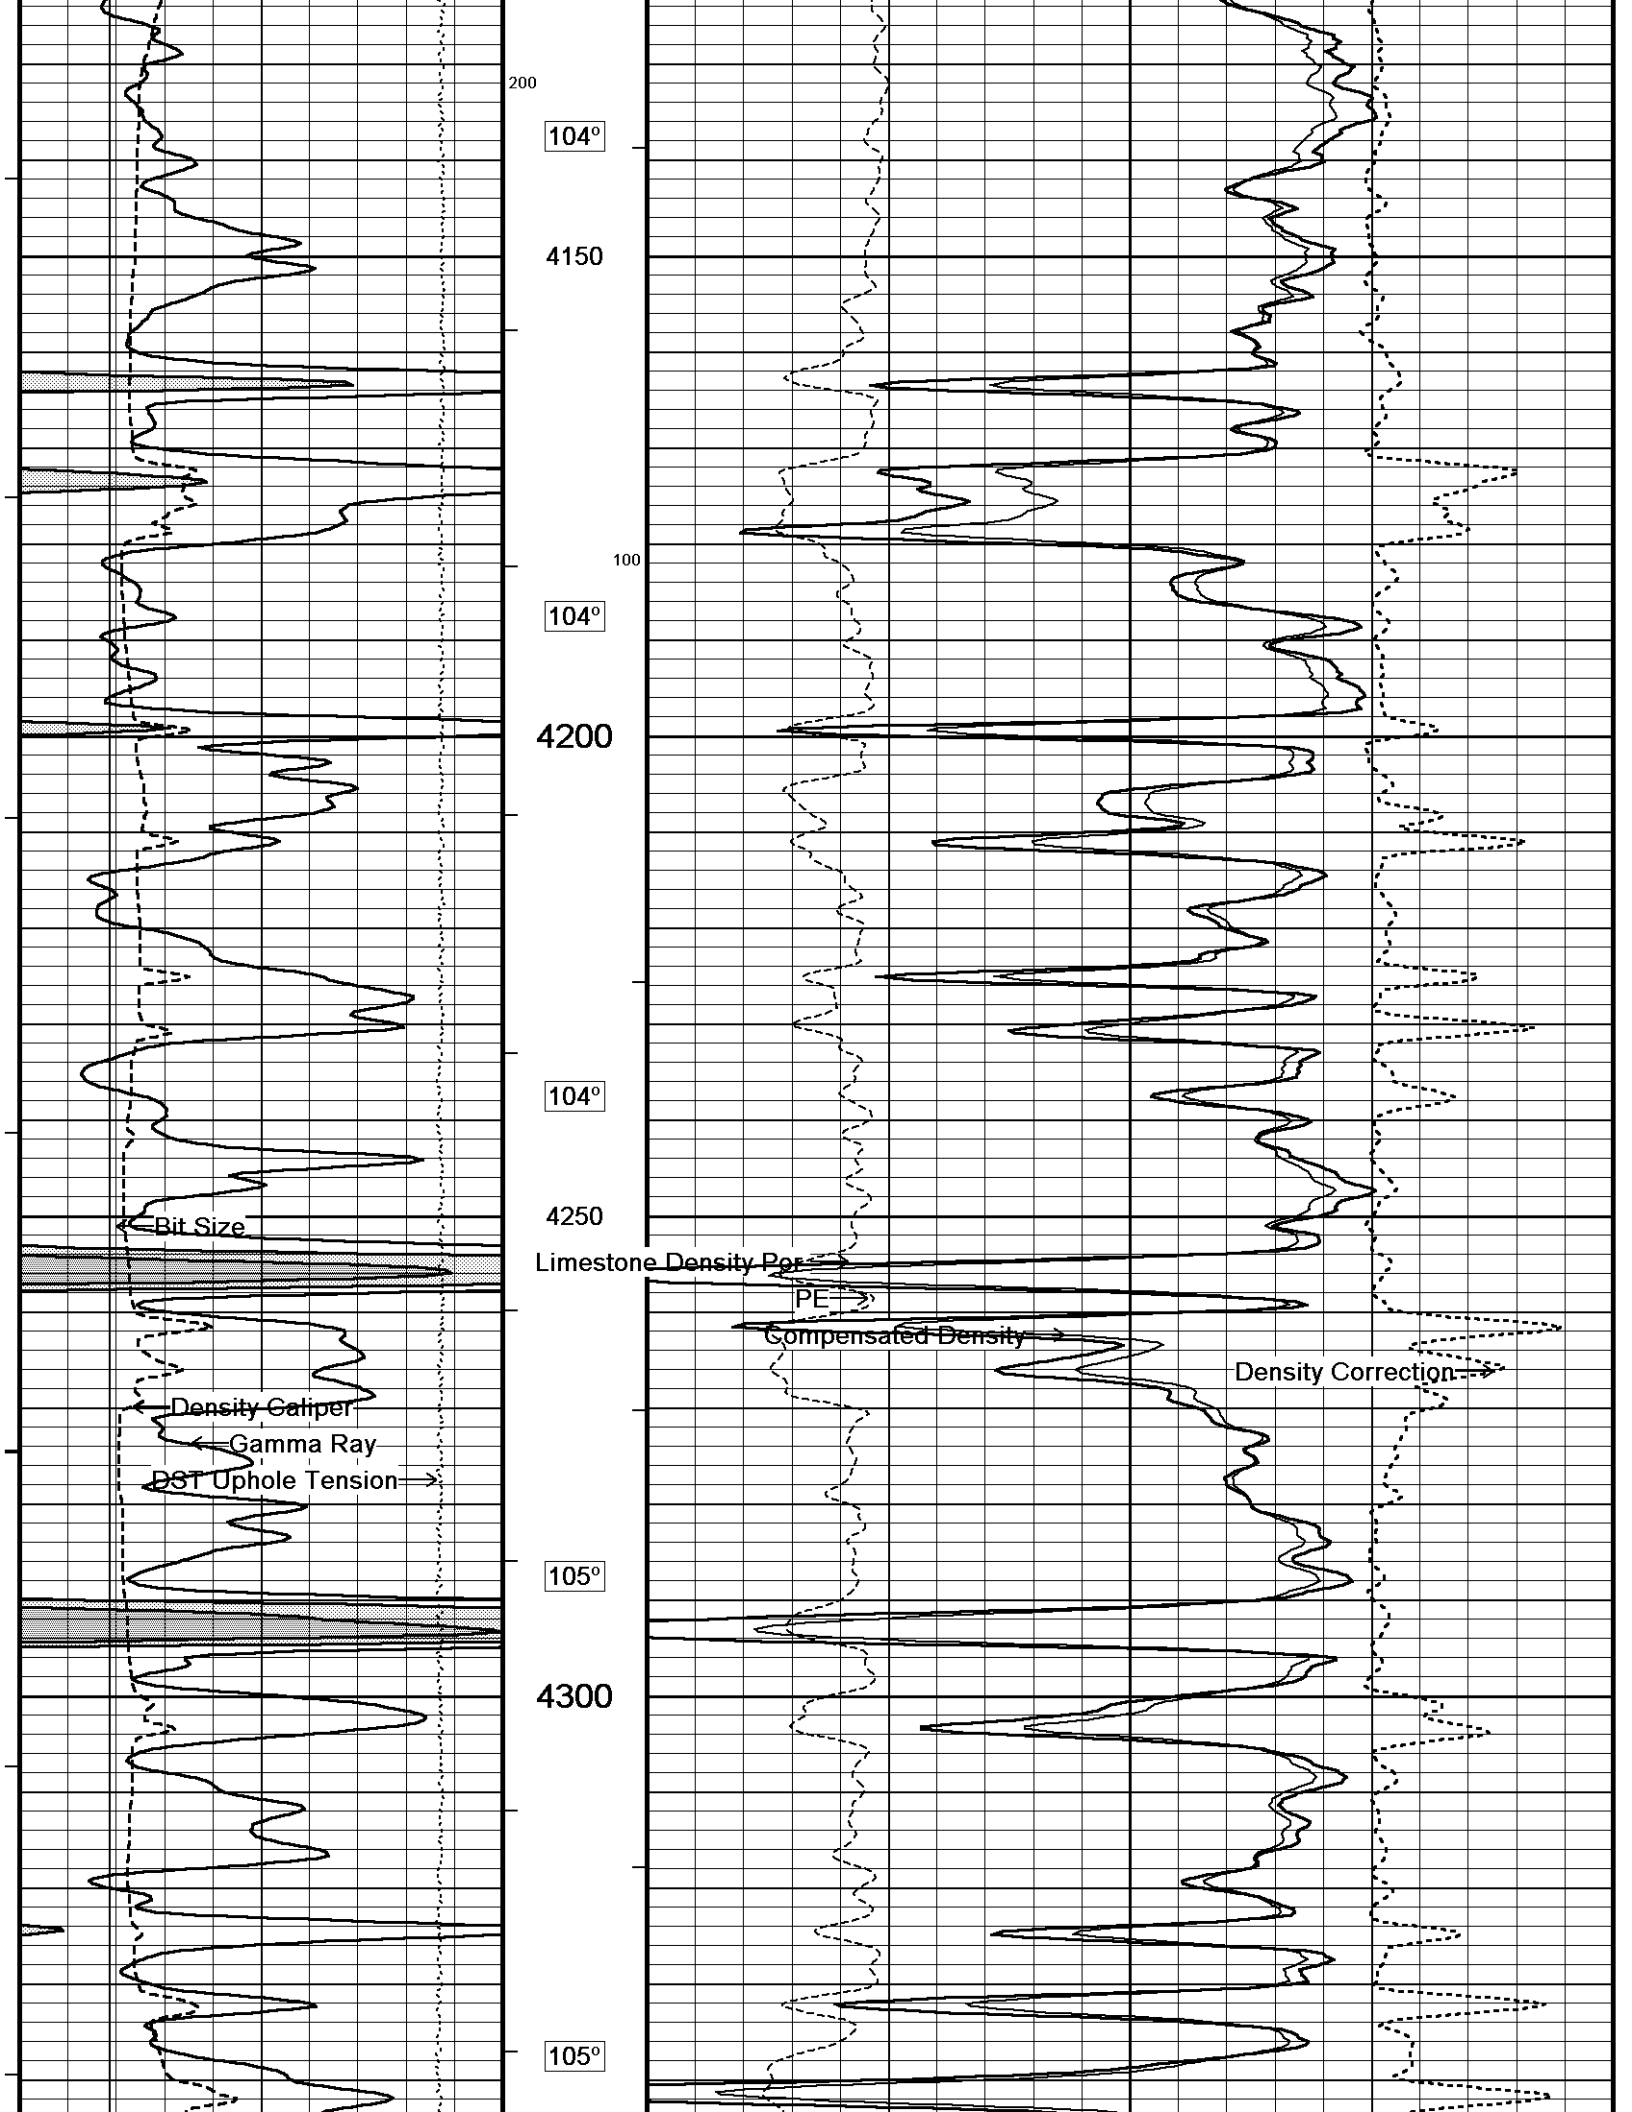

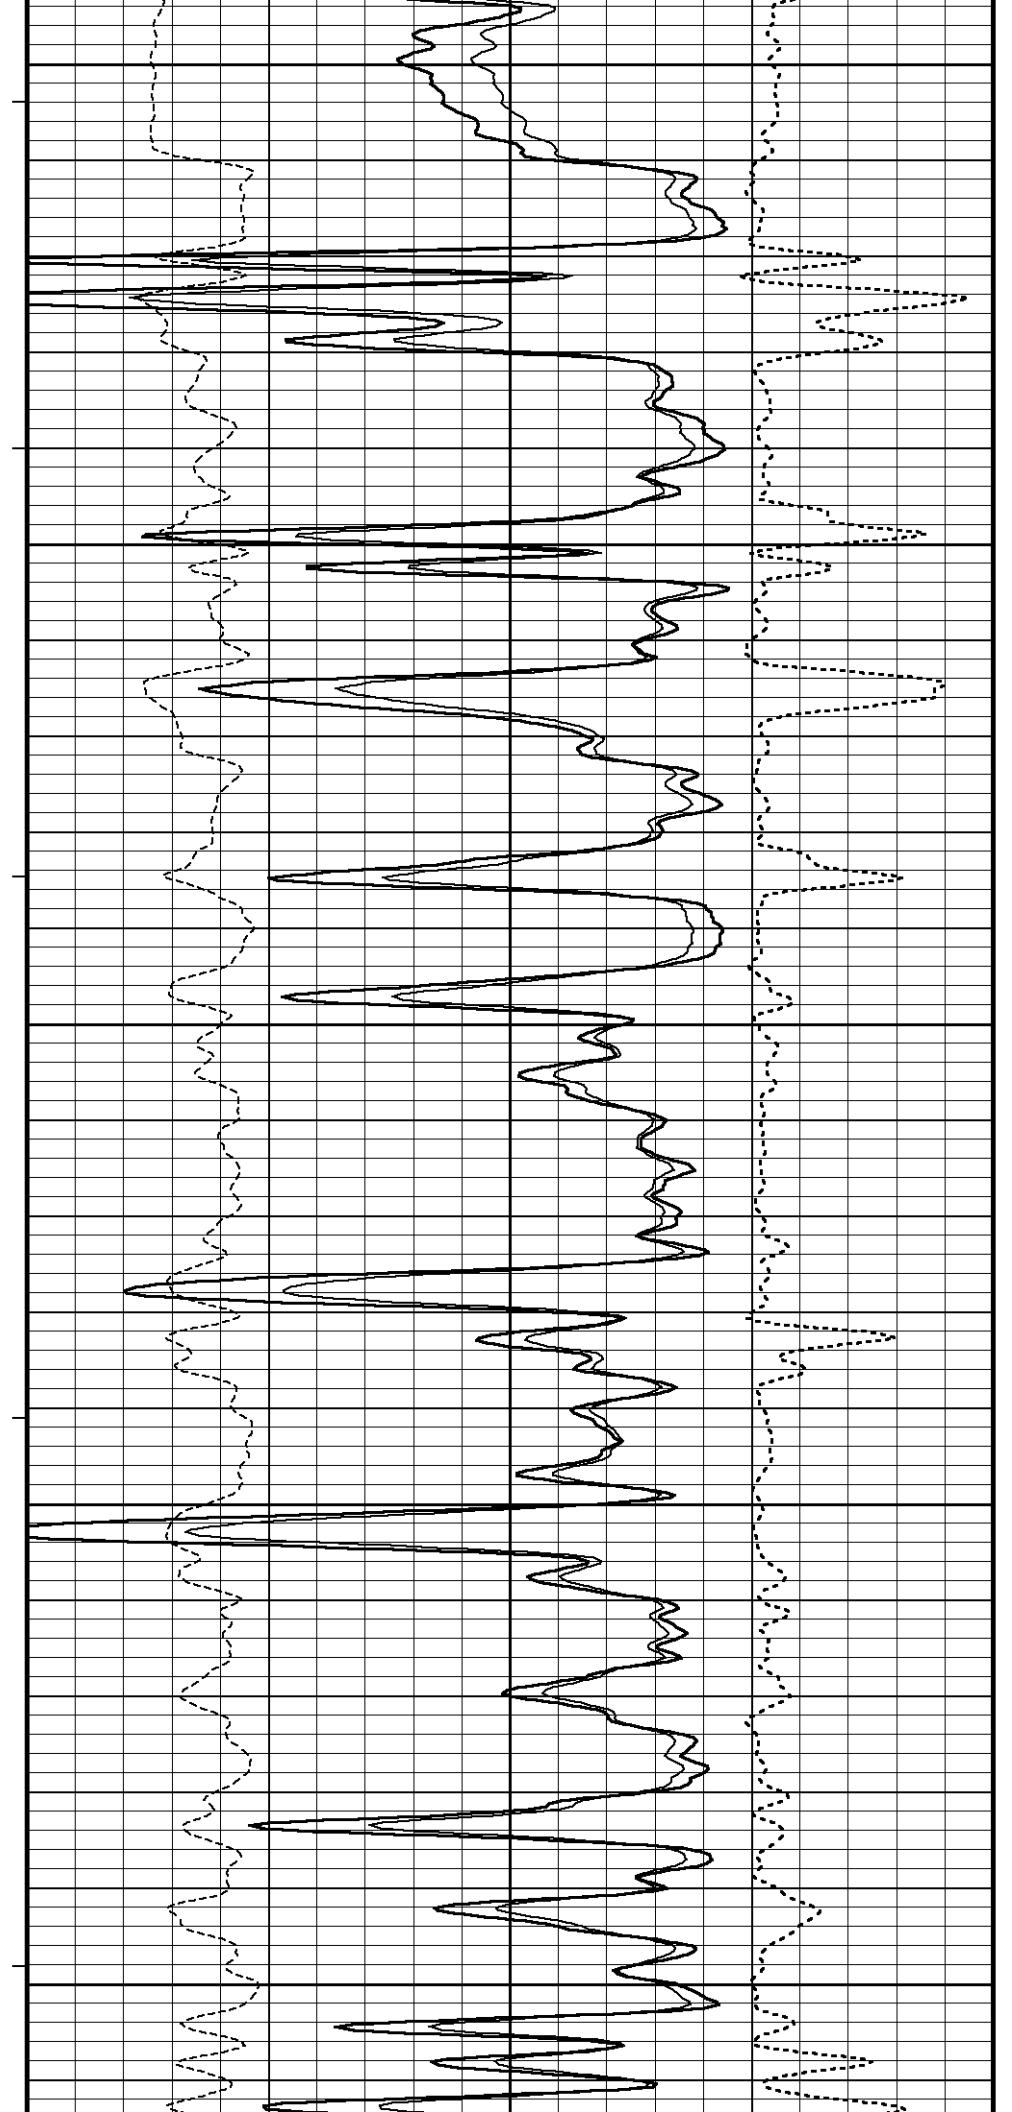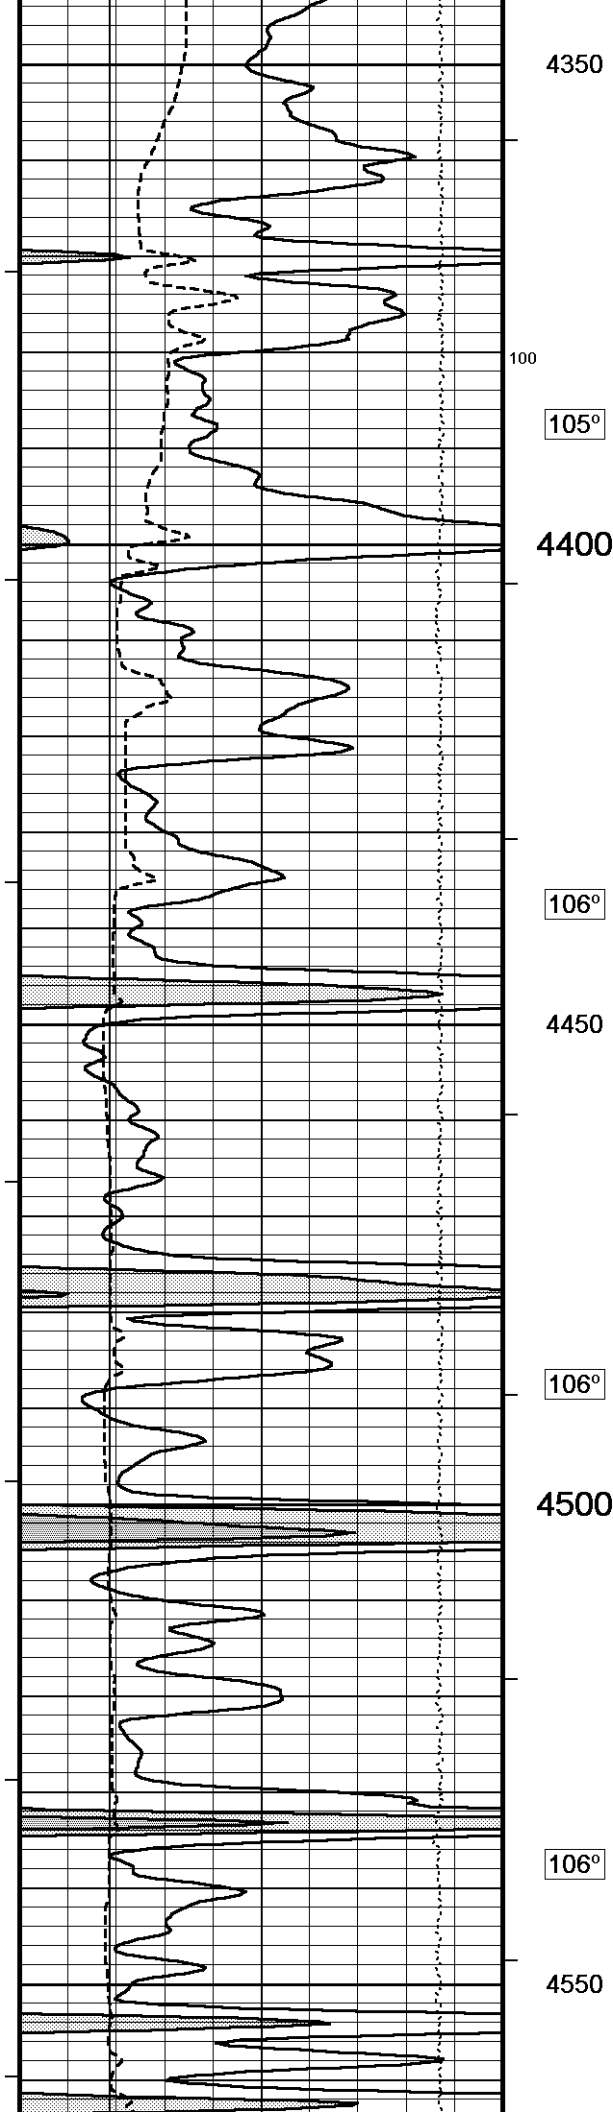

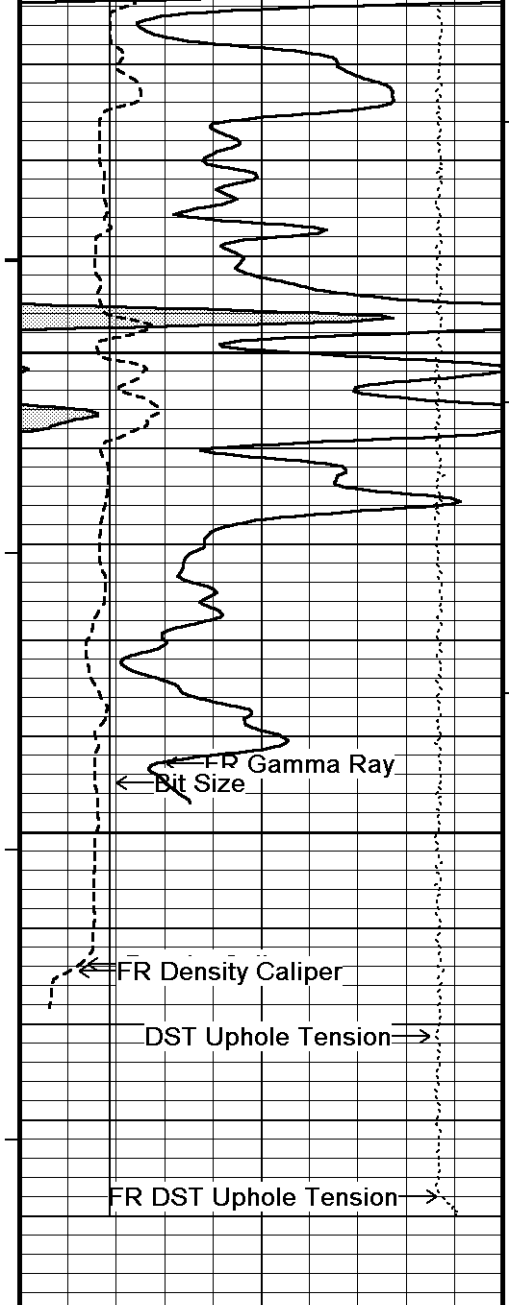

108°

4600

108°

4650


4700

Depth in Feet

Borehole Temp in deg F

HVI every 10 cu ft

Annular Integral every 10 cu ft

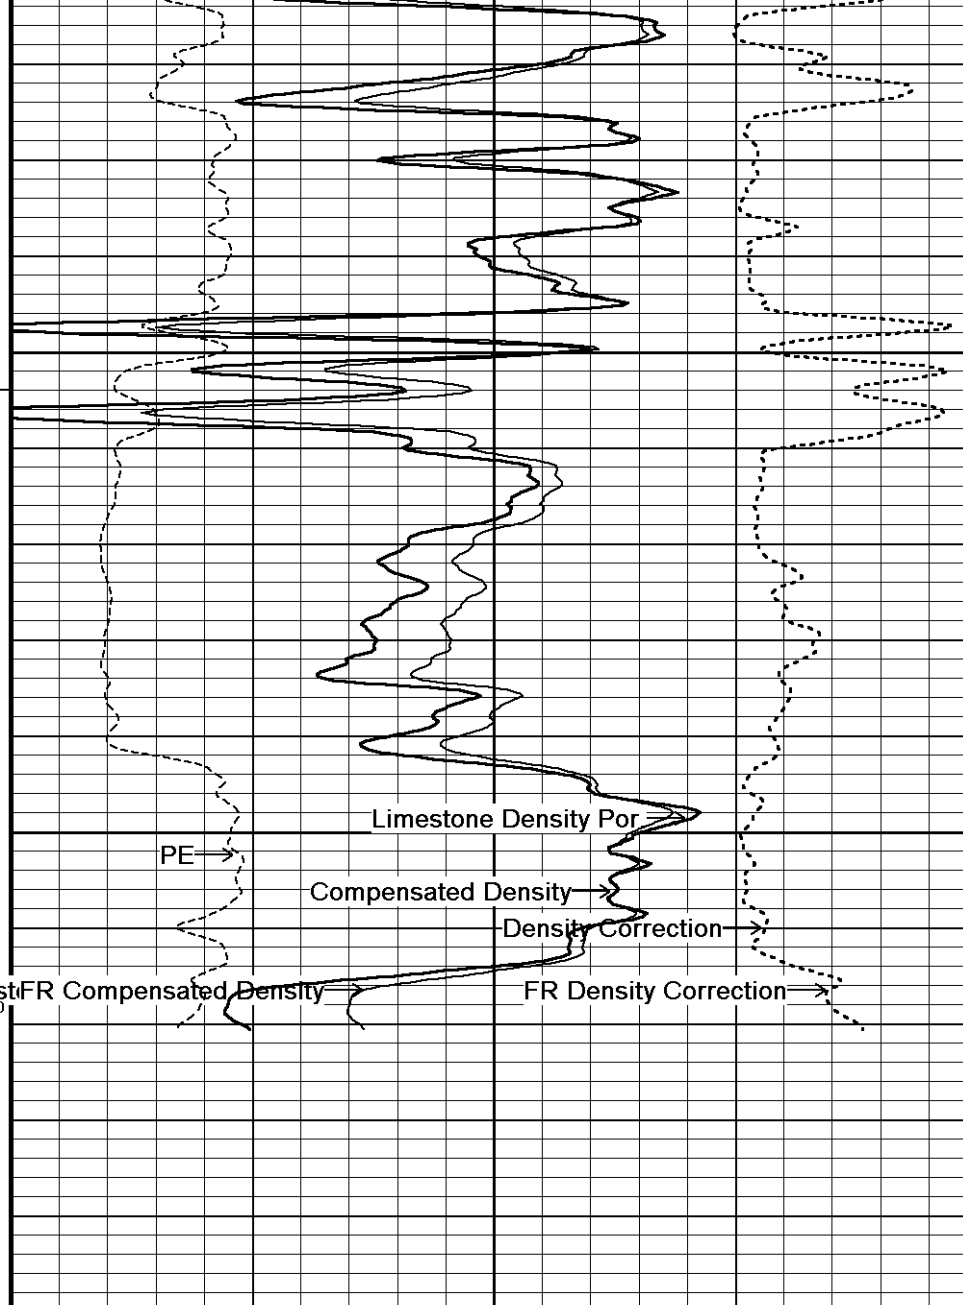

Timing Marks every 60.0 sec

Gamma Ray API 75


Density Caliper inches 11

Bit Size inches 11

Compensated Density grams/cc 2 2.25 2.50 2.75 3

Limestone Density Por. percent 30 20 10 0 -10

PE barns/electron 0 5 10
Density Correction grams/cc -0.25 0 0.25





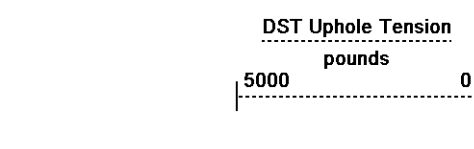


Replay
Scale
1:240





Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford...Hund #1-9_002 spooled section.dta
 Recorded on 01-JAN-2003 07:11
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164


5 INCH MAIN PASS


Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreVie...Copy of Hund #1-9_001.dta
 Recorded on 01-JAN-2003 05:44
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

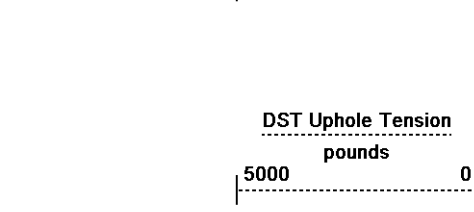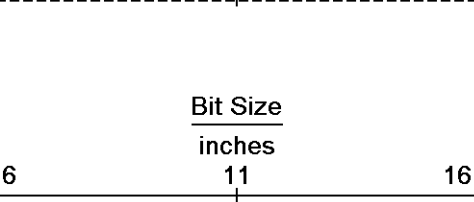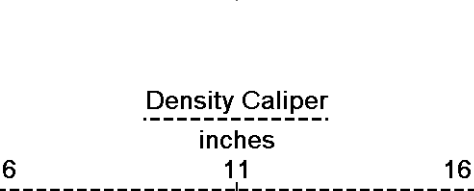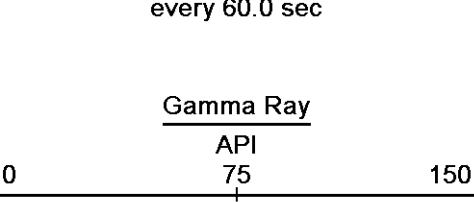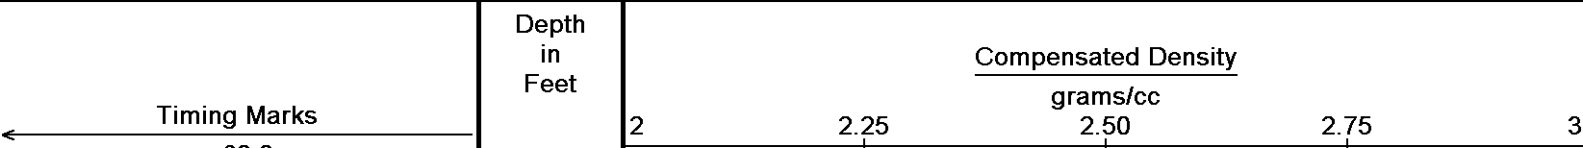

Depth in Feet
Borehole Temp in deg F
HVI every 10 cu ft
Annular Integral every 10 cu ft
Replay Scale 1:240

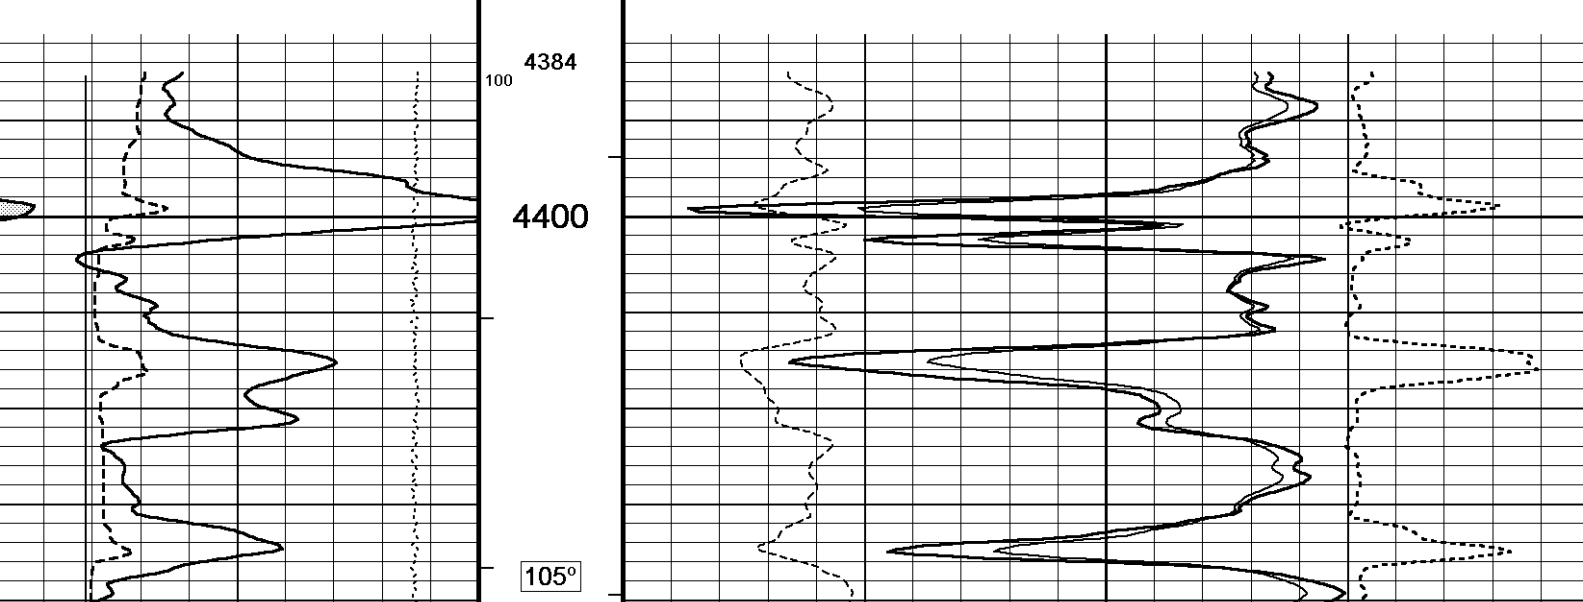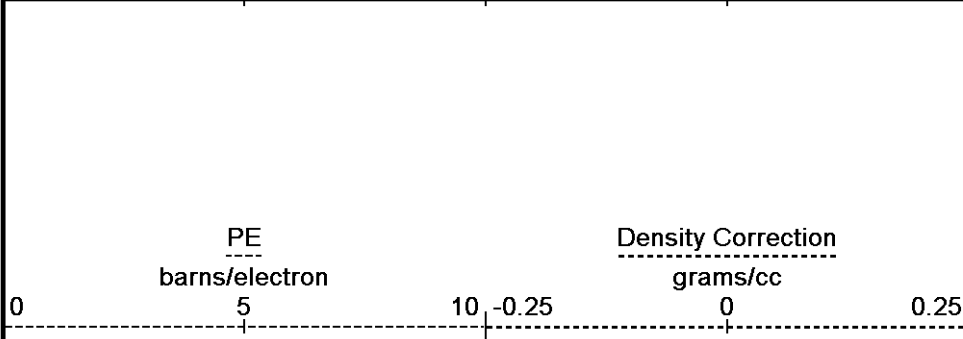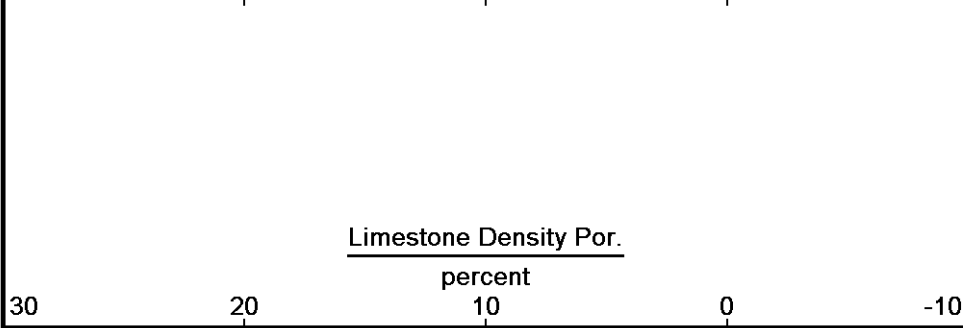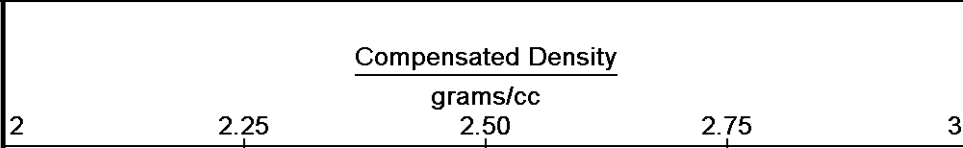

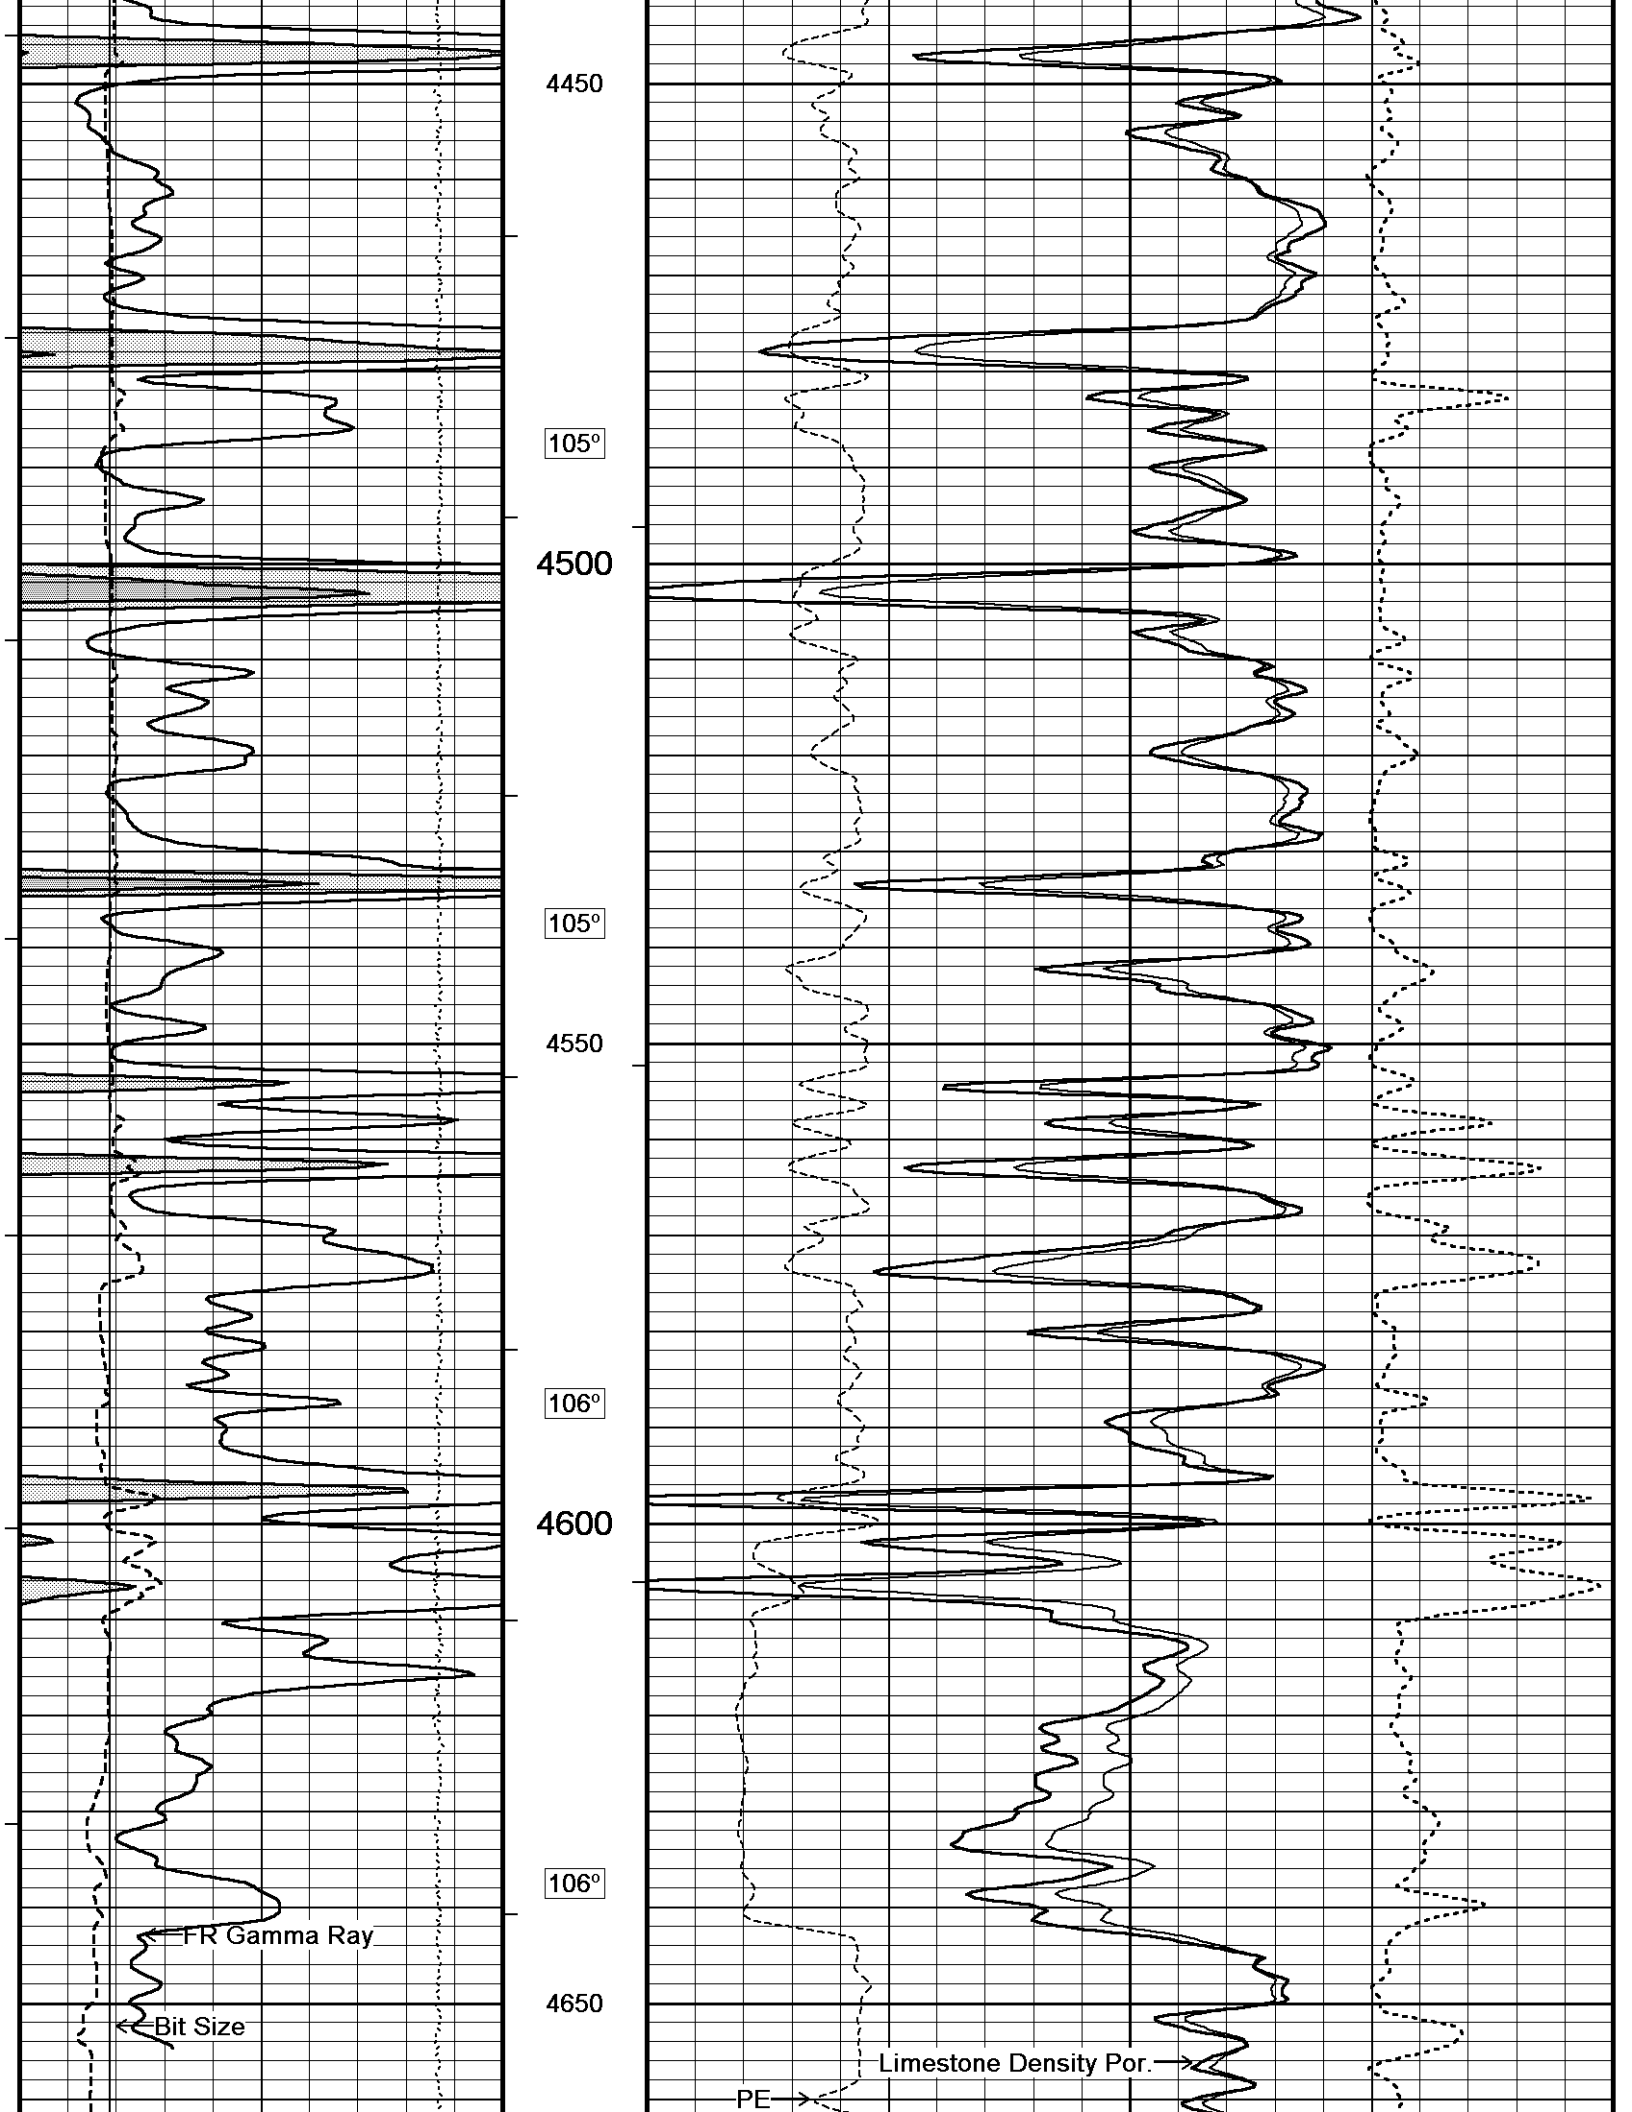

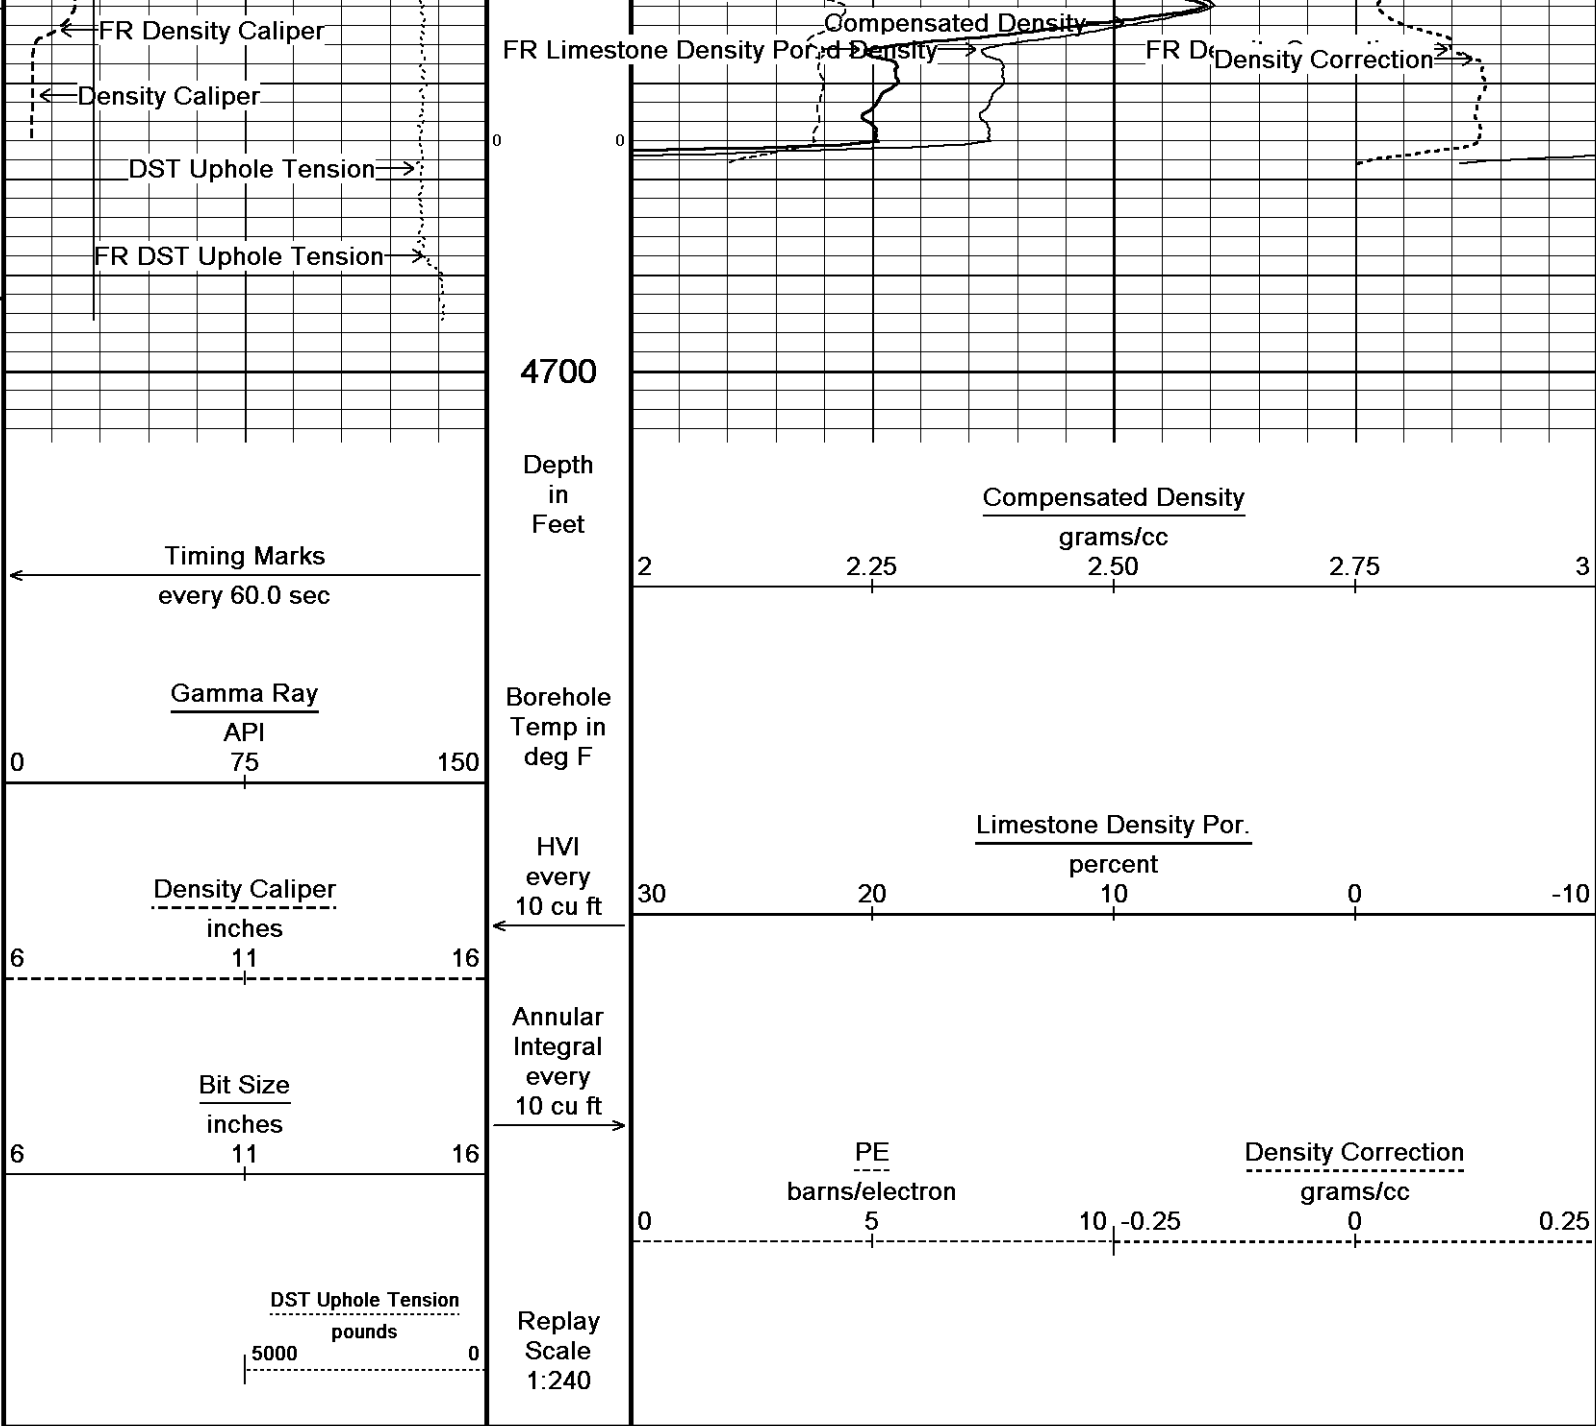

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 20-APR-2011 10:25
 Filename: C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreView\Copy of Hund #1-9_001.dta Recorded on 01-JAN-2003 05:44
 System Versions: Logged with 11.03.2789 Plotted with 11.02.2164

↑ **5 INCH REPEAT PASS** ↑

BEFORE SURVEY CALIBRATION
 C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreView\Copy of Hund #1-9_001.dta

General Constants All 000 Last Edited on 01-JAN-2003,03:41

General Parameters		
Mud Resistivity	0.840	ohm-metres
Mud Resistivity Temperature	78.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	5.500	inches

Annular Volume Diameter 5.500 inches
 Caliper for Differential Caliper Density Caliper

Rwa Parameters
 Porosity used Limestone Density Por.
 Resistivity used Array Ind. One Res Rt
 RWA Constant A 1.000
 RWA Constant M 2.000

Micro Normal and Micro Inverse Calibration MML-A 9

Base Calibration on 17-JAN-2011 13:45
 Field Check on 01-JAN-2003 00:22

Base Calibration

Channel	Measured		Calibrated (ohm-m)	
	Resistor 1	Resistor 2	Resistor 1	Resistor 2
Micro Normal	12.1	59.8	2.6	12.8
Micro Inverse	15.6	78.1	1.7	8.4

Channel	Base Check (ohm-m)	Field Check (ohm-m)
Micro Normal	32.4	32.4
Micro Inverse	16.4	16.4

Micro Normal and Micro Inverse Constants MML-A 9

Last Edited on 17-FEB-2011,21:07

Pad Type 8-12 in Soft Rubber Inflatable 006-9011-159
 Micro Normal K Factor 0.5110
 Micro Inverse K Factor 0.3380
 Standoff Offset N/A inches

Caliper Calibration MML-A 9

Base Calibration on 17-JAN-2011 13:36
 Field Calibration on 01-JAN-2003 00:20

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	14751	5.96
2	18323	7.98
3	21735	9.95
4	25522	11.91
5	0	0.00
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
6.12	5.98

Neutron Calibration MDN-A.B 65

Base Calibration on 17-JAN-2011 15:12
 Field Check on 01-JAN-2003 00:35

Base Calibration

Ratio	Measured		Calibrated (cps)	
	Near	Far	Near	Far
	3079	97	3714	110
	31.797		33.764	

Field Calibrator at Base

Ratio	Calibrated (cps)
	1654 2338
	0.708

Field Check

Ratio	Calibrated (cps)
	1656 2349
	0.705

Neutron Constants MDN-A.B 65

Last Edited on 01-JAN-2003,03:42

Neutron Source Id 757
 Neutron Jig Number 5824NE
 Epithermal Neutron No
 Caliper Source for Processing Density Caliper
 Stand-off 0.00 inches
 Mud Density 1.09 gm/cc
 Limestone Sigma 7.10 cu
 Sandstone Sigma 4.26 cu
 Dolomite Sigma 4.70 cu
 Formation Pressure Source Constant Value
 Formation Pressure 0.00 kpsi
 Temperature Source MCG External Temperature

Temperature Source	MCG External Temperature	N/A	degrees F
Mud Salinity		0.00	kppm
Formation Fluid Salinity Source	Constant Value		
Formation Fluid Salinity		0.00	kppm
Barite Mud Correction	Not Applied		

FE Calibration MFE-A.A 55			Base Calibration on 17-JAN-2011 13:58 Field Check on 01-JAN-2003 00:18
Base Calibration			
	Measured	Calibrated (ohm-m)	
Reference 1	0.0	0.0	
Reference 2	954.8	126.8	
Base Check		281.8	
Field Check		281.4	

FE Constants MFE-A.A 55			Last Edited on 01-JAN-2003,03:42
Running Mode	No Sleeve		
MFE K Factor	0.1268		
Caliper Source for FE correction	Density Caliper		
Caliper Value for FE correction	N/A	inches	
Rm Source for FE correction	Temperature Corr		
Temp. for Rm Corr.	MCG External Temperature		
Stand-off	0.5	inches	

High Resolution Temperature Calibration MAI-A.A 178			Field Calibration on 28-MAR-2010,00:50
	Measured	Calibrated(Deg F)	
Lower	1.00	33.80	
Upper	11.00	51.80	

High Resolution Temperature Constants MAI-A.A 178			Last Edited on
Pre-filter Length	11		

Induction Calibration MAI-A.A 178			Base Calibration on 17-JAN-2011,15:37 Field Check on 01-JAN-2003 00:17		
Base Calibration					
Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel	Low	High	Low	High	
1	17.6	484.7	9.3	966.2	
2	6.2	391.4	7.6	821.4	
3	4.0	264.5	5.2	566.0	
4	2.3	135.1	2.6	279.2	
Array Temperature	77.0		Deg F		
Channel	Base Check (mmho/m)		Field Check (mmho/m)		
	Low	High	Low	High	
1	0.0	0.0	11.9	3762.8	
2	0.0	0.0	29.5	3466.5	
3	0.0	0.0	27.1	3014.8	
4	0.0	0.0	18.6	2063.9	
Deep	0.0	0.0	15.7	1995.9	
Medium	0.0	0.0	40.1	3957.0	
Shallow	0.0	0.0	45.4	5080.7	
Array Temperature	0.0		68.7		Deg F

Induction Constants MAI-A.A 178			Last Edited on 01-JAN-2003,03:43
Induction Model	RtAP-WBM		
Caliper for Borehole Corr.	Density Caliper		
Hole Size for Borehole Correction	N/A	inches	
Tool Centred	No		
Stand-off Type	Fins		
Stand-off	0.50	inches	
Number of Fins on Stand-off	8.0000		
Stand-off Fin Angle	45.00	degrees	
Stand-off Fin Width	0.5000	inches	
Borehole Corr. Rm Source	Temperature Corr		

Temp. for Rm Corr.	MCG External Temperature	0.0020	mhos/metre
Squasher Start		N/A	mhos/metre
Squasher Offset			
Borehole Normalisation			
DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections			
Channel 1		0.00	mmhos/metre
Channel 2		0.00	mmhos/metre
Channel 3		0.00	mmhos/metre
Channel 4		0.00	mmhos/metre

Apparent Porosity and Water Saturation Constants			
Archie Constant (A)		1.00	
Cementation Exponent (M)		2.00	
Saturation Exponent (N)		2.00	
Saturation of Water for Apor		100.00	percent
Resistivity of Water for Apor and Sw		0.05	ohm-m
Resistivity of Mud Filtrate for Sw		0.00	ohm-m
Source for Rt		0.00	
Source for Rxo		0.00	

High Resolution Temperature Calibration MCG-B 34

Field Calibration on 19-OCT-2009,11:45

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	75.00	75.00

High Resolution Temperature Constants MCG-B 34

Last Edited on

Pre-filter Length	11
-------------------	----

SP Calibration MCG-B 34

Field Calibration on 9-NOV-2009,18:07

	Measured	Calibrated (mV)
Reference 1	107.7	100.0
Reference 2	-93.8	-100.0

Gamma Calibration MCG-B 34

Field Calibration on 01-JAN-2003 00:40

	Measured	Calibrated (API)
Background	51	35
Calibrator (Gross)	1111	760
Calibrator (Net)	1061	725

Gamma Constants MCG-B 34

Last Edited on 01-JAN-2003,05:14

Gamma Calibrator Number	grc38	
Mud Density	1.09	gm/cc
Caliper Source for Processing	Density Caliper	
Tool Position	Eccentred	
Concentration of KCl	0.00	kppm

Caliper Calibration MPD-B 64

Base Calibration on 17-JAN-2011 16:10

Field Calibration on 01-JAN-2003 00:24

Base Calibration		
Reading No	Measured	Calibrator Size (in)
1	14192	4.01
2	22208	5.96
3	30608	7.98
4	39216	9.95
5	48142	11.91
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
6.38	5.98

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	50033	26441	59556	30836
Reference 2	20539	2561	24941	2541

Field Check at Base
1112.6 1367.3

Field Check
1110.2 1367.9

PE Calibration

Base Calibration	WS	Measured		Calibrated Ratio
		WH	Ratio	
Background	200	995		
Reference 1	18927	49861	0.383	0.371
Reference 2	5504	20415	0.273	0.272

Field Check at Base
200.4 995.2

Field Check
200.6 992.5

Density Constants MPD-B 64

Last Edited on 01-JAN-2003,03:42

Density Source Id 254
Nylon Calibrator Number DNCE695
Aluminium Calibrator Number DACD698
Density Shoe Profile 4 inch
Caliper Source for Processing Density Caliper
PE Correction to Density Not Applied
Mud Density 1.09 gm/cc
Mud Density Z/A Multiplier 1.11
Mud Filtrate Density 1.00 gm/cc
Dry Hole Mud Filtrate Density 1.00 gm/cc
DNCT 0.00 gm/cc
CRCT 0.00 gm/cc
Density Z/A Correction Hybrid

Matrix Density (gm/cc)	Depth (ft)
2.71	
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00


DOWNHOLE EQUIPMENT

C:\Users\SSTRIB~1\AppData\Local\Temp\Weatherford PreView\0\Copy of Hund #1-9_001.dta

MCB-A 11B Tension Cablehead
MCB-A 1 LG: 2.18 ft WT: 19.8 lb OD: 2.24 in

Compact Comms Gamma
MCG-B 34 LG: 8.70 ft WT: 63.9 lb OD: 2.24 in

Compact Micro-log
MML-A 9 LG: 7.97 ft WT: 81.6 lb OD: 2.24 in

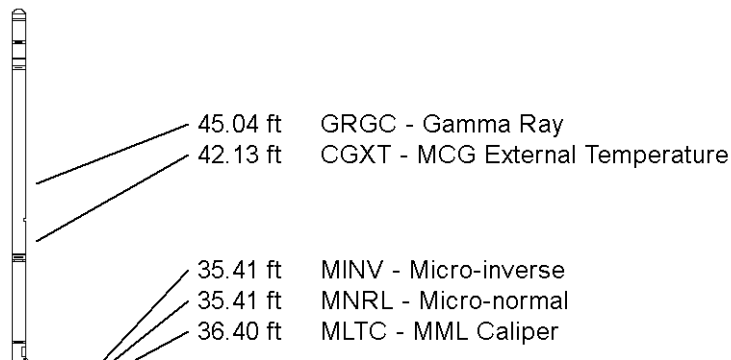

Compact Neutron
MDN-A.B 65 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in


Compact Density/Caliper
MPD-B 64 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

SKJ-D.A Compact Knuckle Joint
SKJ-D.A 37 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

Compact Focused Electric
MFE-A.A 55 LG: 6.05 ft WT: 48.5 lb OD: 2.24 in

Compact Induction
MAI-A.A 178 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 52.50 ft Weight: 427.7 lb

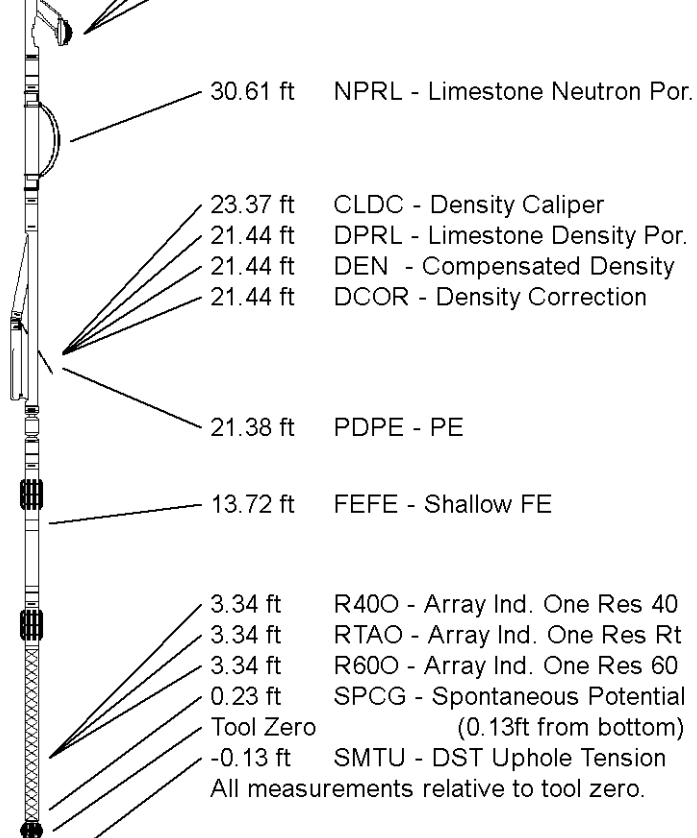

COMPANY	GRAND MESA OPERATING COMPANY
WELL	HUND #1-9
FIELD	WILDCAT
PROVINCE/COUNTY	GOVE
COUNTRY/STATE	U.S.A./KANSAS

Elevation Kelly Bushing	2951.00	feet	First Reading	4667.00	feet
Elevation Drill Floor	2950.00	feet	Depth Driller	4690.00	feet
Elevation Ground Level	2946.00	feet	Depth Logger	4688.00	feet



COMPACT PHOTO DENSITY
COMPENSATED NEUTRON
MICRORESISTIVITY LOG

