


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 800 Biting Building
 Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
 when reporting plug-
 ging off formations.

Rooks County, Sec. 6 Twp. 6S Rge. (E) 20 (W)
 Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines 990' East & 330' South of NW Cor
 Lease Owner. Cities Service Oil Company
 Lease Name. Burge Well No. 2
 Office Address. Bartlesville, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
 Date well completed. June 23, 1944
 Application for plugging filed. Aug. 7, 1945
 Application for plugging approved. Aug. 7, 1945
 Plugging commenced. Aug. 7, 1945
 Plugging completed. Aug. 10, 1945
 Reason for abandonment of well or producing formation. Dry

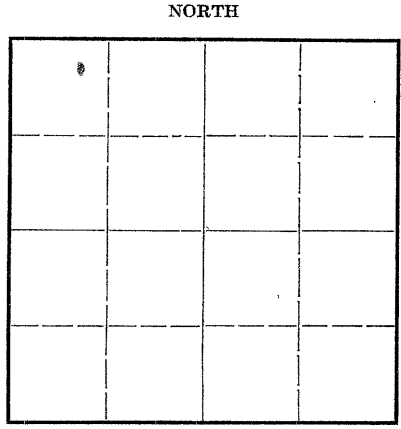

Locate well correctly on above
 Section Plat

If a producing well is abandoned, date of last production. 19.
 Was permission obtained from the Conservation Division or its agents before plugging was com-
 menced? Yes

Name of Conservation Agent who supervised plugging of this well. Herb. Kerr
 Producing formation. Reagan Depth to top. 3562' Bottom. Total Depth of Well. 3579 Feet
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Reagan	Dry			8 5/8"	167'	None
				5 1/2"	3585'	1283'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.
 Dumped 5 sacks cement 3579-3537', filled with rotary mud to 170', dumped 20 sacks cement, rotary mud to 35'. Dumped 10 sacks cement. Mud and dirt to surface.

PLUGGING
 FILE REC. 6-6-R 20W
 BOOK PAGE 22 LINE 2

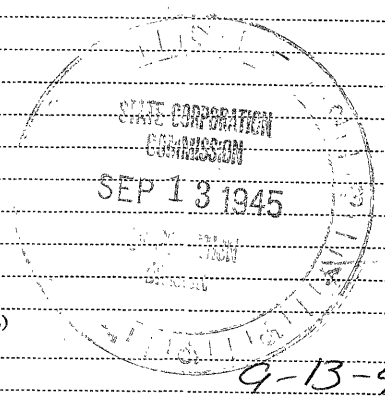

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. R.C. Hauber
 Address. Cities Service Oil Company, Great Bend, Kansas

9-13-45

STATE OF Kansas, COUNTY OF Barton, ss.
 J.A. Cleverley (employee of owner) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.A. Cleverley
 Cities Service Oil Company, Russell, Kansas
 (Address)

SUBSCRIBED AND SWORN TO before me this 10th day of September 1945
 W.G. Smith Notary Public.

My commission expires. Mch 12-1947

15-163-02442-00-00



CITIES SERVICE OIL COMPANY

PRODUCERS-REFINERS-MARKETERS OF PETROLEUM PRODUCTS

Great Bend, Kansas
September 12, 1945

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

Gentlemen:

Attached is Well Plugging Record covering
our Burge Well No. 2, Section 6-6S-20W, Rooks County,
Kansas.

Yours very truly,

CITIES SERVICE OIL COMPANY

R. C. Hauber

MD:
Attach.

