



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-195-22701-00-00	Company Bowman Oil Company		
	Well Newman SE 18 No. 5		
Location	County	Trego	State Kansas
	NW - SE - SW - SE 350' FSL & 1846' FEL		
Sec: 18	Twp: 11 S	Rge: 24 W	Other Services CNL/CDL DIL
Permanent Datum	Ground Level	Elevation 2443	Elevation
Log Measured From	Kelly Bushing	8 Ft. Above Perm. Datum	K.B. 2451
Drilling Measured From	Kelly Bushing		D.F. 2443
Date	3/16/2011		
Run Number	Two		
Depth Driller	4410		
Depth Logger	4402		
Bottom Logged Interval	4401		
Top Log Interval	3500		
Casing Driller	8.625 @ 221		
Casing Logger	222		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3000		
Density / Viscosity	9.3 33		
pH / Fluid Loss	8.5 10.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.50 @ 60		
Rmf @ Meas. Temp	1.13 @ 60		
Rmc @ Meas. Temp	2.03 @ 60		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.75 @ 120		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	120		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Tony Richardson		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Wakeeney, Ks; West on I-70 to Voda Rd;
3 North to F Rd; 1 West; 3 North
1/3 East; South for 3/4mi to location

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

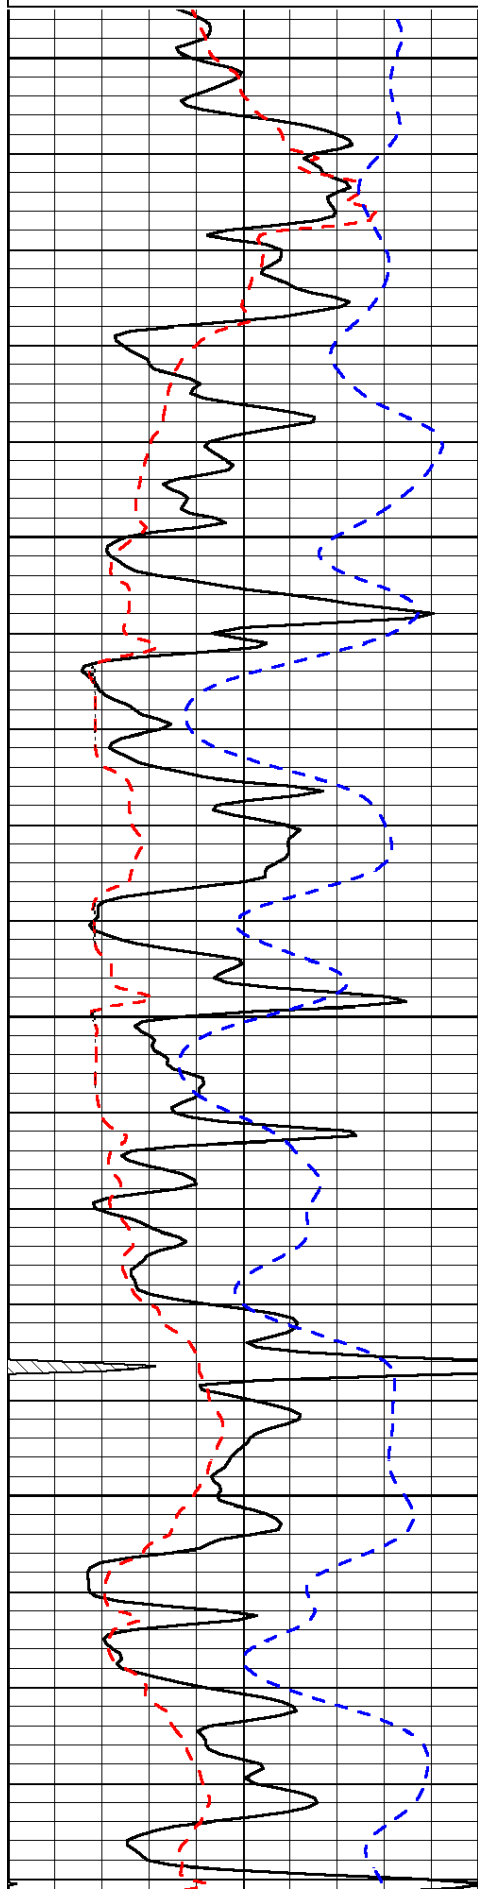


3500

3550

3600

3650

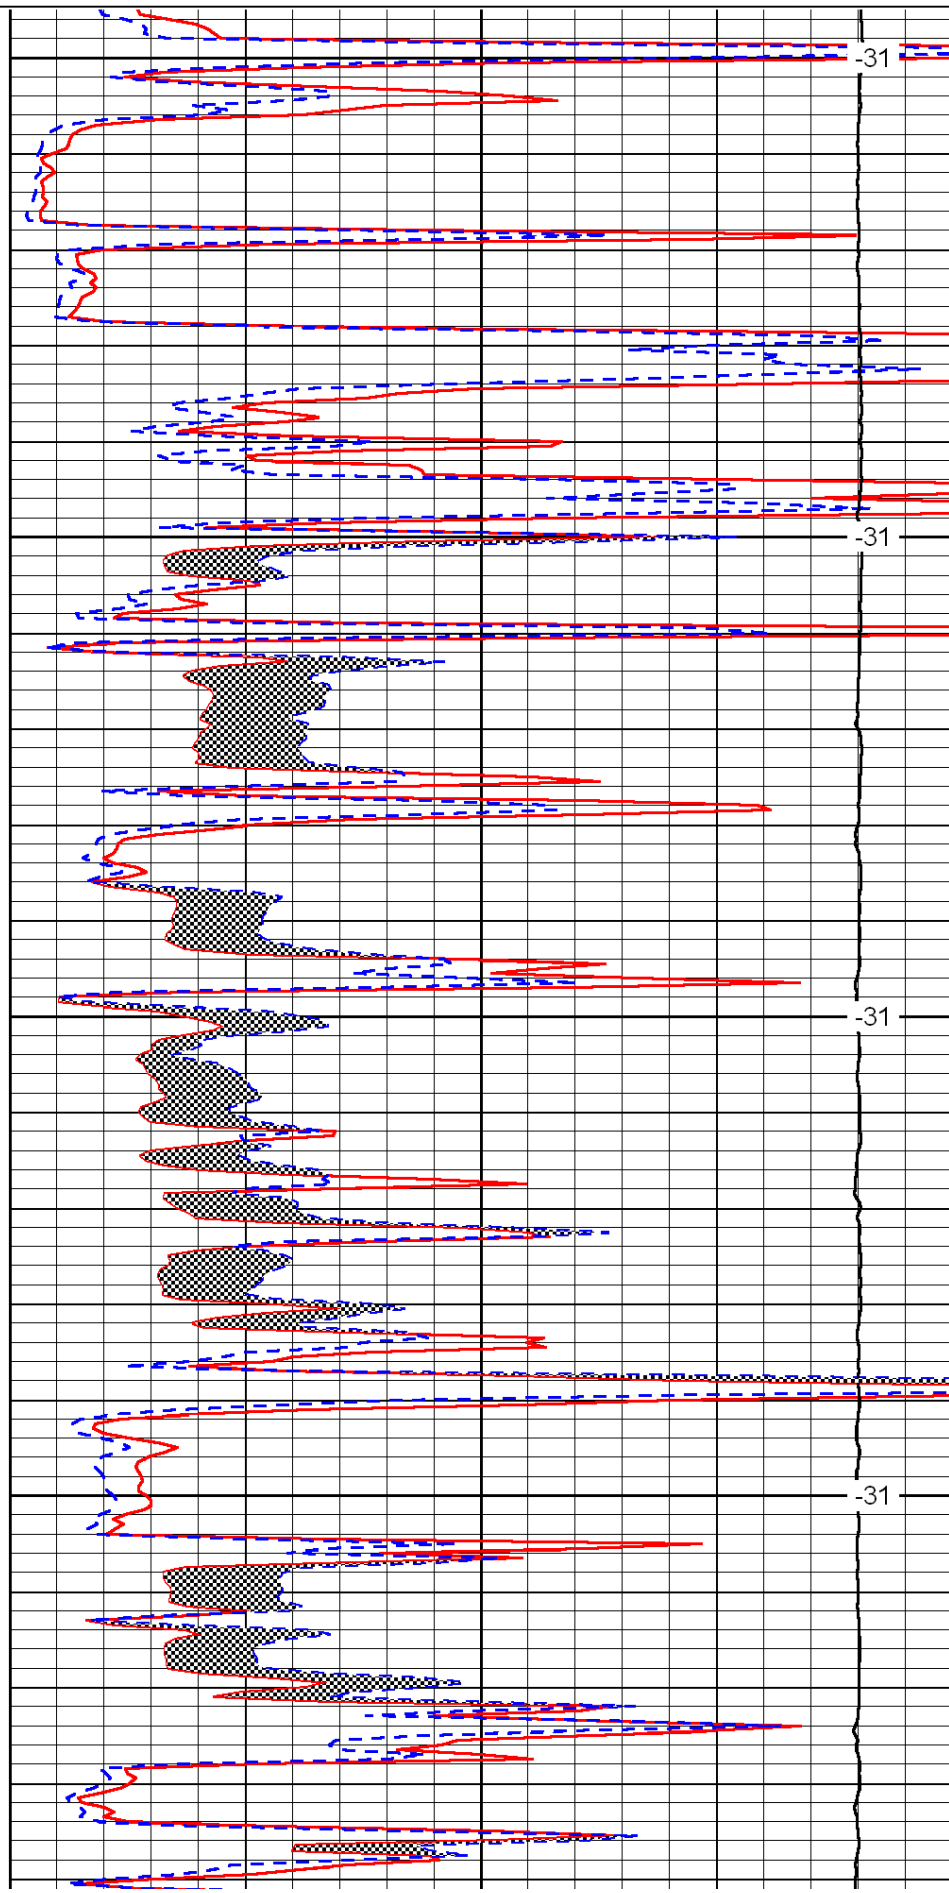


-31

-31

-31

-31

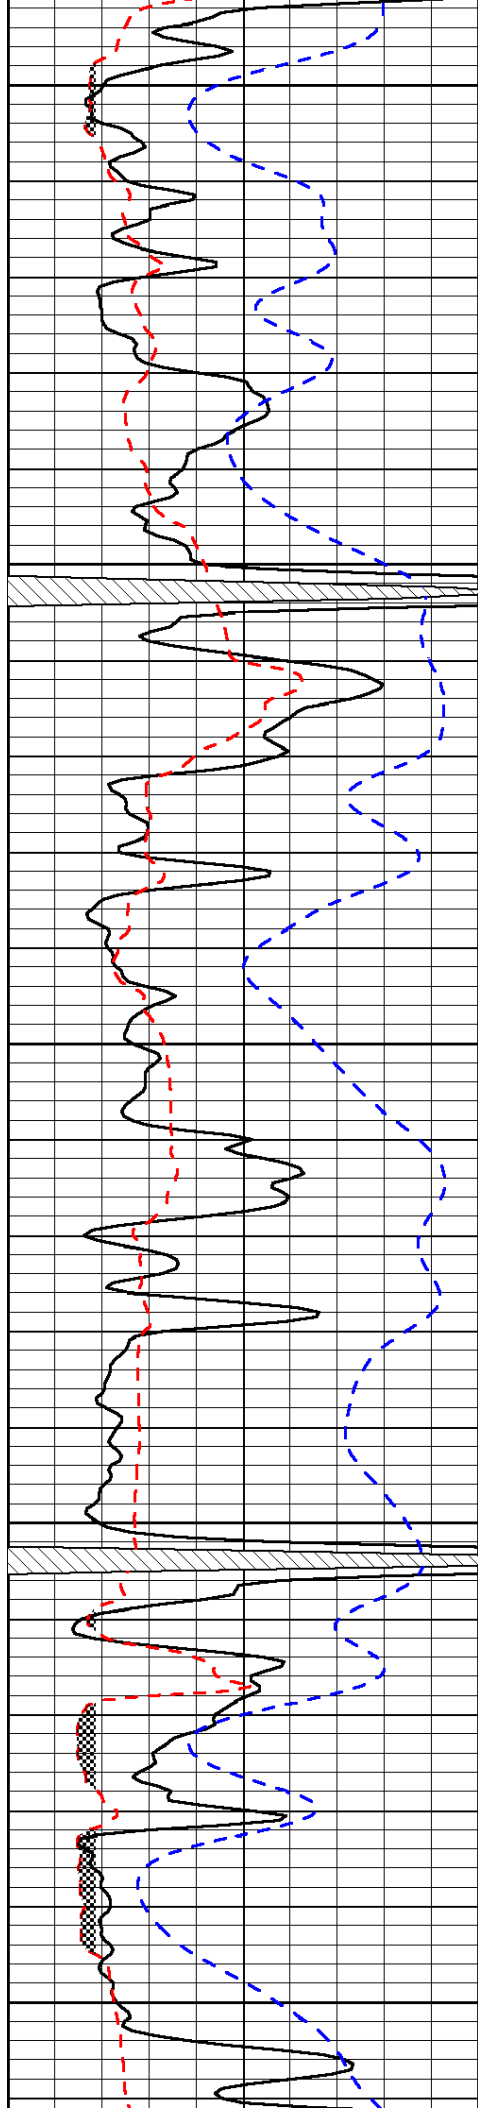


3700

3750

3800

3850

3900

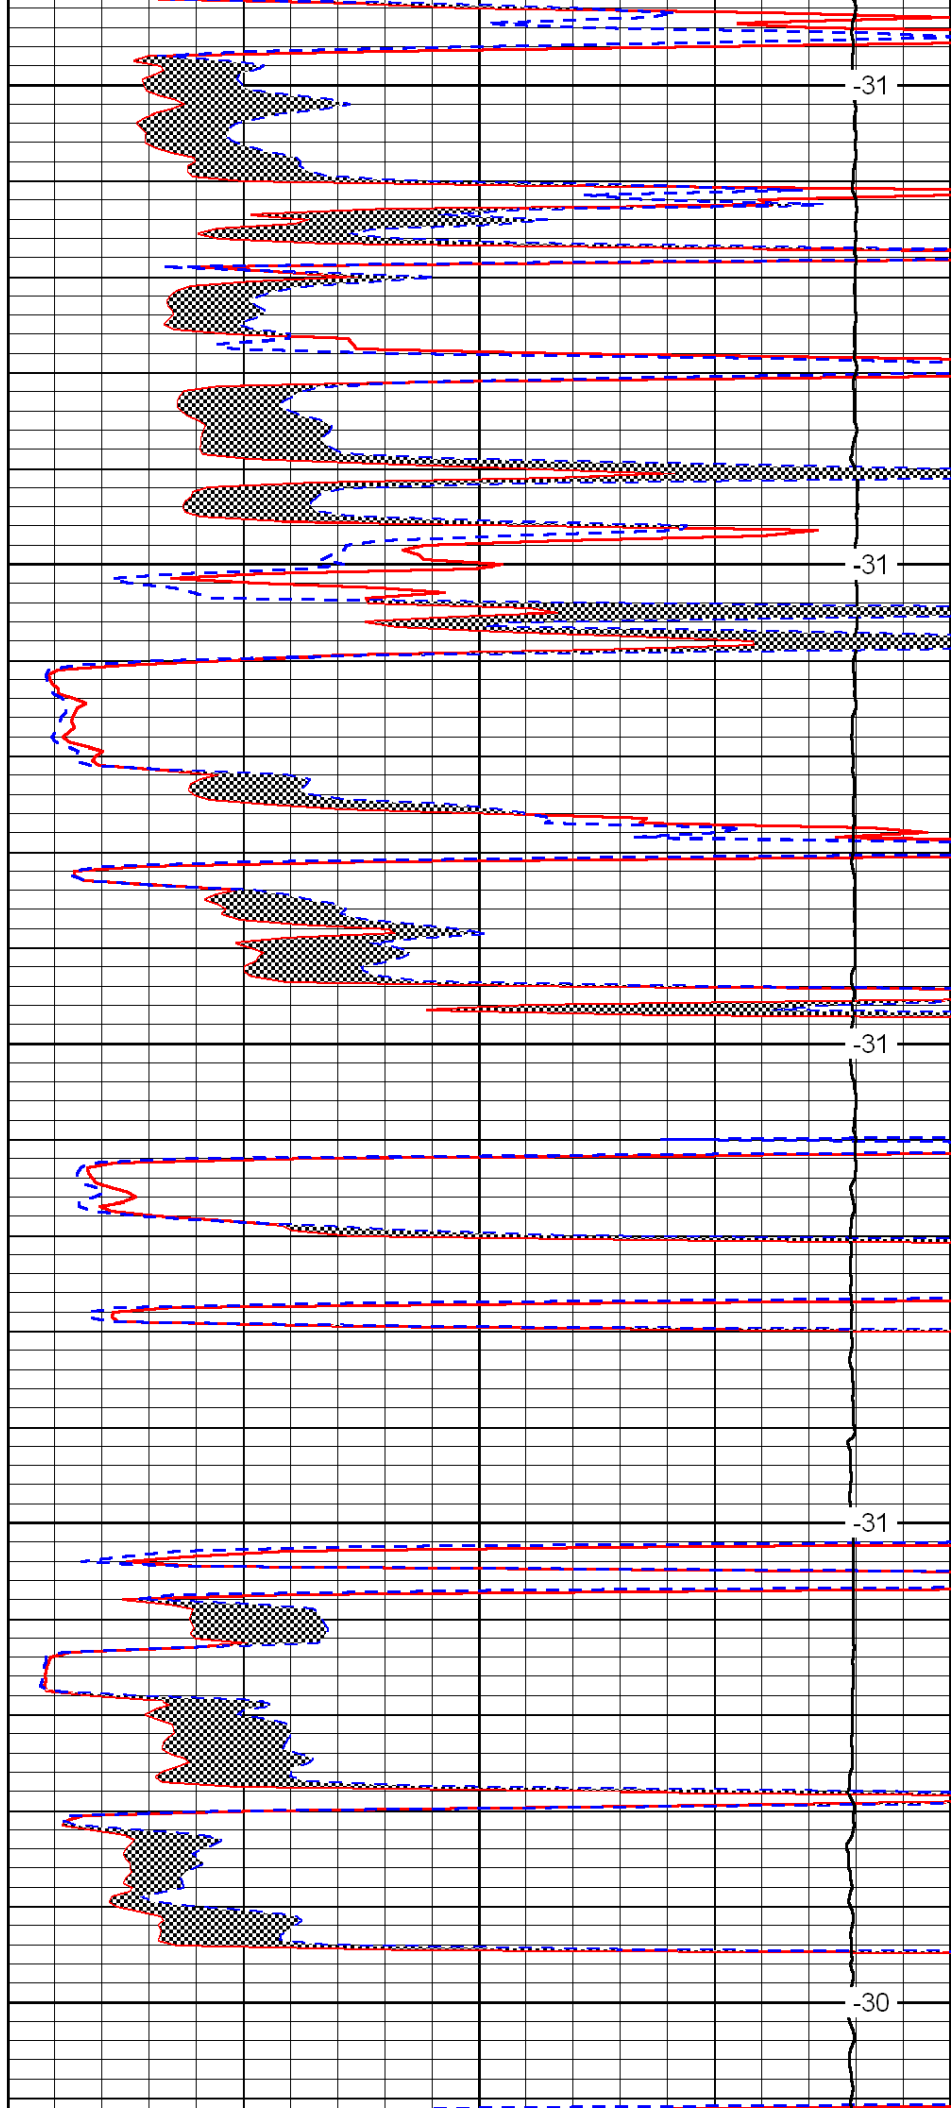


-31

-31

-31

-31

-30

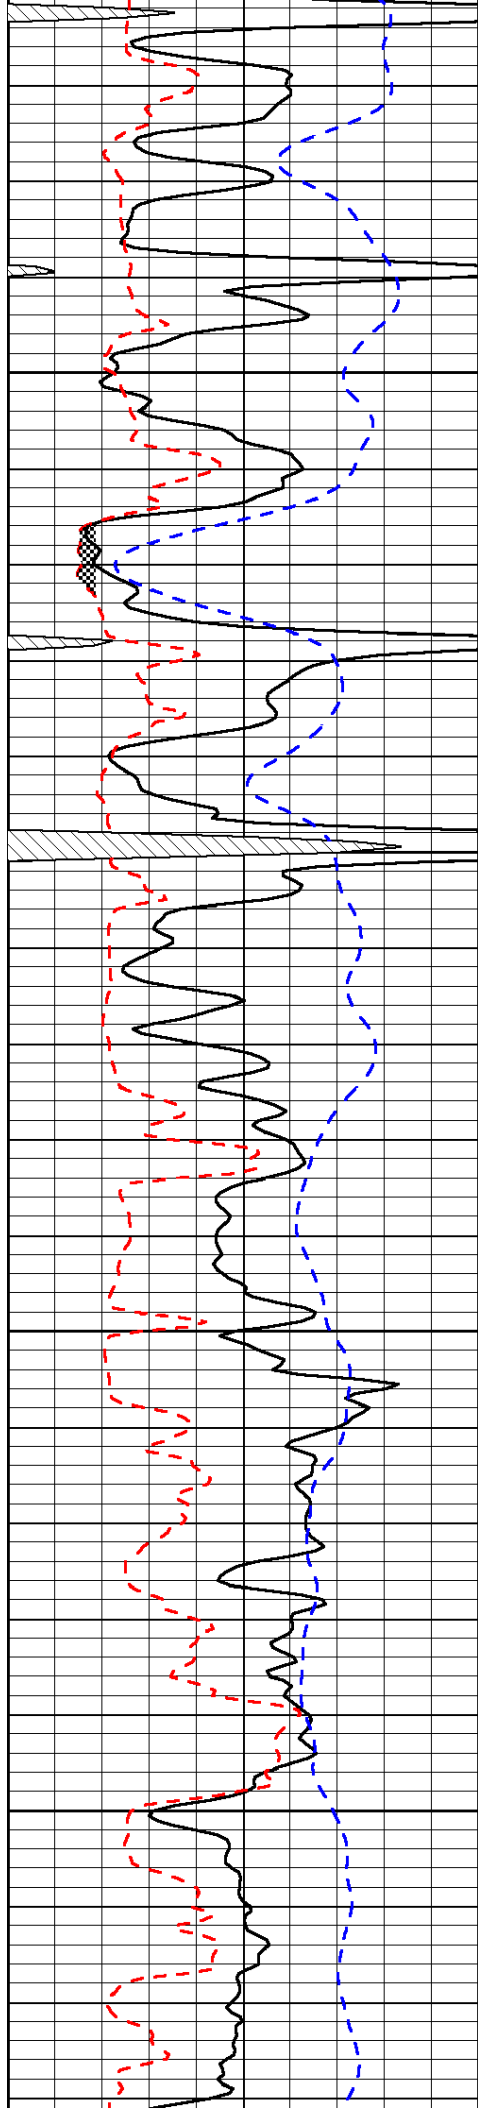



3950

4000

4050

4100

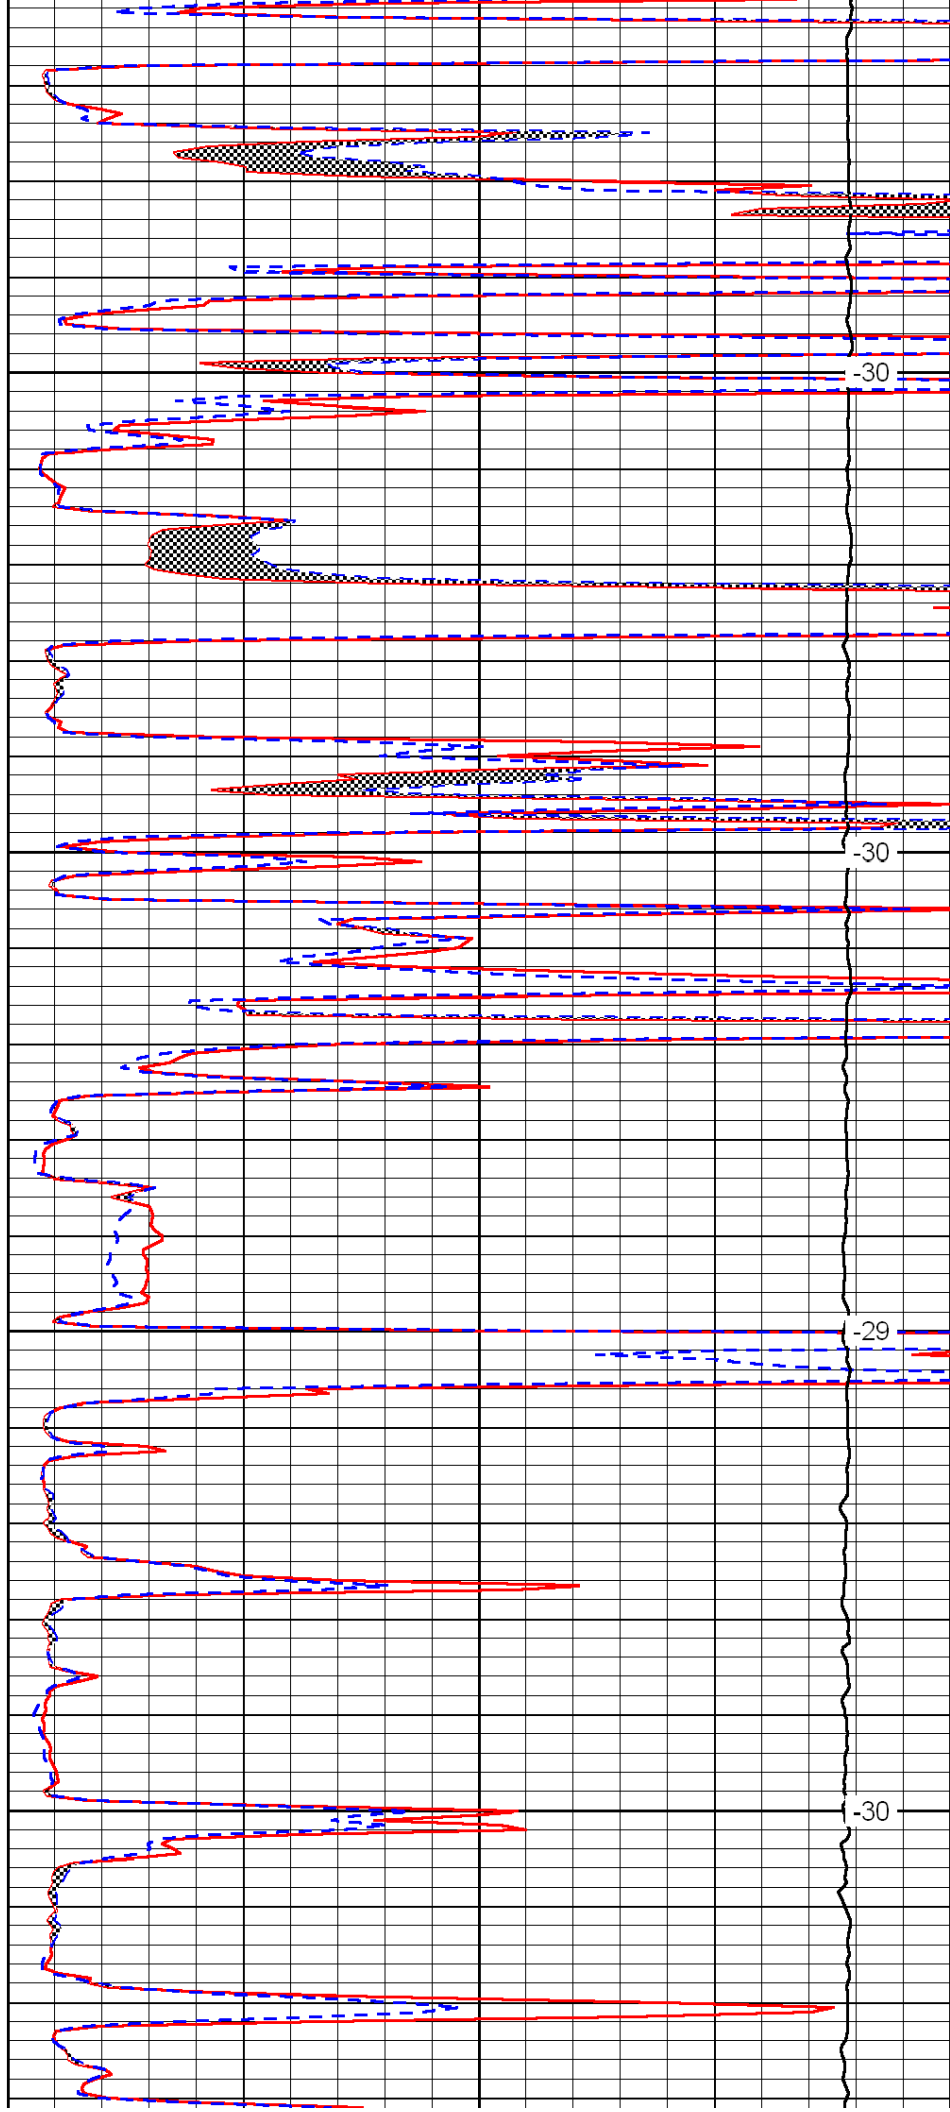

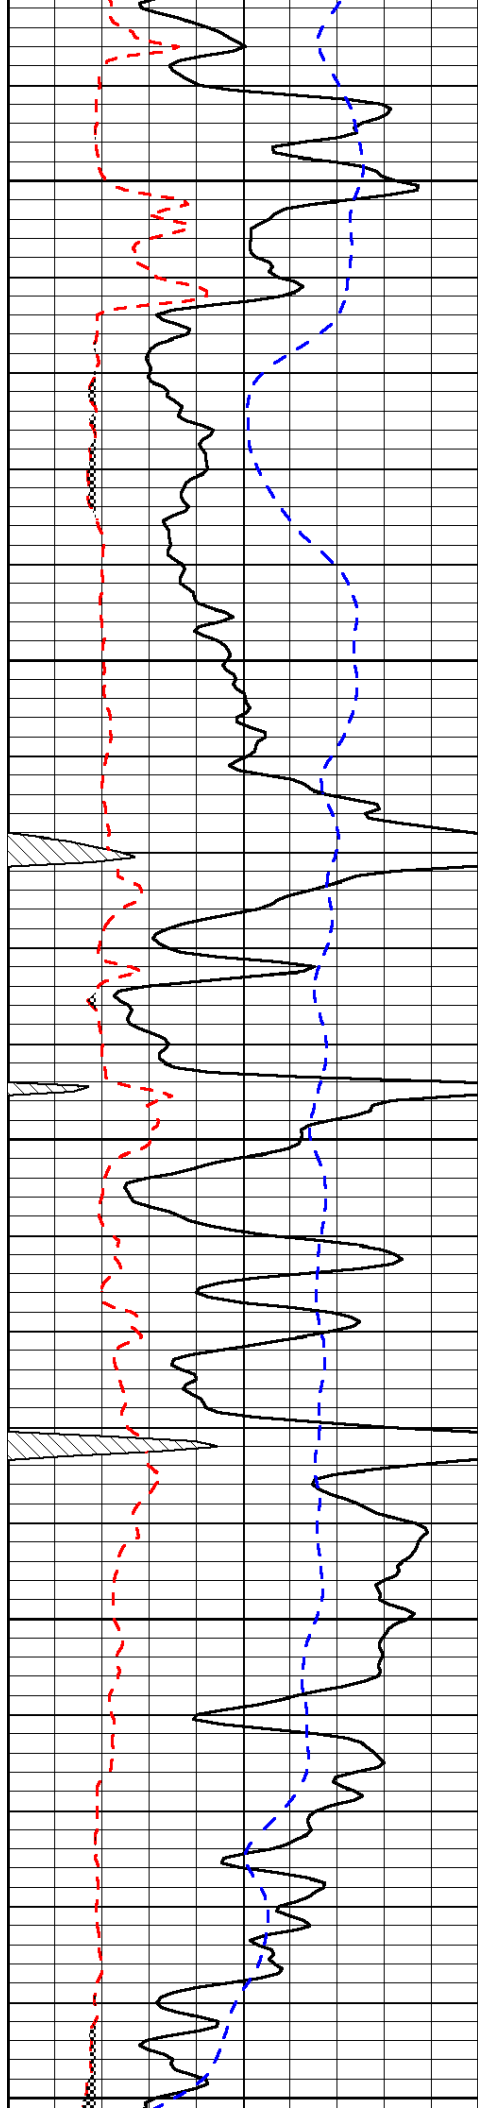


4150

4200

4250

4300

4350

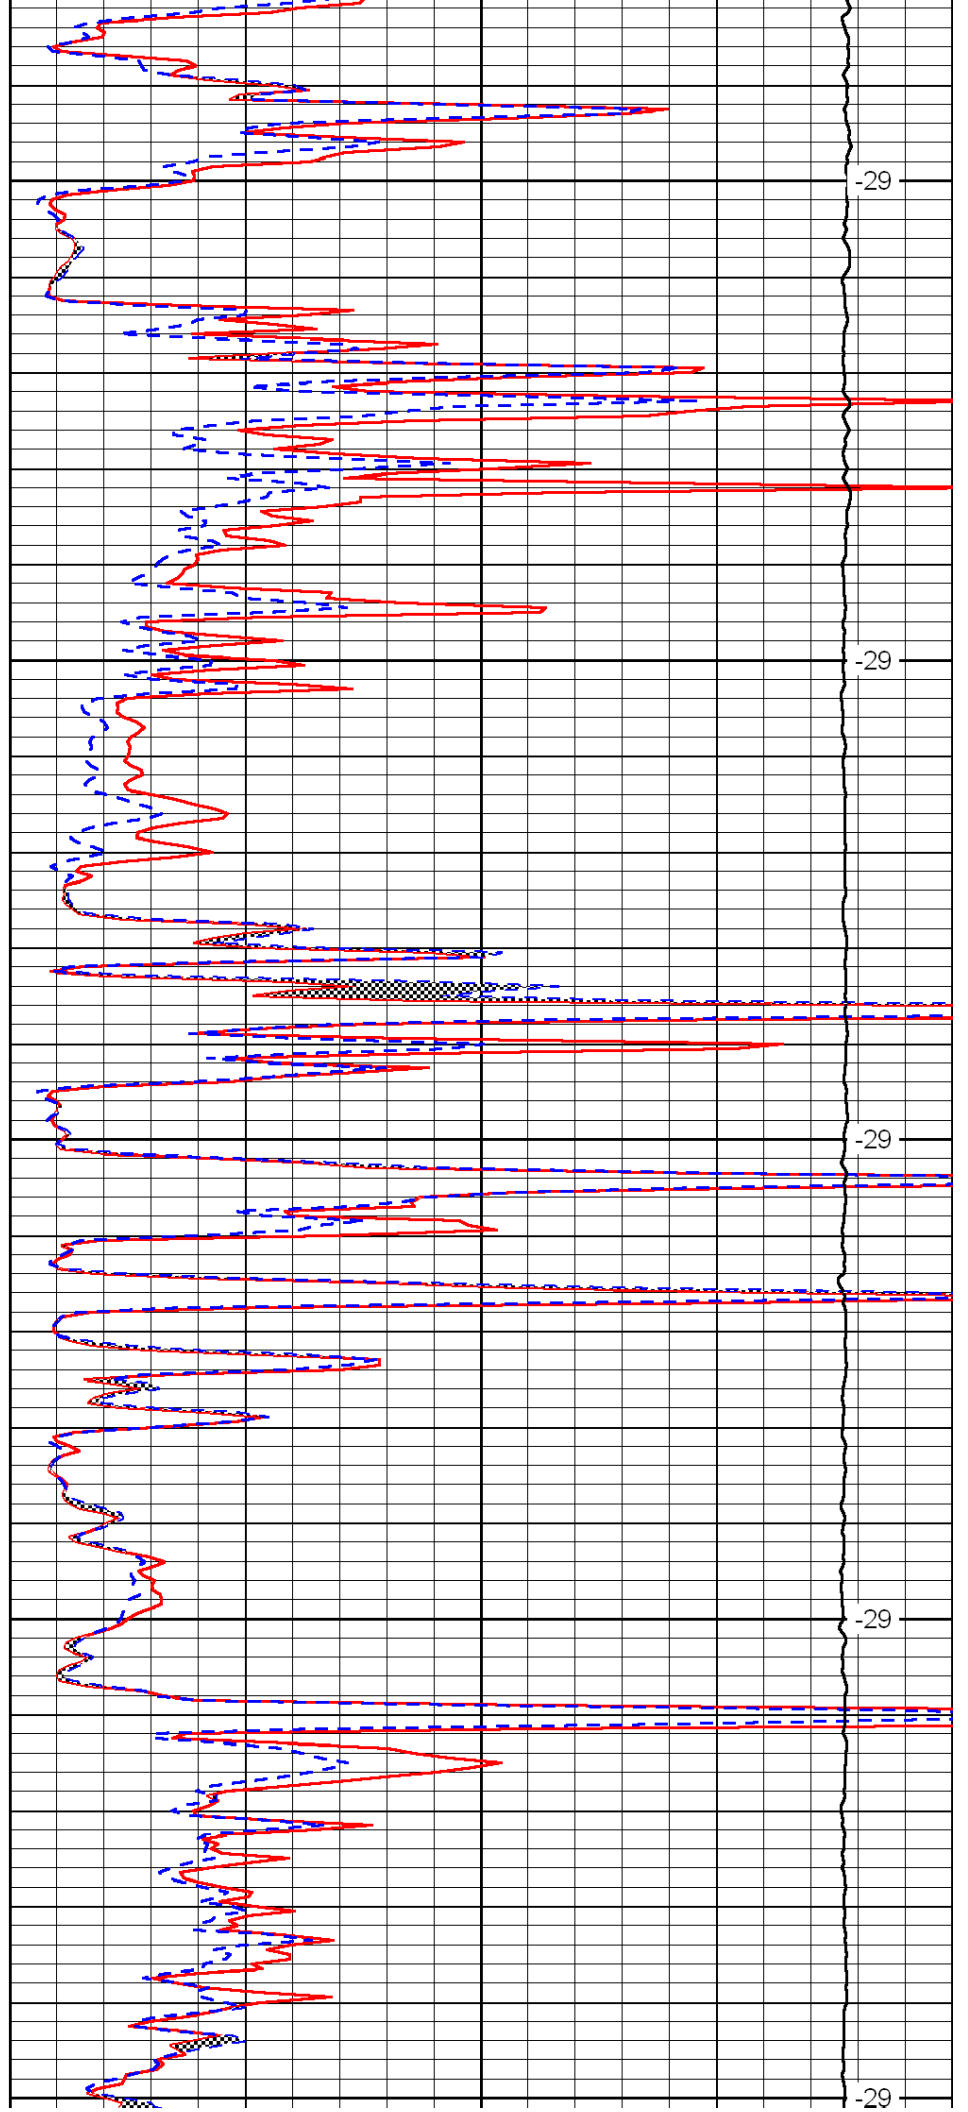


-29

-29


-29

-29

-29

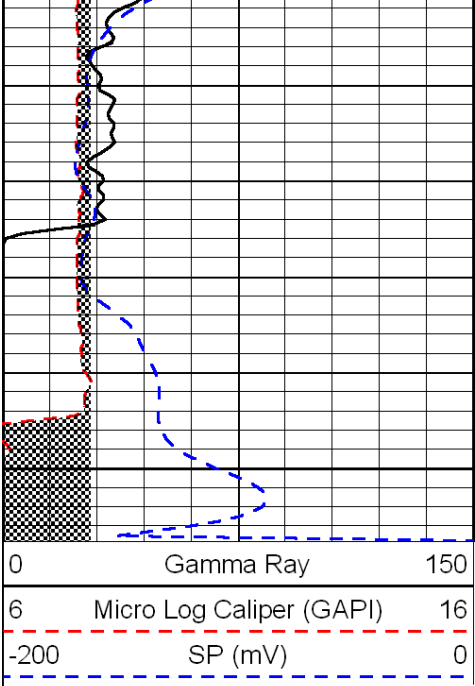

4400

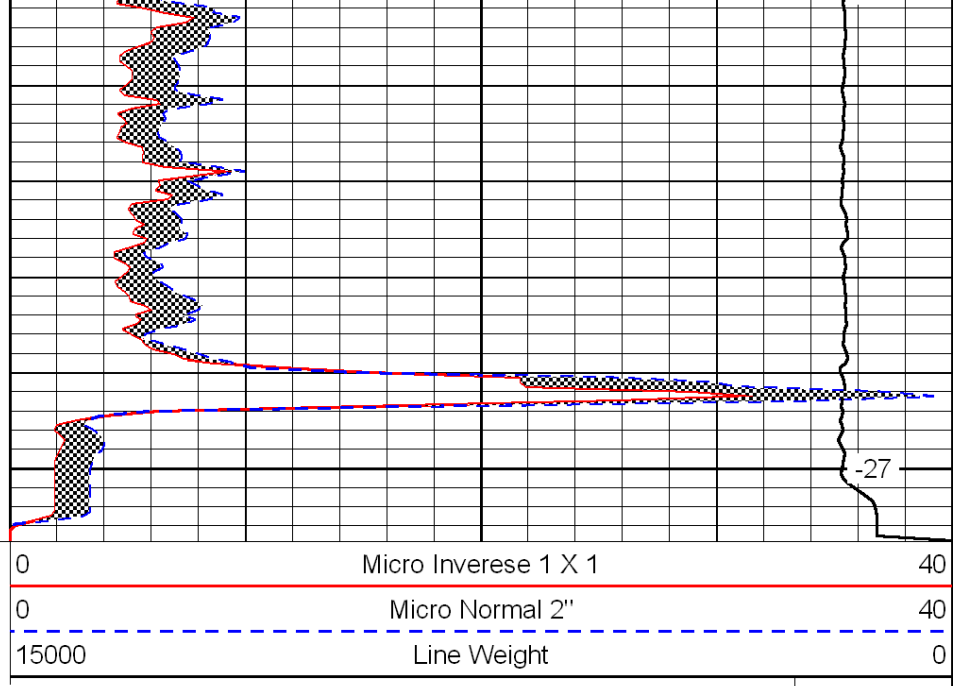

-27

LSPD