


15-163-00799-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

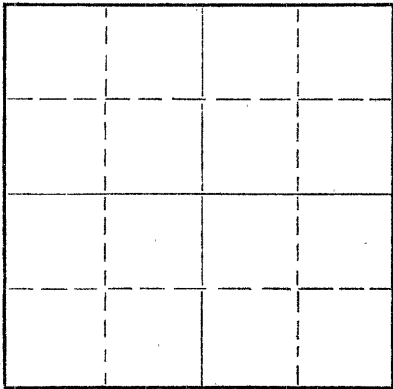

Locate well correctly on above
Section Plat

Rooks County. Sec. 5 Twp. 6S Rge. 20 (W)
Location as "NE/CNW/SW" or footage from lines A/C SW/4 NE/4 SE/4
Lease Owner Barnett Oil Company
Lease Name Nichol Well No. 1
Office Address 411 First National Bank Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 4, 19 60
Application for plugging filed March 4, 19 60
Application for plugging approved March 4, 19 60
Plugging commenced March 4, 19 60
Plugging completed March 4, 19 60
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Depth to top Bottom Total Depth of Well 3640 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	193'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 500' with mud; spotted 20 sacks of cement through drill pipe; filled hole to 180' with mud; pushed plug to 180' with 1/2 sack of hulls on top and 15 sacks of cement; filled hole to 40' with mud; pushed plug to 40' and put 1/2 sack of hulls on top and filled hole to bottom of cellar with 10 sacks of cement.
Plugged rate hole with 2 sacks of cement.

(Well Log attached)

RECEIVED
STATE CORPORATION COMMISSION
MAR 14 1960
CONSERVATION DIVISION
Wichita, Kansas

3-14-60

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.
Address 409 First National Bank Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
F. H. Rousey (employee of owner) or (owner) or (operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. H. Rousey
411 First Nat'l Bank Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 11th day of March, 1960

My commission expires February 27, 1964.

Mildred J. Willis
Notary Public.

