



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.

15-163-23,932-00-00

Company American Warrior, Inc.

Well Fedel No. 1-30

Field Baumgarten

County Rocks State

Kansas

Location 1830' FSL & 350' FWL

Other Services
CNL/CDL
DIL/BHCS

Sec: 30

Twp: 9 S

Rge: 18 W

Elevation

Permanent Datum Ground Level

Log Measured From Kelly Bushing

Elevation 2191
K.B. 2199
D.F. 2191
G.L. 2191

Drilling Measured From Kelly Bushing

Date

3/14/2011

Run Number

Two

Depth Driller

3700

Depth Logger

3700

Bottom Logged Interval

3699

Top Log Interval

3000

Casing Driller

8.625 @ 225

Casing Logger

222

Bit Size

7.875

Type Fluid in Hole

Chemical

Salinity, ppm CL

3.000

Density / Viscosity

9.2 @ 58

pH / Fluid Loss

9.5 @ 8.0

Source of Sample

Flowline

Rm @ Meas. Temp

.85 @ 55

Rmf @ Meas. Temp

.71 @ 55

Rmc @ Meas. Temp

1.28 @ 55

Source of Rmf / Rmc

Charts

Rm @ BHT

.45 @ 115

Operating Rig Time

4 1/2 Hours

Max Rec. Temp. F

115

Equipment Number

4

Location

Hays

Recorded By

K. Bange

Witnessed By

Marc Downing

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Plainville, 4 W to 13 rd, 3/4 N, E into

Database File: c:\warrior\data\amwar_fedel no. 1-30\awar031411hd.db
Dataset Pathname: dil/aw2in
Presentation Format: micro
Dataset Creation: Mon Mar 14 07:58:21 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

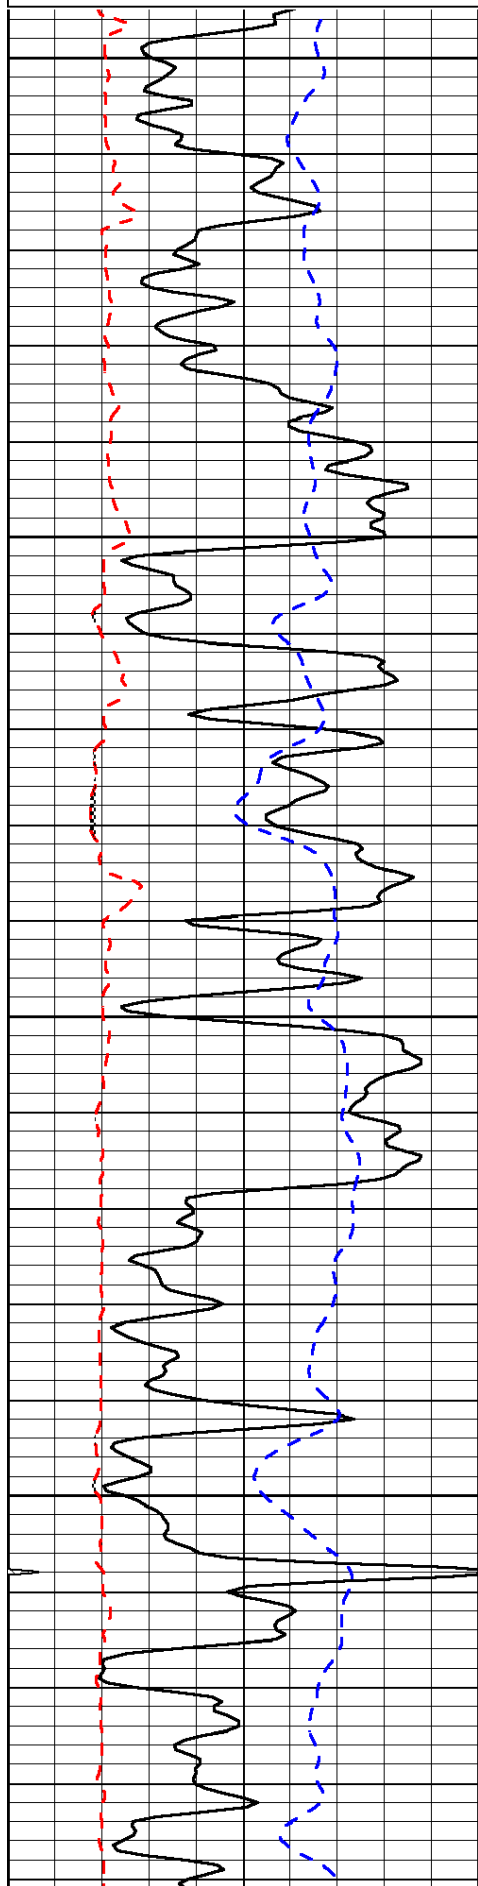


3000

3050

3100

3150

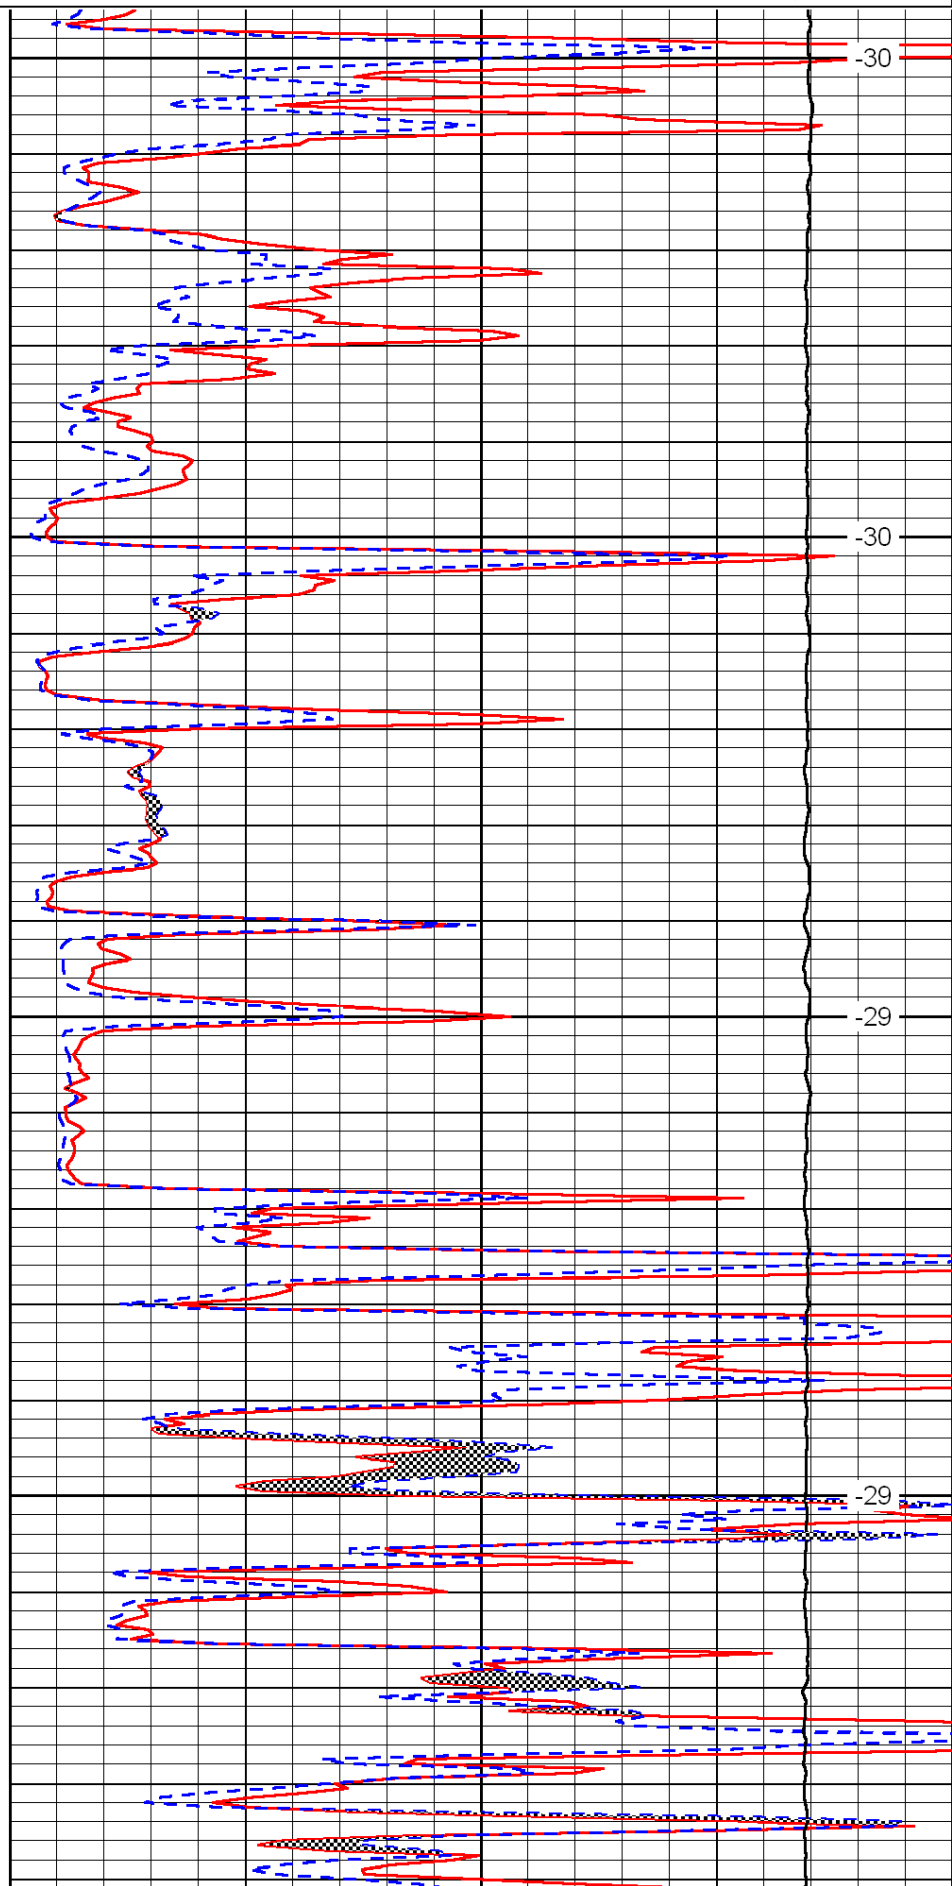


-30

-30

-29

-29

LSPD

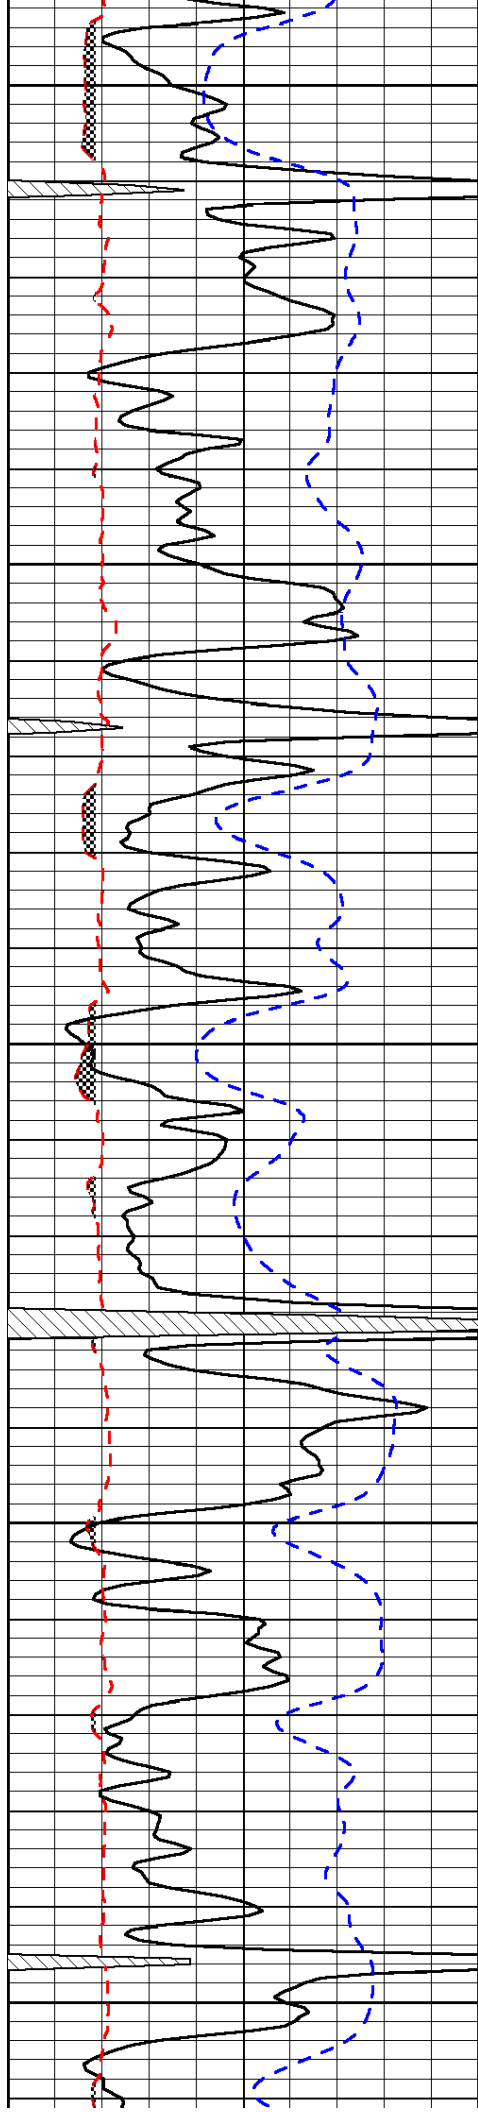


3200

3250

3300

3350

3400

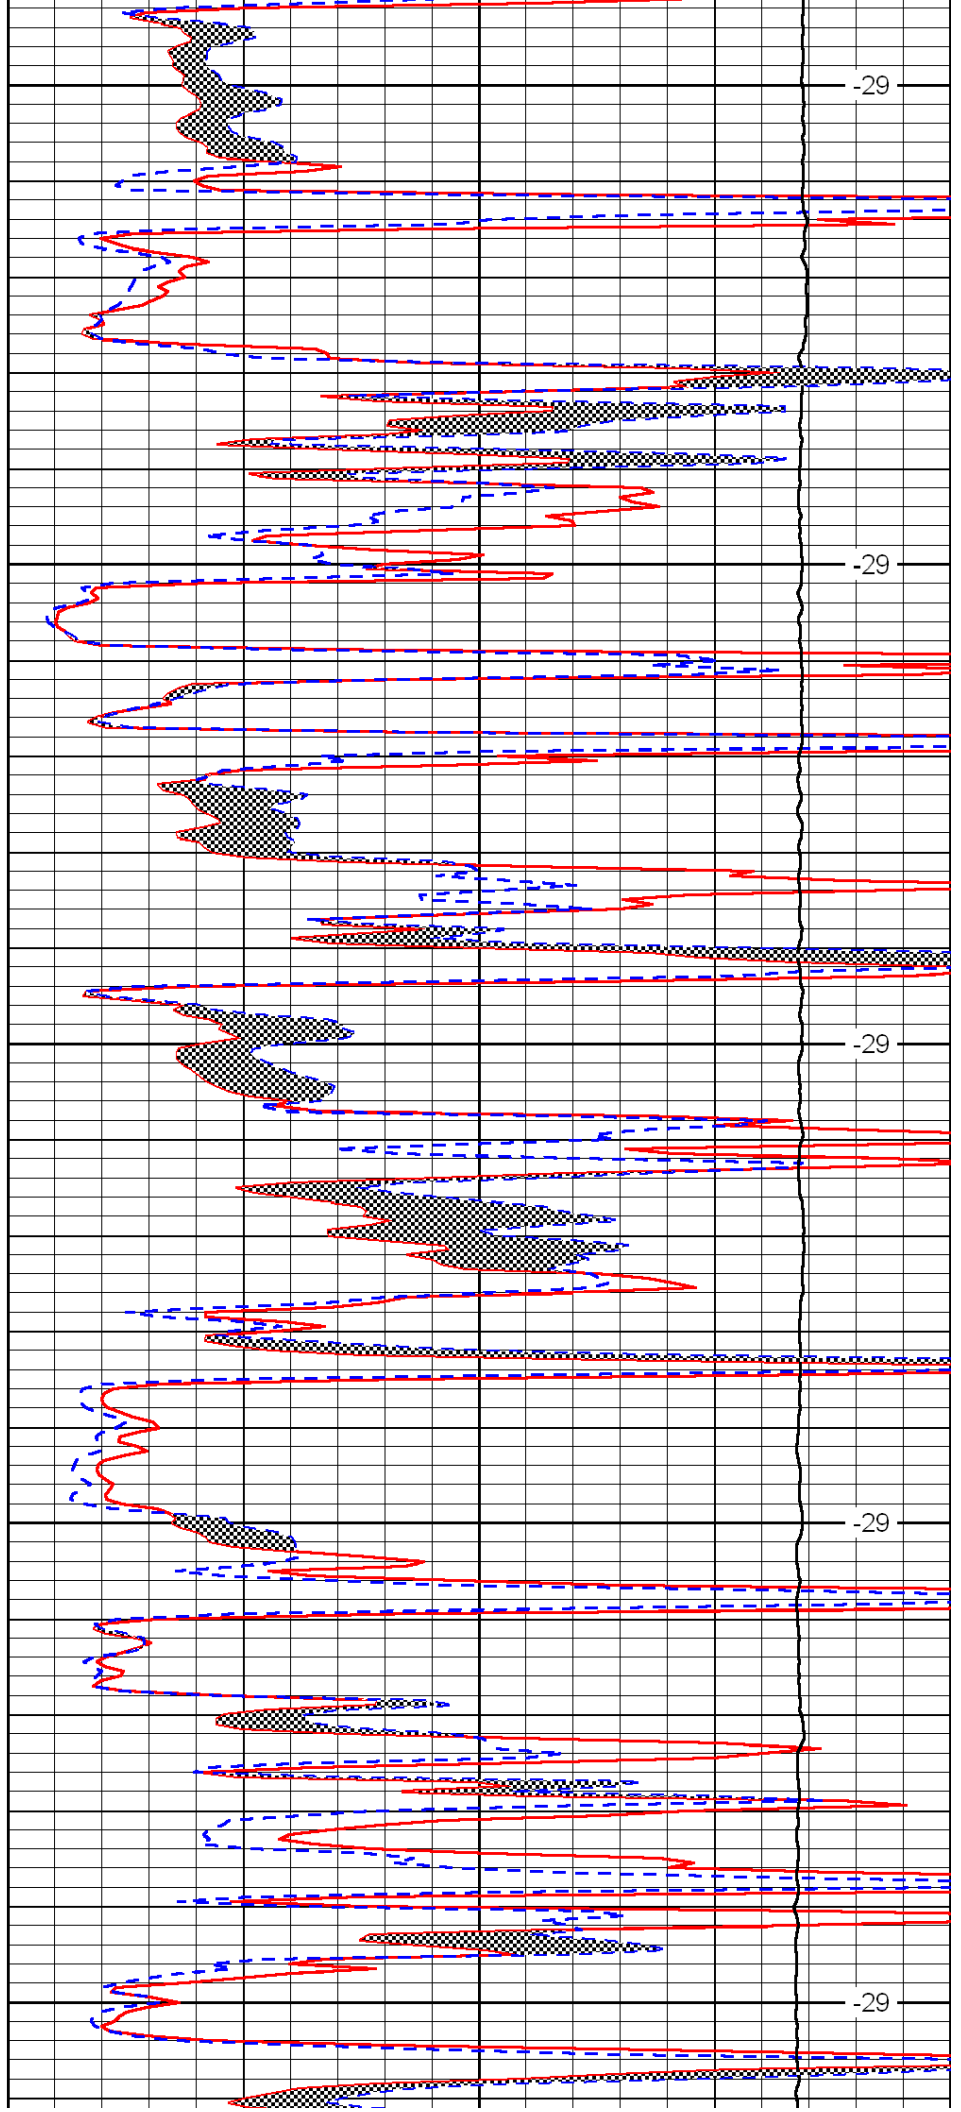


-29

-29

-29

-29

-29

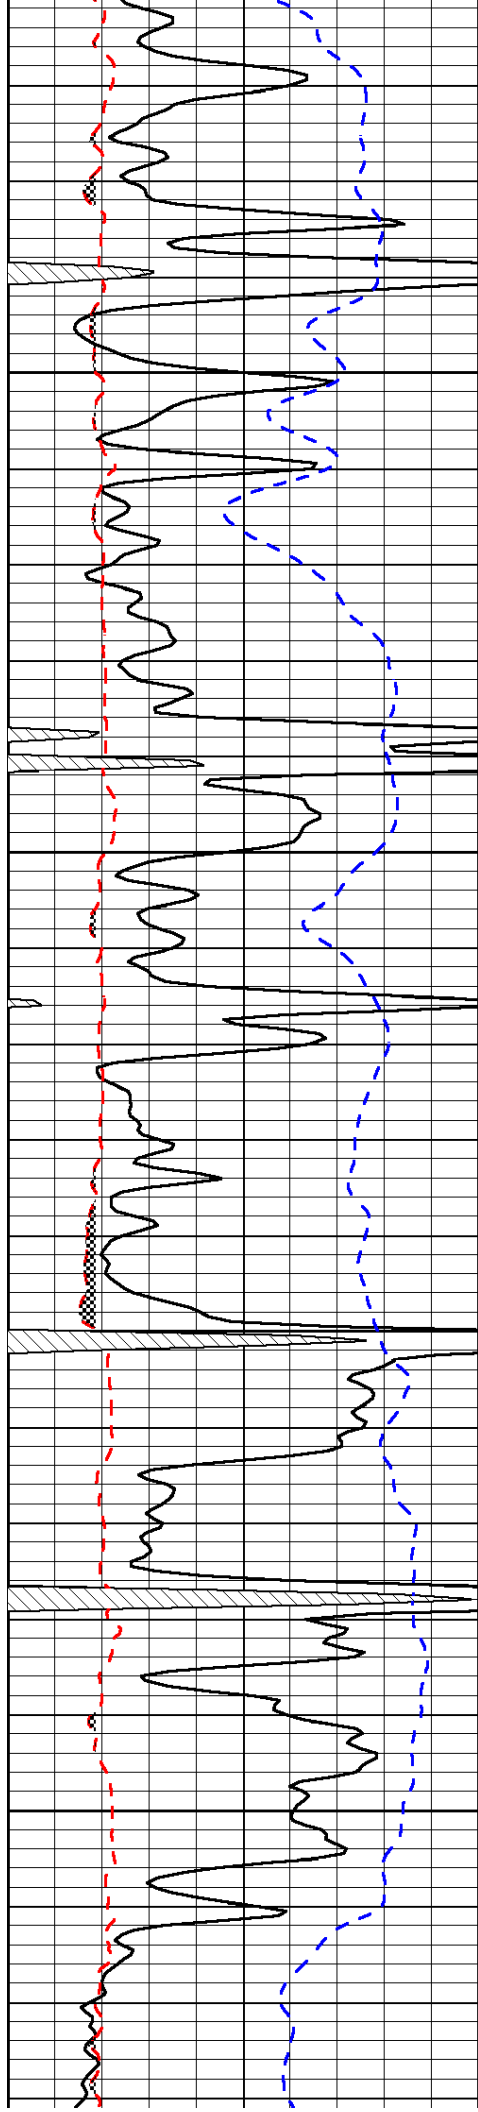



3450

3500

3550


3600

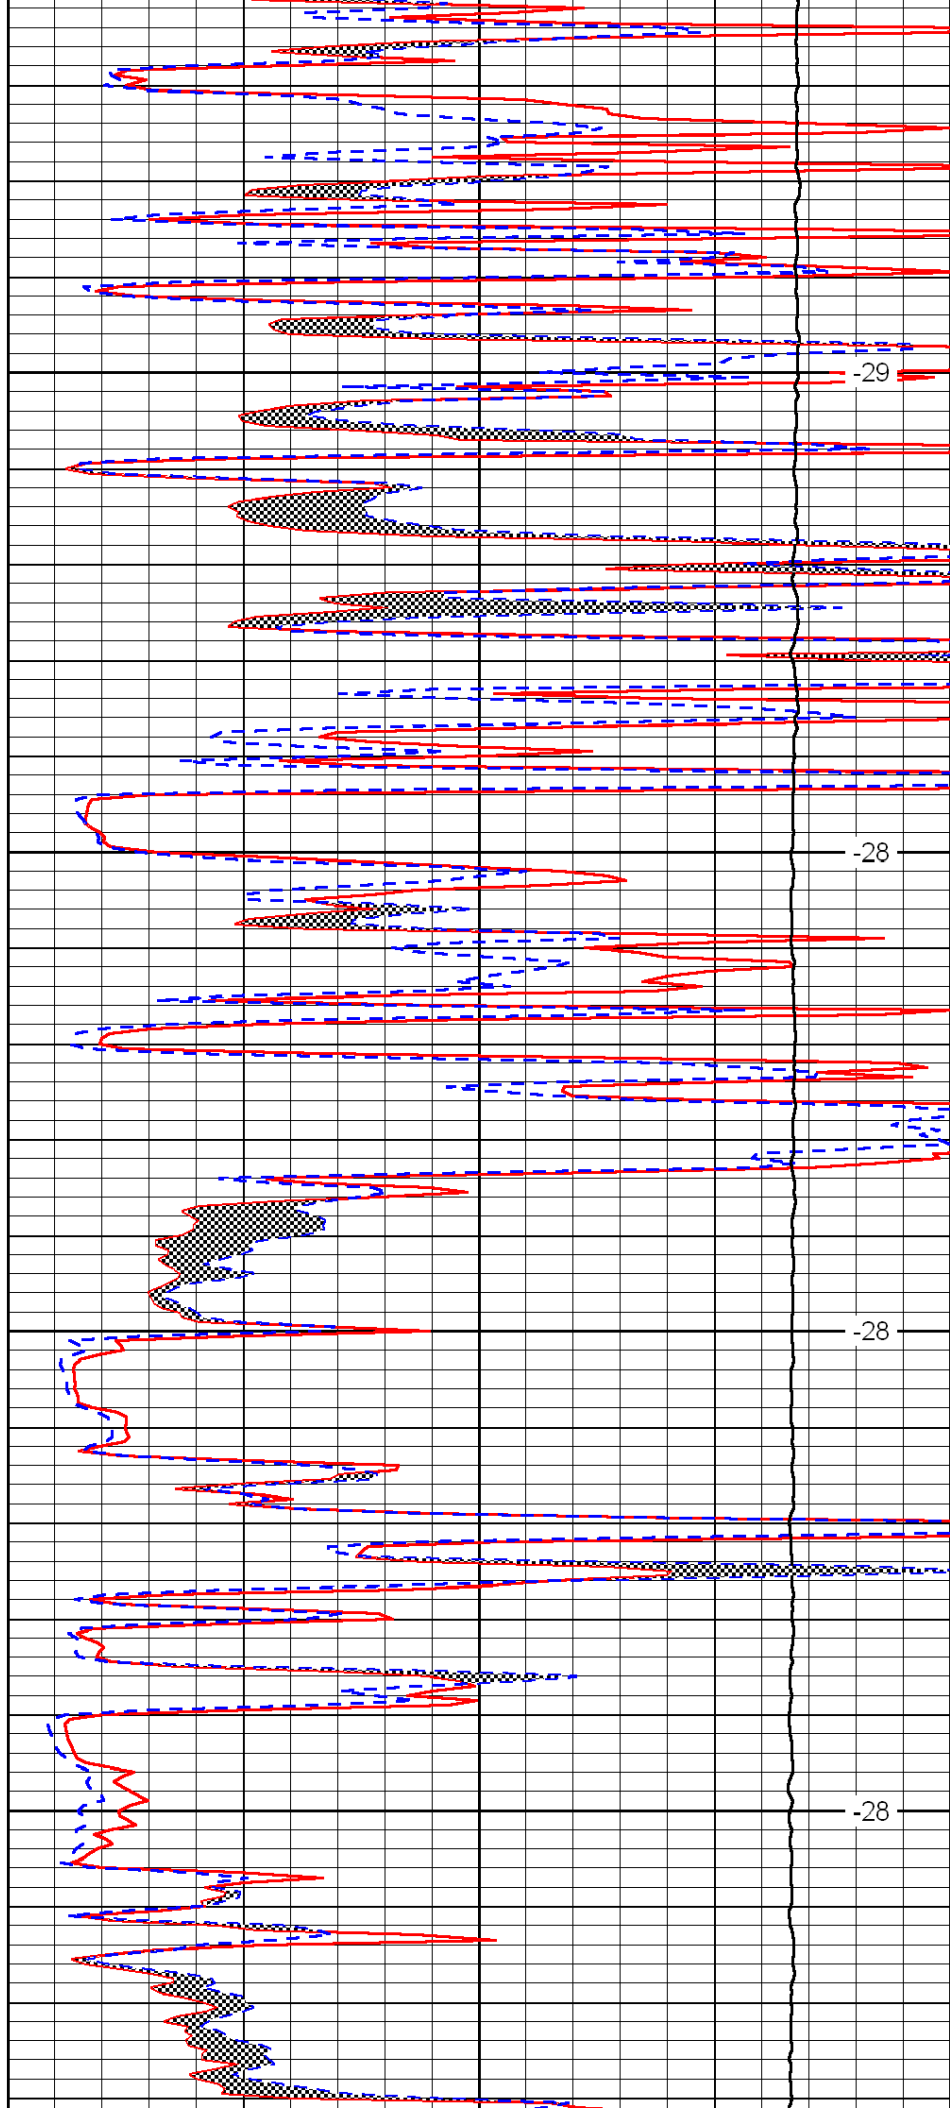

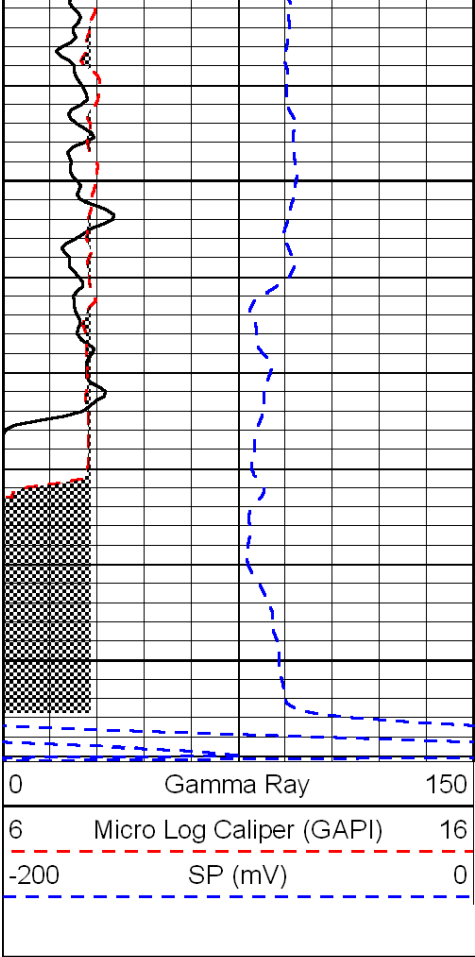

3650

3700

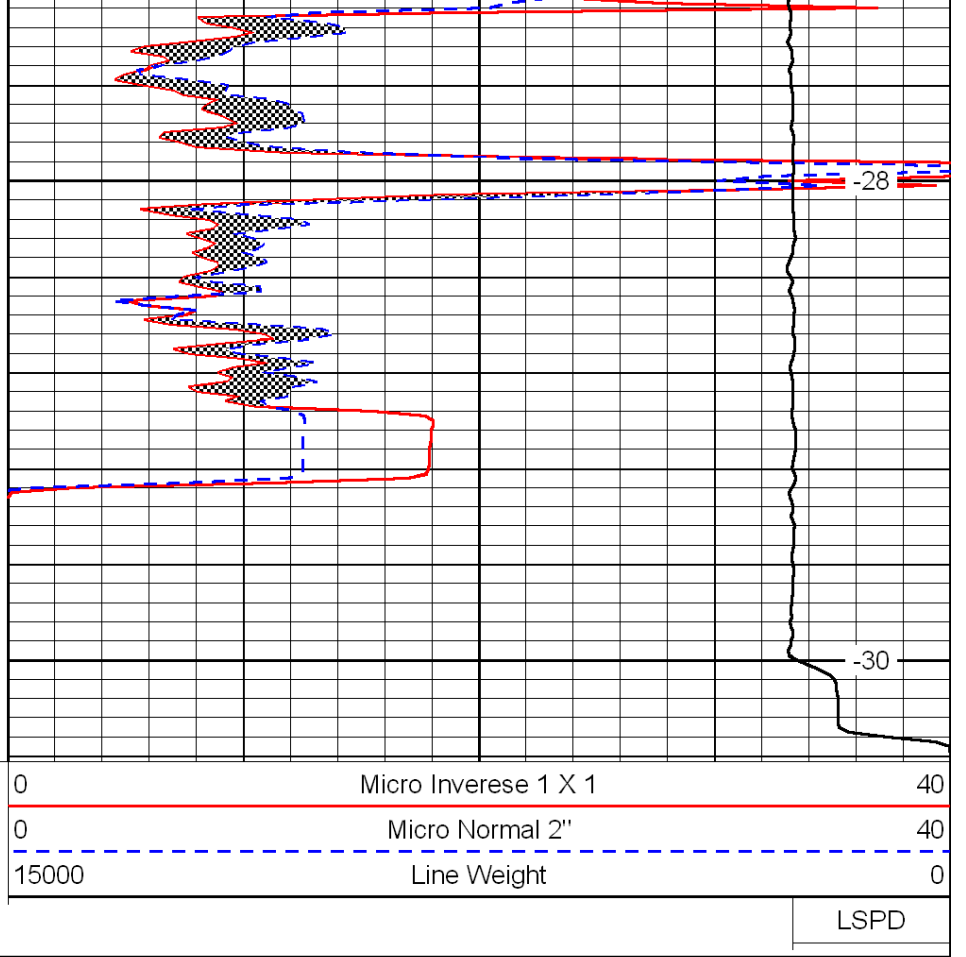

-28

-30

LSPD