



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Falcon Exploration, Inc.			
		Well Davis No. 1-33 (SW)			
		Field Wildcat			
		County Gray	State		Kansas
15-069-20,336-00-00		Location 1,500' FSL & 2,000' FWL			Other Services CNL/CDL DIL/BHCS
Permanent Datum		Sec: 33	Twp: 27 S	Rge: 30 W	Elevation
Log Measured From Kelly Bushing		13 Ft. Above Perm. Datum			K.B. 2822
Drilling Measured From Kelly Bushing					D.F. 2809
Date		1/31/2011			
Run Number		Two			
Depth Driller		5456			
Depth Logger		5458			
Bottom Logged Interval		5457			
Top Log Interval		2600			
Casing Driller		8.625 @ 1881			
Casing Logger		1876			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		1250			
Density / Viscosity		9.5 58			
pH / Fluid Loss		10.5 6.8			
Source of Sample		Flowline			
Rm @ Meas. Temp		1.5 @ 45			
Rmf @ Meas. Temp		1.13 @ 45			
Rmc @ Meas. Temp		2.03 @ 45			
Source of Rmf / Rmc		Charts			
Rm @ BHT		.52 @ 131			
Operating Rig Time		6 Hours			
Max Rec. Temp. F		131			
Equipment Number		10			
Location		Hays			
Recorded By		J Schuler			
Witnessed By		Dave Williams			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Montezuma West to 144, West to 3rd Road, North 6 Miles
to Y Road, 1/2 East, North Into


Database File: c:\warrior\data\falcon_davis no. 1-33 (sw)\falcon_davis_1_33hd.db
Dataset Pathname: dil\falstk
Presentation Format: micro
Dataset Creation: Mon Jan 31 15:45:44 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0


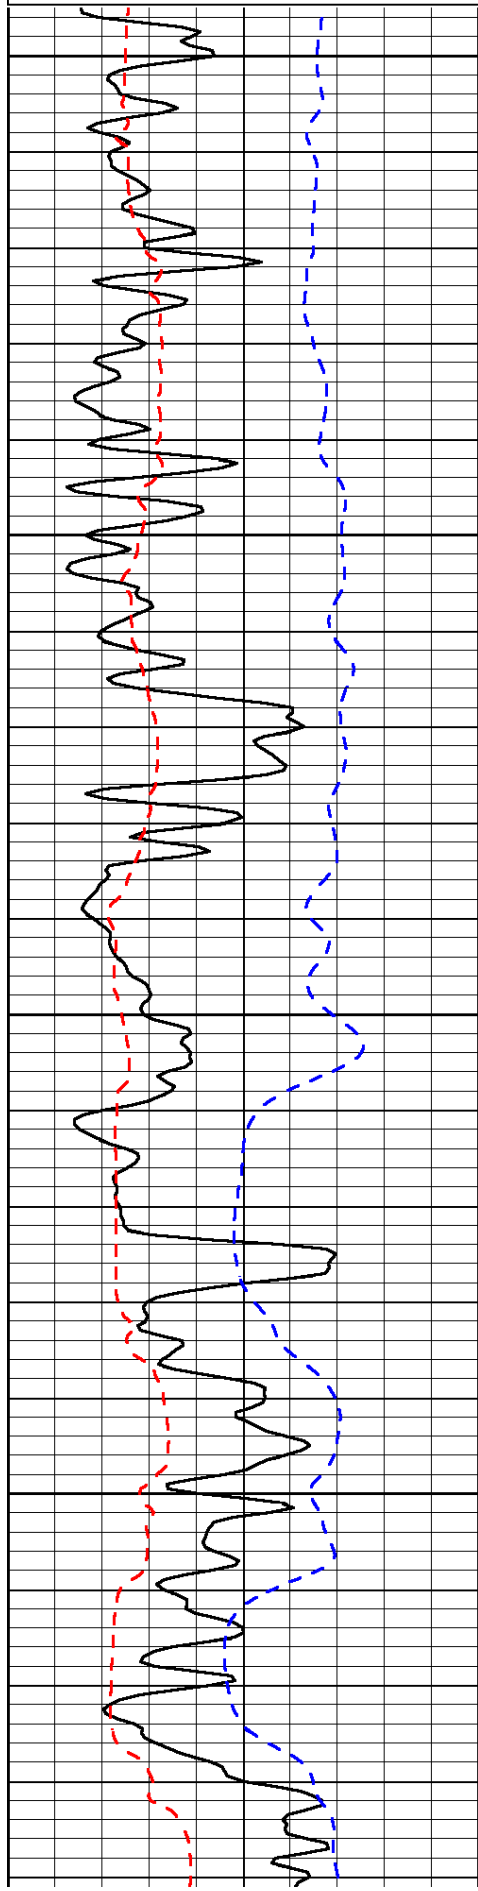



2600
2650
2700
2750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

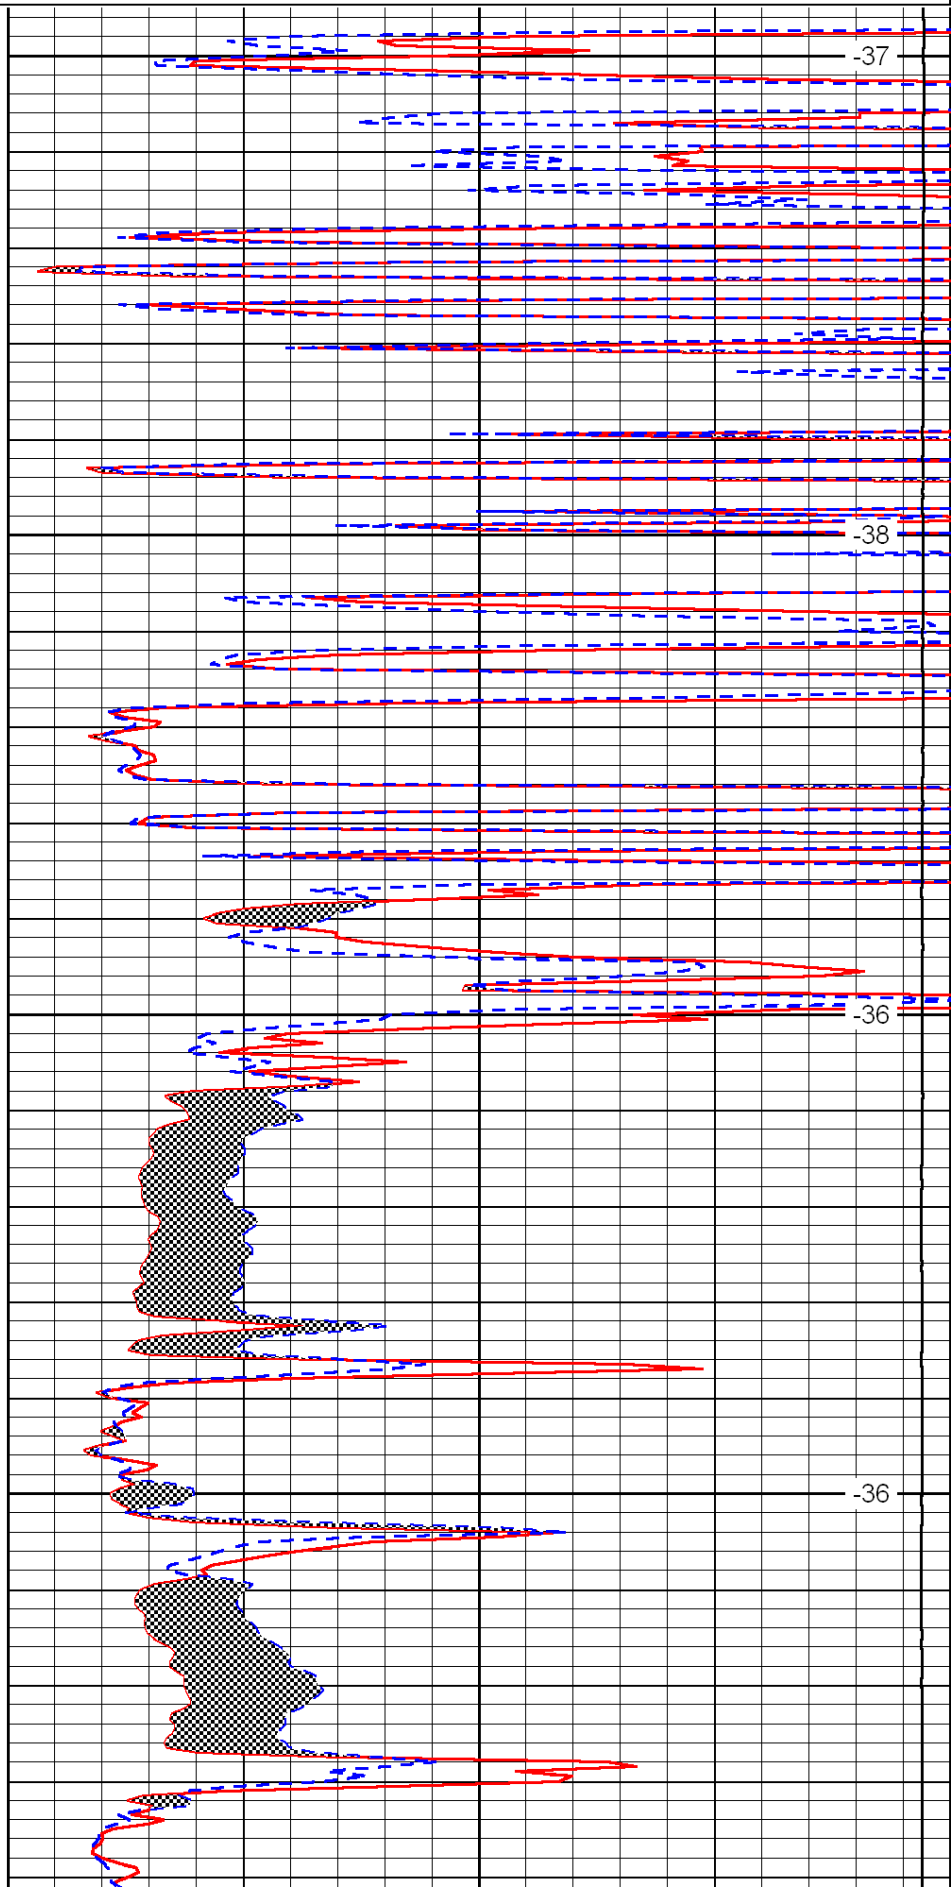

-37
-38
-36
-36

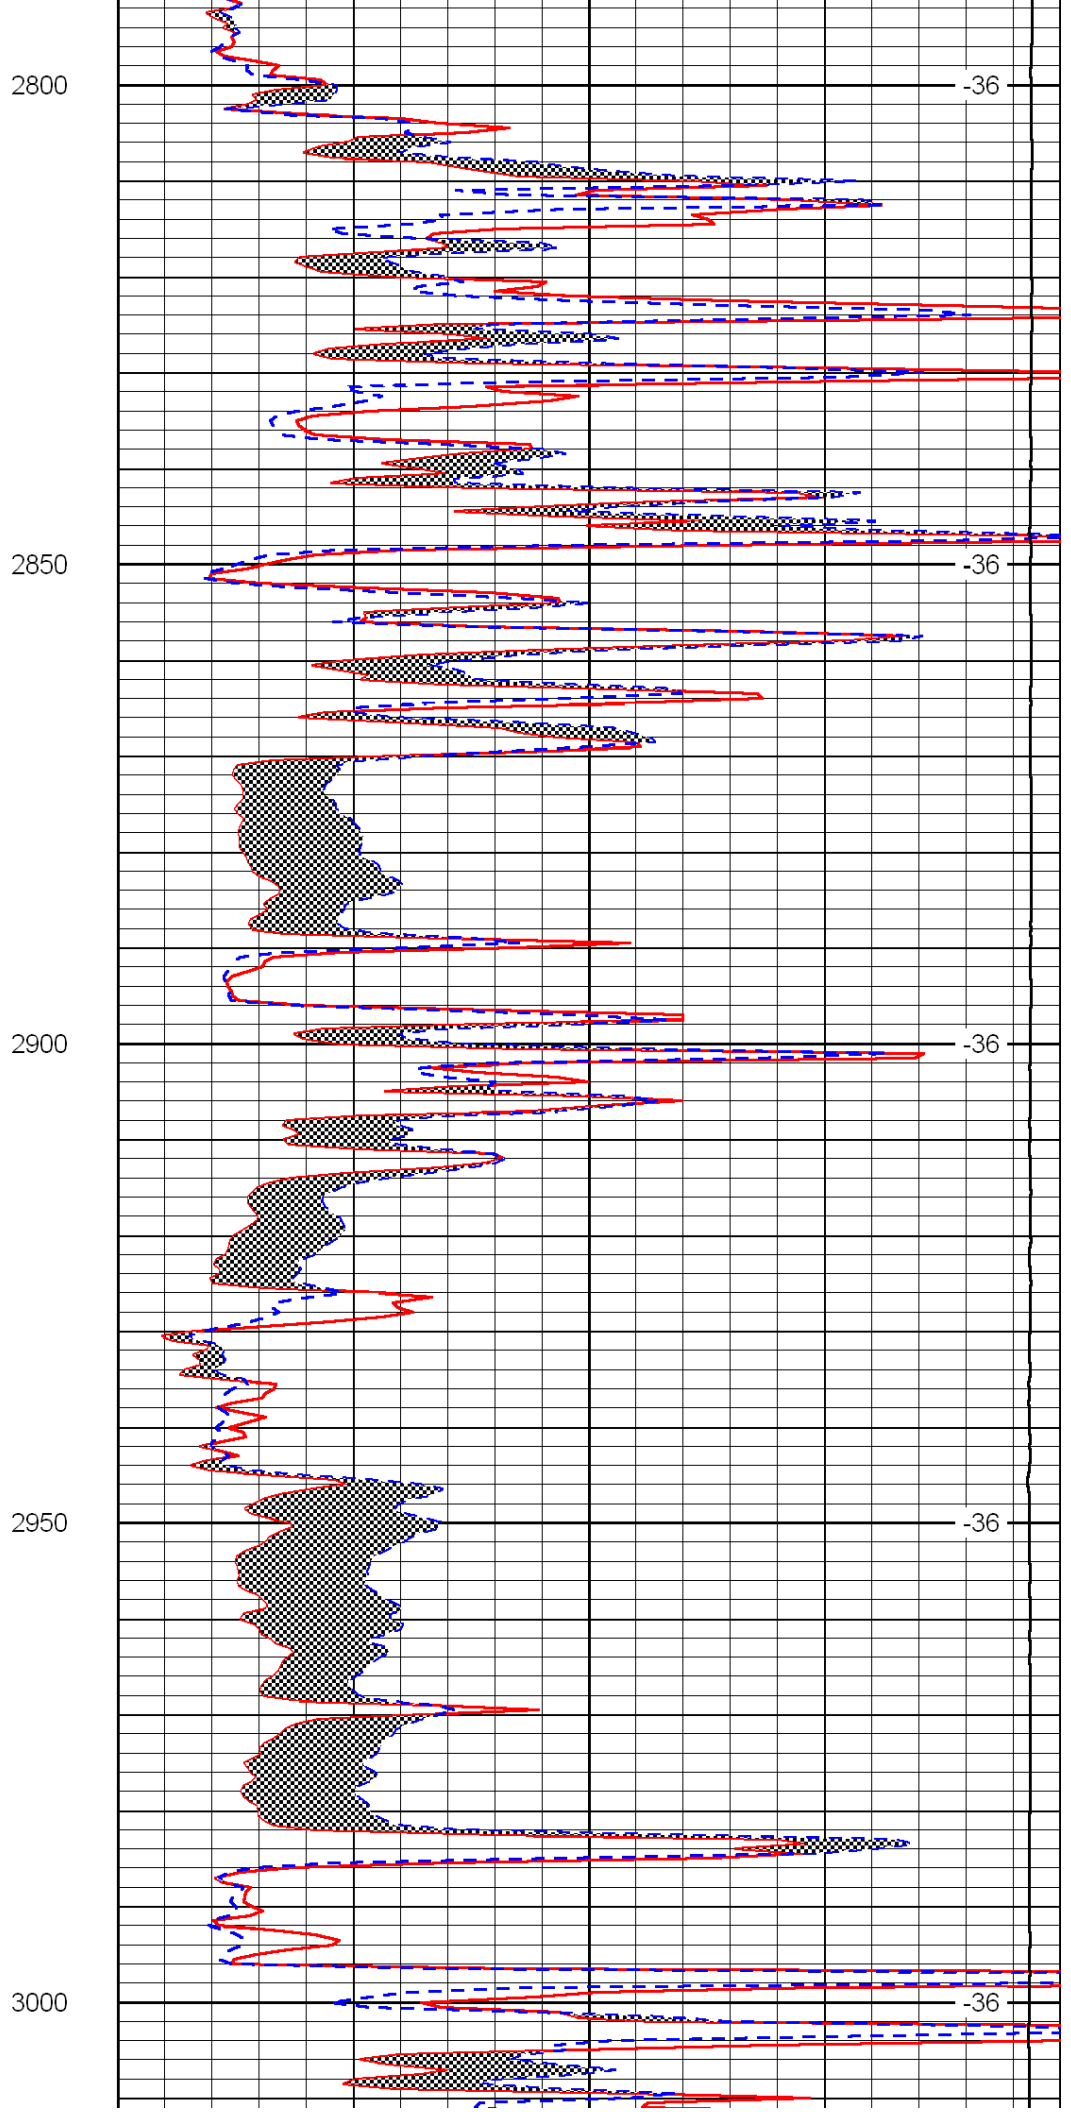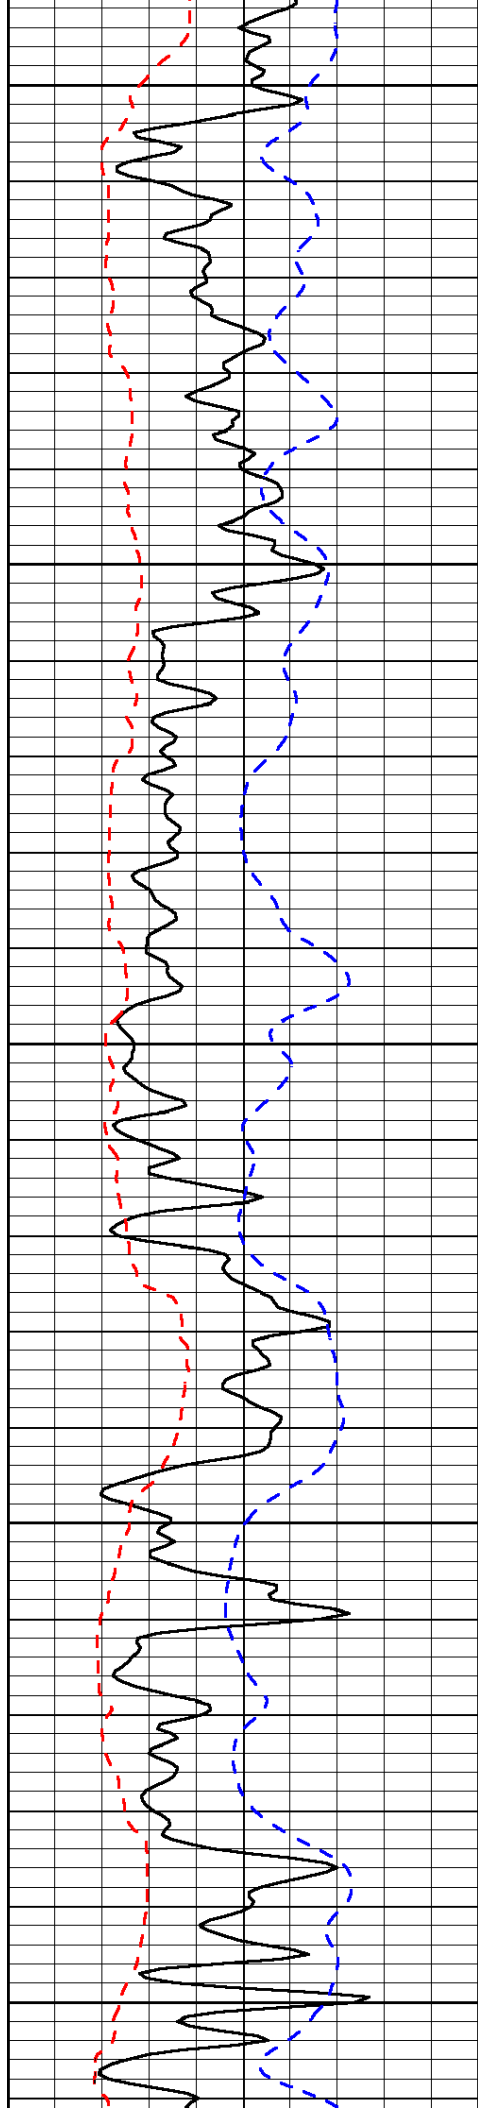

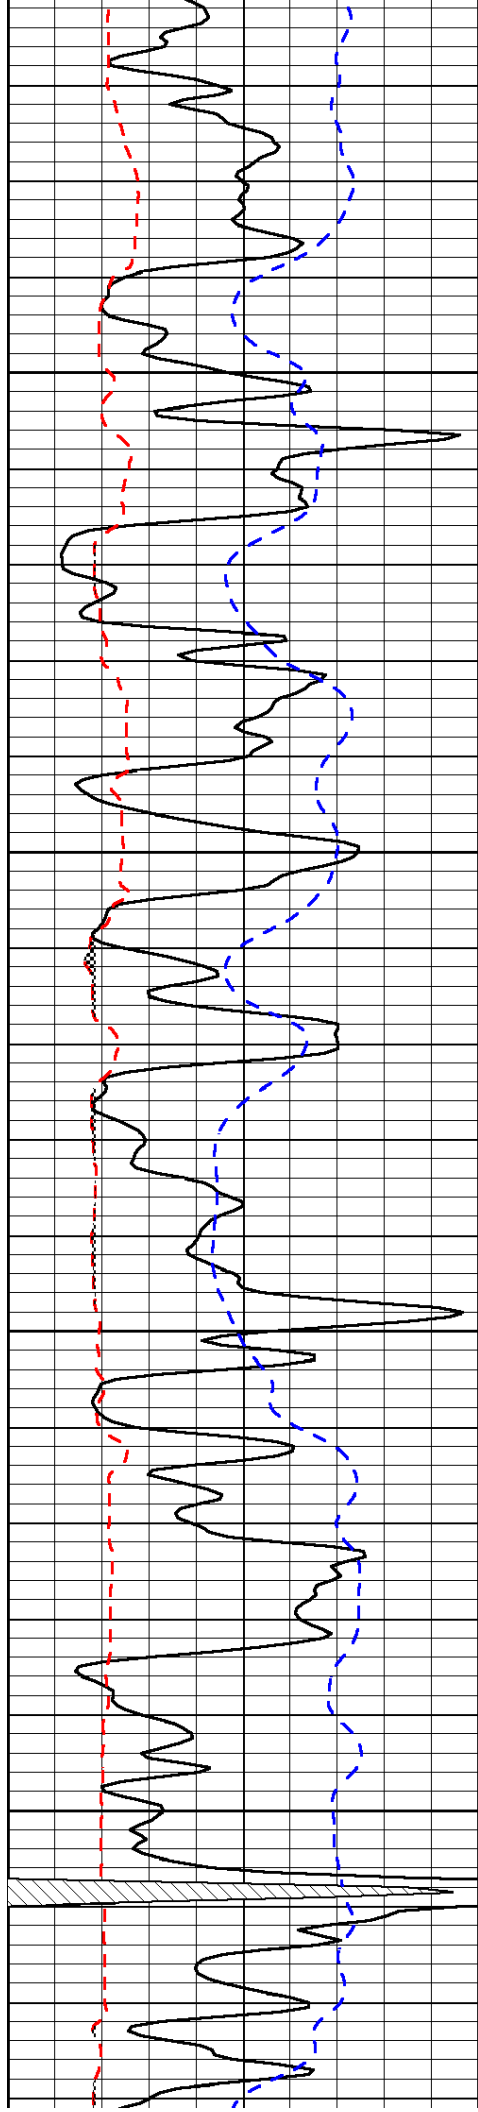



3050

3100

3150

3200

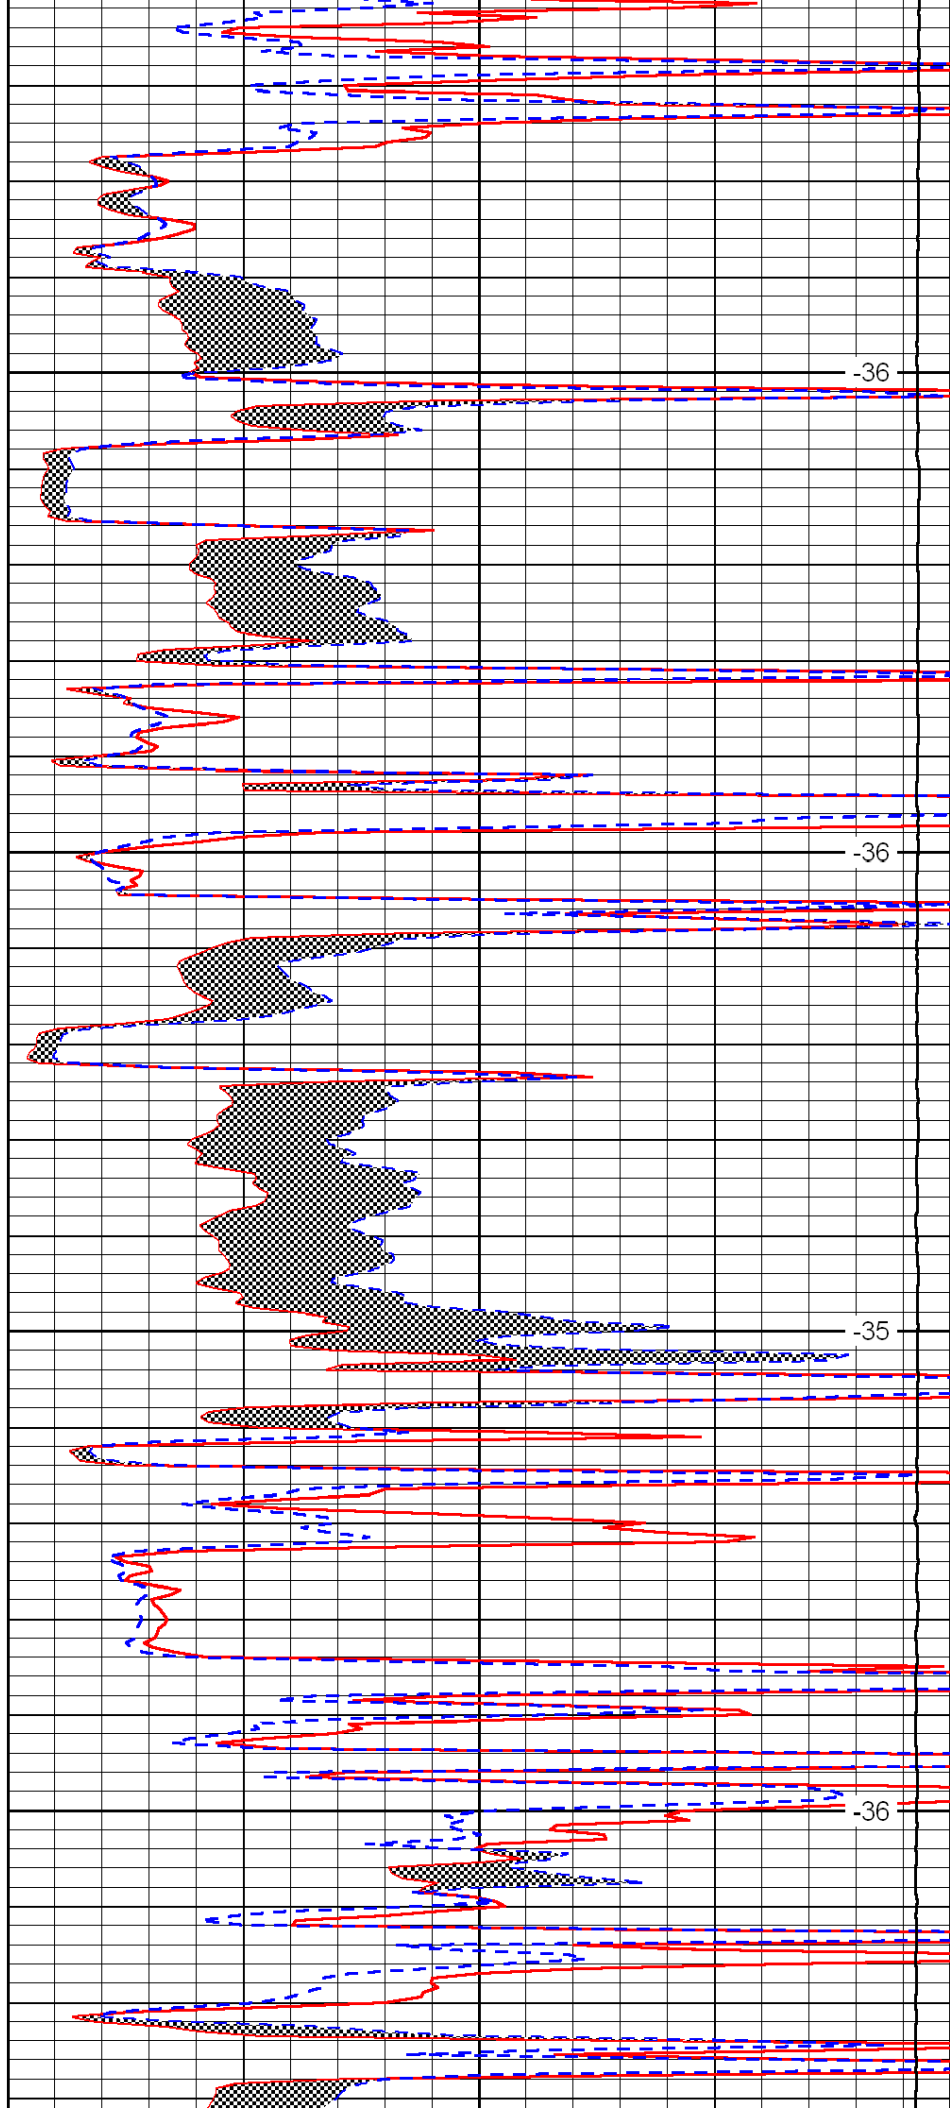

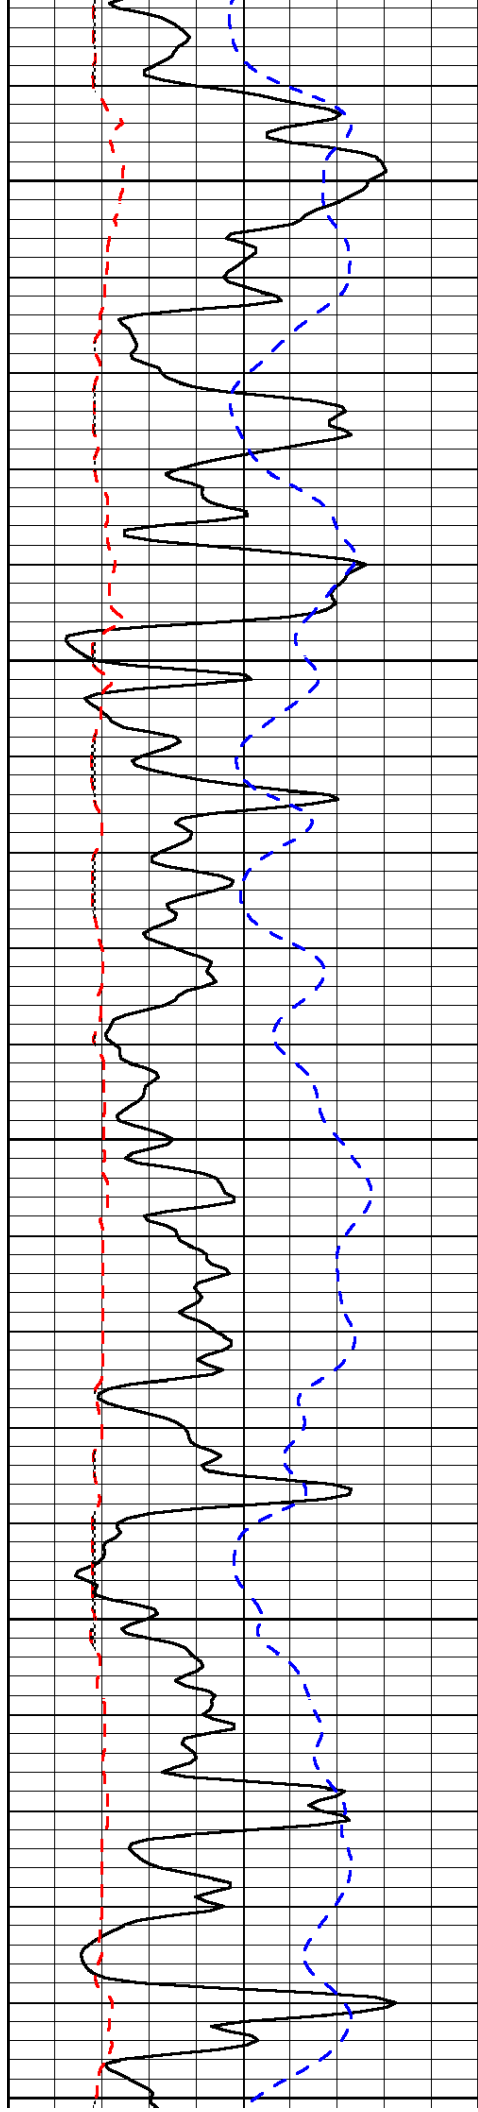


3250

3300

3350

3400

3450

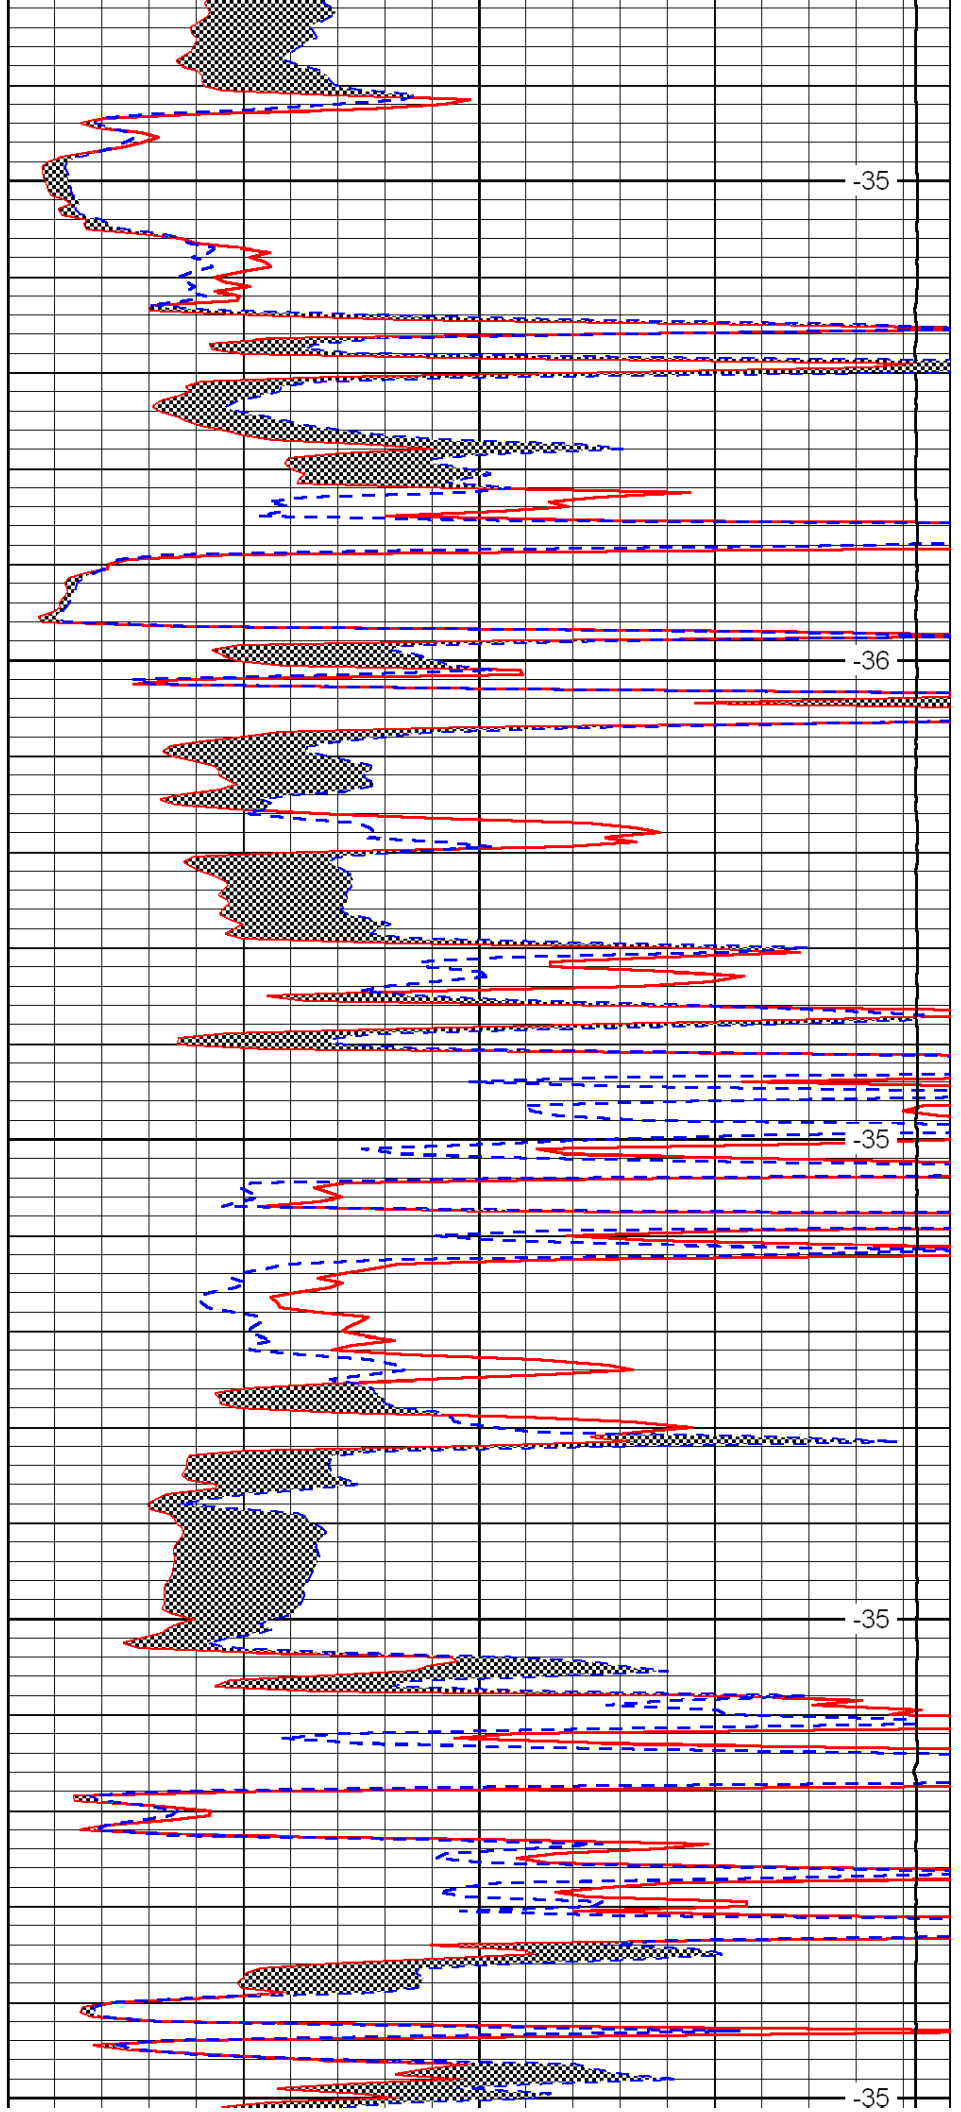


-35

-36

-35

-35

-35

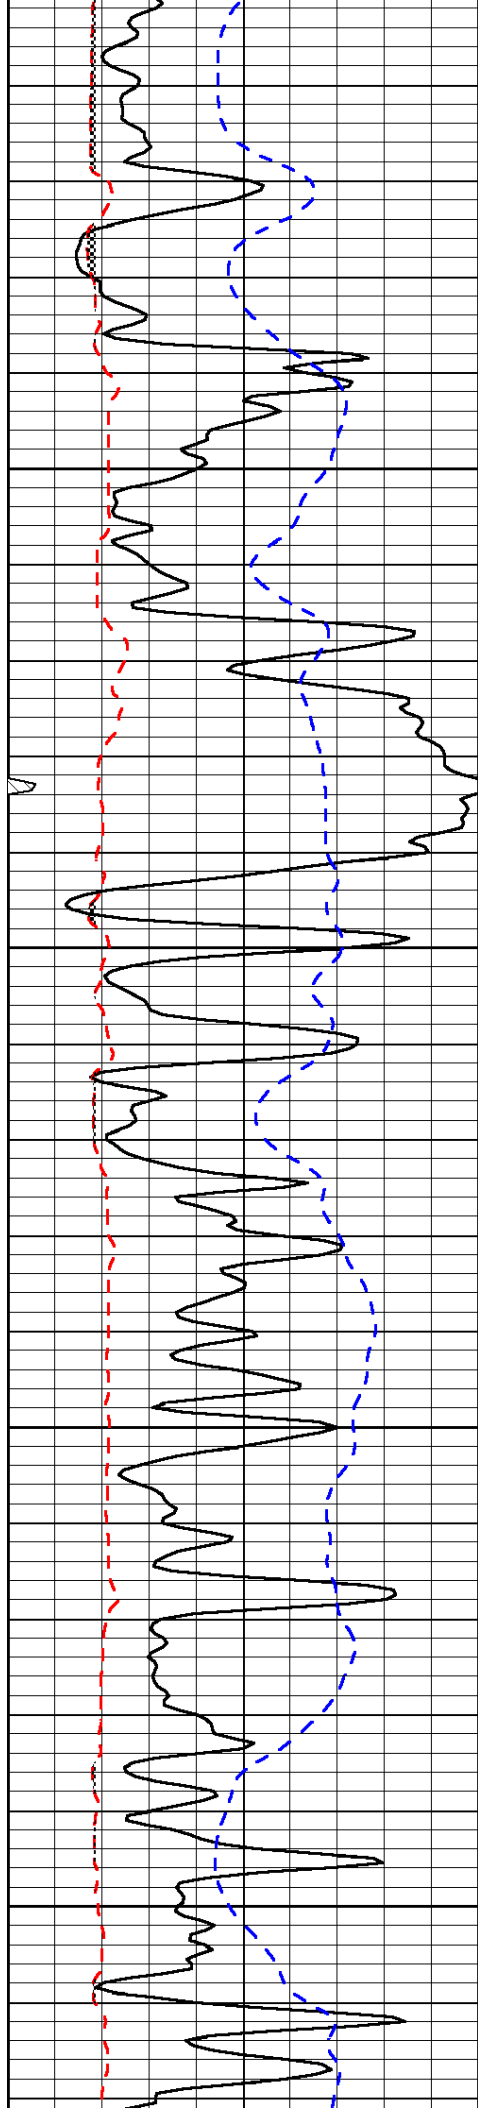



3500

3550

3600

3650

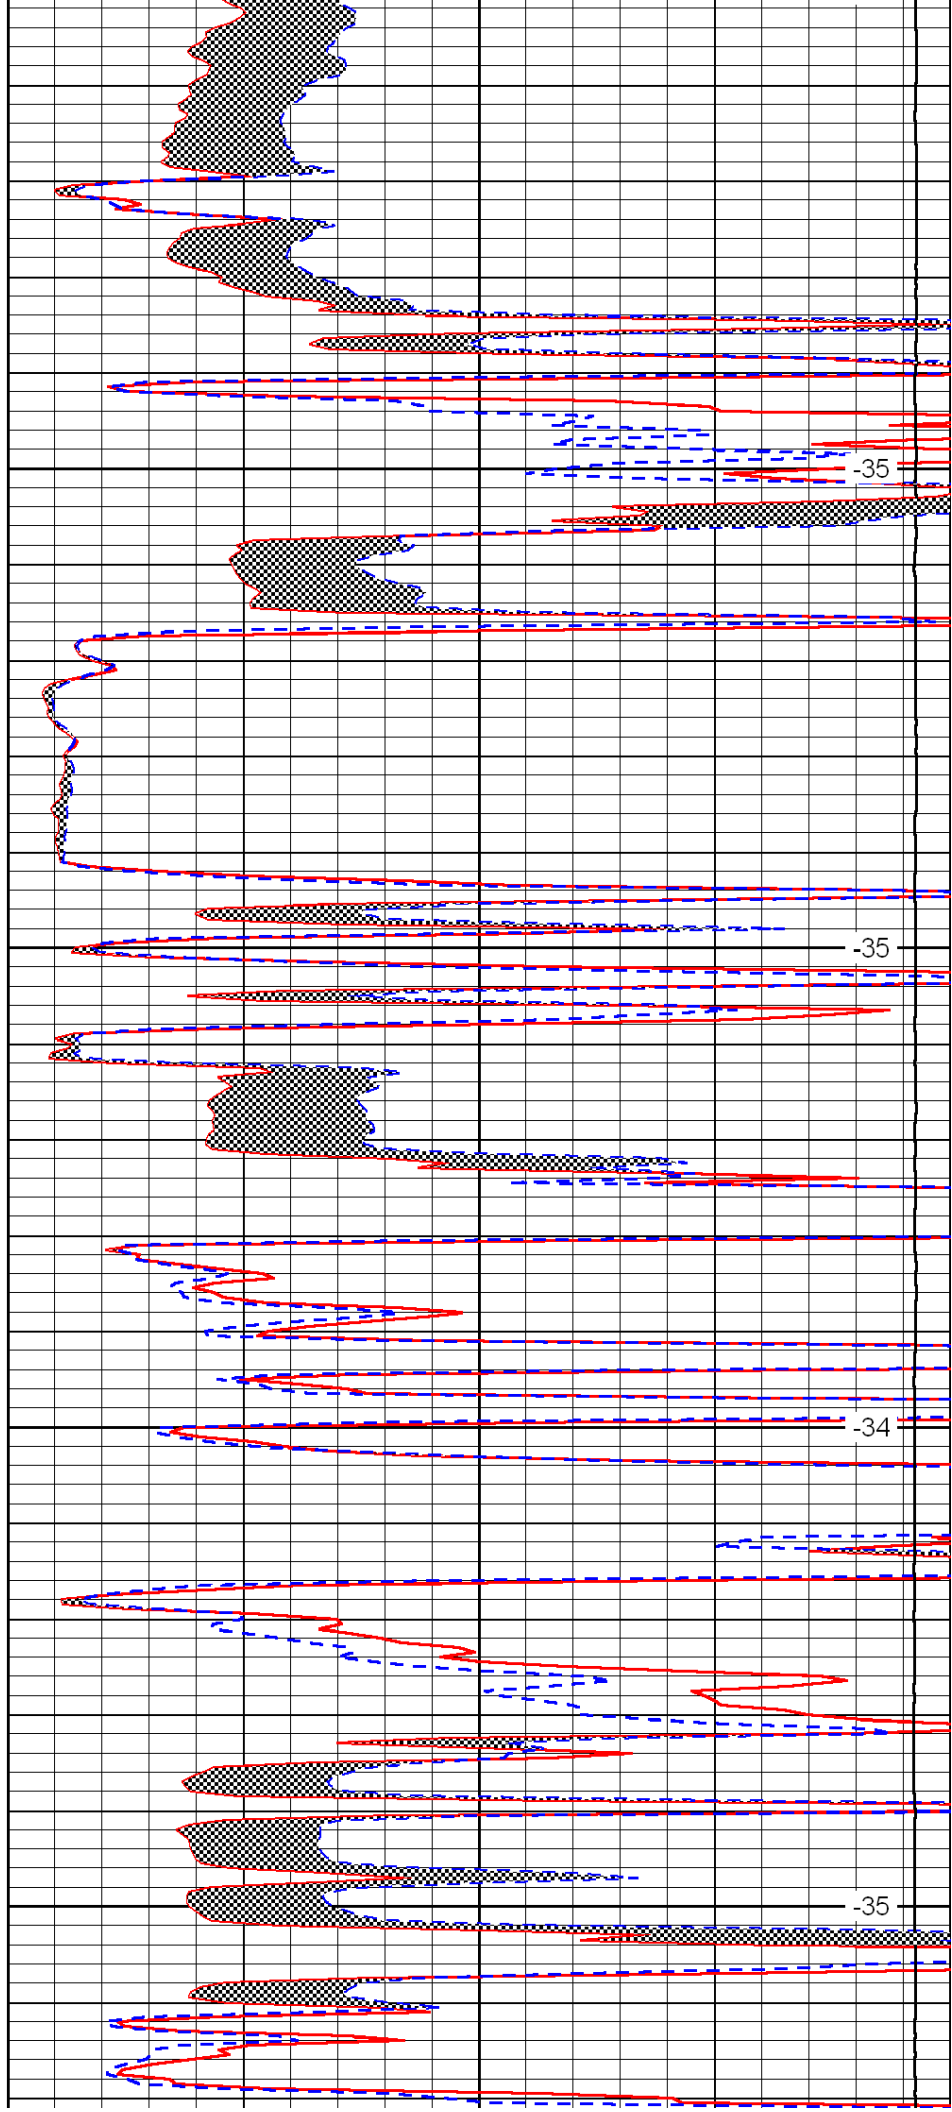

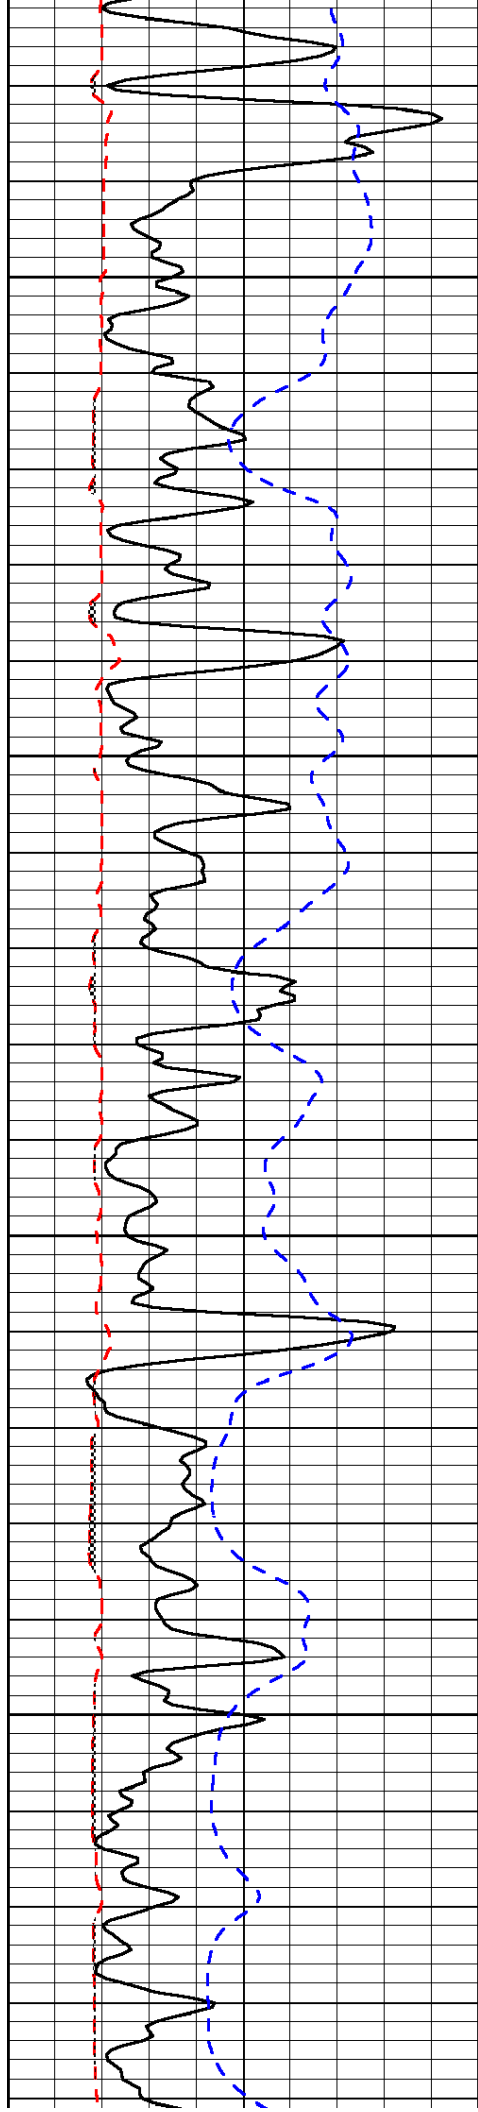



3700

3750

3800

3850

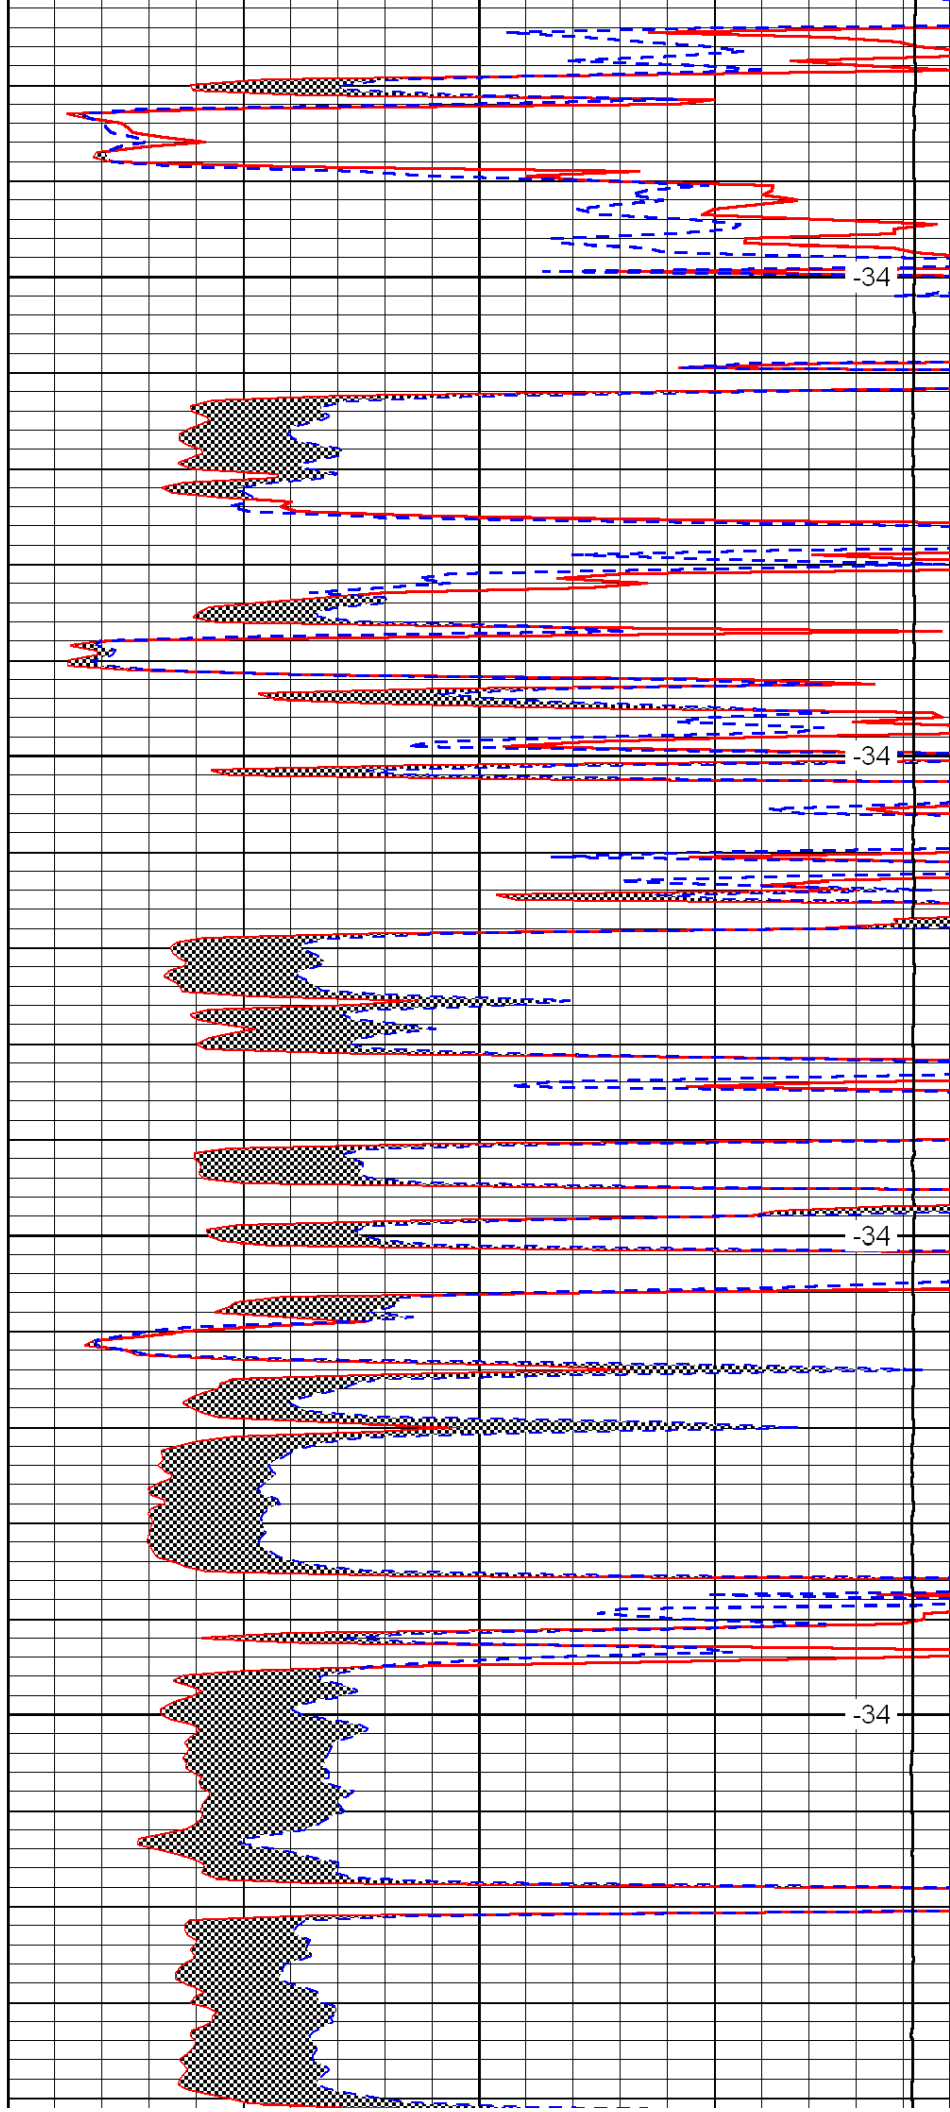

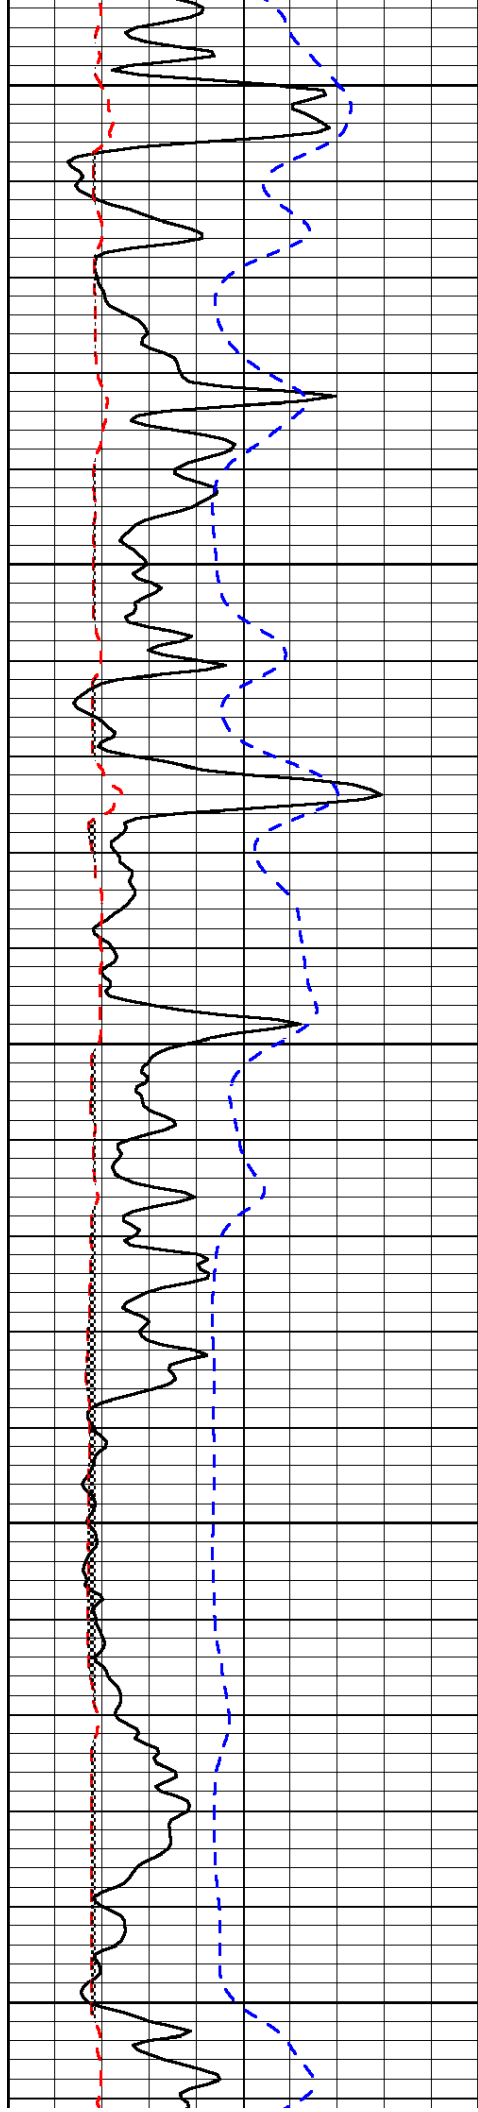


3900

3950

4000

4050

4100

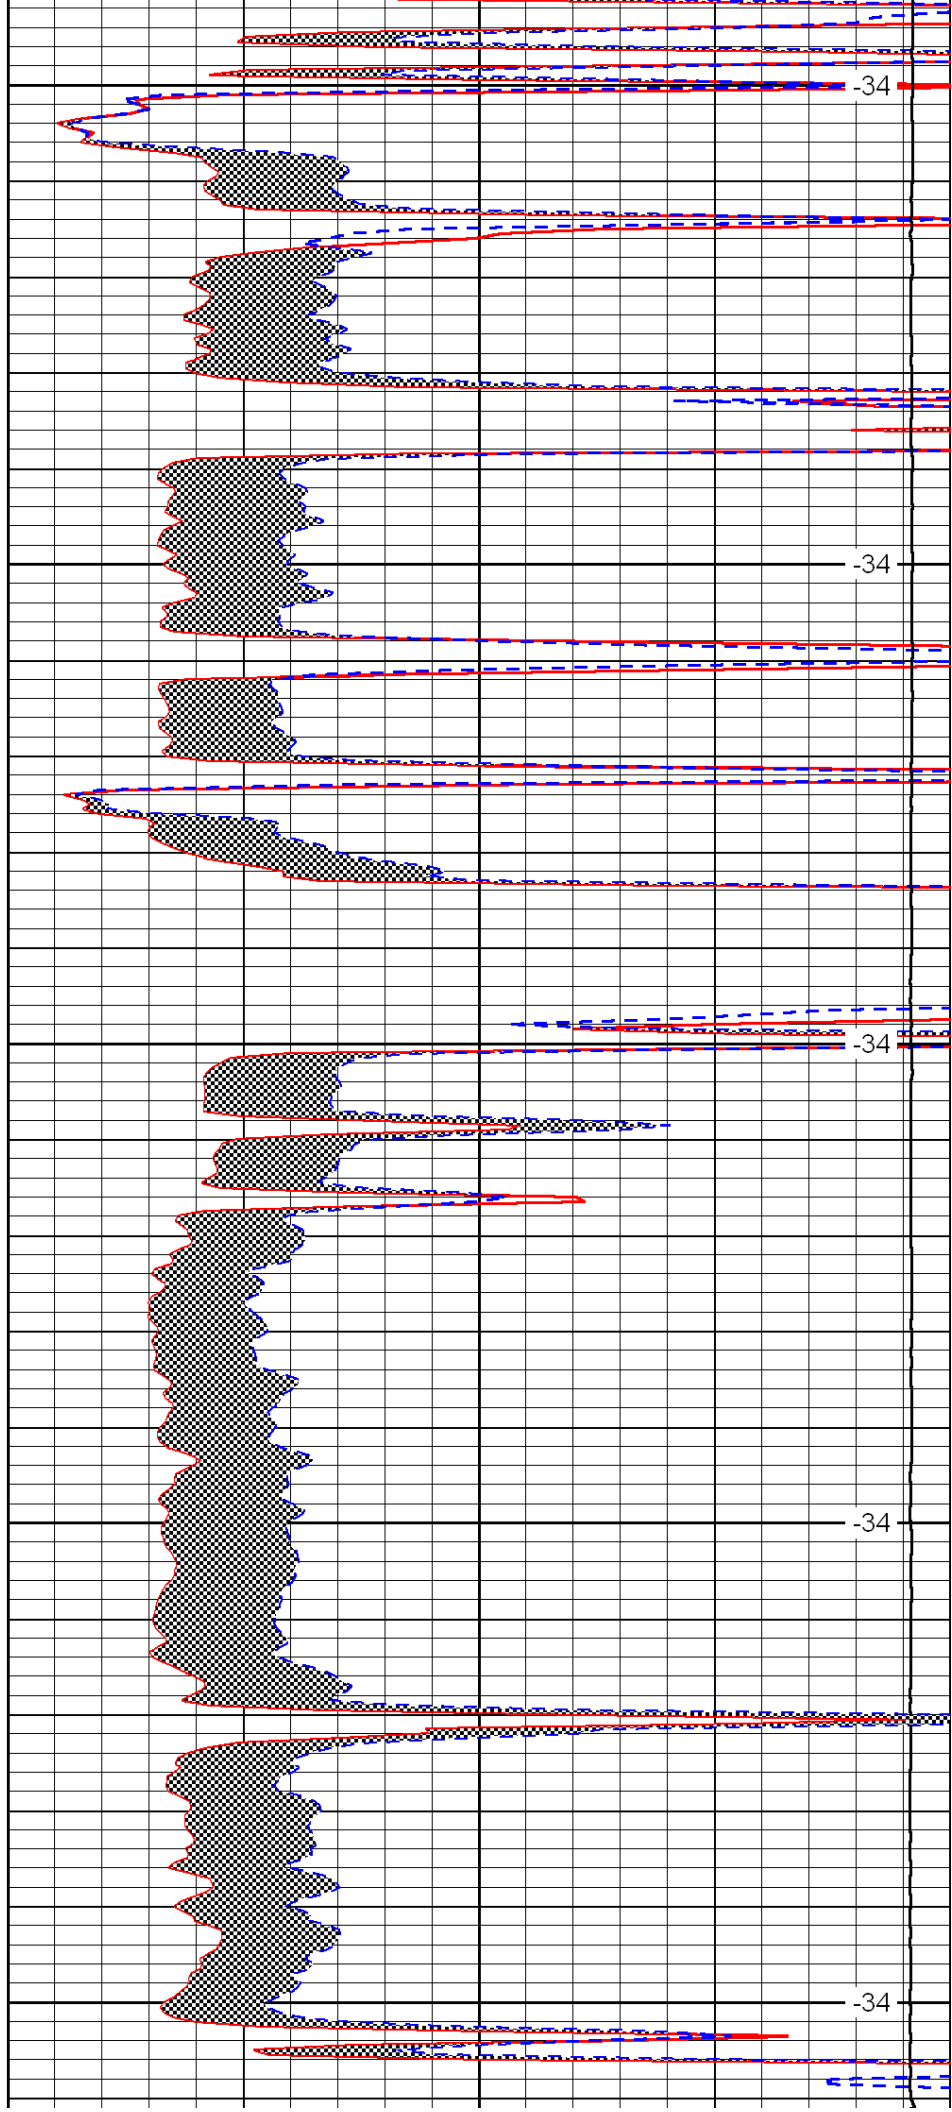


-34

-34

-34

-34

-34

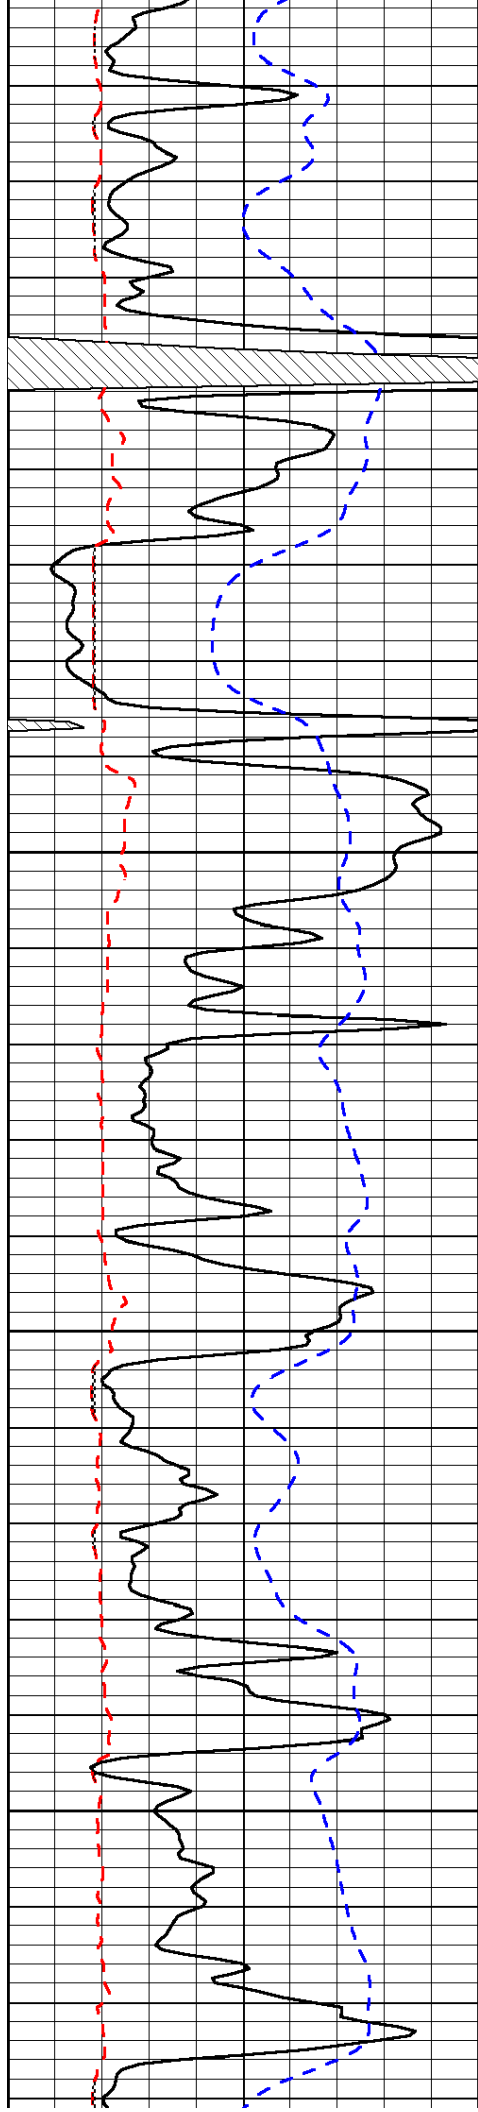


4150

4200

4250

4300

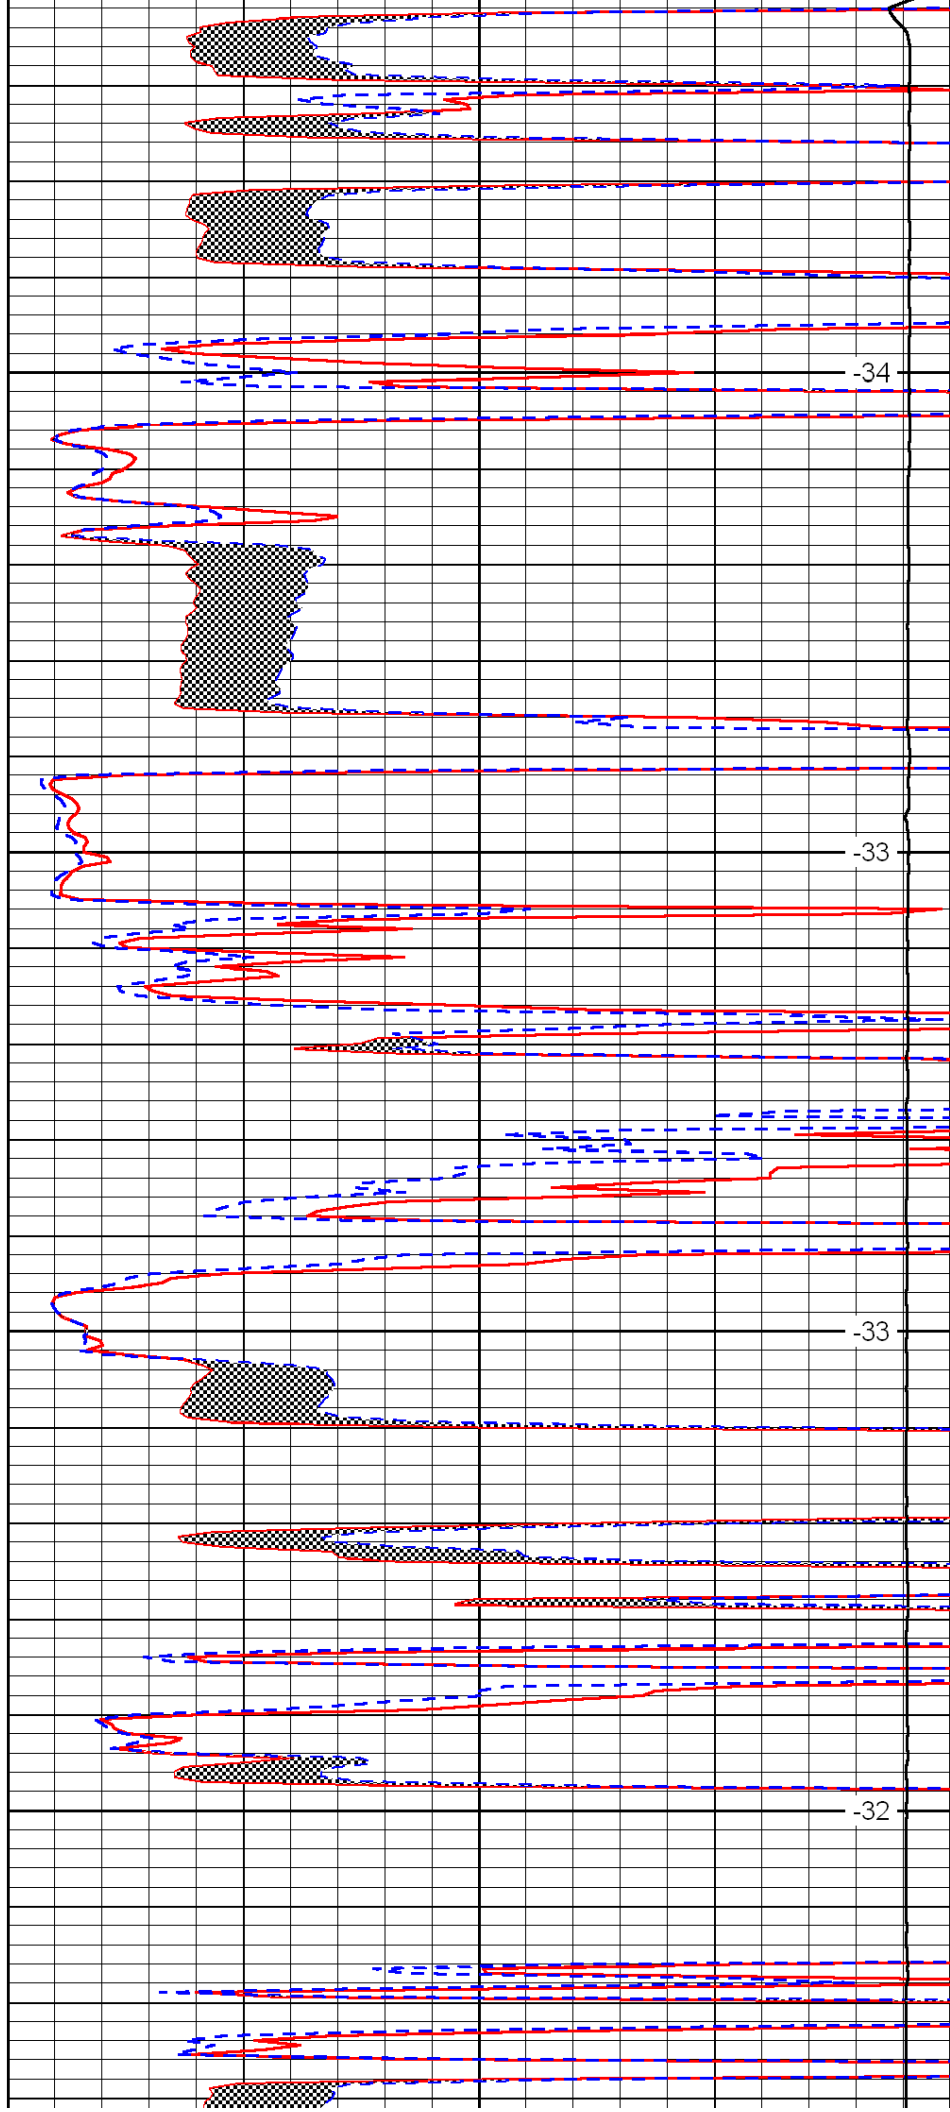


-34

-33

-33

-32

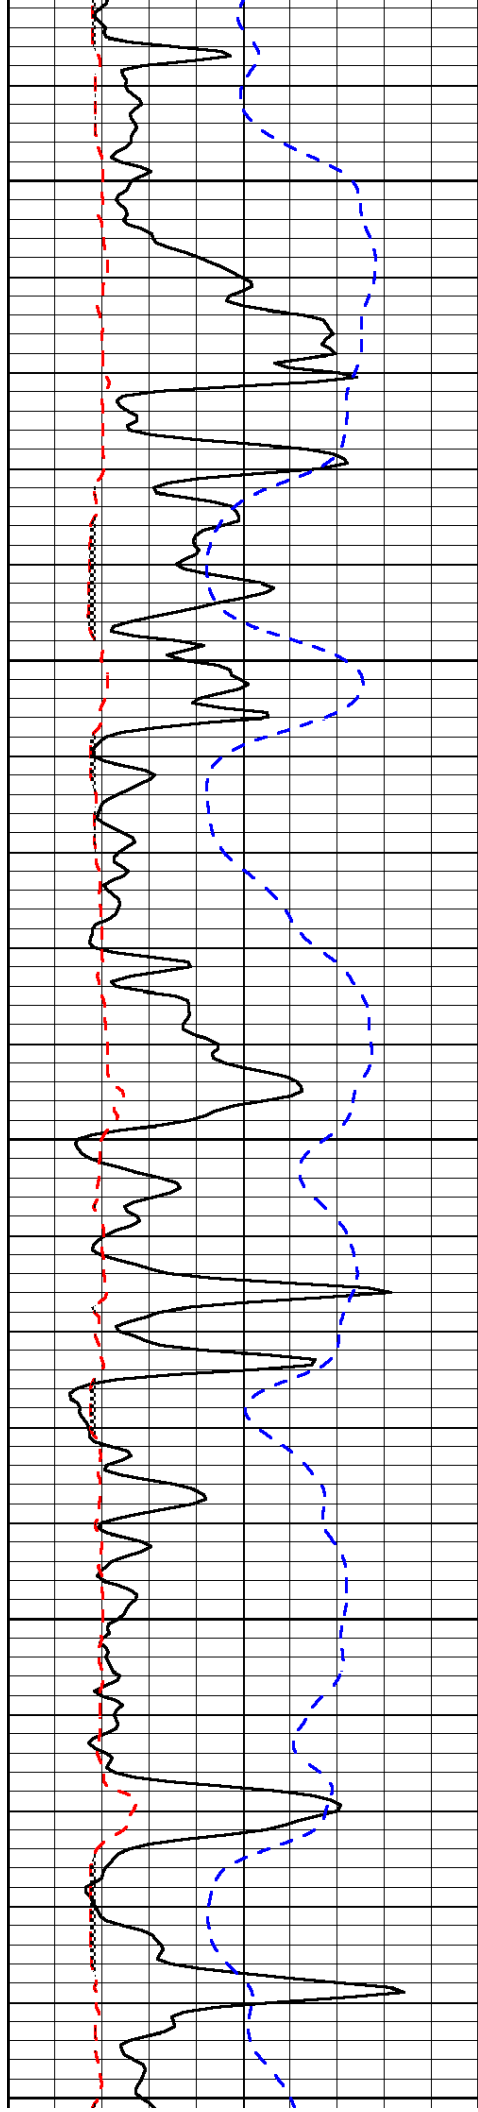


4350


4400

4450

4500

4550

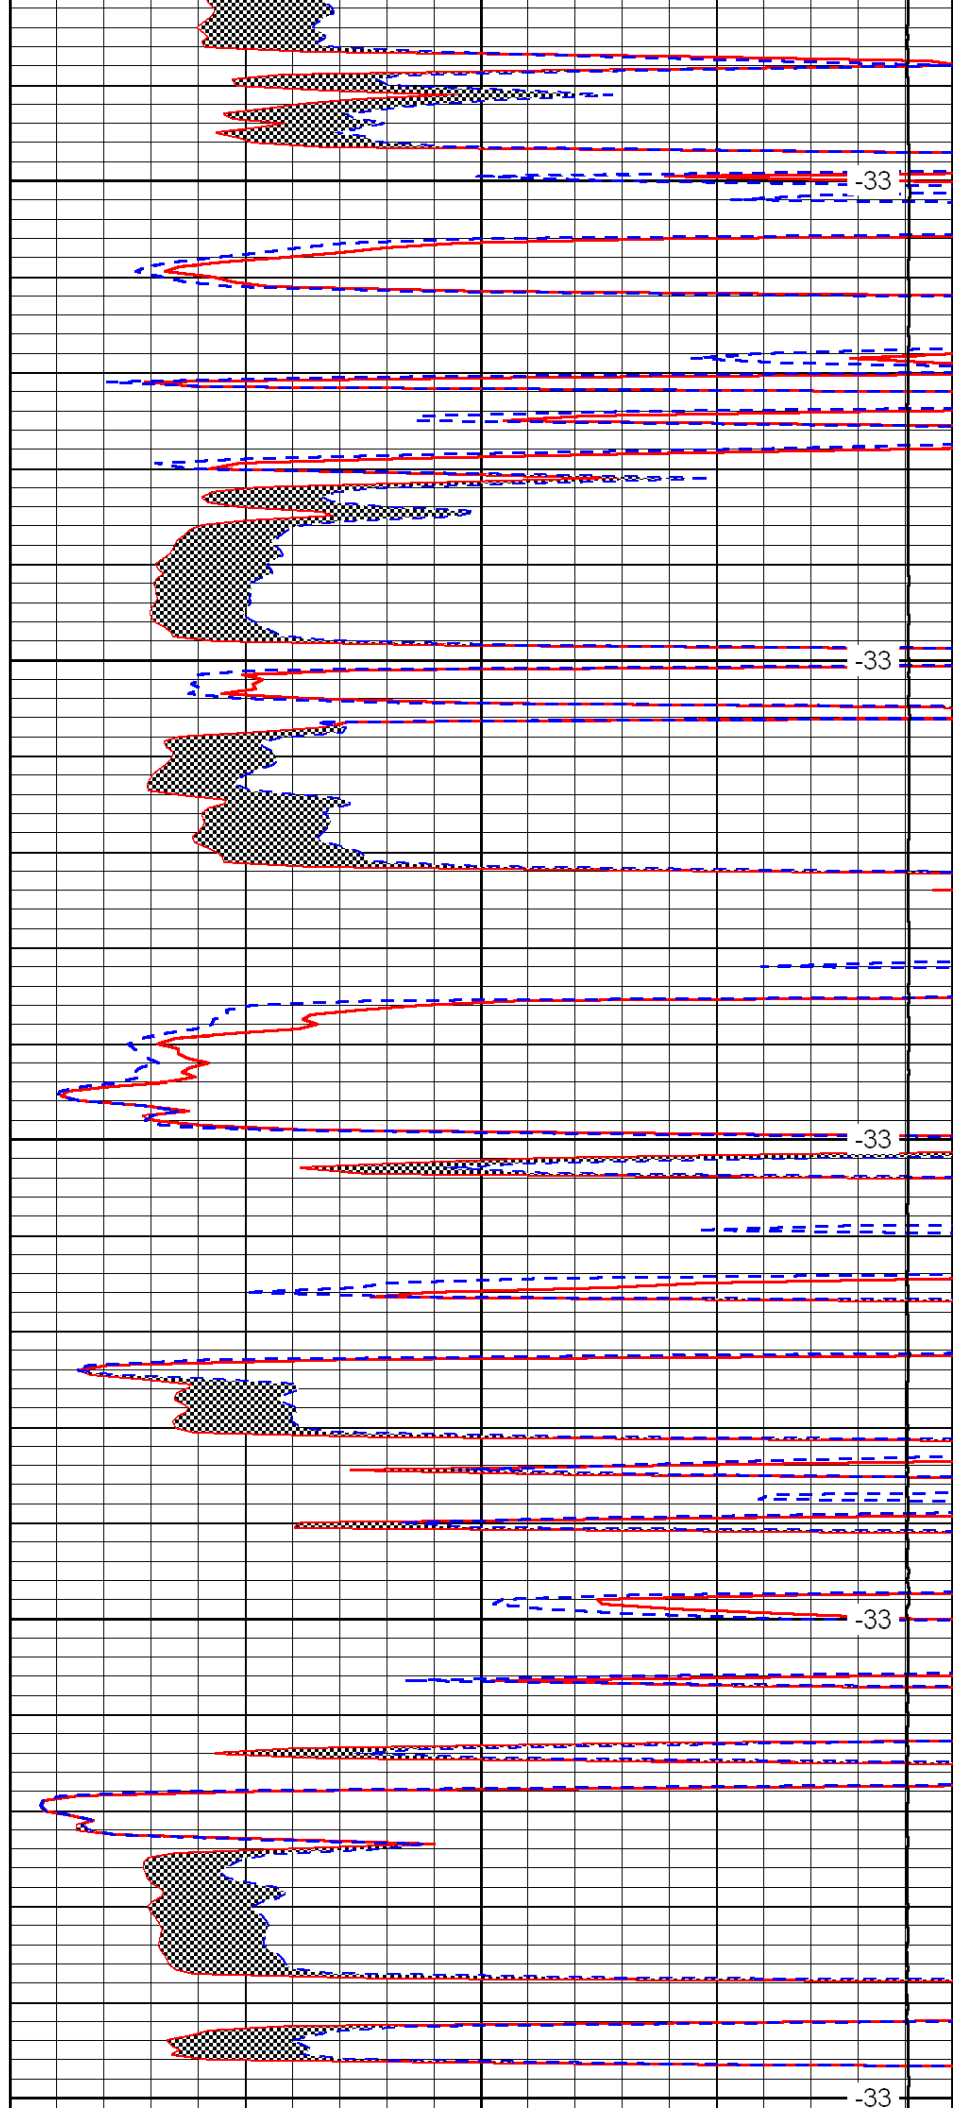

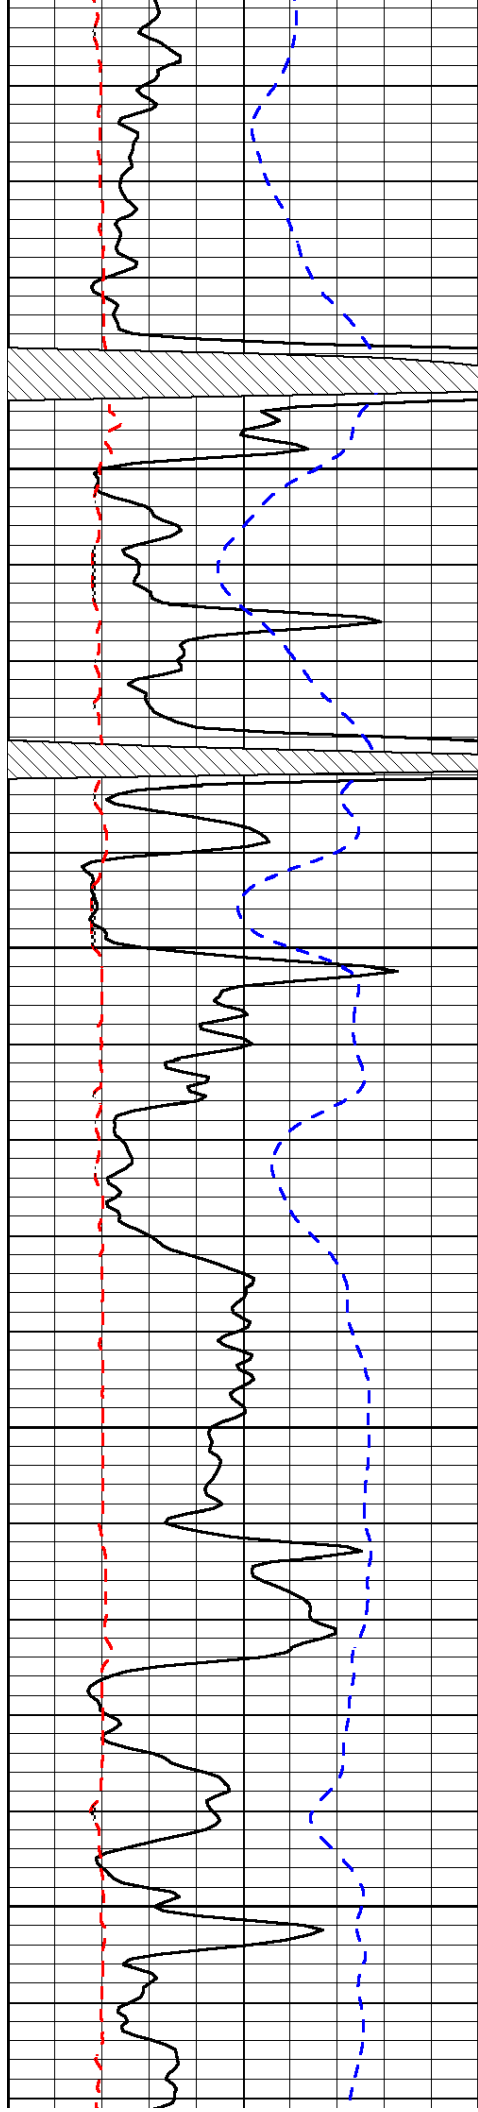



4600

4650

4700

4750

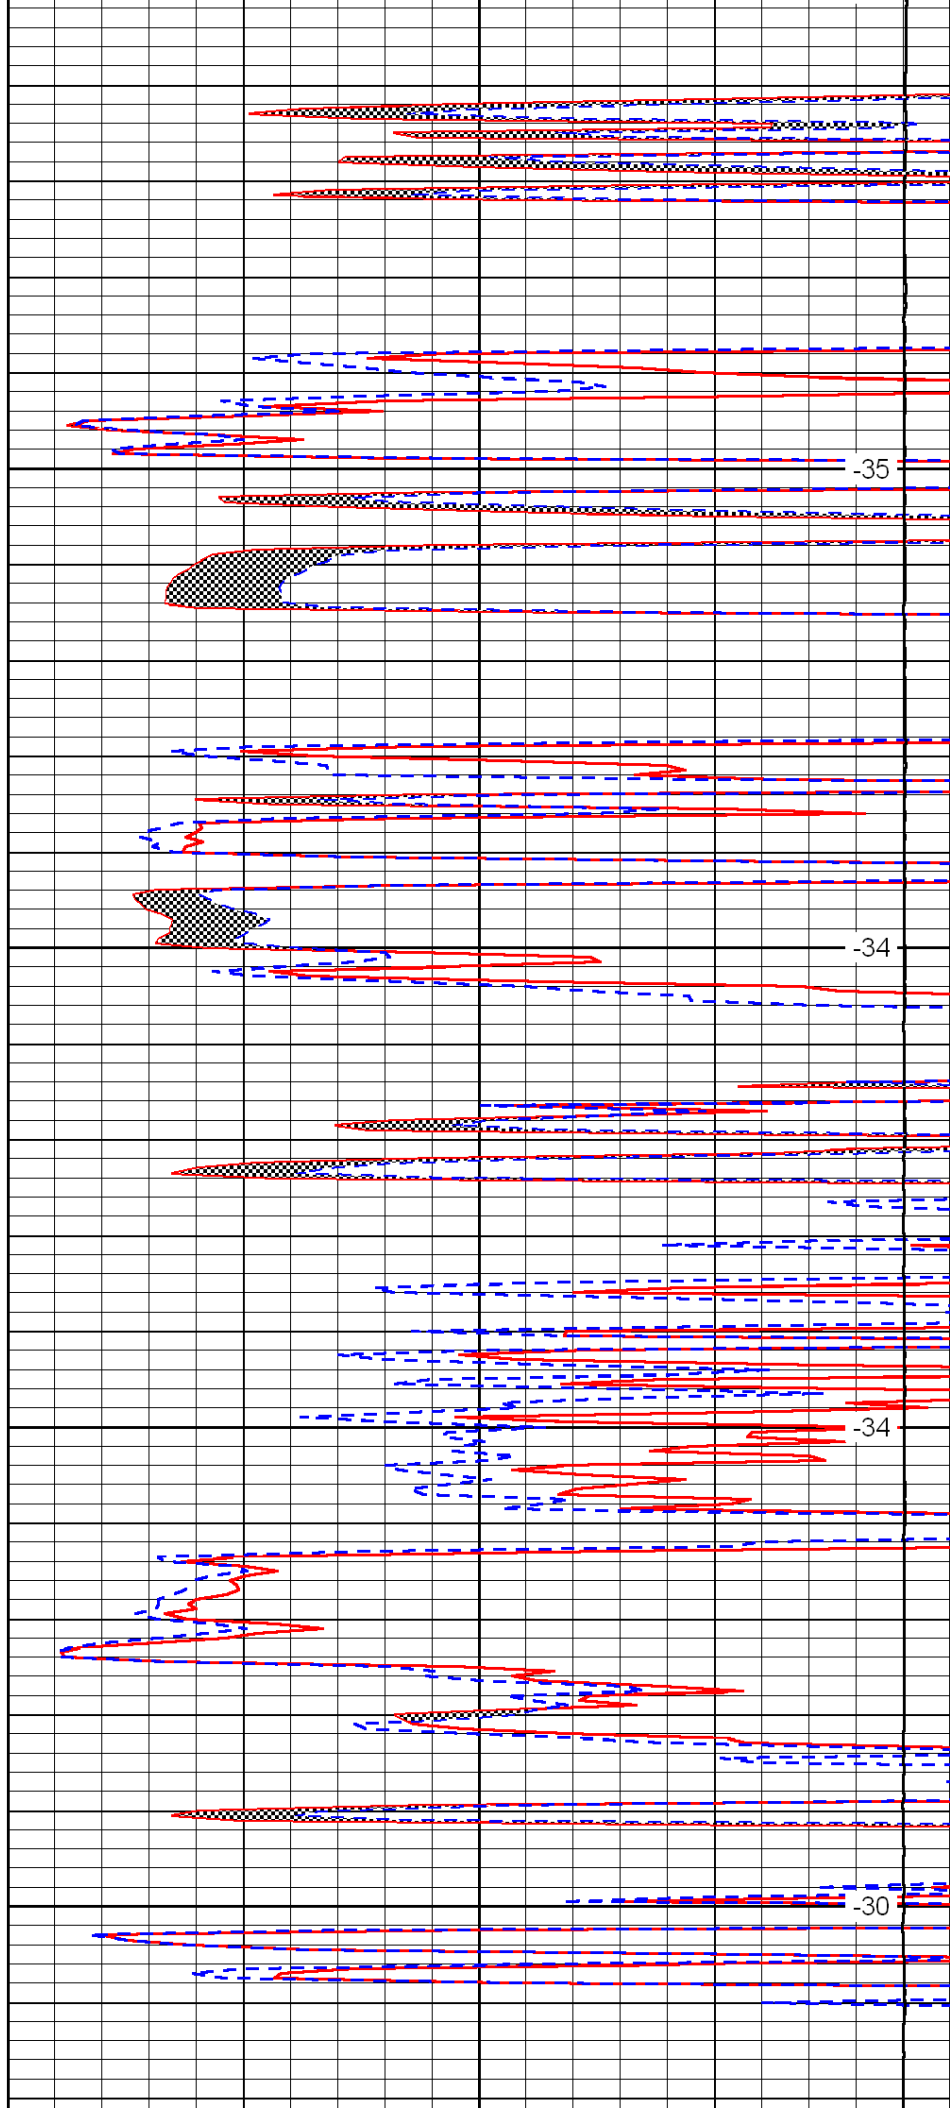

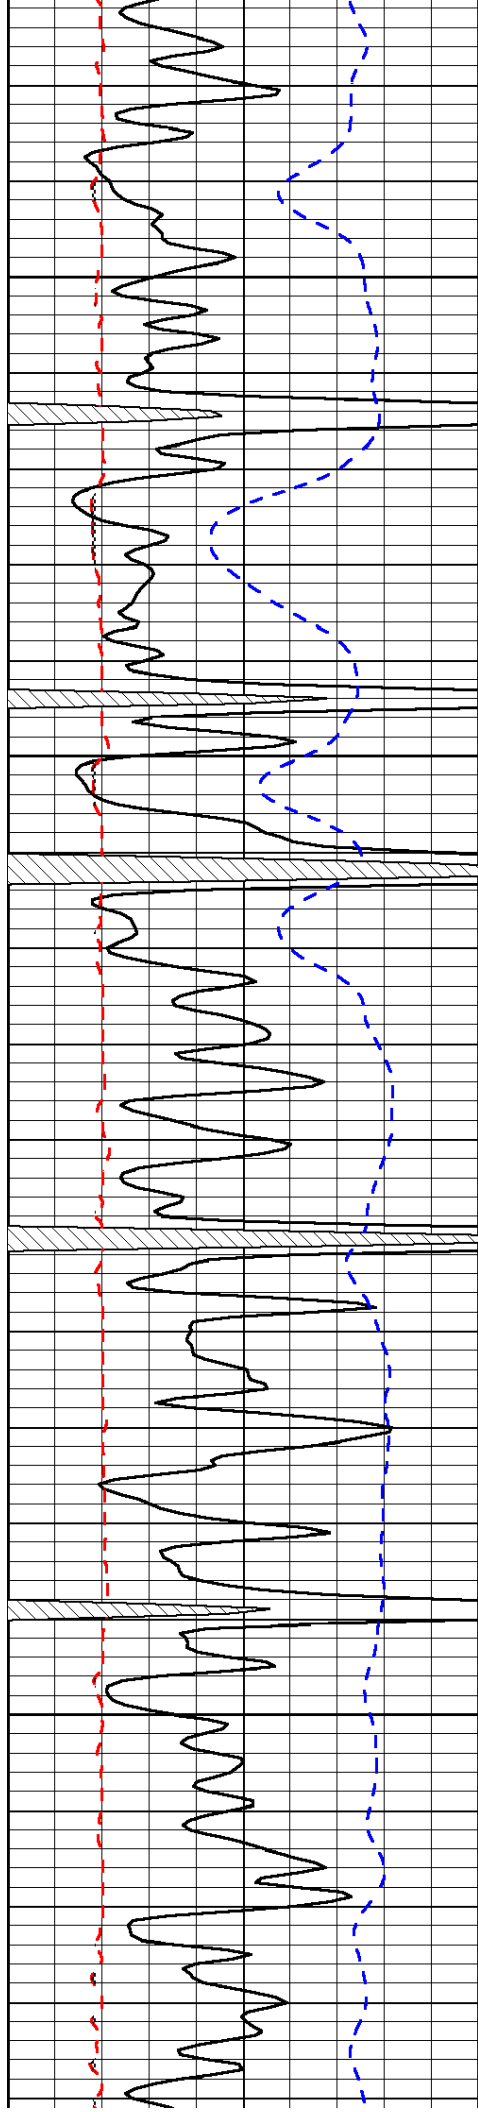



4800

4850

4900

4950

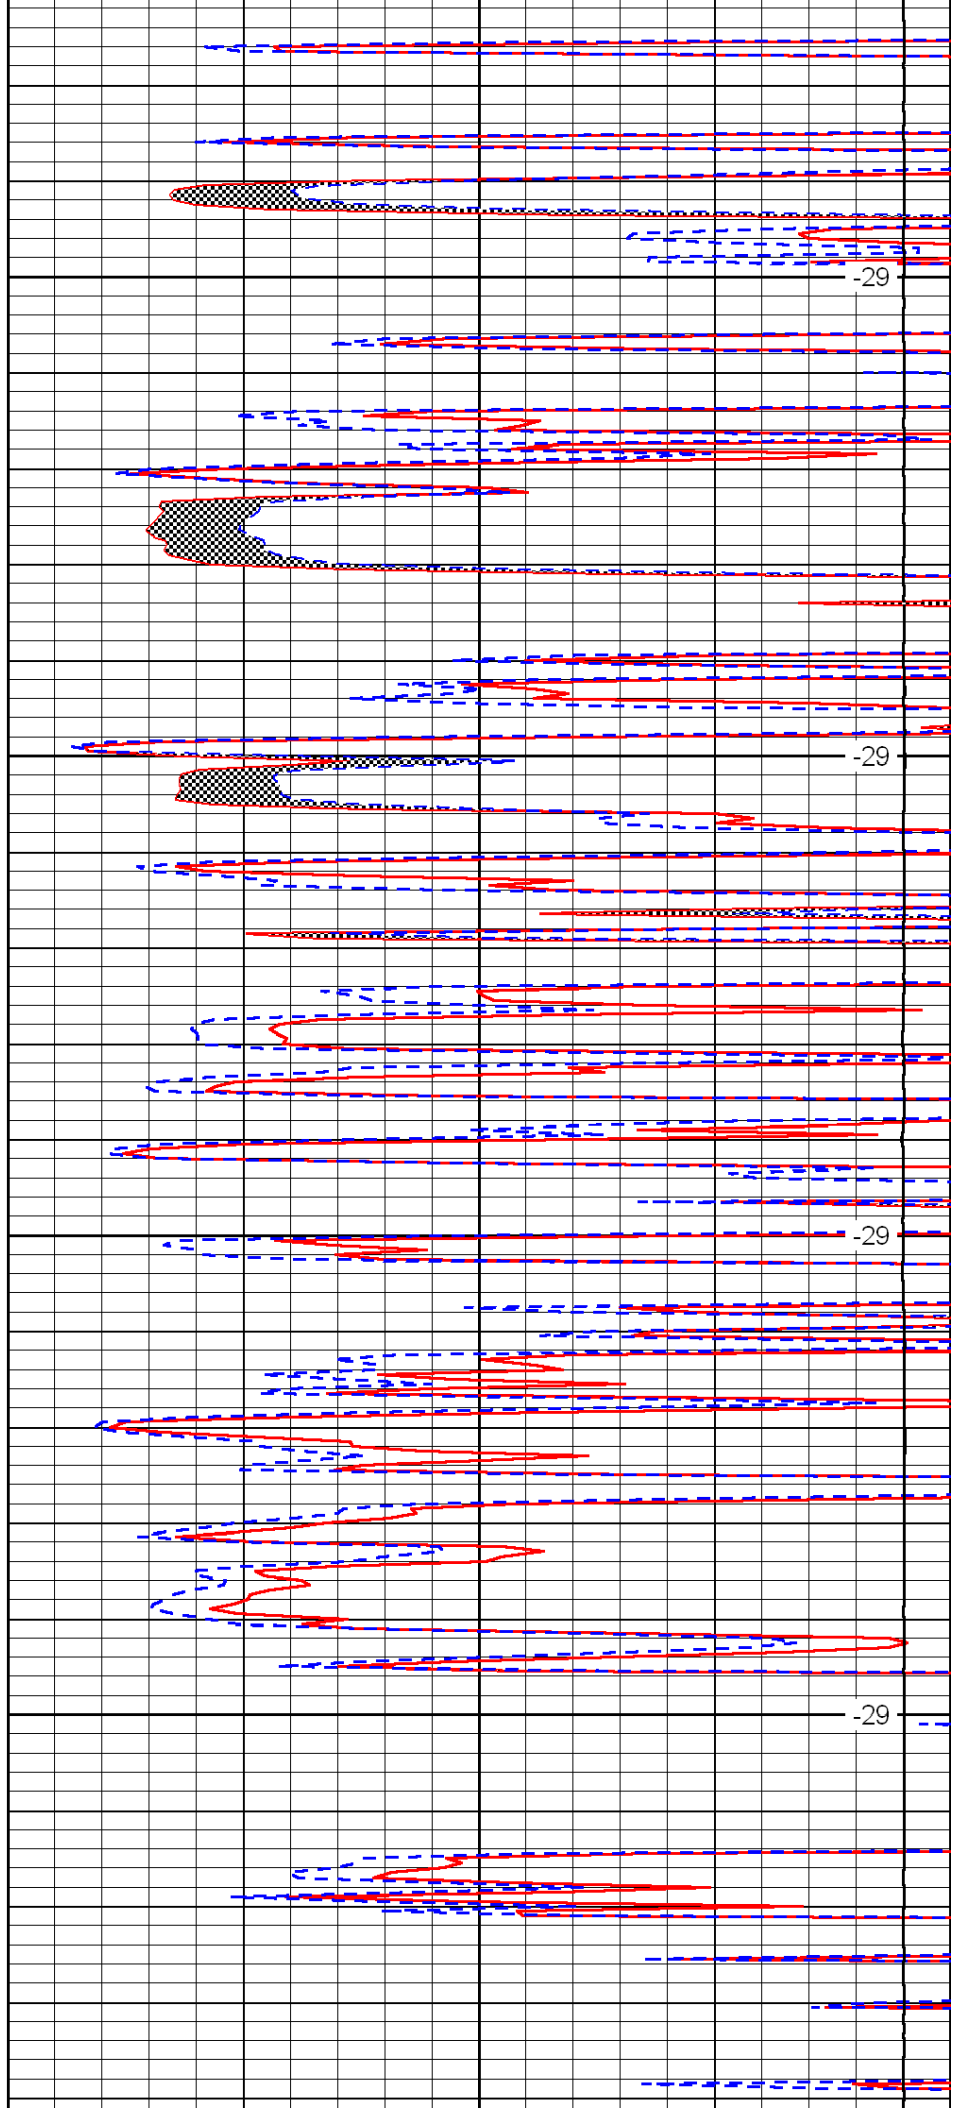

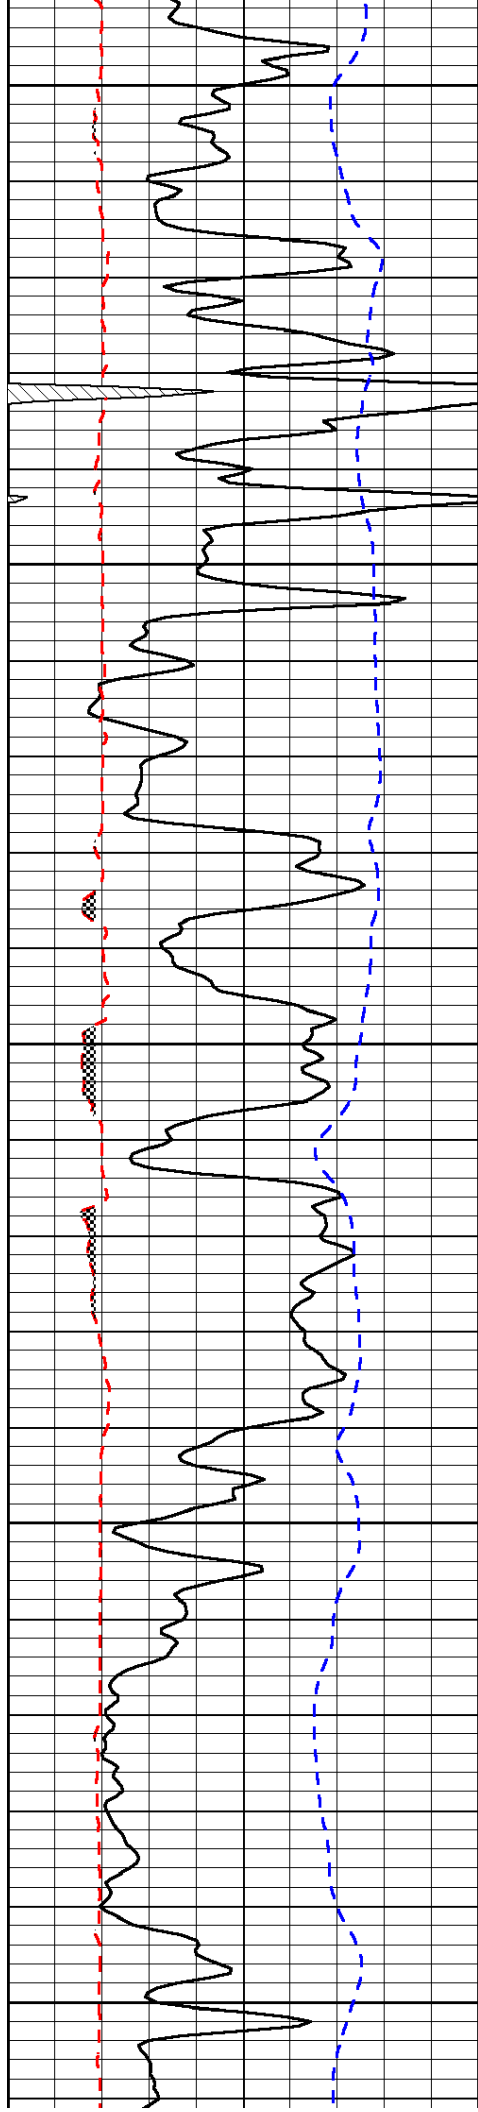


5000

5050

5100

5150

5200

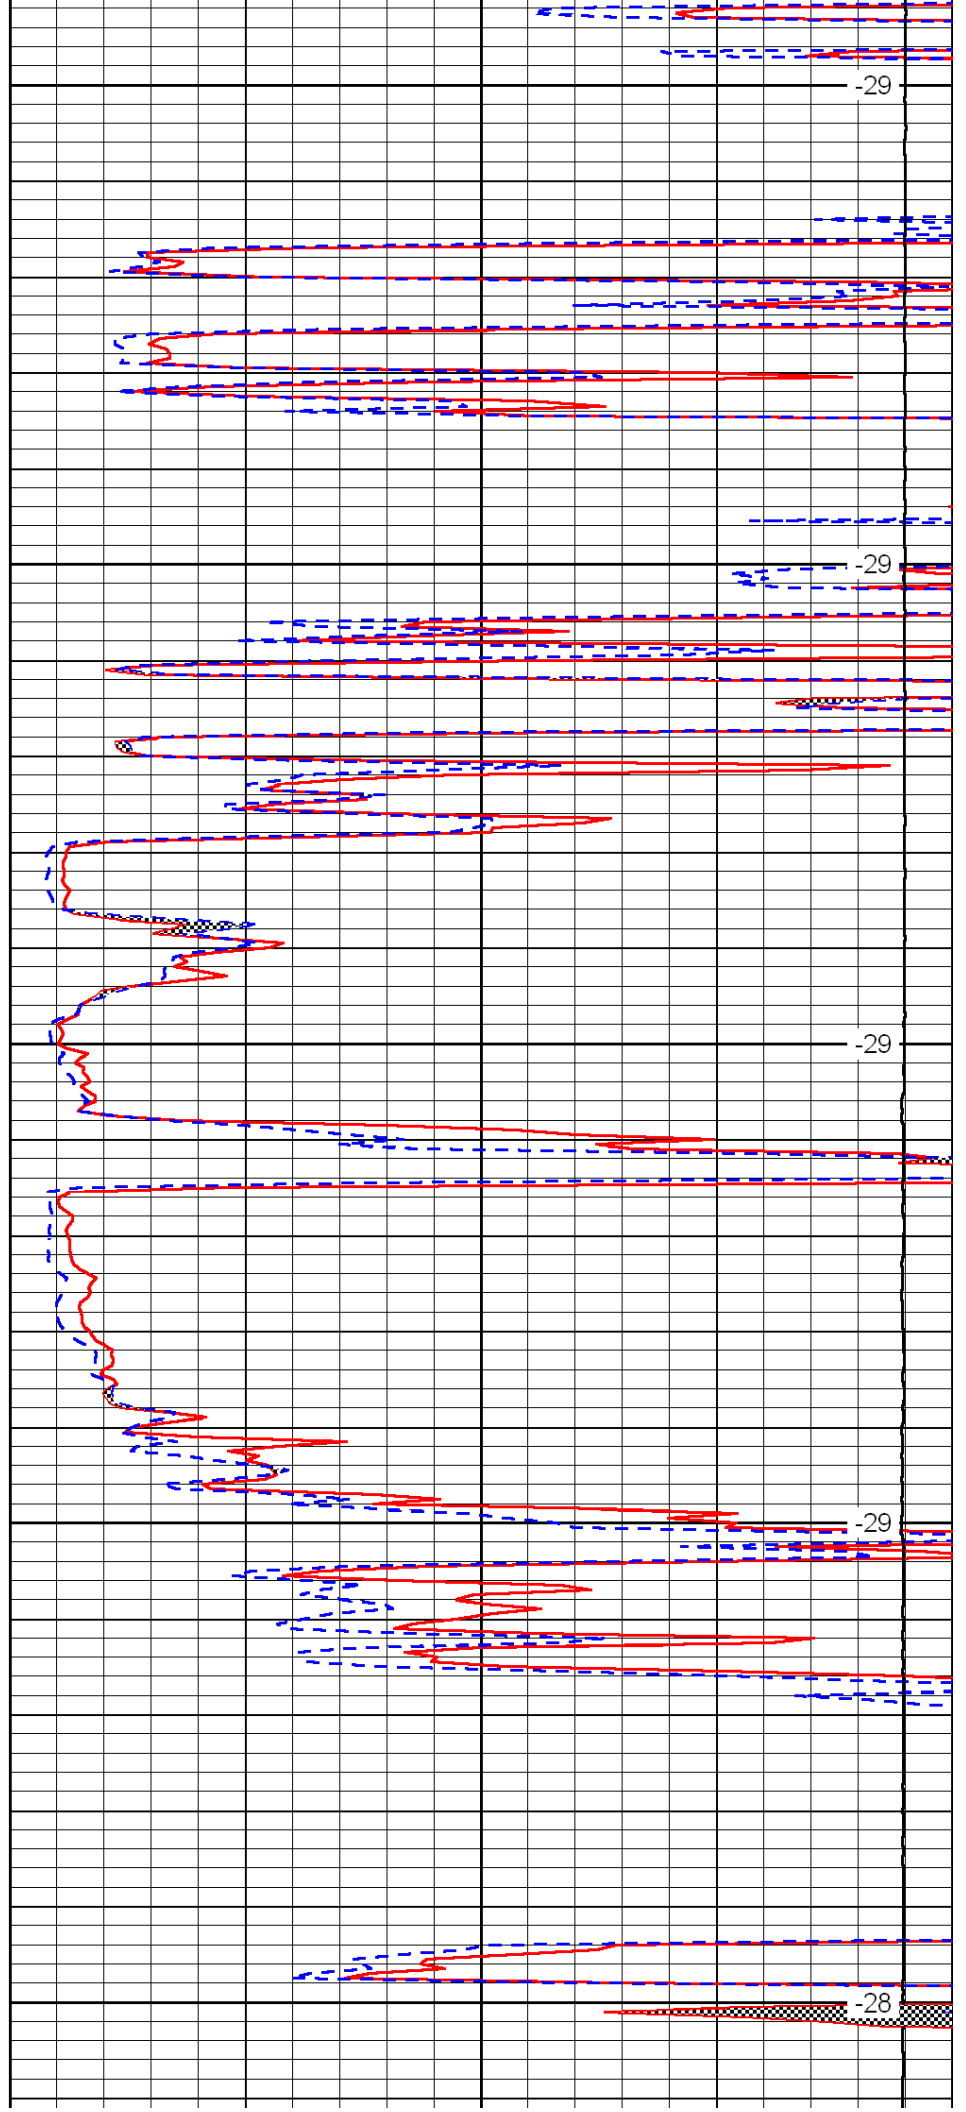


-29

-29

-29

-29

-28

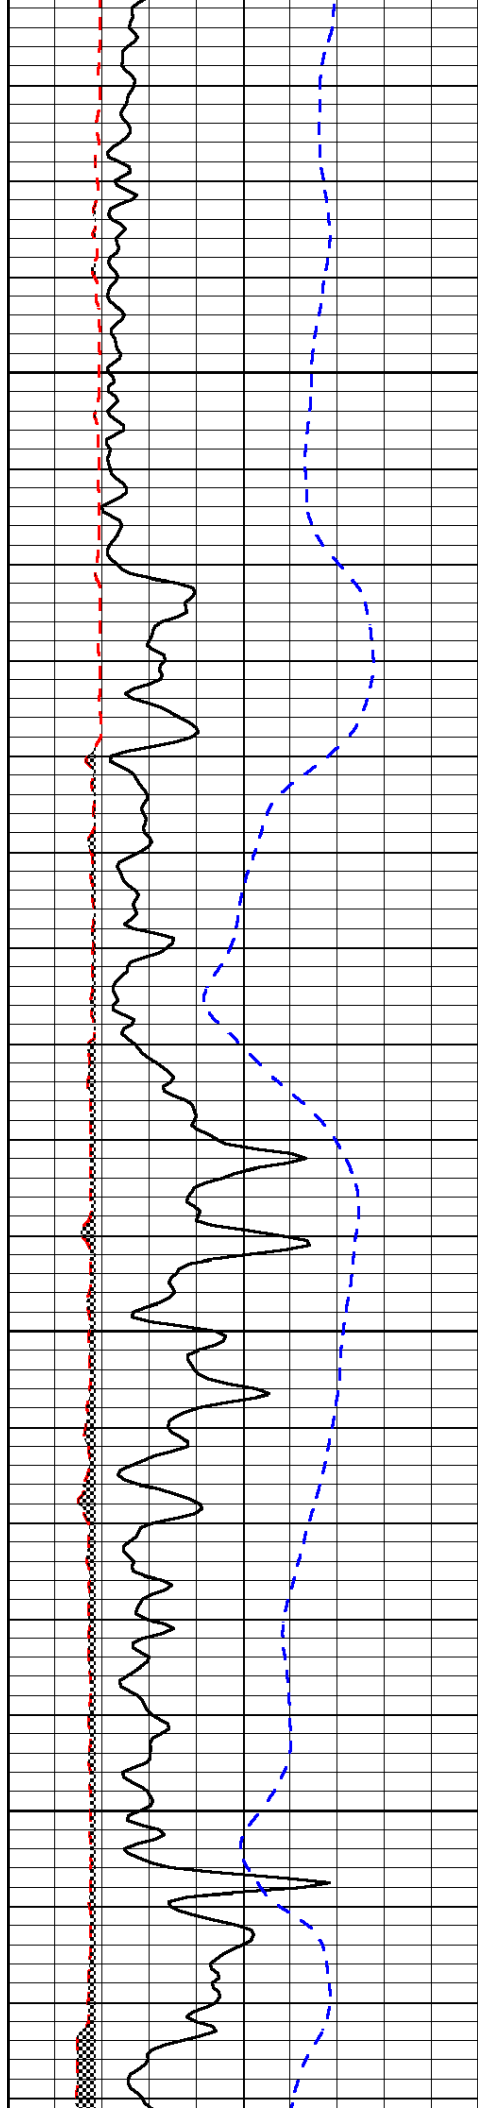



5250

5300


5350

5400

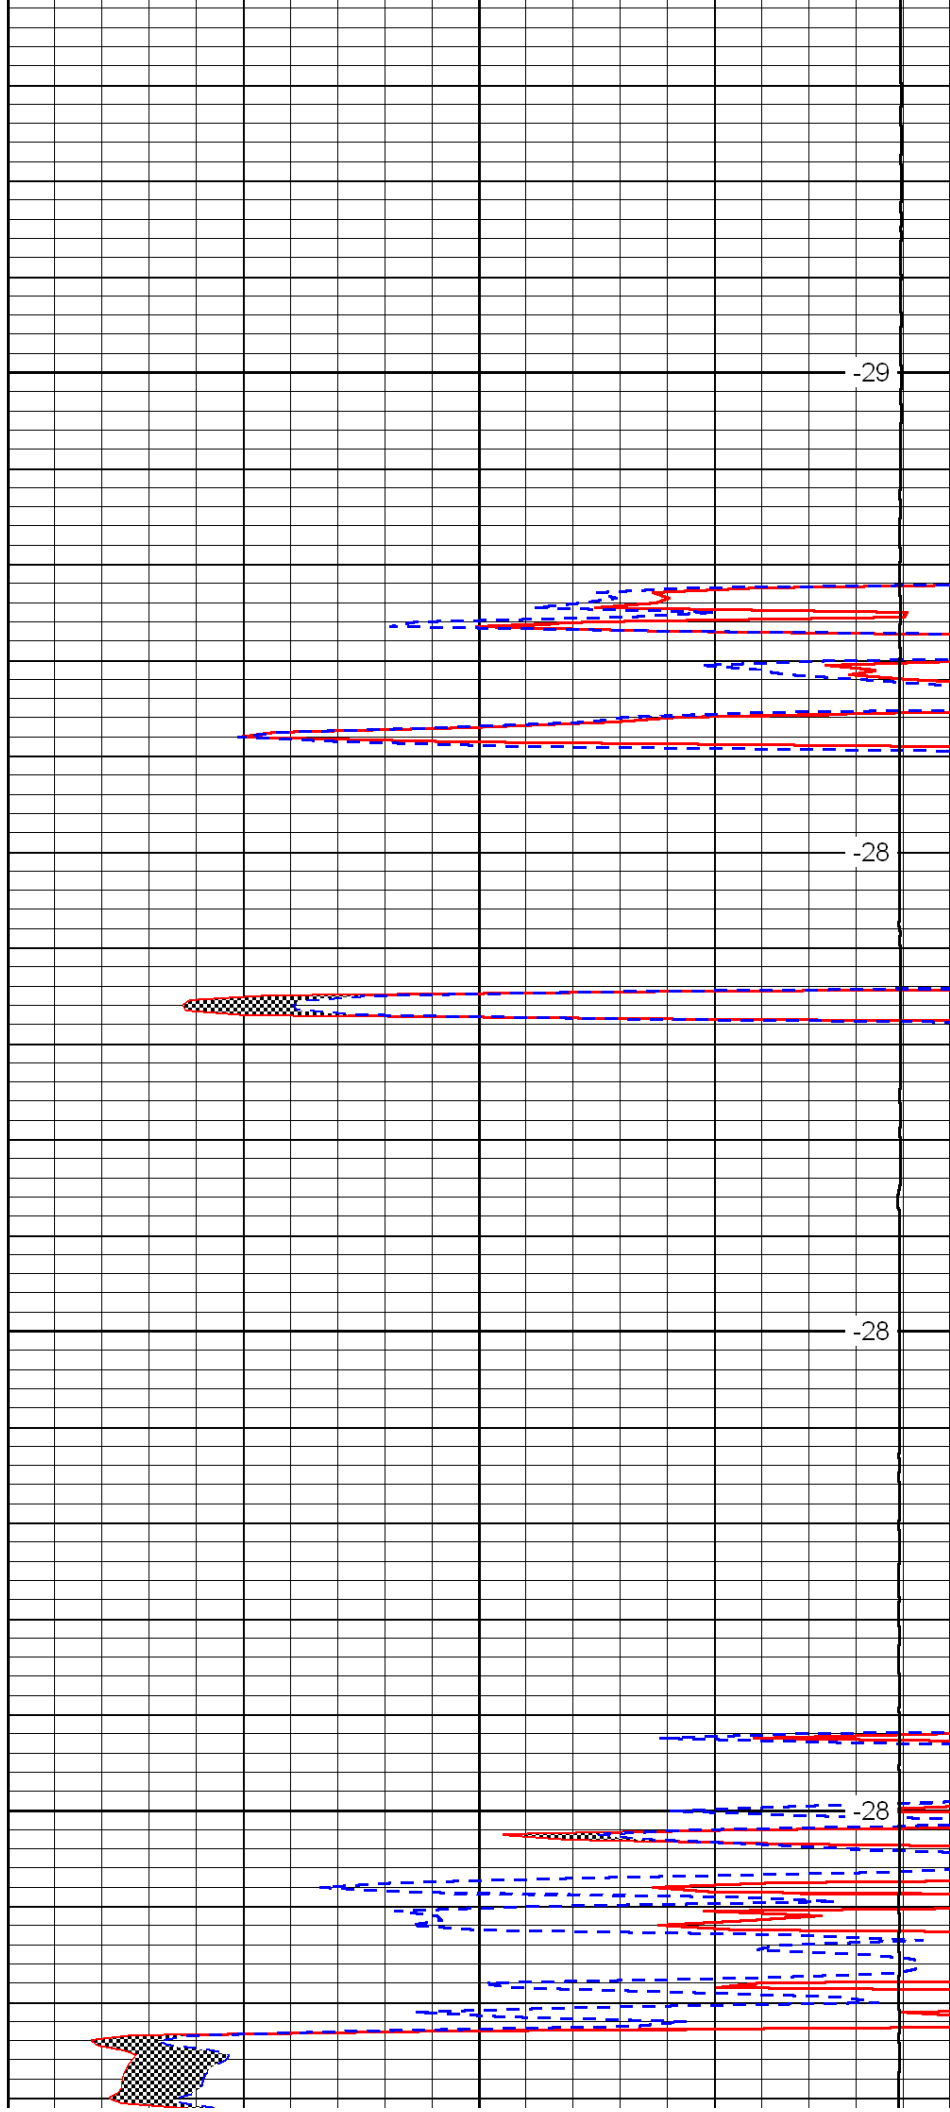

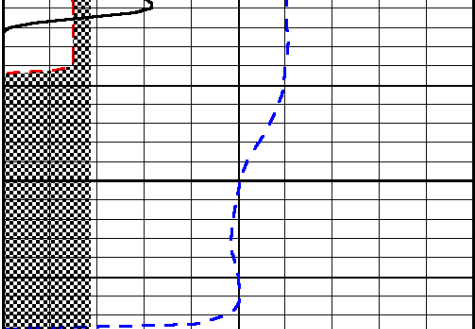

5450

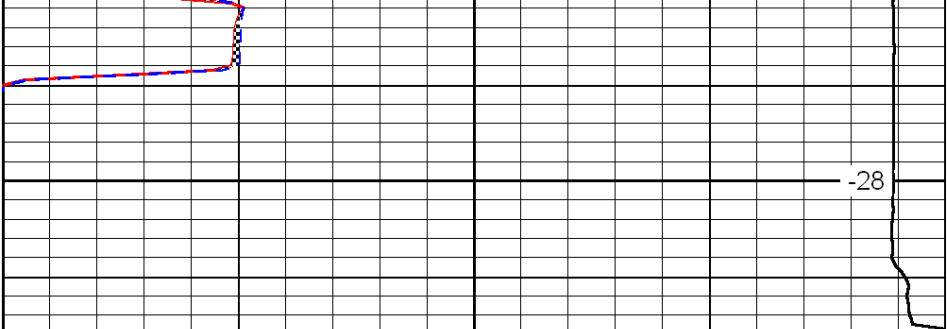

-28

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

LSPD