



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-009-25506-00-00		Company CG Oil, LLC	
Well MJR No. 1		Field Trapp	
County Barton		State Kansas	
Location W/2 - NE - SW/4 1980' FSL & 1650' FWL		Other Services CNL/CDL DIL	
Sec: 20 Twp: 16 S Rge: 13 W		Elevation	
Permanent Datum Ground Level		K.B. 1956	
Log Measured From Kelly Bushing		D.F. 1948	
Drilling Measured From Kelly Bushing		G.L. 1948	
Date	1/20/2011		
Run Number	Two		
Depth Driller	3500		
Depth Logger	3500		
Bottom Logged Interval	3499		
Top Log Interval	2750		
Casing Driller	8.625 @ 907		
Casing Logger	903		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	3200		
Density / Viscosity	9.1 53		
pH / Fluid Loss	10.0 7.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	1.10 @ 50		
Rmf @ Meas. Temp	0.83 @ 50		
Rmc @ Meas. Temp	1.49 @ 50		
Source of Rmf / Rmc	Charts		
Rm @ BHT	0.50 @ 111		
Operating Rig Time	3 Hours		
Max Rec. Temp. F	111		
Equipment Number	15		
Location	Hays		
Recorded By	B. Becker		
Witnessed By	Roger Fisher		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Susank, Ks;
1 West; 1/2 North; East Into

Database File: c:\warrior\data\cg oil_mjr no. 1\cg_oilhd.db
Dataset Pathname: DIL/cgstk
Presentation Format: micro
Dataset Creation: Thu Jan 20 11:03:51 2011
Charted by: Depth in Feet scaled 1:240

Charted by: Depth in Feet scaled 1:2.15		
0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

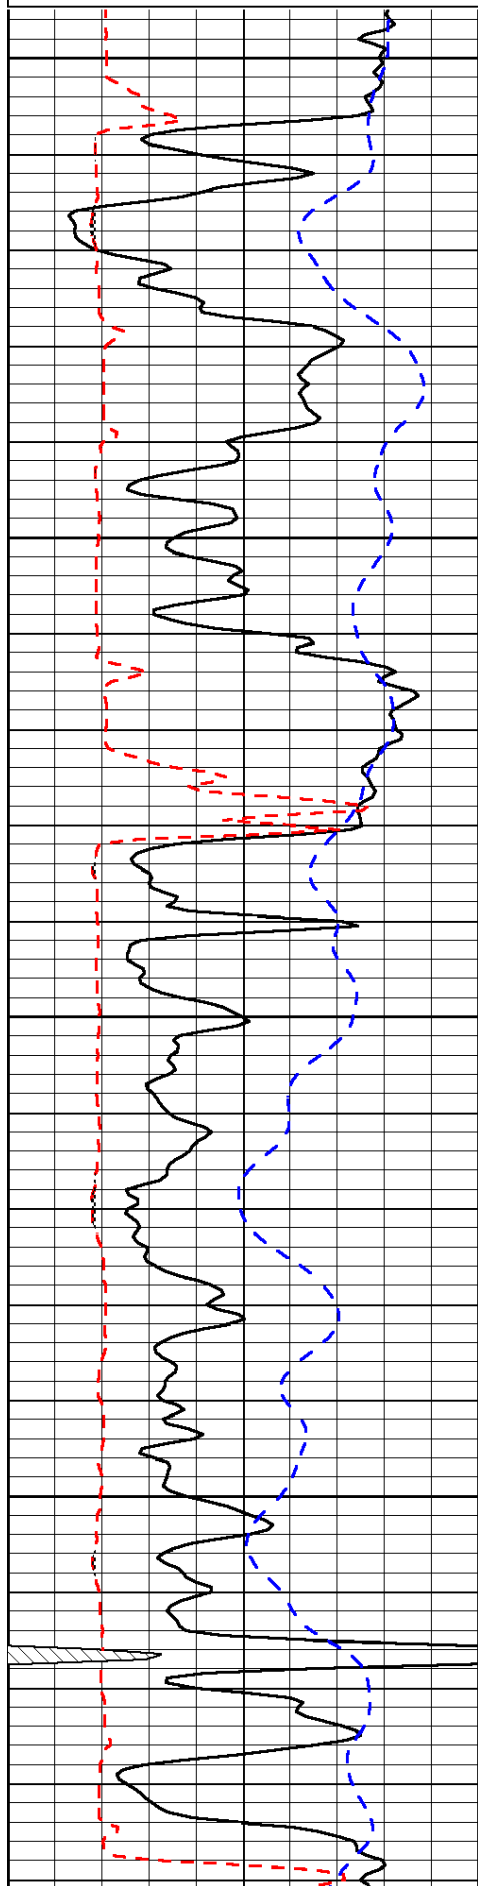


2750

2800

2850

2900

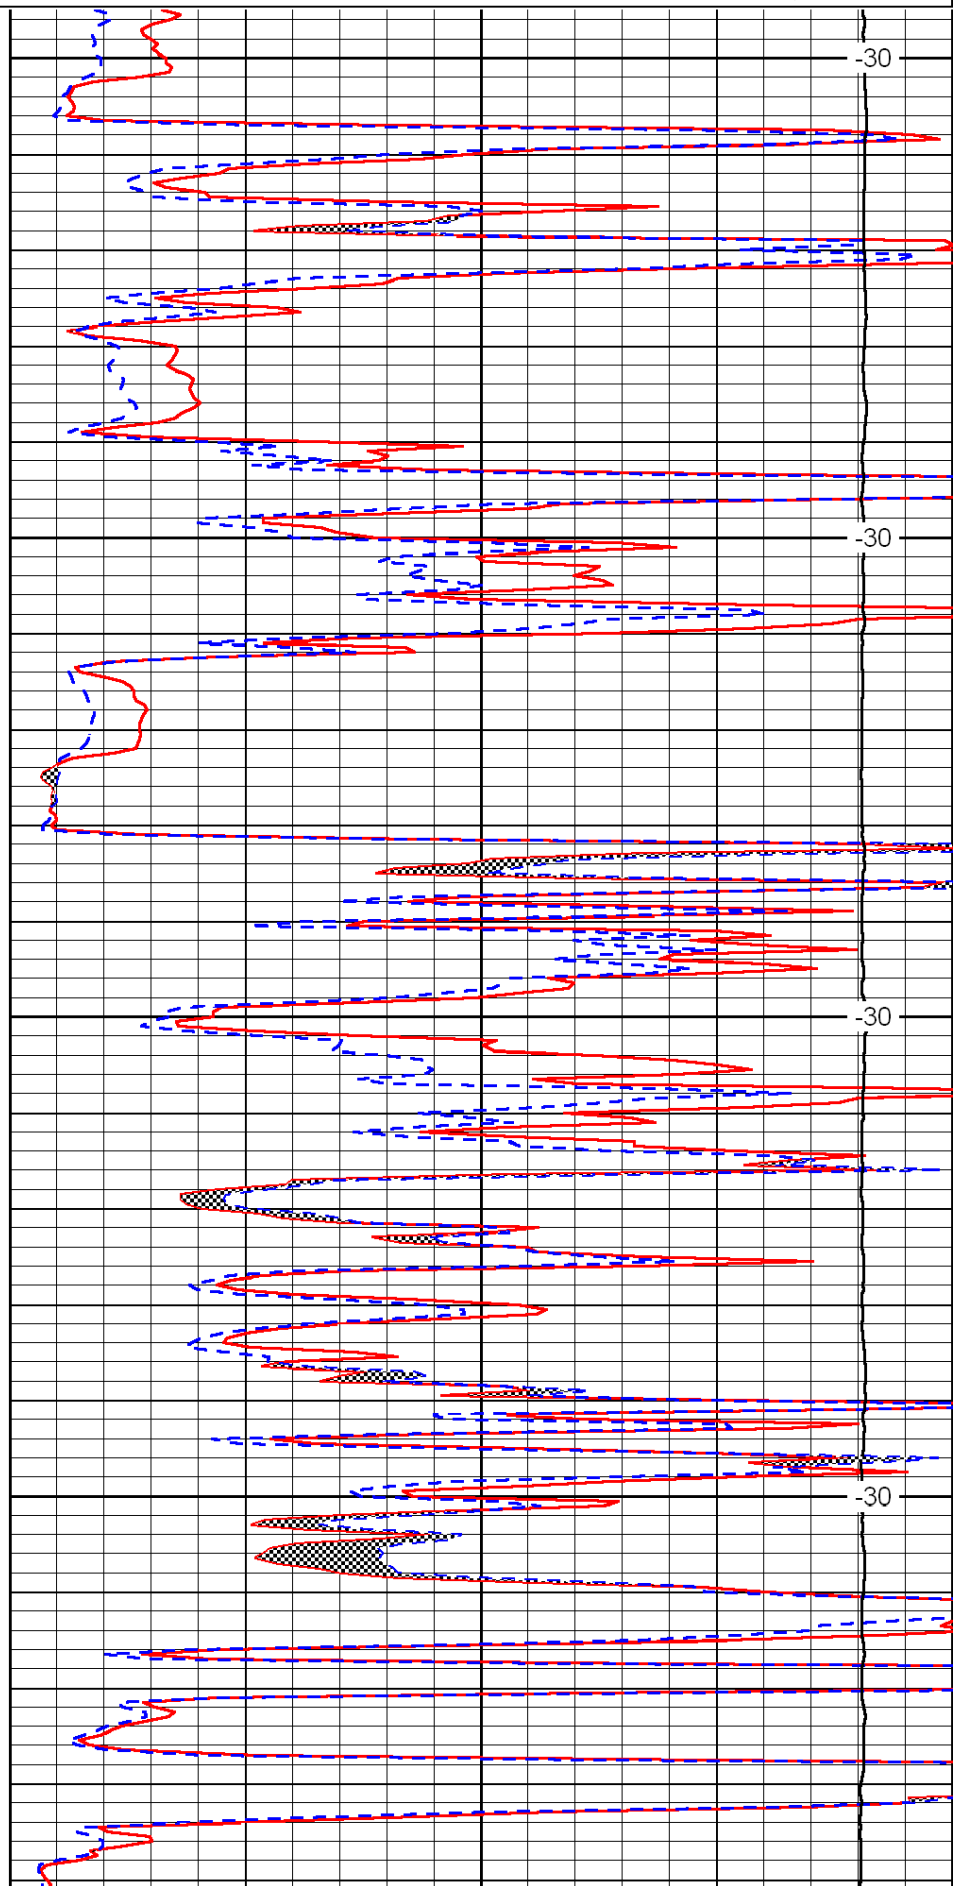


-30

-30

-30

-30

LSPD

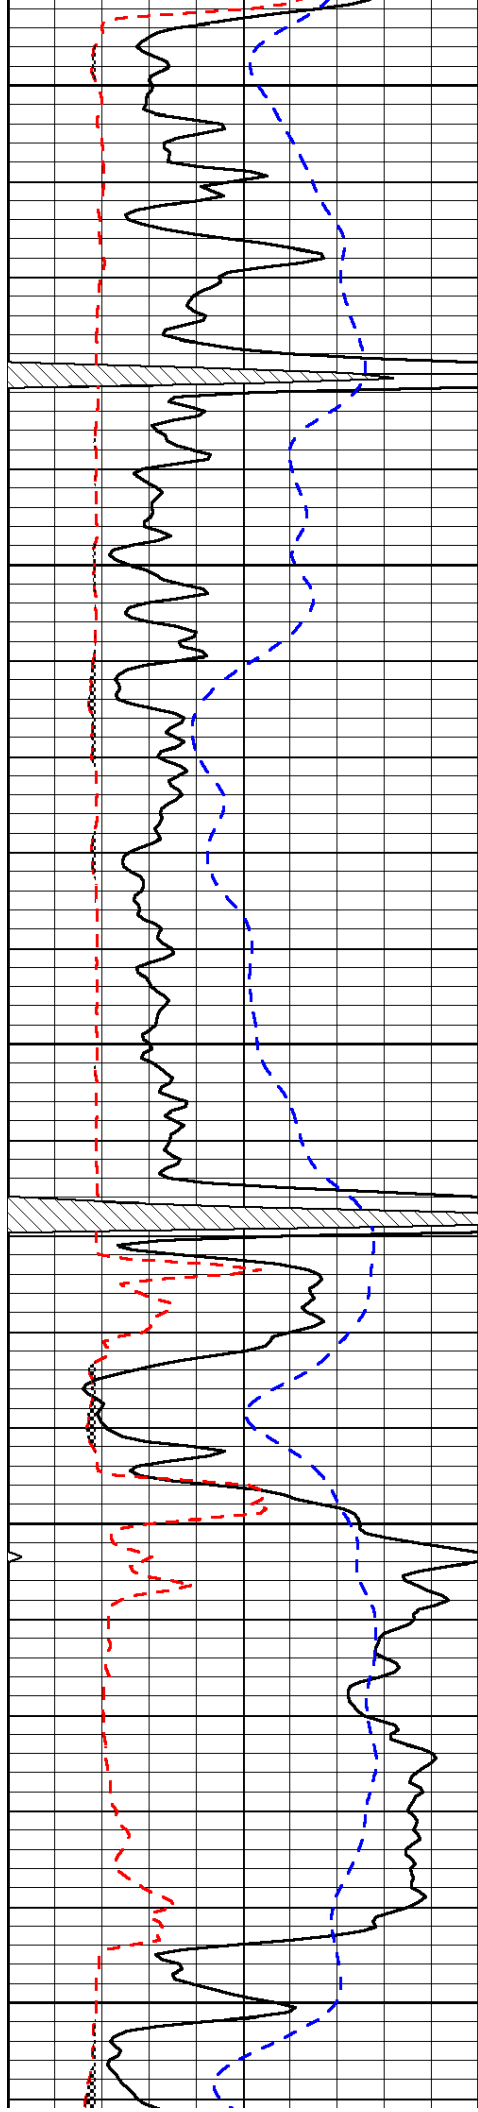


2950

3000

3050

3100

3150

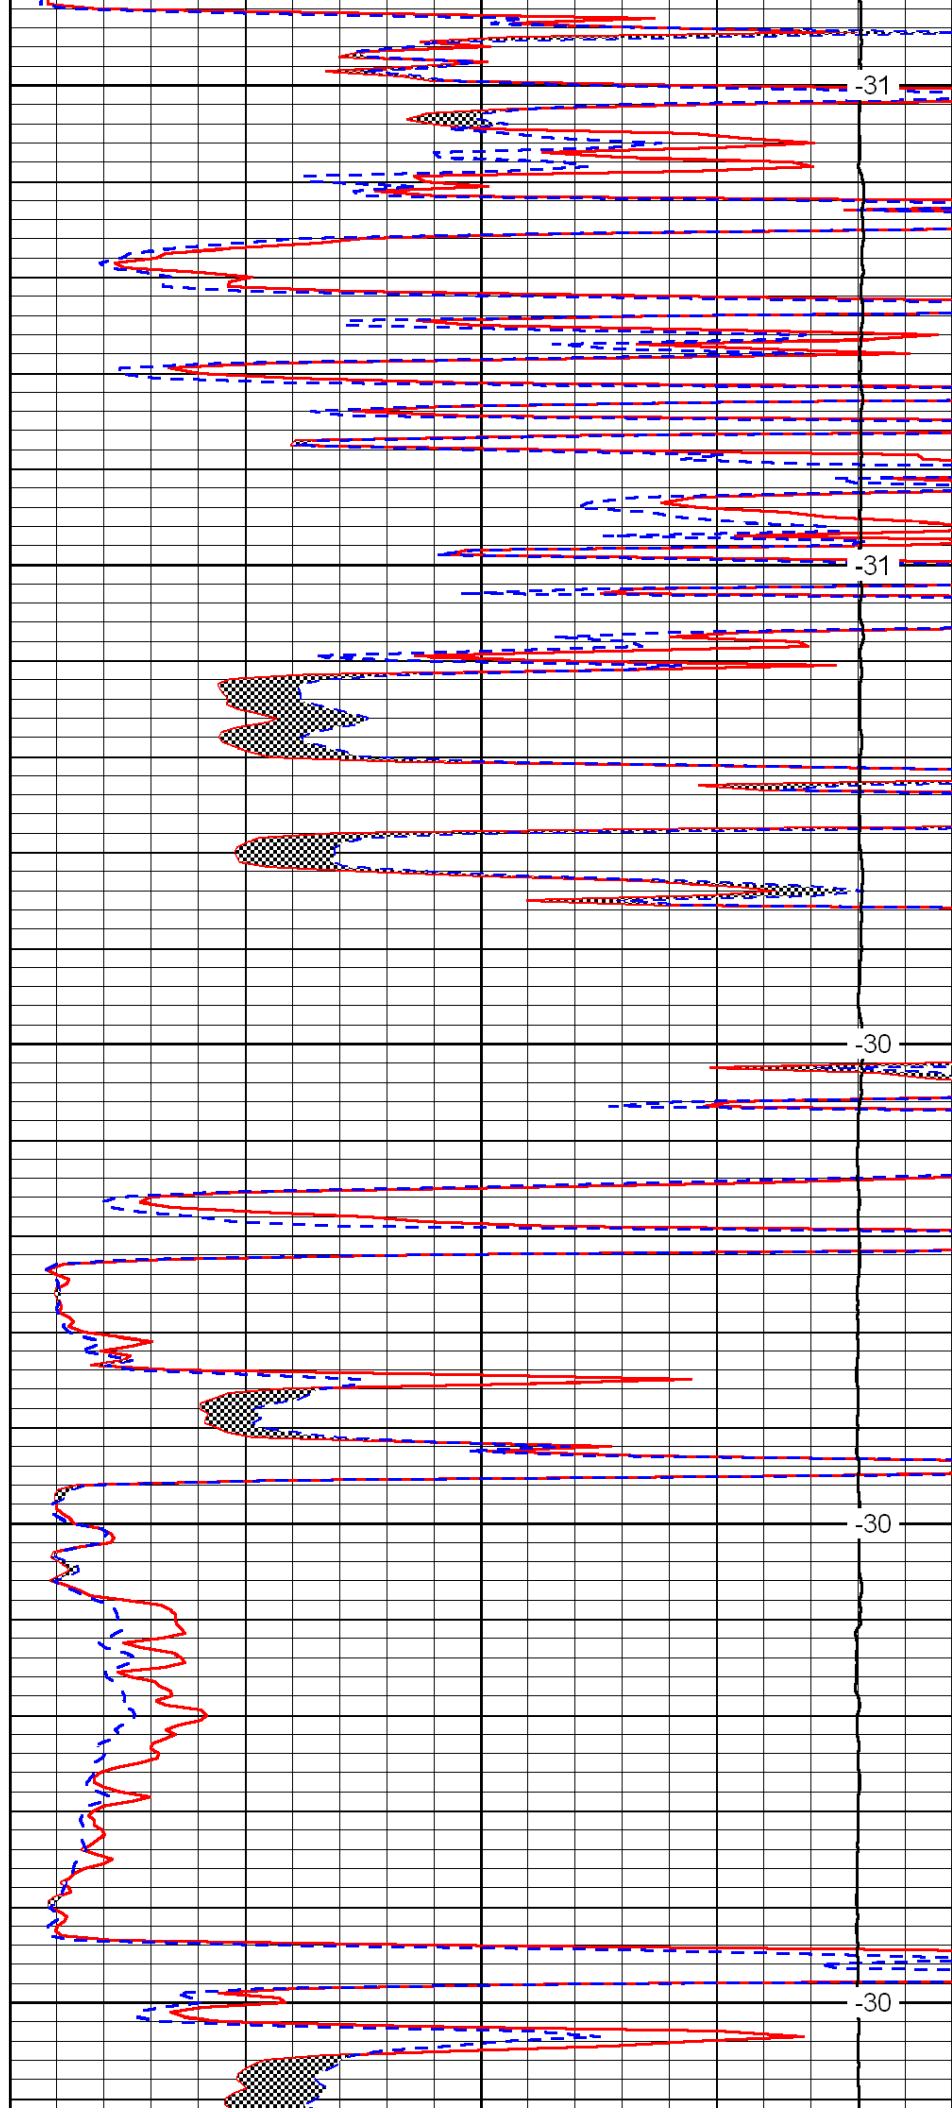


-31

-31

-30

-30

-30

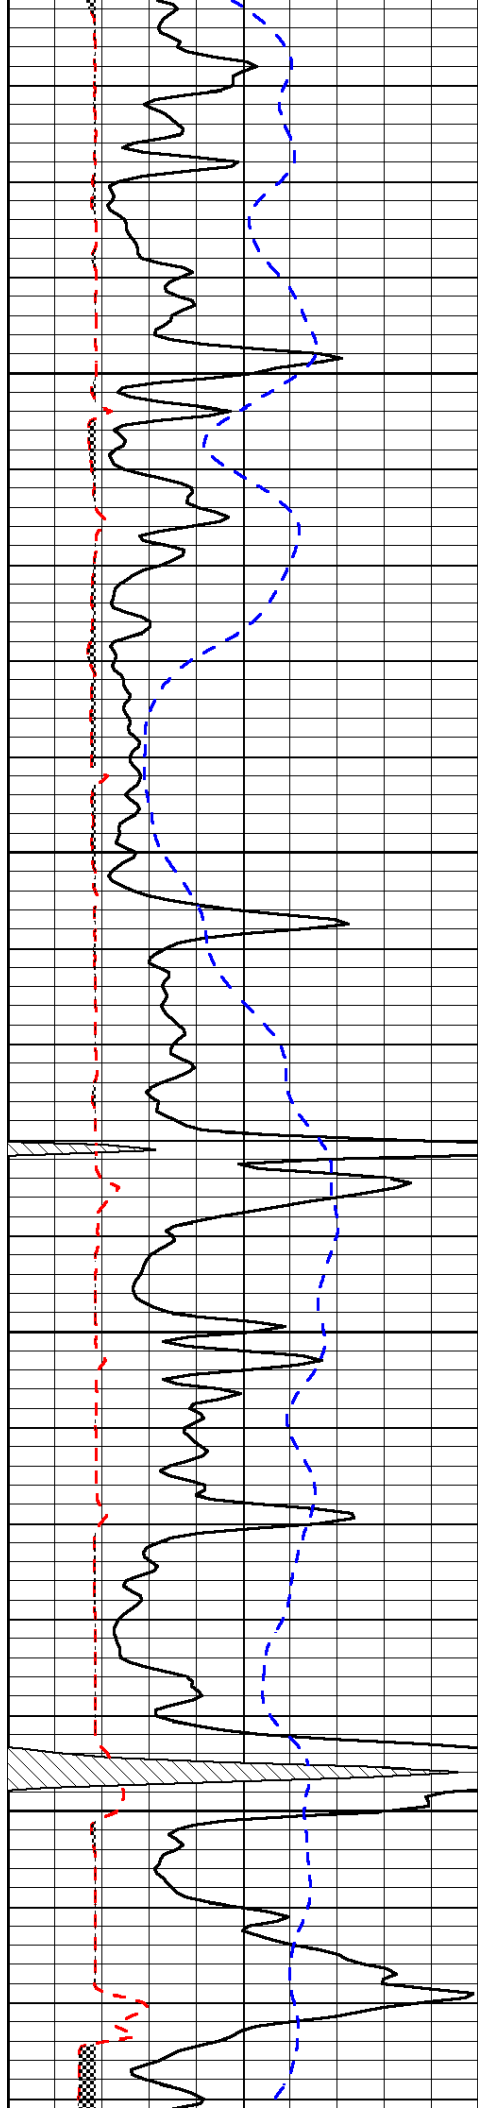




3200

3250

3300

3350

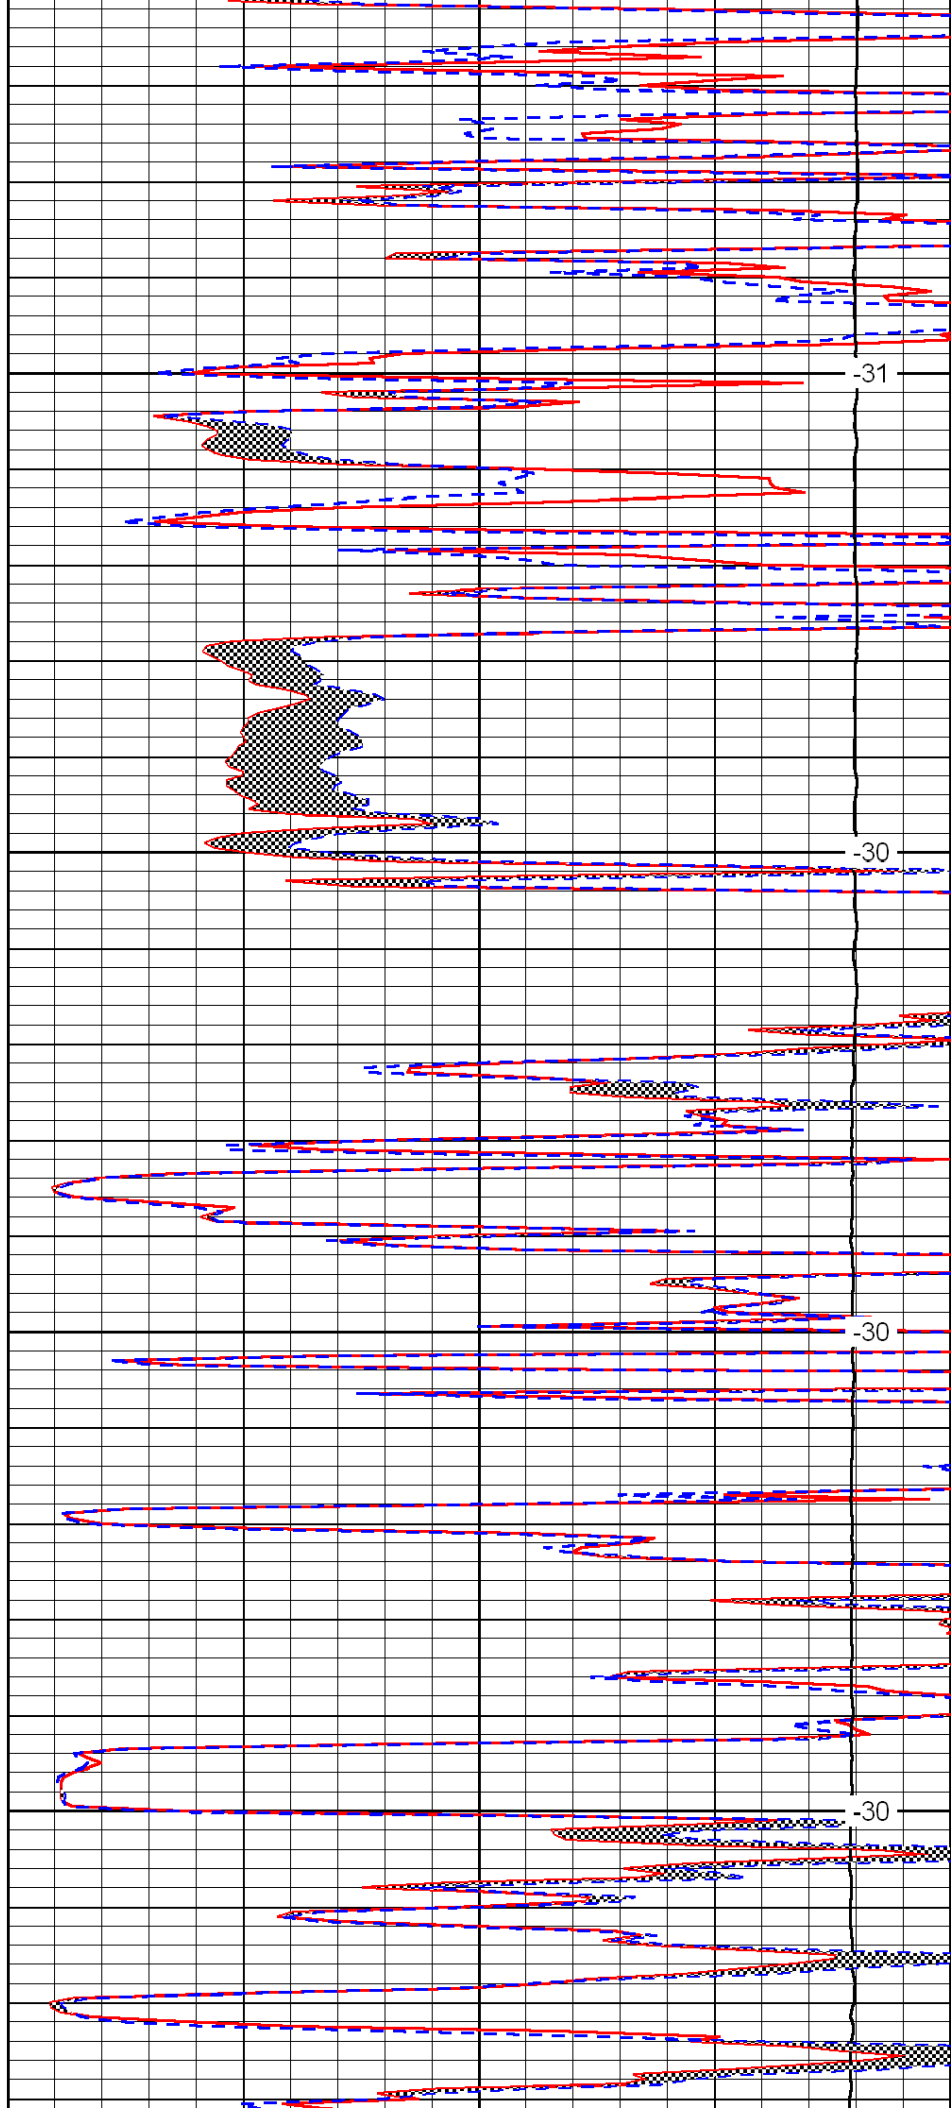

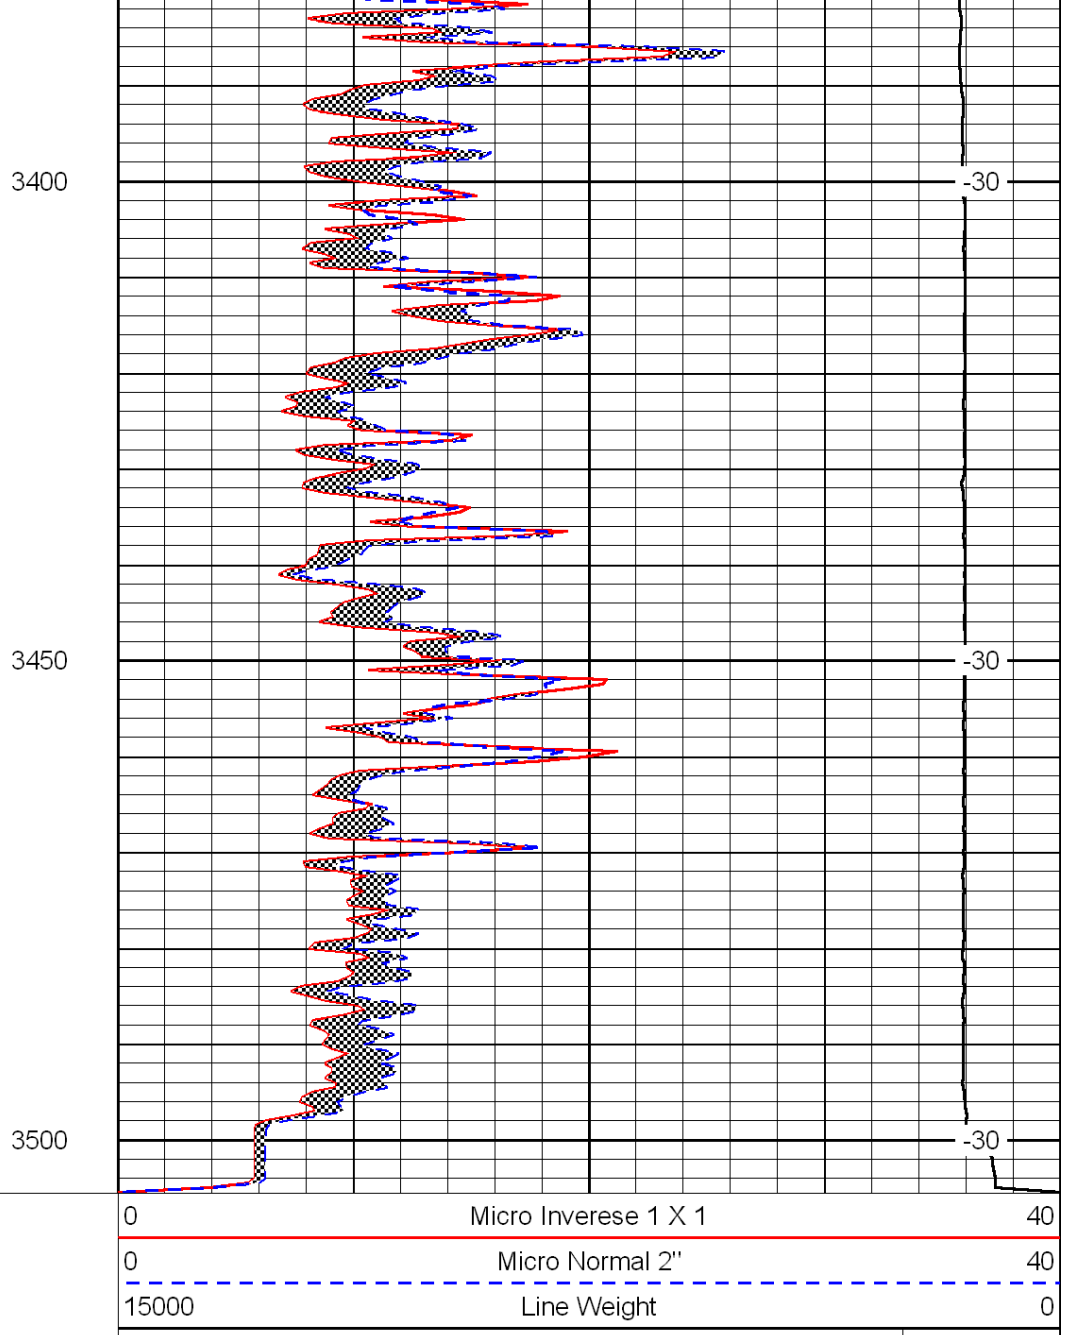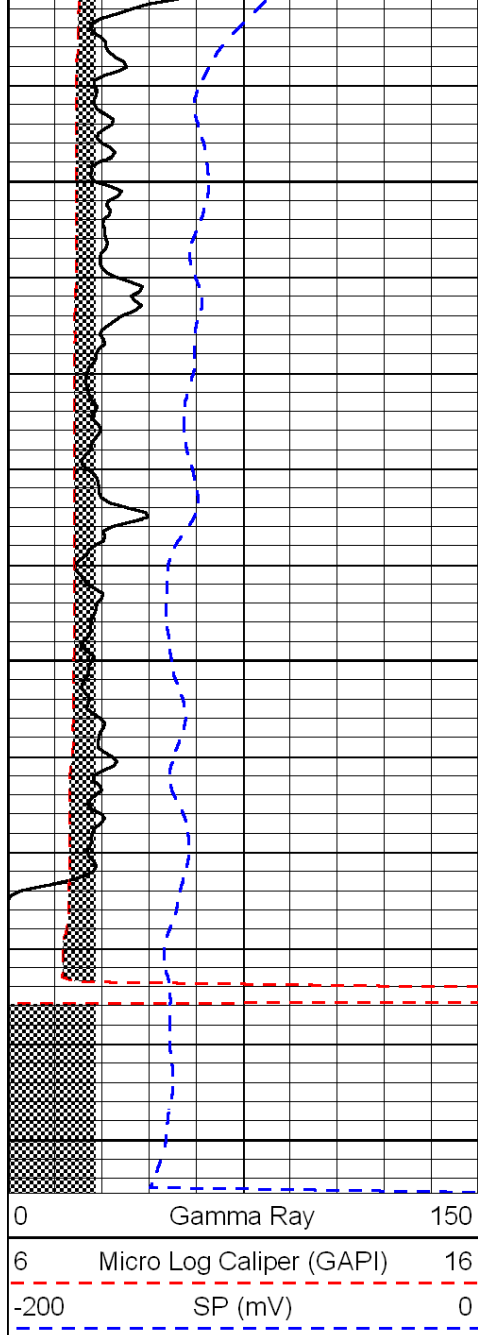

LSPD