



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.		Company Falcon Exploration, Inc.			
15-069-20334-00-00		Well M.D. Isaac No. 1-34 (NW)			
		Field Wildcat			
		County Gray		State Kansas	
		Location NW - SW - SE - NW 2140' FNL & 1620' FWL			
Sec: 34		Twp: 27 S		Rge: 30 W	
Permanent Datum		Ground Level		Elevation 2799	
Log Measured From		Kelly Bushing		10 Ft. Above Perm. Datum	
Drilling Measured From		Kelly Bushing		K.B. 2809 D.F. 2799 G.L. 2799	
Date		1/16/2011			
Run Number		Two			
Depth Driller		5458			
Depth Logger		5462			
Bottom Logged Interval		5461			
Top Log Interval		2600			
Casing Driller		8.625 @ 1868			
Casing Logger		1867			
Bit Size		7.875			
Type Fluid in Hole		Chemical			
Salinity, ppm CL		2.700			
Density / Viscosity		9.4 40			
pH / Fluid Loss		9.0 9.6			
Source of Sample		Flowline			
Rm @ Meas. Temp		1.50 @ 50			
Rmf @ Meas. Temp		1.13 @ 50			
Rmc @ Meas. Temp		2.03 @ 50			
Source of Rmf / Rmc		Charts			
Rm @ BHT		0.57 @ 131			
Operating Rig Time		6 Hours			
Max Rec. Temp. F		131			
Equipment Number		15			
Location		Hays			
Recorded By		B. Becker			
Witnessed By		Keith Reavis			

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Montezuma, Ks;
3-1/2 North; 8 West; 1/2 North
East Into (between houses)

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

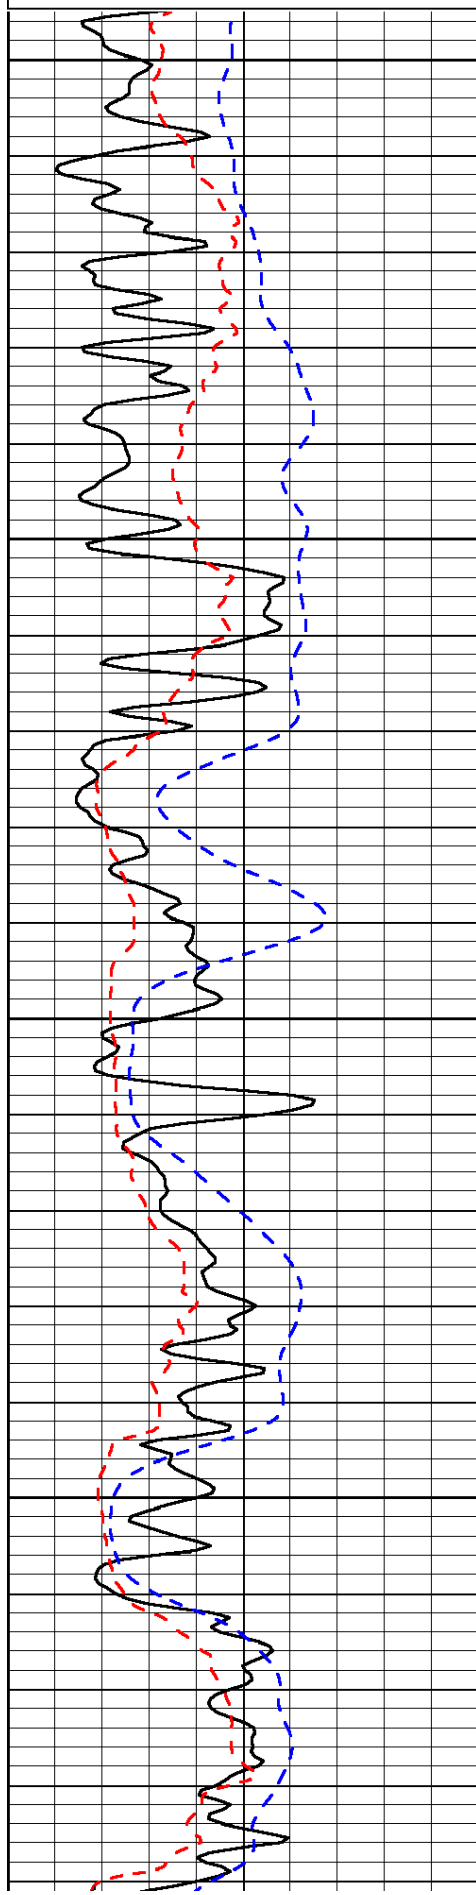


2600

2650

2700

2750

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0


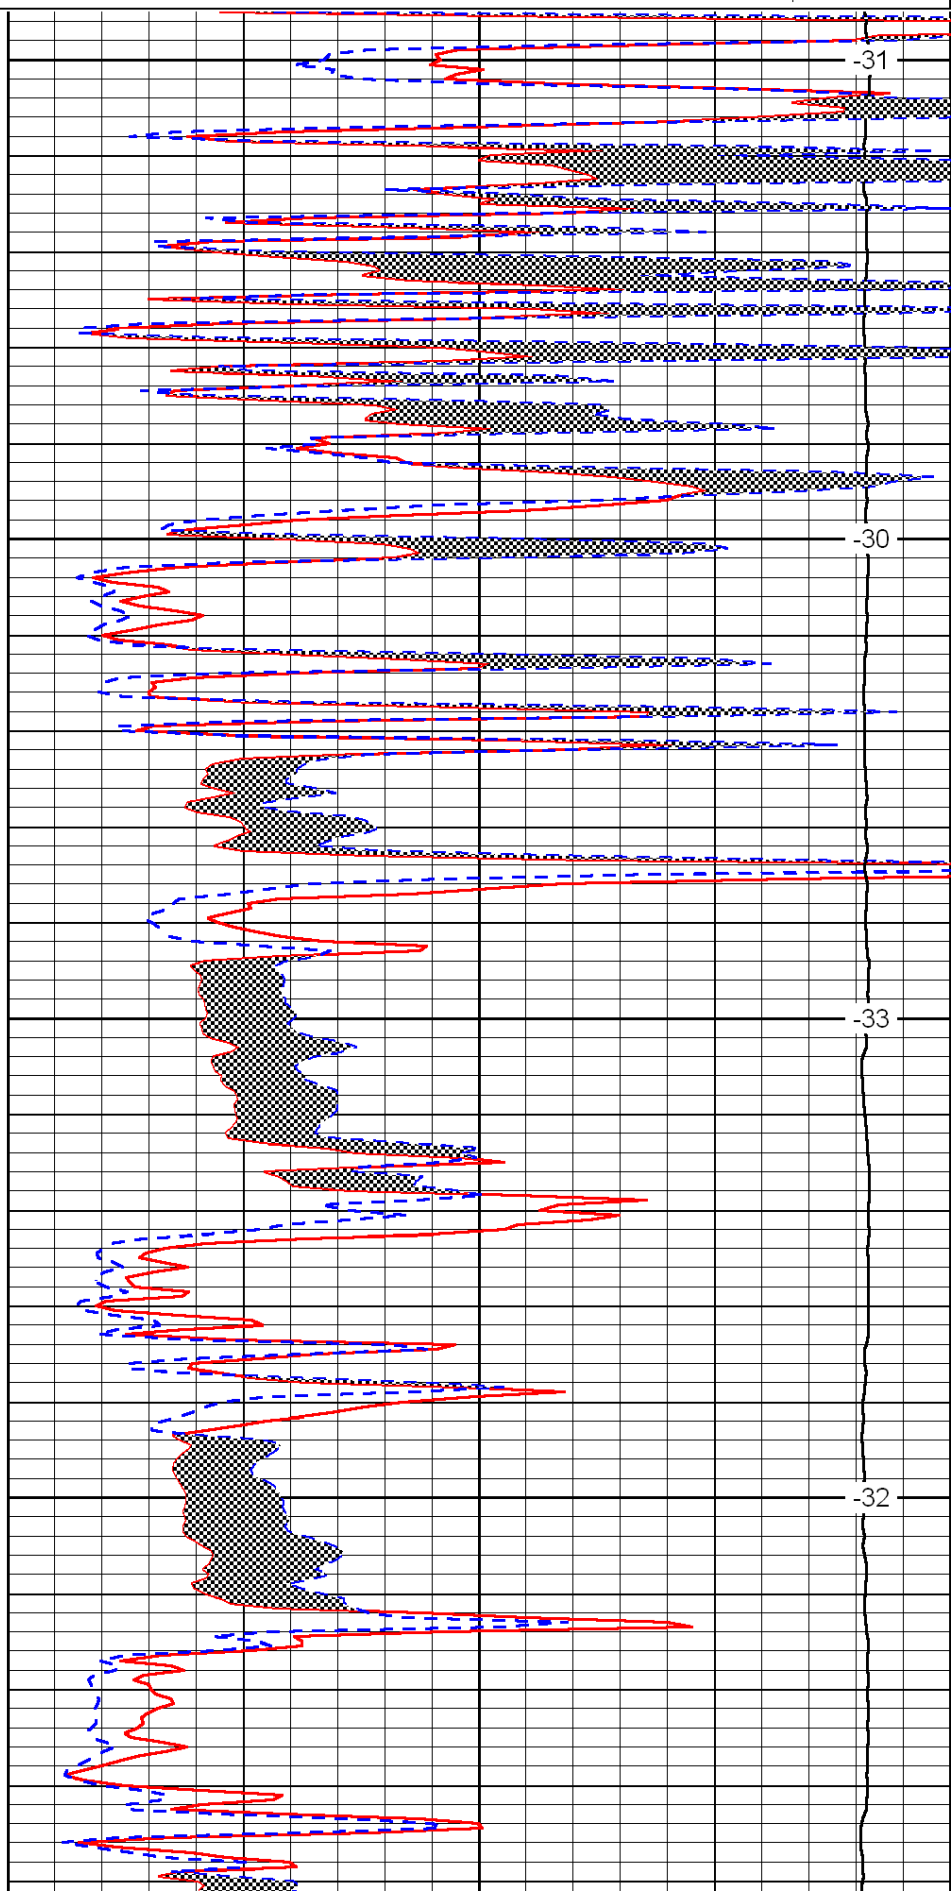




-31



-30


-33

-32

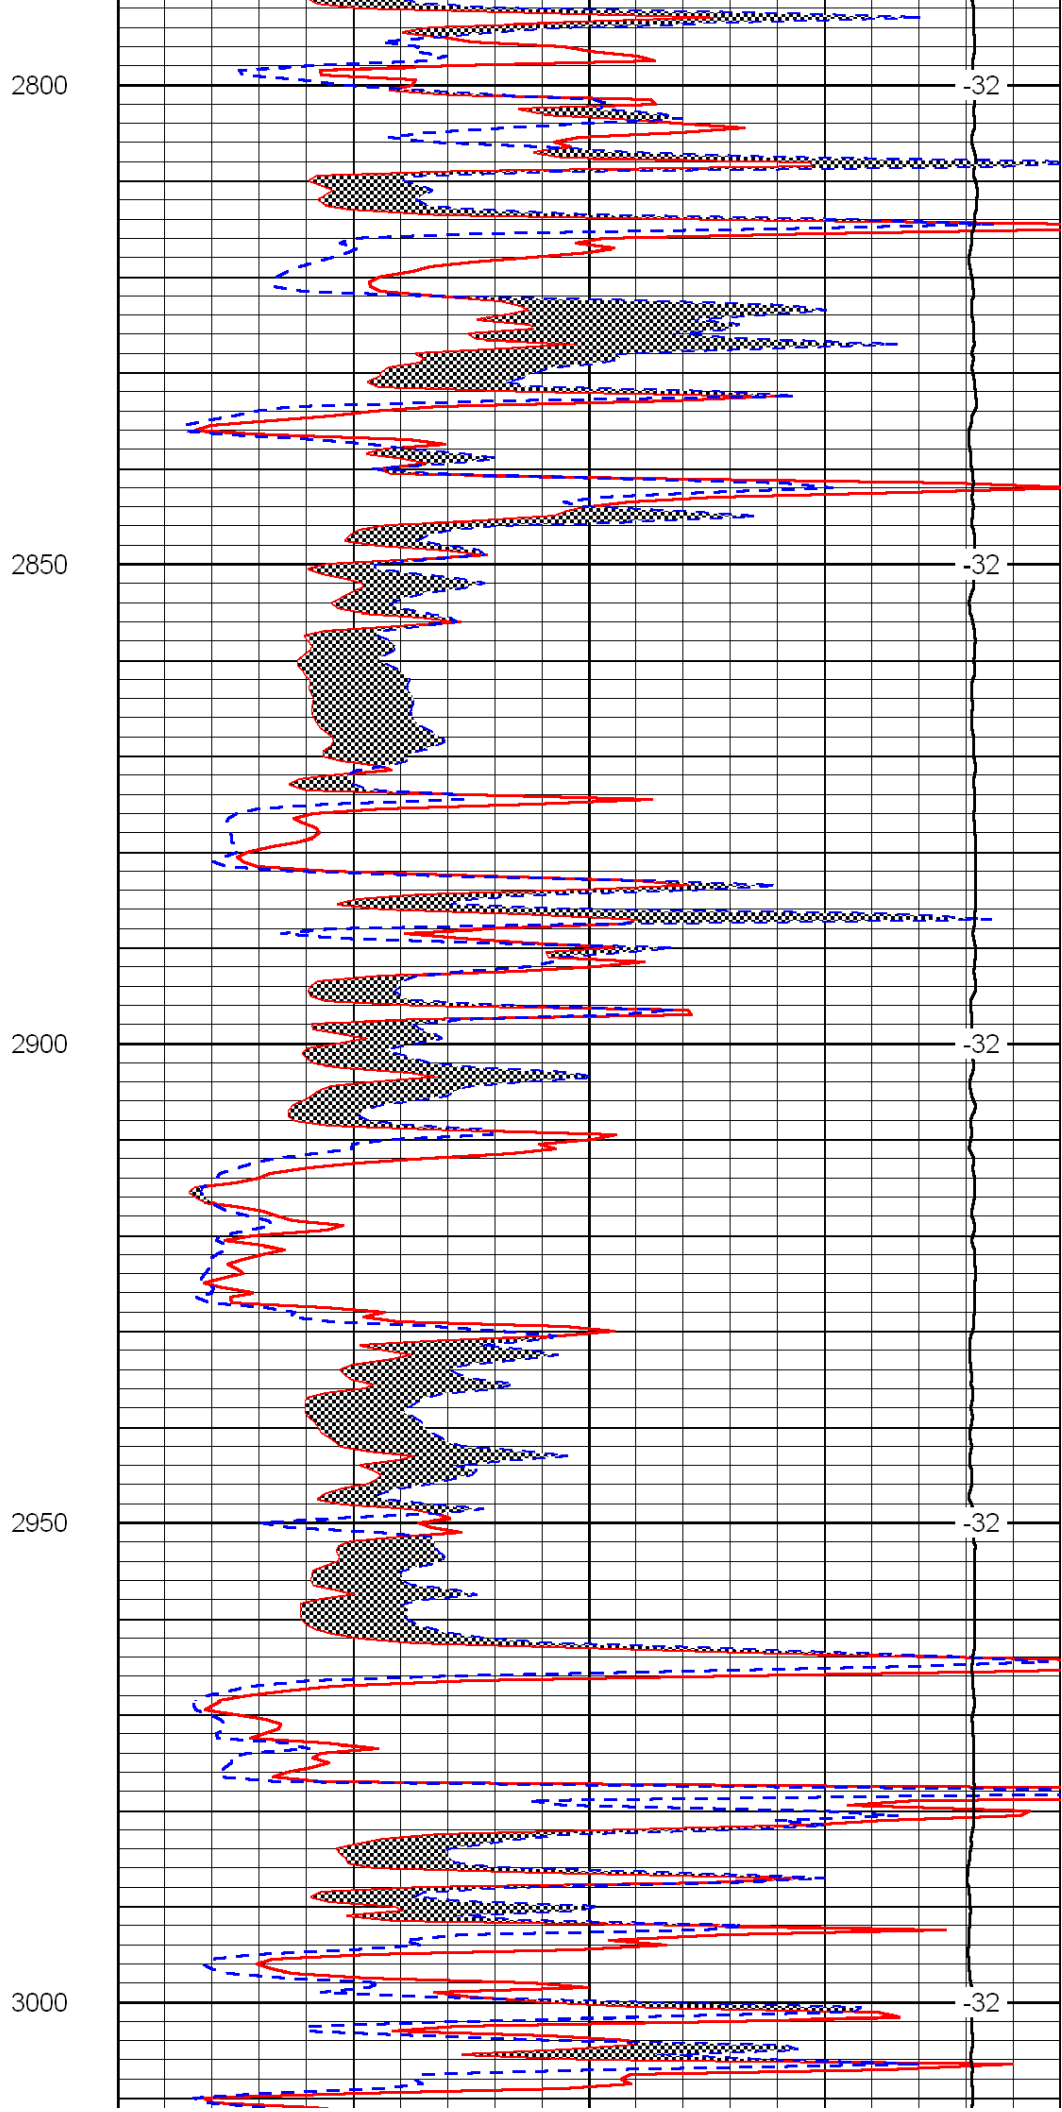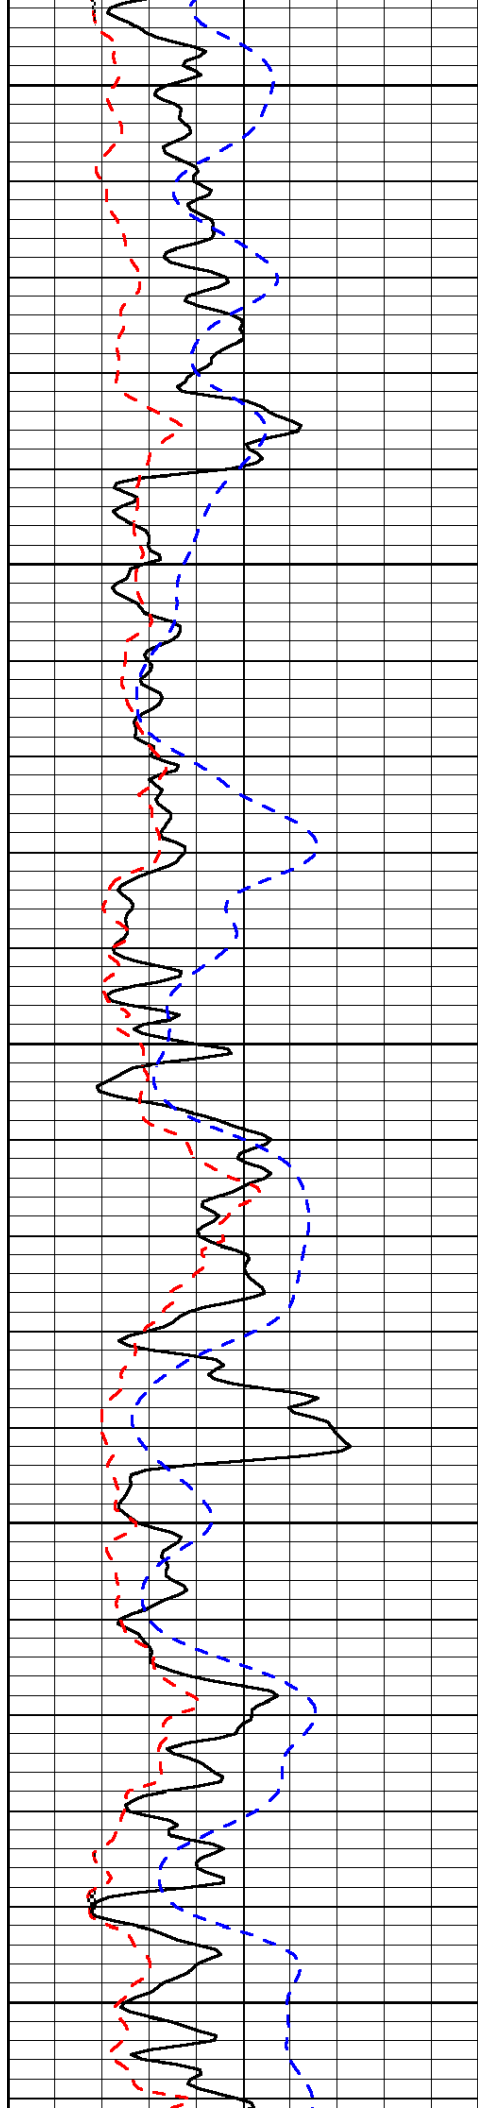

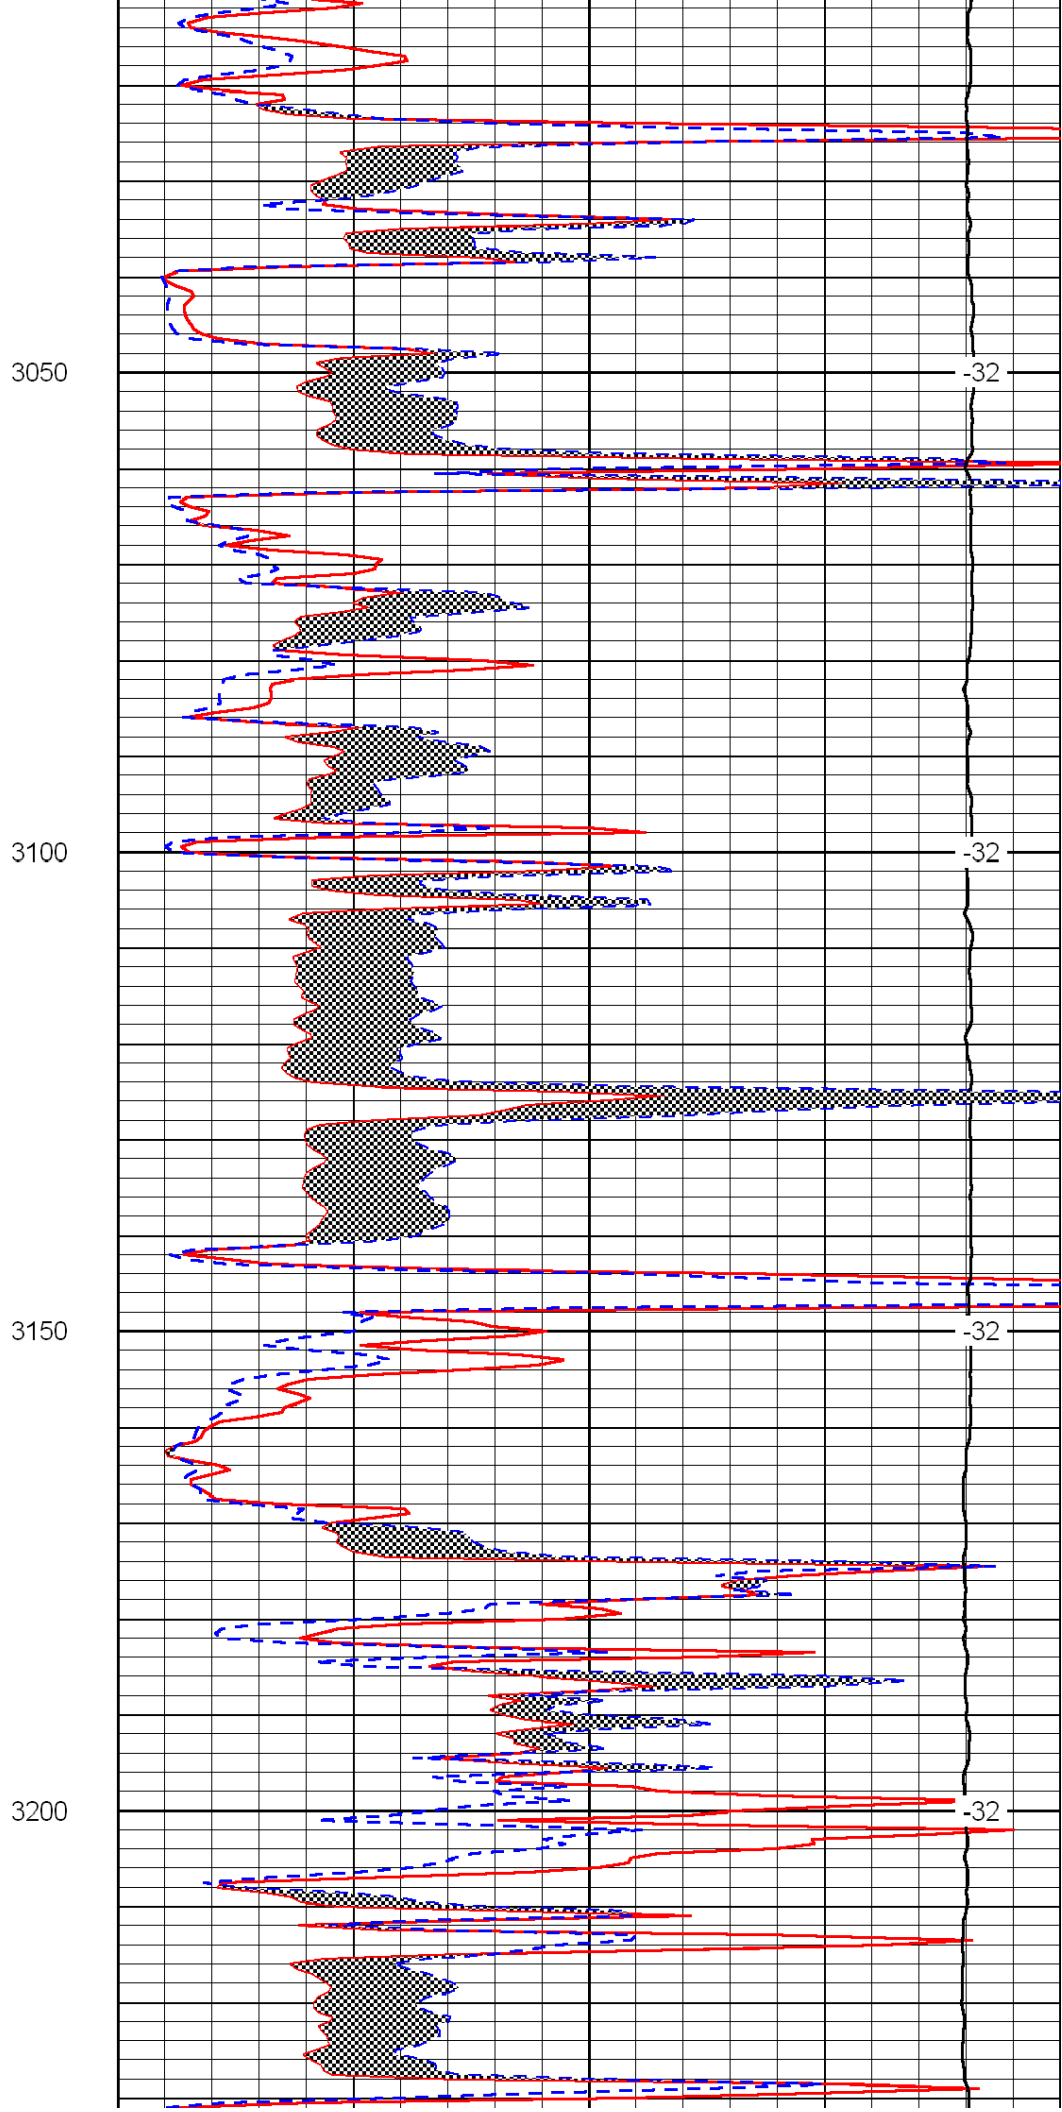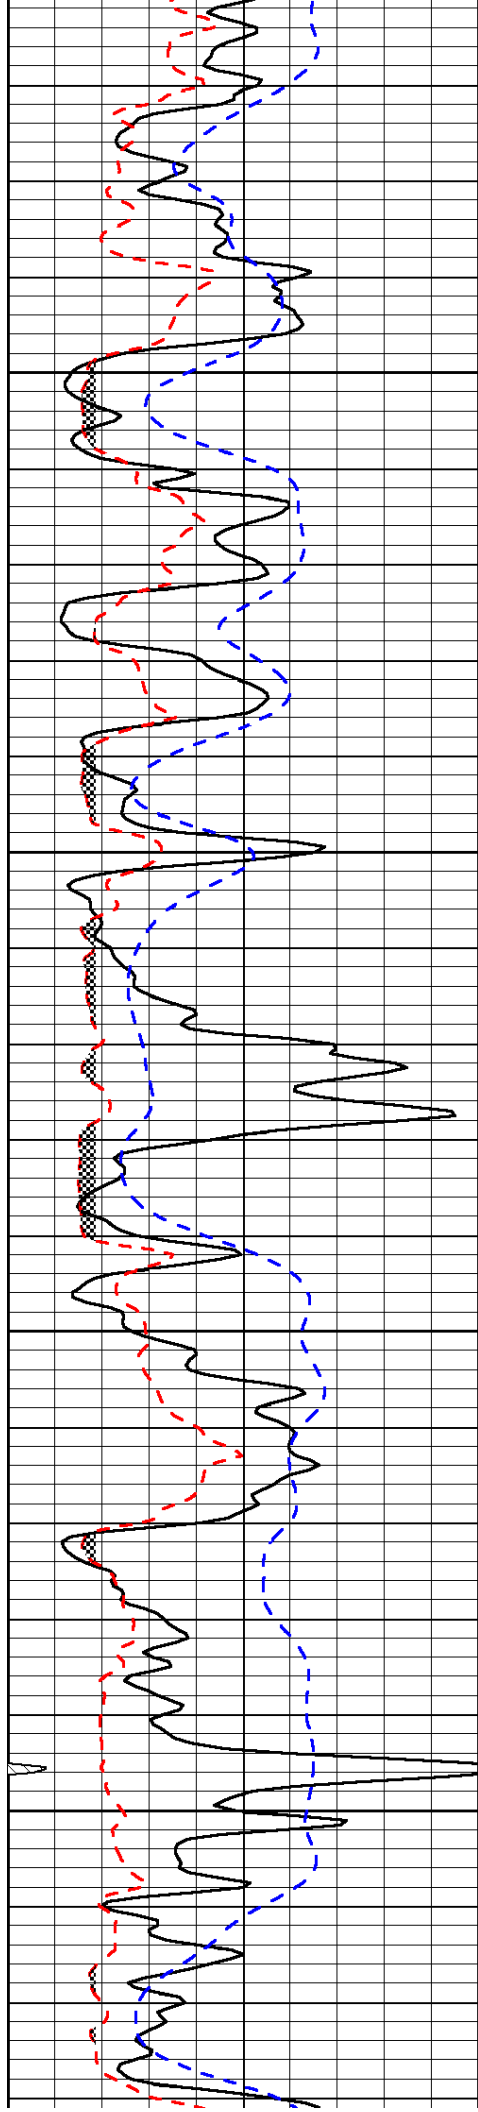

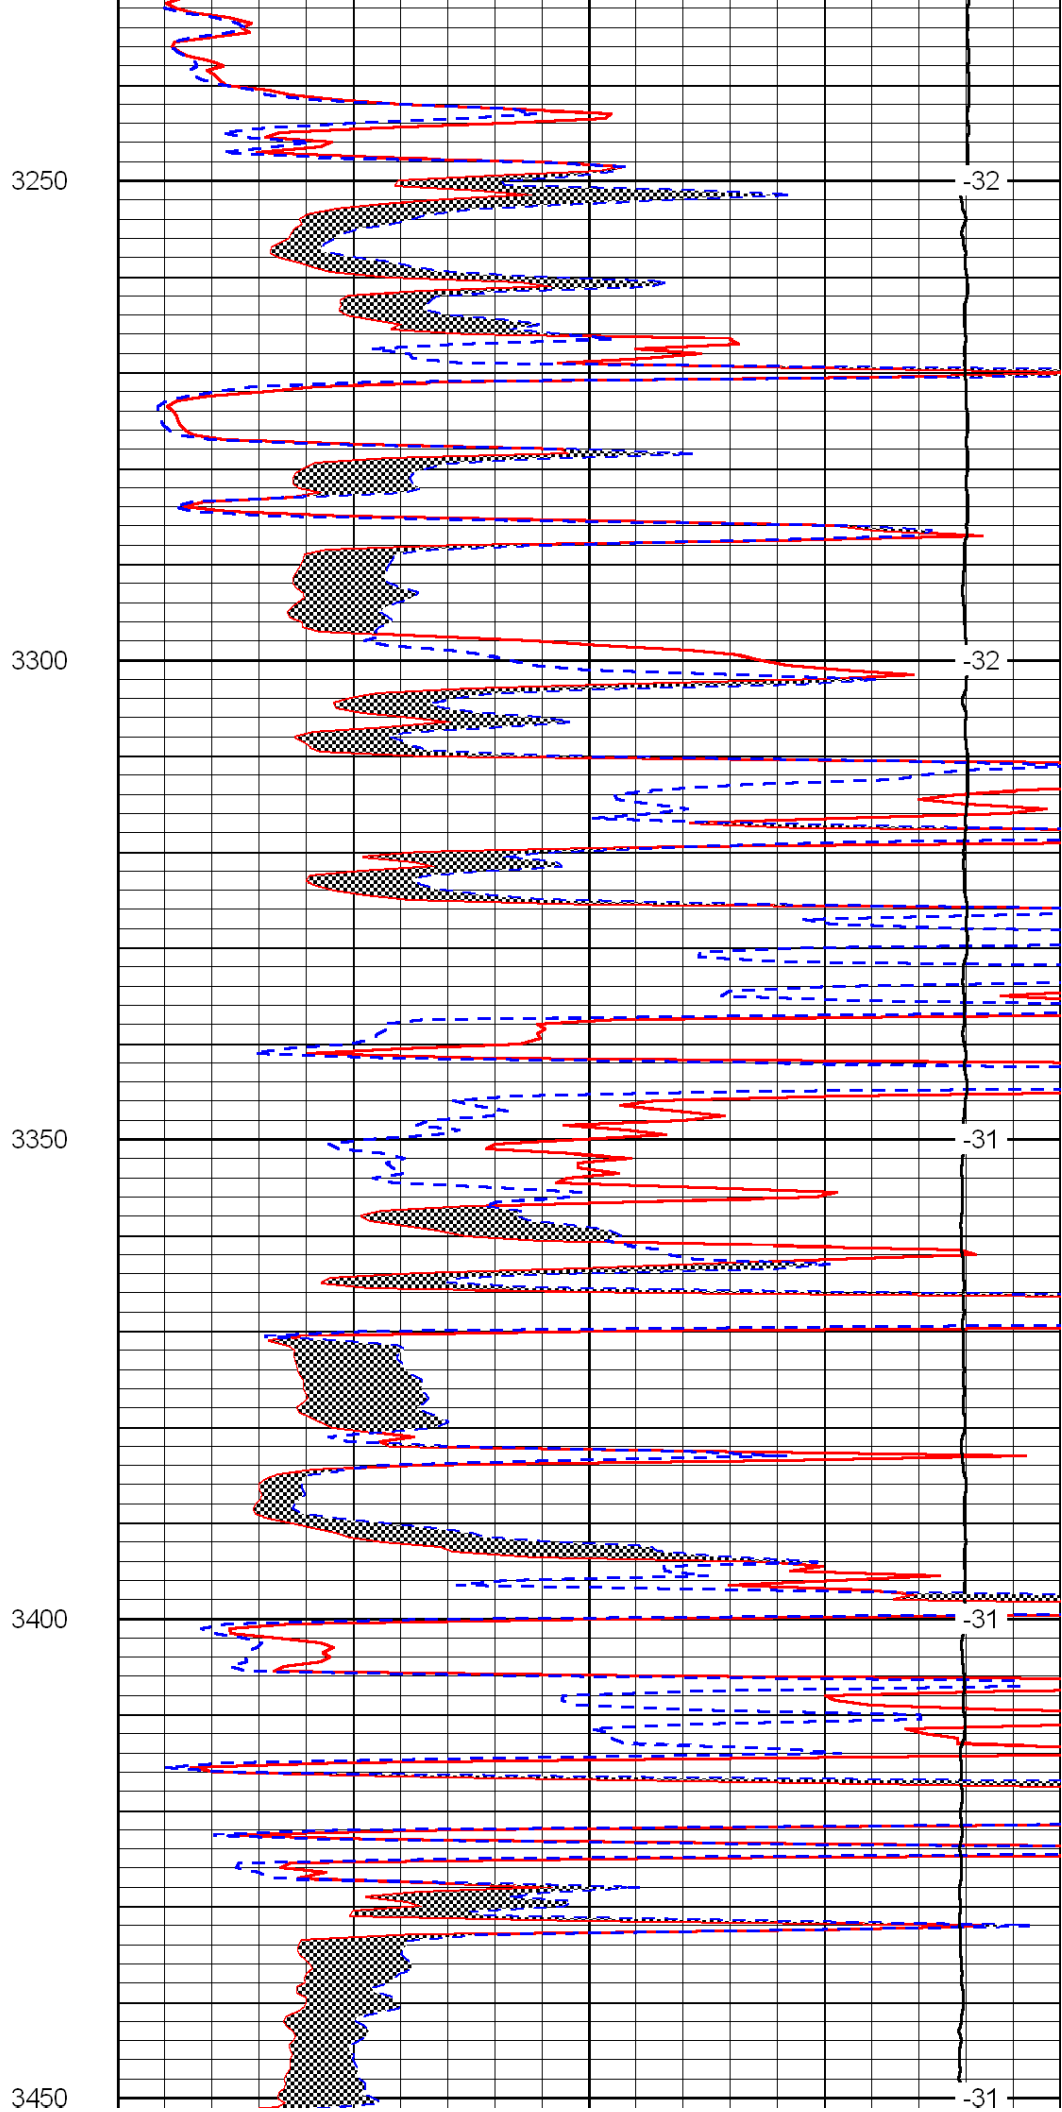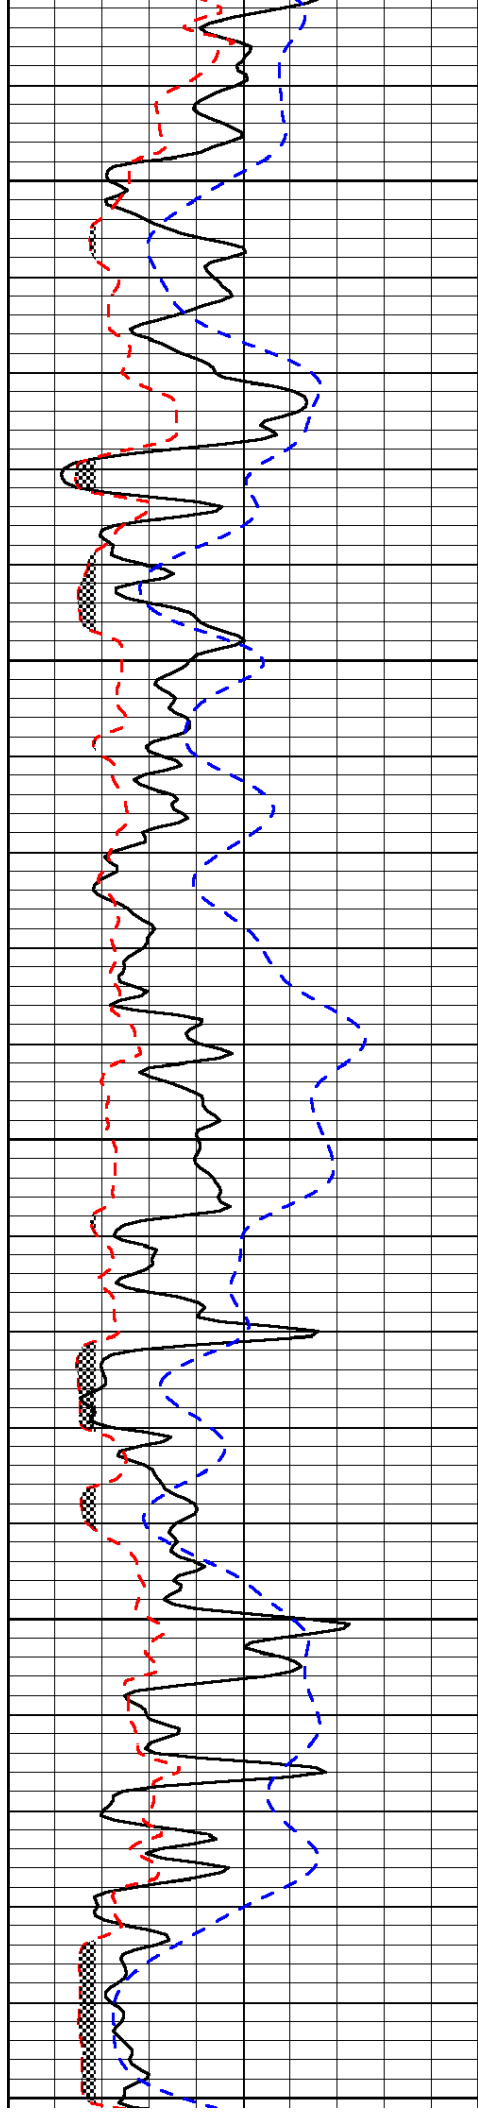

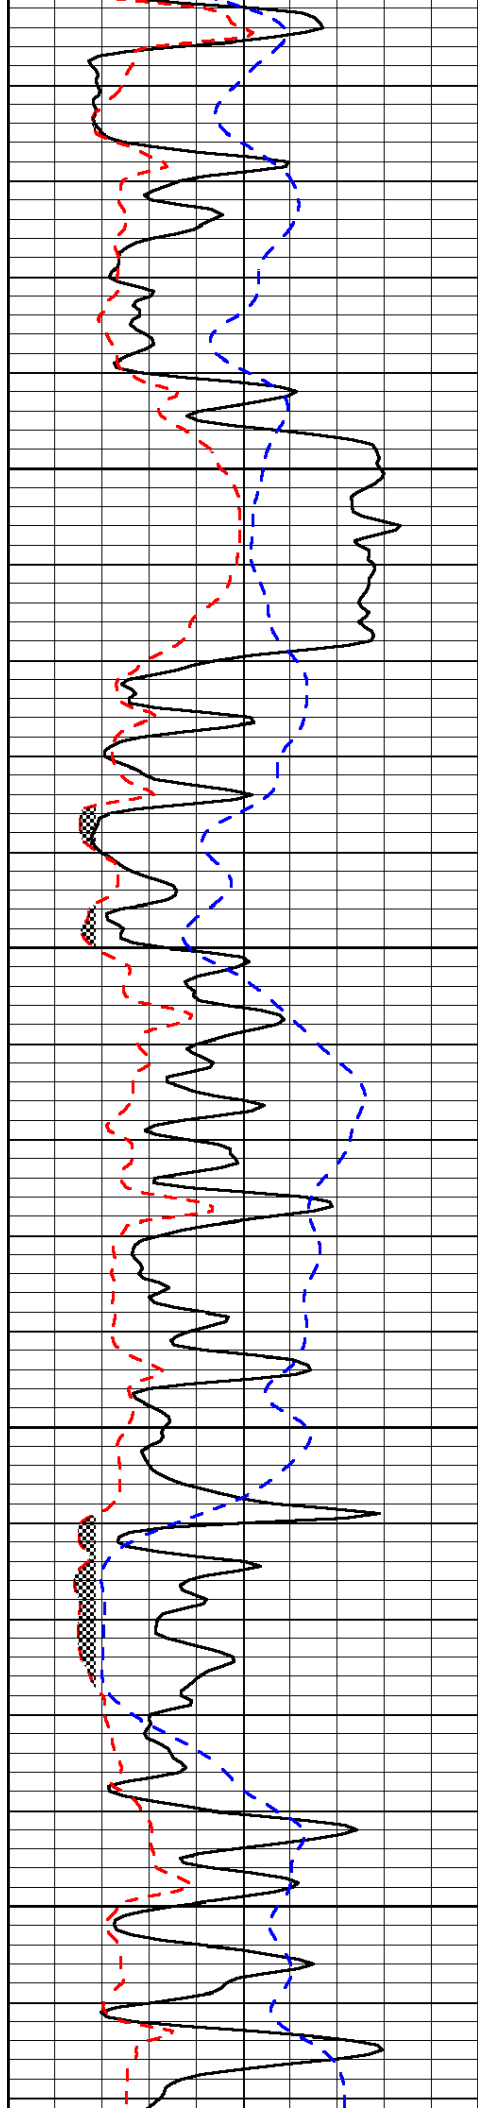



3500

3550

3600

3650

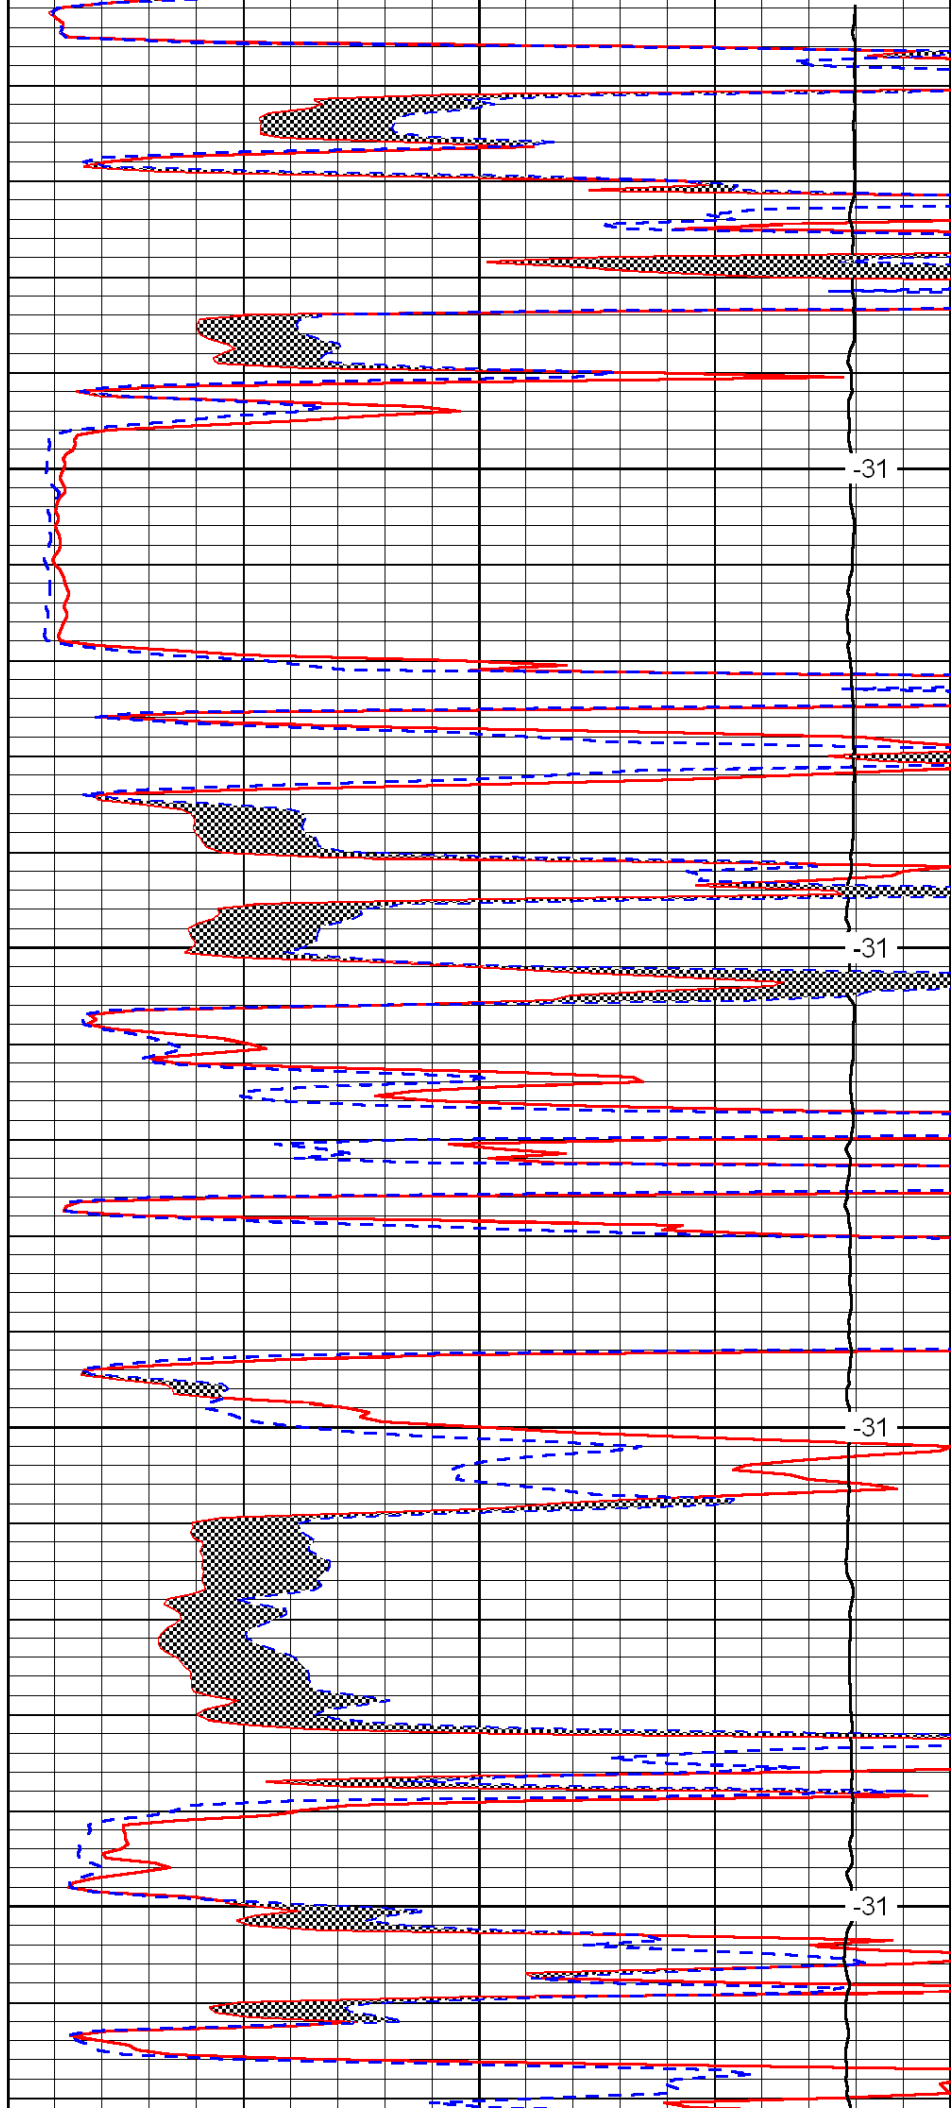

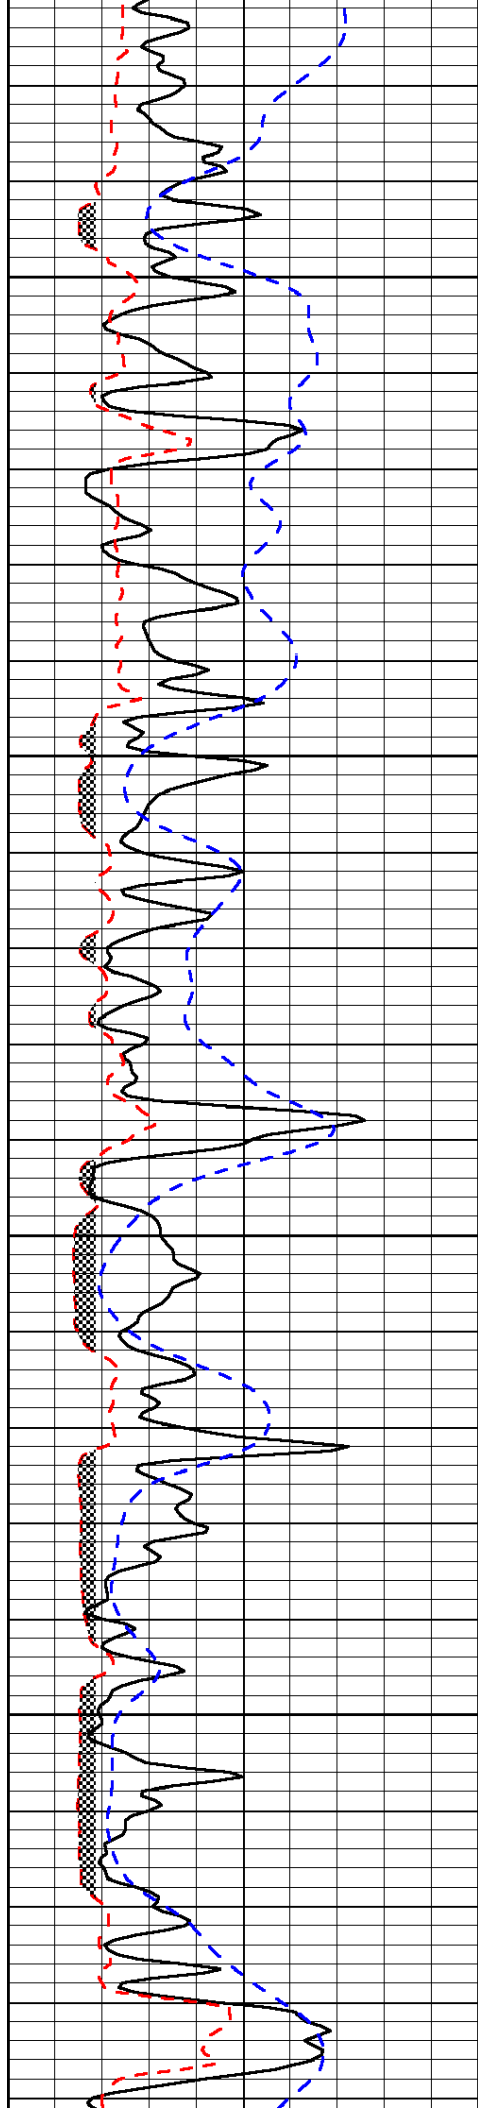



3700

3750

3800

3850

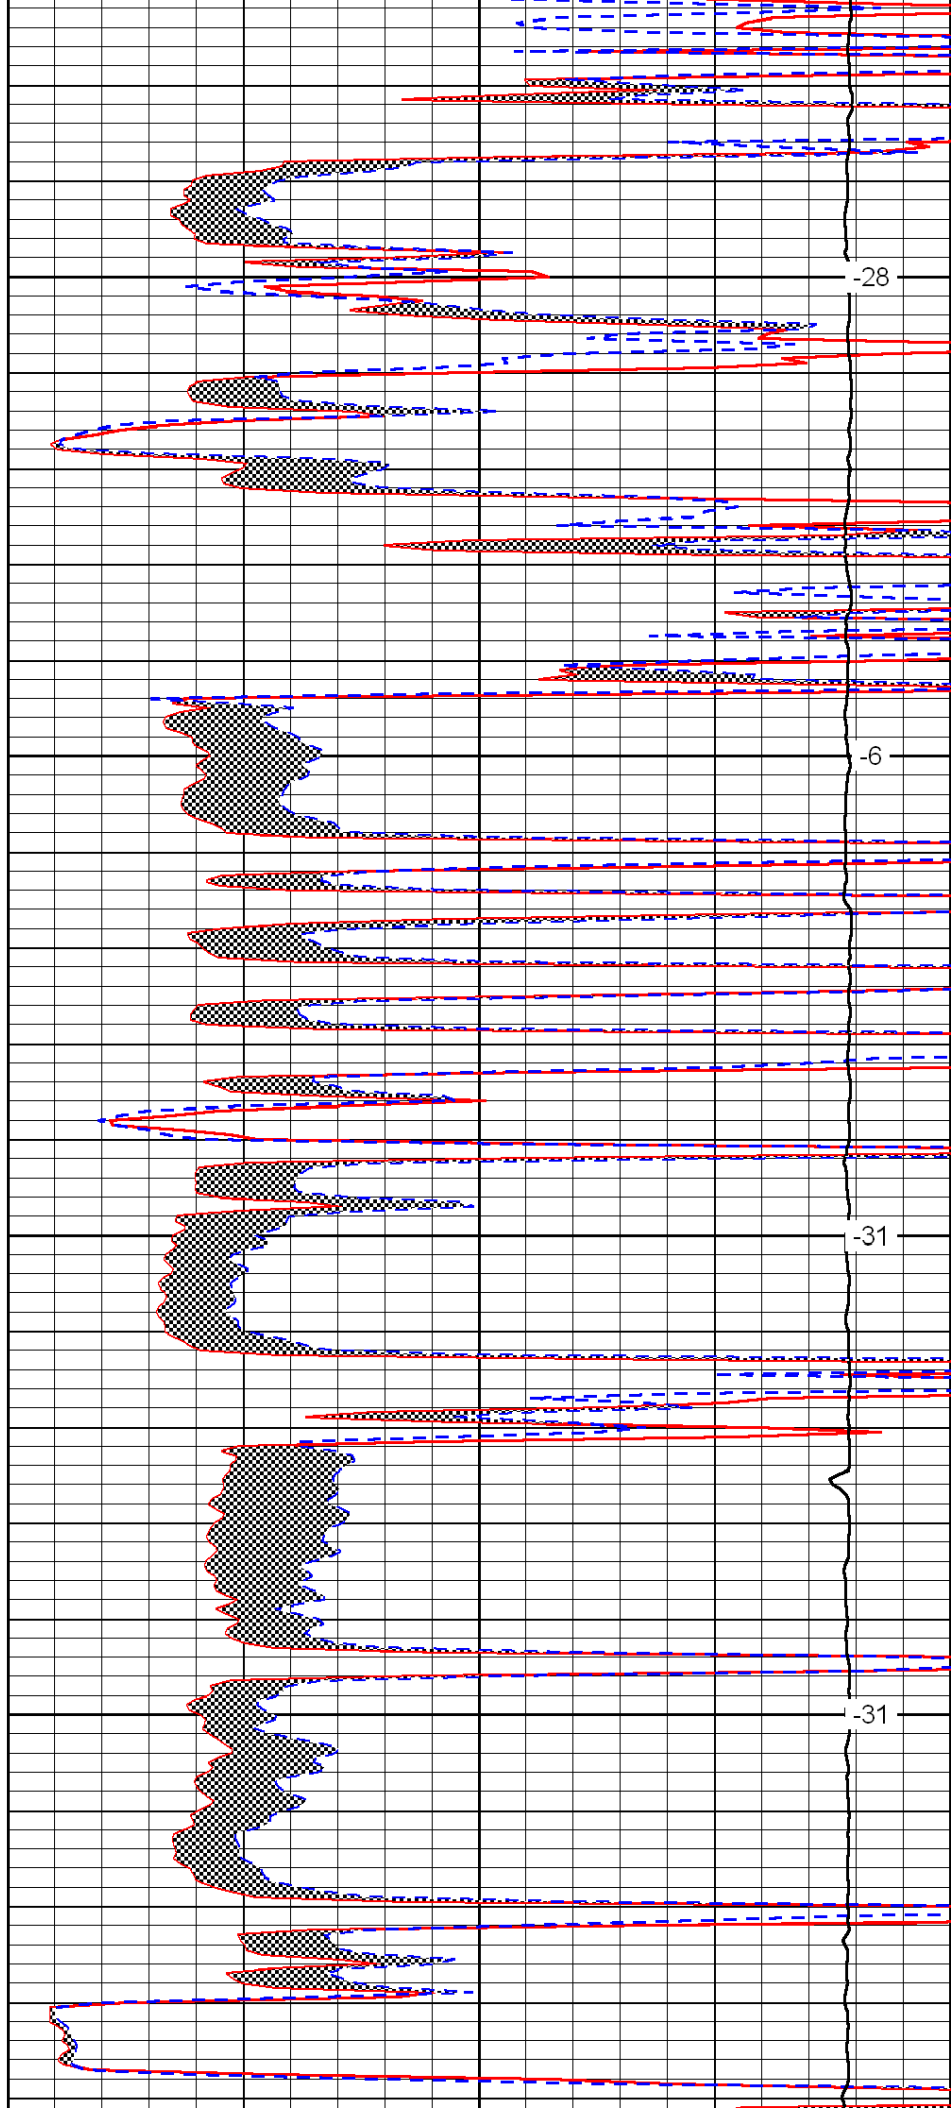

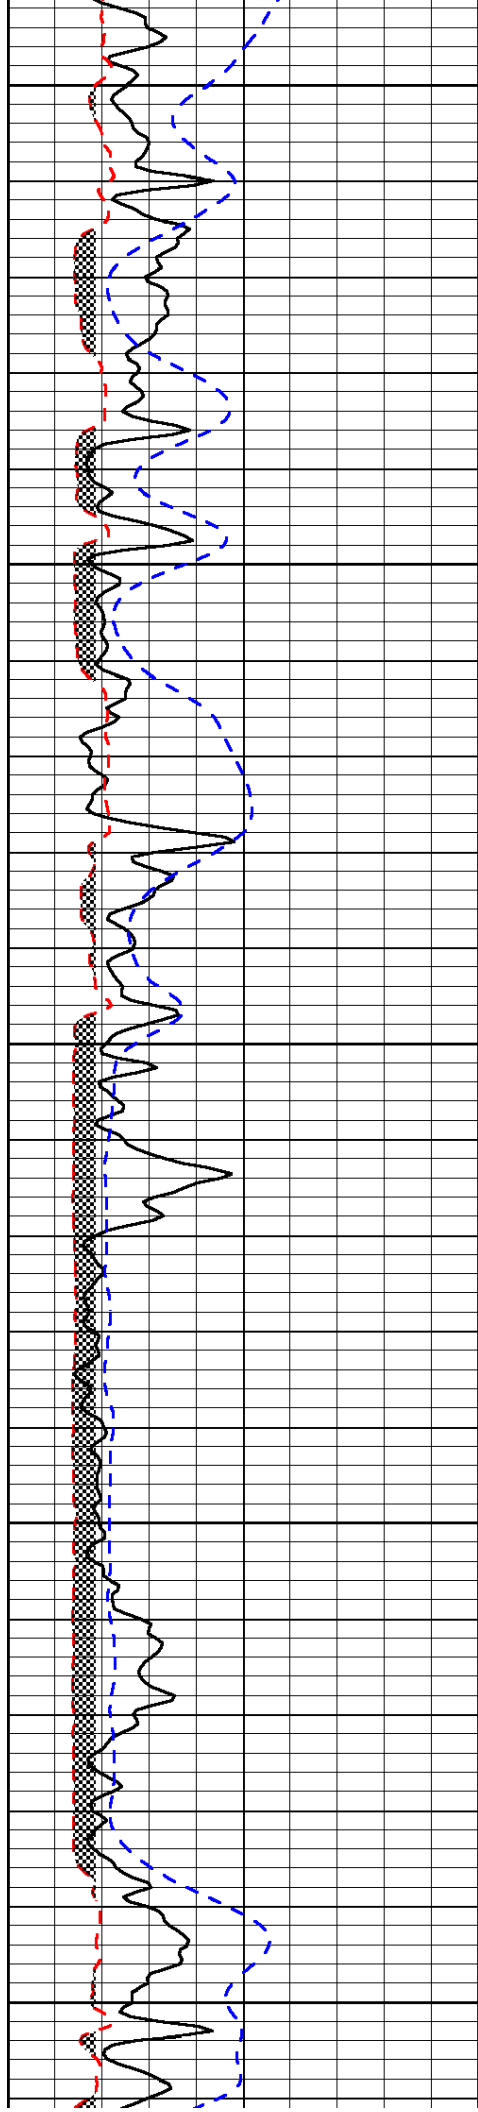


3900


3950

4000

4050

4100

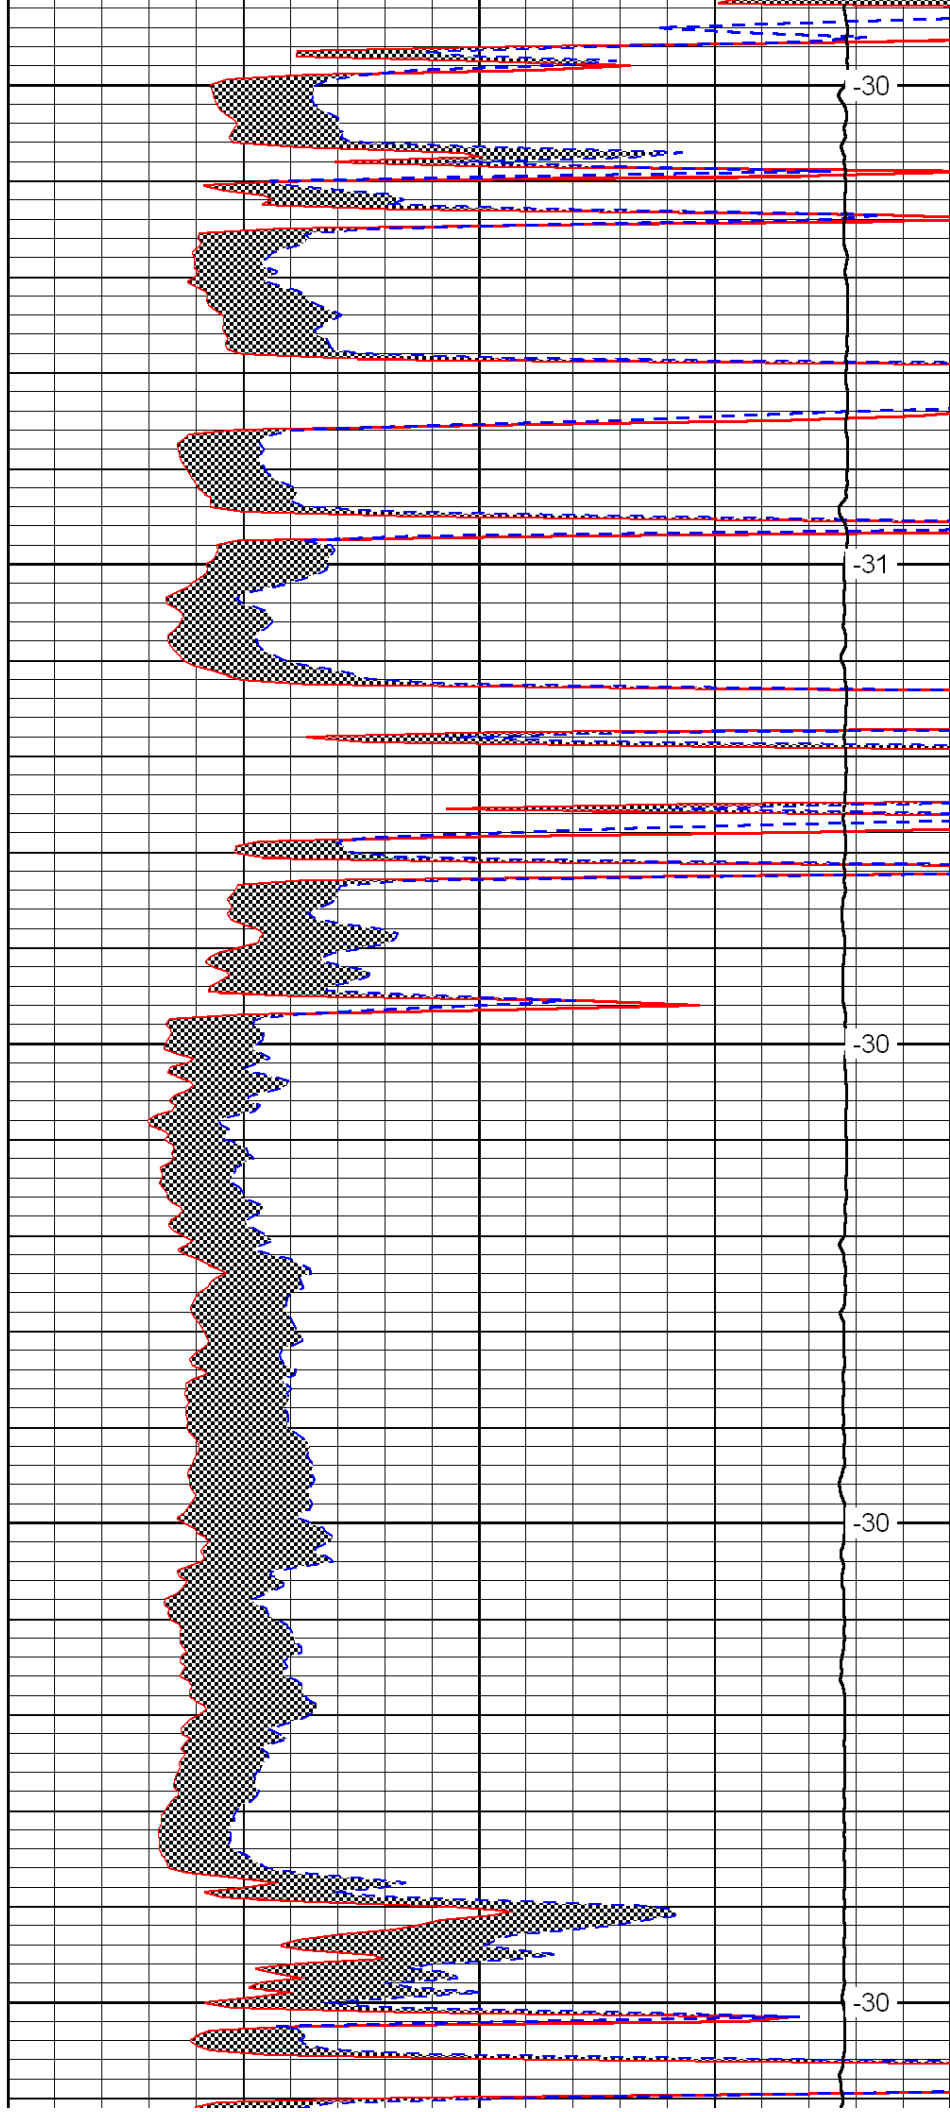

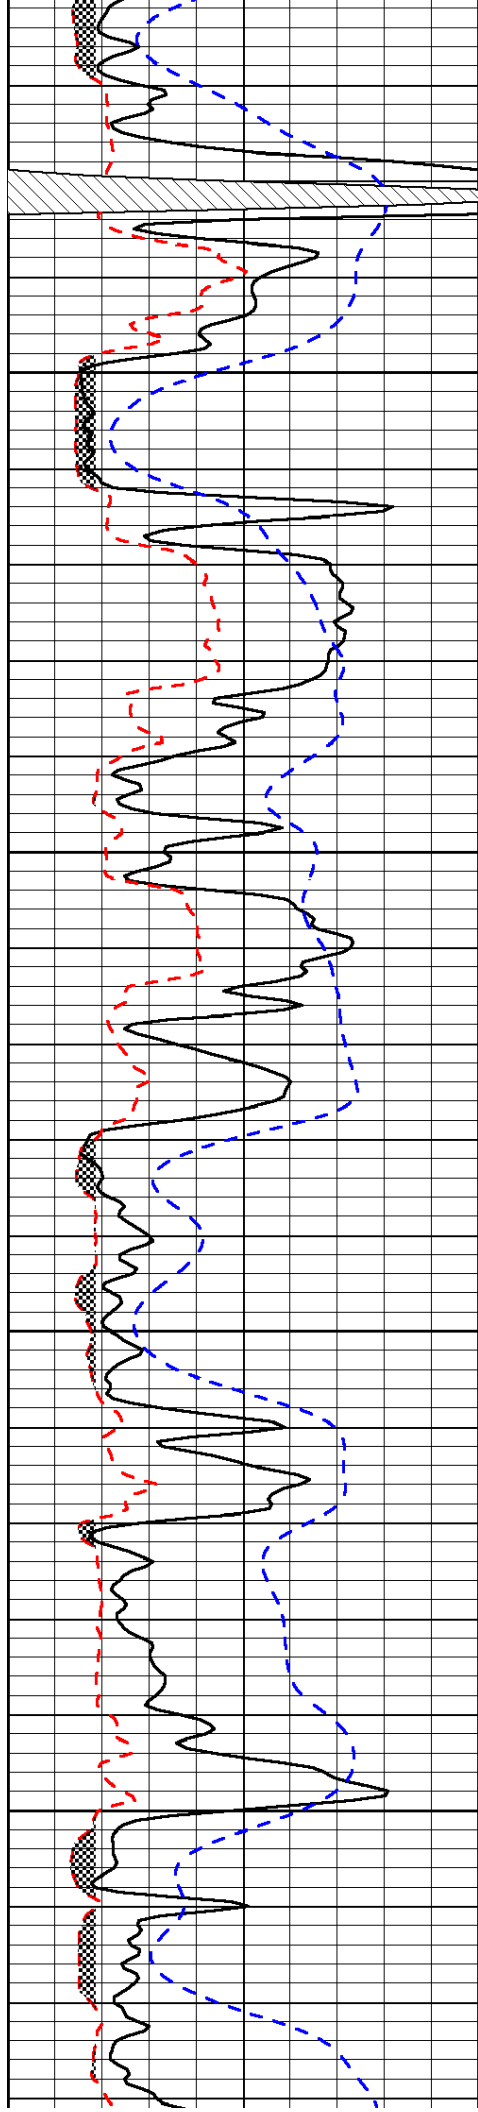


4150

4200

4250

4300

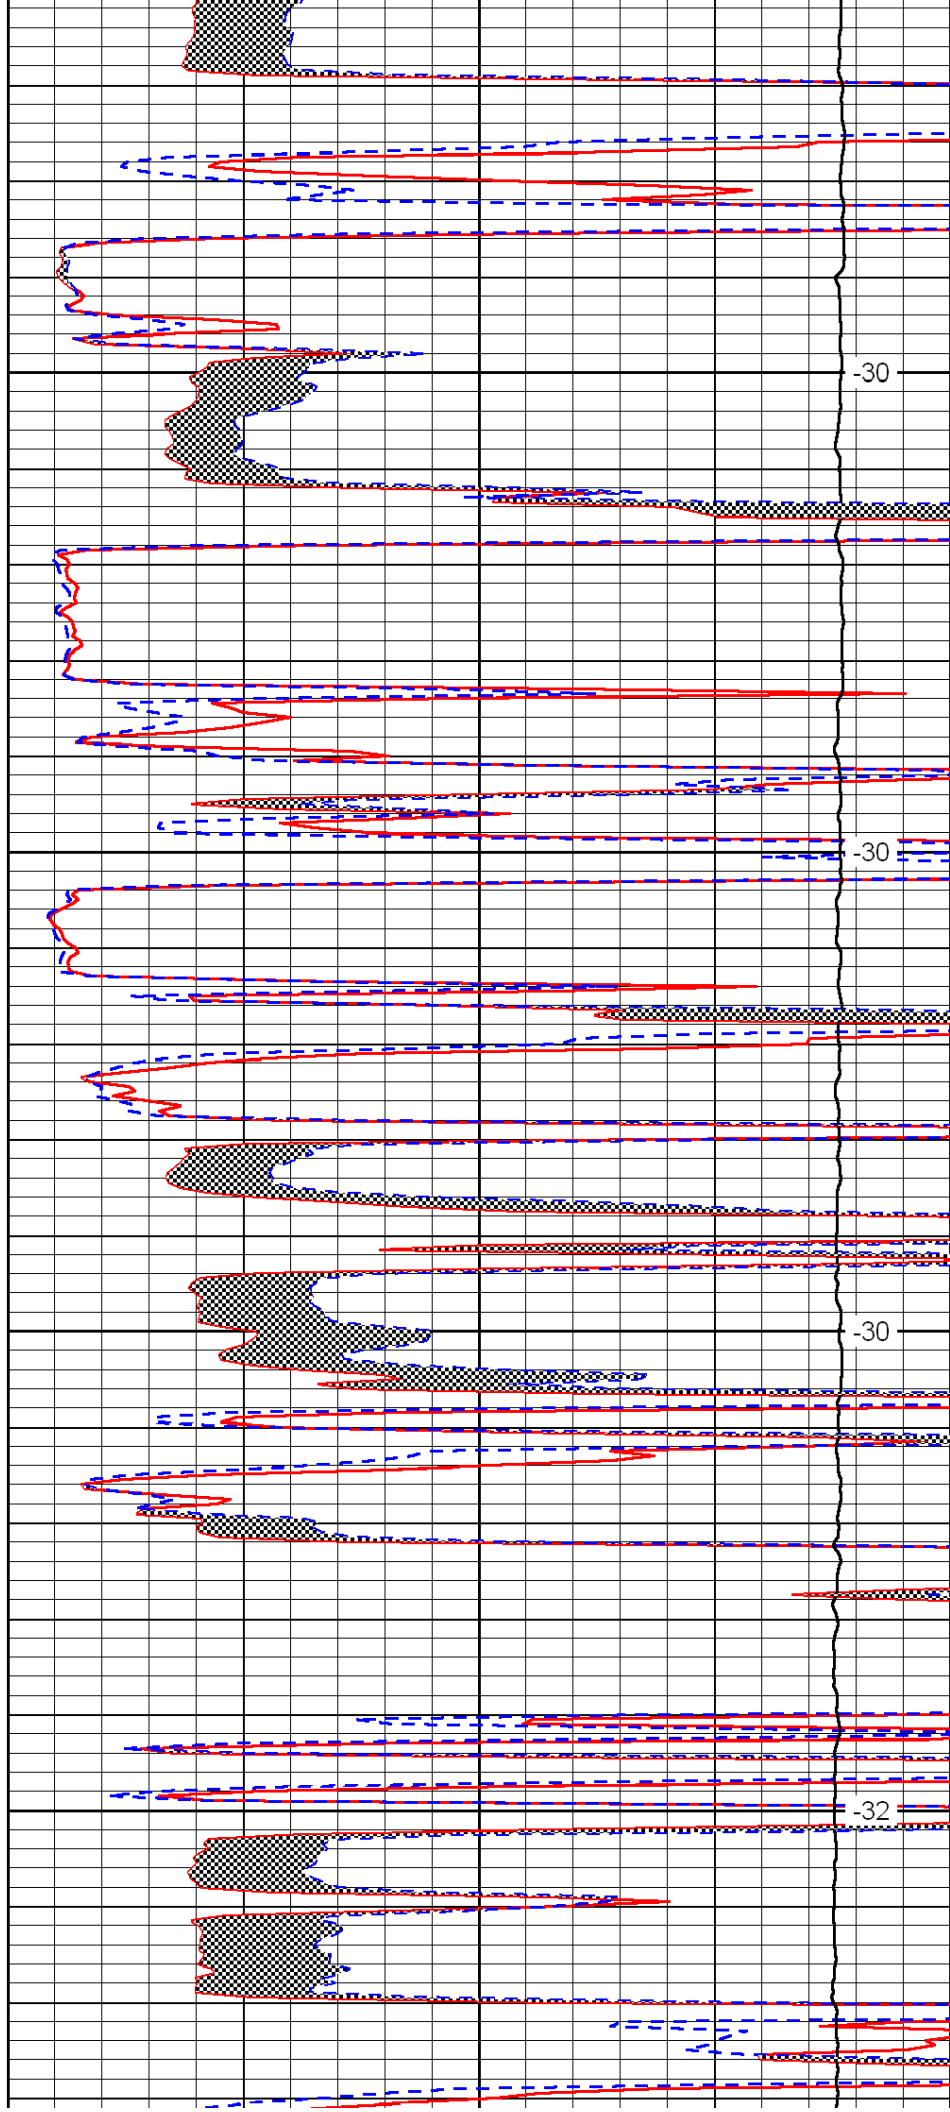


-30

-30

-30

-32

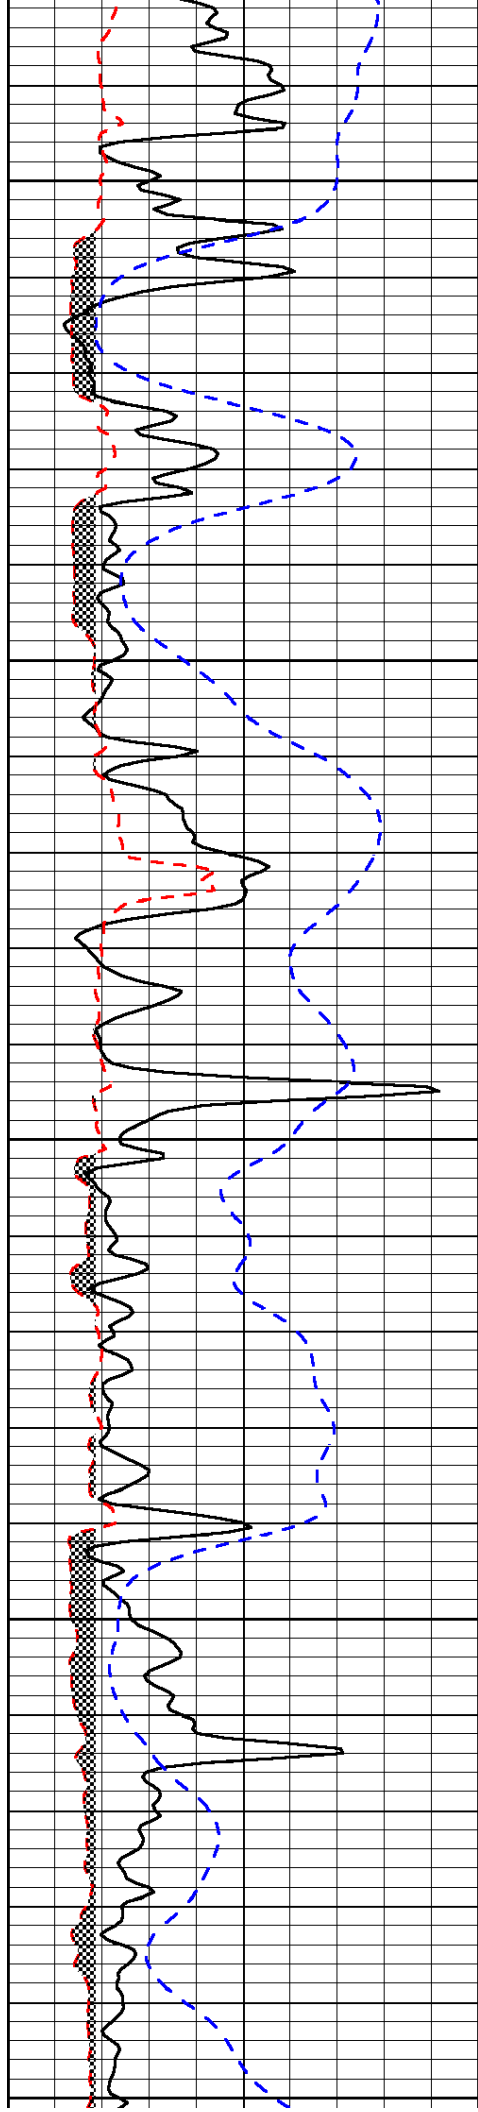


4350


4400

4450

4500

4550

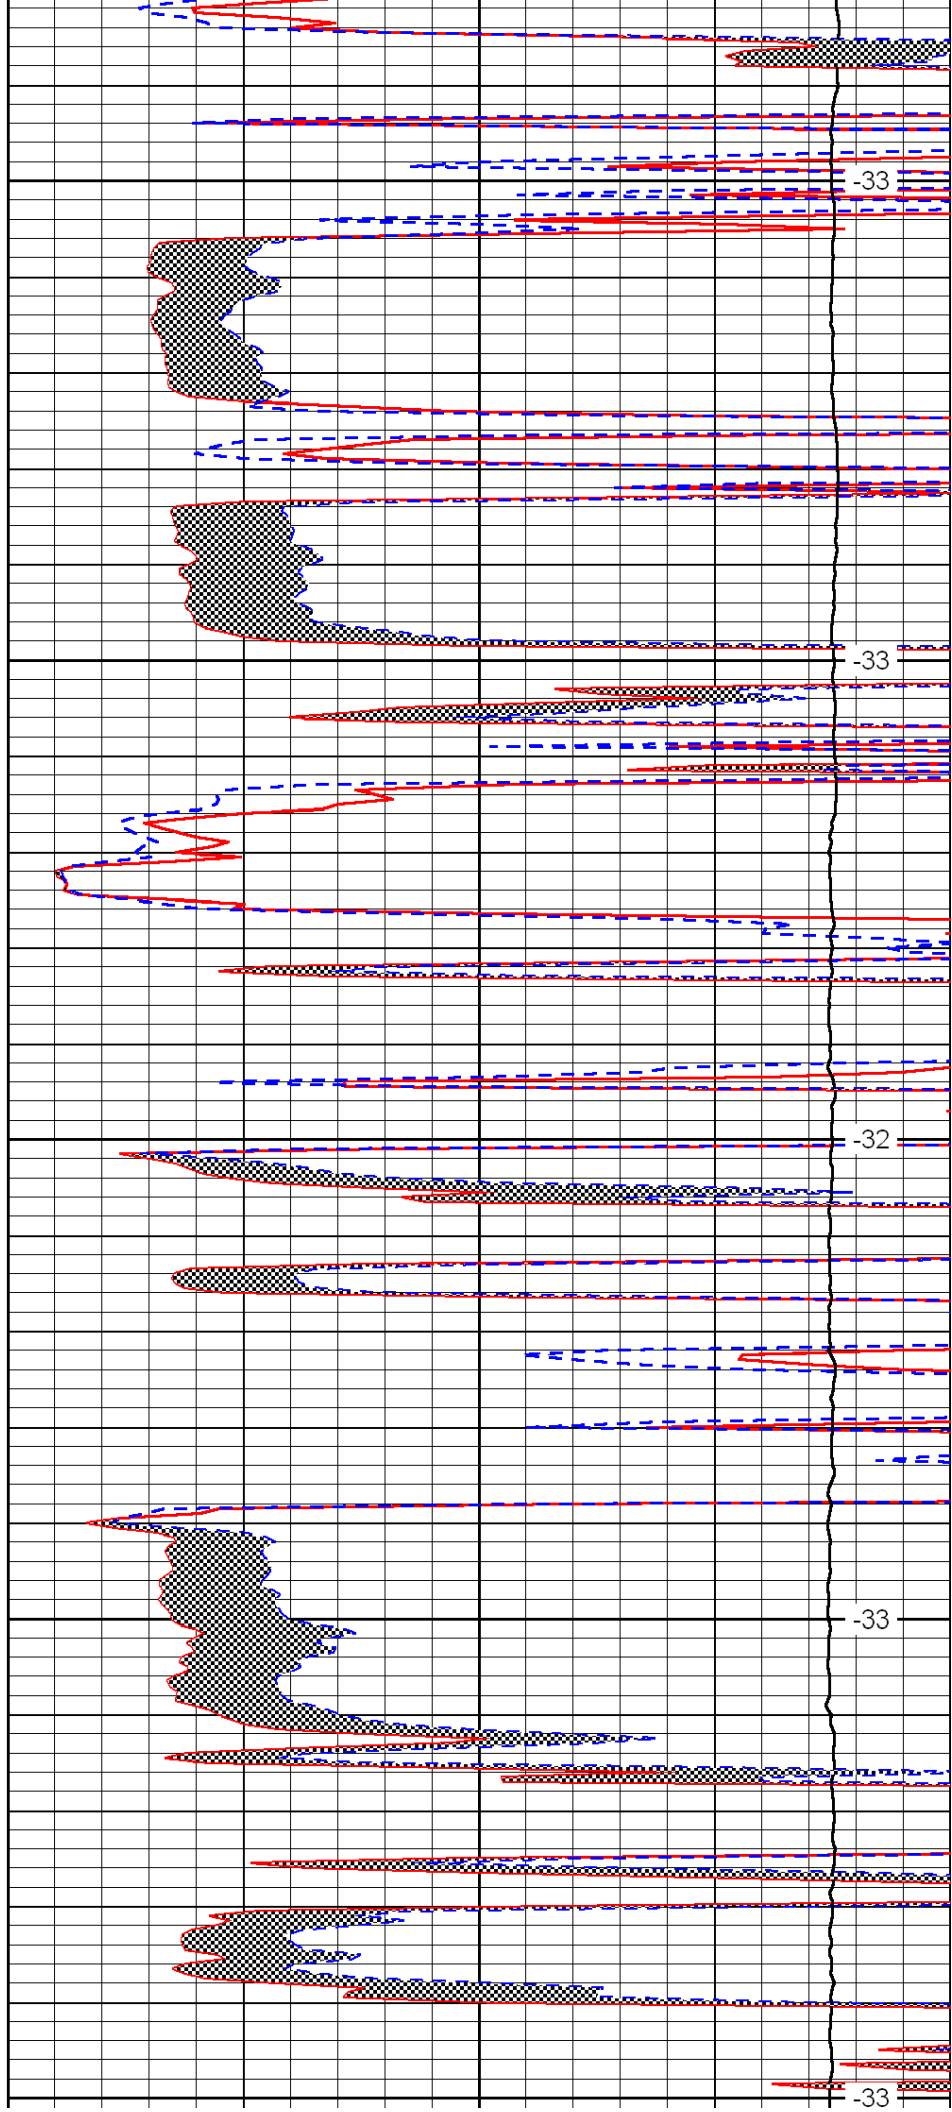

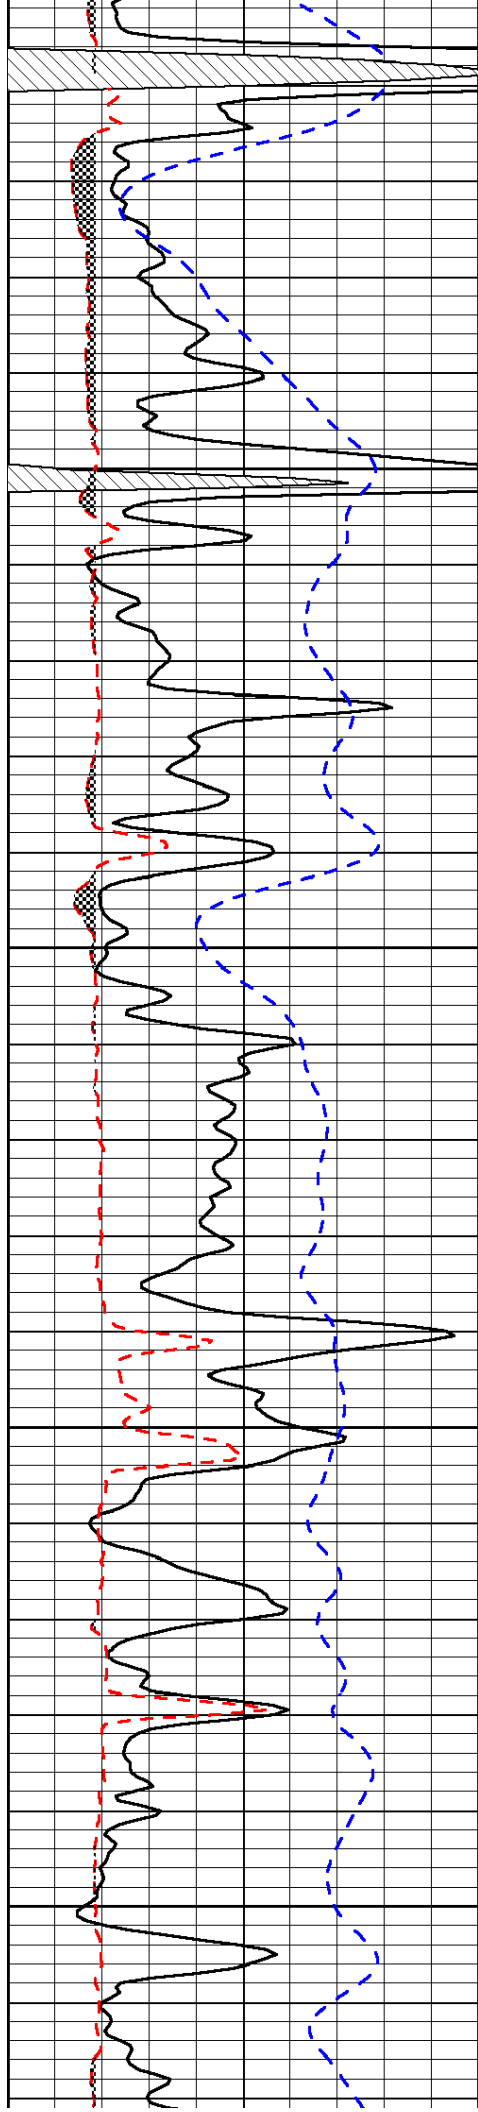



4600

4650

4700

4750

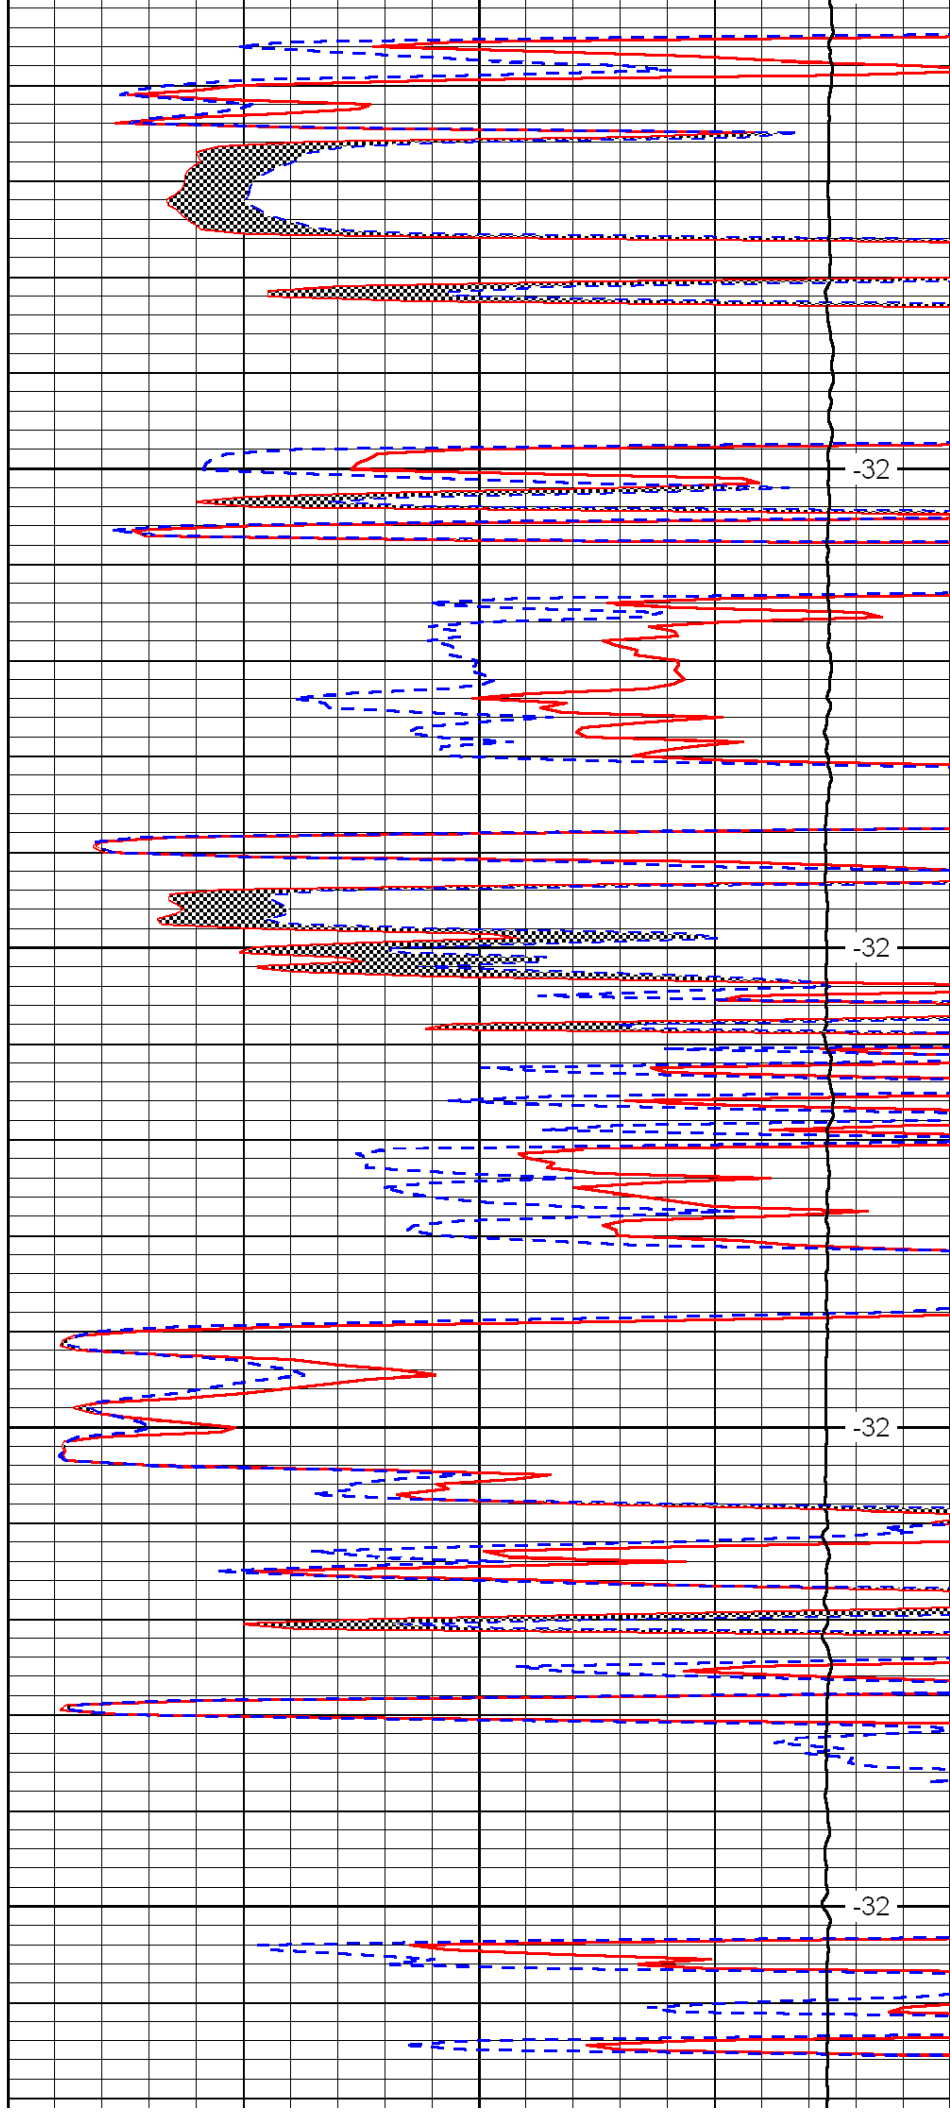

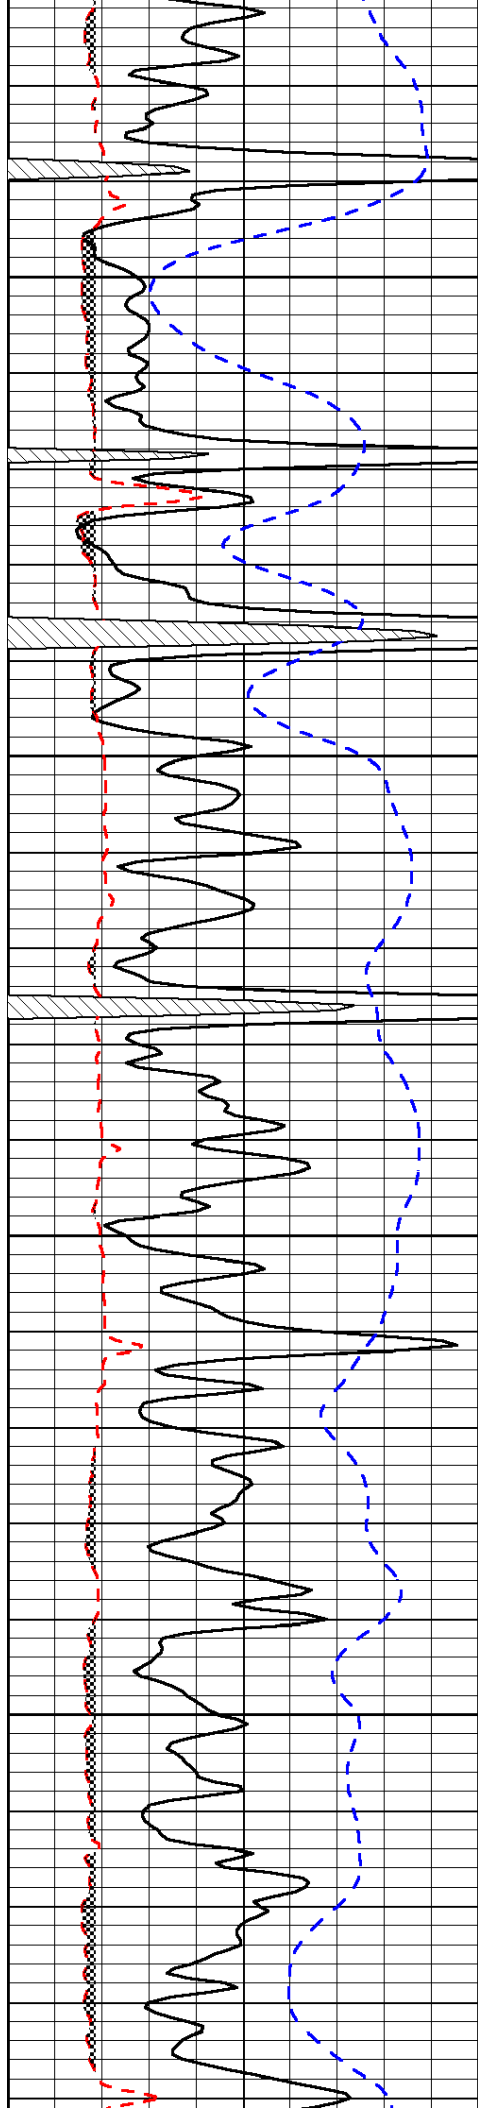


4800

4850

4900

4950


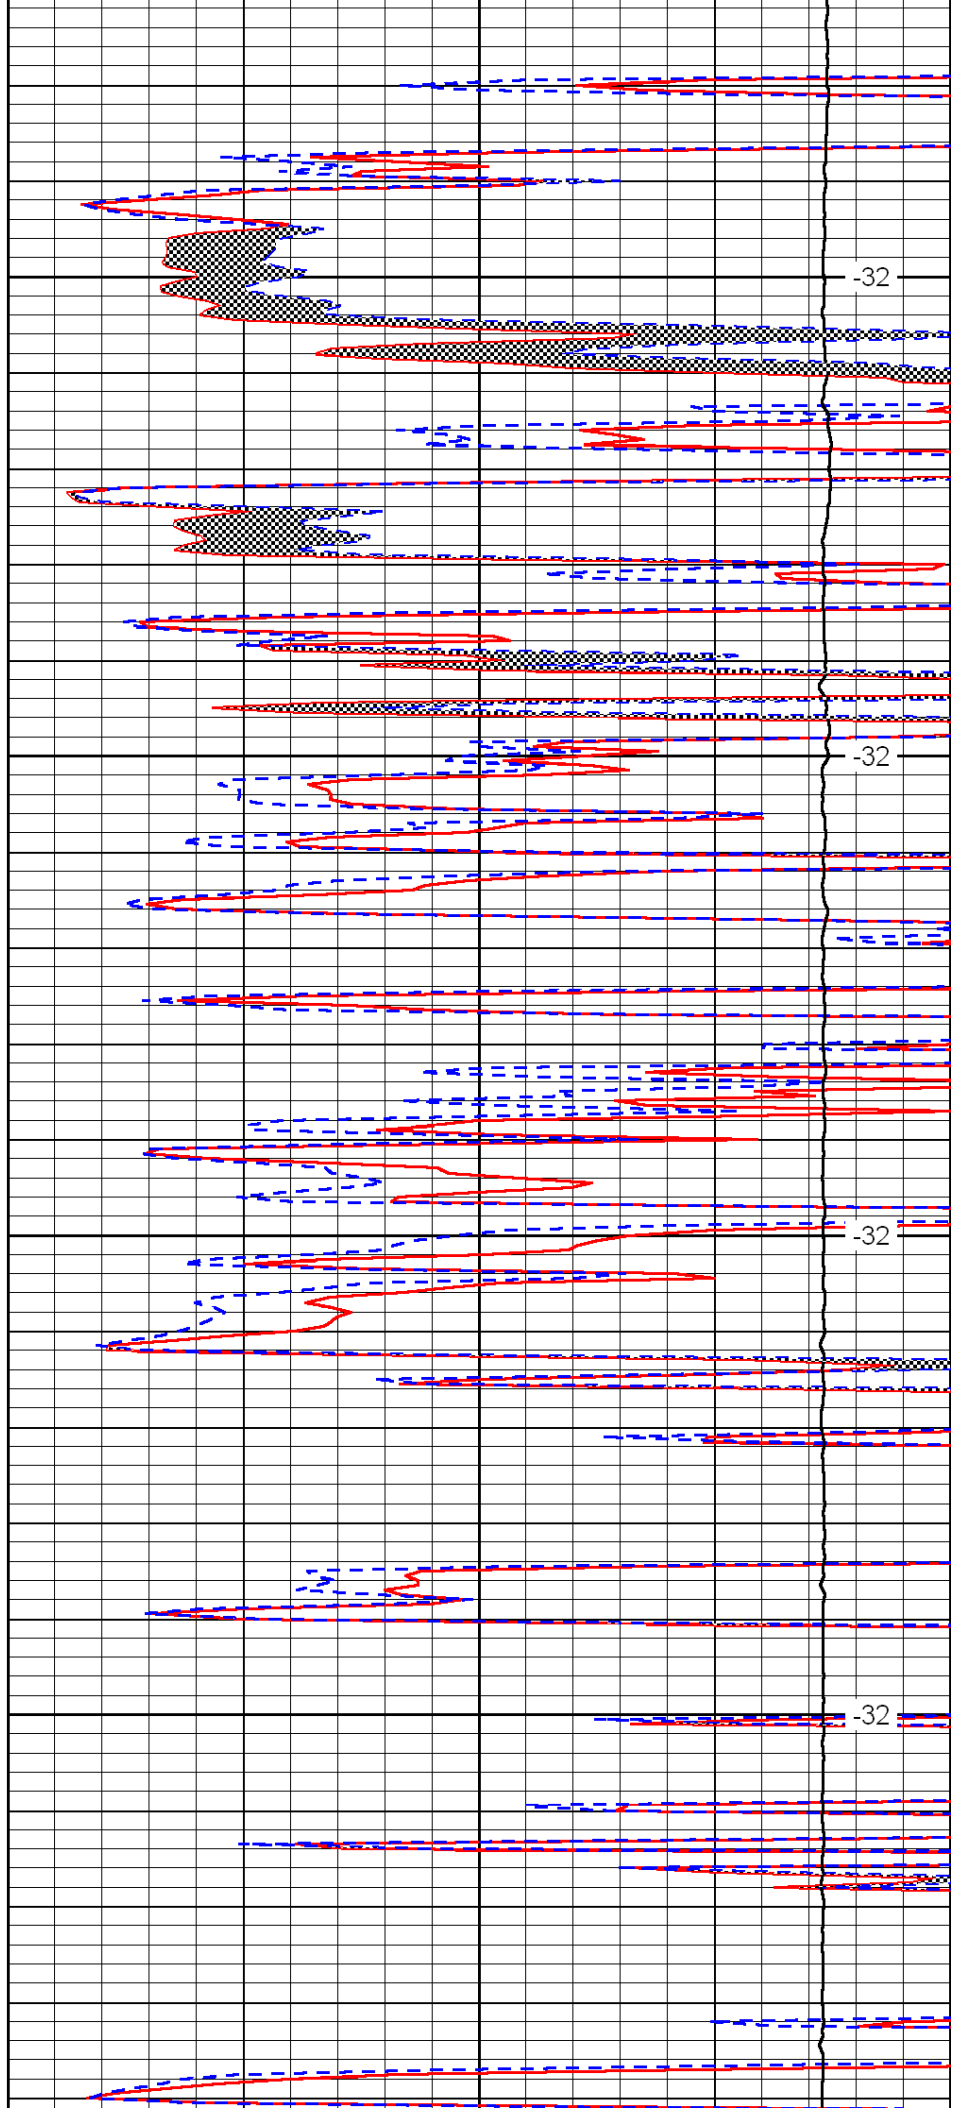



-32

-32

-32

-32

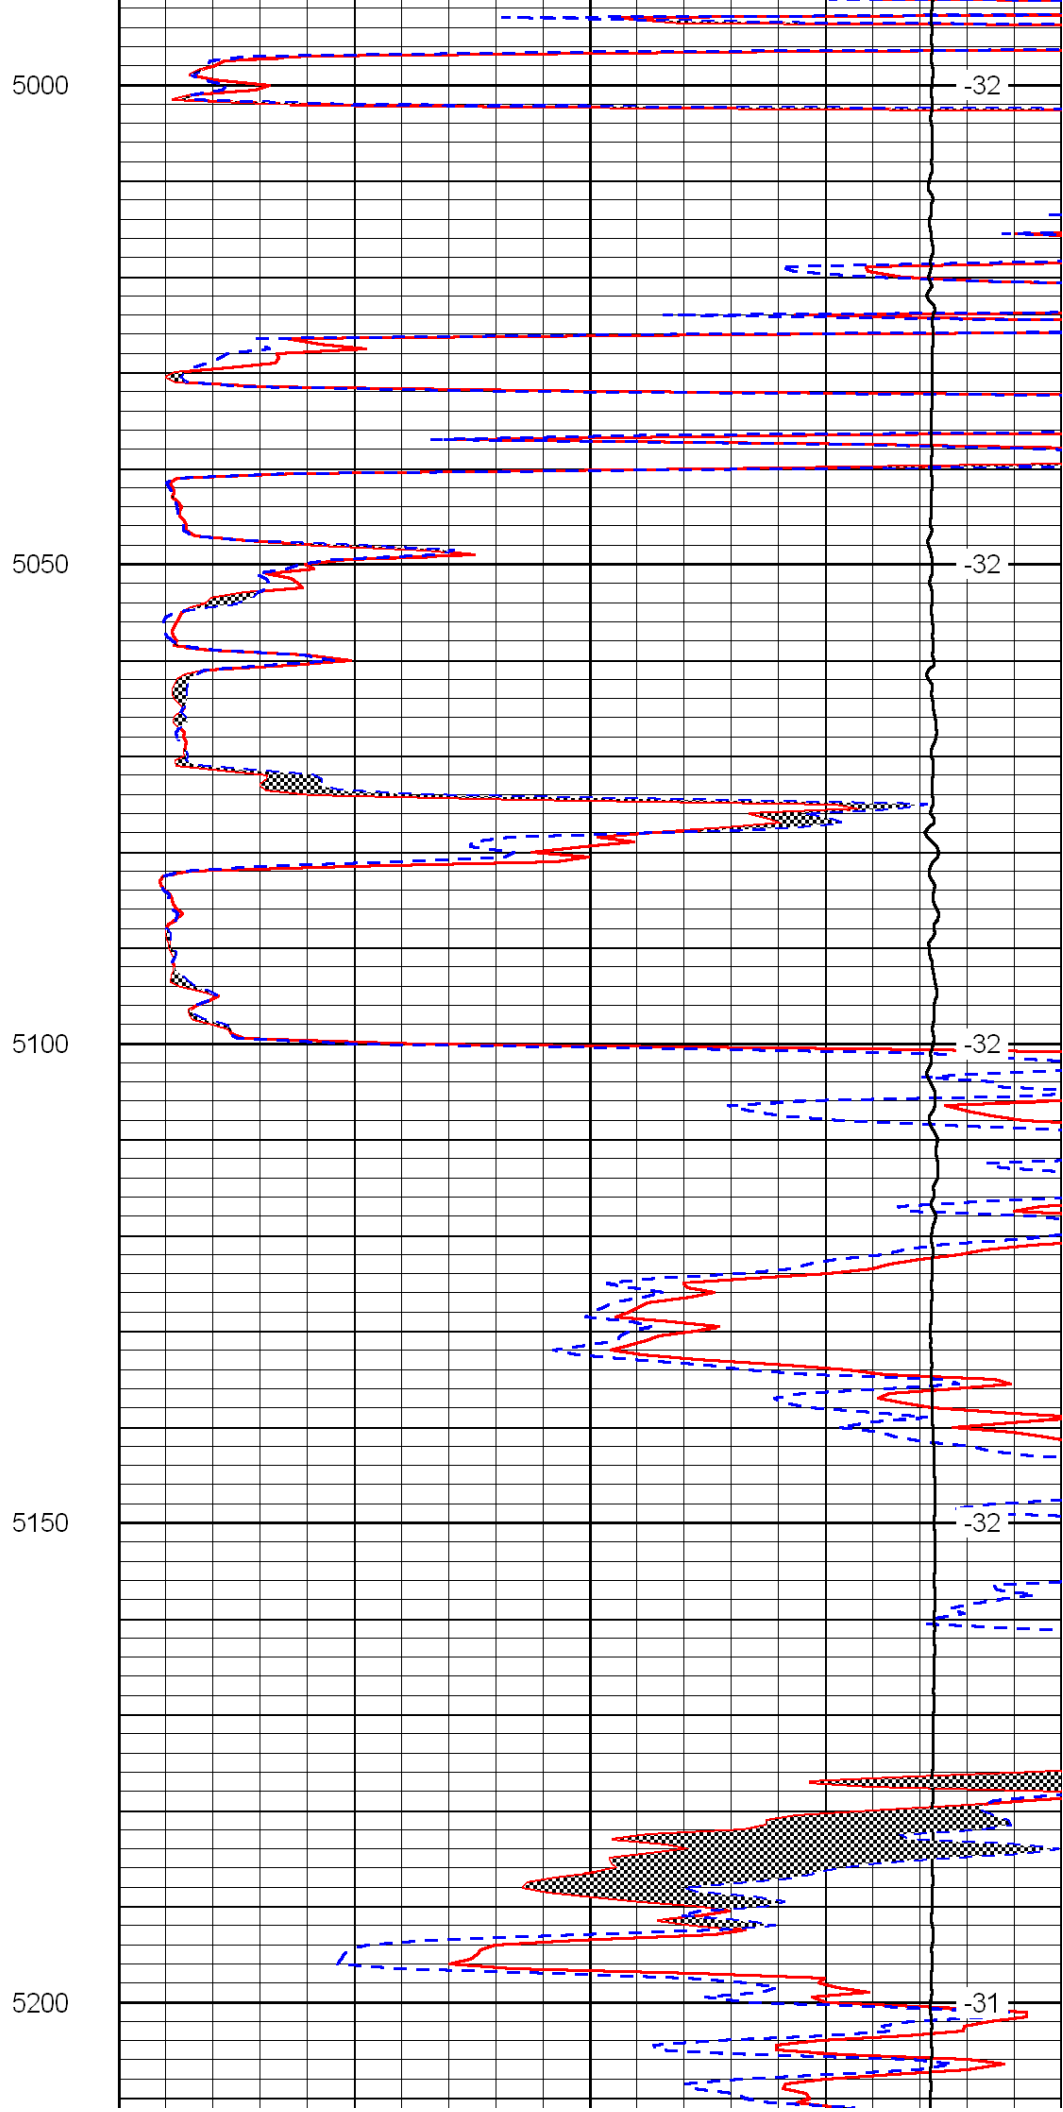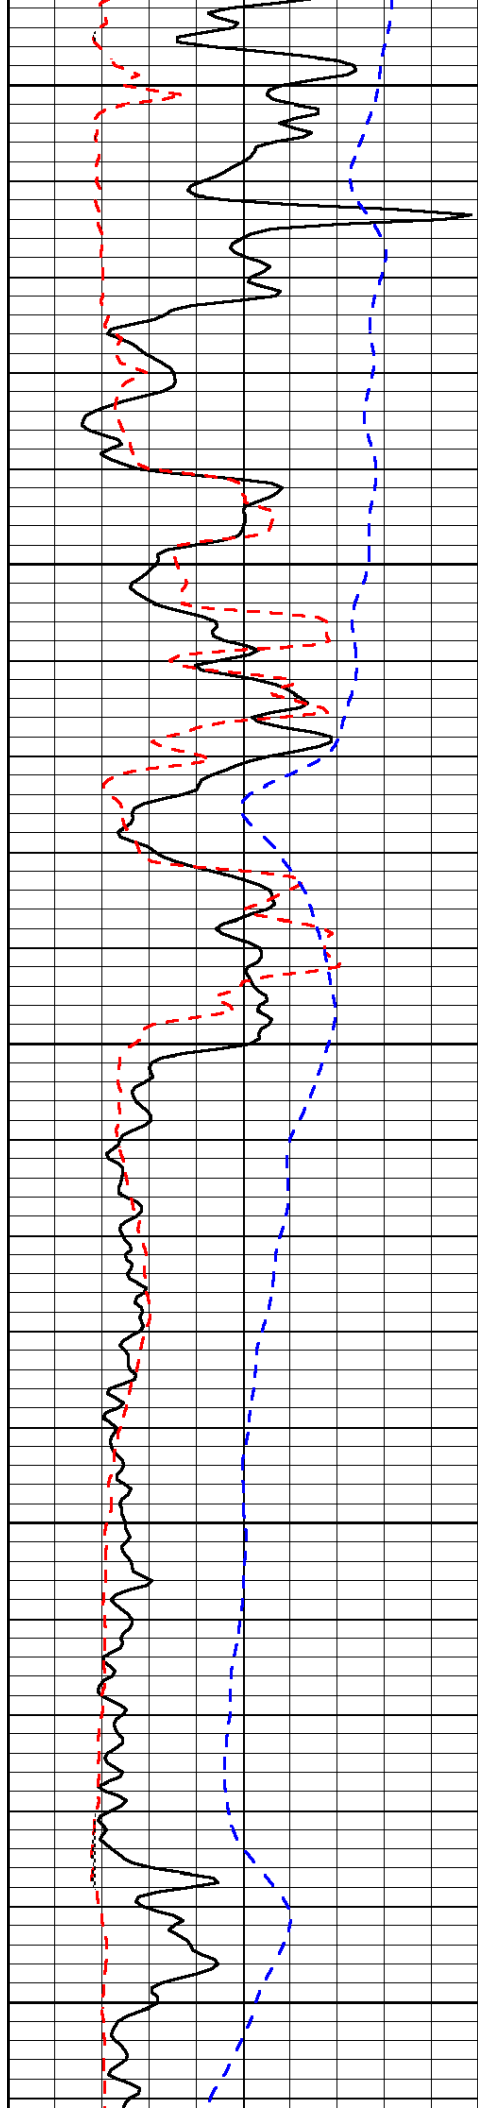

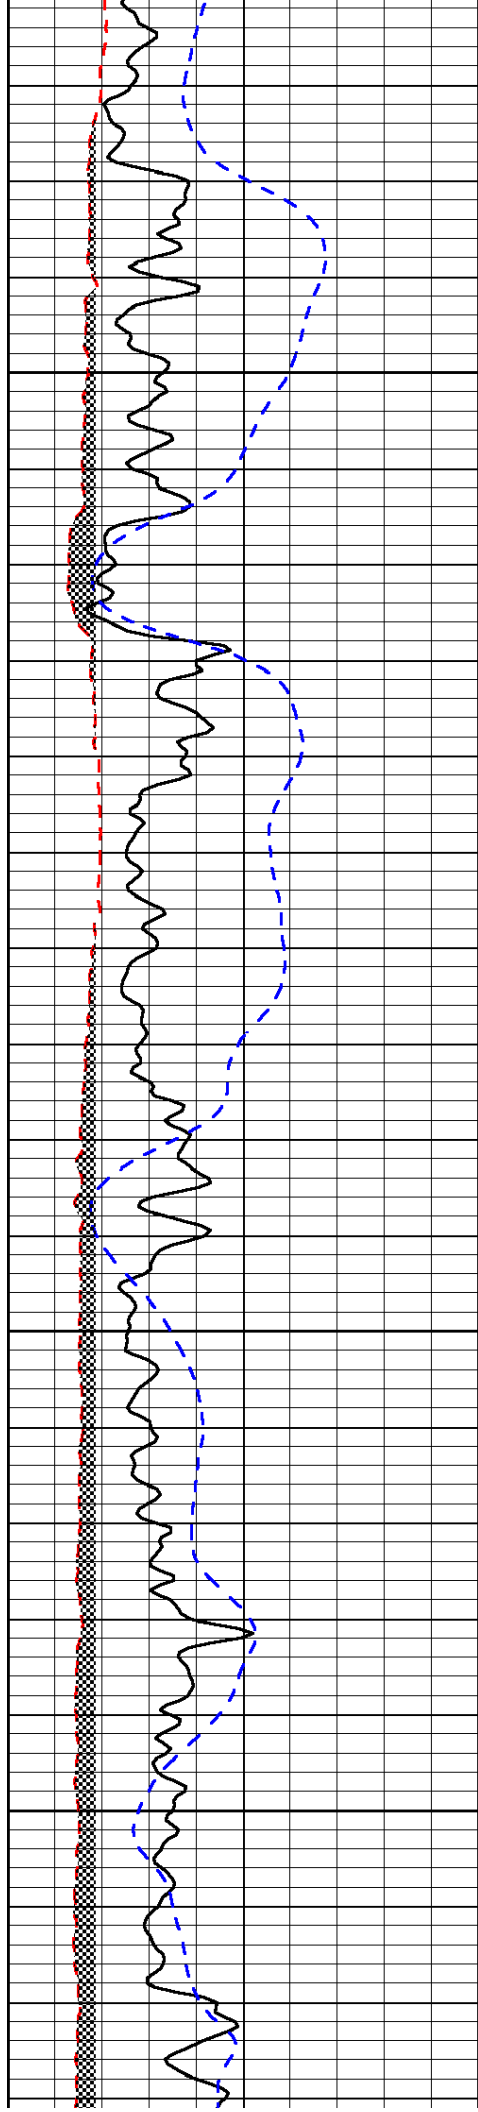



5250

5300


5350

5400

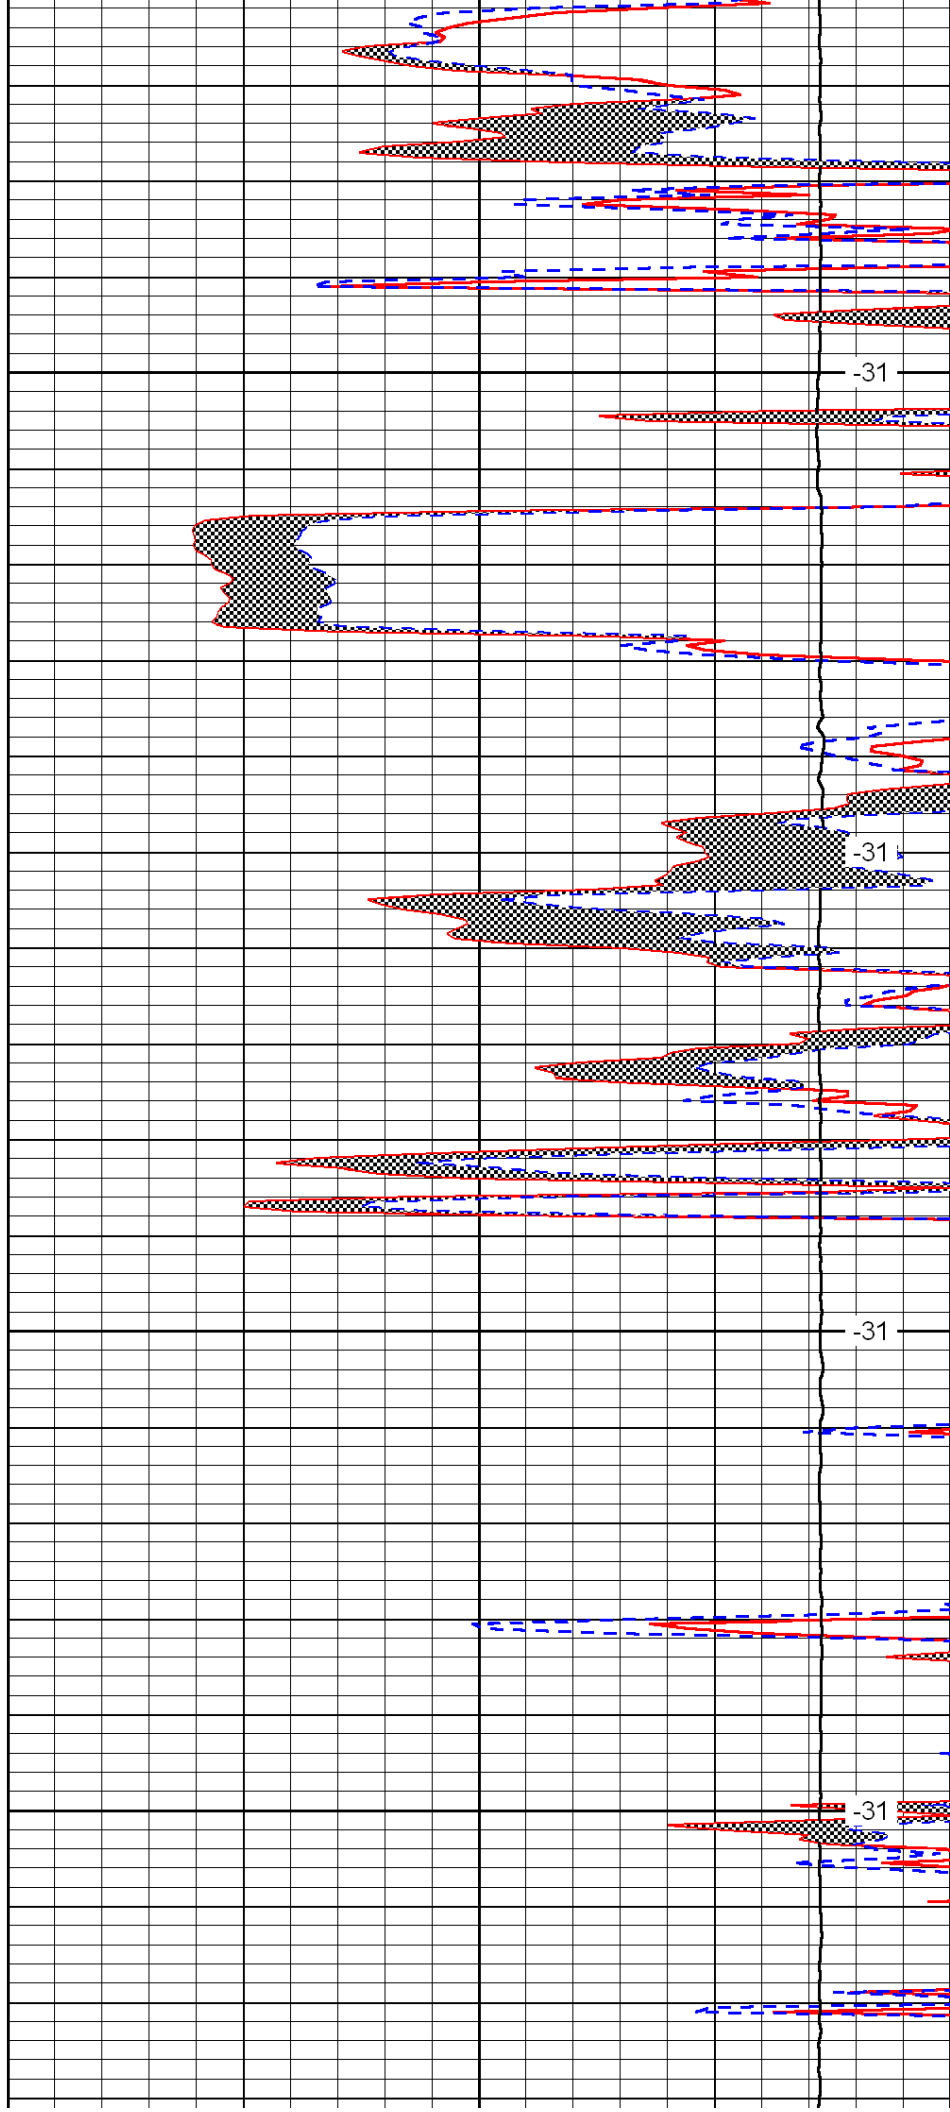

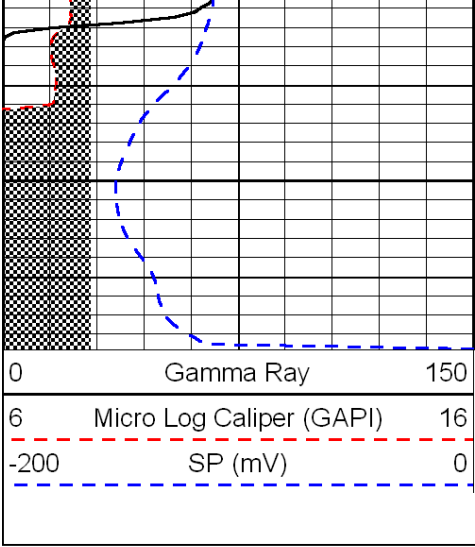

5450

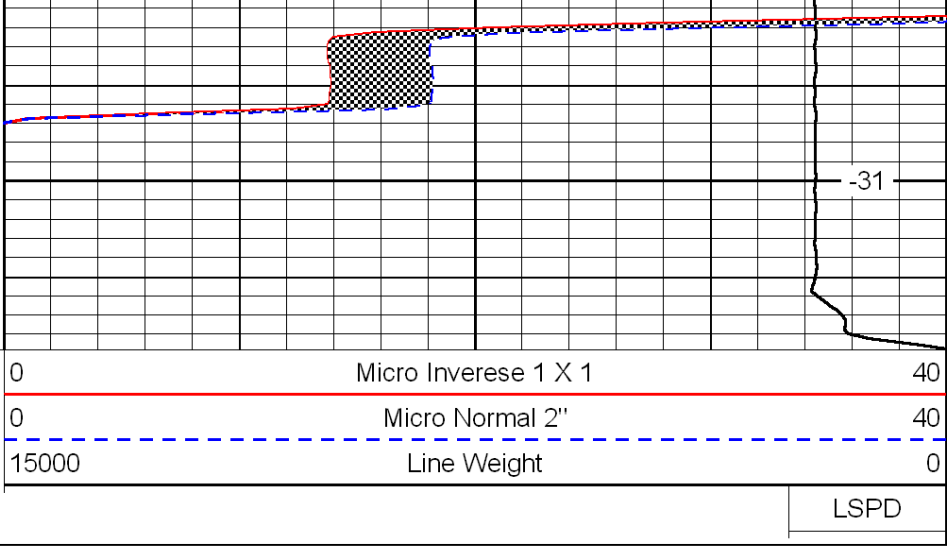

-31

LSPD