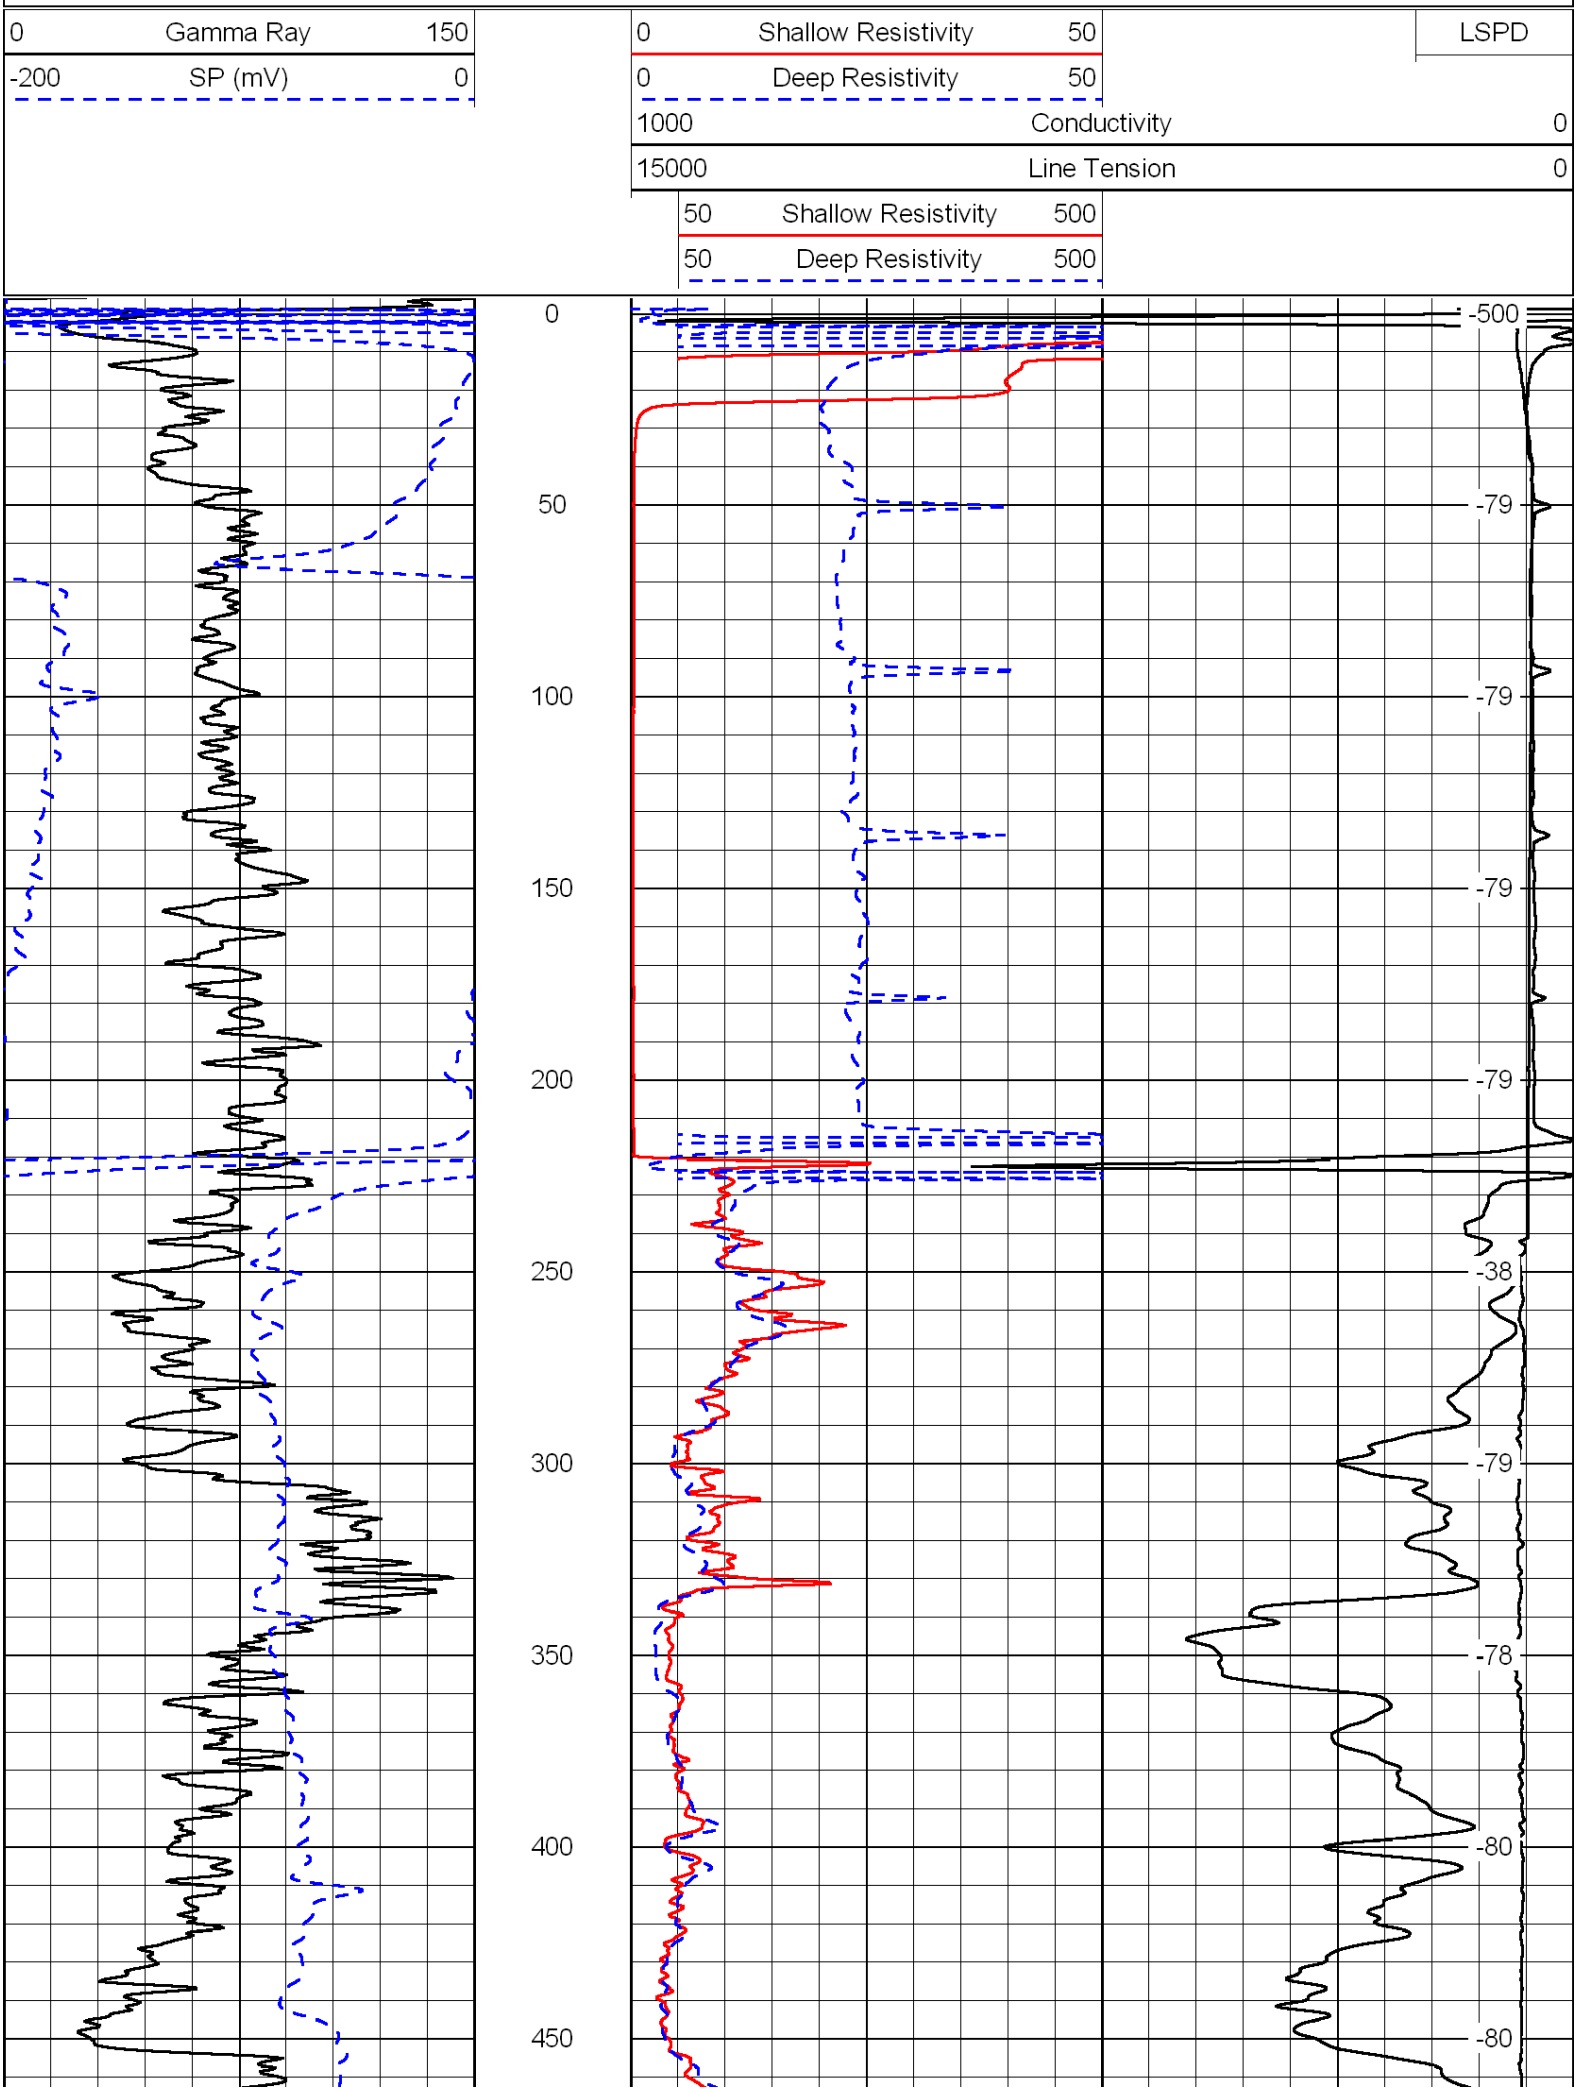
LOG-TECH

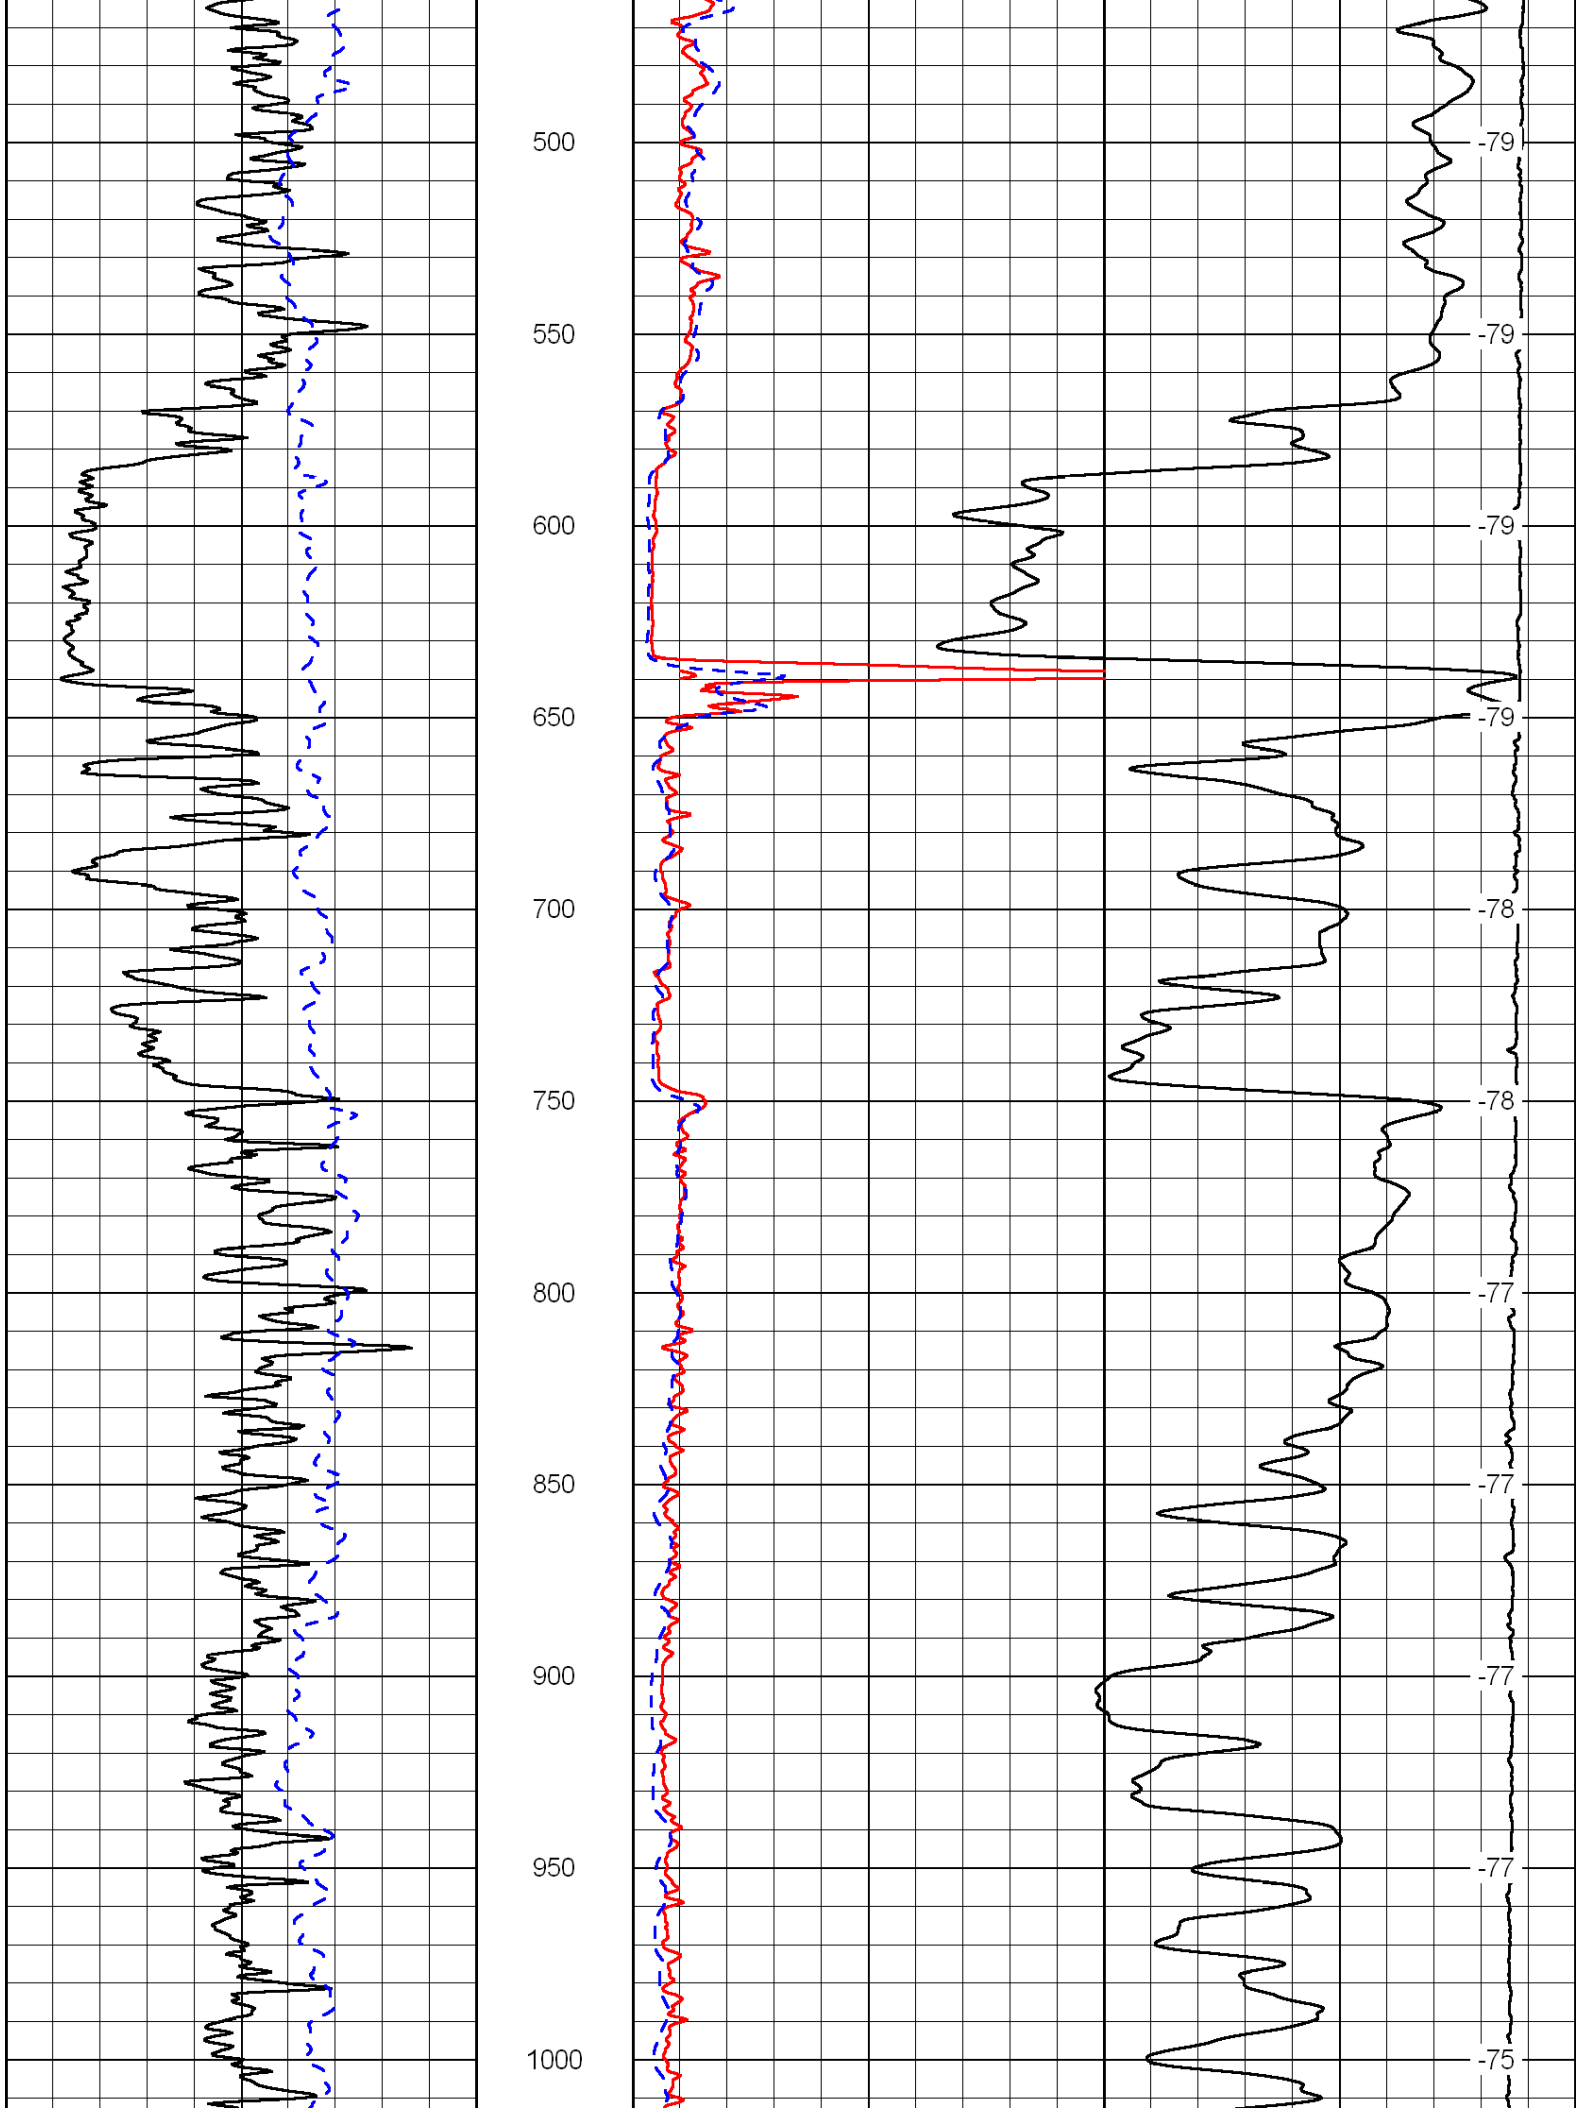
DIGITAL LOG (785) 625-3858

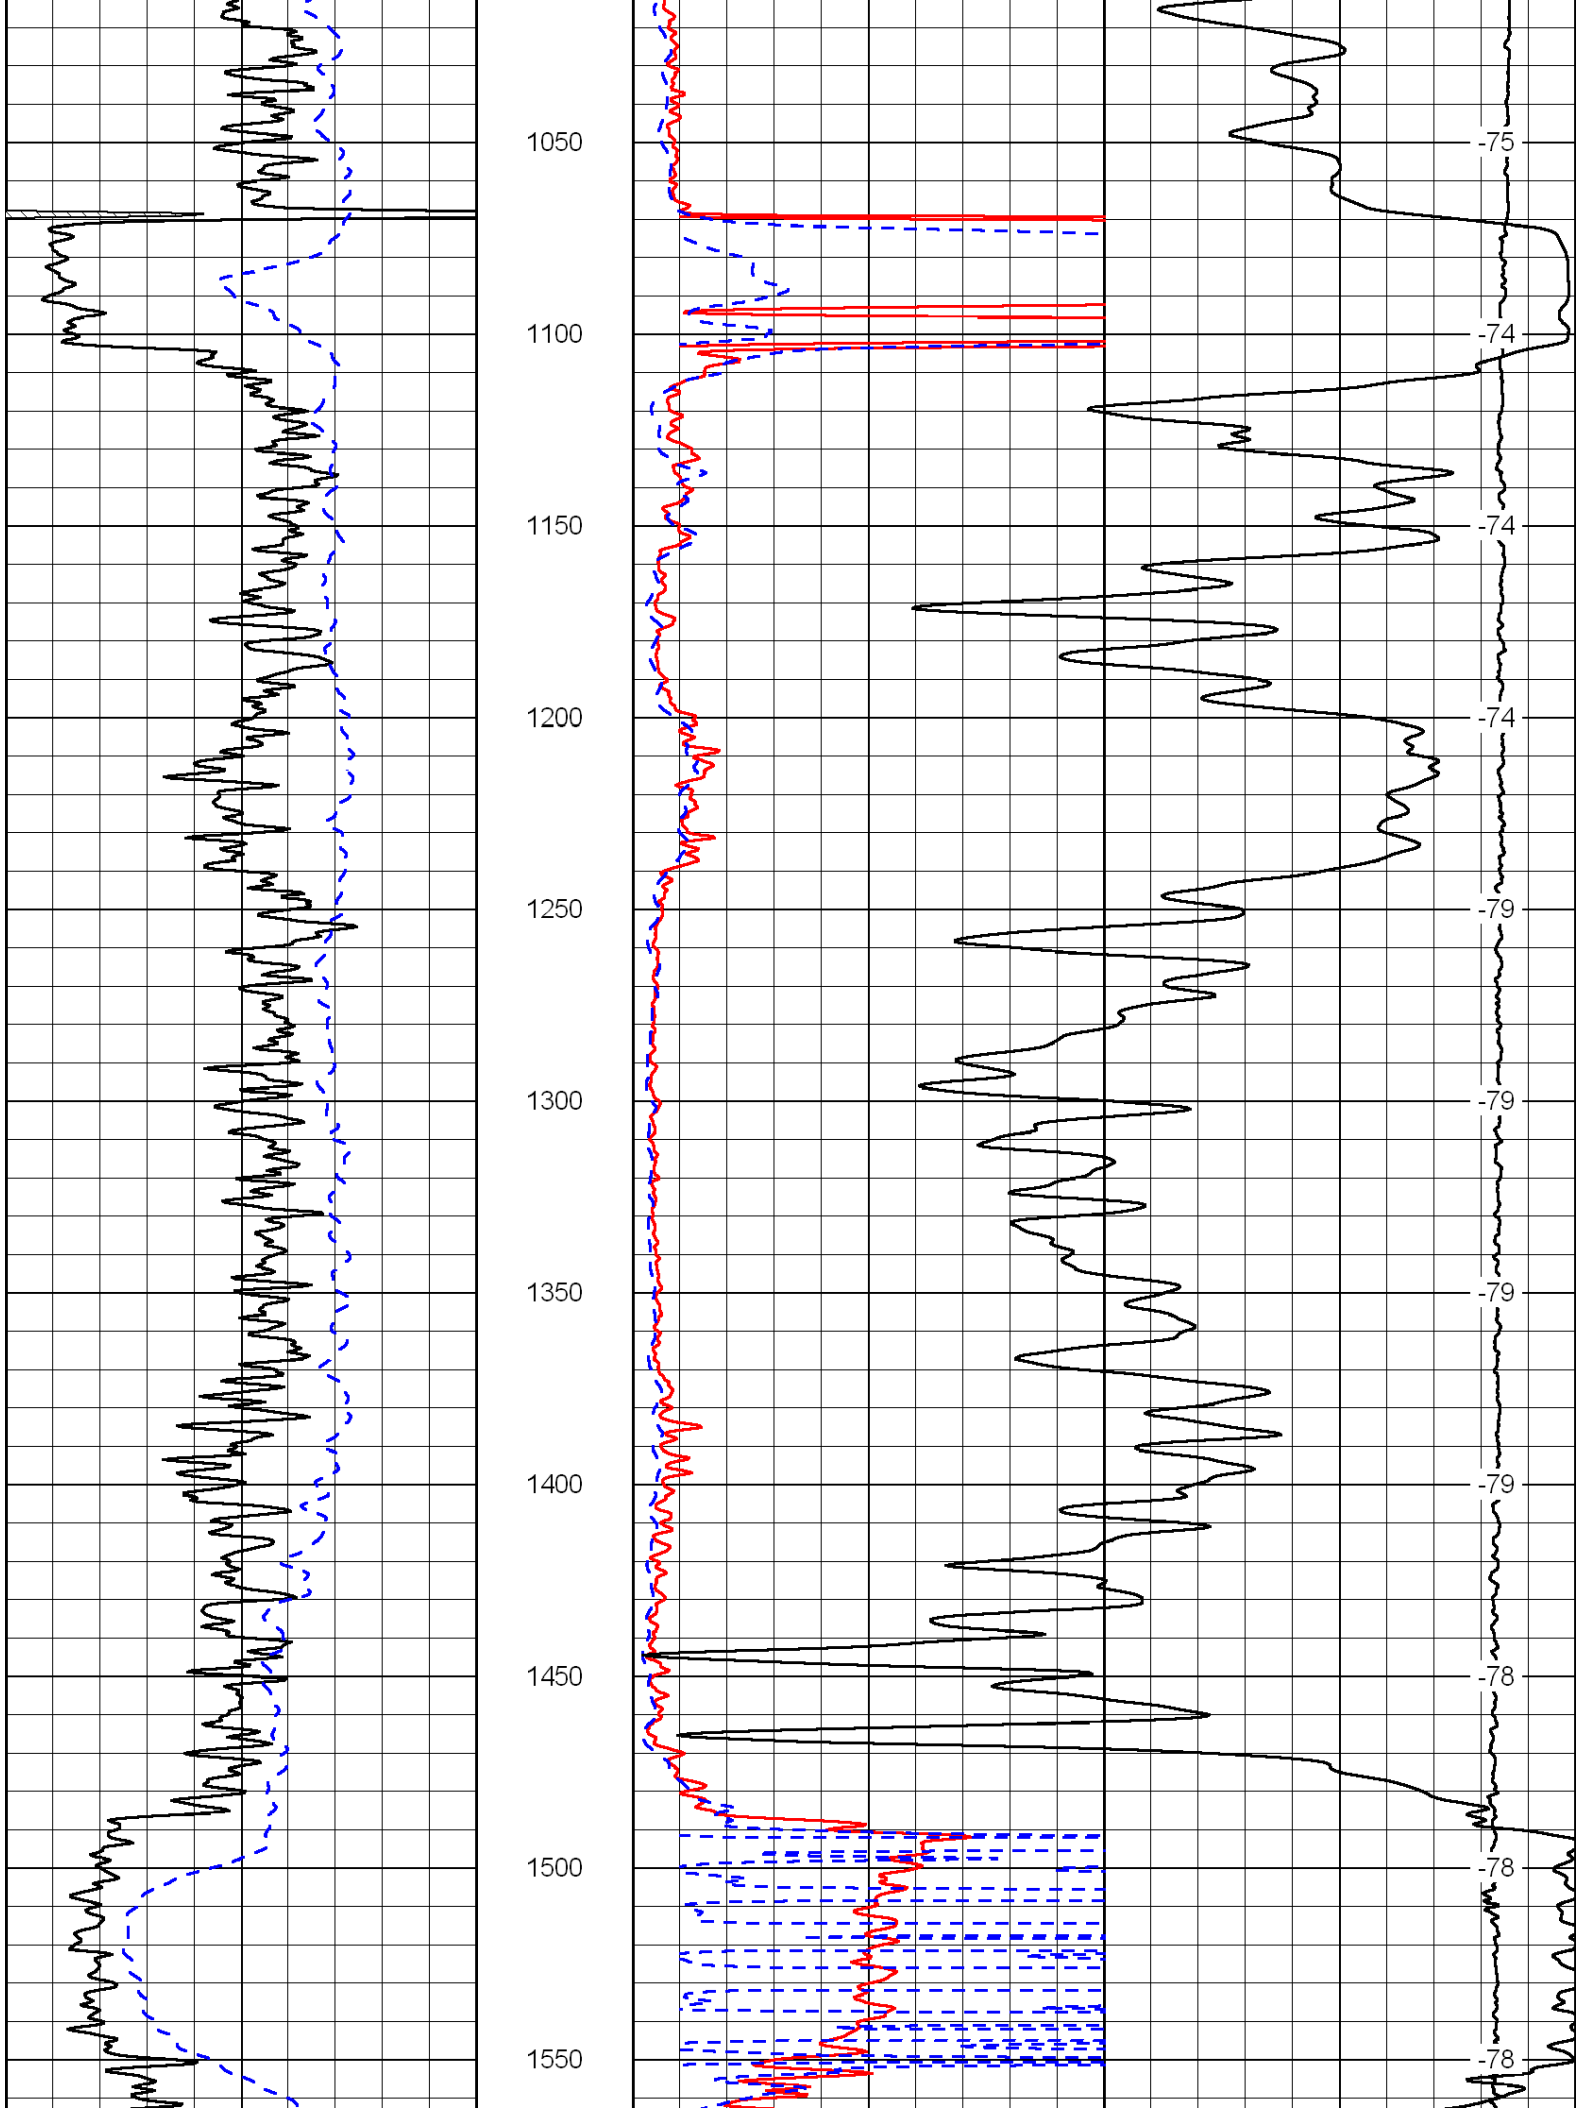
Dual Induction Log

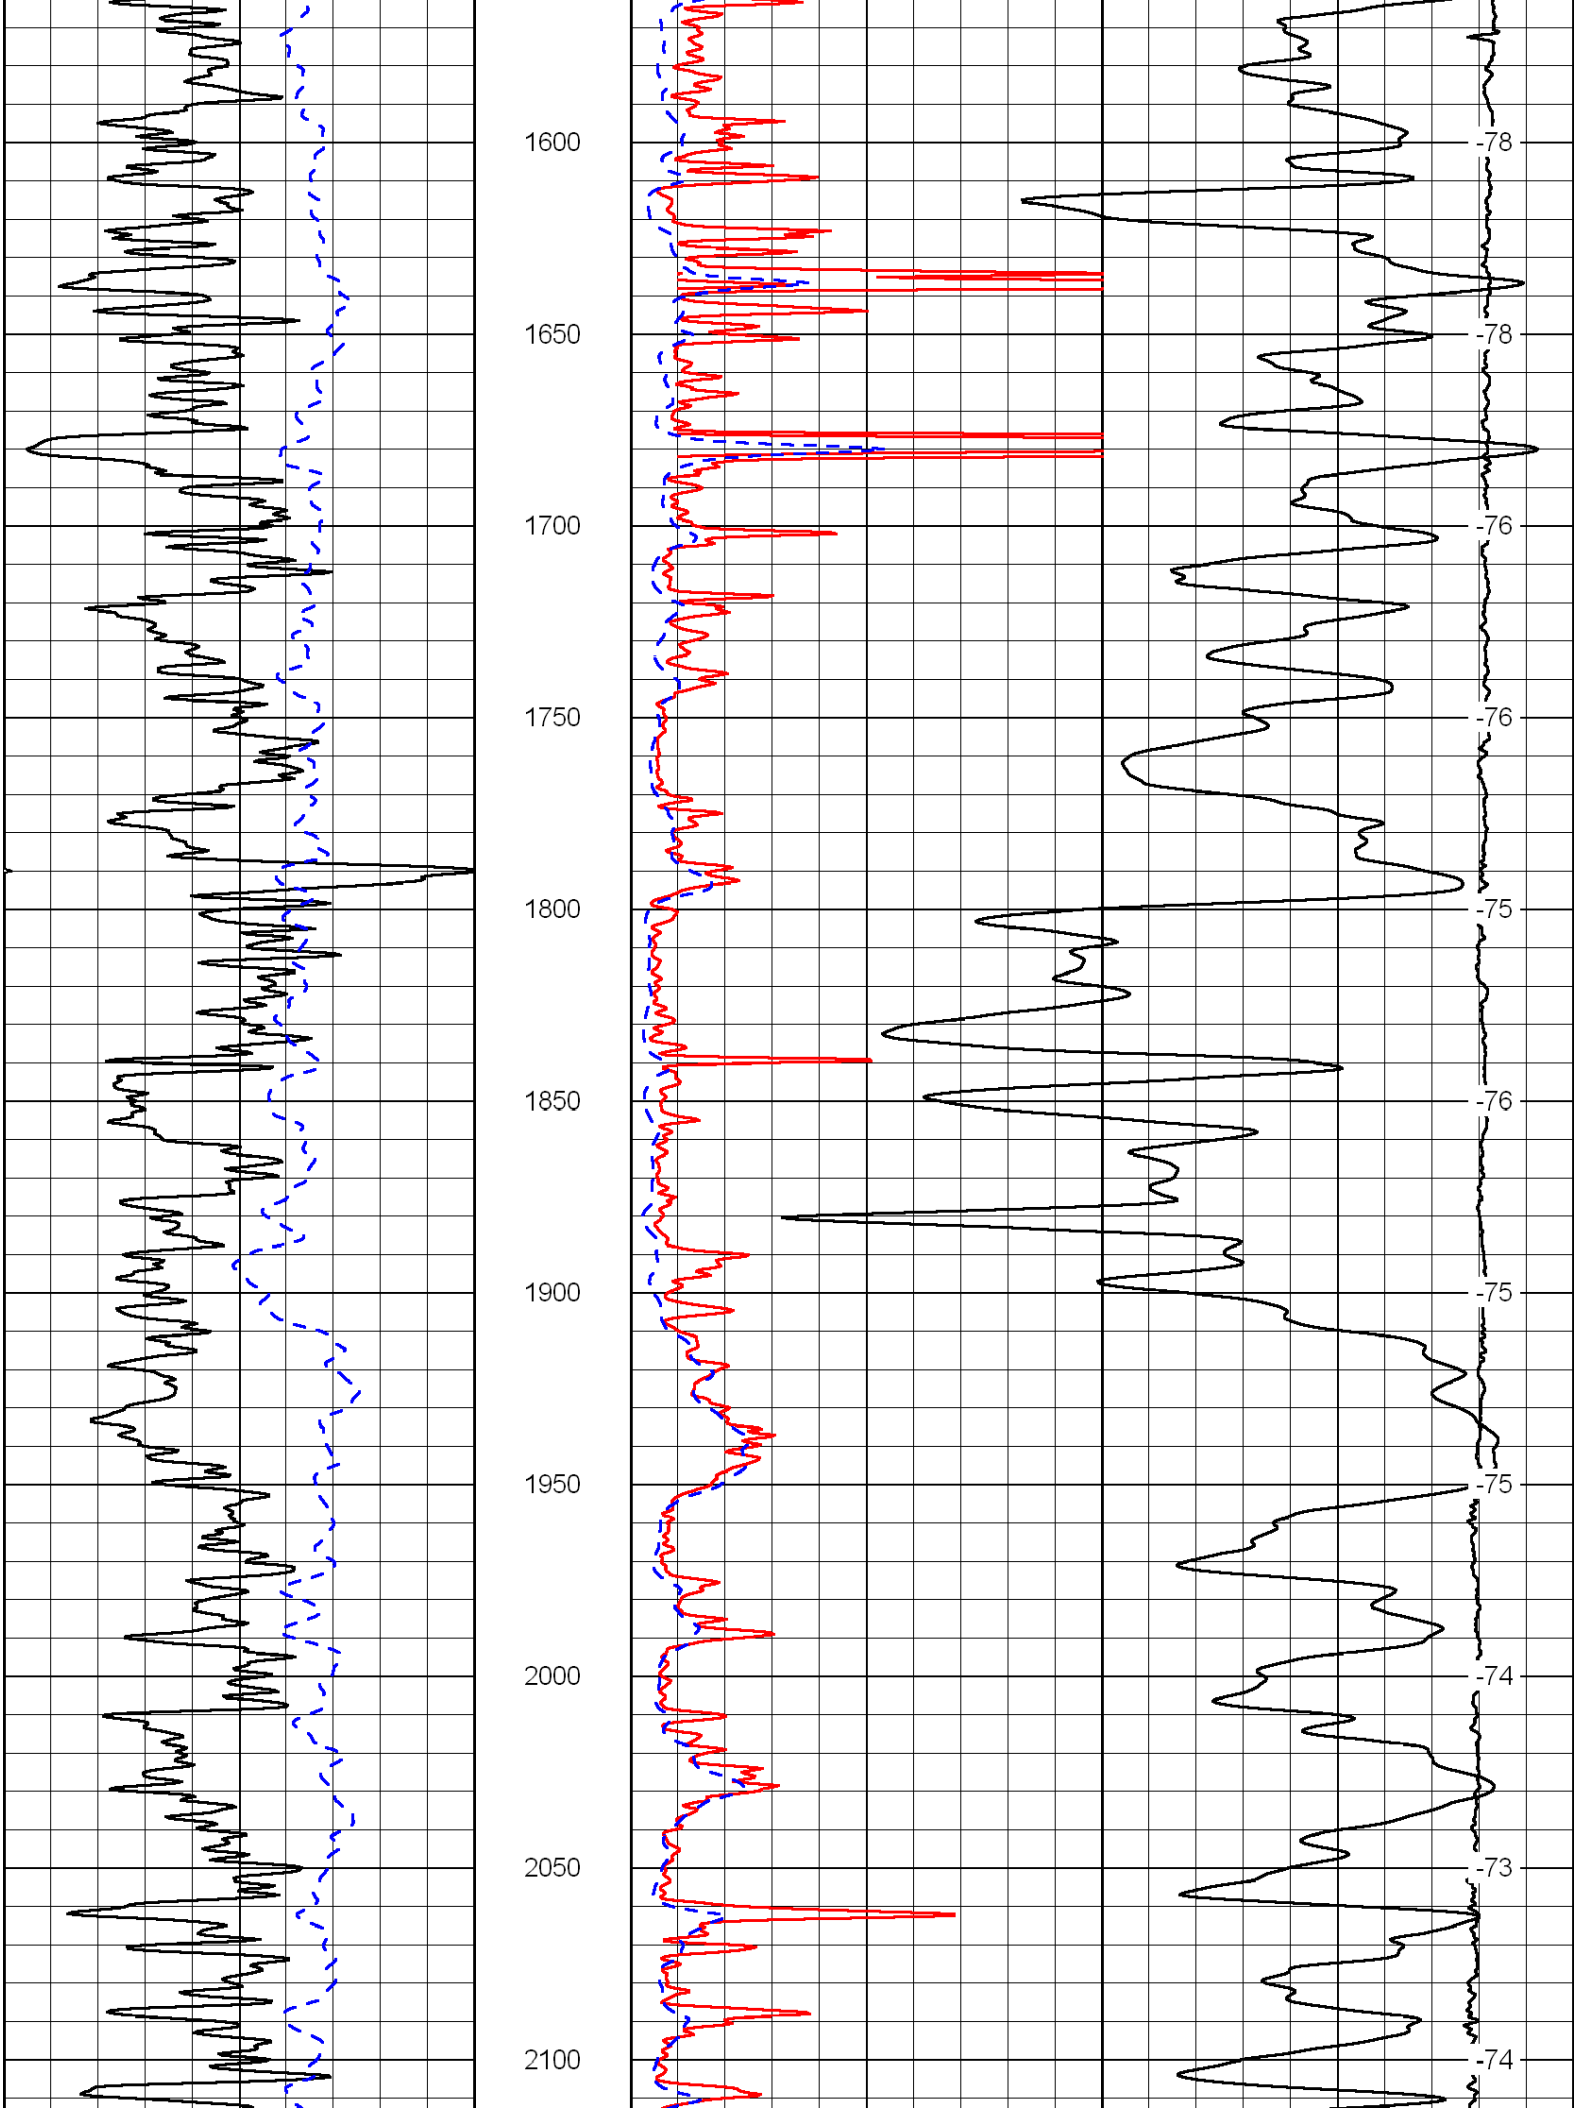
Company	Murfin Drilling Company, Inc.
Well	Chris #1-17
Field	Wildcat
County	Osborne State Kansas
Location	SE NW NW NE 380' FNL & 2210' FEL
Sec: 17	Twp: 10 S Rge: 14 W
API No.	15-141-20,426-00-00
Other Services	CNL/CDL MEL/BHCS
Elevation	K.B. 1847 D.F. G.L. 1842
Permanent Datum	Ground Level
Log Measured From	Kelly Bushing 5 Ft. Above Perm. Datum
Drilling Measured From	Kelly Bushing

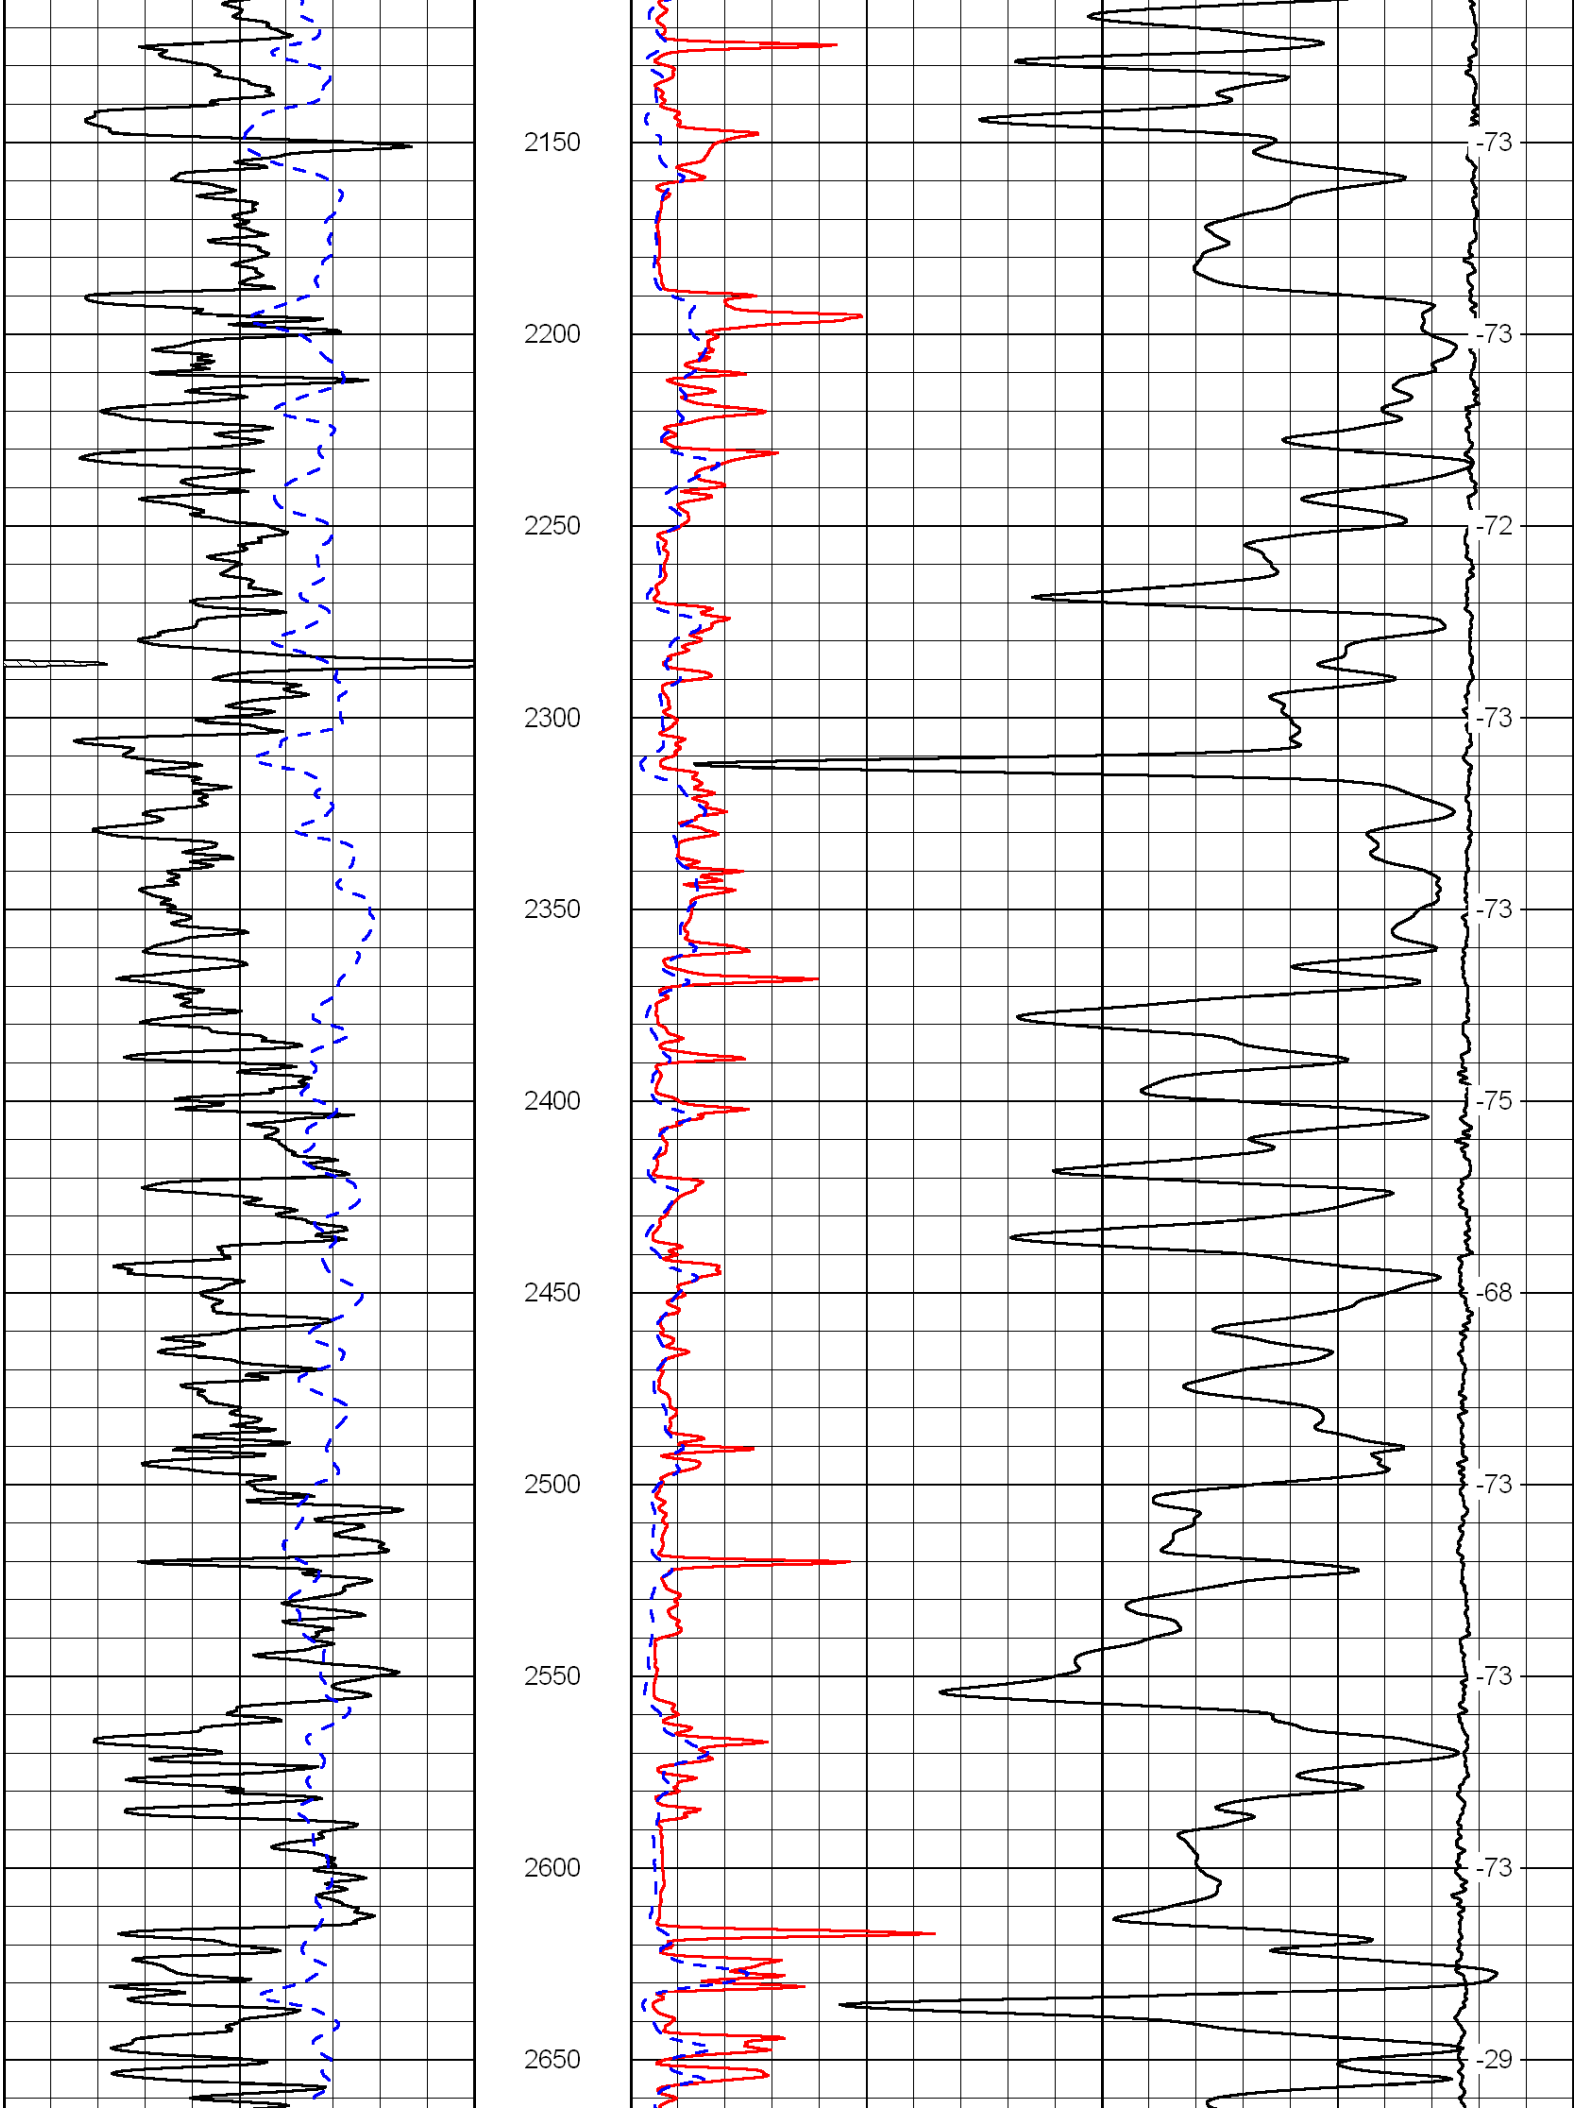
| | | |

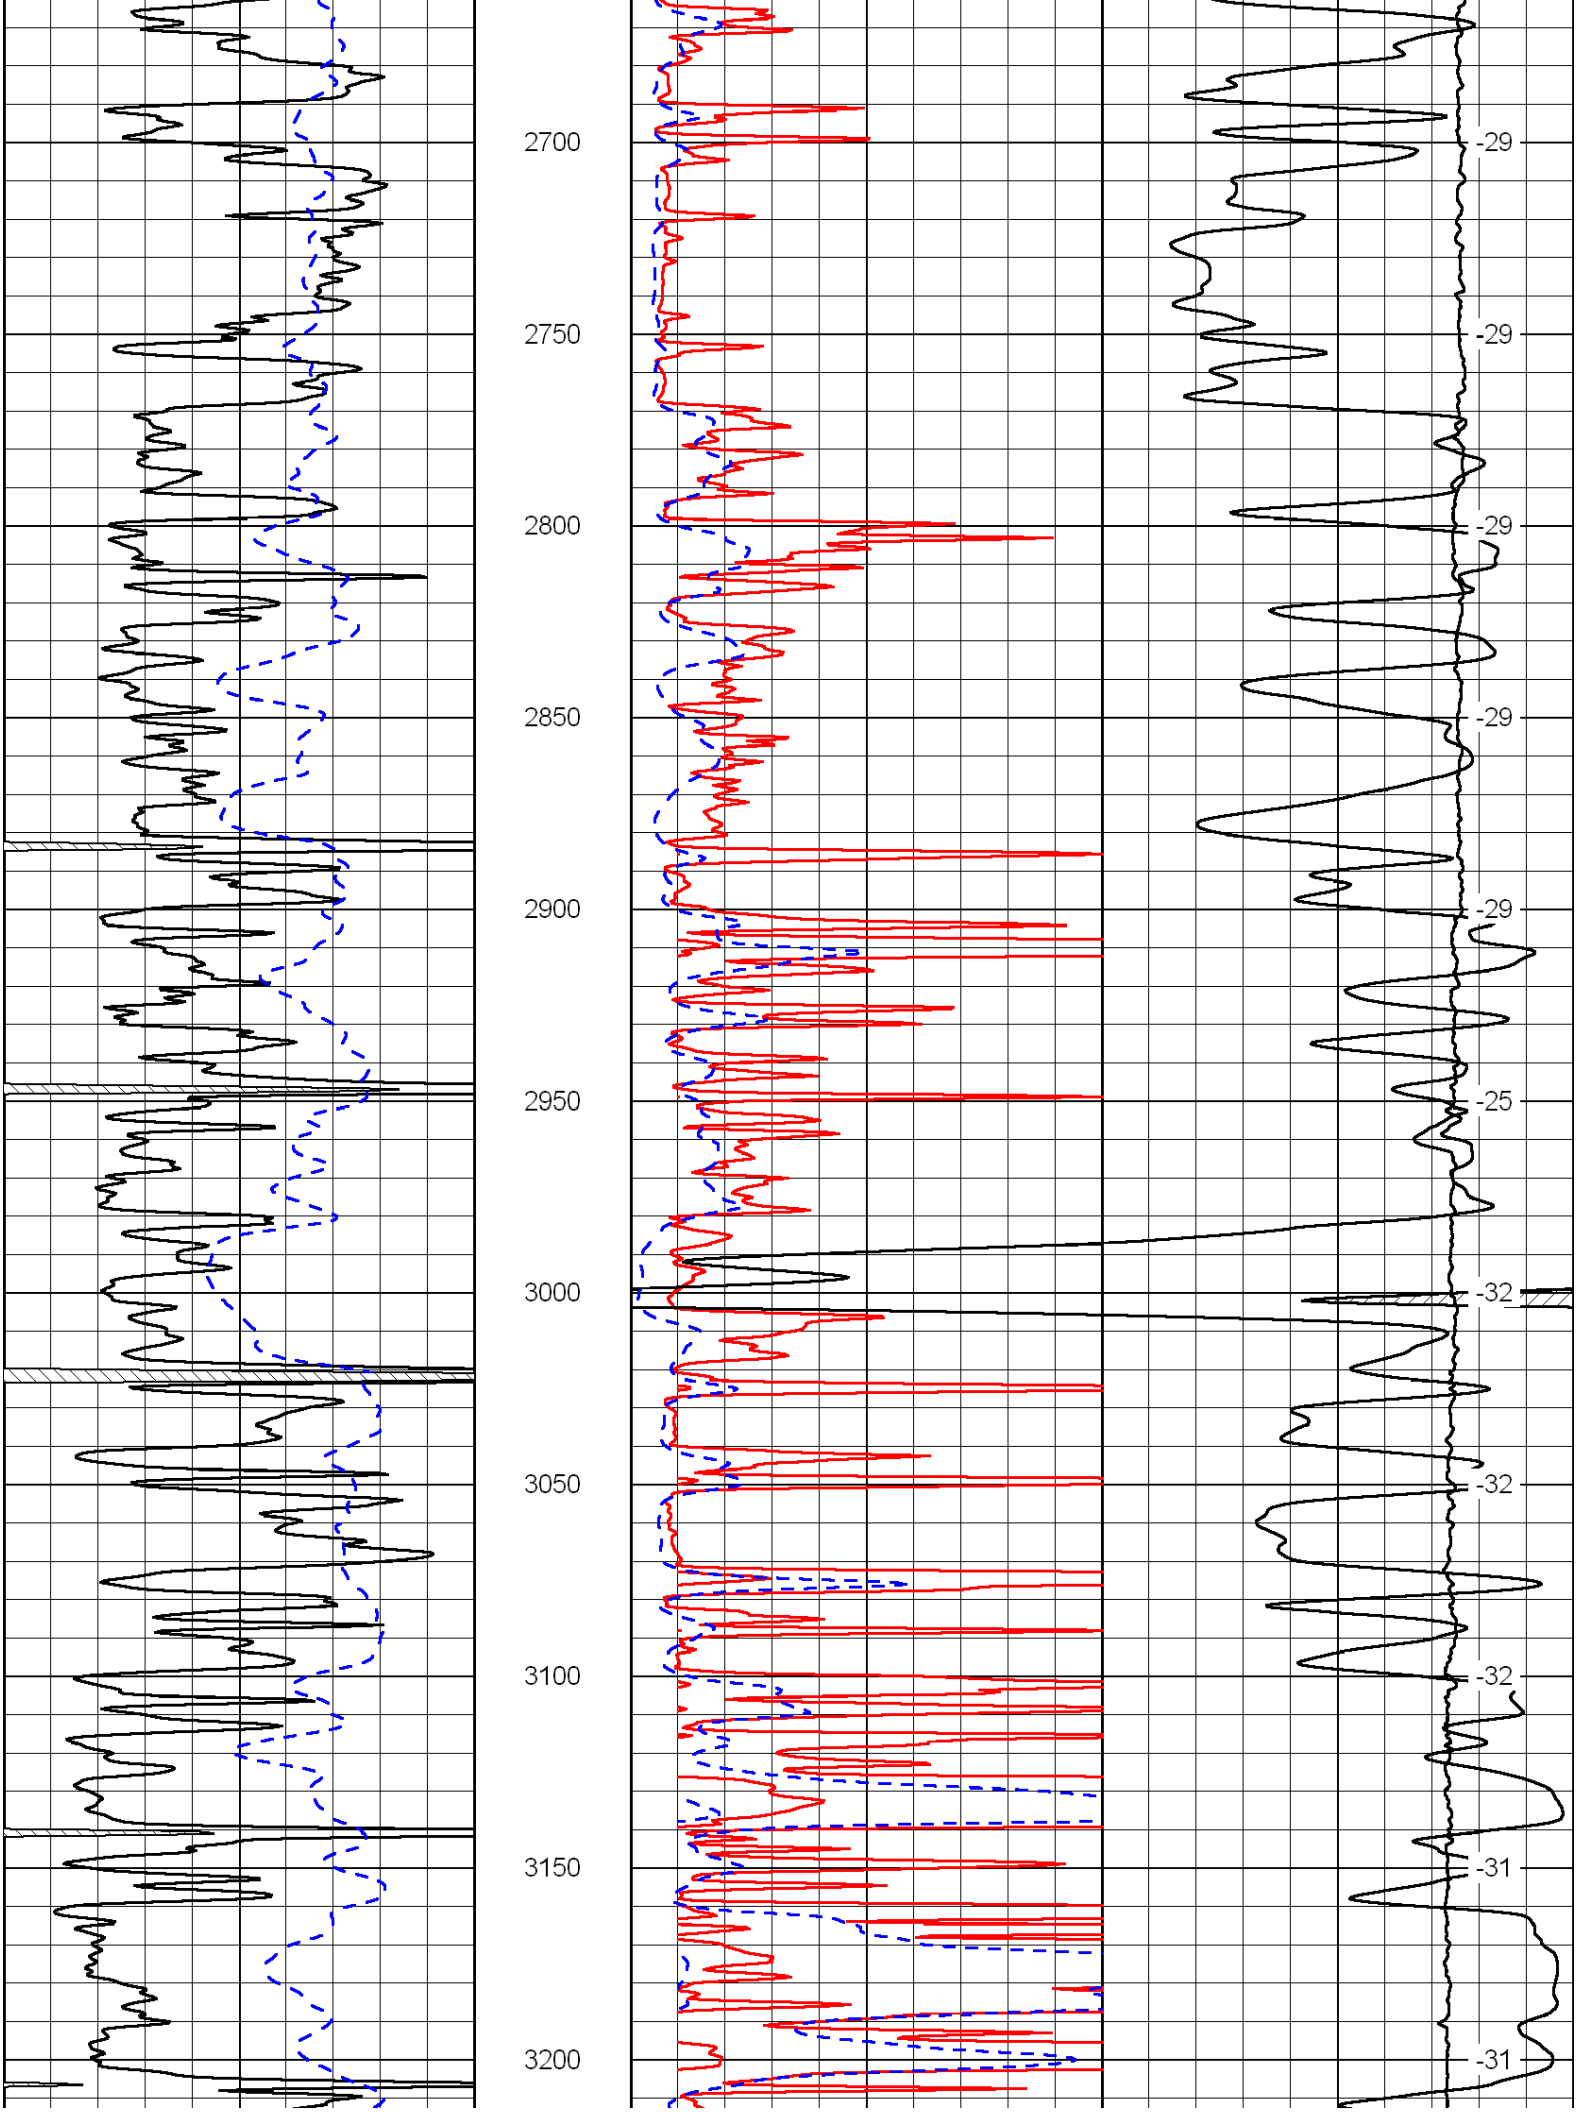

0 Gamma Ray 150
-200 SP (mV) 0
0 Shallow Resistivity 50
0 Deep Resistivity 50
1000 Conductivity 0
15000 Line Tension 0
50 Shallow Resistivity 500
50 Deep Resistivity 500
LSPD
0
50
100
150
200
250
300
350
400
450
-500
-79
-79
-79
-79
-38
-79
-78
-80
-80

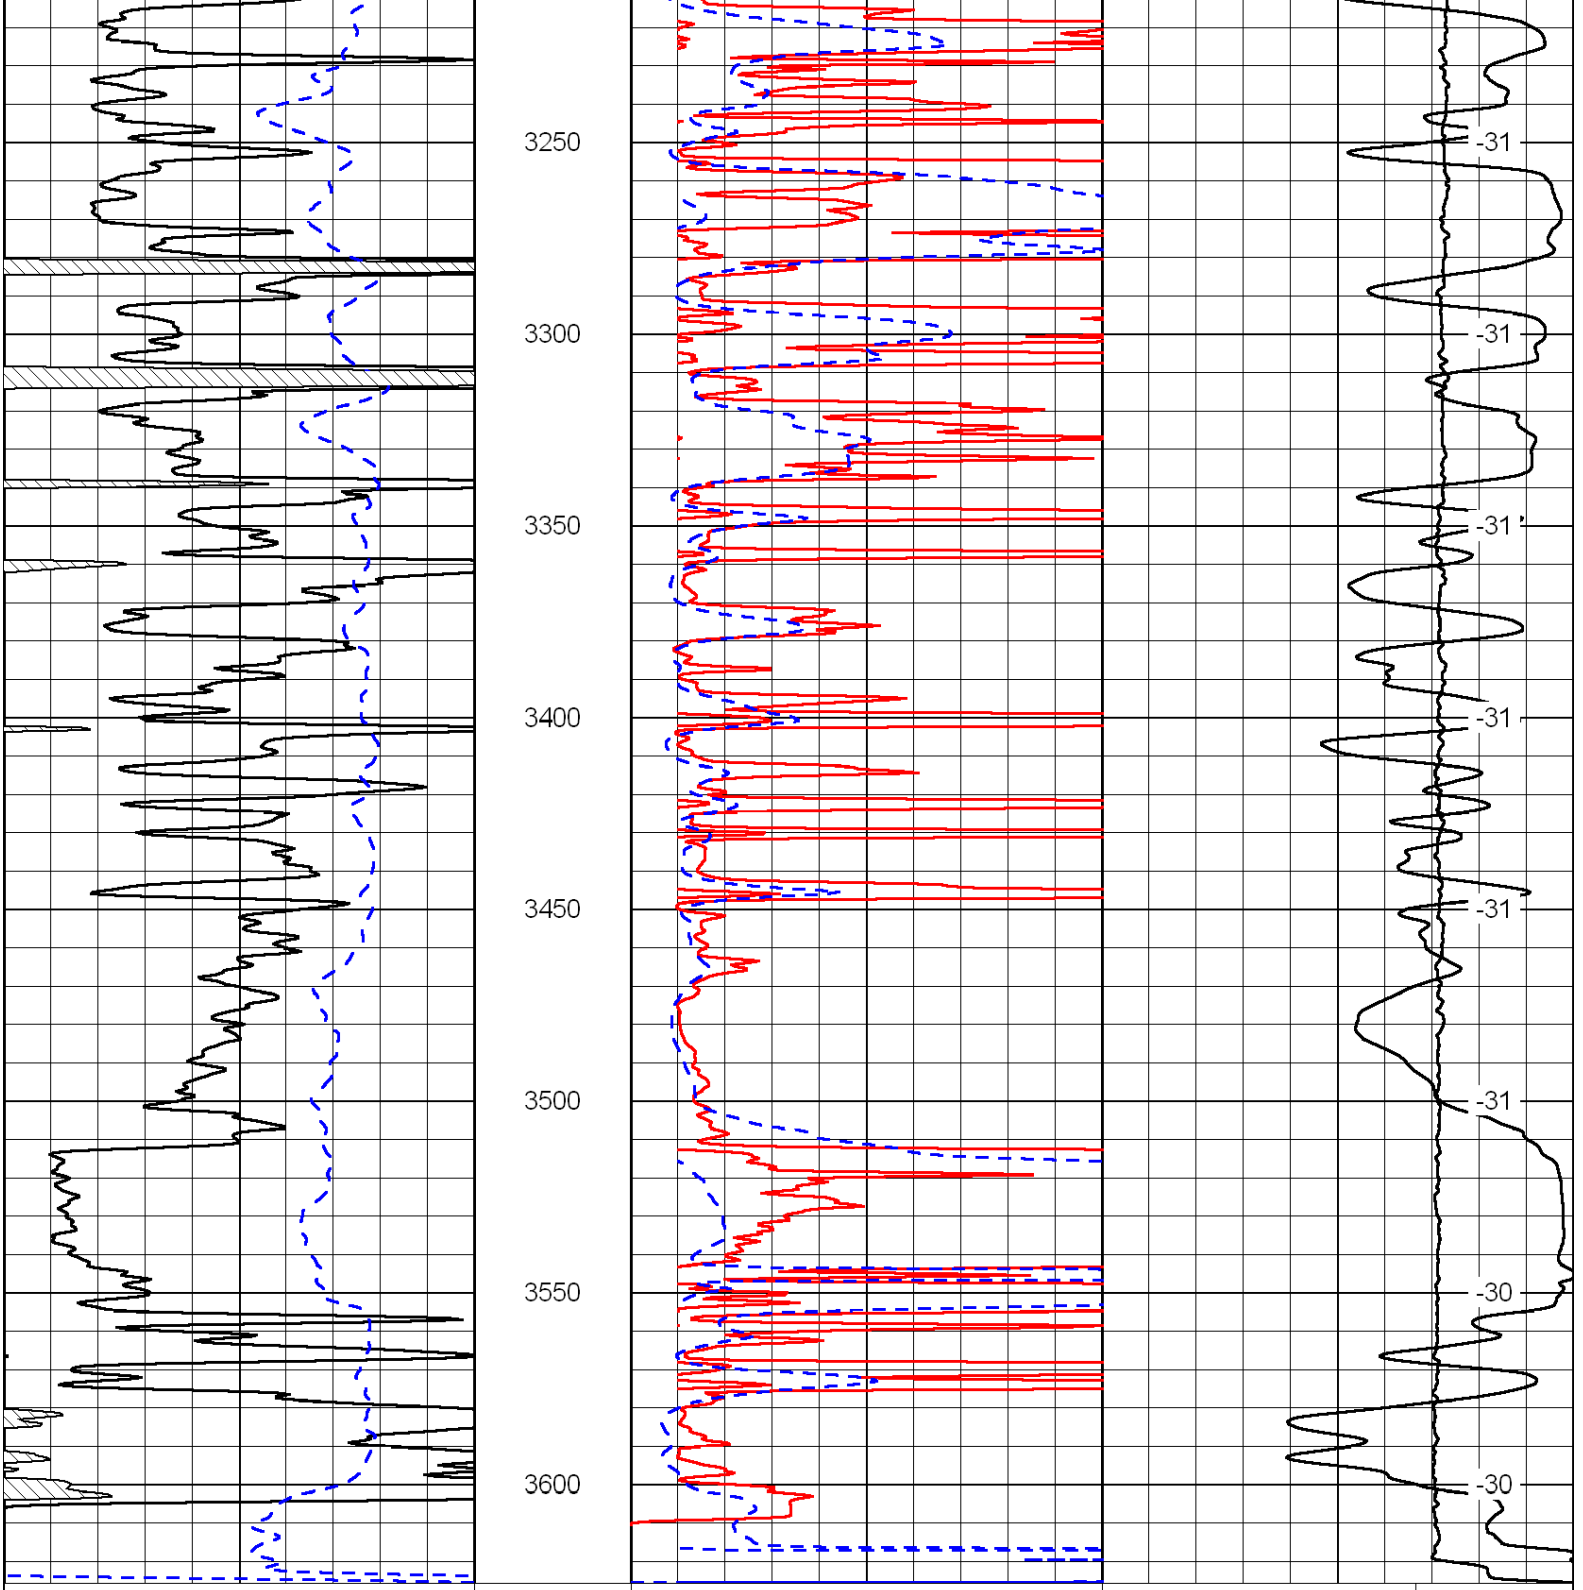

500
550
600
650
700
750
800
850
900
950
1000
-79
-79
-79
-79
-78
-78
-77
-77
-77
-77
-75


1050
1100
1150
1200
1250
1300
1350
1400
1450
1500
1550
-75
-74
-74
-74
-79
-79
-79
-79
-78
-78
-78

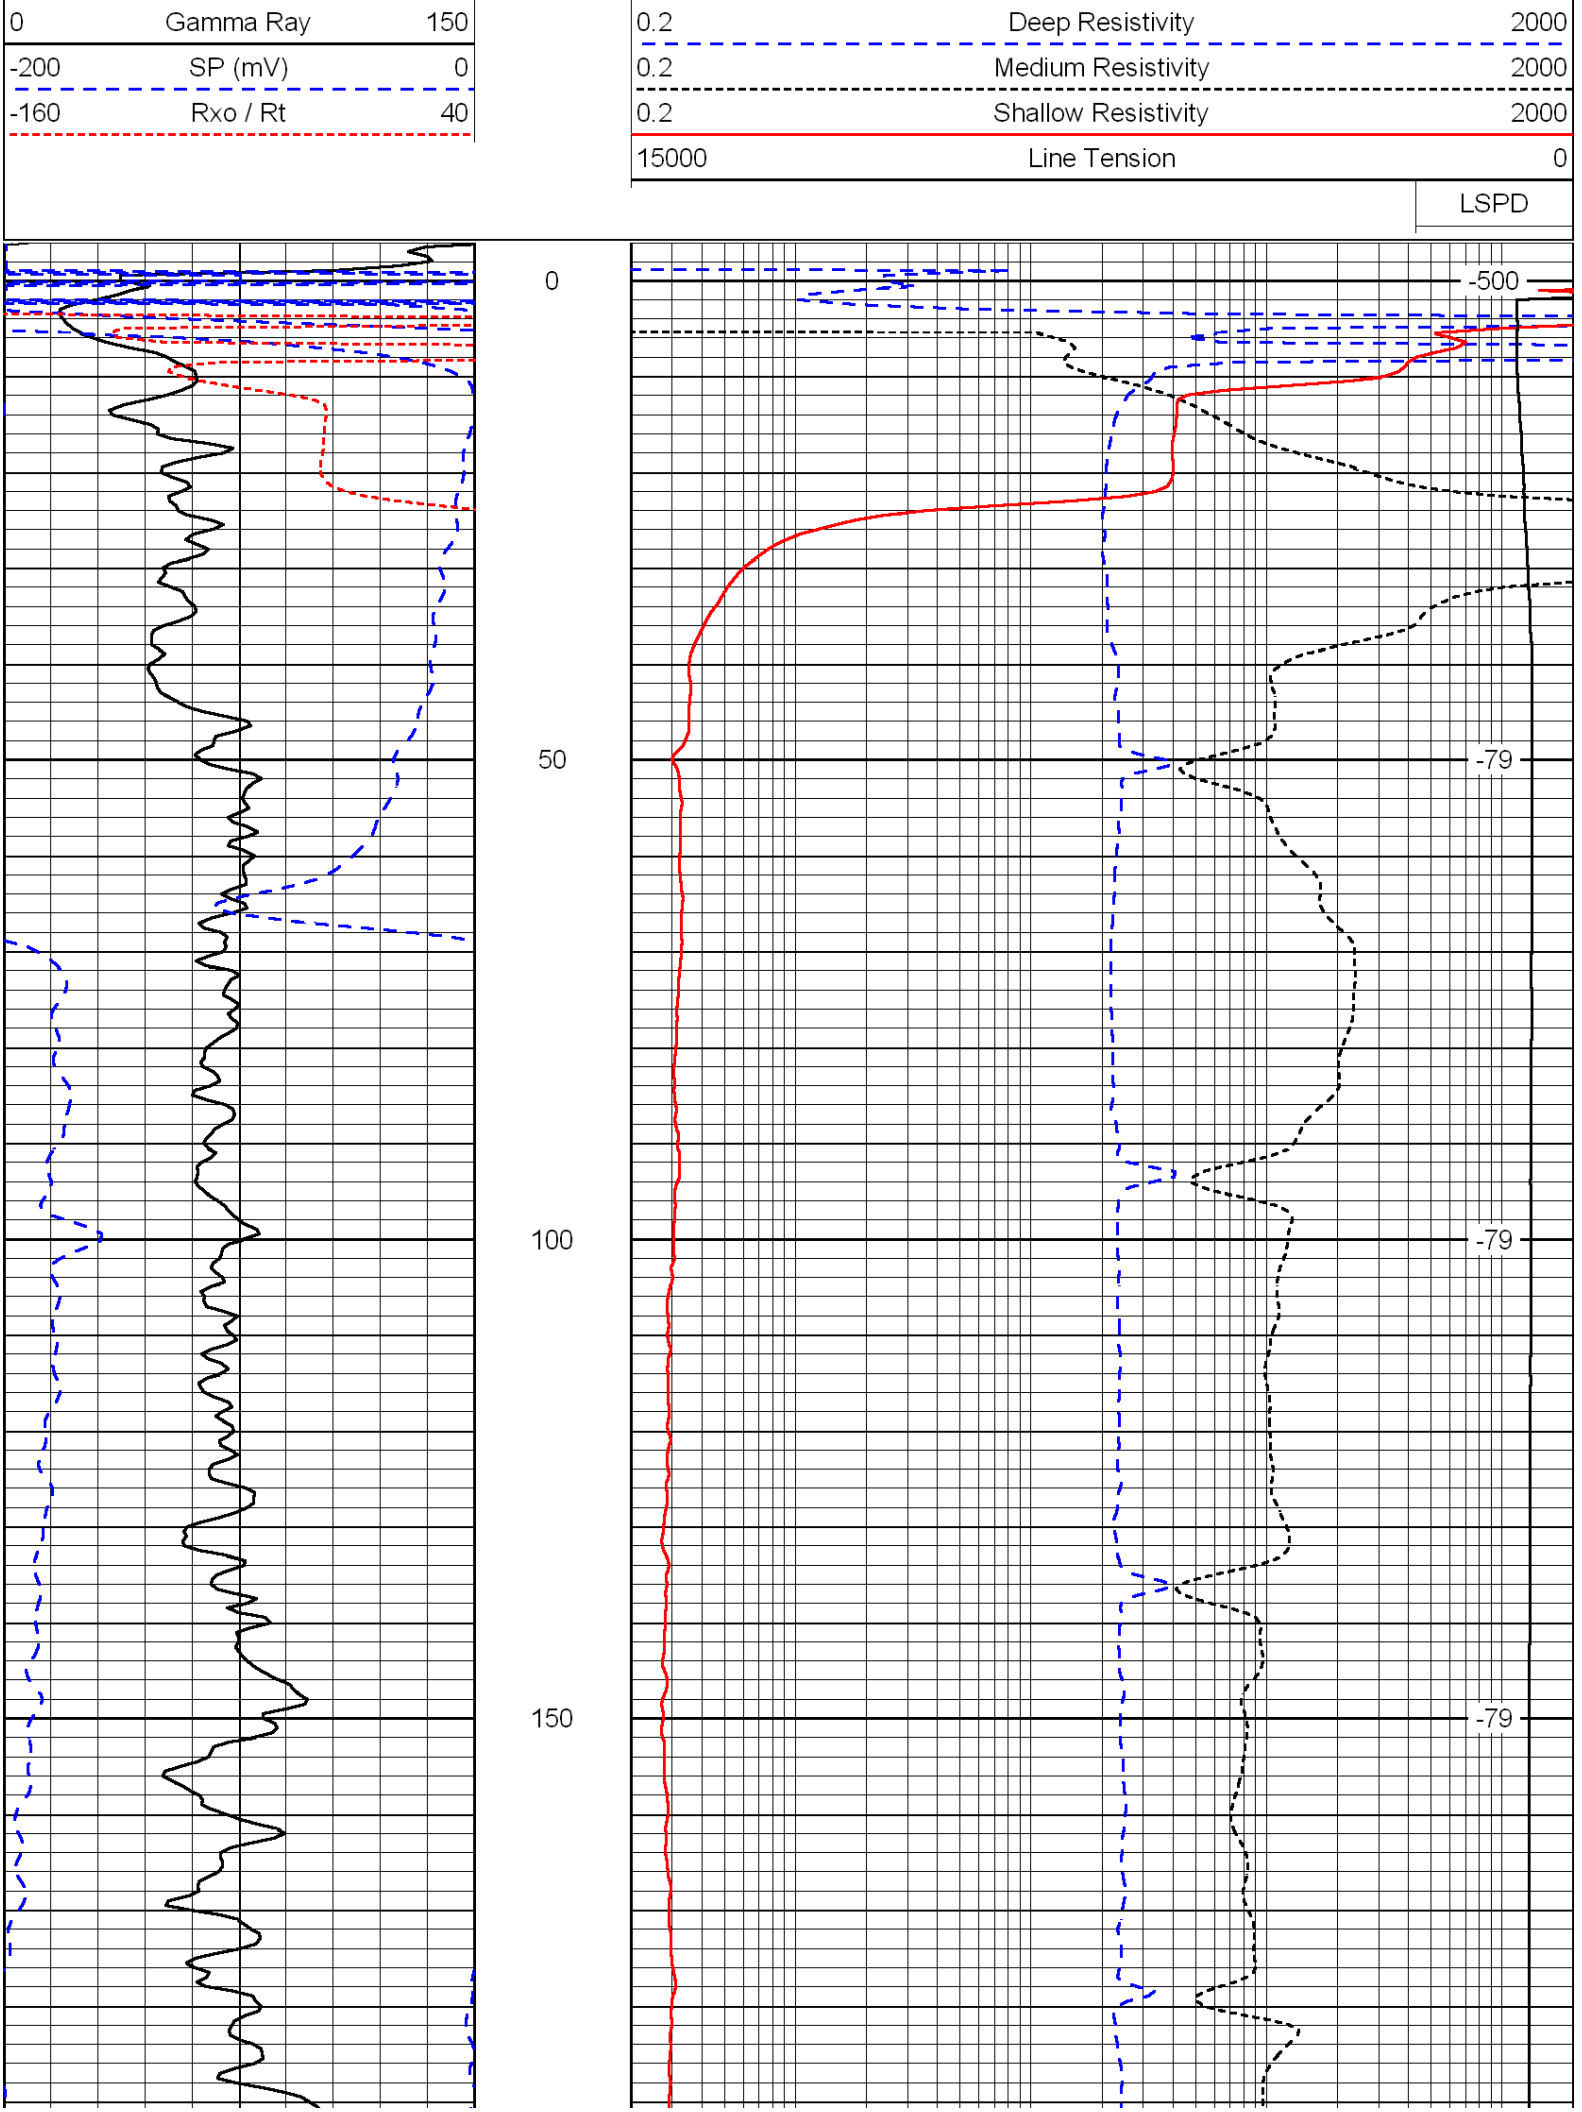

1600
1650
1700
1750
1800
1850
1900
1950
2000
2050
2100
-78
-78
-76
-76
-75
-76
-75
-75
-74
-73
-74

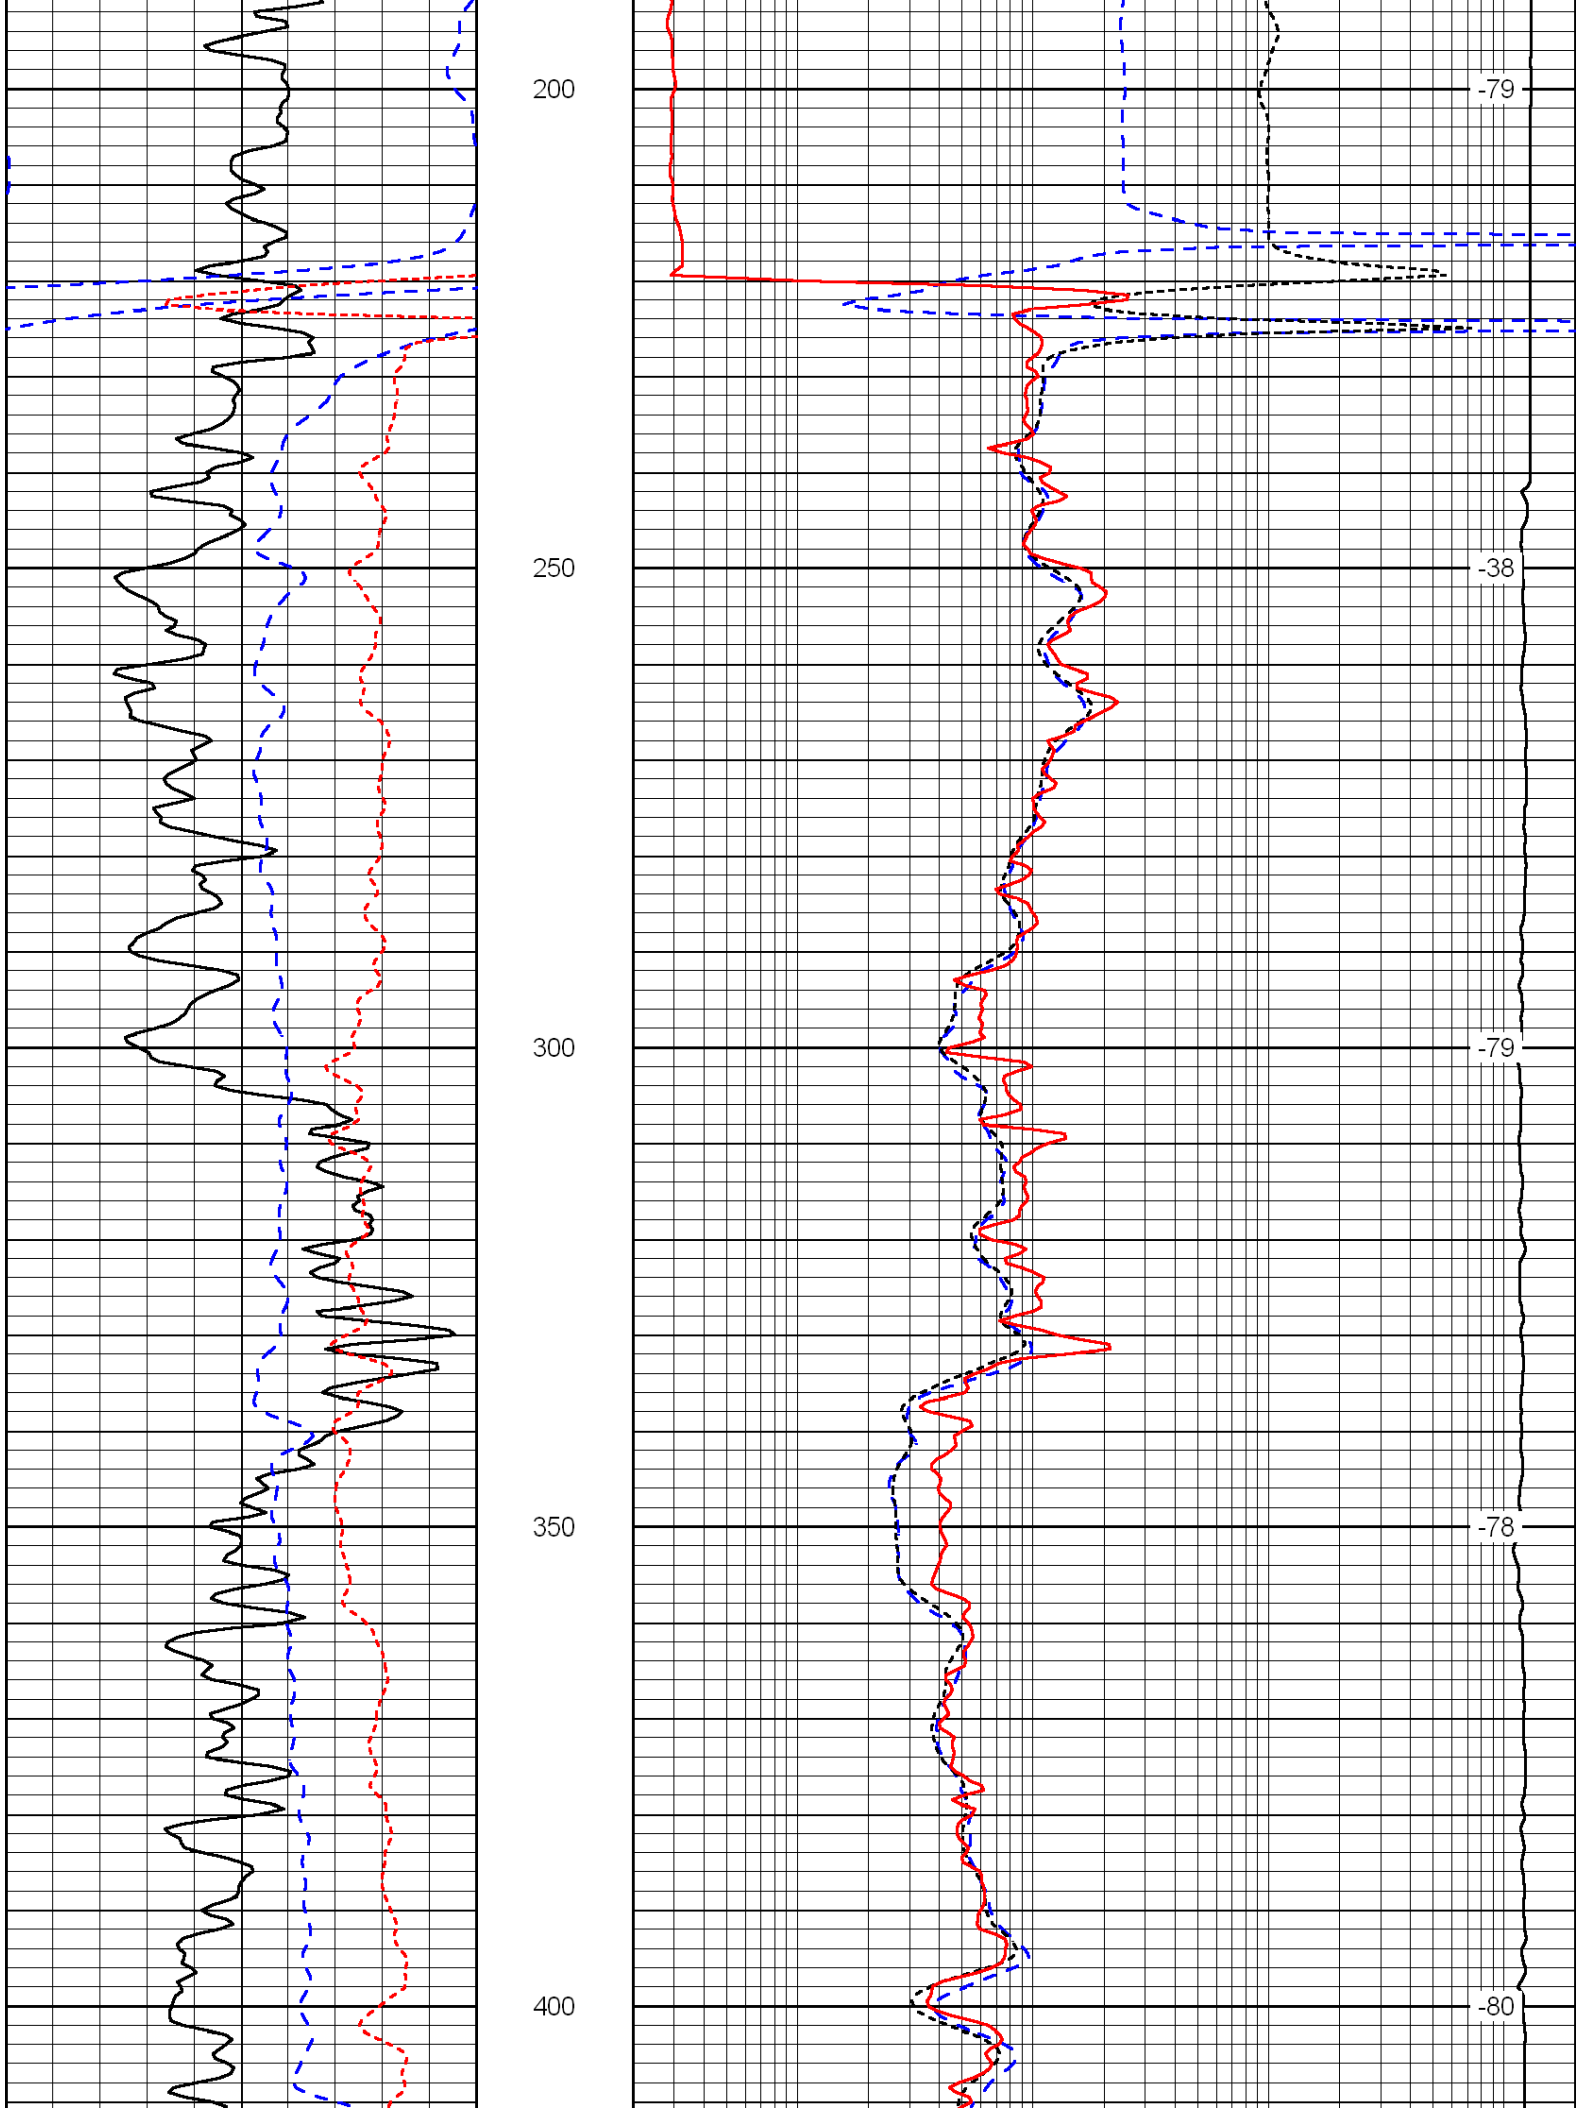

2150
2200
2250
2300
2350
2400
2450
2500
2550
2600
2650
-73
-73
-72
-73
-73
-75
-68
-73
-73
-73
-29

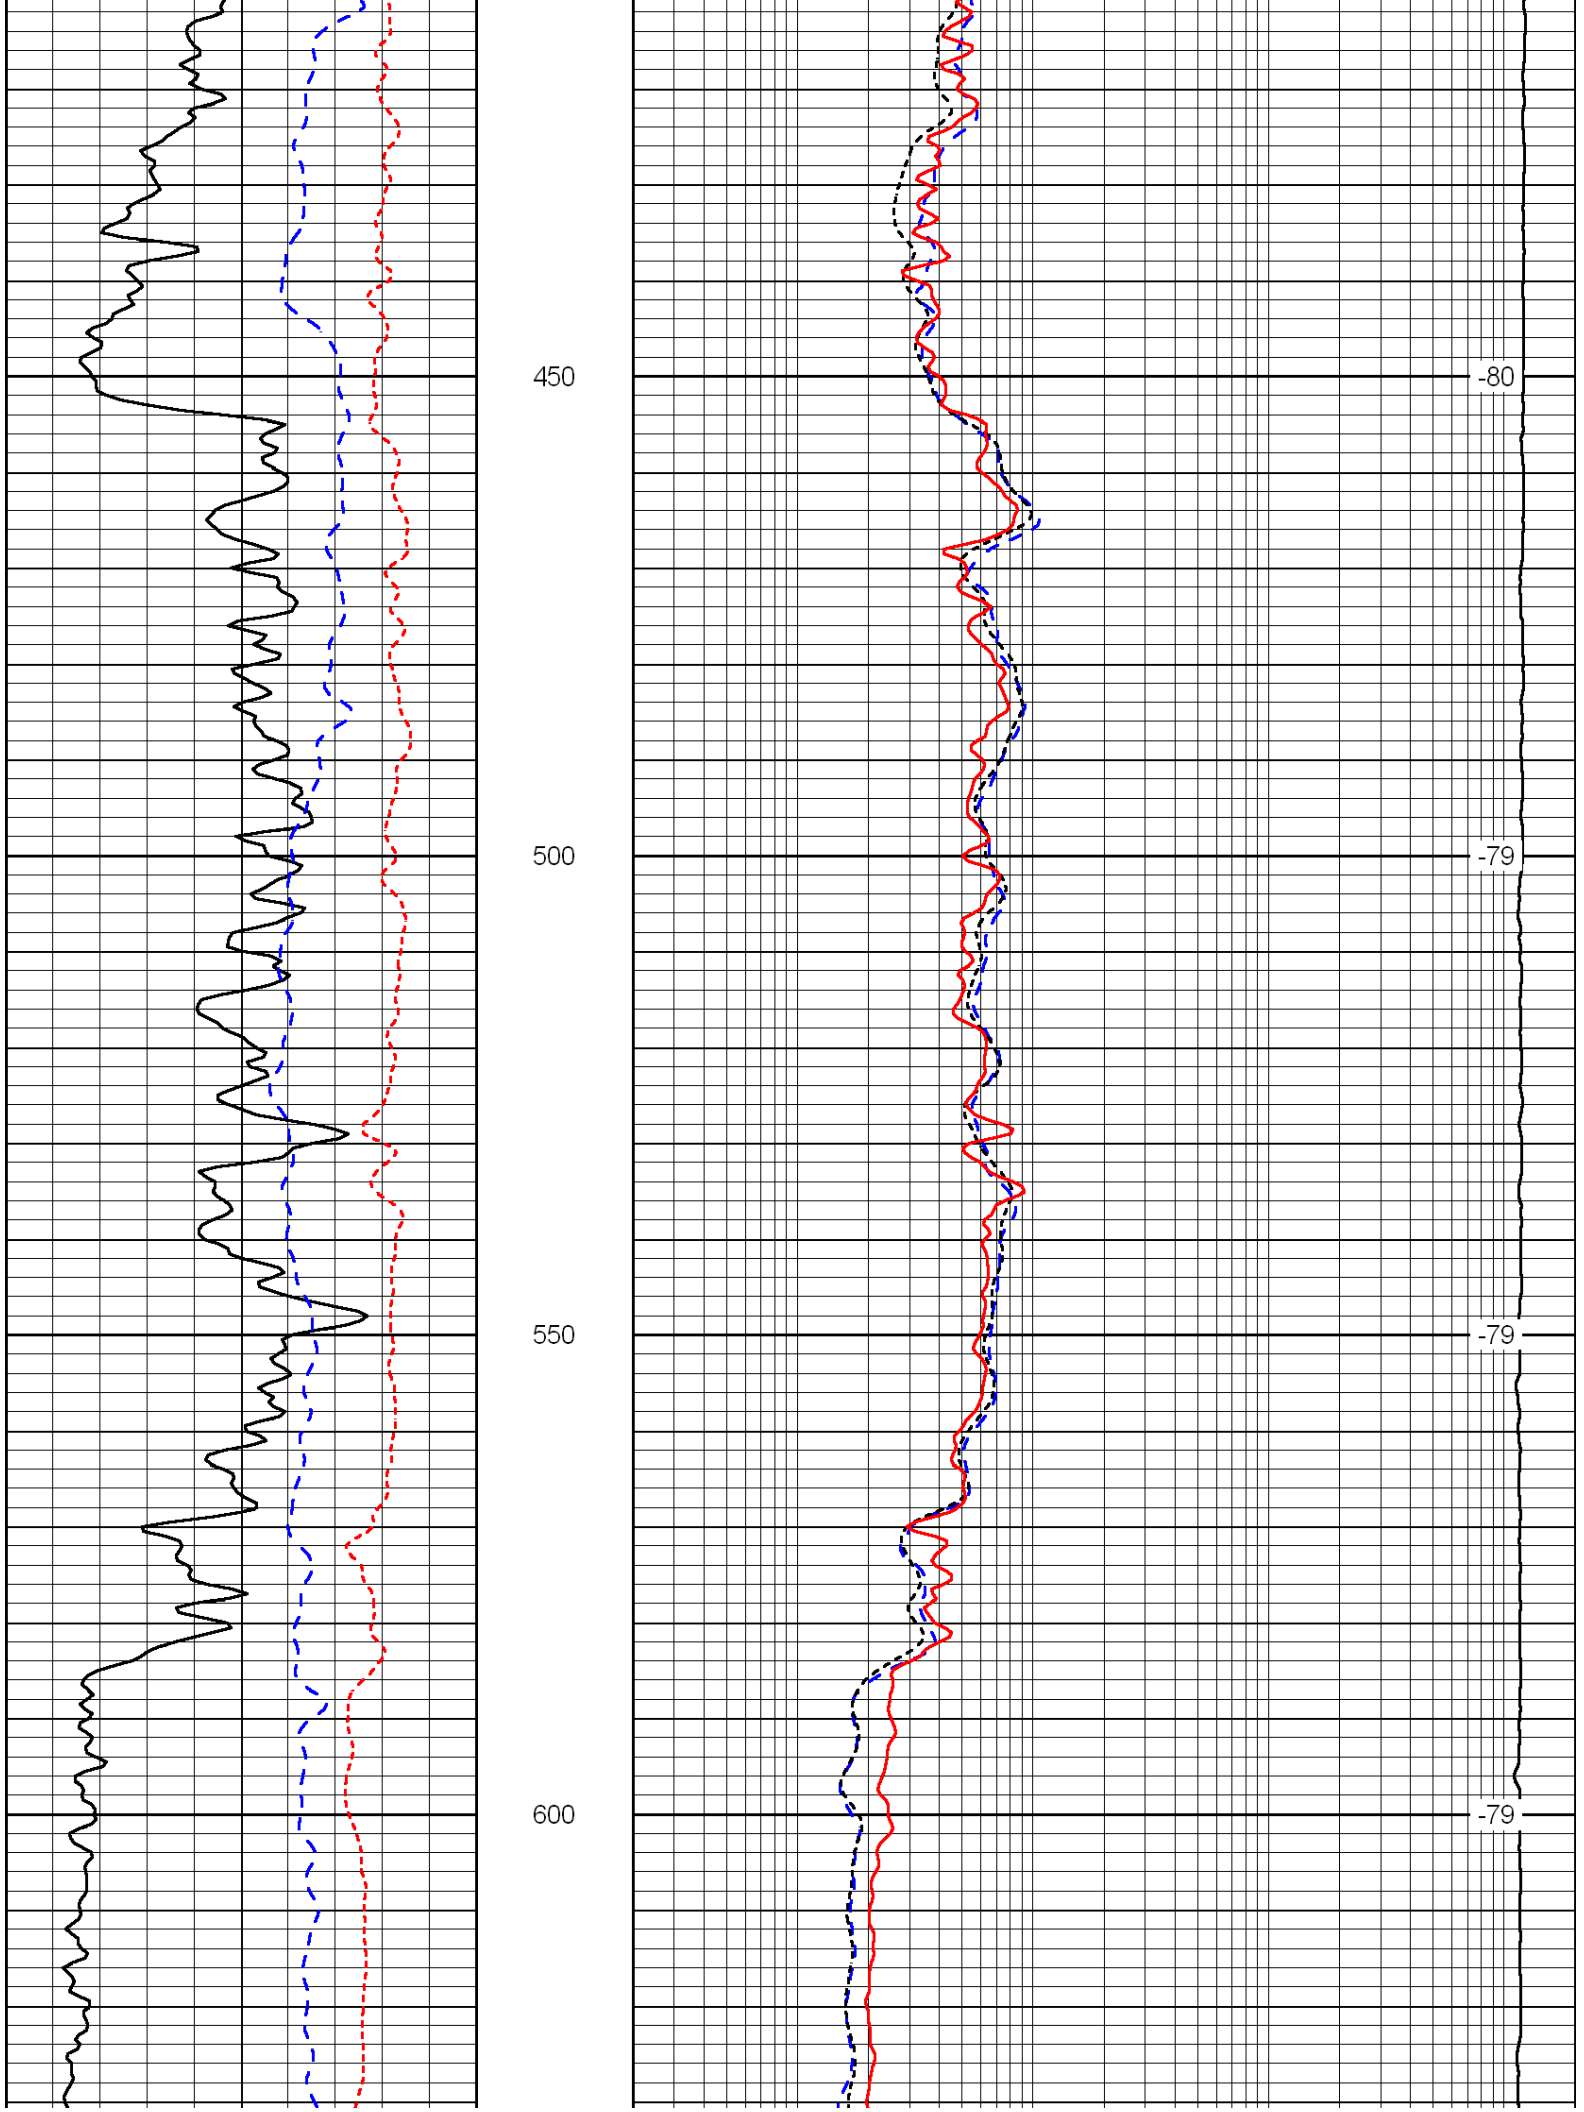

2700
2750
2800
2850
2900
2950
3000
3050
3100
3150
3200
-29
-29
-29
-29
-25
-32
-32
-32
-31
-31

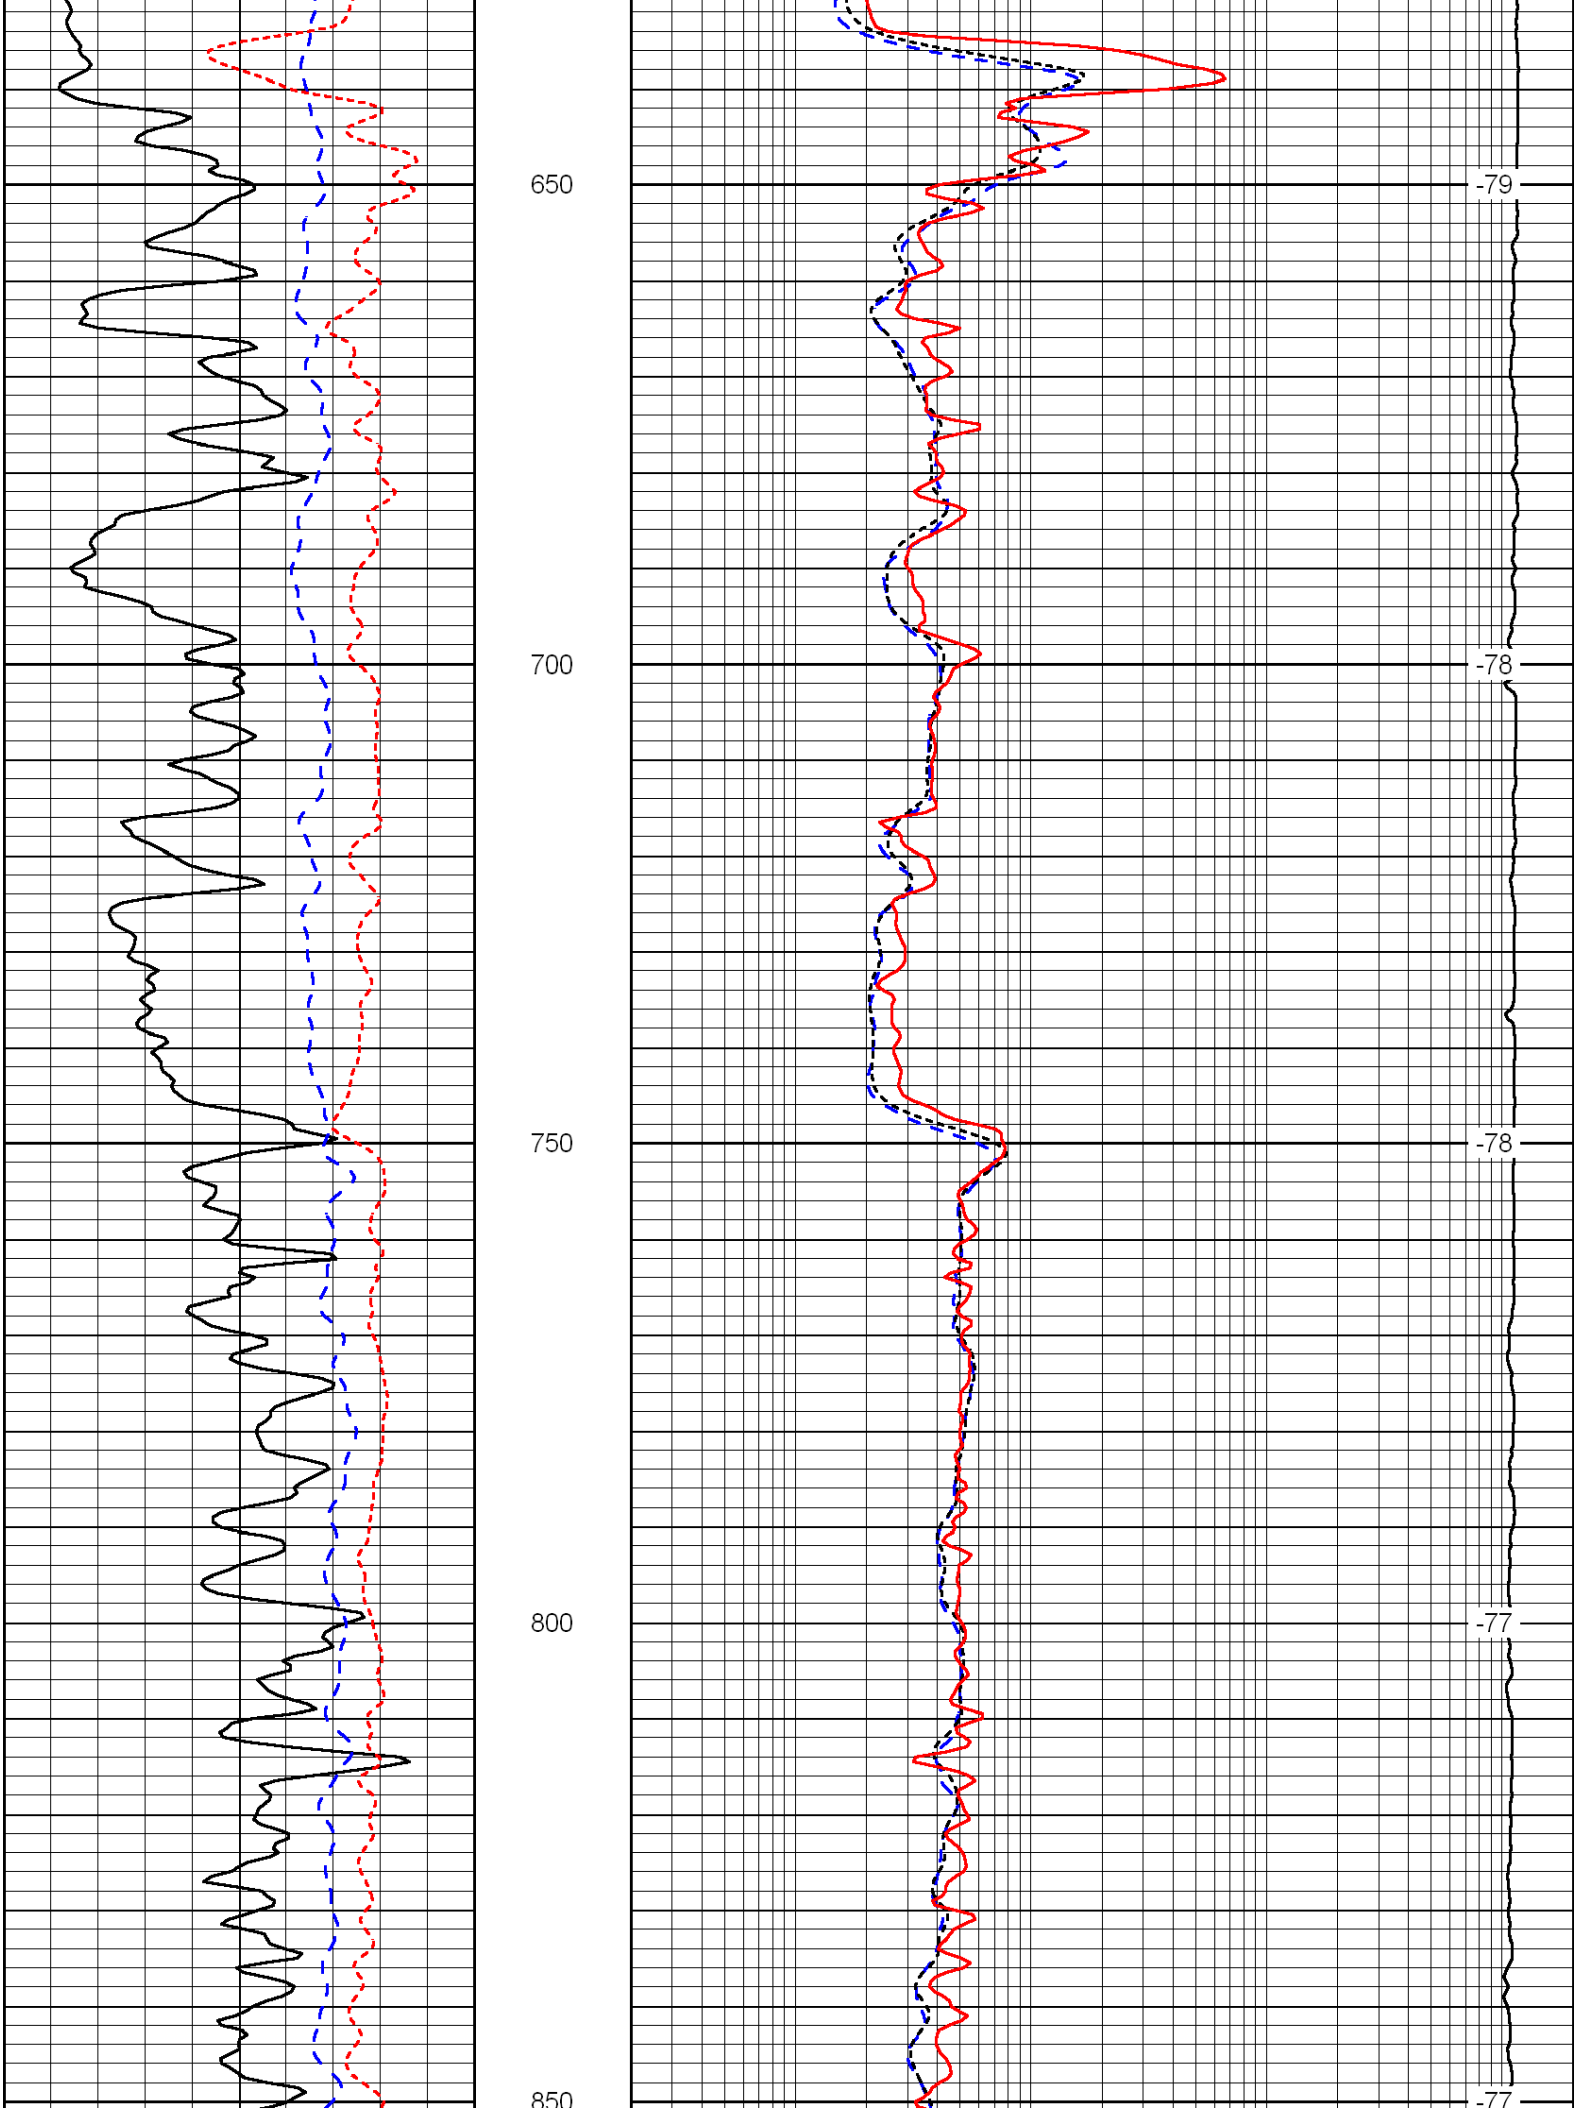


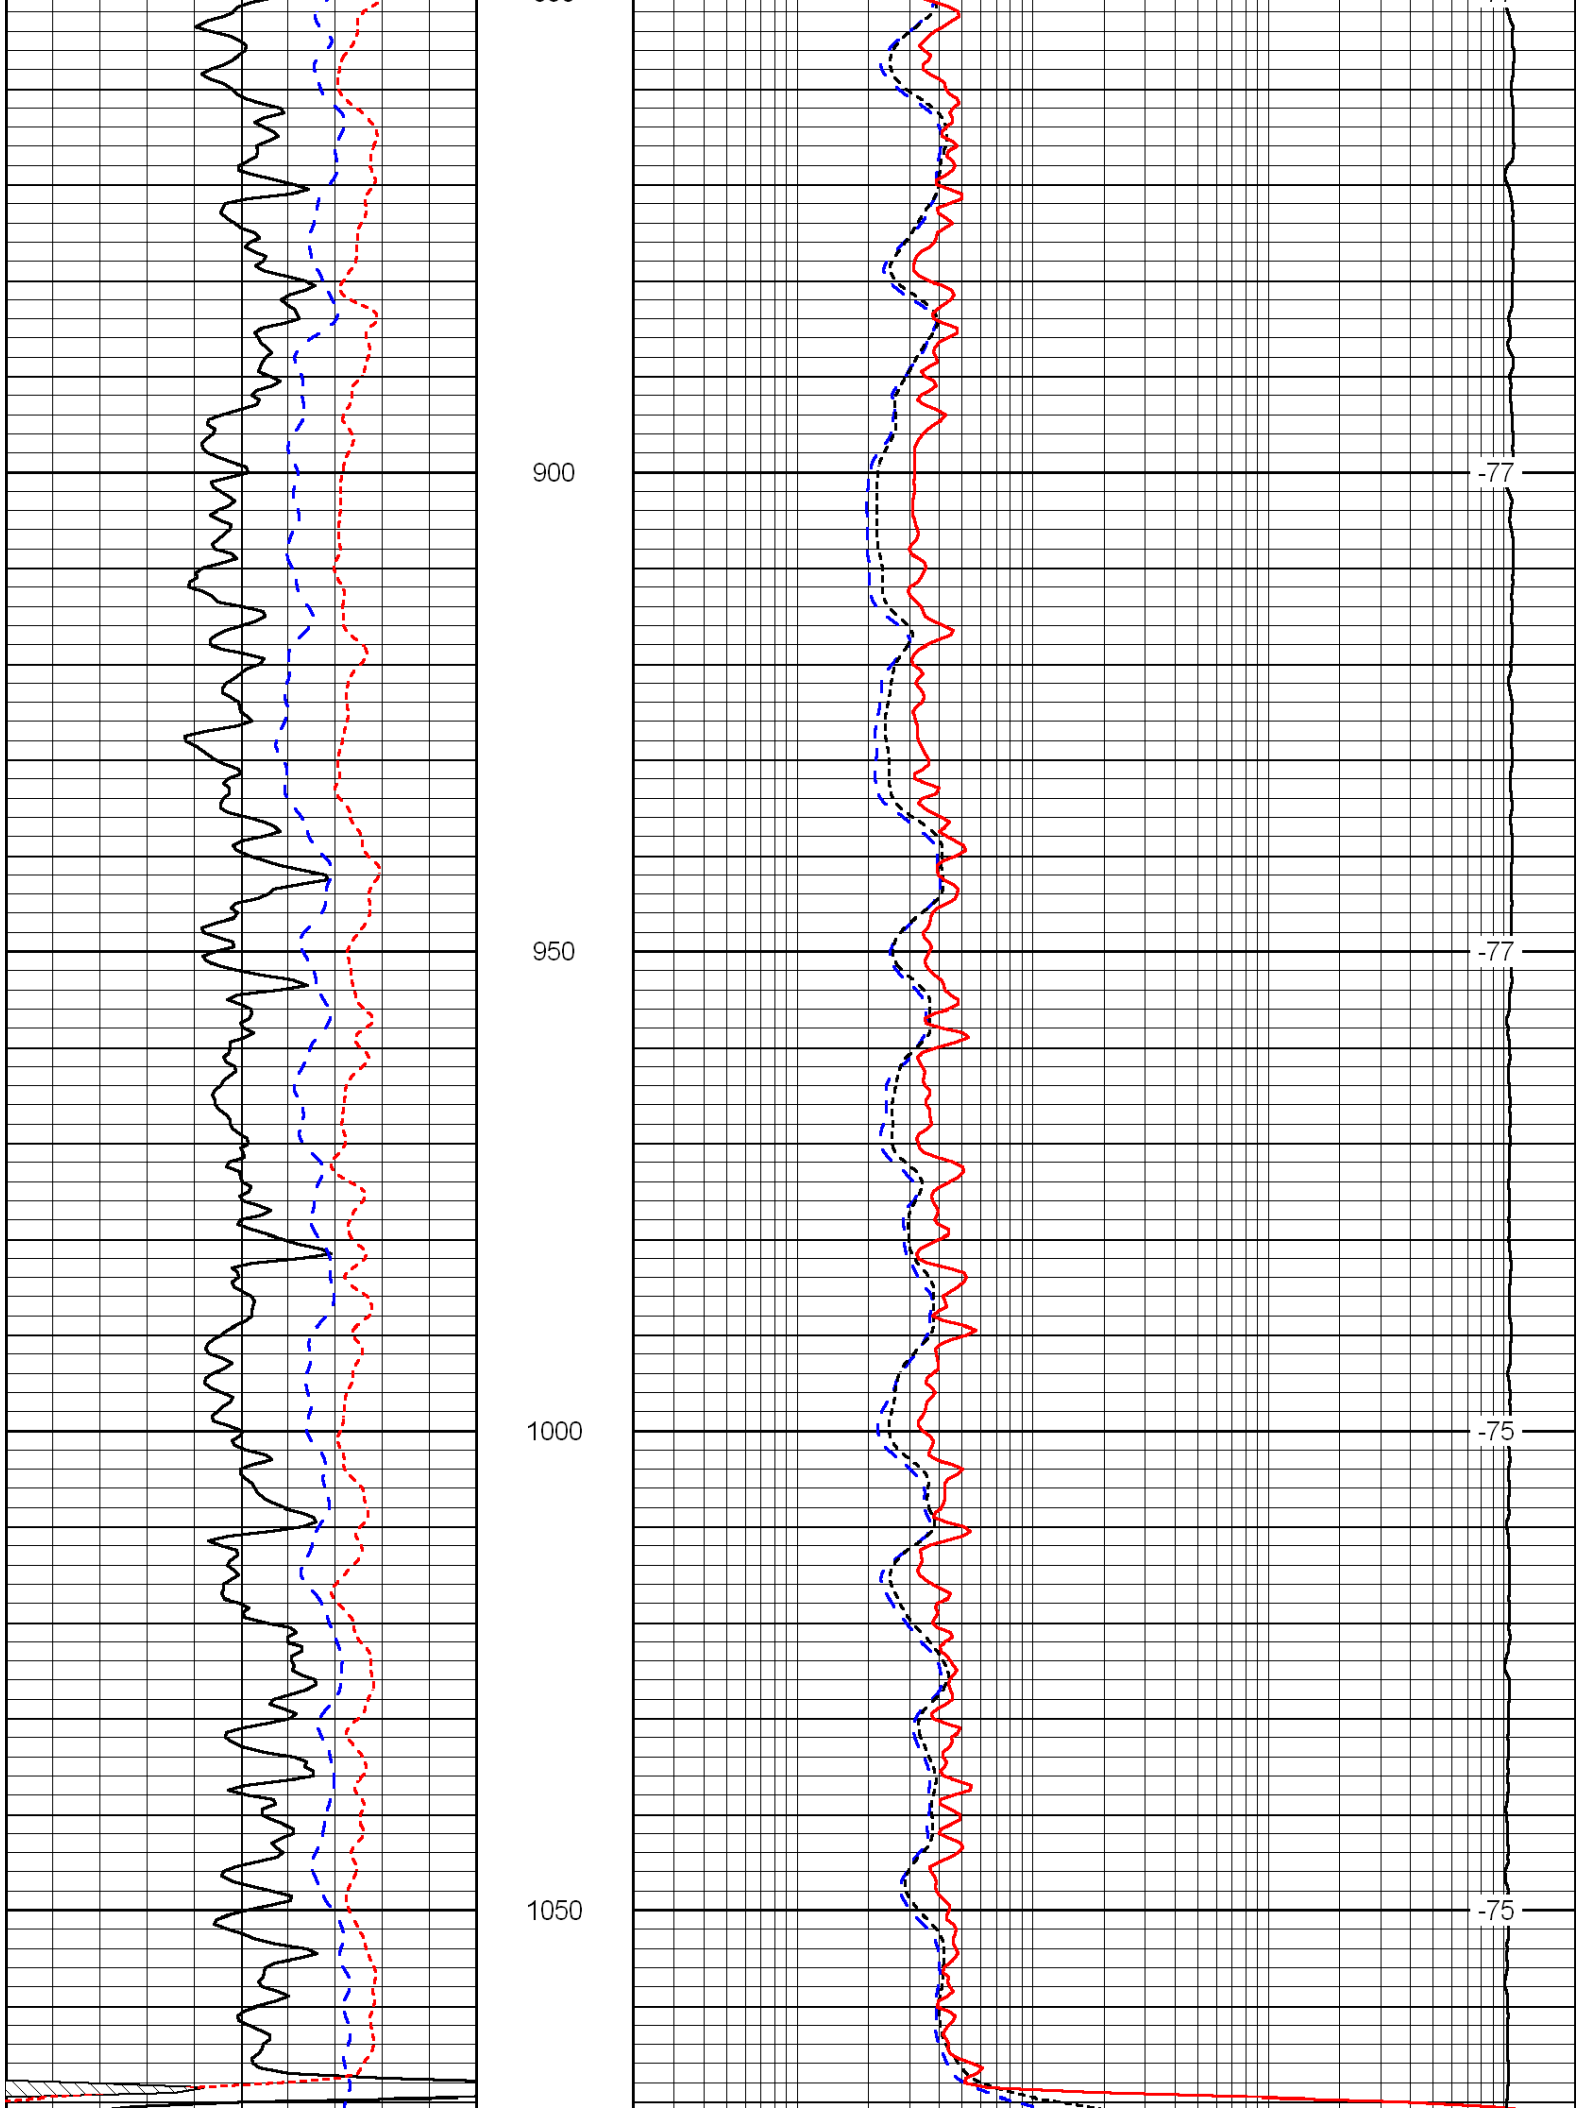
Database File:	c:\warrior\data\murfin_chris #1-17\mfnhd.db
Dataset Pathname:	dil/mfnstk
Presentation Format:	dil
Dataset Creation:	Mon Jan 03 02:02:35 2011
Charted by:	Depth in Feet scaled 1:240

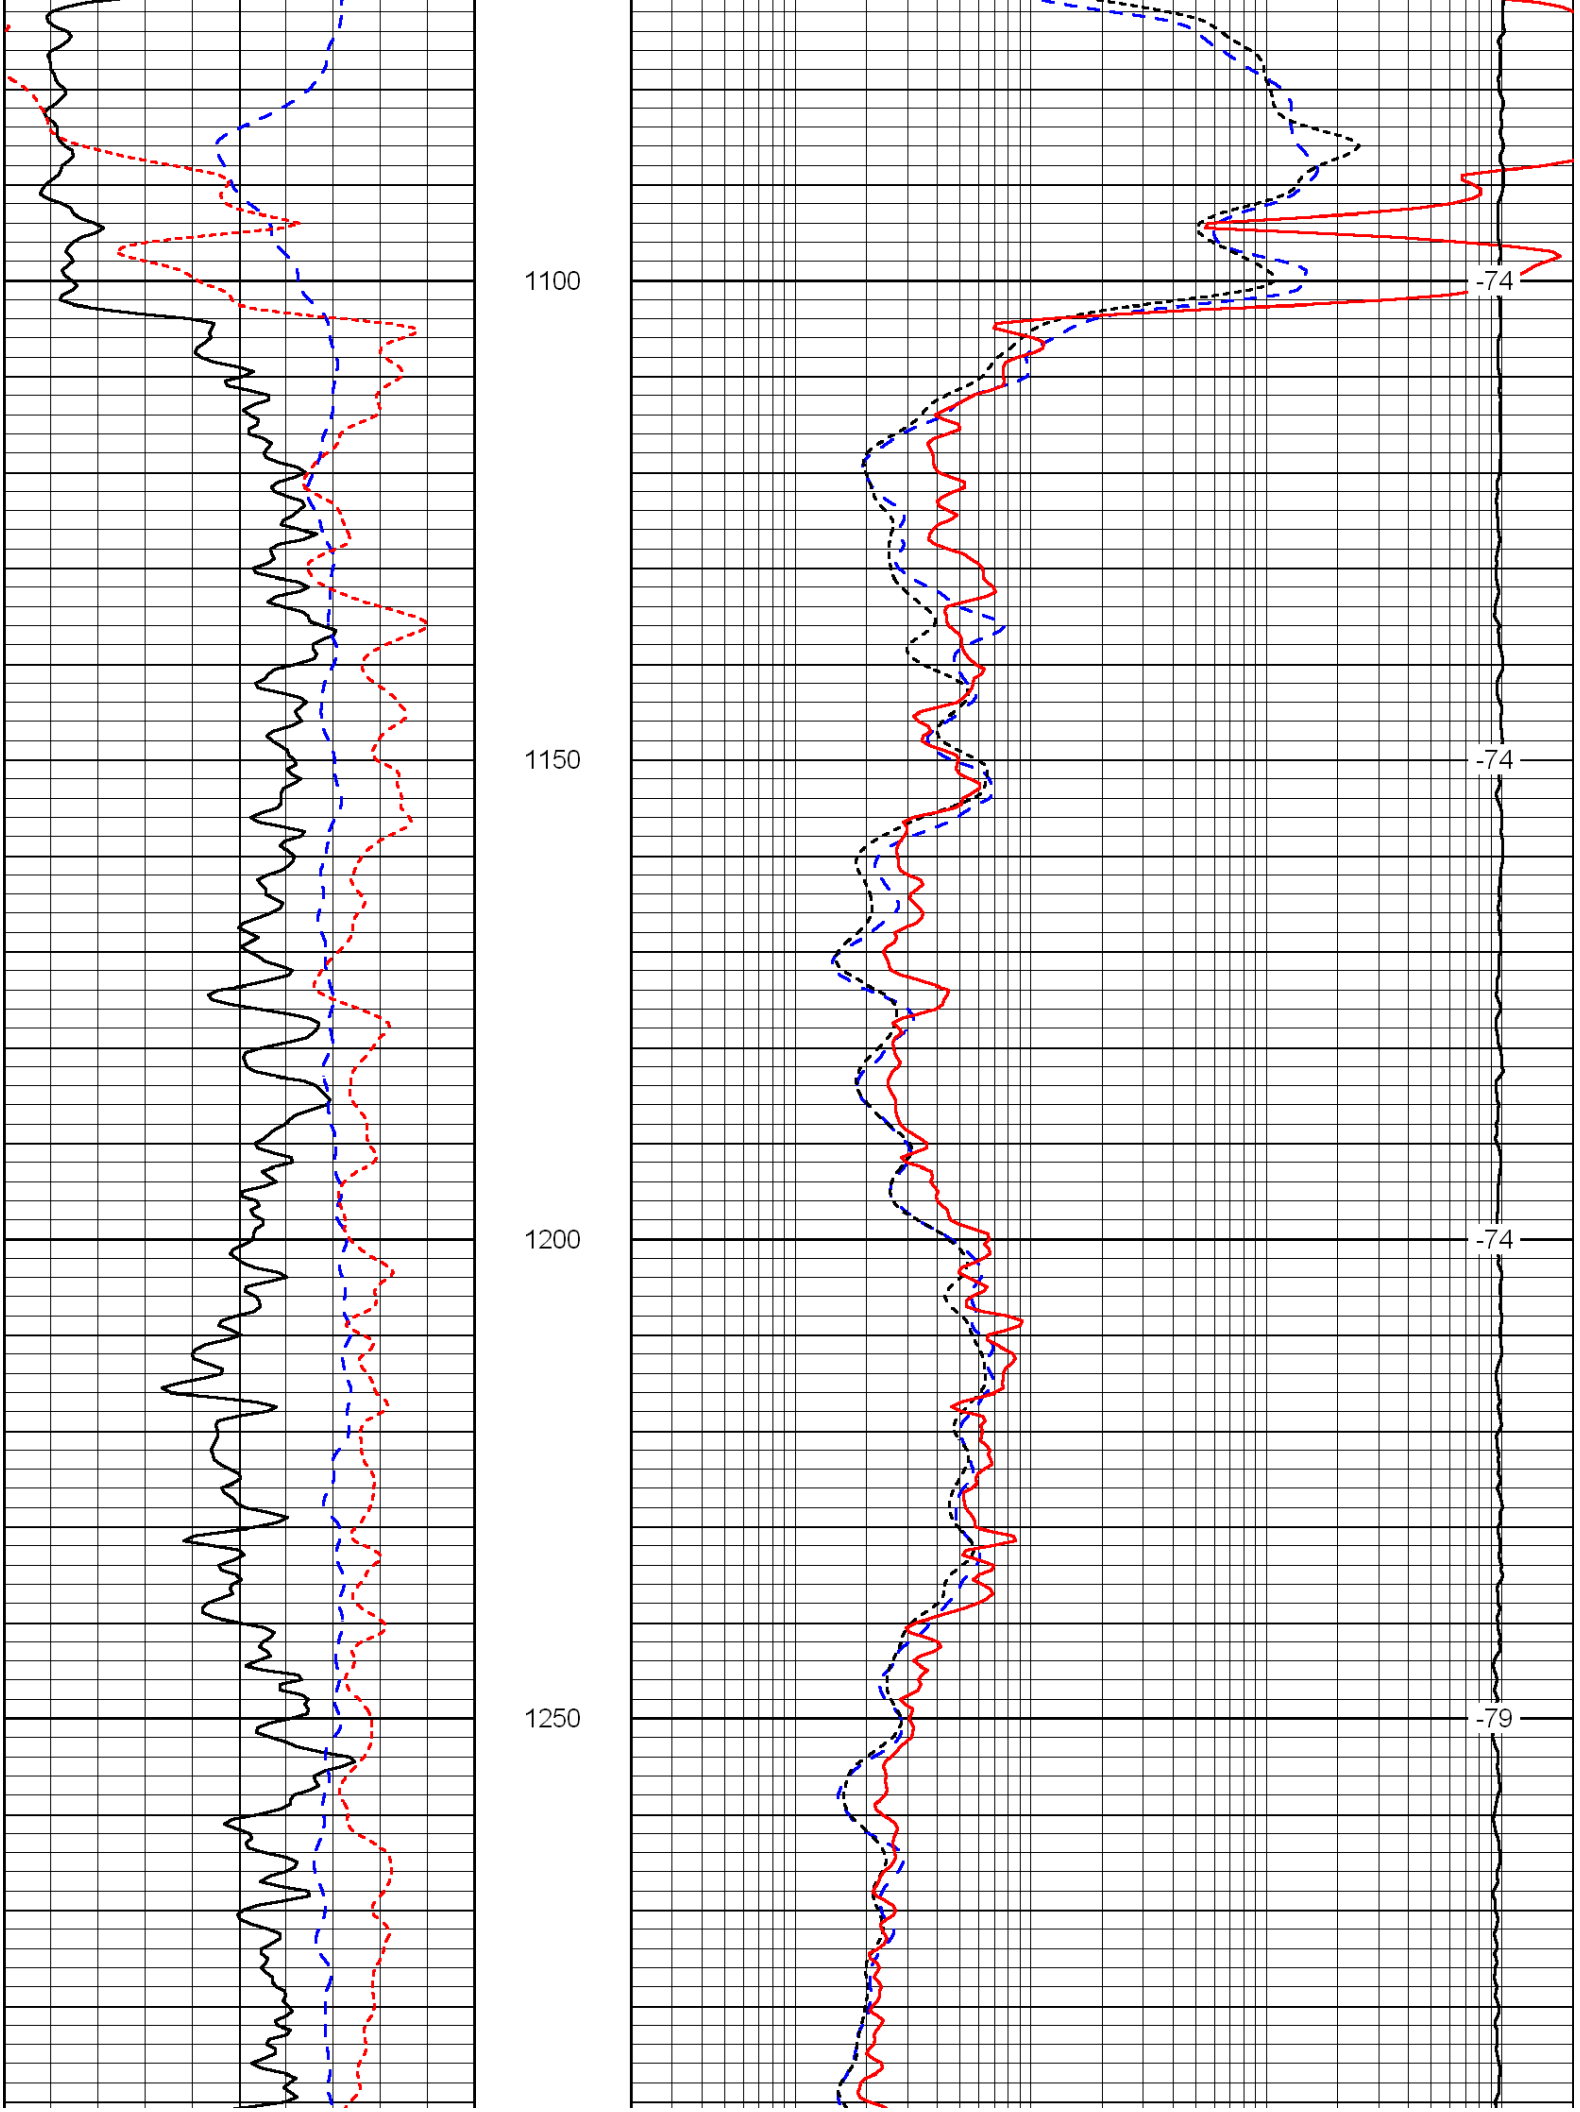

0 Gamma Ray 150
-200 SP (mV) 0
-160 Rxo / Rt 40
0.2 Deep Resistivity 2000
0.2 Medium Resistivity 2000
0.2 Shallow Resistivity 2000
15000 Line Tension 0
LSPD
0
50
100
150
-500
-79
-79
-79

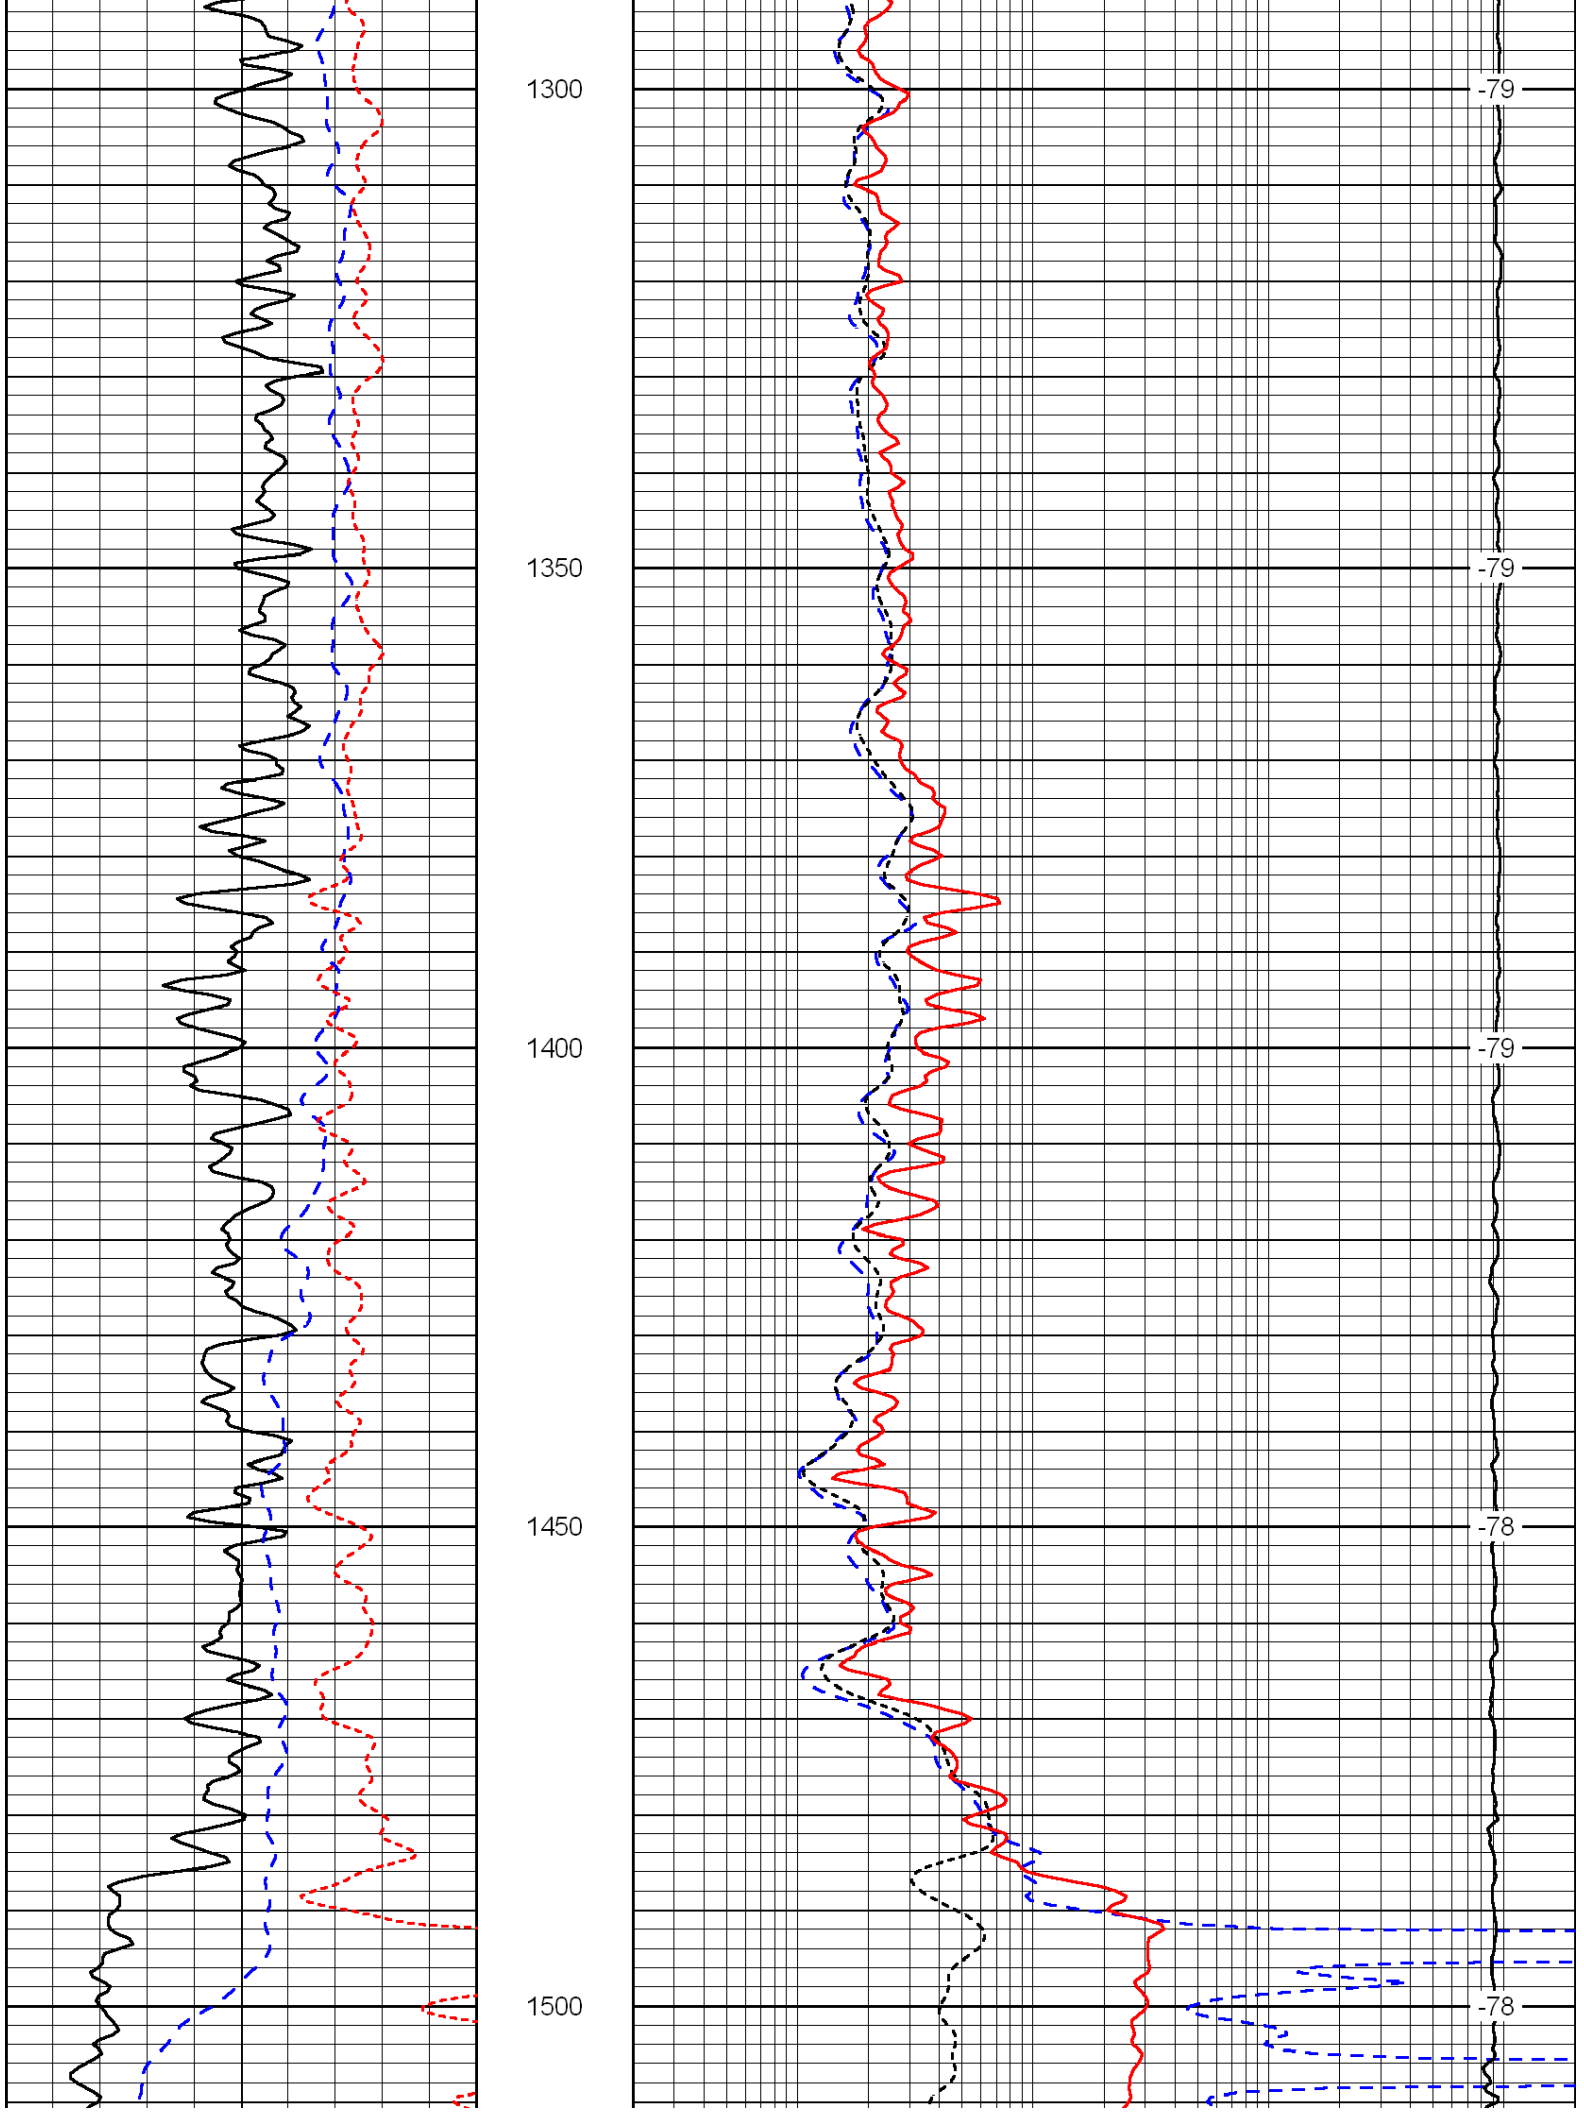

200
250
300
350
400
-79
-38
-79
-78
-80

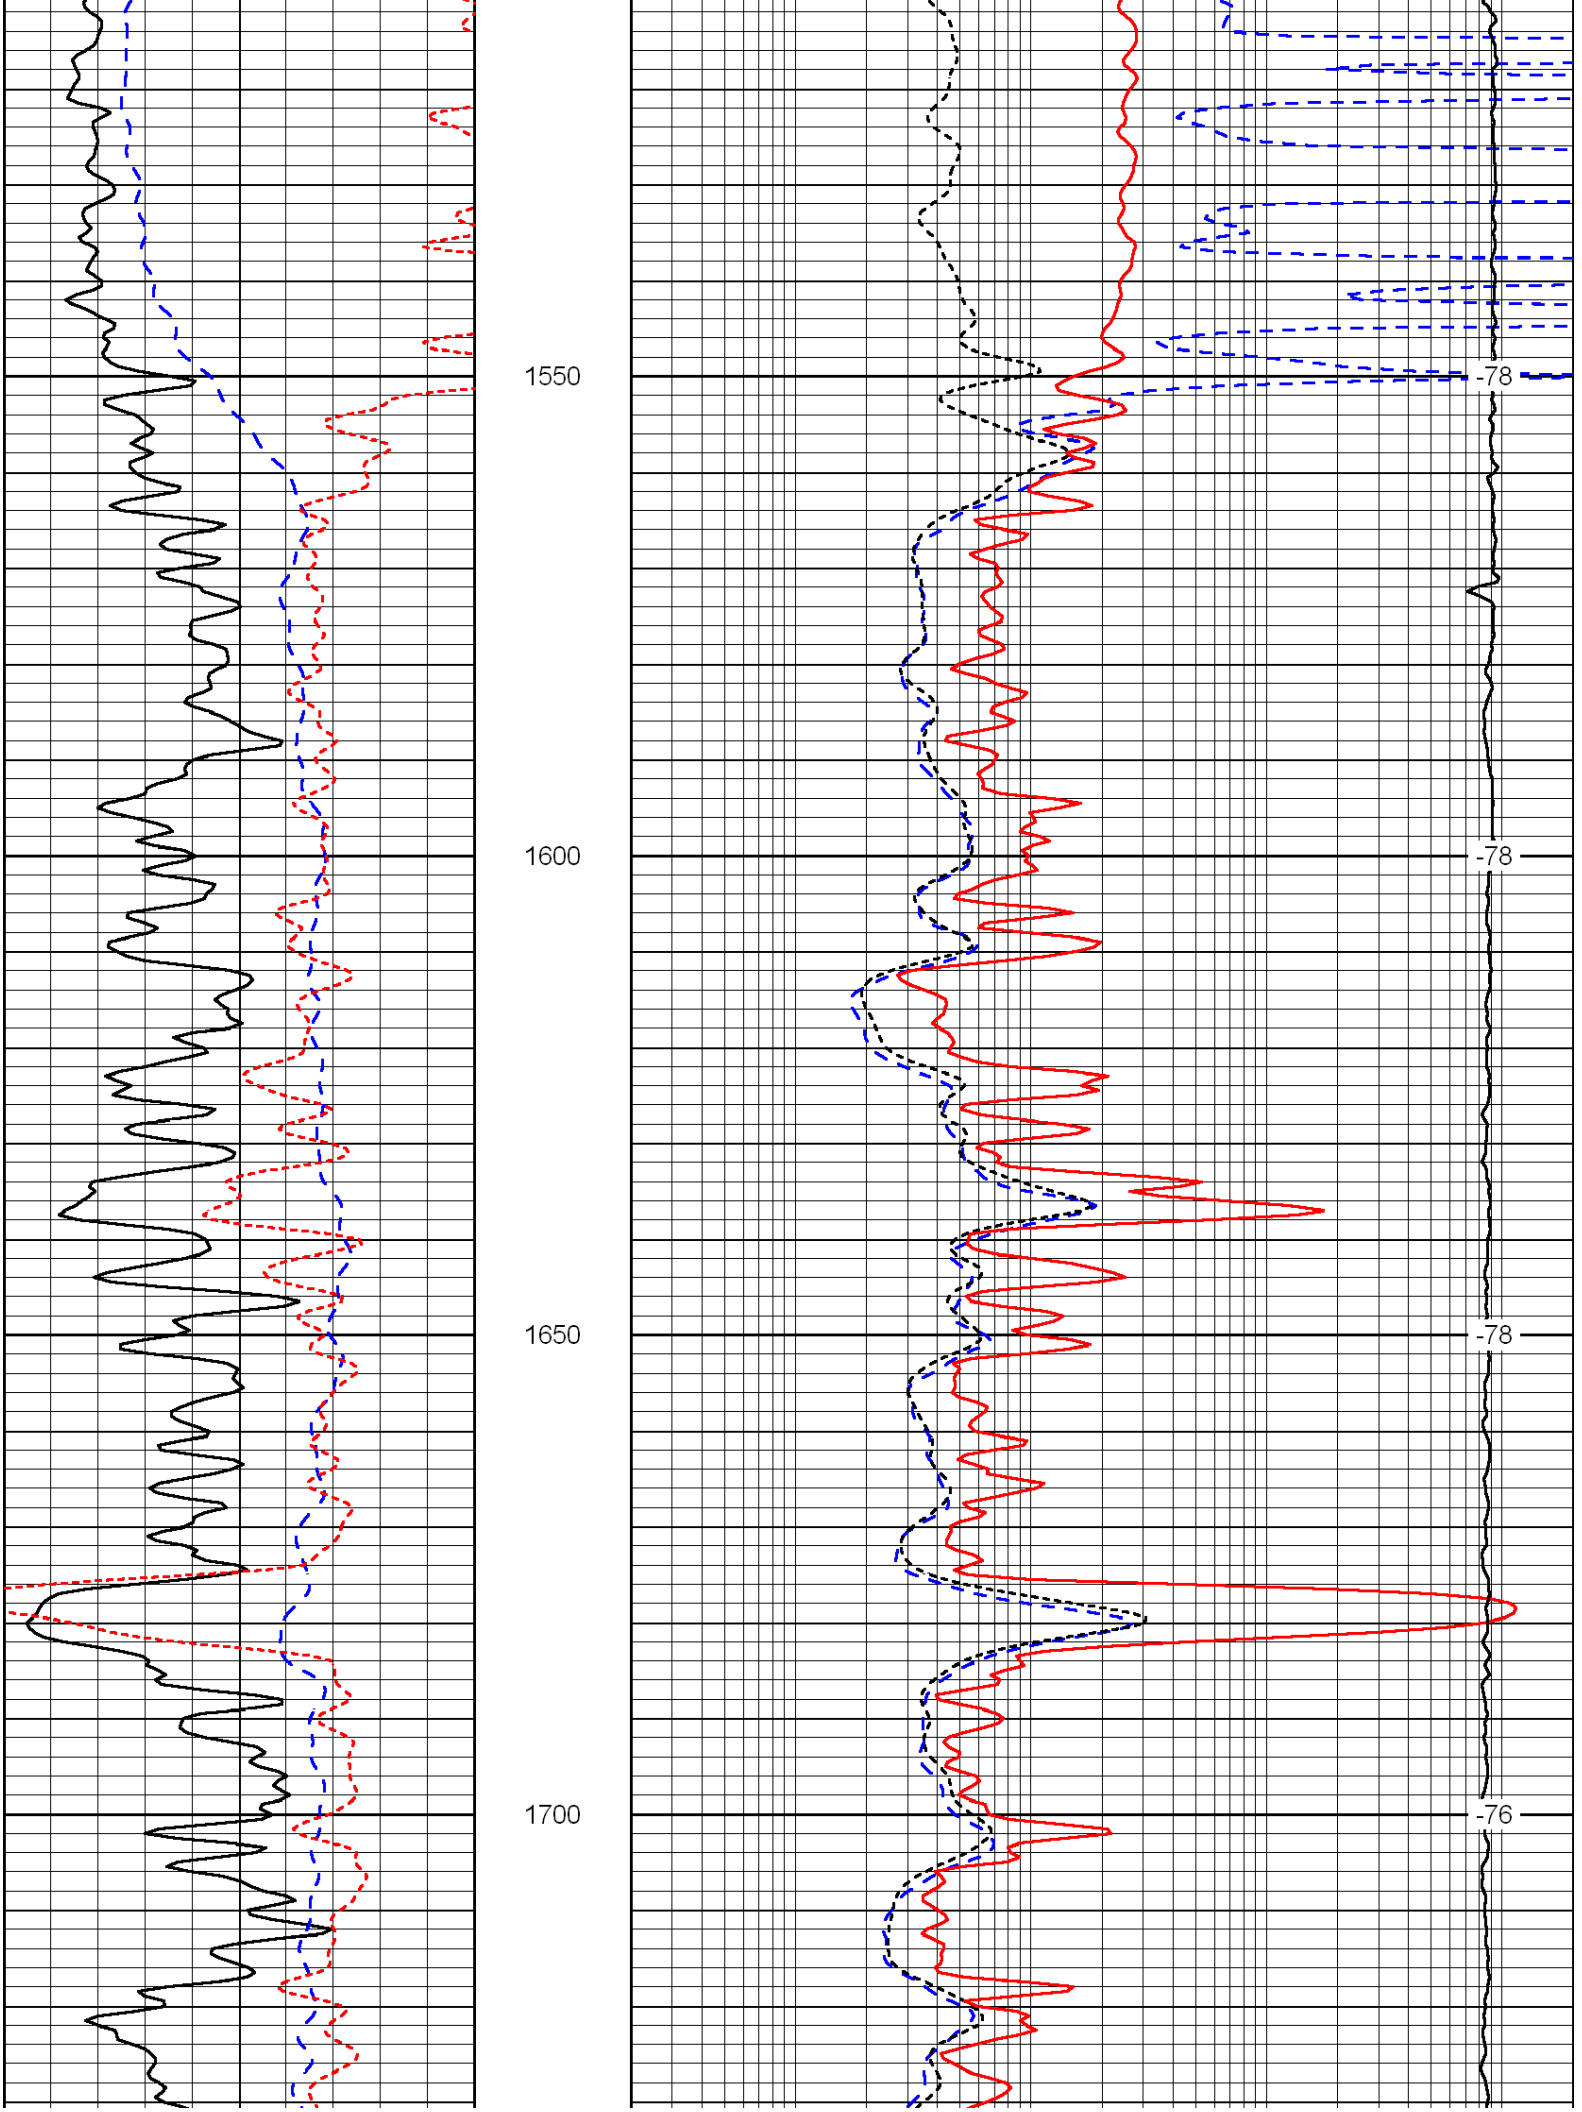

450
500
550
600
-80
-79
-79
-79

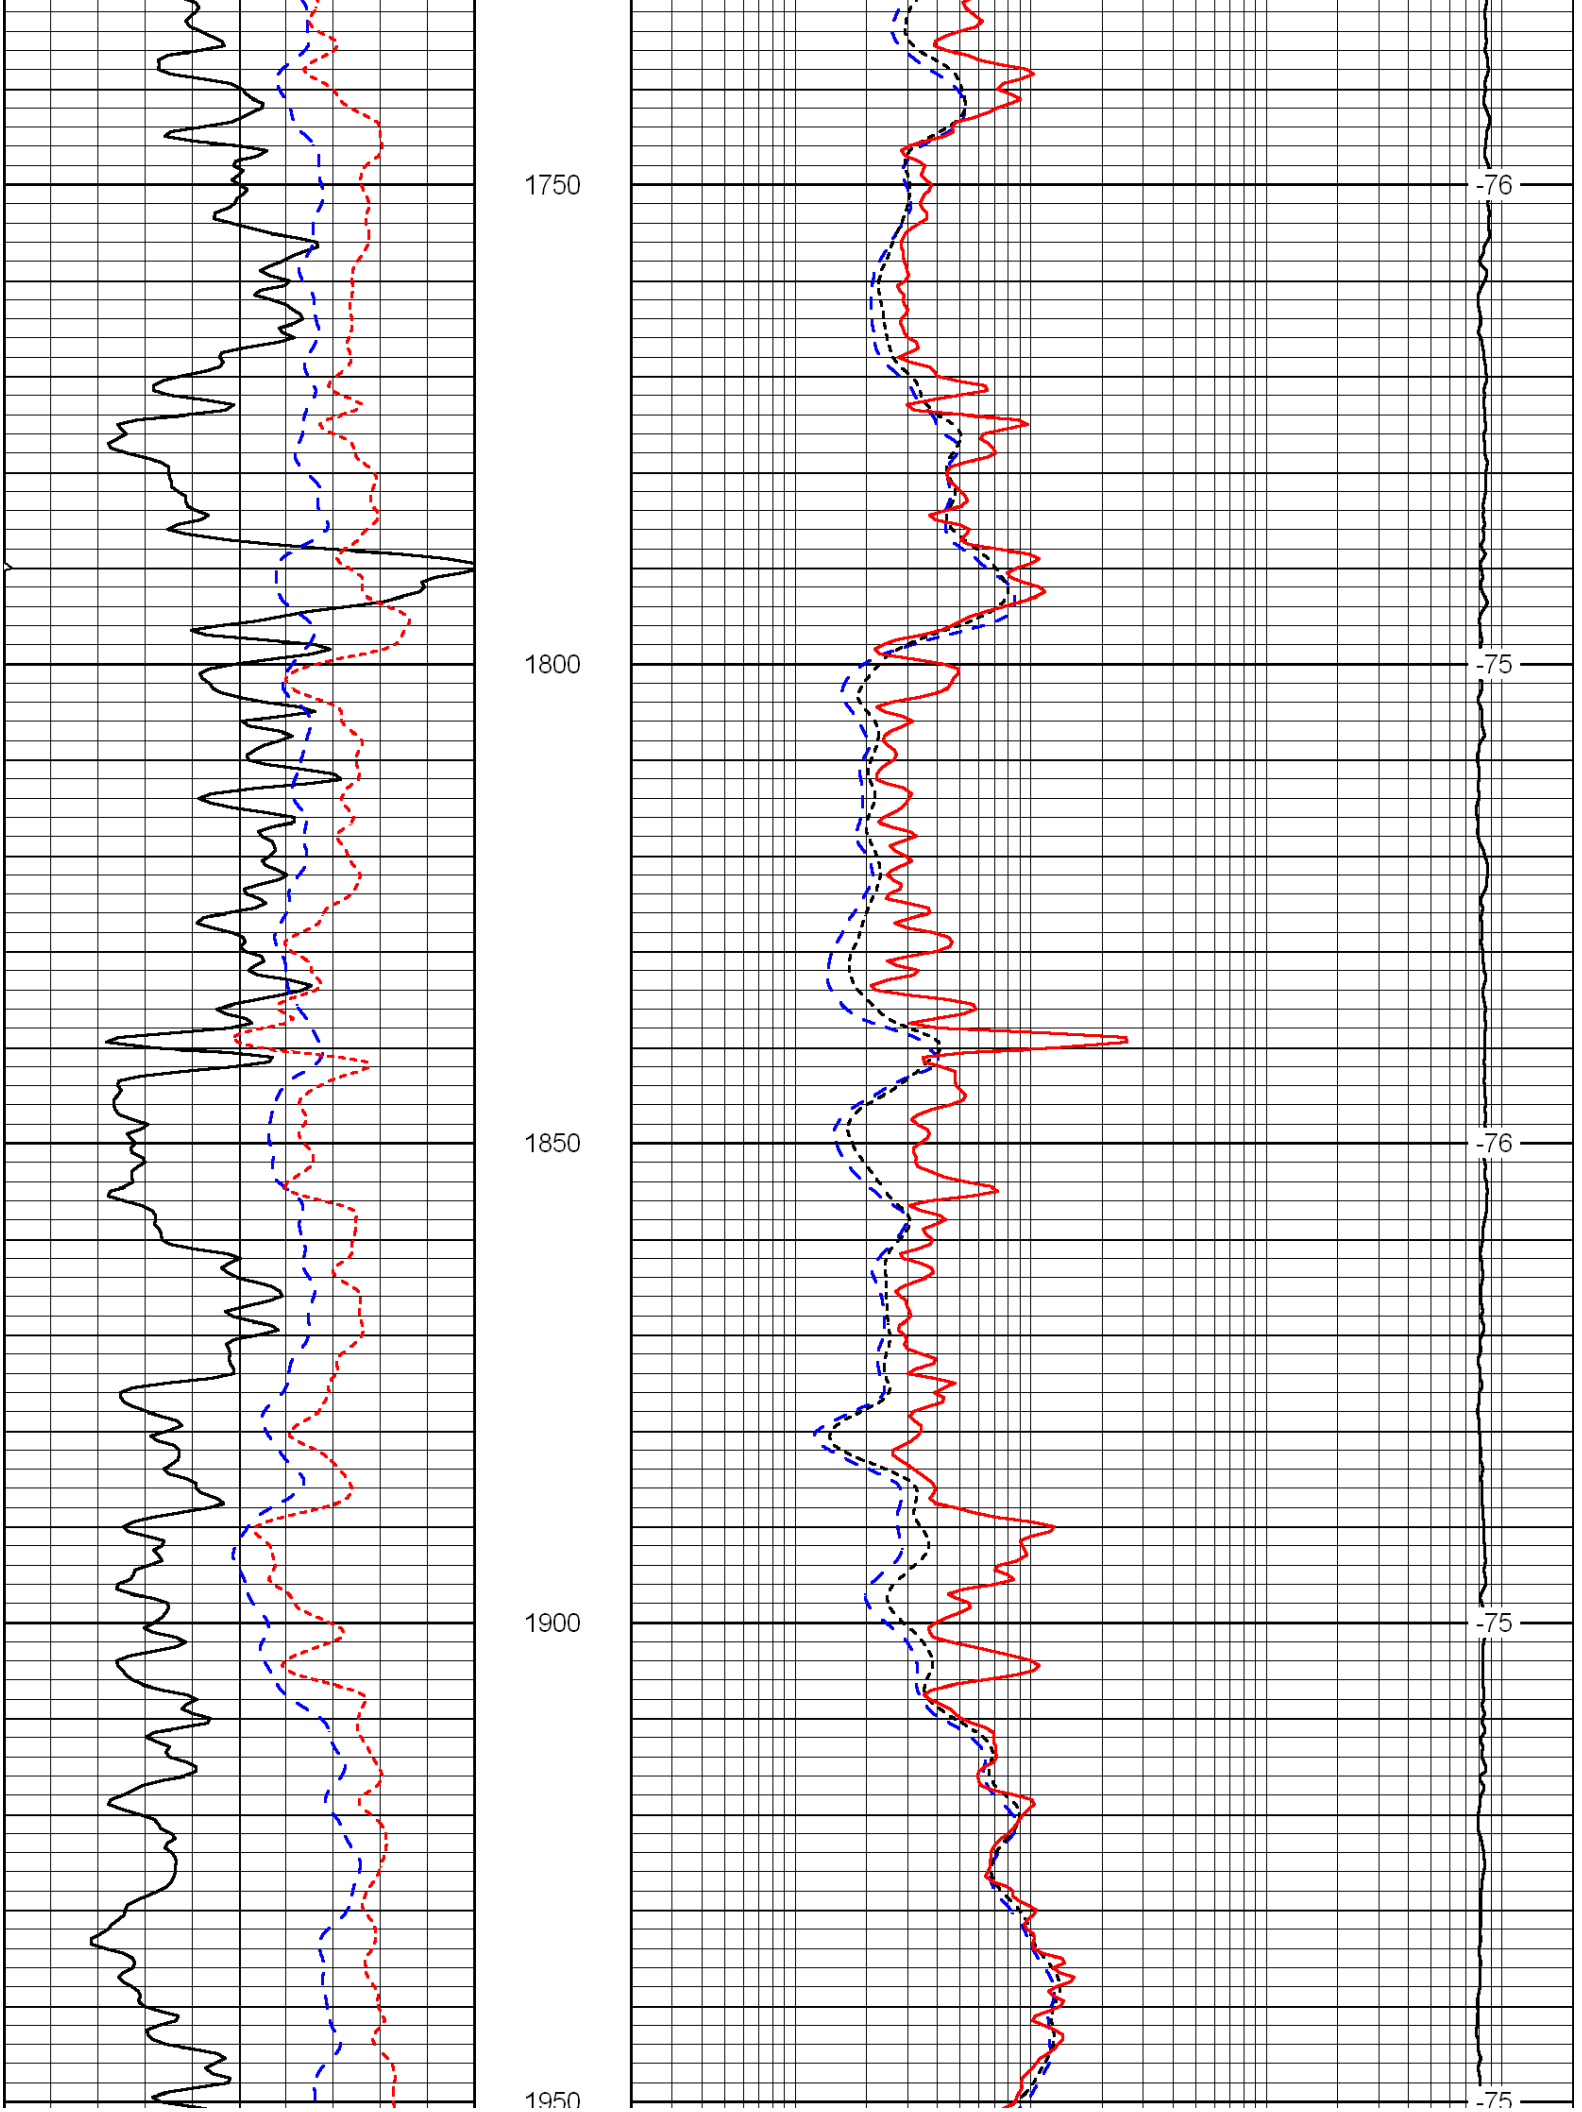

650
700
750
800
850
-79
-78
-78
-77
-77

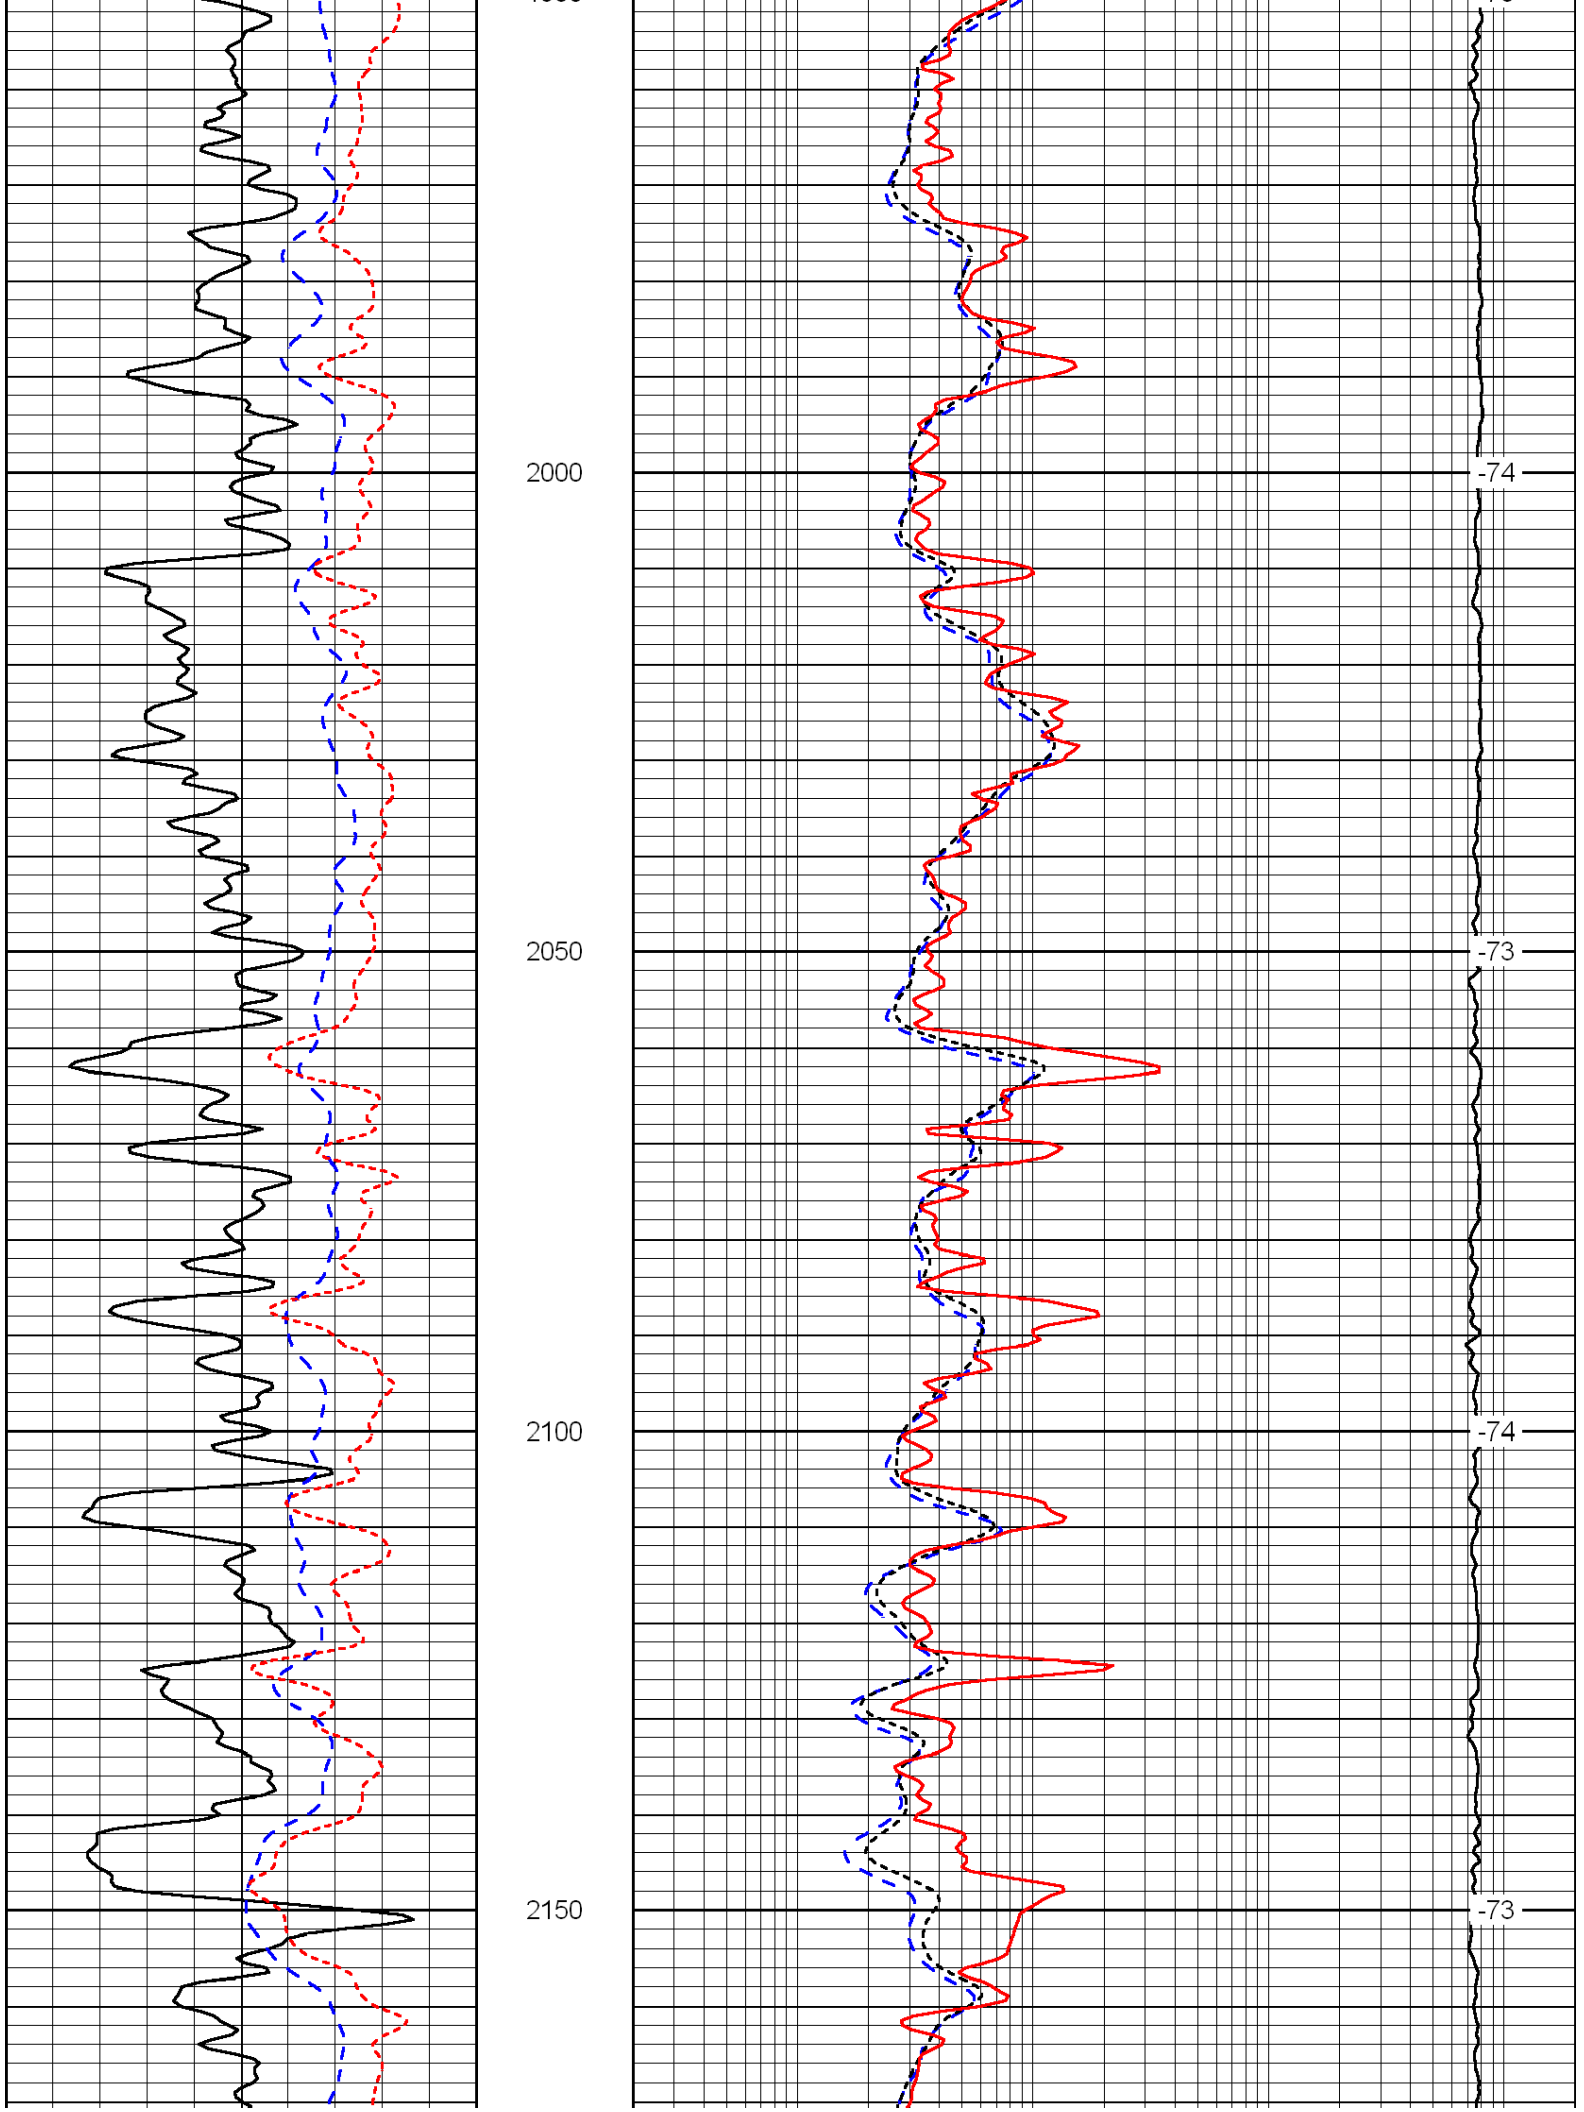

900
950
1000
1050
-77
-77
-75
-75

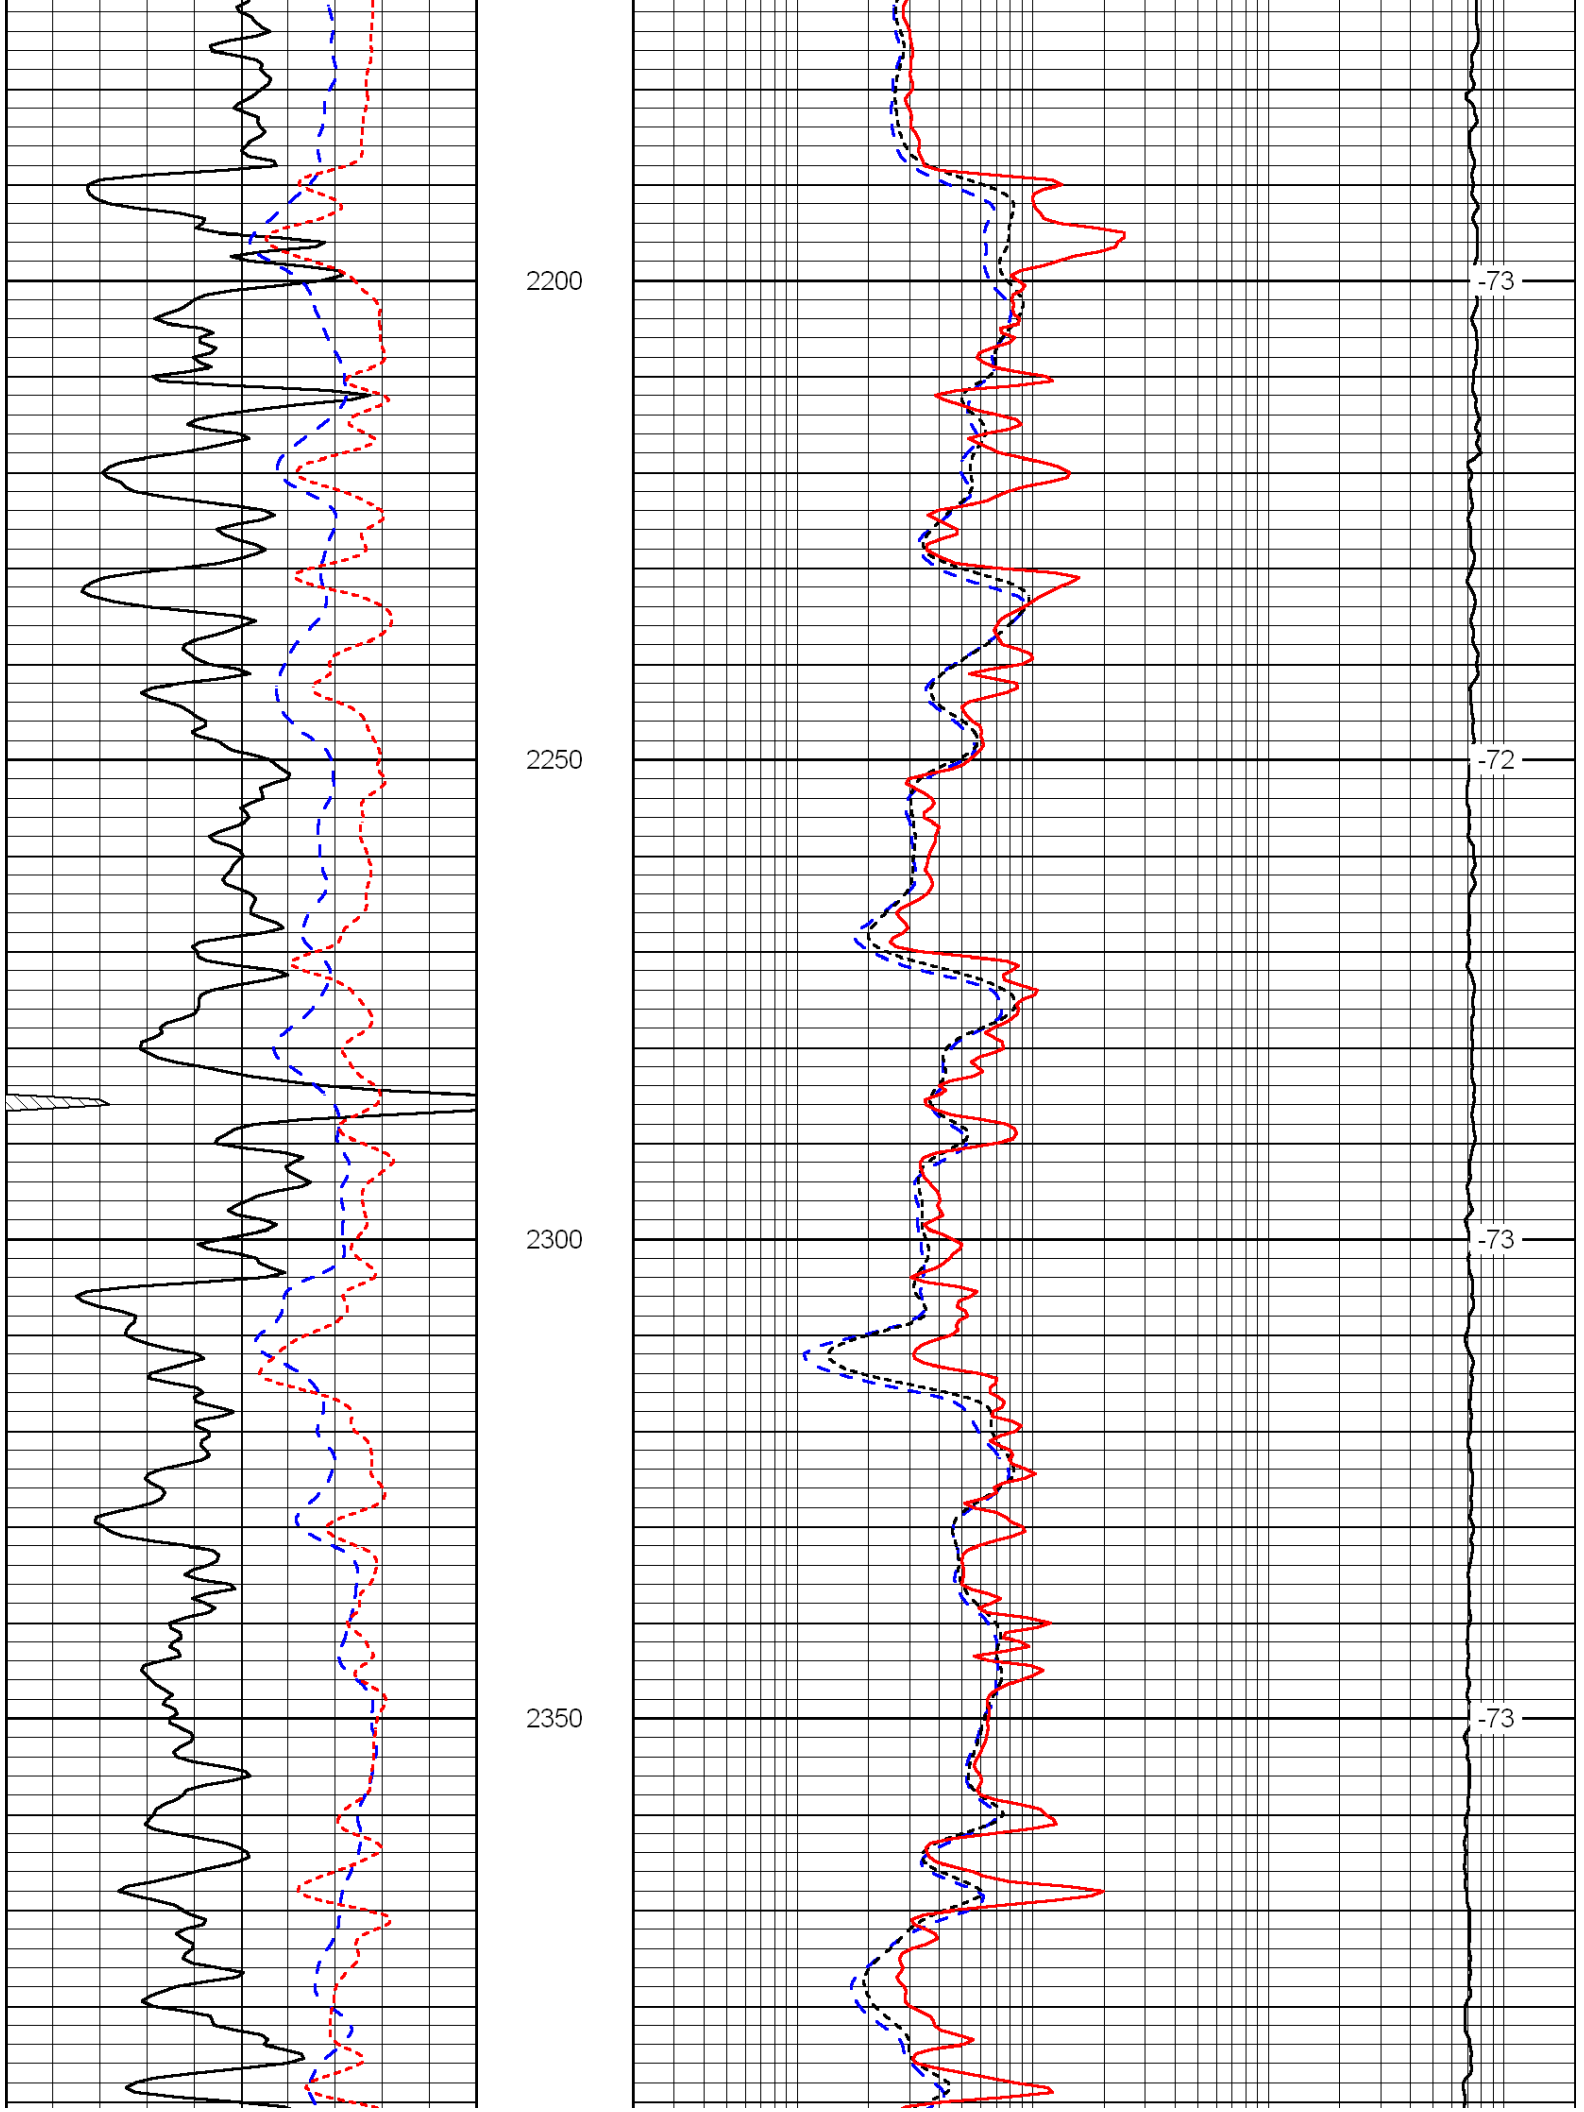

1100
1150
1200
1250
-74
-74
-74
-79

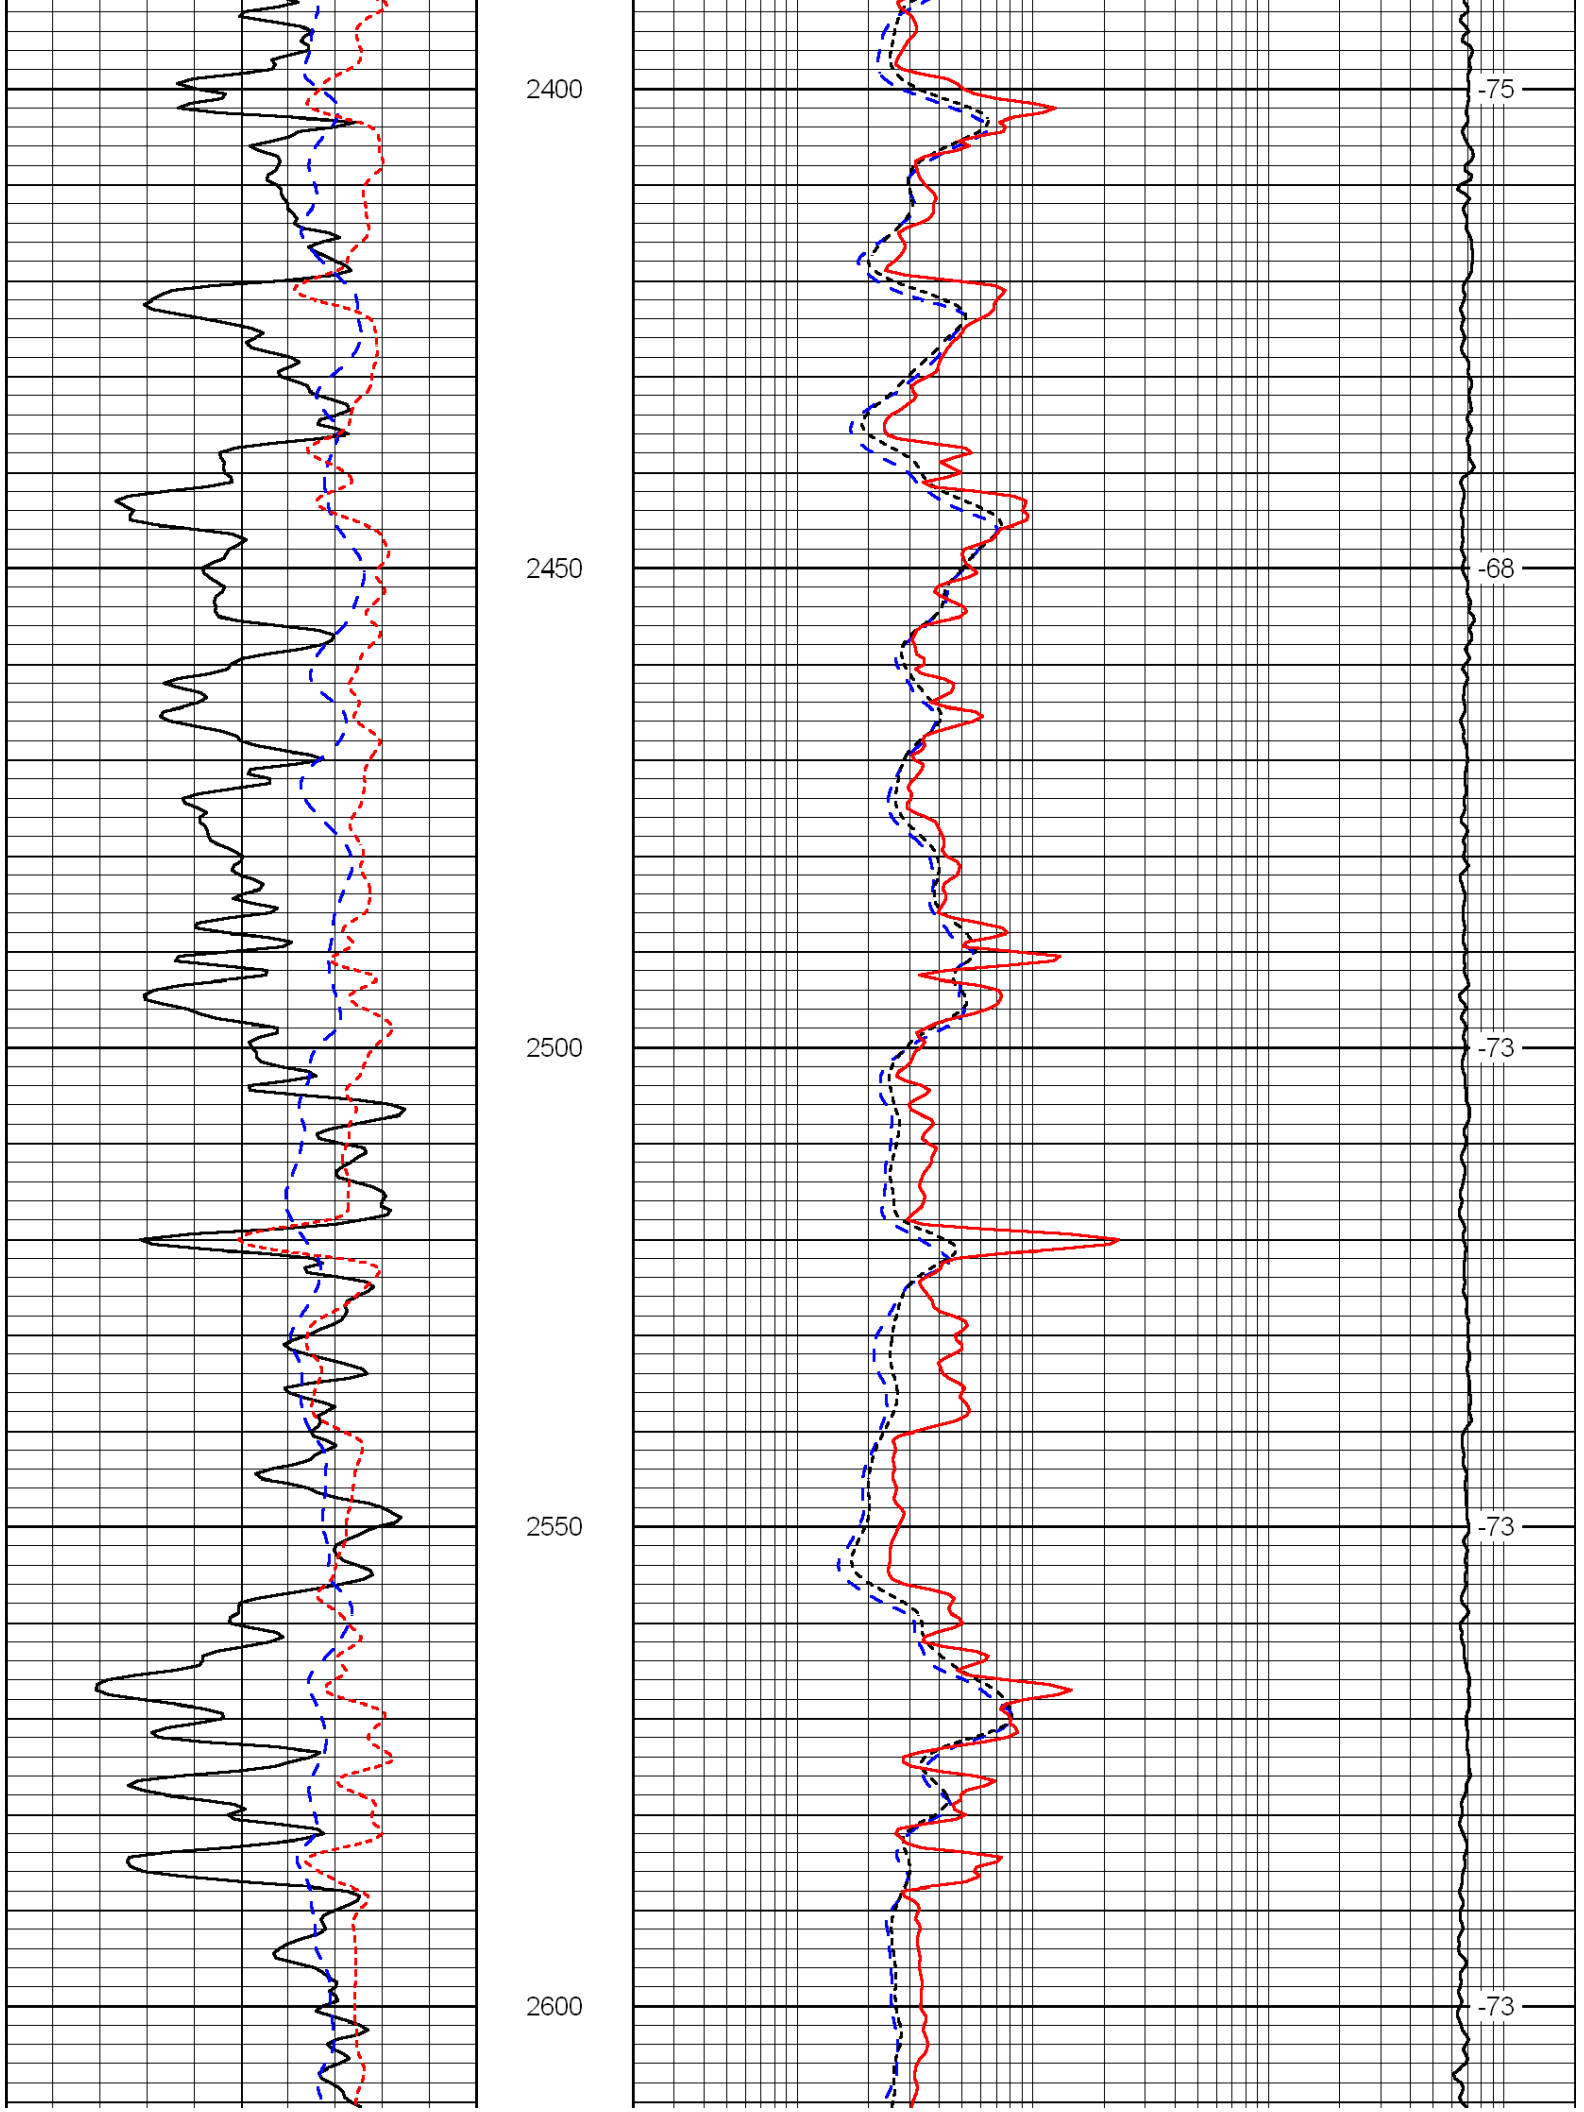

1300
1350
1400
1450
1500
-79
-79
-79
-78
-78

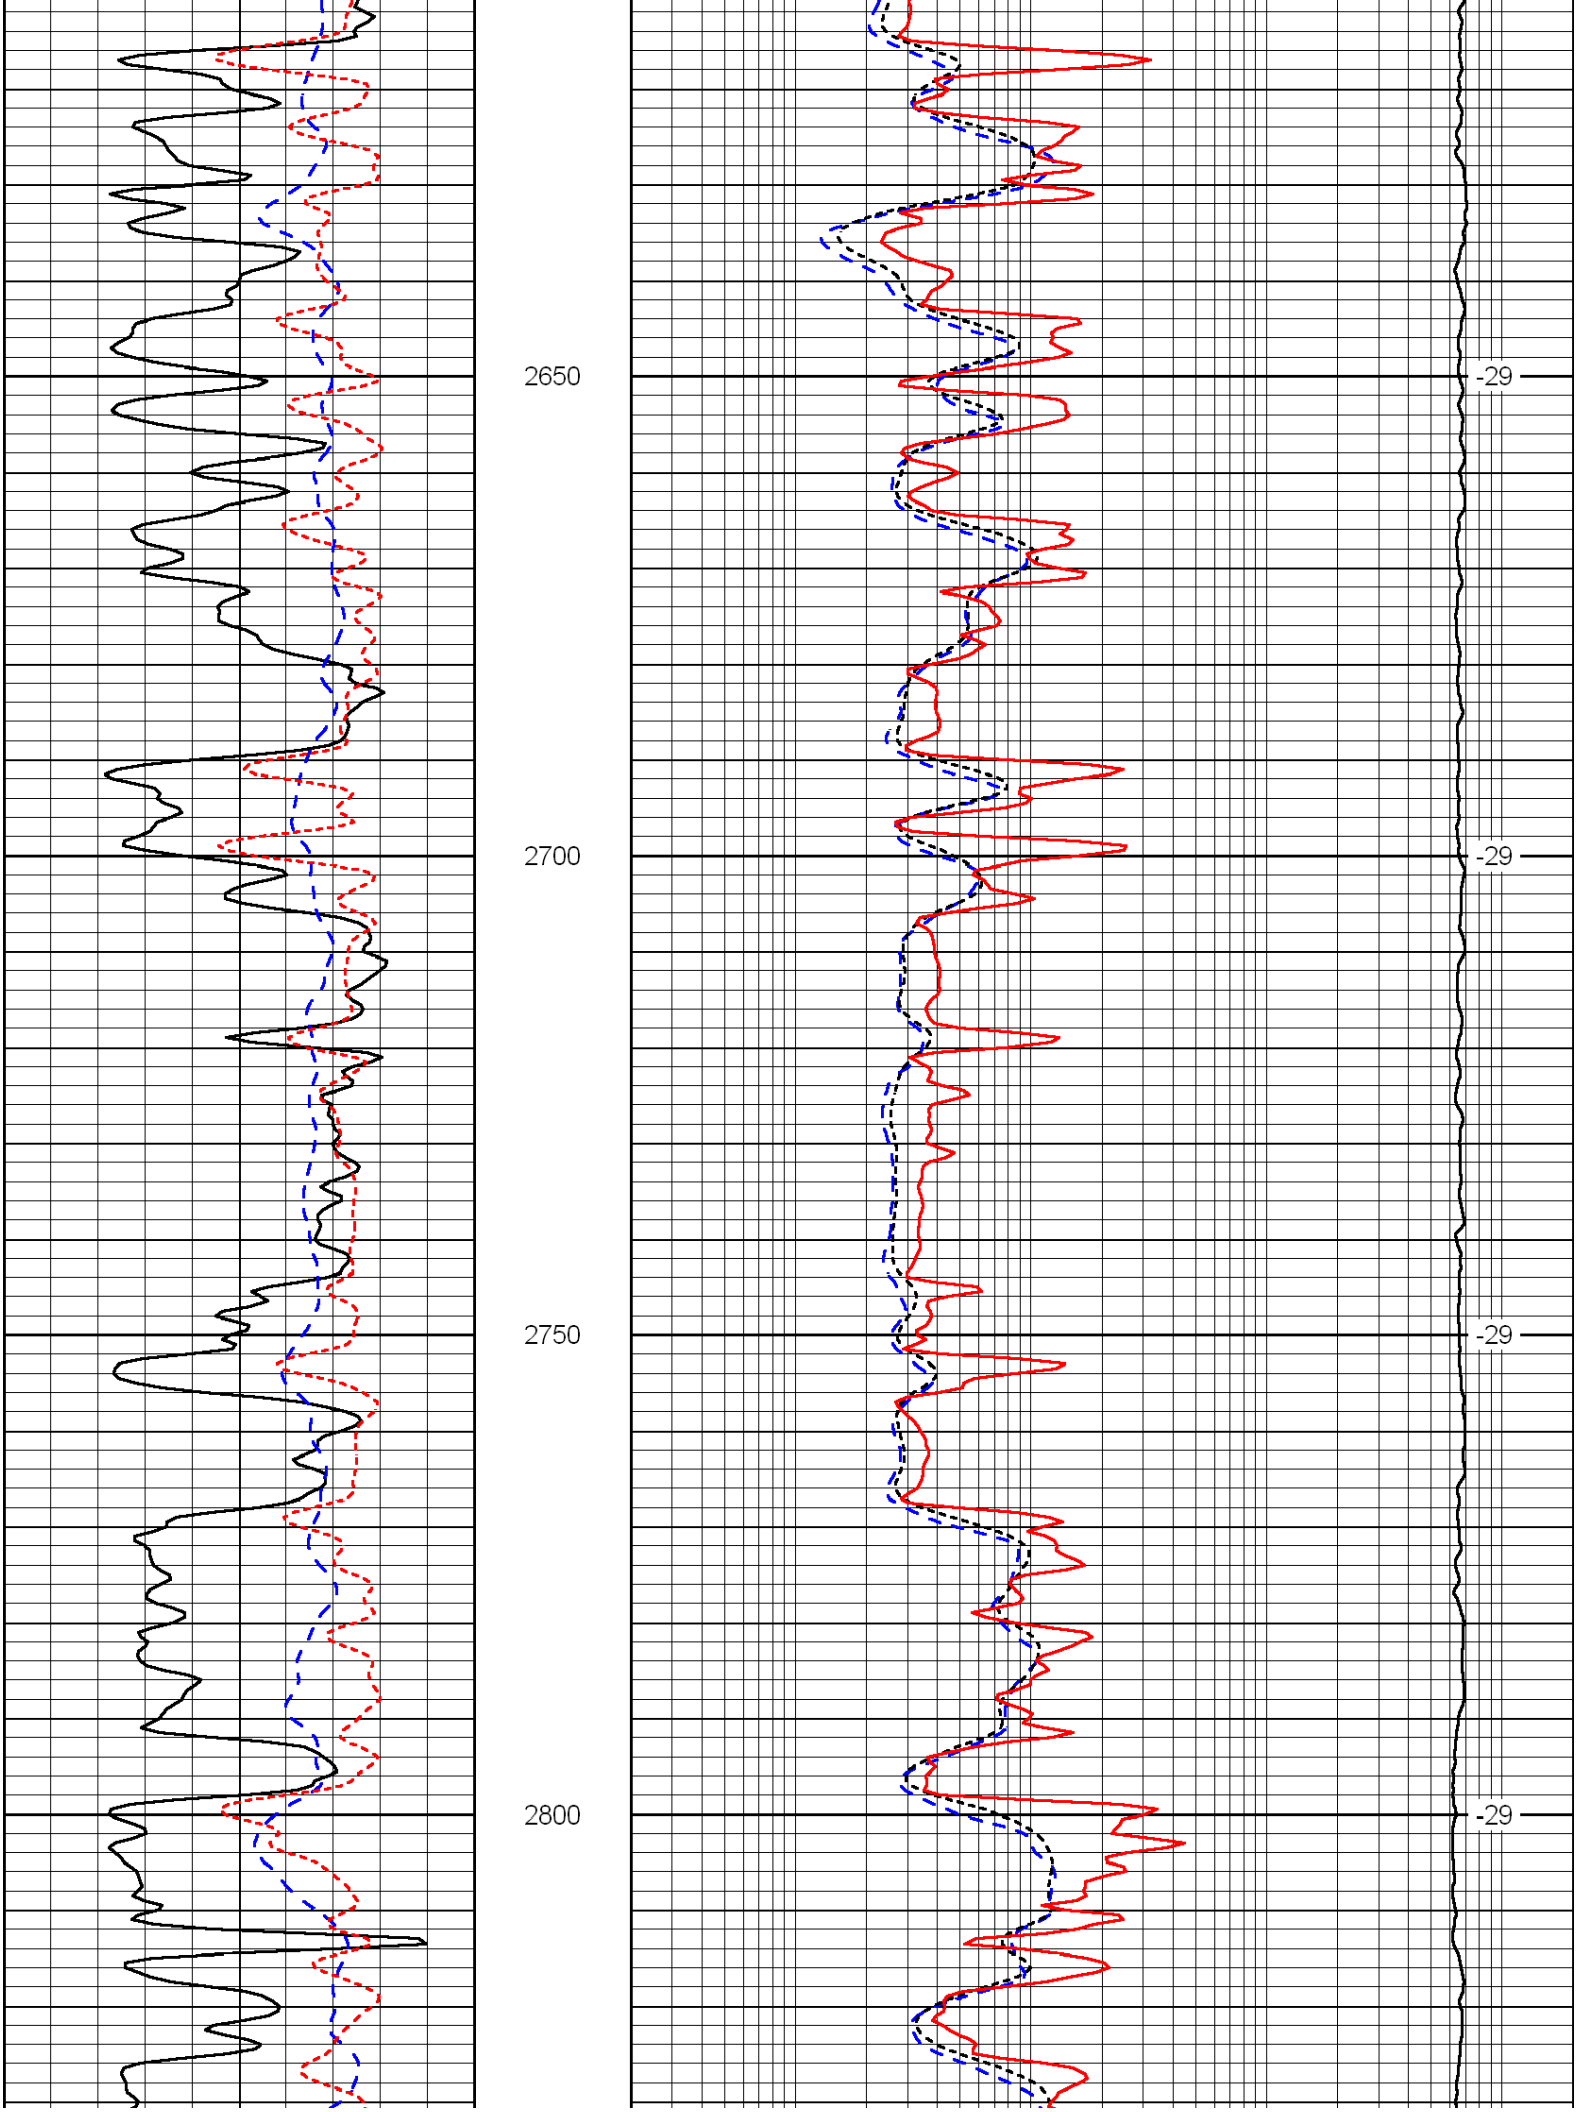

1550
1600
1650
1700
-78
-78
-78
-76

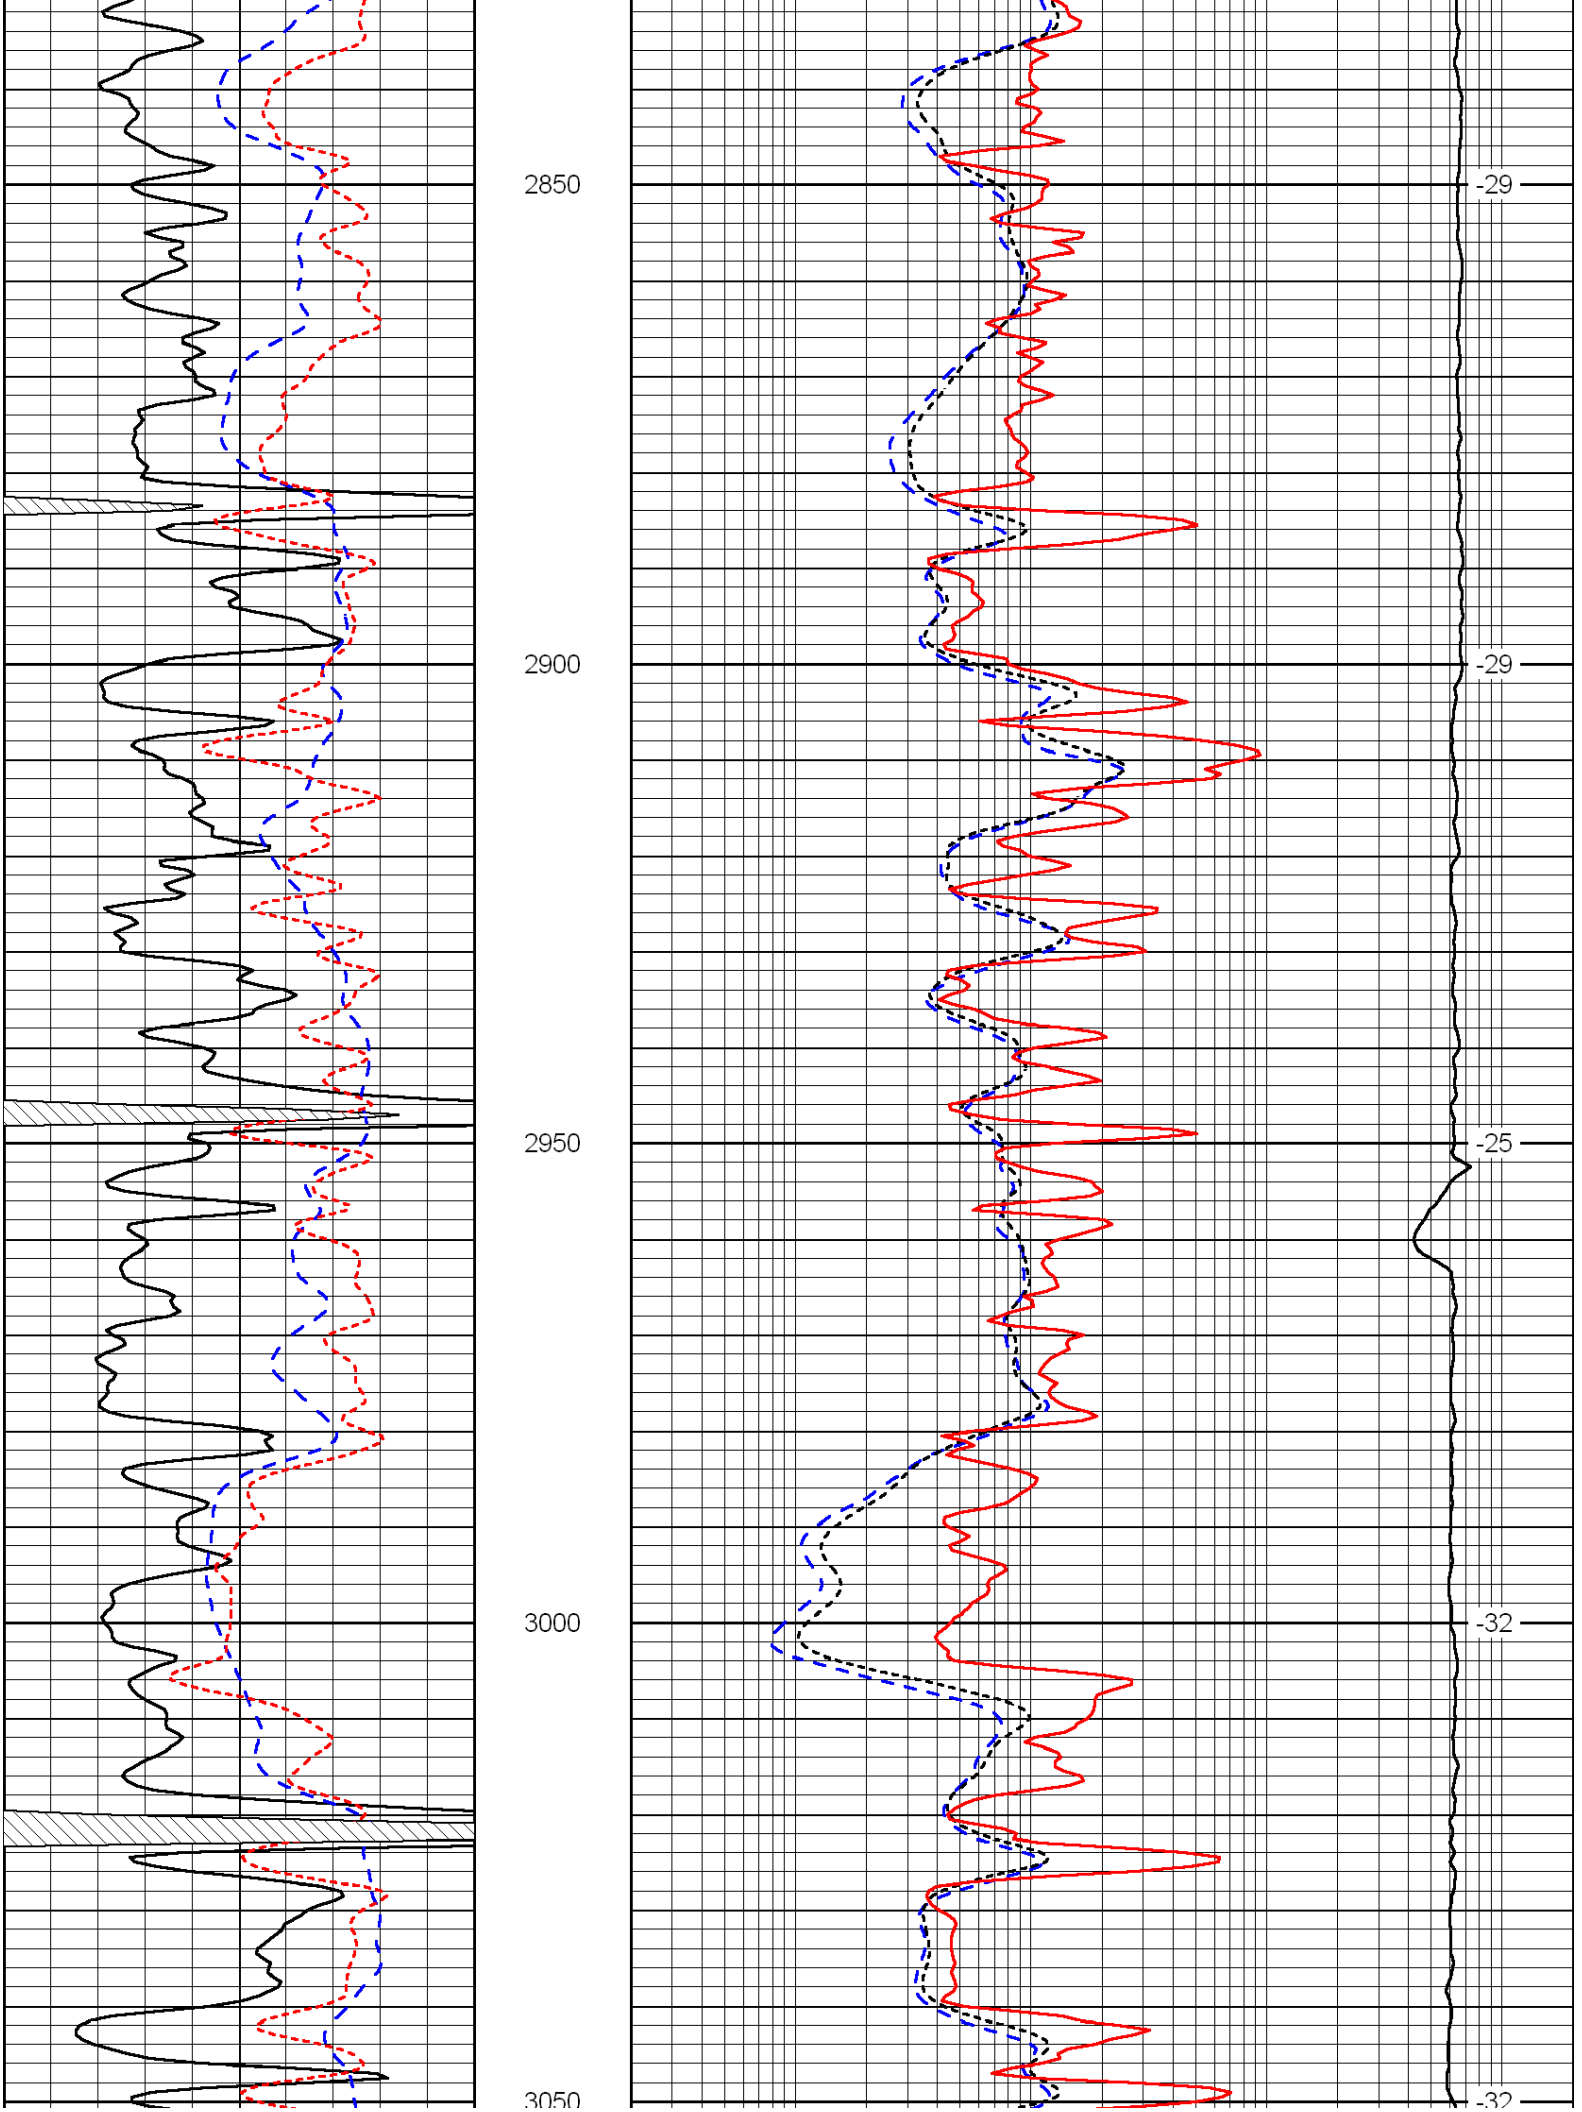

1750
1800
1850
1900
1950
-76
-75
-76
-75
-75

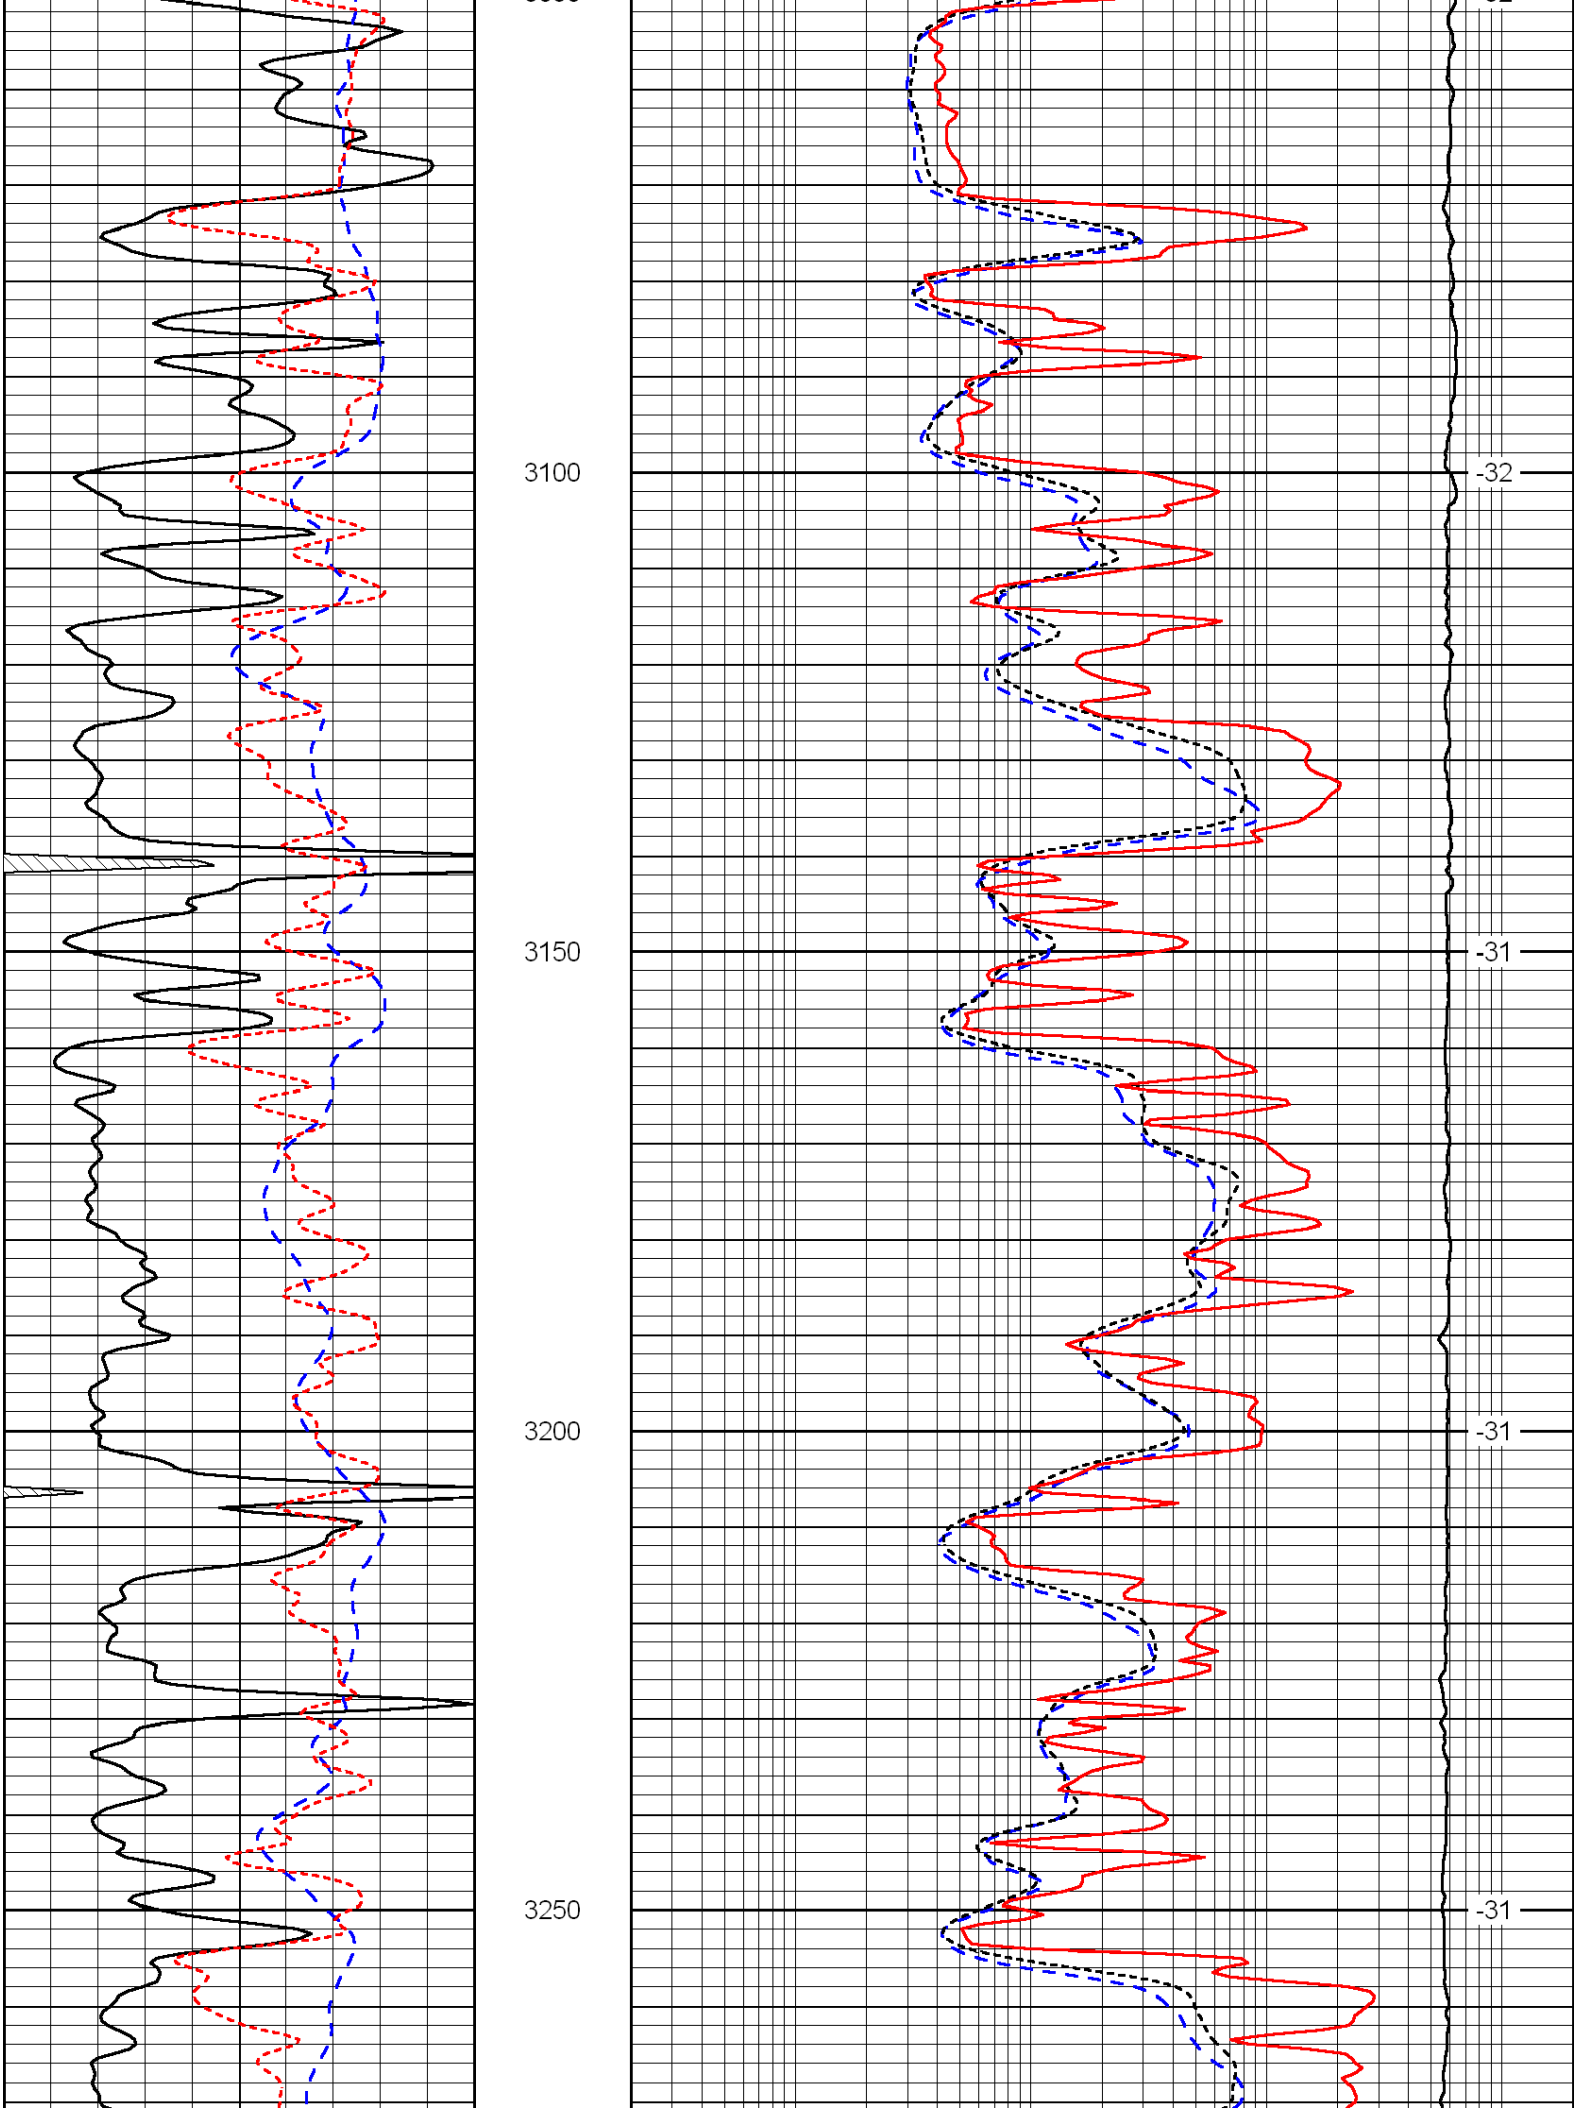

2000
2050
2100
2150
-74
-73
-74
-73

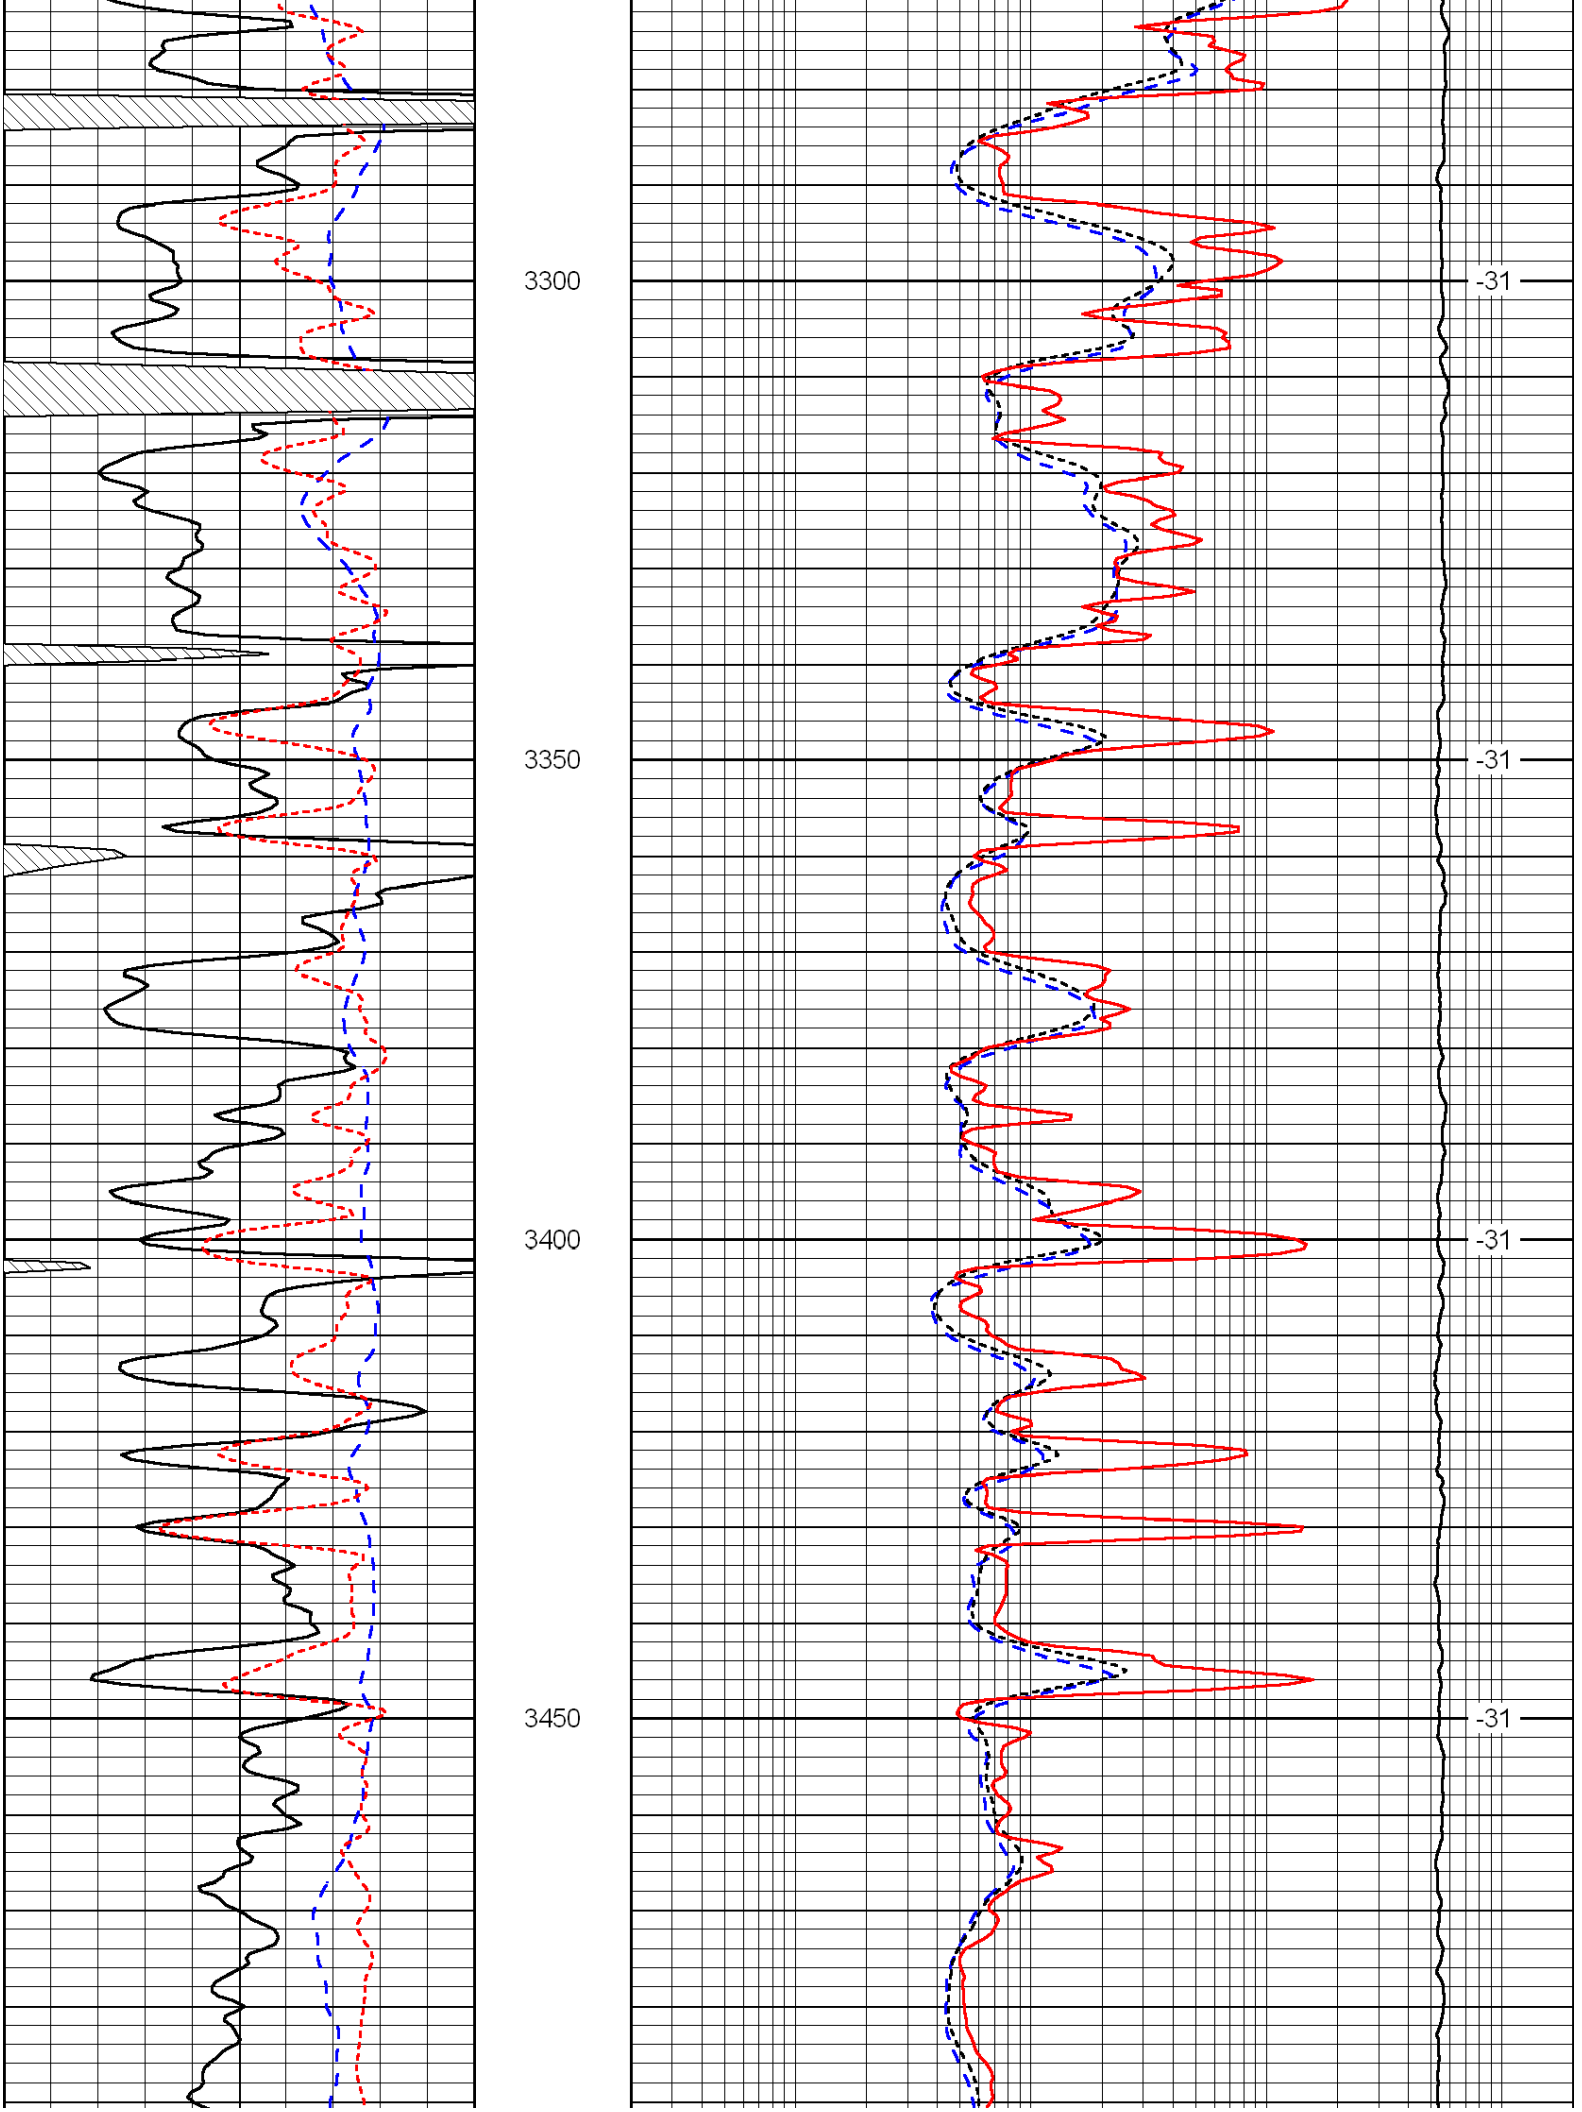

2200
2250
2300
2350
-73
-72
-73
-73

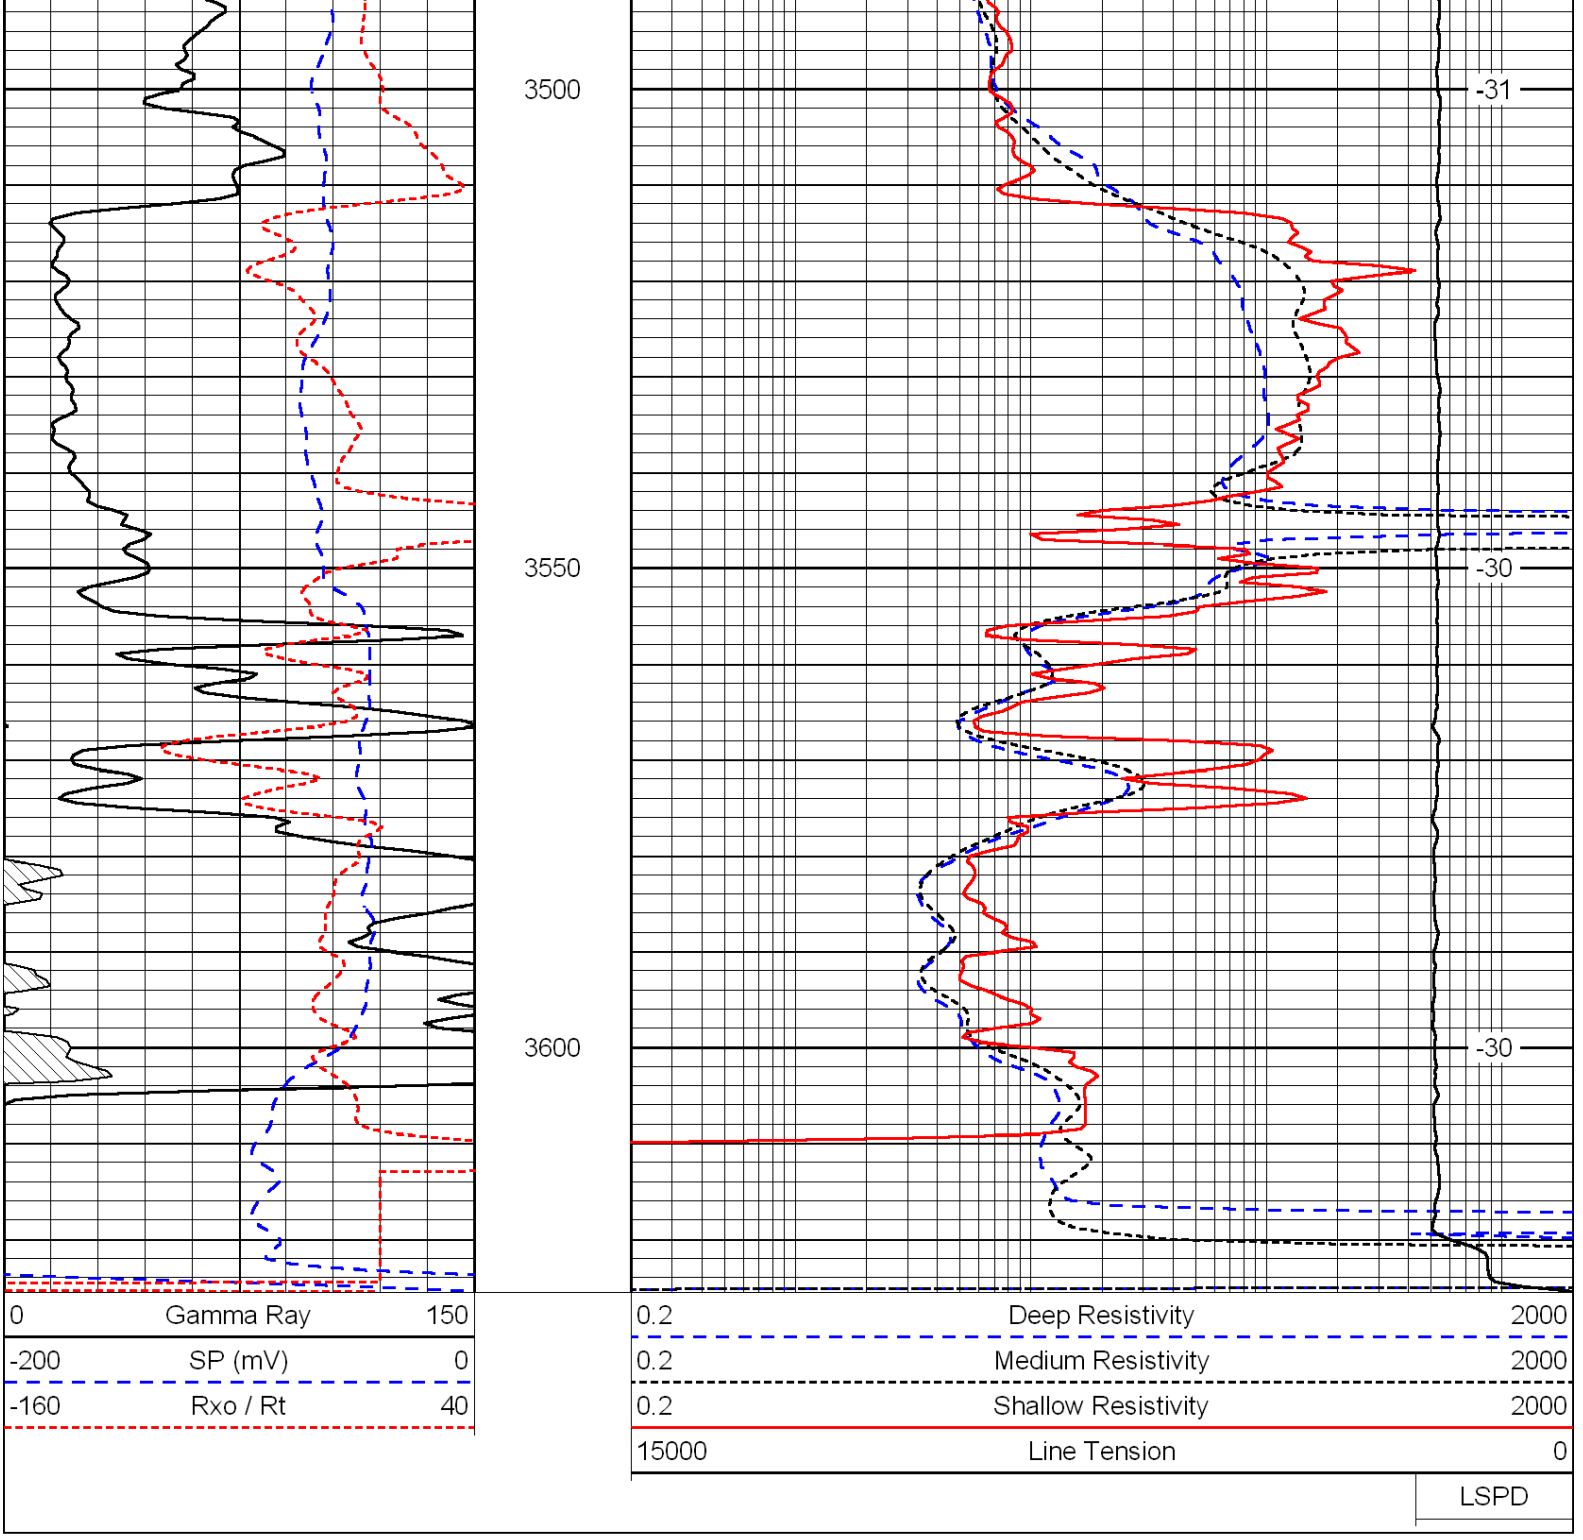

2400
2450
2500
2550
2600
-75
-68
-73
-73
-73


2650
2700
2750
2800
-29
-29
-29
-29


2850
2900
2950
3000
3050
-29
-29
-25
-32
-32


3100
3150
3200
3250
-32
-31
-31
-31


3300
3350
3400
3450
-31
-31
-31
-31


3500
3550
3600
-31
-30
-30
0
Gamma Ray
150
-200
SP (mV)
0
-160
Rxo / Rt
40
0.2
Deep Resistivity
2000
0.2
Medium Resistivity
2000
0.2
Shallow Resistivity
2000
15000
Line Tension
0
LSPD