

LOG-TECH



Dual Induction Log

DIGITAL LOG

(785) 625-3858

API No.

15-163-23891-00-00

Company Gore Oil Company

Well Ganoung #B-1

Field Ganoung

County Rooks

State

Kansas

Location

W2 SW SW
660' FSL & 330' FWL

Other Services
CNL / CDL
MEL

Sec: 32

Twp: 9S

Rge: 17W

Elevation

Permanent Datum Ground Level Elevation 2105
Log Measured From Kelly Bushing 8 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

K.B. 2113
D.F.
G.L. 2105

Date 10/30/2010

Run Number One

Depth Driller 3597

Depth Logger 3600

Bottom Logged Interval 3599

Top Log Interval 300

Casing Driller 8.625 @ 307

Casing Logger 306

Bit Size 7.875

Type Fluid in Hole Chemical

Salinity, ppm CL 5000

Density / Viscosity 9.1 46

pH / Fluid Loss 8.5 9.6

Source of Sample Flowline

Rm @ Meas. Temp .58 @ 62

Rmf @ Meas. Temp .44 @ 62

Rmc @ Meas. Temp .78 @ 62

Source of Rmf / Rmc Charts

Rm @ BHT .32 @ 114

Operating Rig Time 4 Hours

Max Rec. Temp. F 114

Equipment Number 17

Location Hays

Recorded By R. Barnhart

Witnessed By Don Rider

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858




Plainville, KS, Hwy 18:
2 E, 3/4 S, E into



Database File: gore_ganoungb-1hd.db
Dataset Pathname: dil/goremain
Presentation Format: dil2in
Dataset Creation: Sun Oct 31 00:13:49 2010
Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0
50	Shallow Resistivity	500
50	Deep Resistivity	500



LSPD

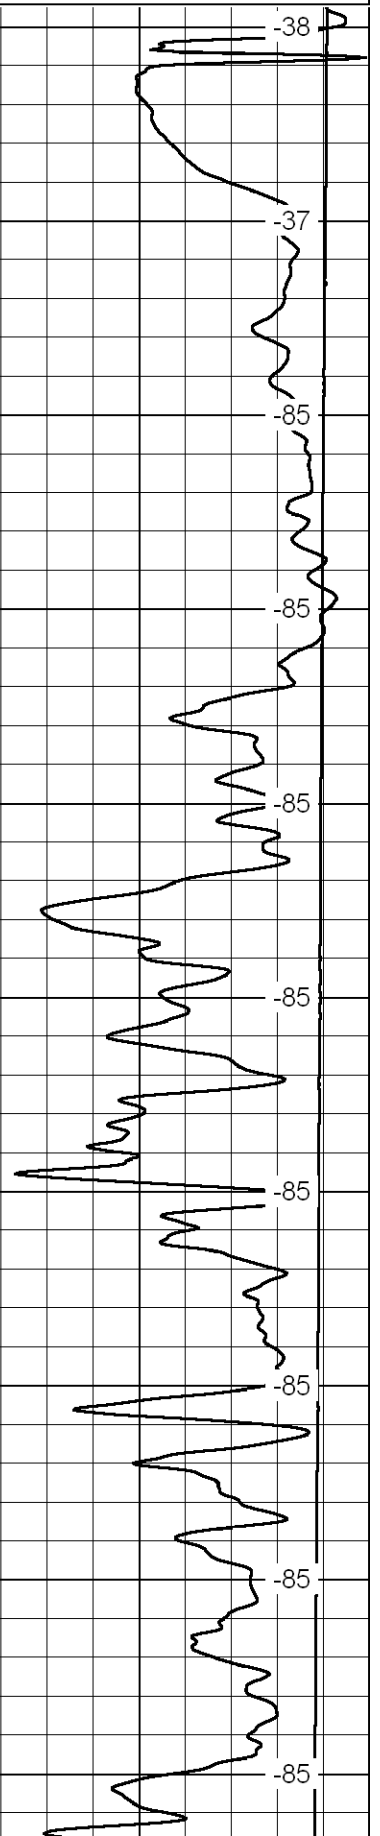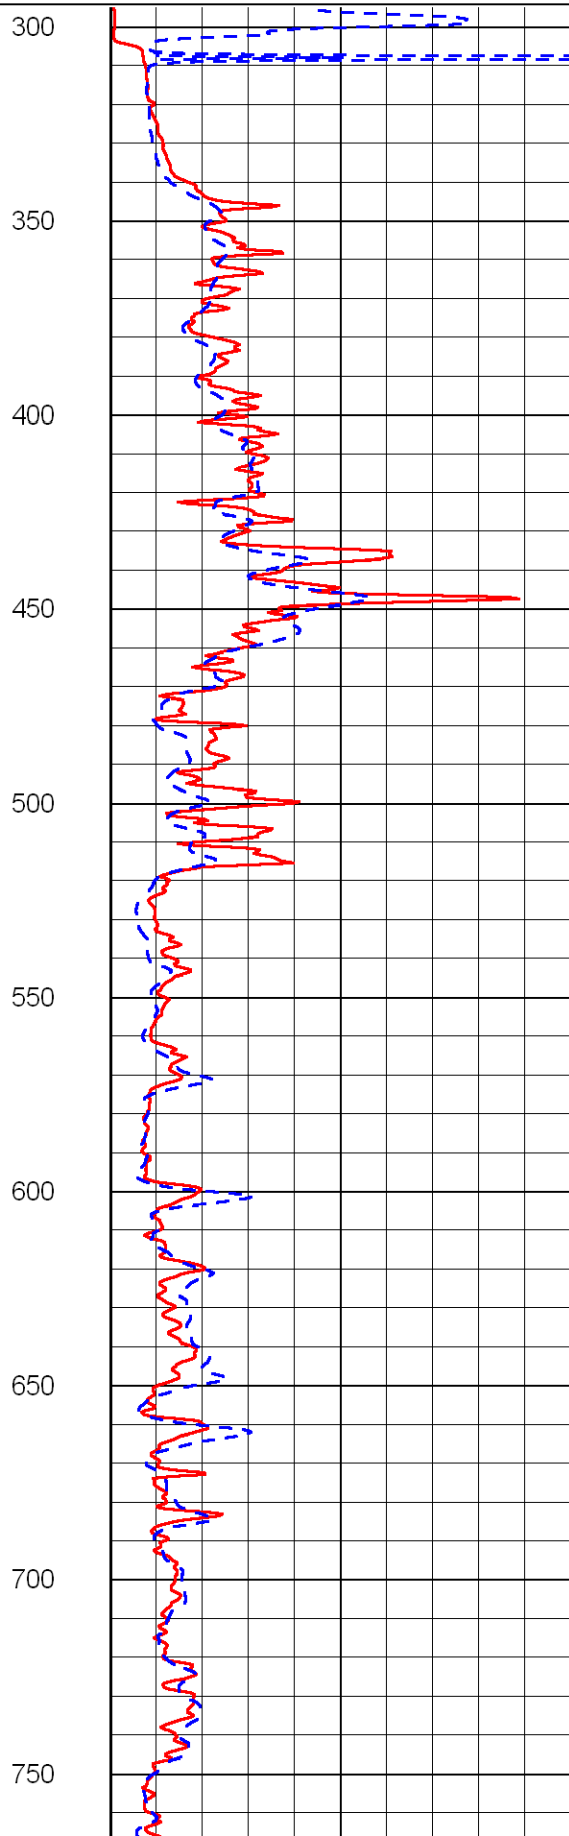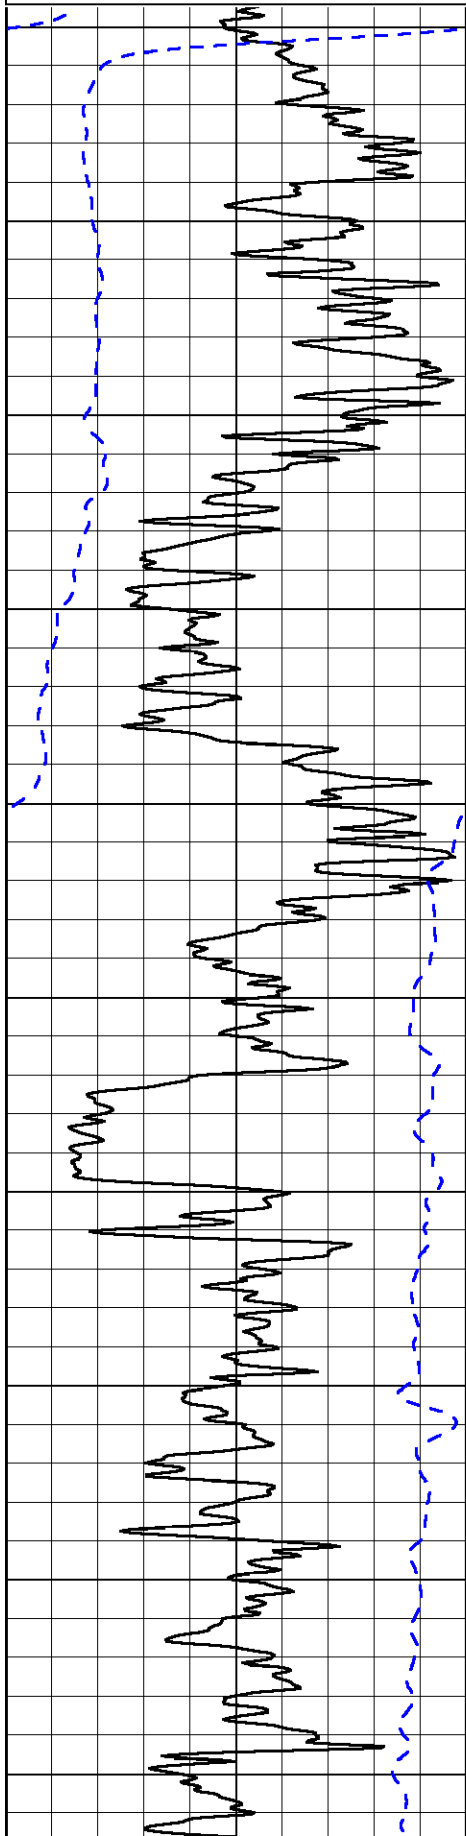


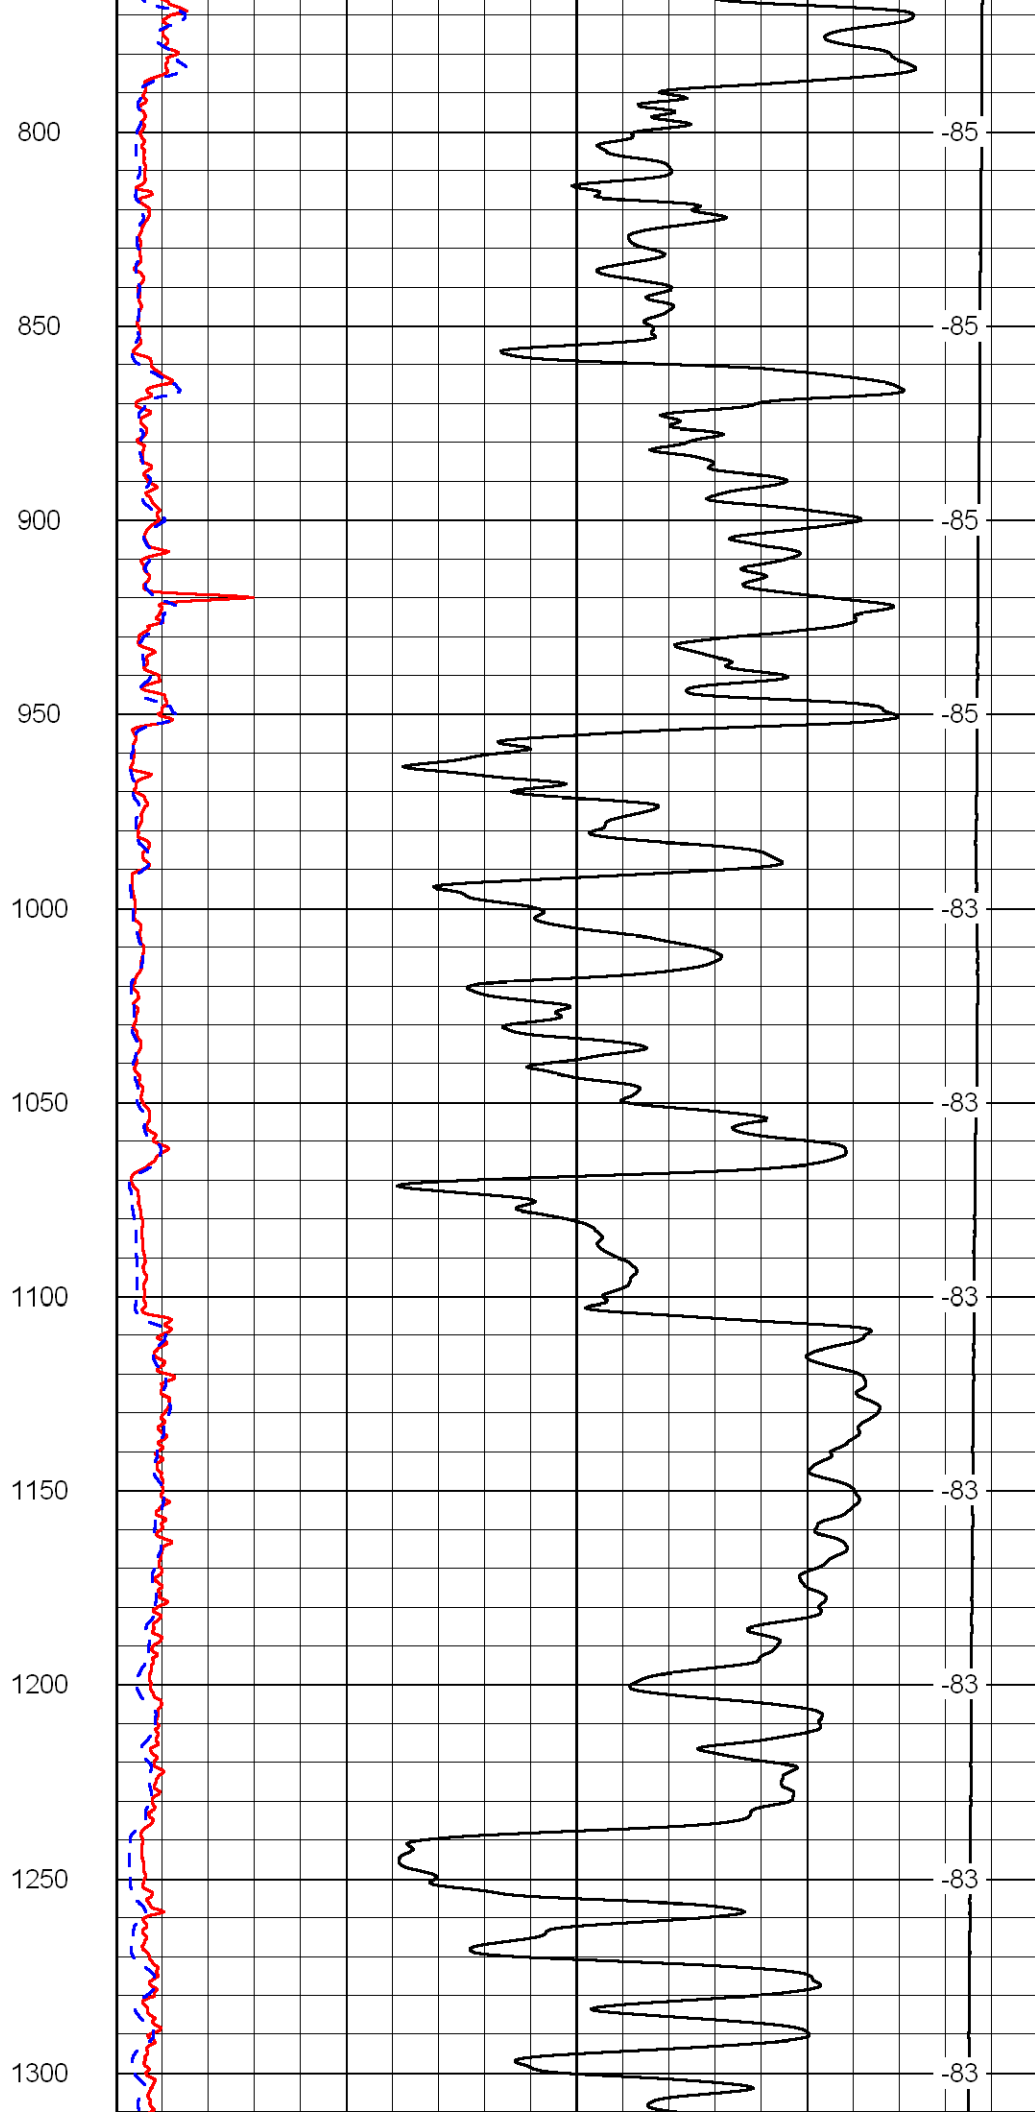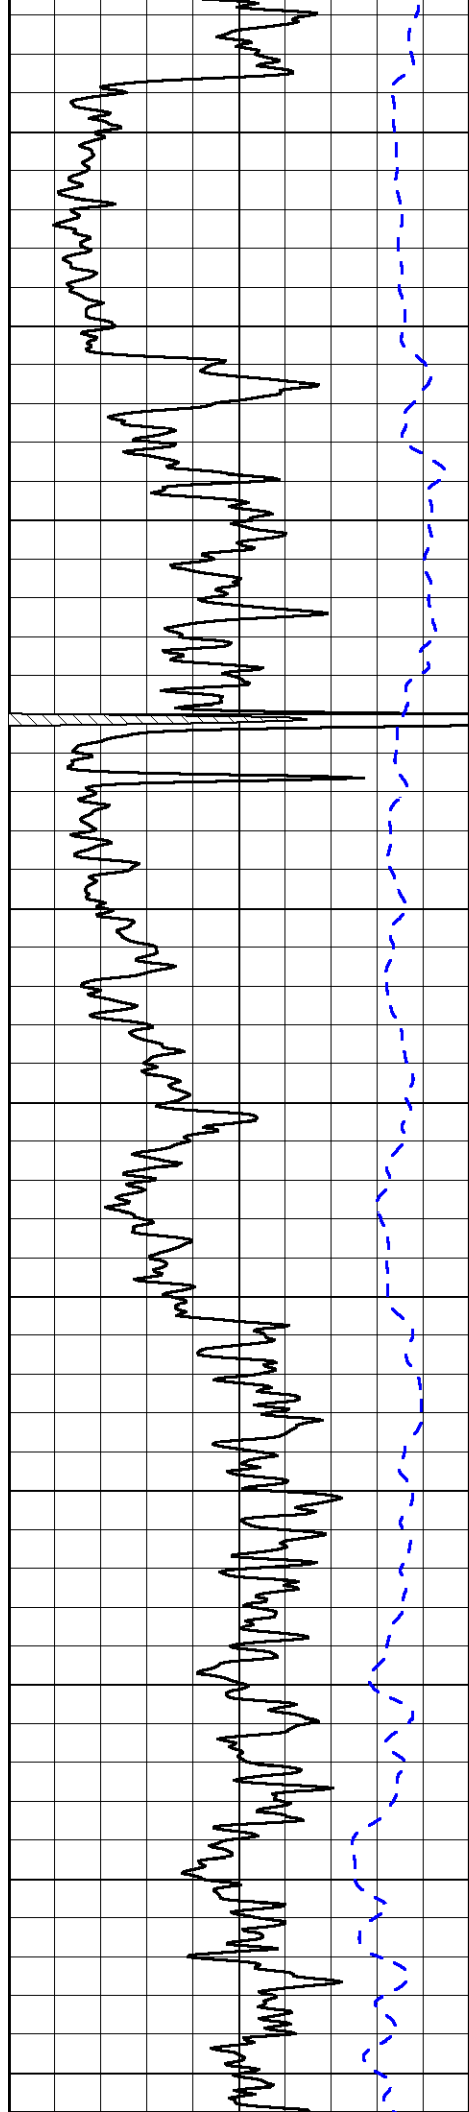

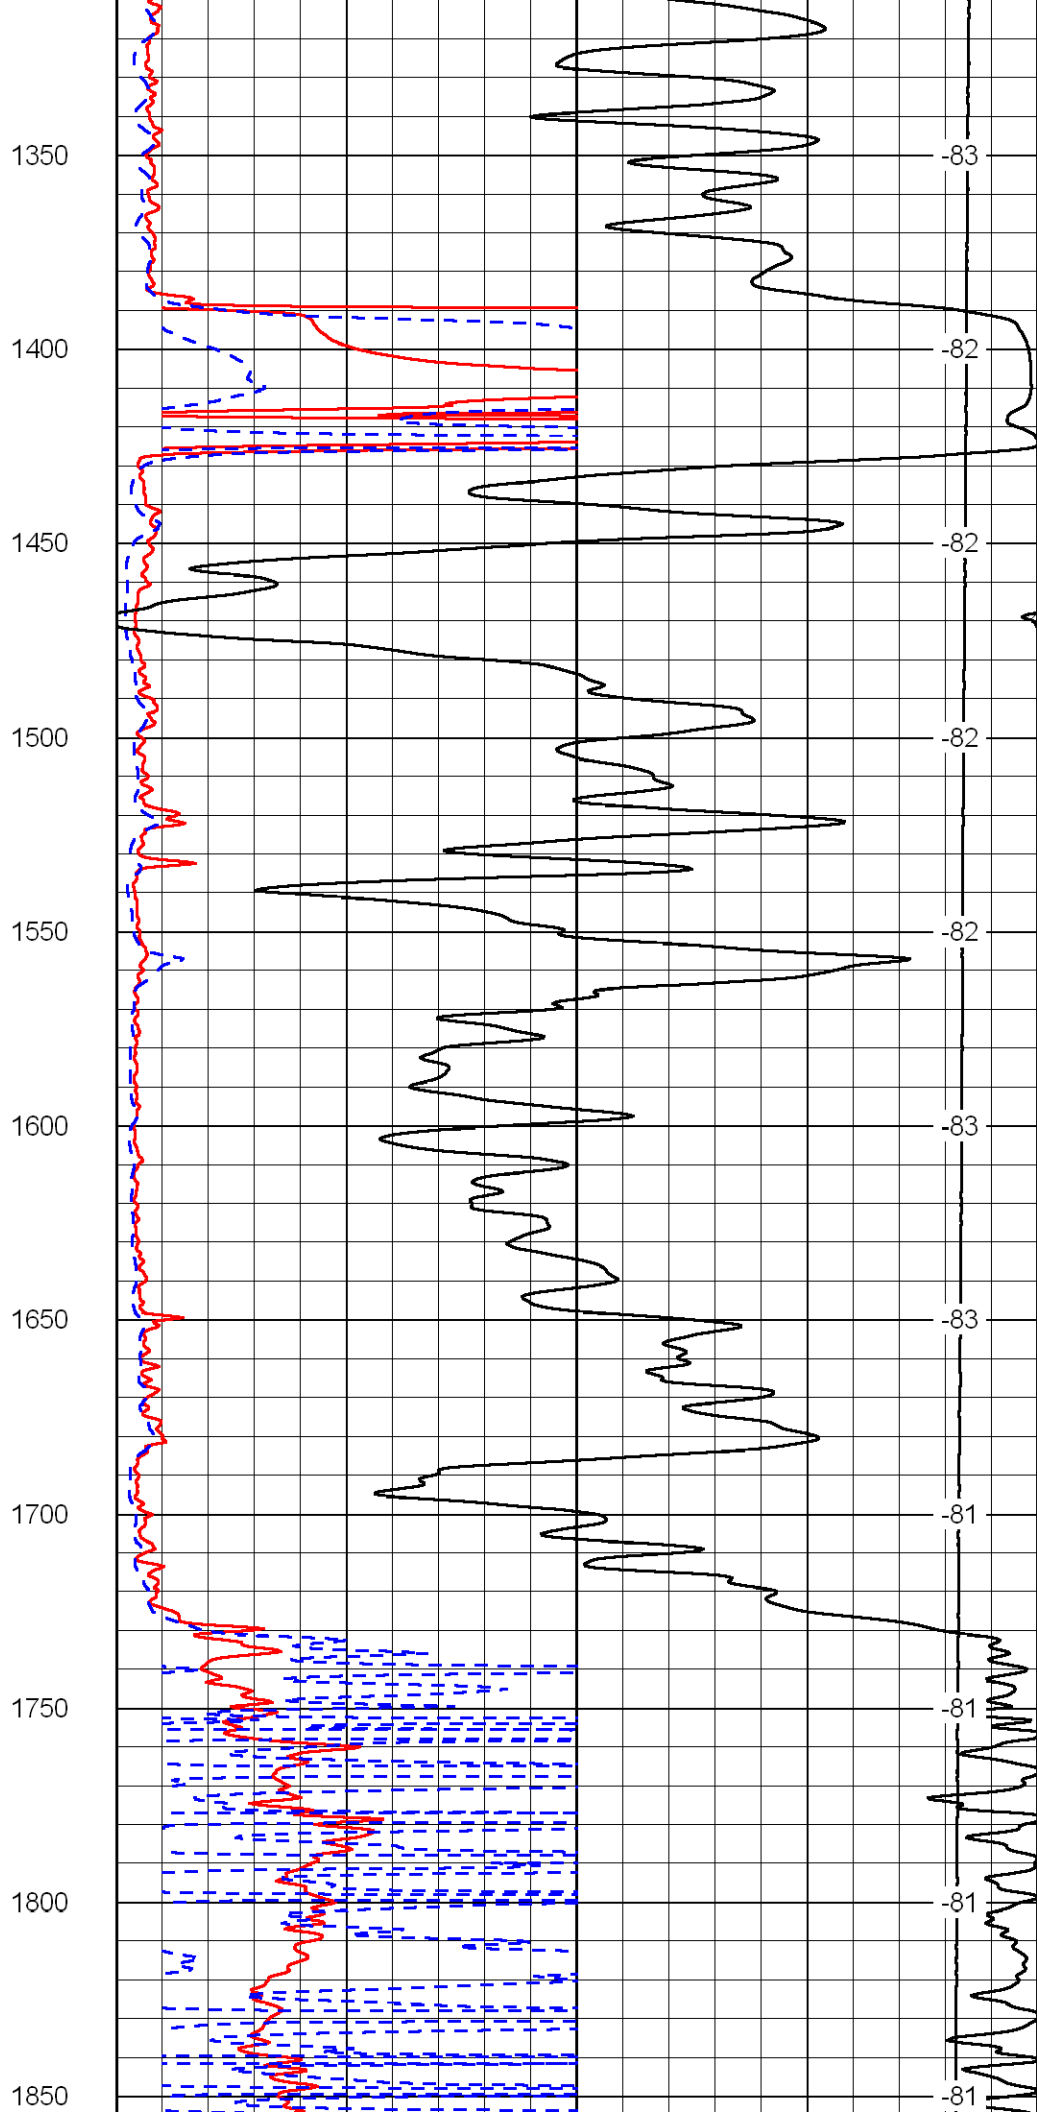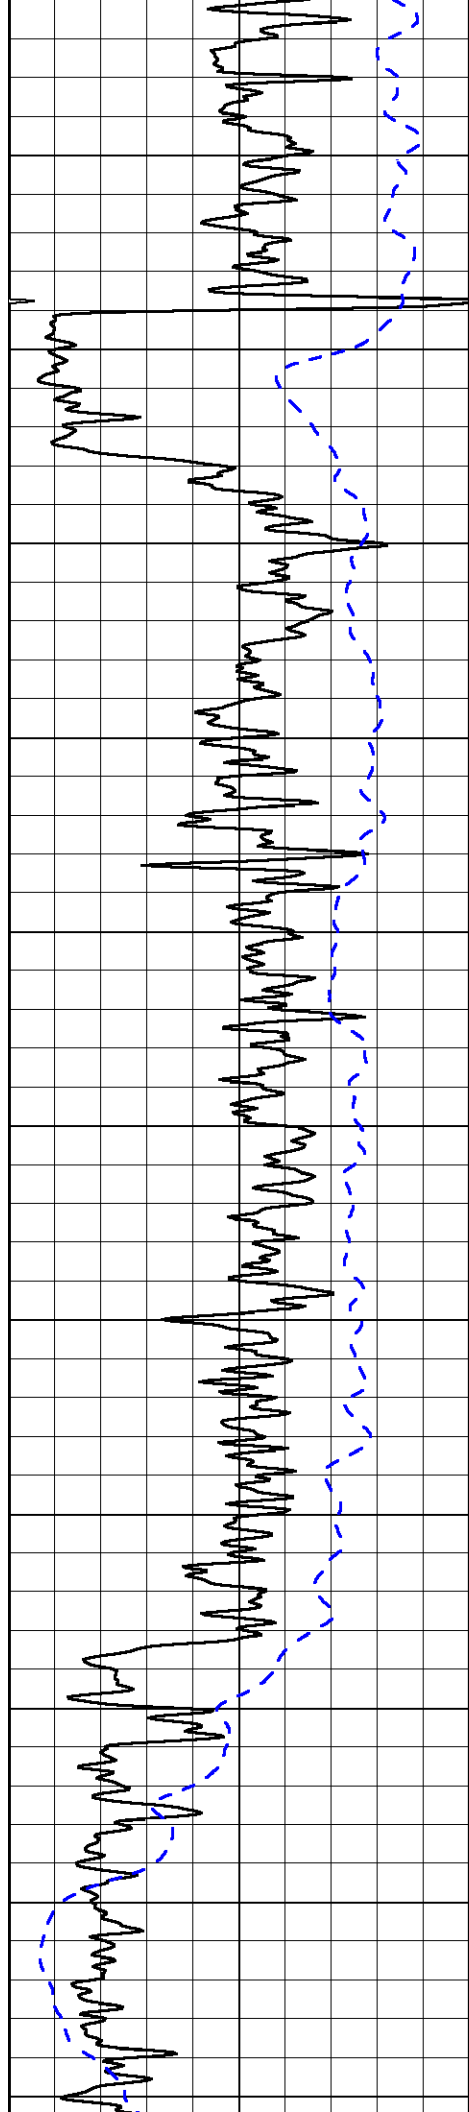

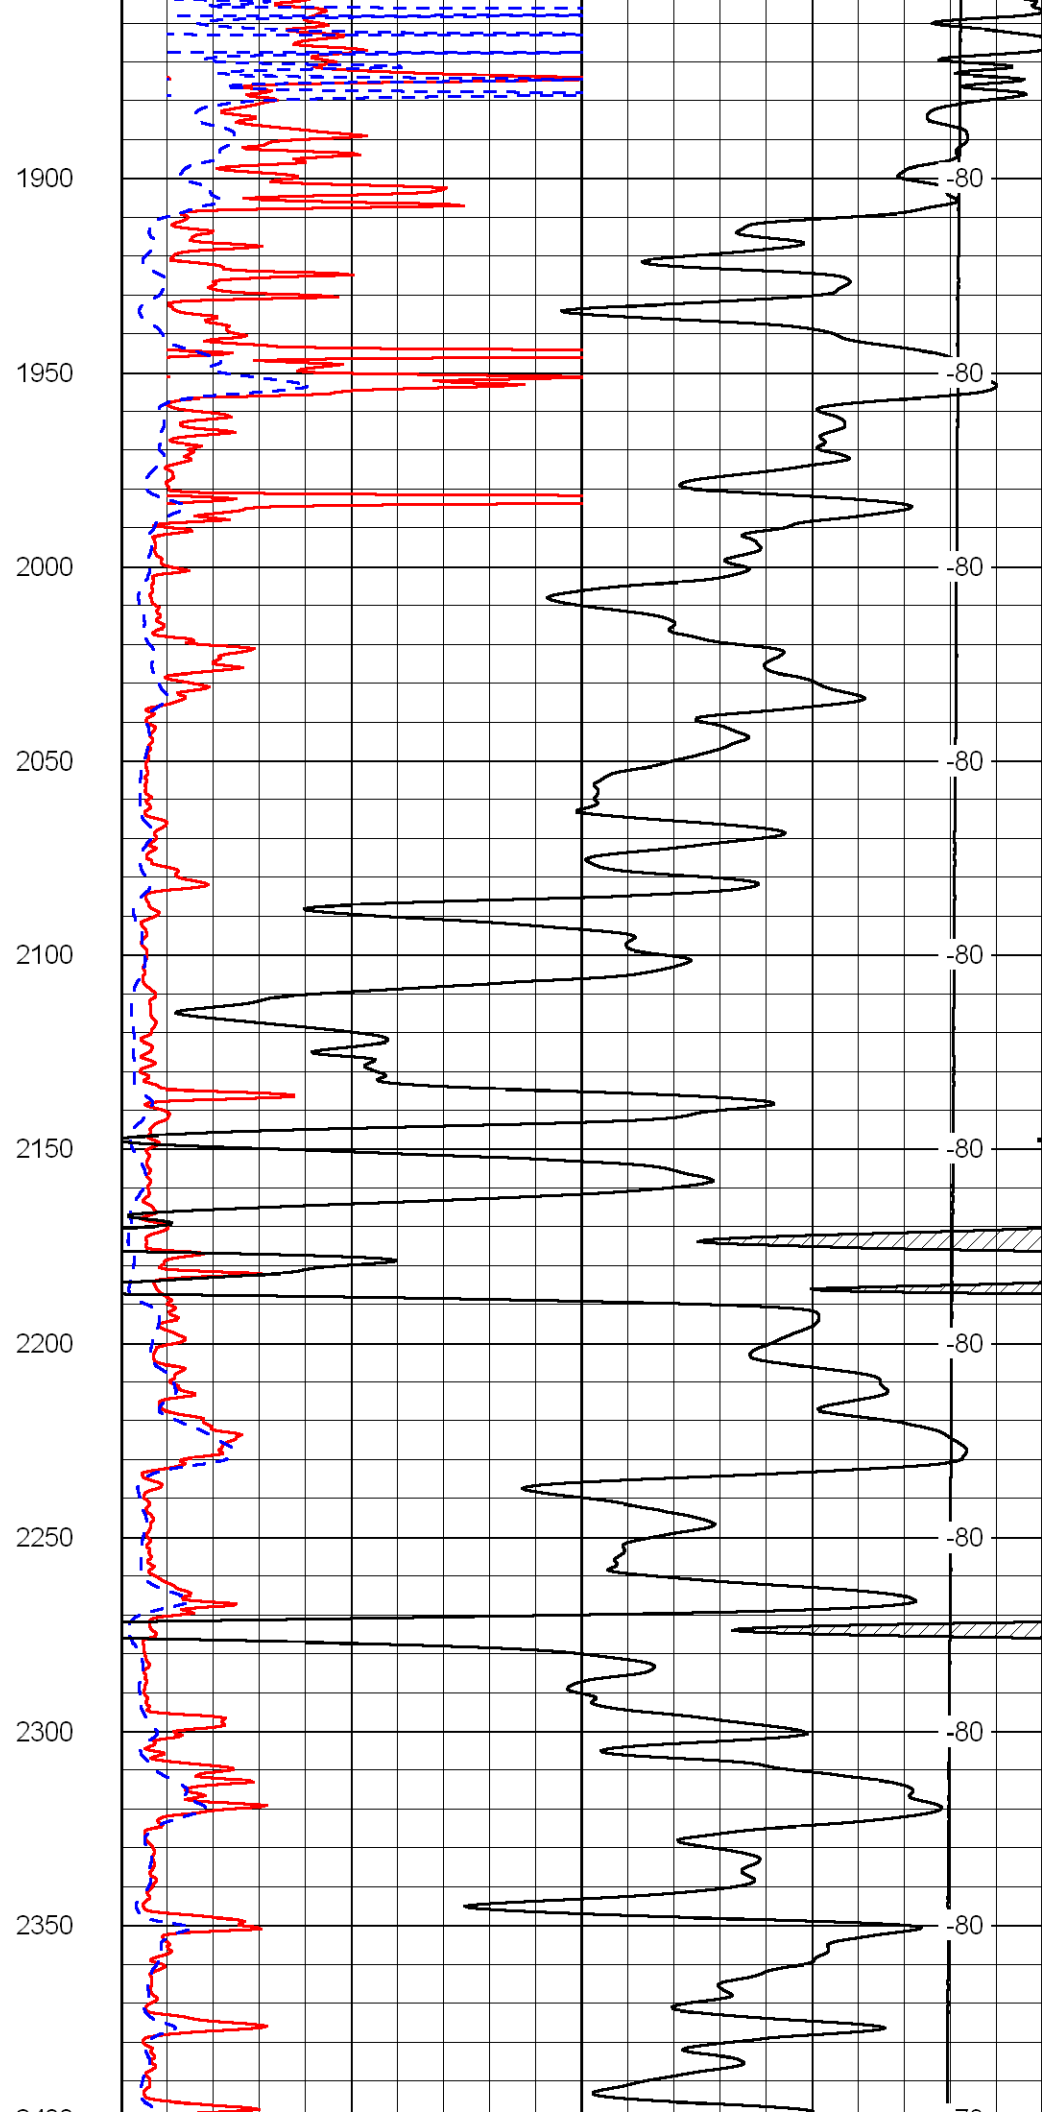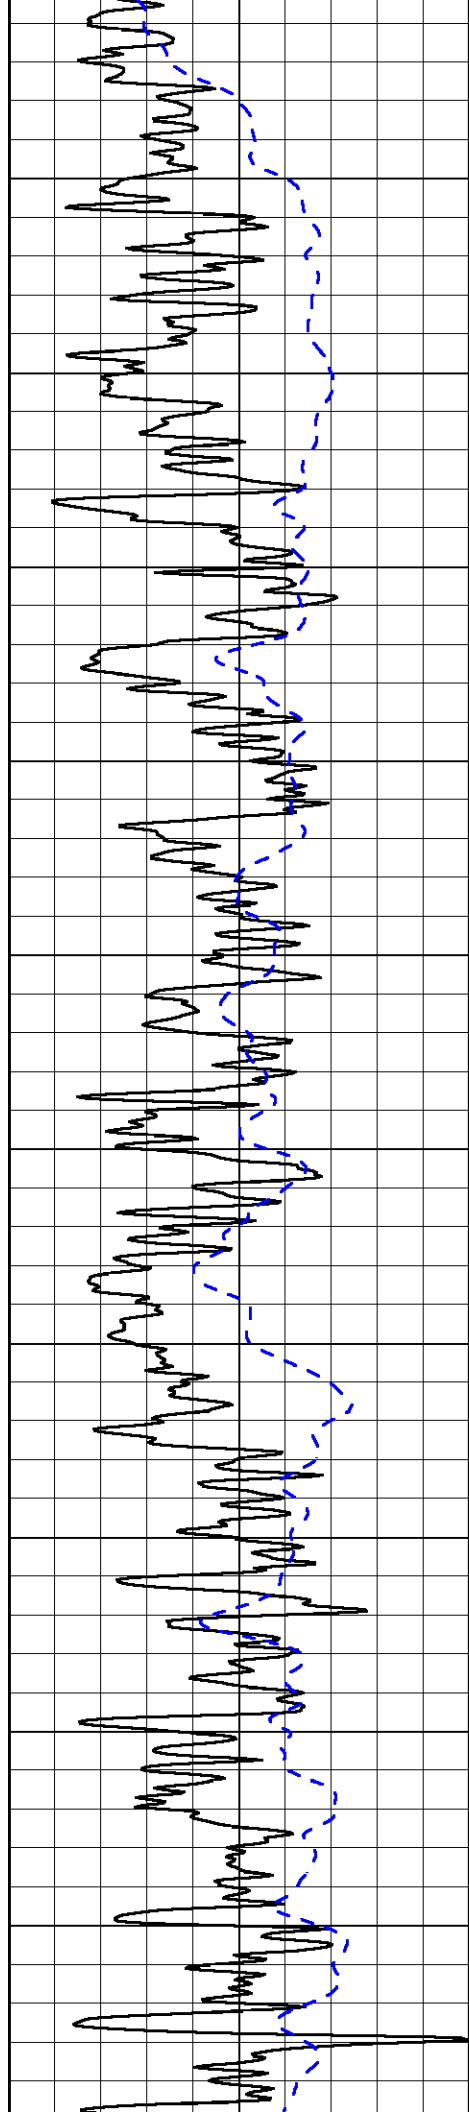

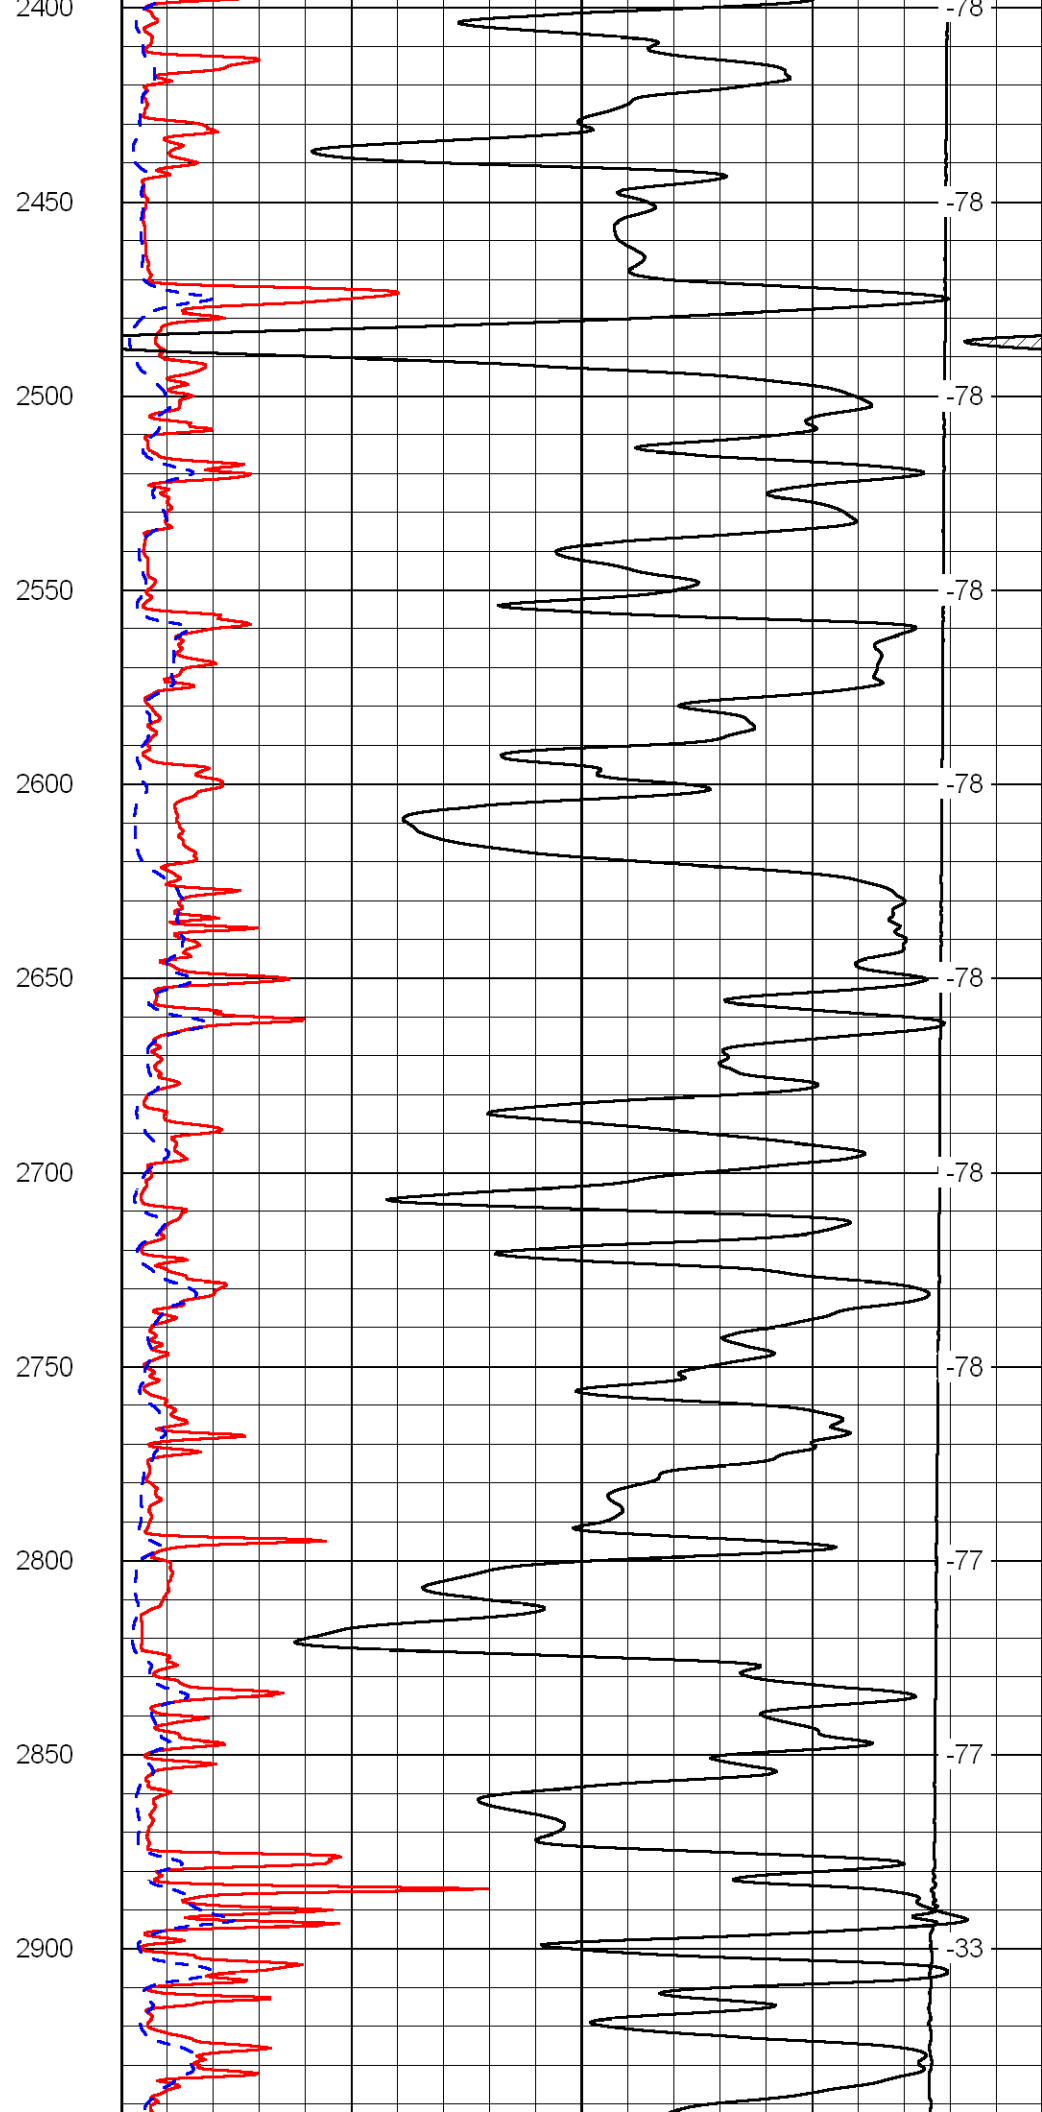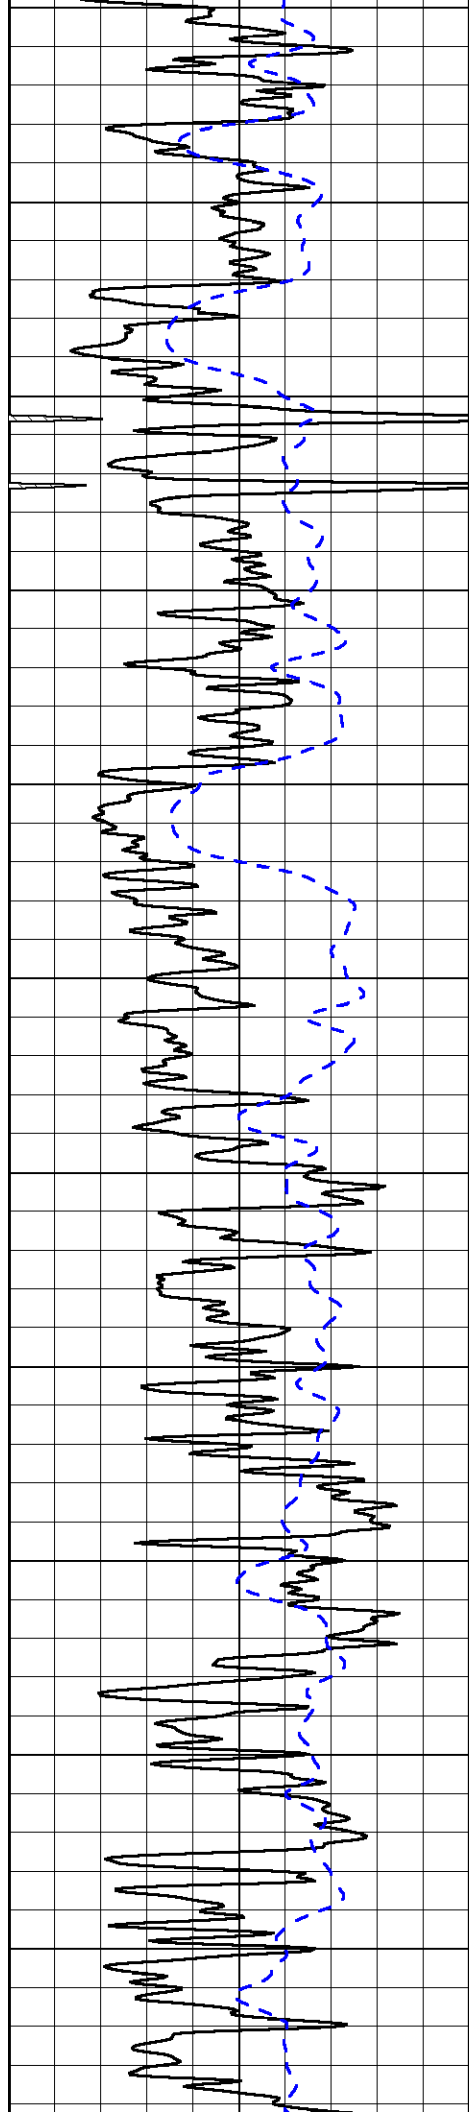

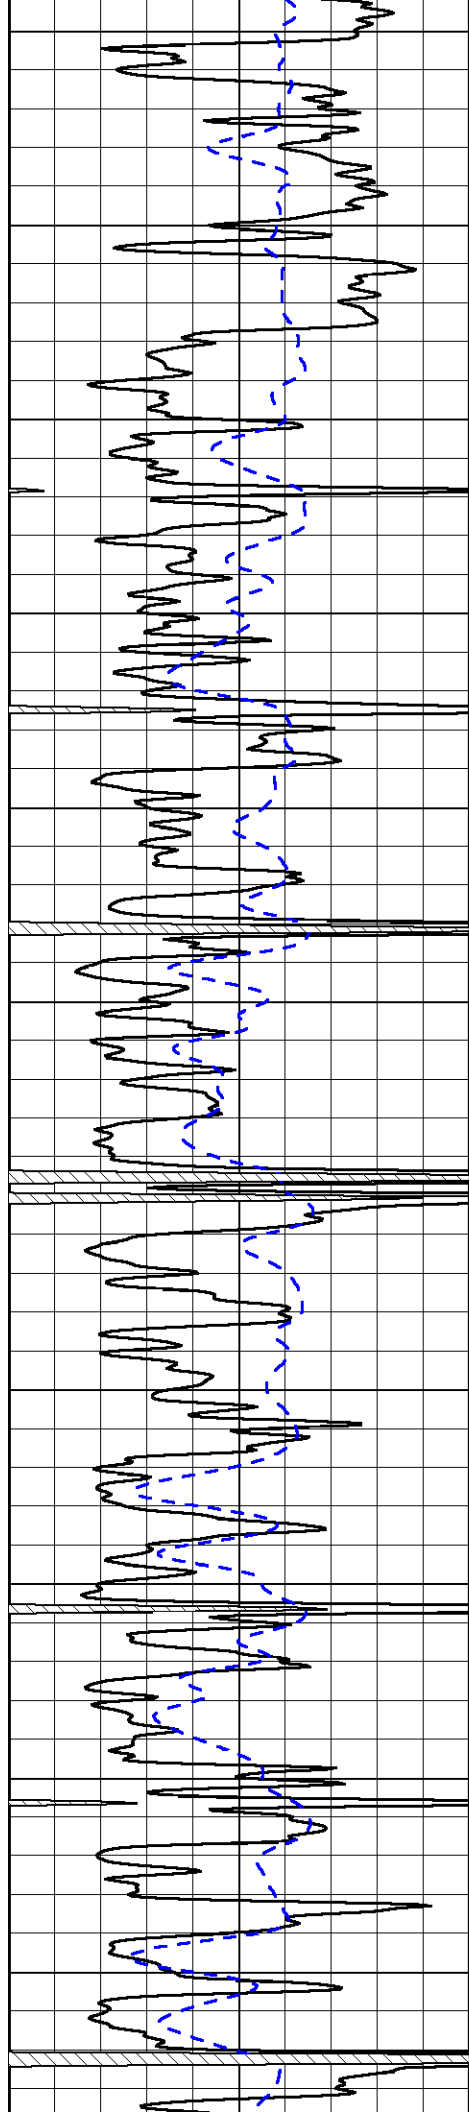

2950

3000

3050

3100

3150

3200


3250

3300

3350

3400

3450

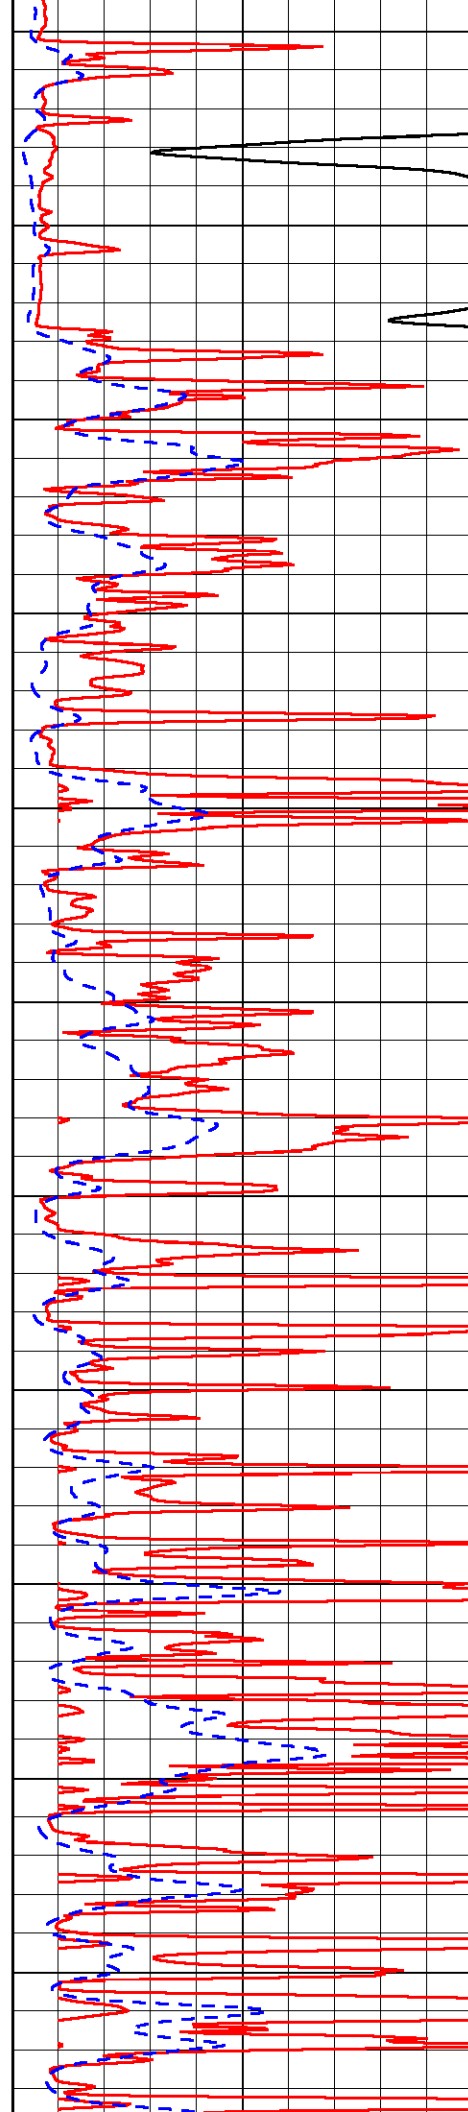

-33

-33

-33

-32

-32

-32


-32


-32

-32



-32


-32

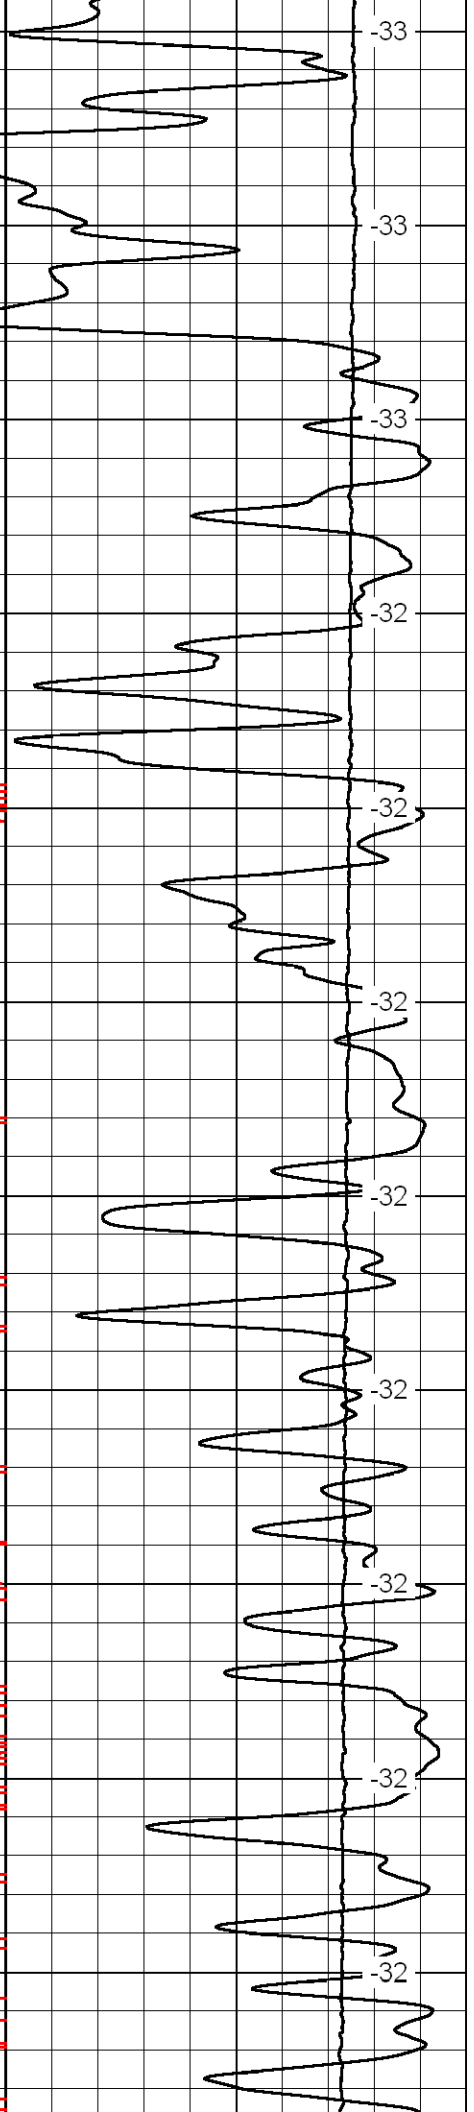


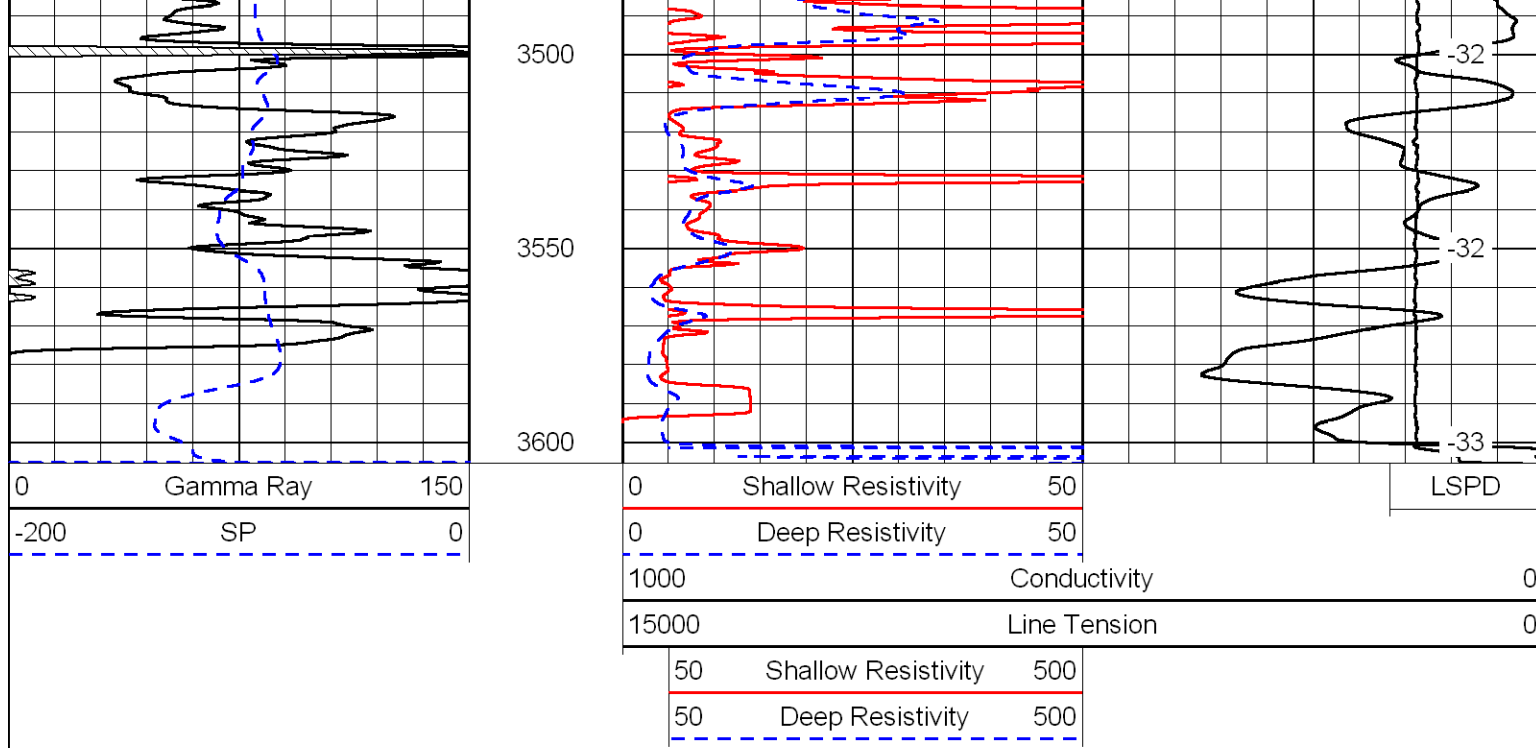



Database File: gore_ganoungb-1hd.db
Dataset Pathname: dil/goremain
Presentation Format: dil
Dataset Creation: Sun Oct 31 00:13:49 2010
Charted by: Depth in Feet scaled 1:240

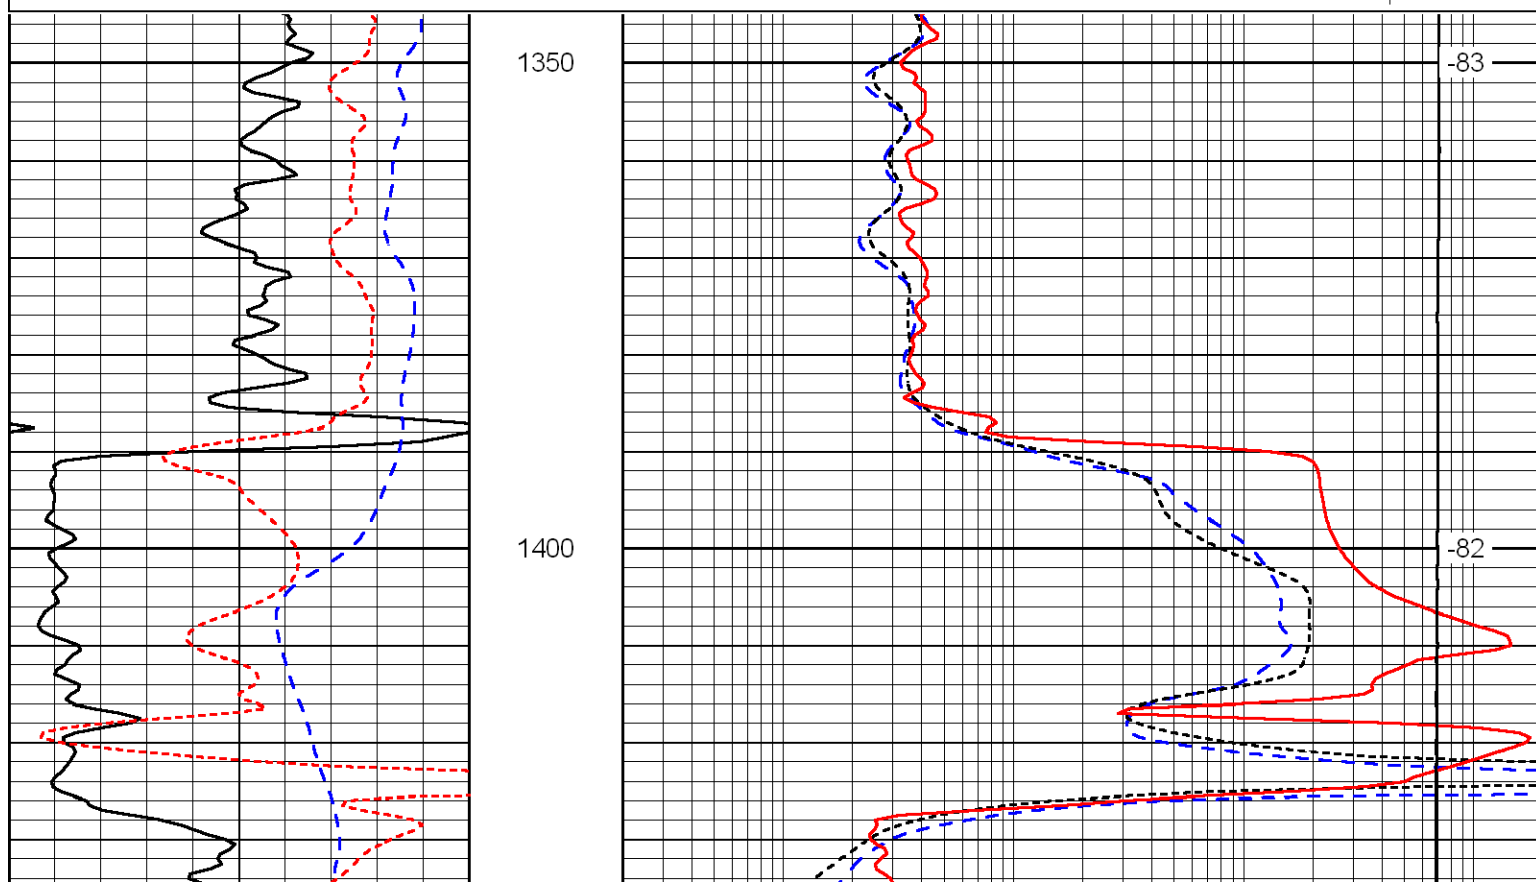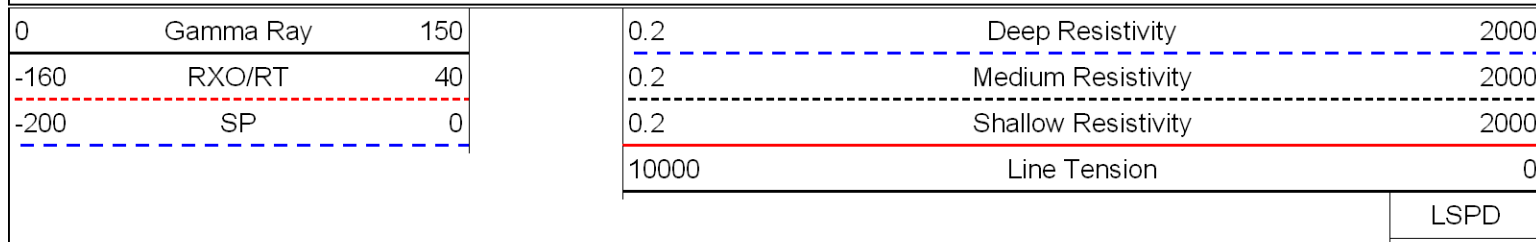

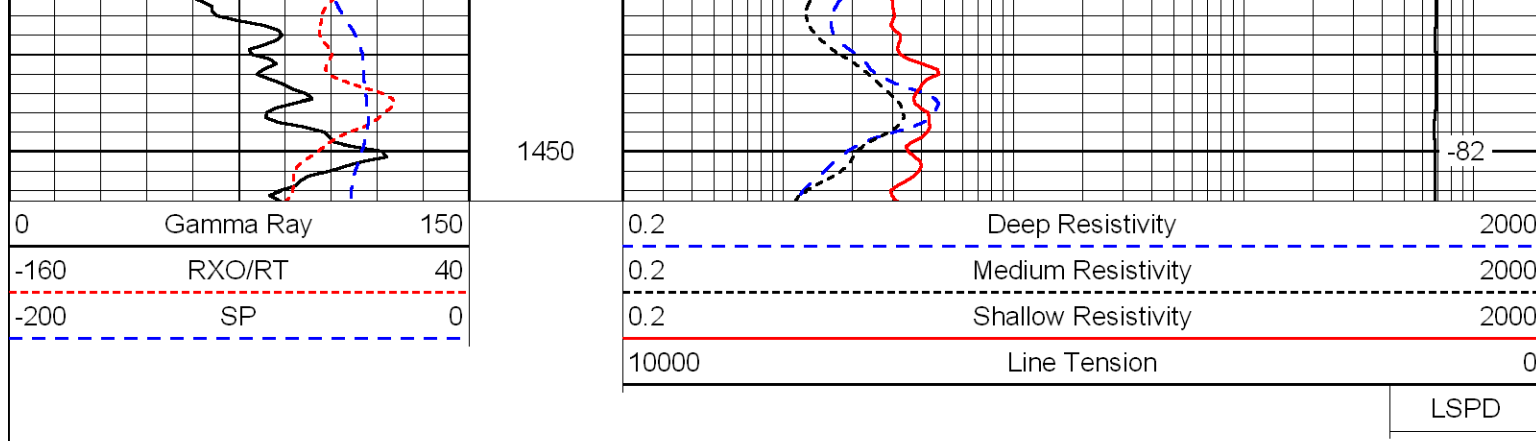

Database File: gore_ganoungb-1hd.db
Dataset Pathname: dil/goremain
Presentation Format: dil
Dataset Creation: Sun Oct 31 00:13:49 2010
Charted by: Depth in Feet scaled 1:240

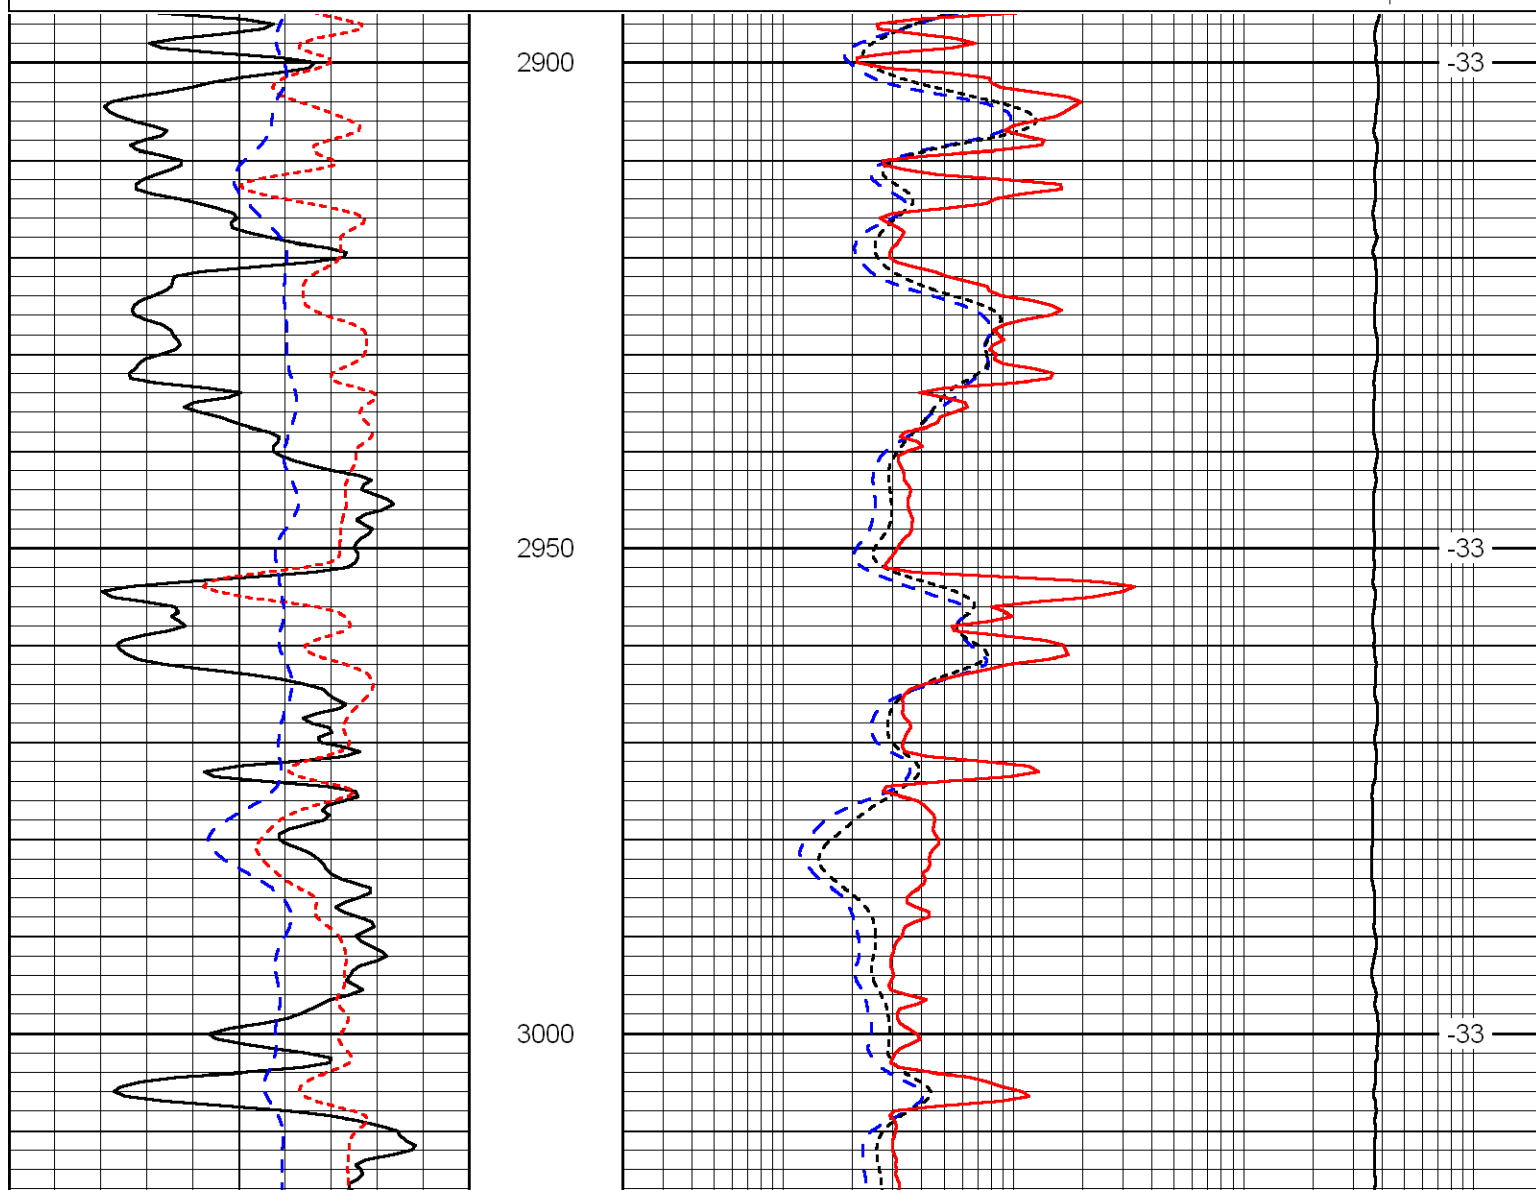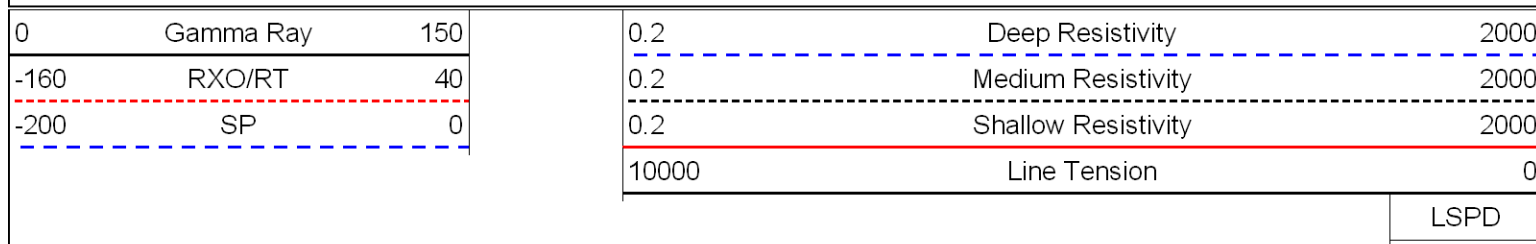

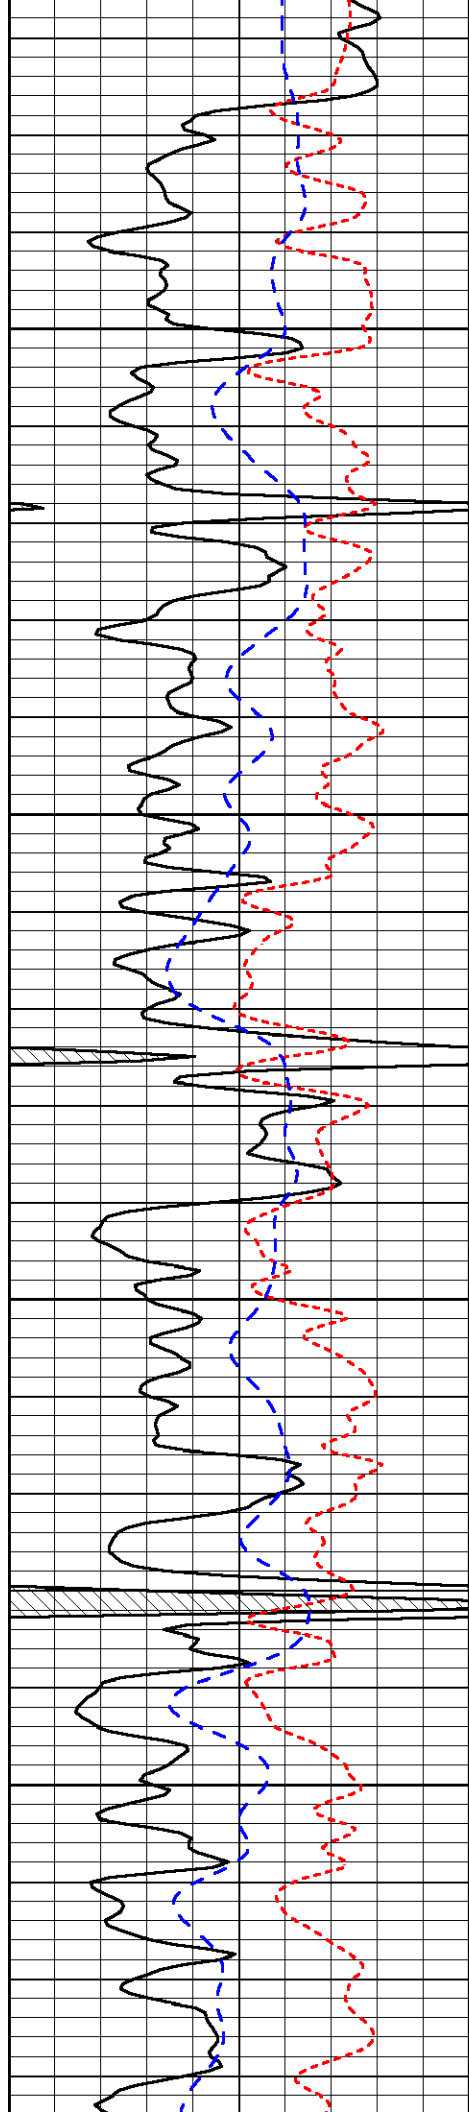


3050

3100

3150

3200

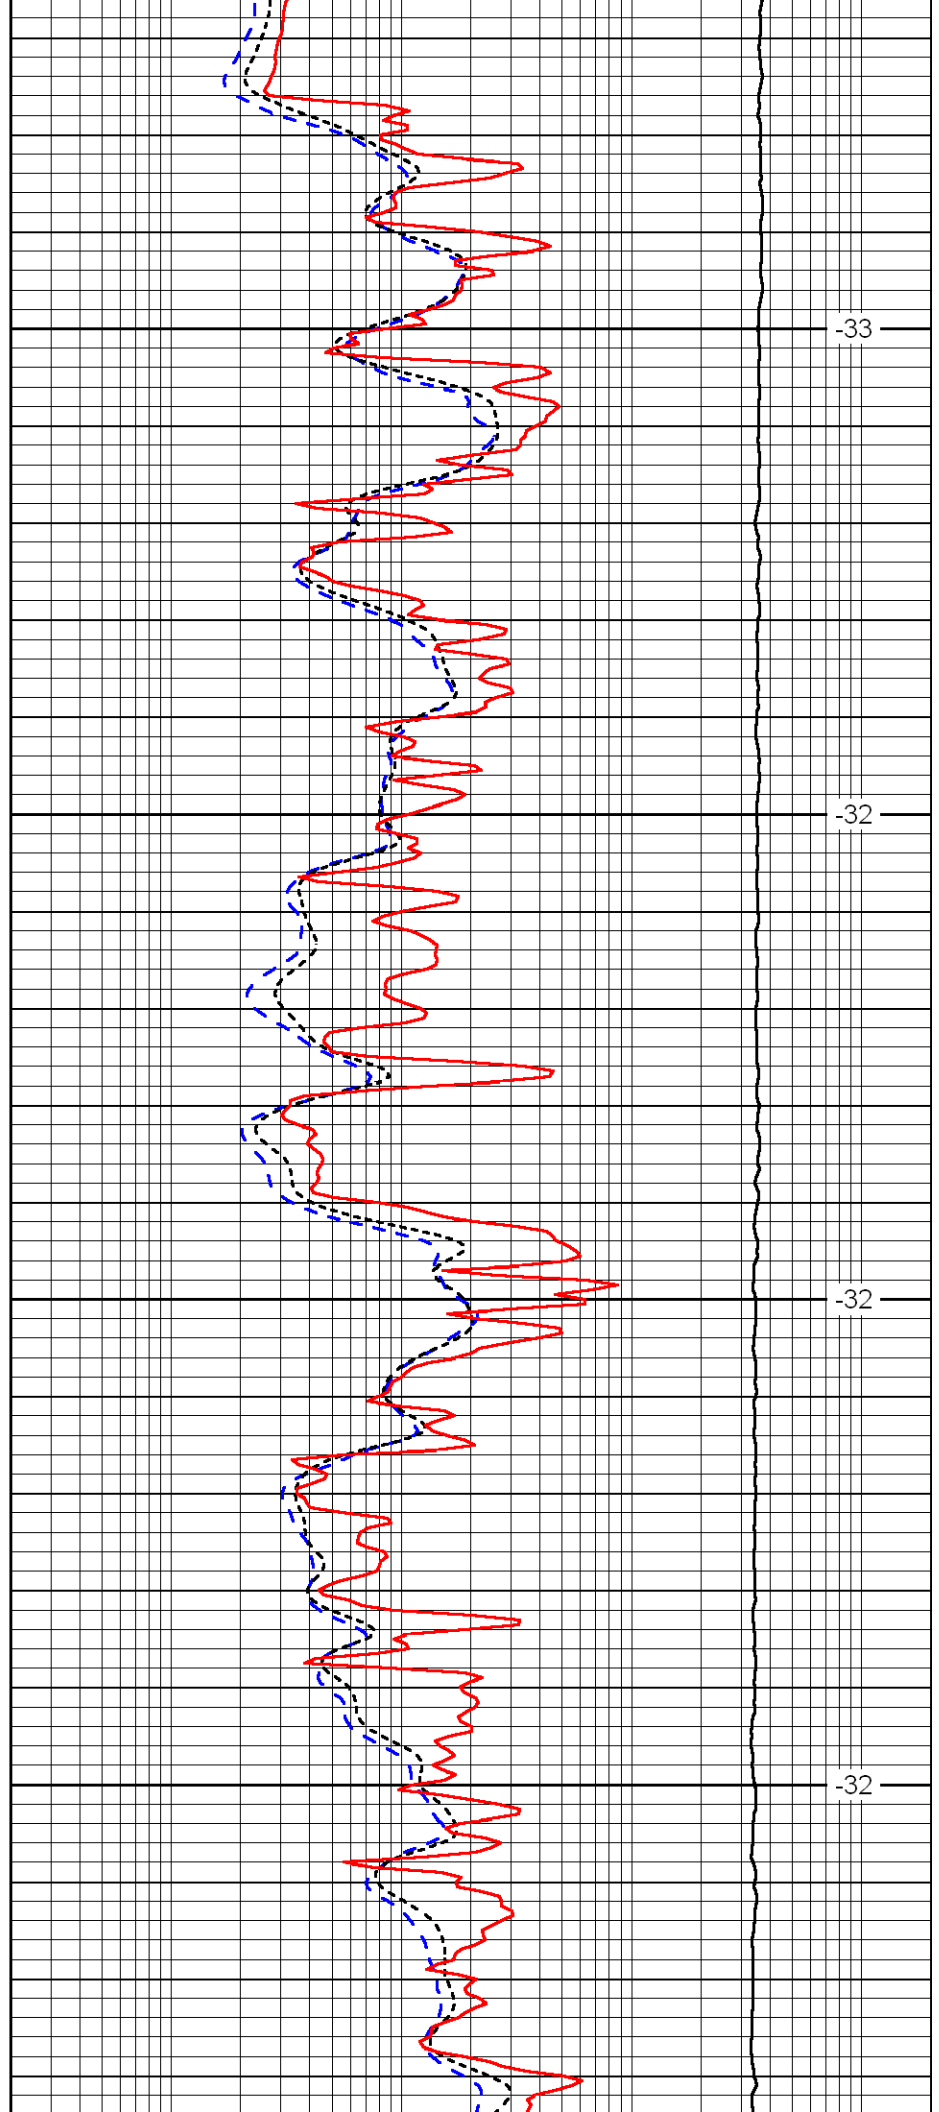


-33

-32

-32

-32

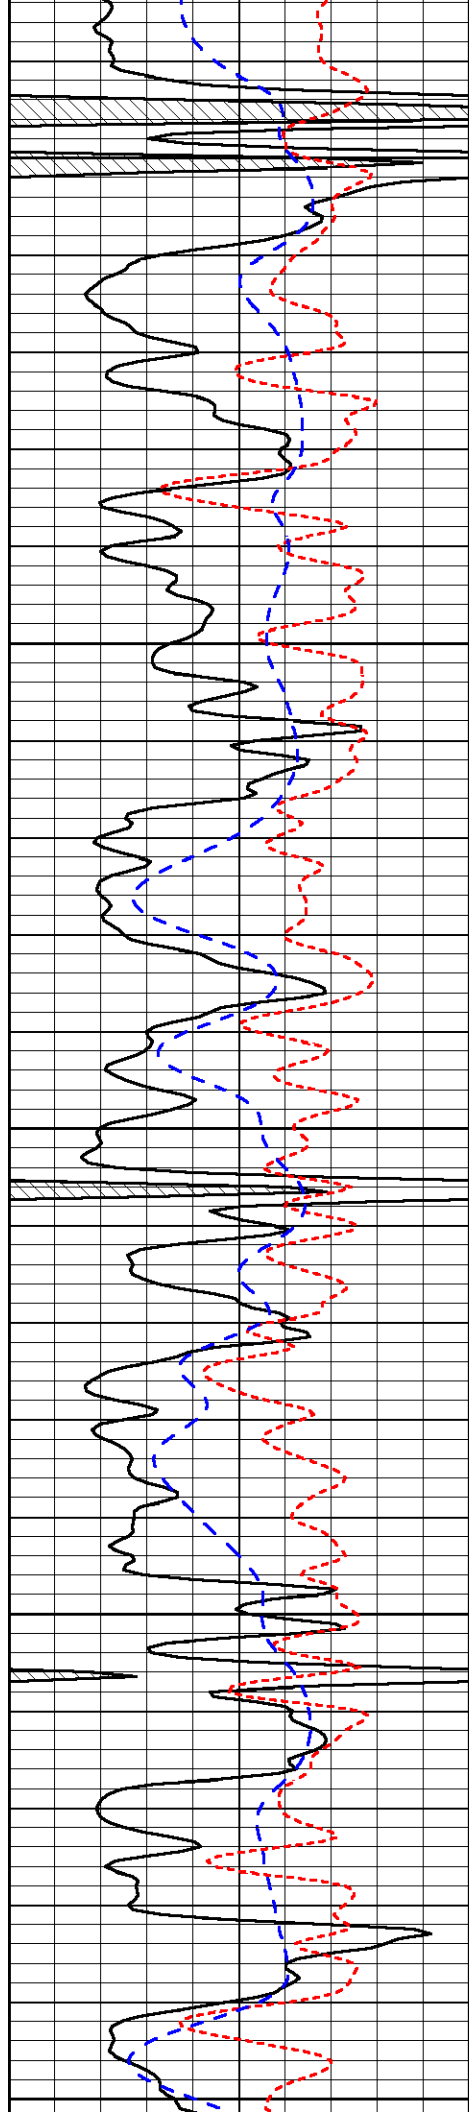


3250

3300

3350

3400

3450

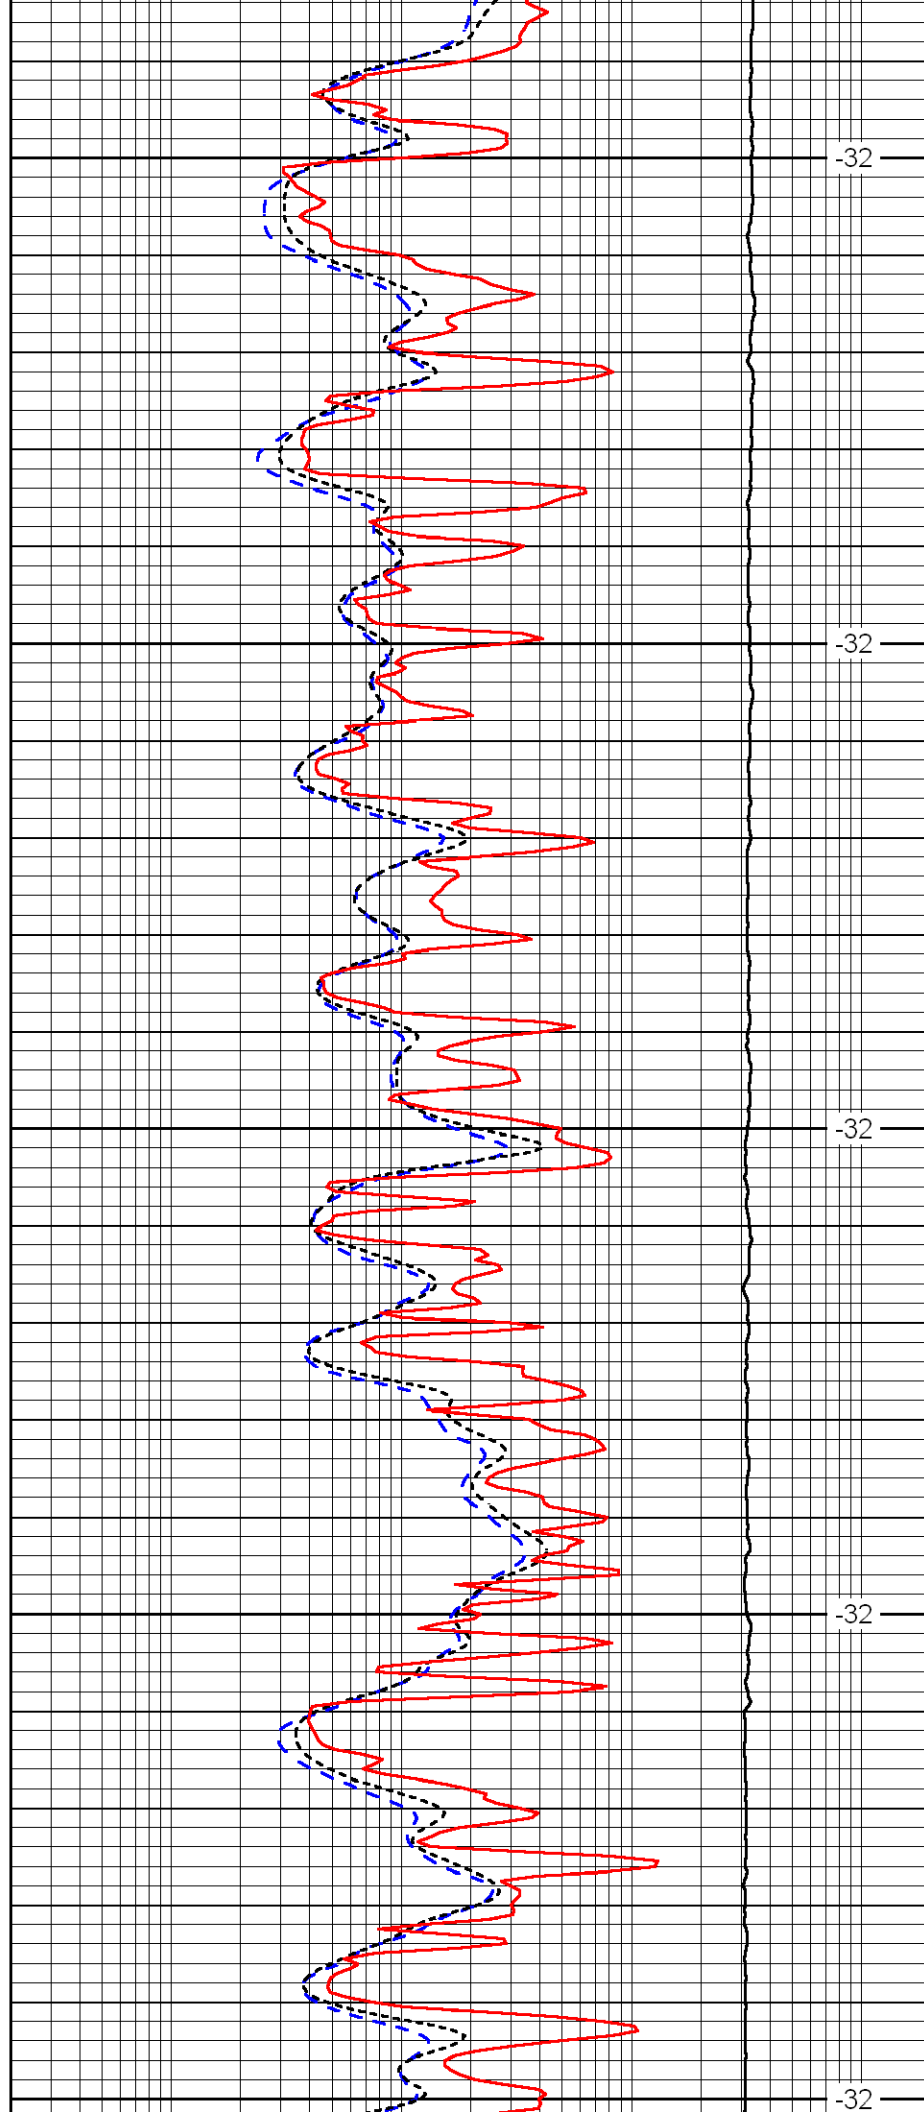


-32

-32

-32

-32


-32

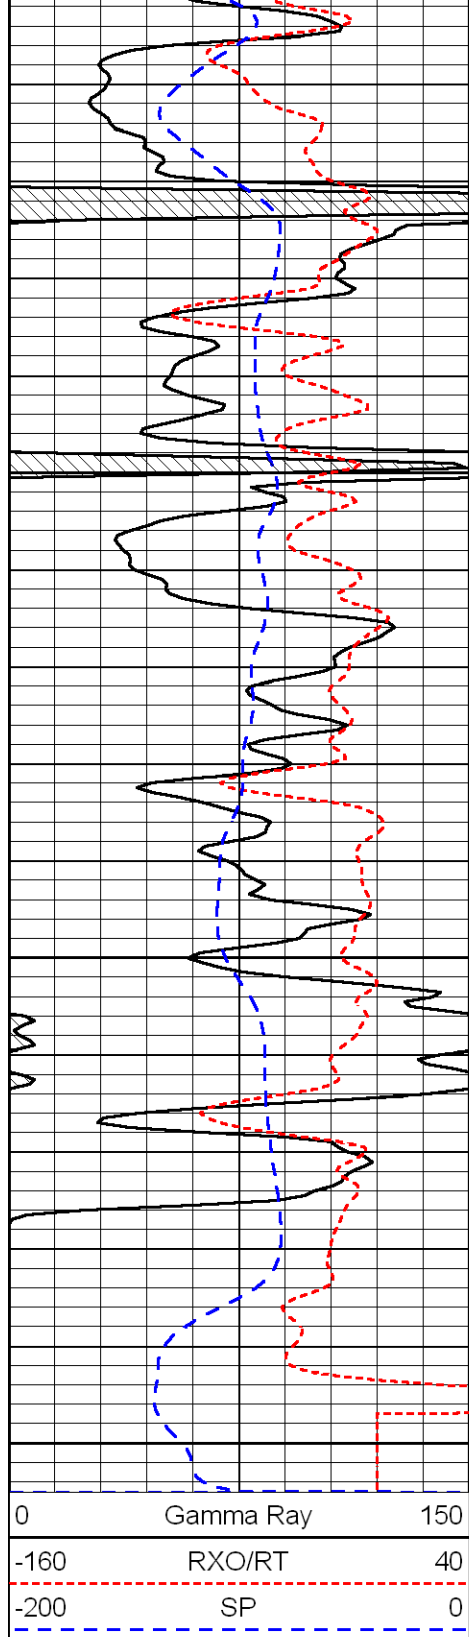

3500

3550

3600

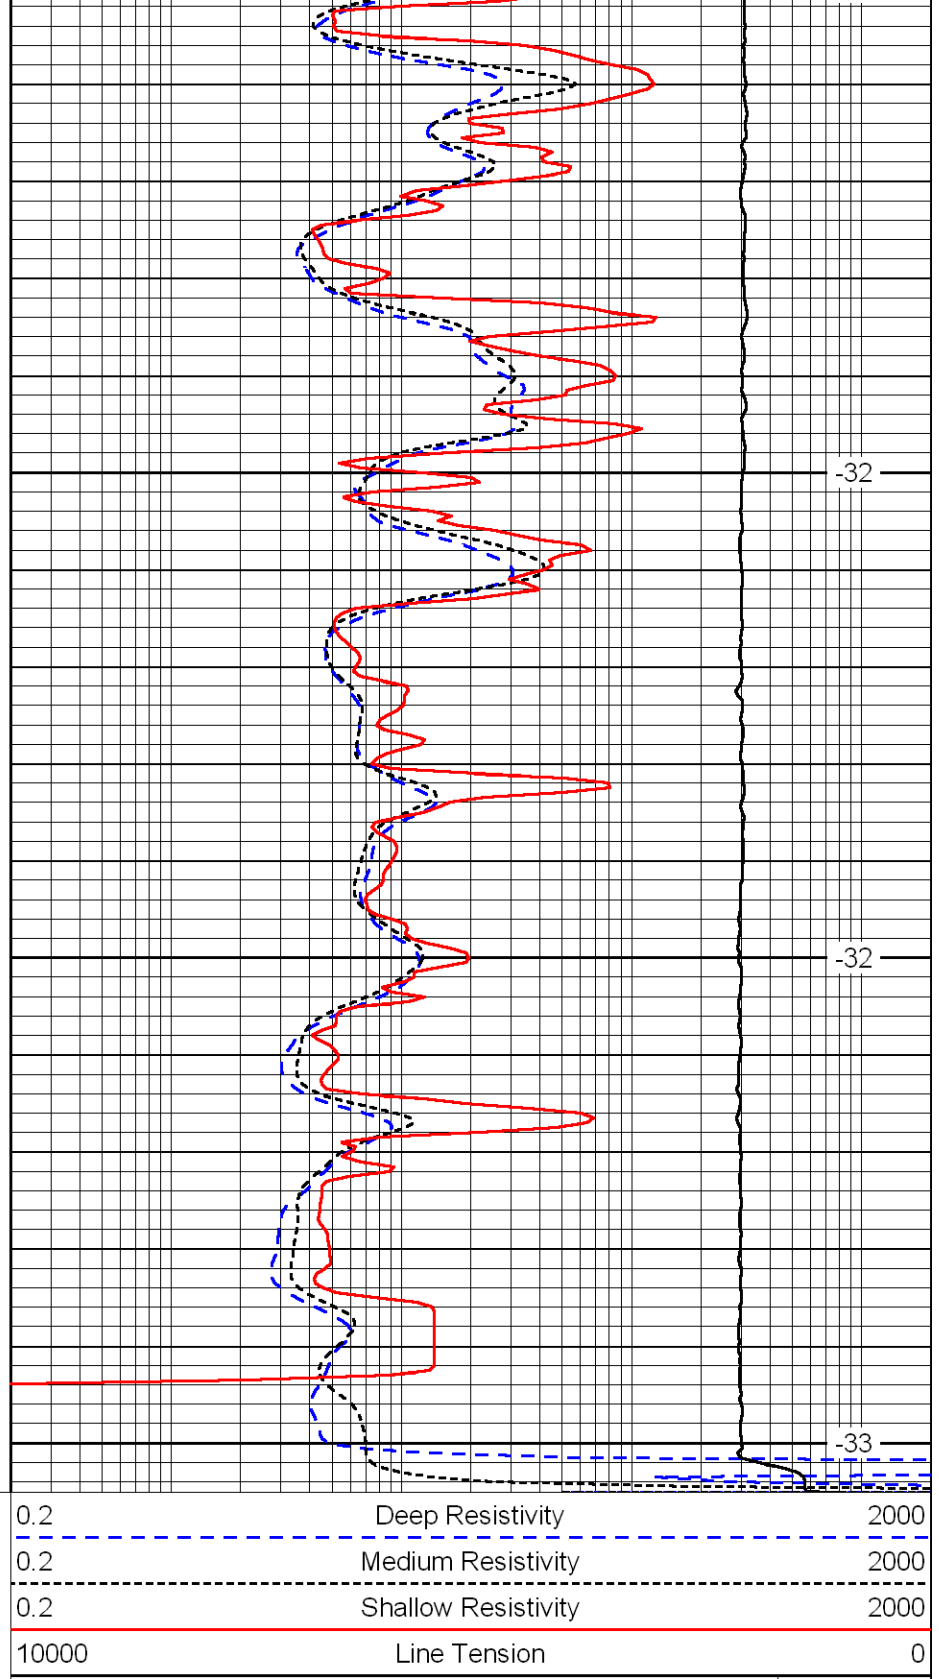

-32

-32

-33

LSPD