

DUAL INDUCTION LL3/GR LOG

Company	LAYNE ENERGY OPERATING, LLC	Company	LAYNE ENERGY OPERATING, LLC
Well	METZGER # 6Q-35	Well	METZGER # 6Q-35
Field		Field	
County	WILSON	County	WILSON
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-205-27921-0000	Other Services	CDL/SWN
	SW SE SE NW 2375' FNL & 2225' FWL		
Permanent Datum	GL	Elevation	914'
Log Measured From	GL		
Drilling Measured From	GL		
	SEC 35 TWP 30S RGE 14E		
Date	3-10-2011		
Run Number	ONE		
Depth Driller	1287'		
Depth Logger	1287'		
Bottom Logged Interval	1285'		
Top Log Interval	SURFACE		
Casing Driller	8.625" @ 41'		
Casing Logger	8.625" @ 41'		
Bit Size	6.75"		
Type Fluid in Hole	WATER		
Density / Viscosity			
pH / Fluid Loss			
Source of Sample			
Rm @ Meas. Temp			
Rmt @ Meas. Temp			
Rmc @ Meas. Temp			
Source of Rmt / Rmc			
Rm @ BHT			
Time Circulation Stopped			
Time Logger on Bottom			
Maximum Recorded Temperature			
Equipment Number	OW1		
Location	HOMINY, OK		
Recorded By	SHELDON TYLER	SPENCER TYLER	
Witnessed By	MR. TAYLOR		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


OW1-7744




2" DIL SECTION

Database File: ow1-7744 layne energy.db
Dataset Pathname: DIL/pass2.1
Presentation Format: dil2airn
Dataset Creation: Thu Mar 10 19:35:55 2011 by Calc Open-Cased 100827
Charted by: Depth in Feet scaled 1:600

0	GR (GAPI)	150	0	RLL3 (Ohm-m)	50
			0	RILM (Ohm-m)	50
			0	RILD (Ohm-m)	50
			1000	CILD (mmho/m)	0
			1000	CILM (mmho/m)	0

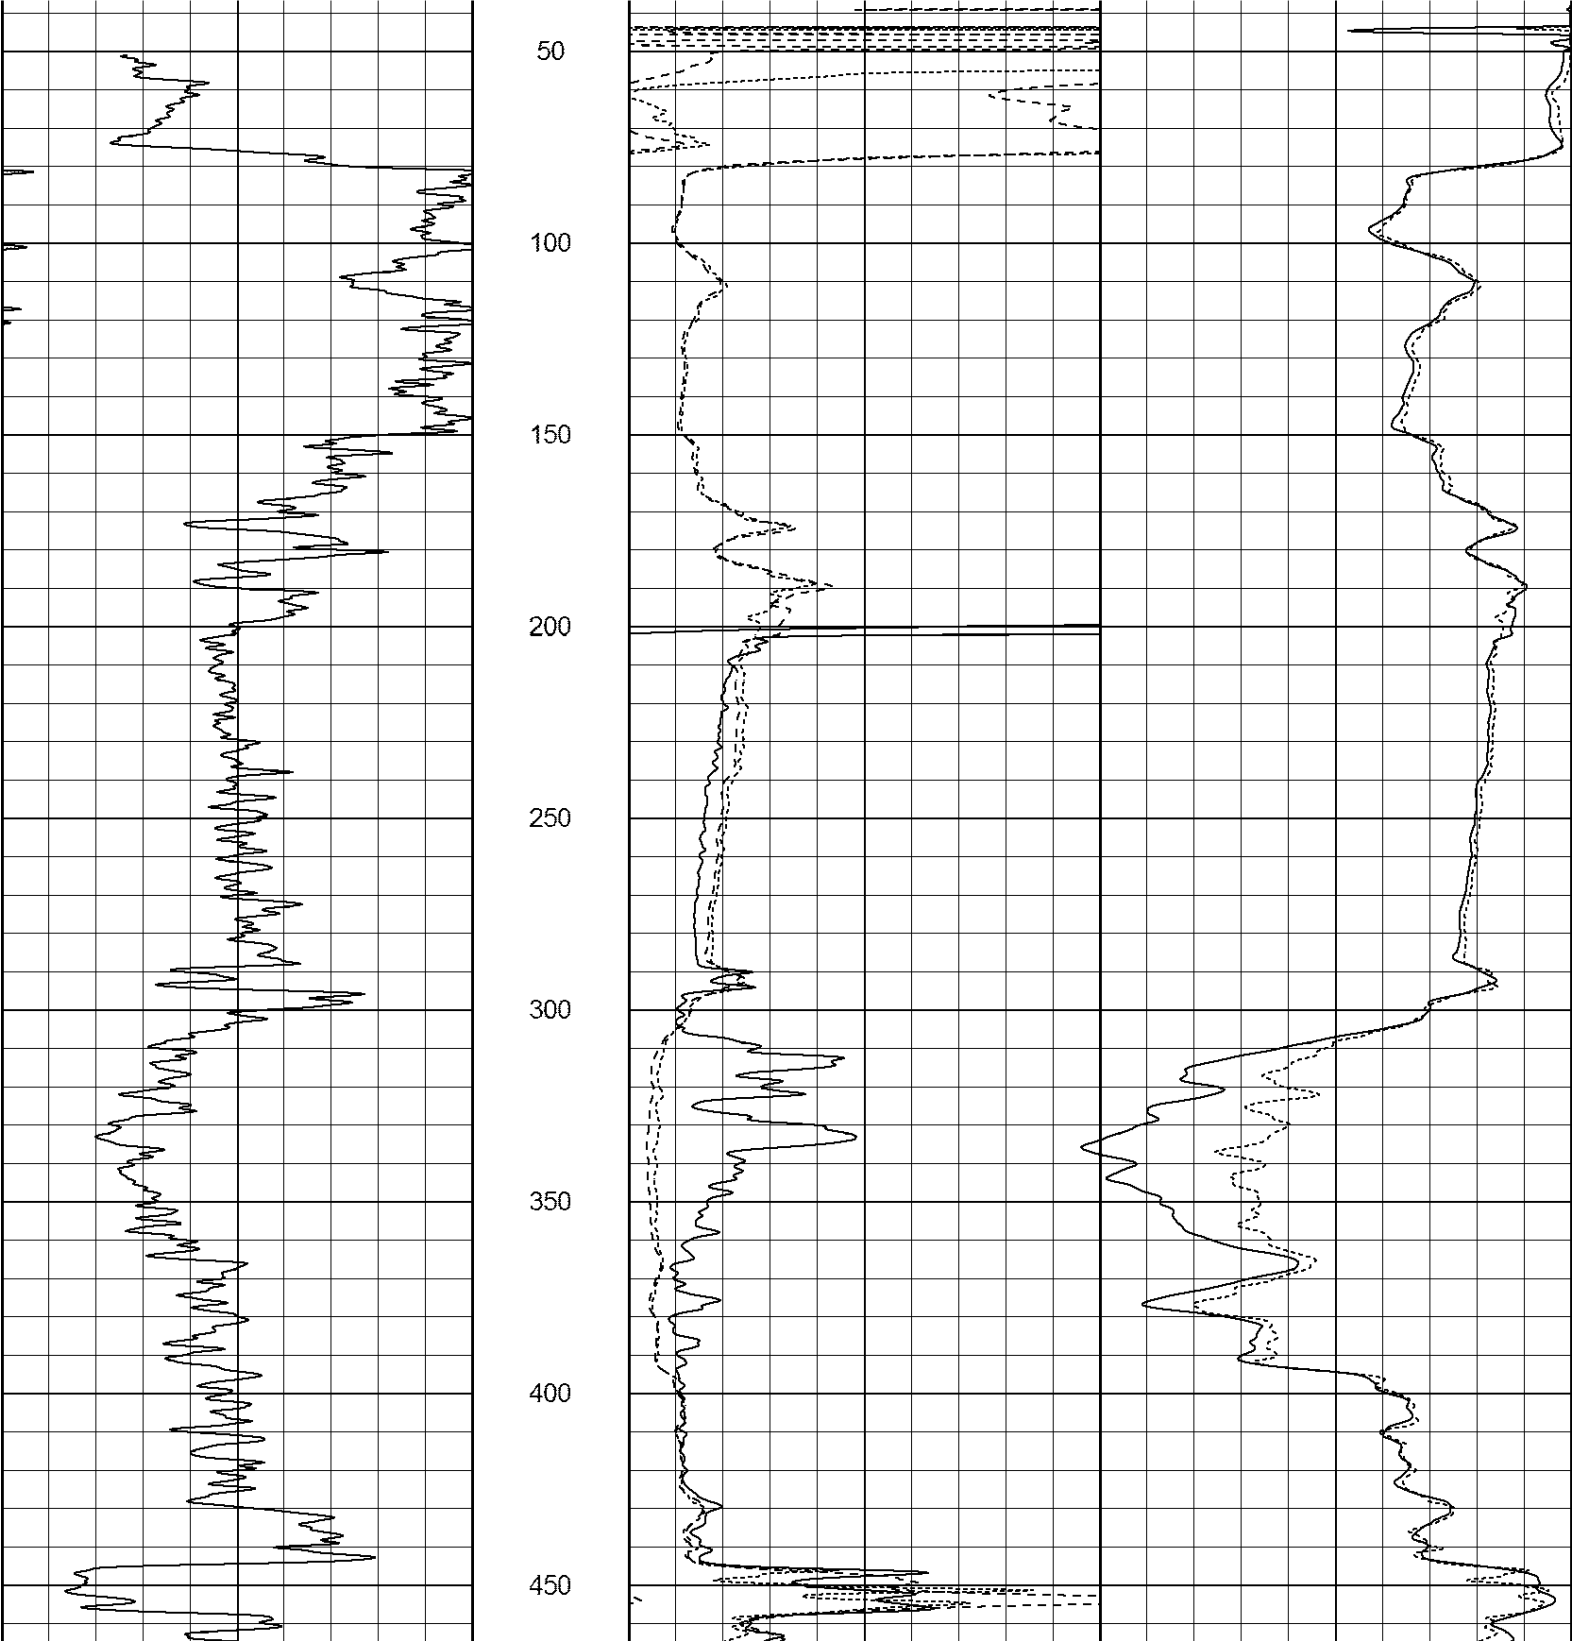

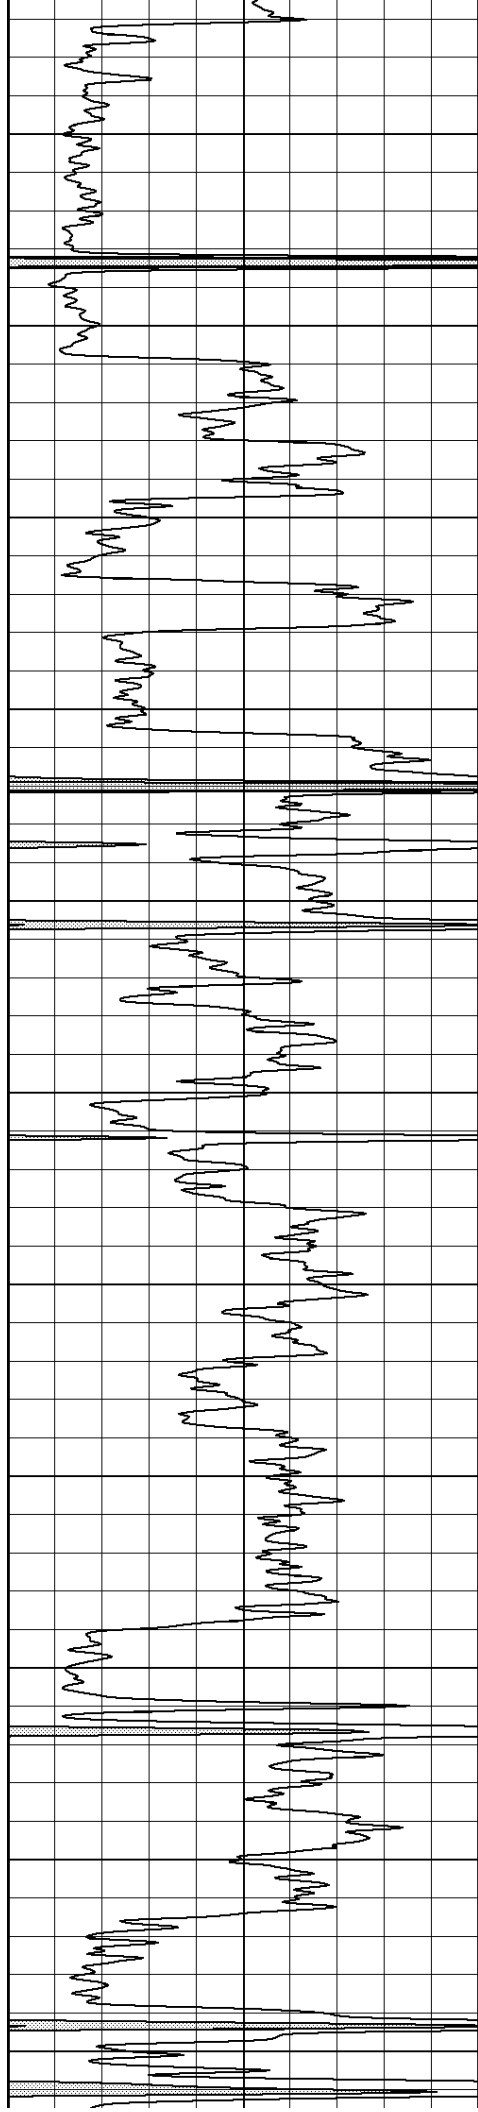

500

550

600

650

700

750



800


850

900


950

1000

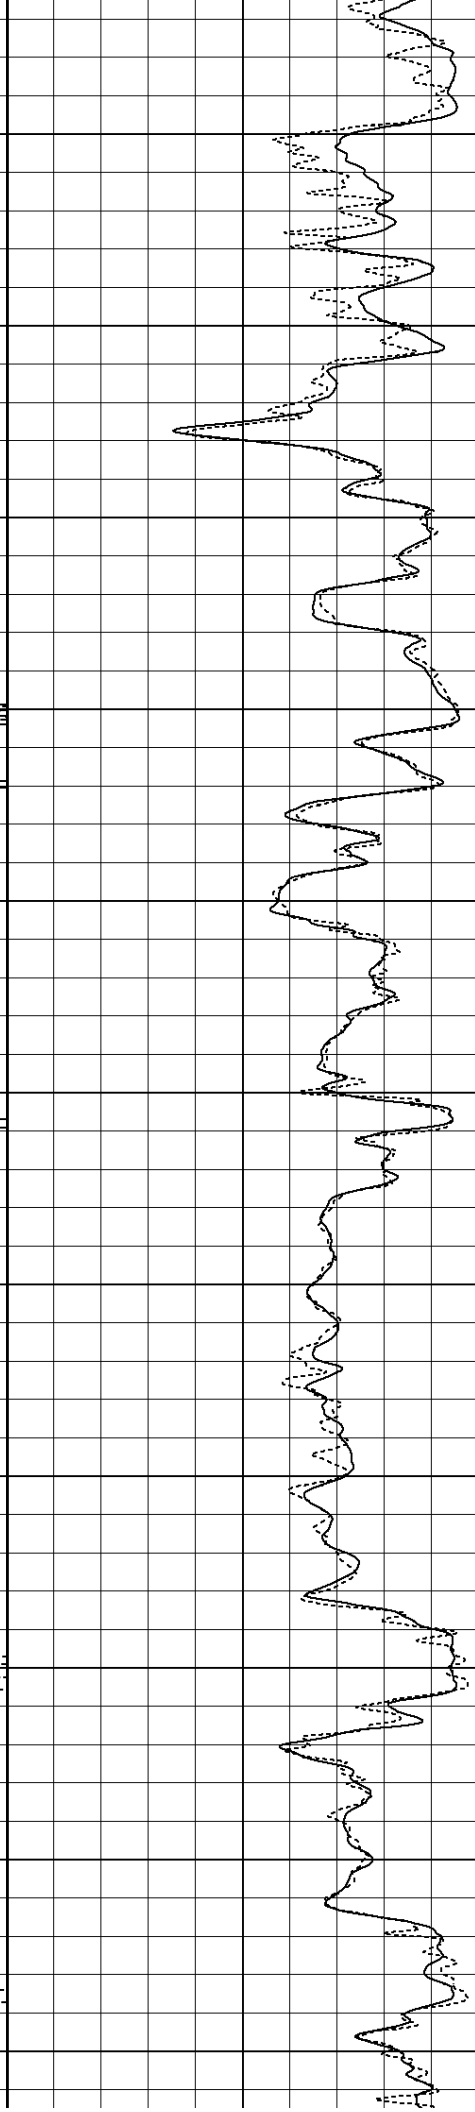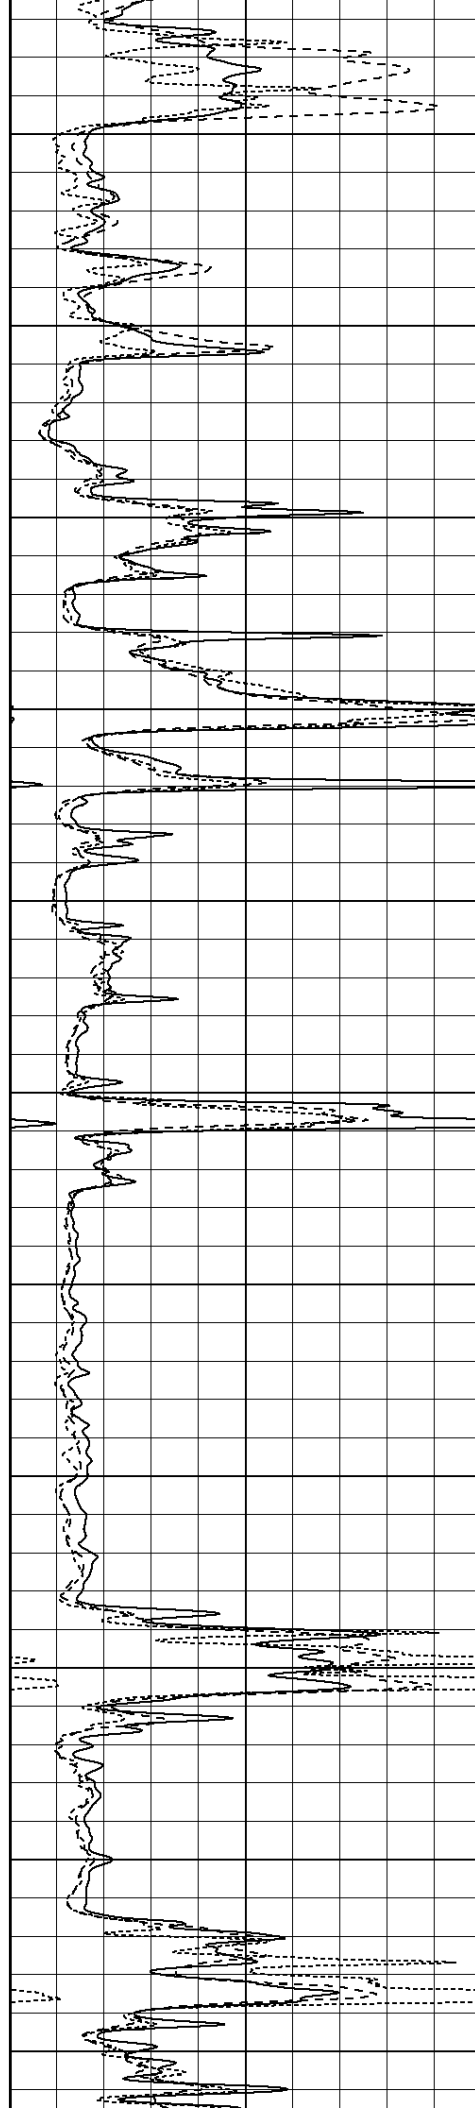

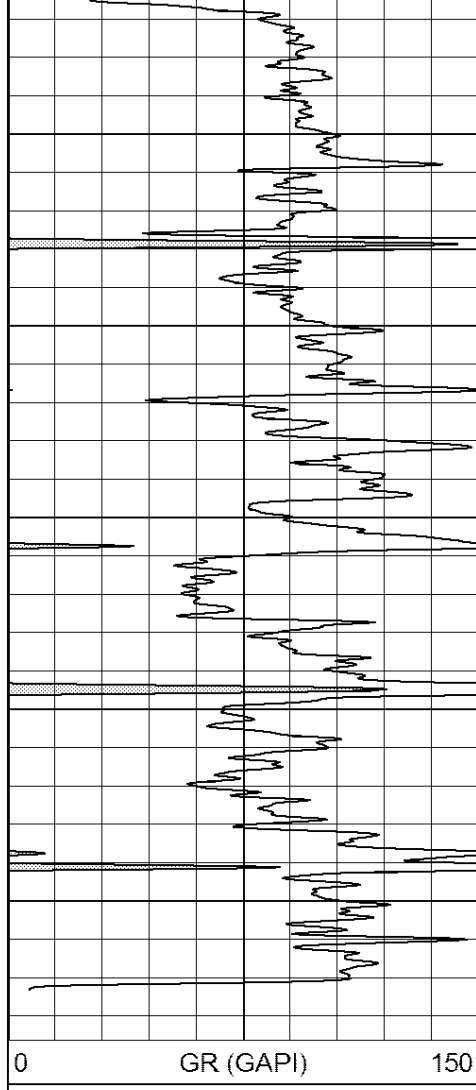

1050
1100
1150
1200
1250

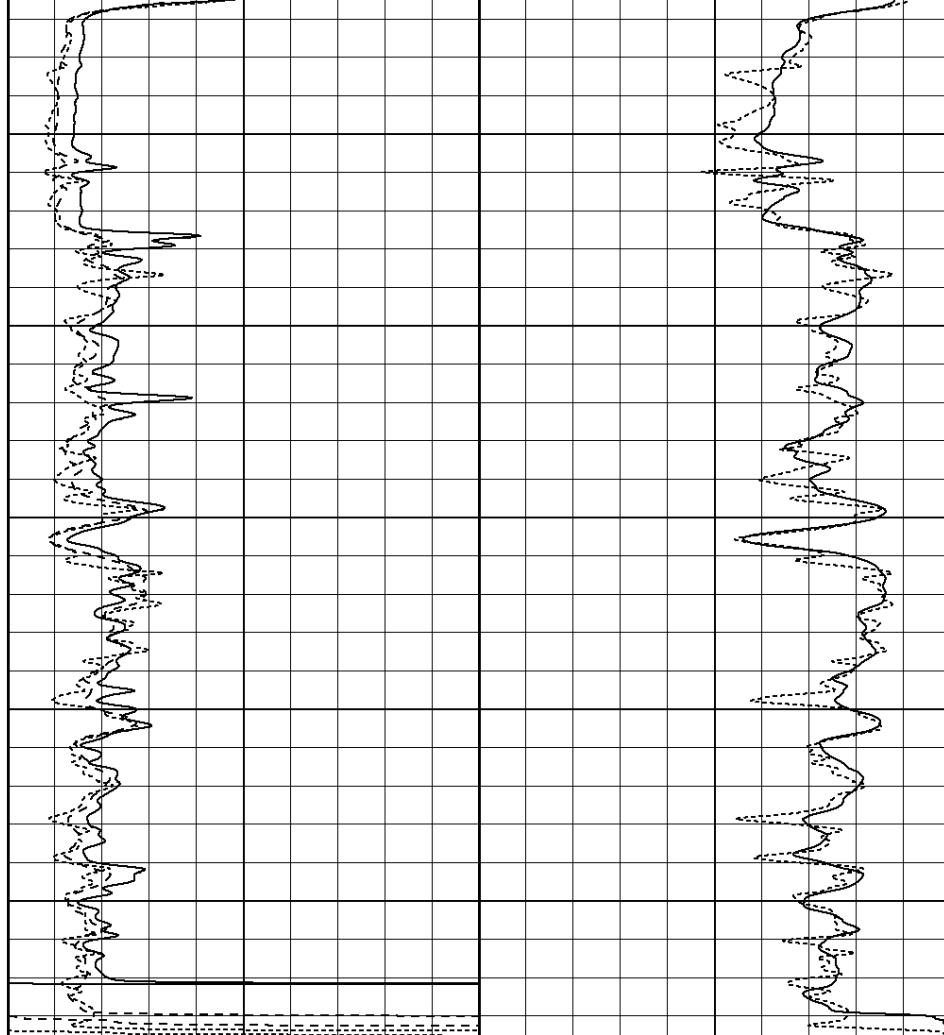

0	RLL3 (Ohm-m)	50
0	RILM (Ohm-m)	50
0	RILD (Ohm-m)	50
1000	CILD (mmho/m)	0
1000	CILM (mmho/m)	0




5" DIL SECTION


Database File: ow1-7744 layne energy.db
 Dataset Pathname: DIL/pass2.2
 Presentation Format: dil5air
 Dataset Creation: Thu Mar 10 19:36:15 2011 by Calc Open-Cased 100827
 Charted by: Depth in Feet scaled 1:240


0 GR (GAPI) 150

0.2	RLL3 (Ohm-m)	2000
0.2	RILD (Ohm-m)	2000
0.2	RILM (Ohm-m)	2000

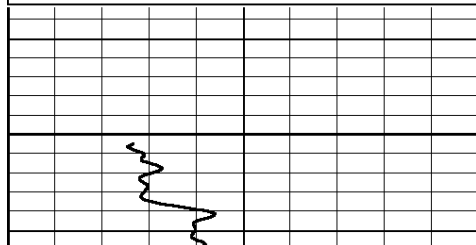

50

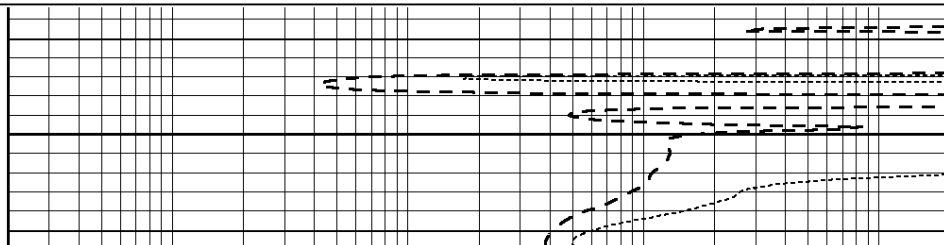

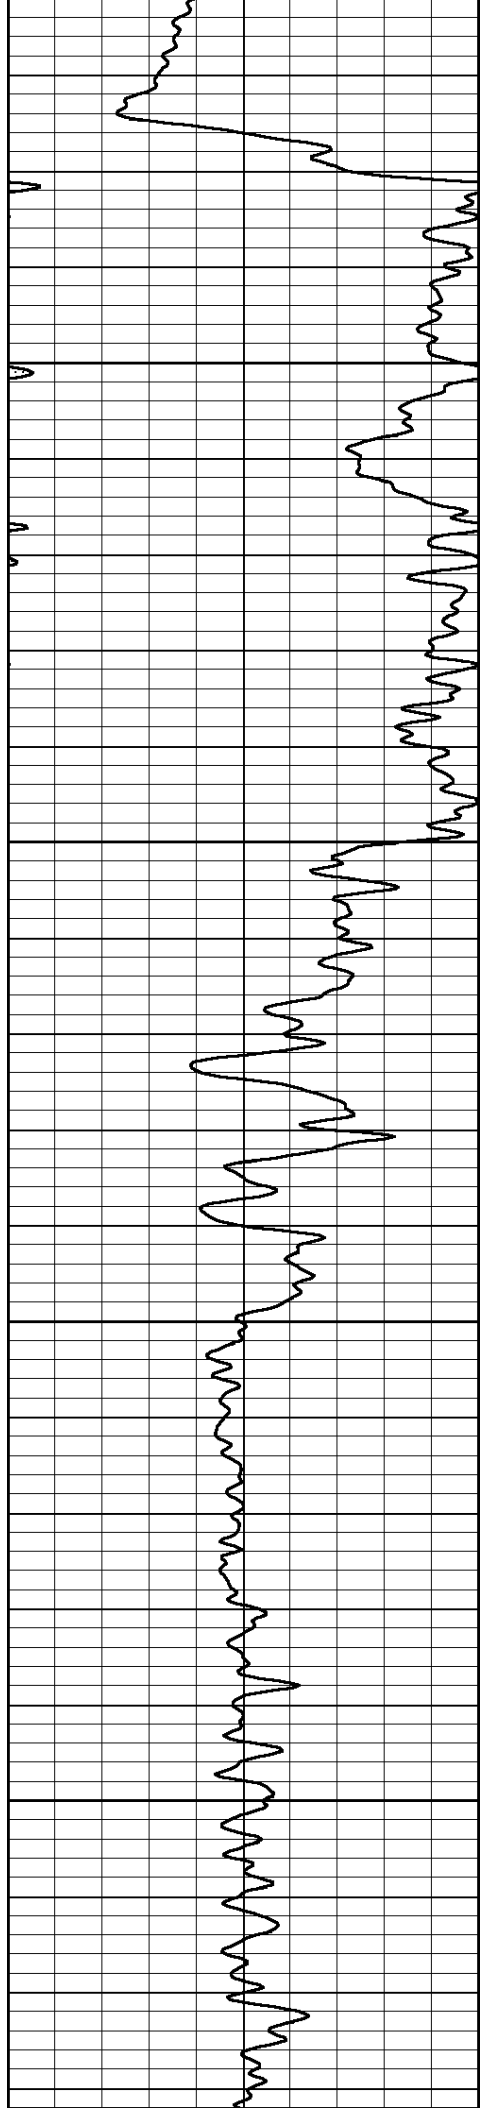



100

150

200

250

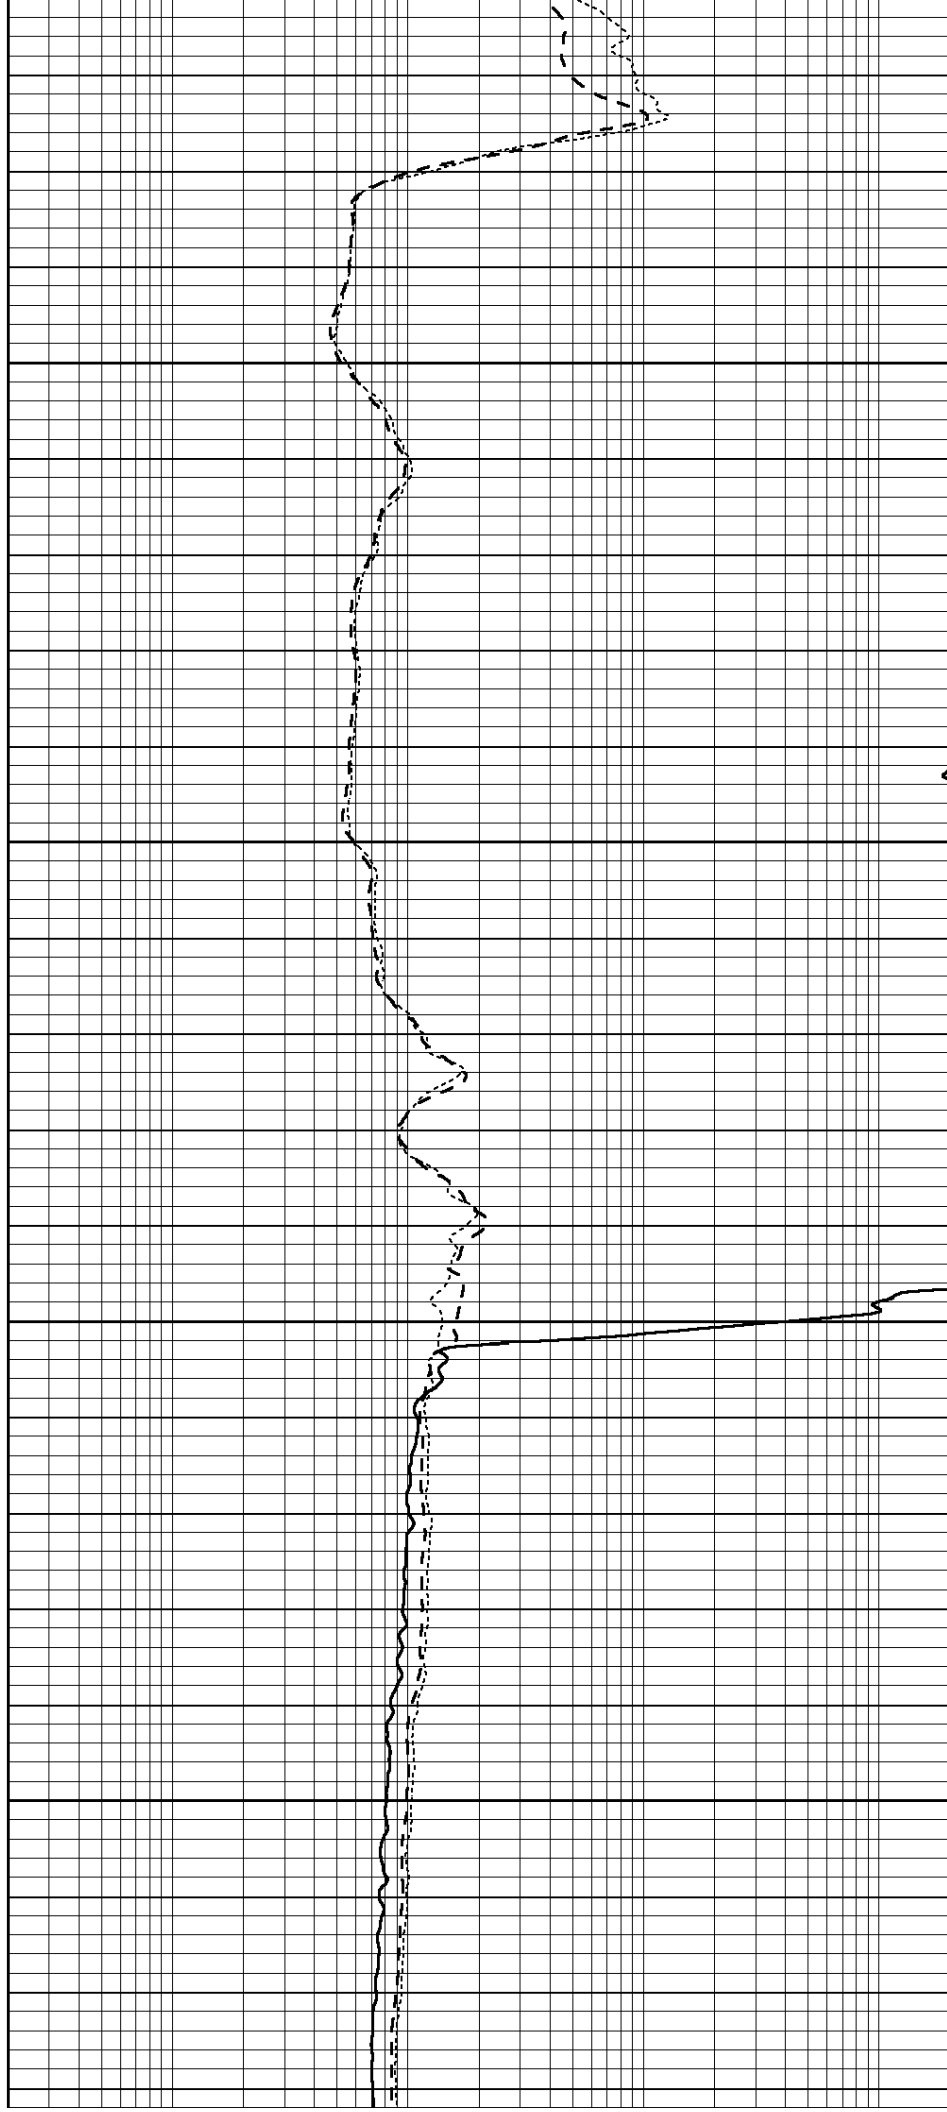

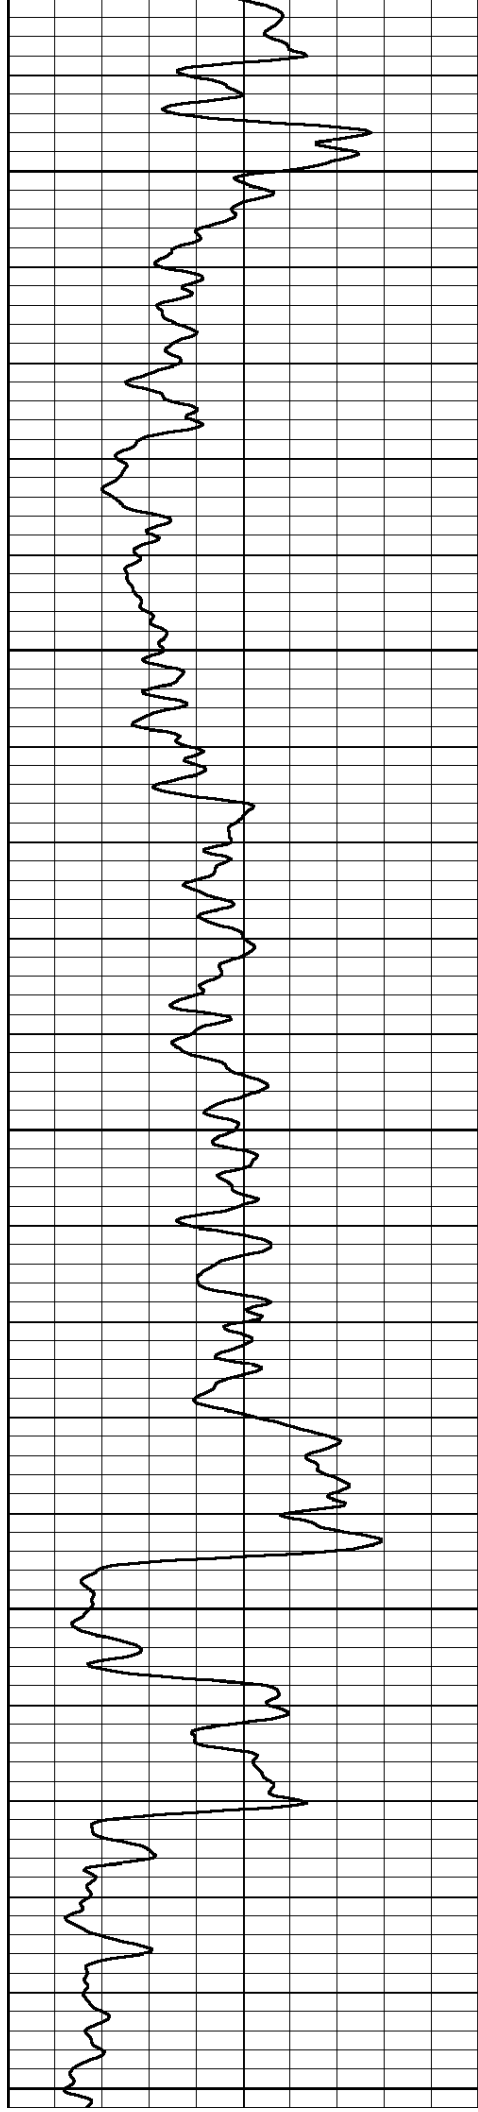


300


350

400

450

500

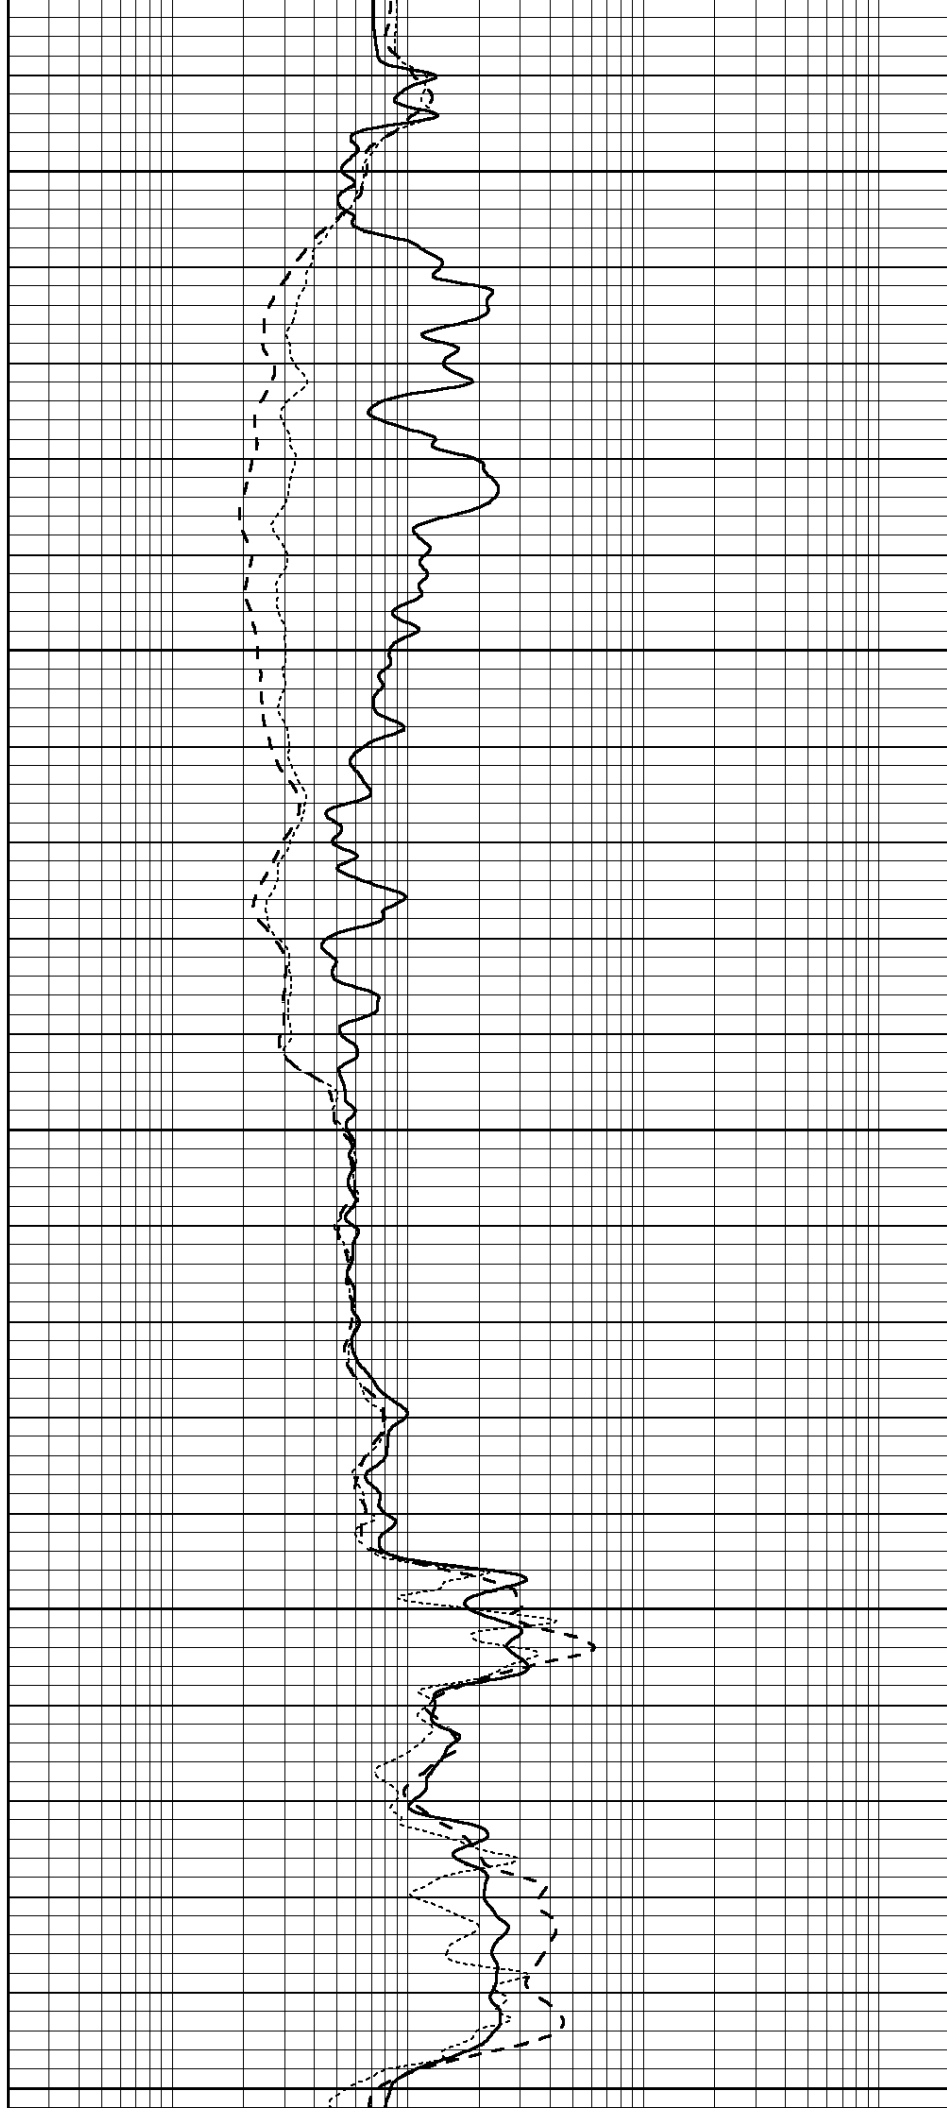

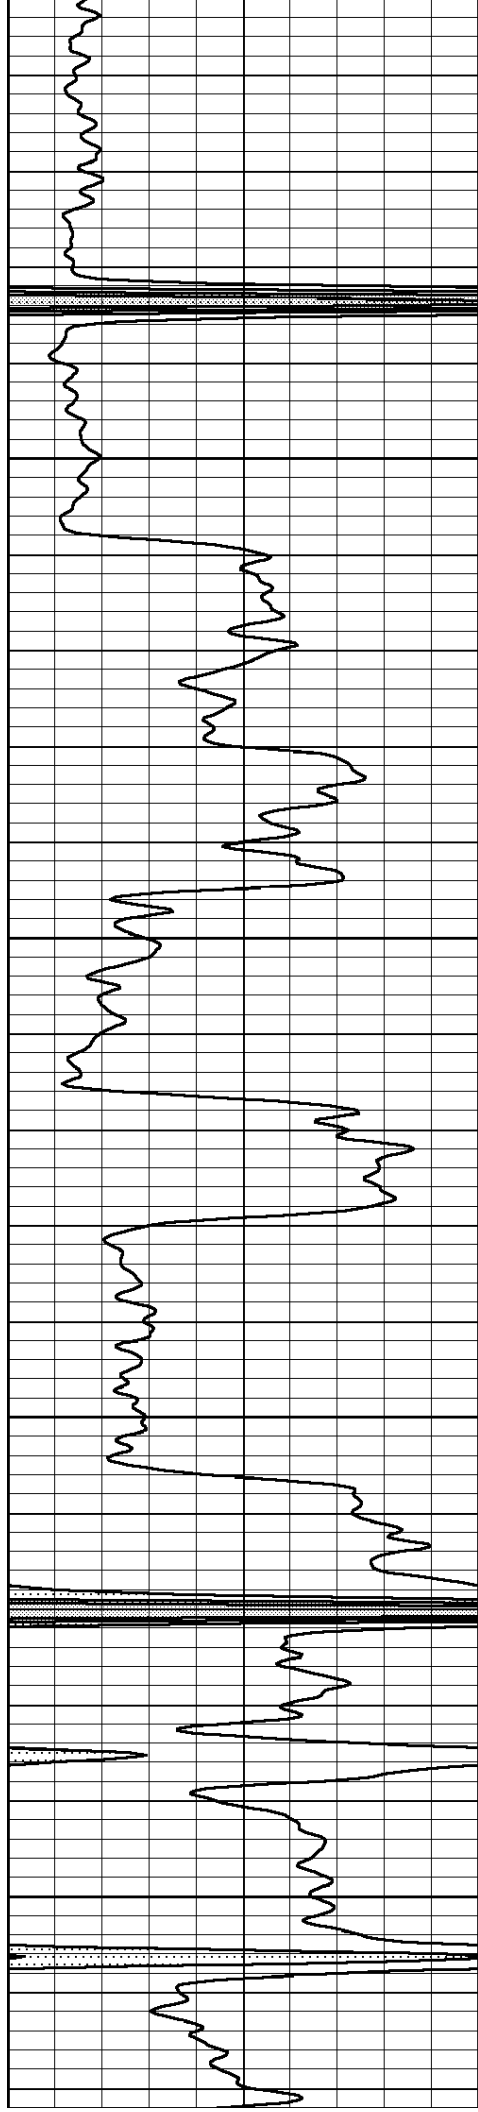



550

600

650

700

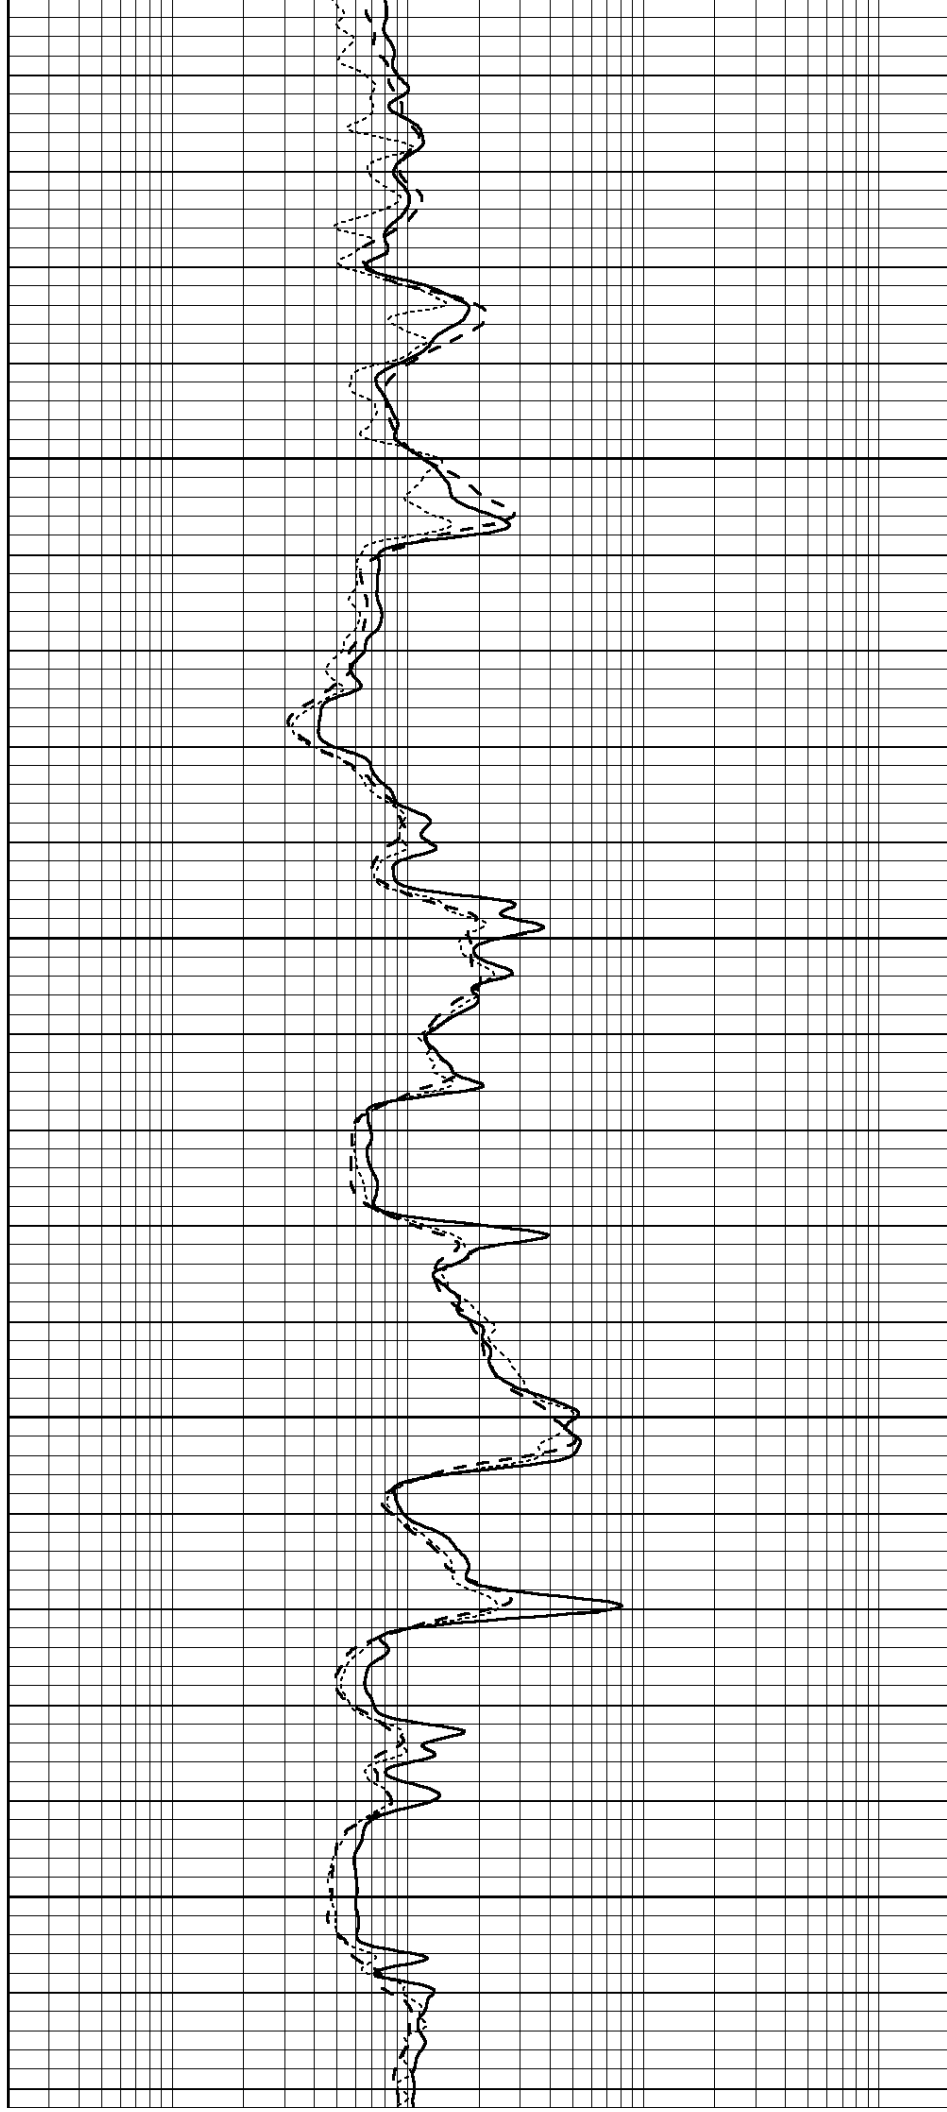

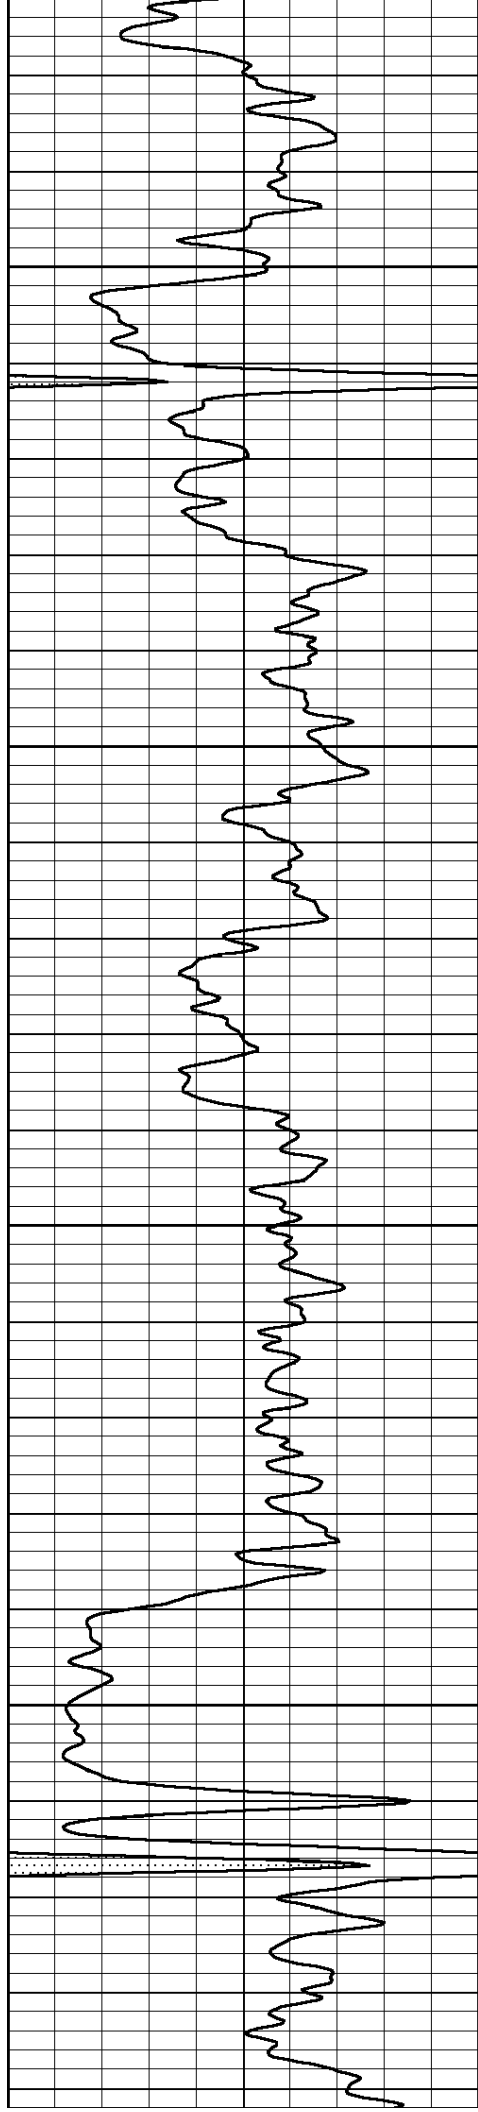



750

800

850

900

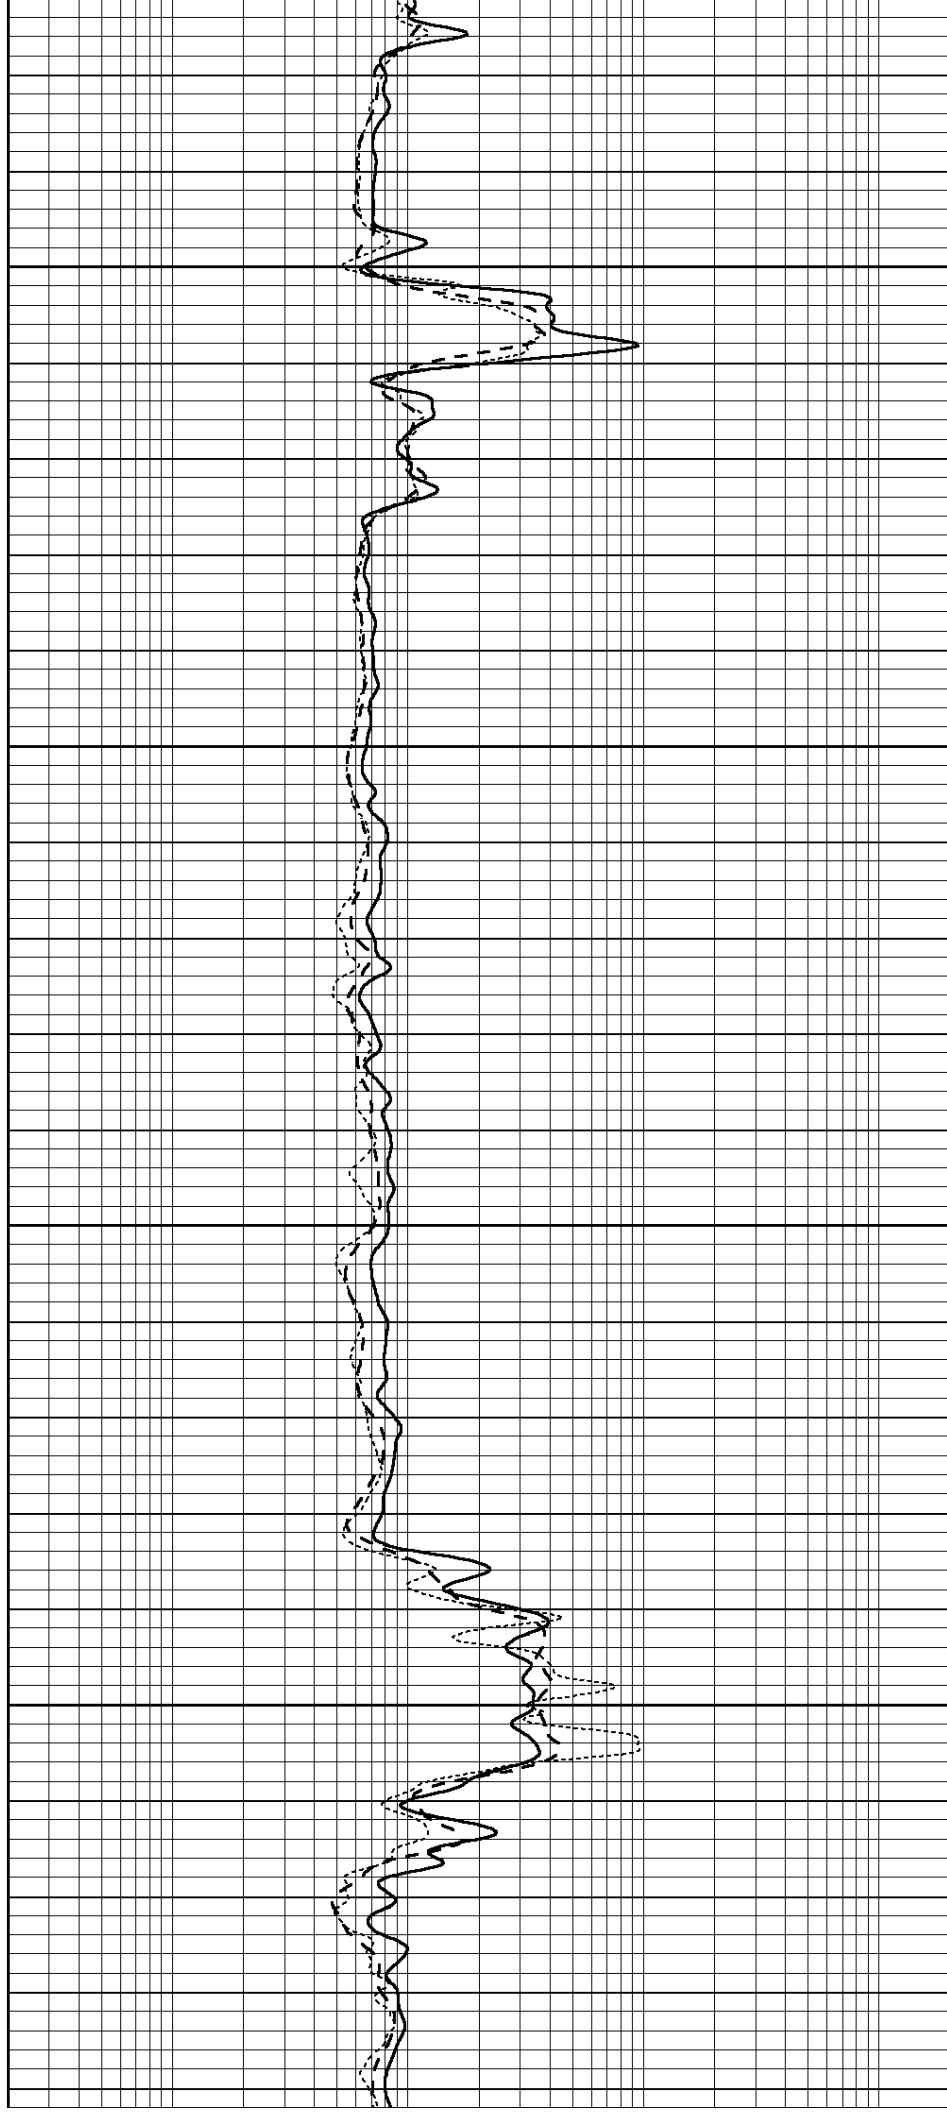

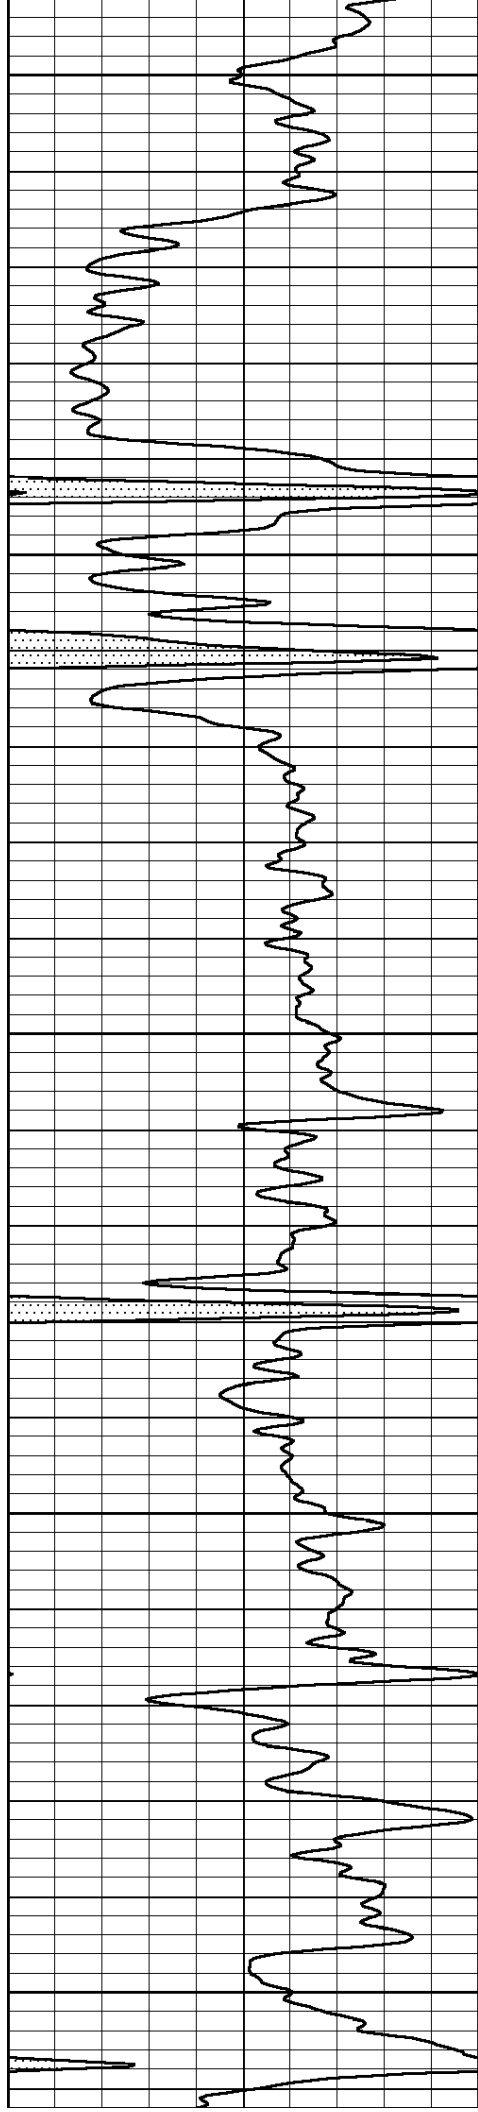


950


1000


1050

1100

1150

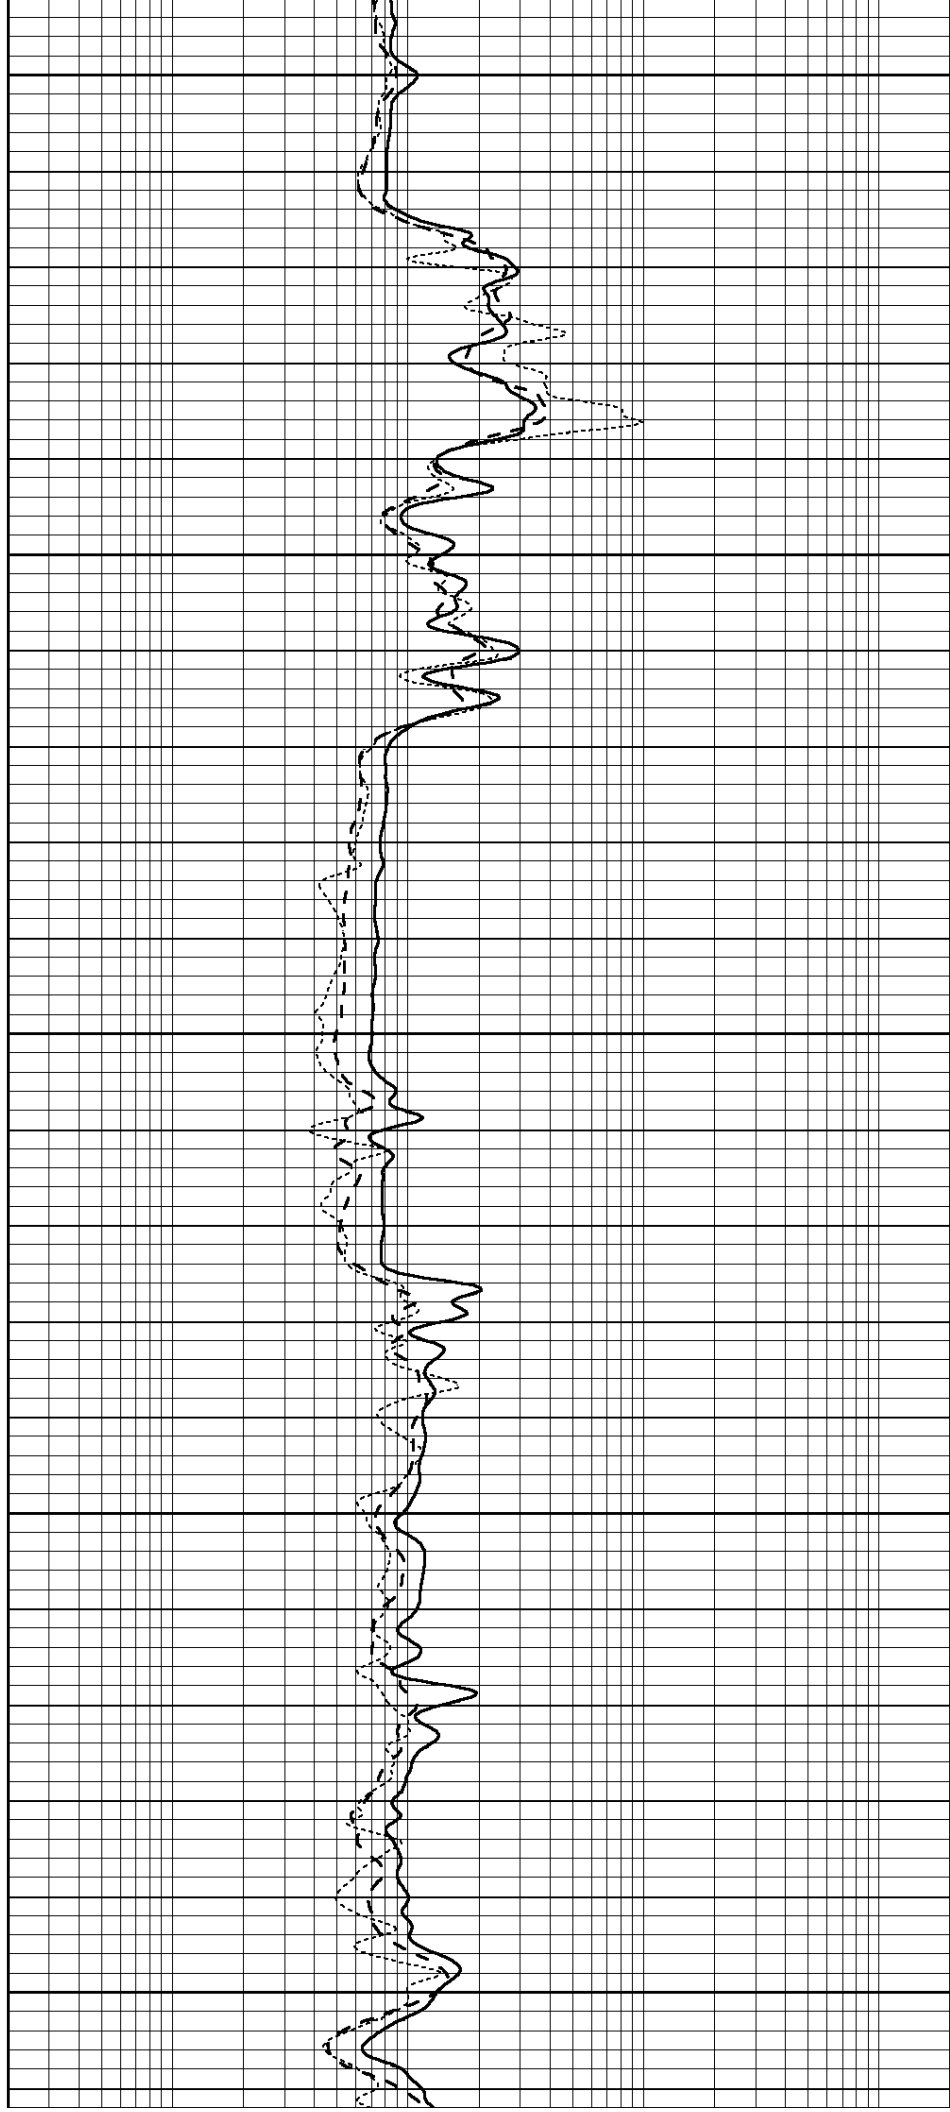

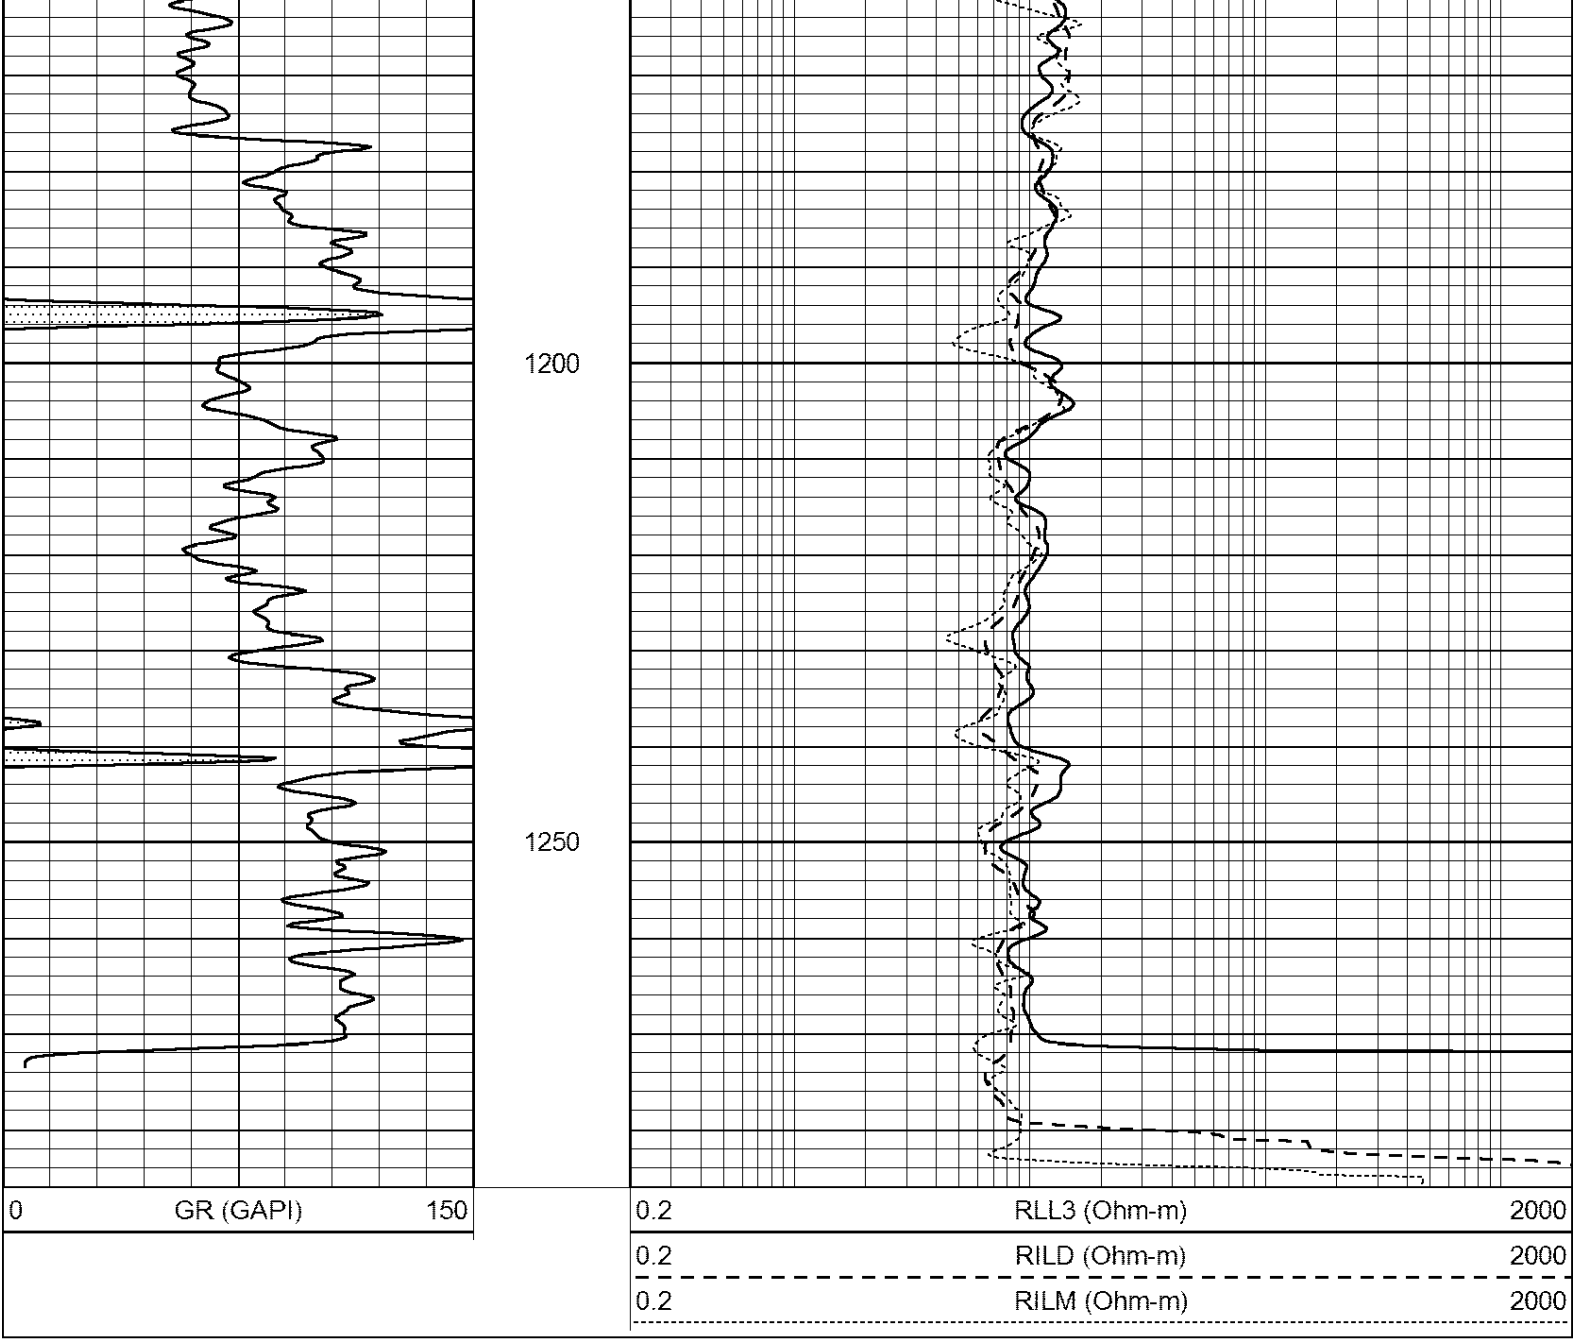

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
CLL3	14.83		CLL3 (Ohm-m)	14.83	0.50	210.00

CILD	6.48		DIL-LANDY (LAN-1543)	17.67	3.50	210.00
CILM	2.83					
SP	0.83					
Dataset: ow1-7744 layne energy.db: field/well/DIL/pass2.2 Total Length: 17.67 ft Total Weight: 210.00 lb O.D.: 3.50 in						