



DIGITAL LOG (785) 625-3858

Dual Induction Log

API No.	15-191-22592-00-00
Company	McCoy Petroleum Corporation
Well	Erskine 'A' #4-32
Field	Erskine North
County	Sumner
State	Kansas
Location	250' S of NE NW SE 2060' FSL / 1650' FEL
Sec: 32	Twp: 31S Rge: 3W
Other Services	CNL / CDL MEL
Elevation	1270
K.B.	1270
D.F.	
G.L.	1261

Permanent Datum	Ground Level	4/6/2011	
Log Measured From	Kelly Bushing	One	
Drilling Measured From	Kelly Bushing	4010	
		4013	
		4012	
		250	
		8.625 @ 266	
		264	
		7.875	
		Chemical	
		5000	
		9.2	44
		9.0	10.8
		Flowline	
		0.90 @ 75	
		0.68 @ 75	
		1.22 @ 75	
		Charts	
		0.62 @ 116	
		4 Hours	
		116	
		15	
		Hays	
		R. Barnhart	
		Robert Hendrix	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
 (785) 625-3858
 Conway Springs, KS:
 5S, 2W, 3/4S, 1/4E, N into

Database File: c:\warrior\data\mccoy_erskine a #4-32\mchd.db
 Dataset Pathname: dil/mcmain
 Presentation Format: dil2in
 Dataset Creation: Wed Apr 06 14:48:30 2011
 Charted by: Depth in Feet scaled 1:600



0	Gamma Ray	150
-200	SP (mV)	0



0	Shallow Resistivity	50
0	Deep Resistivity	50



LSPD




1000	Conductivity	0
15000	Line Tension	0




50	Shallow Resistivity	500
50	Deep Resistivity	500

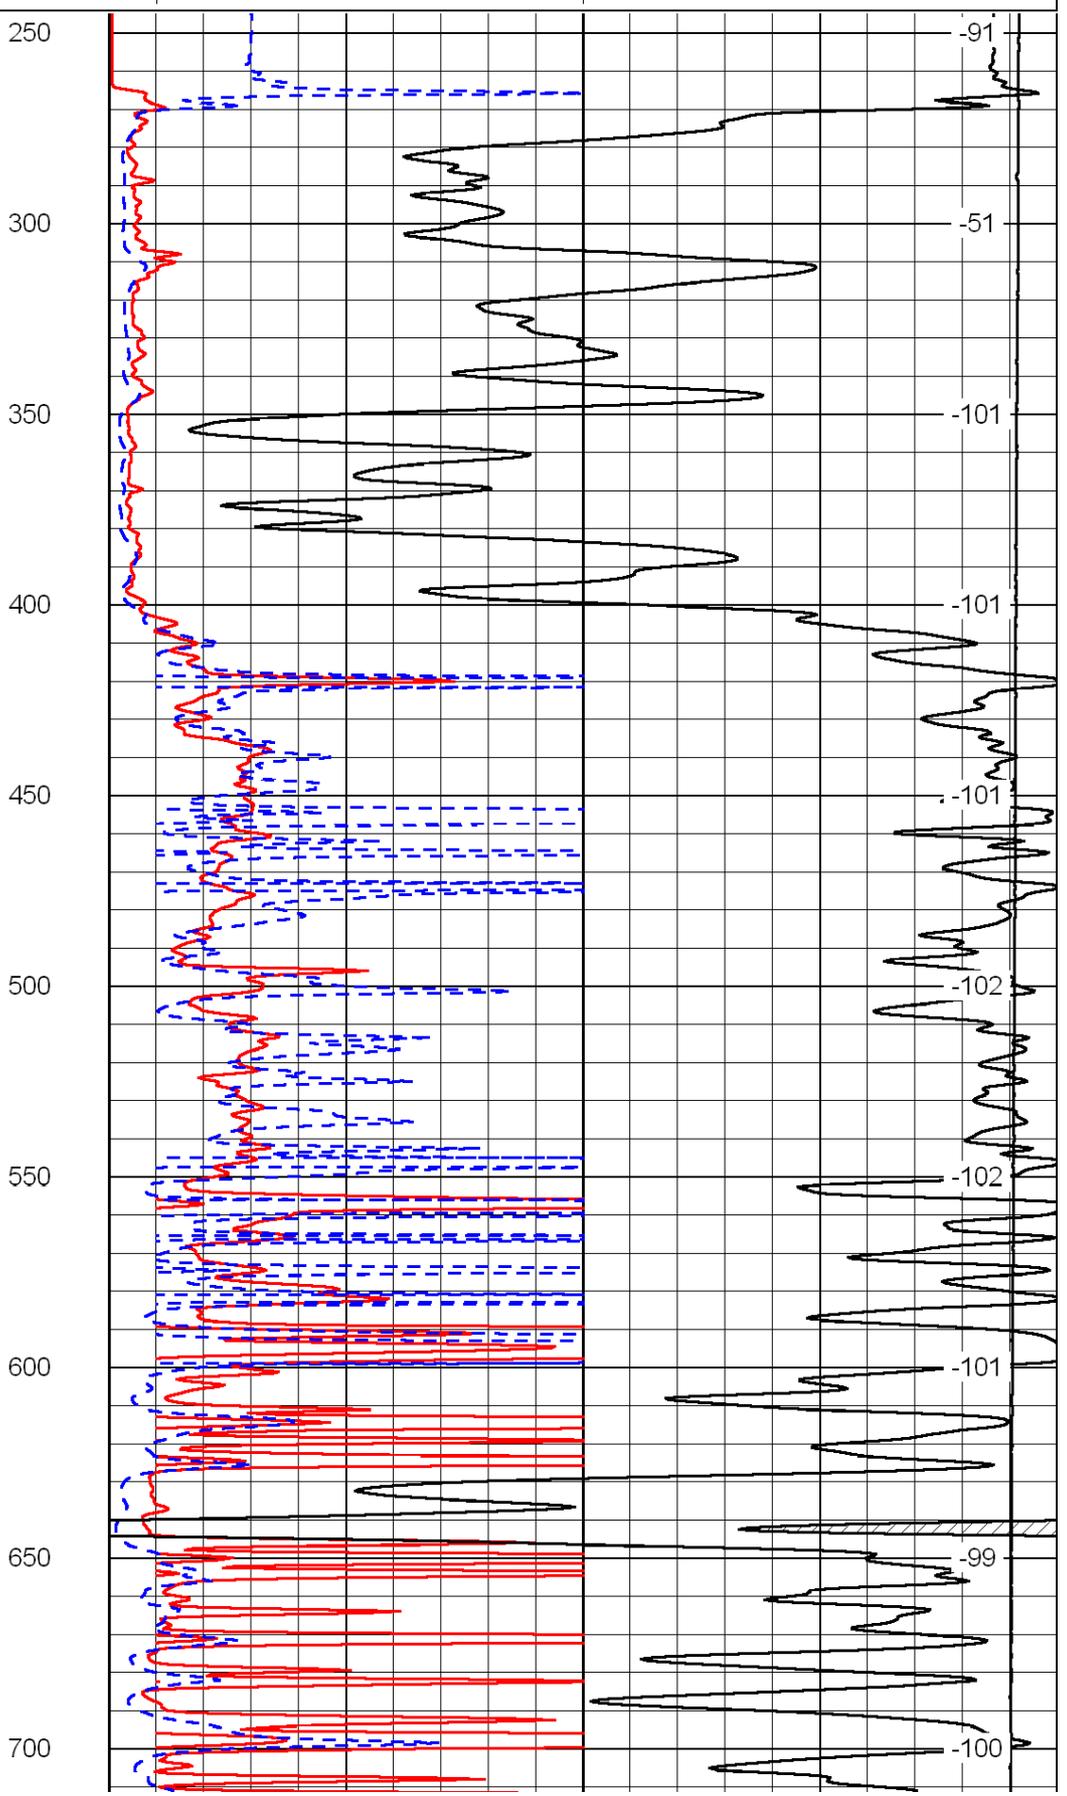
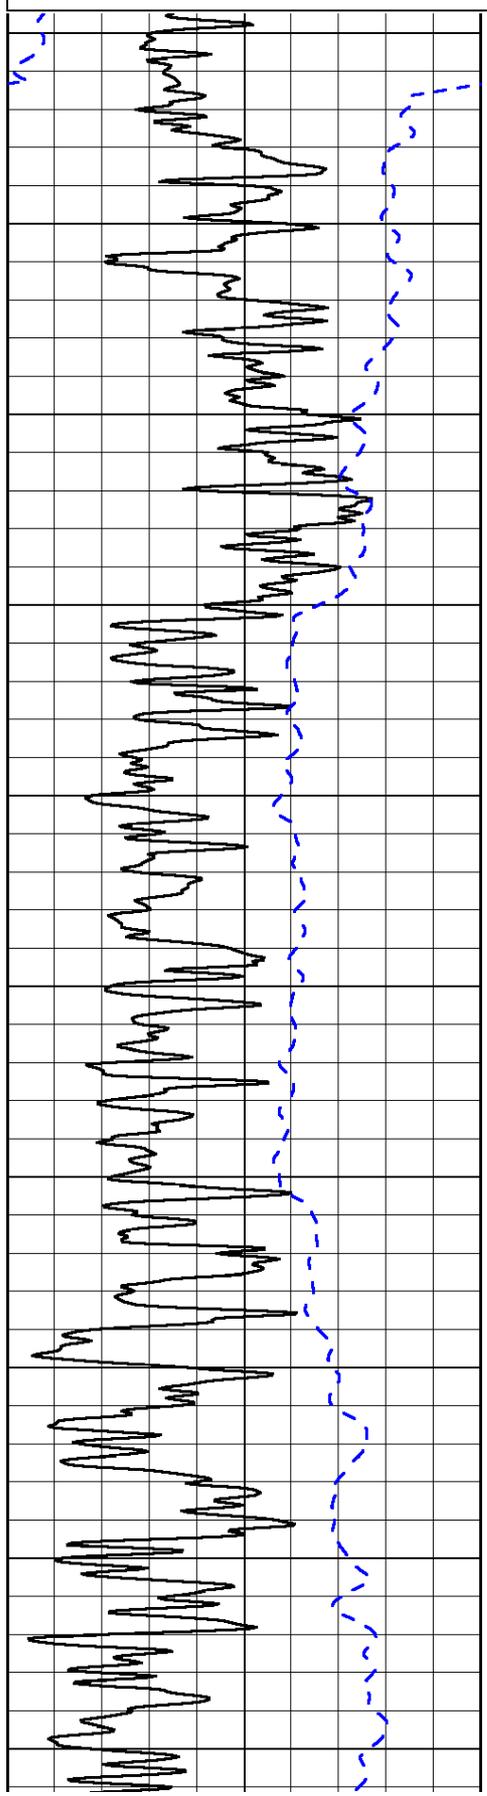



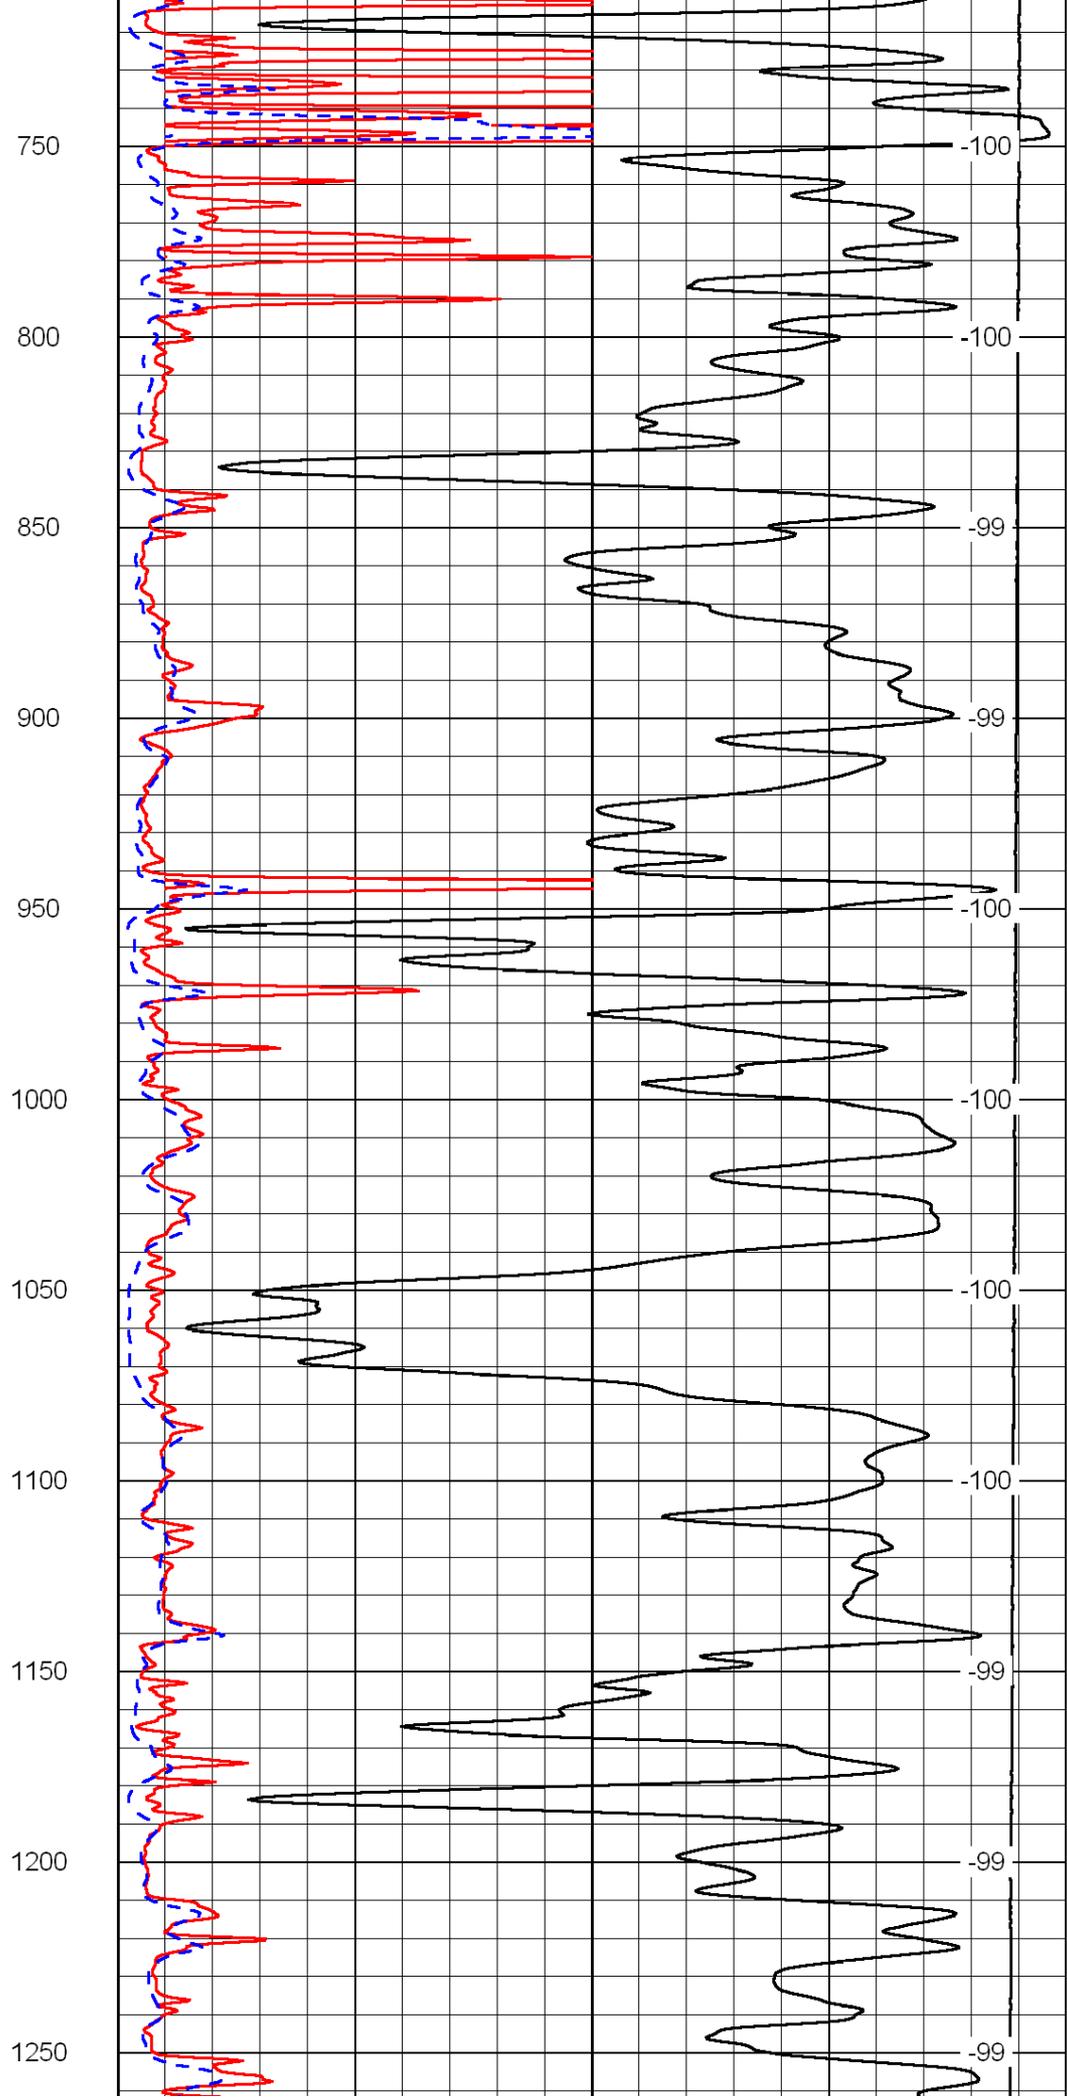
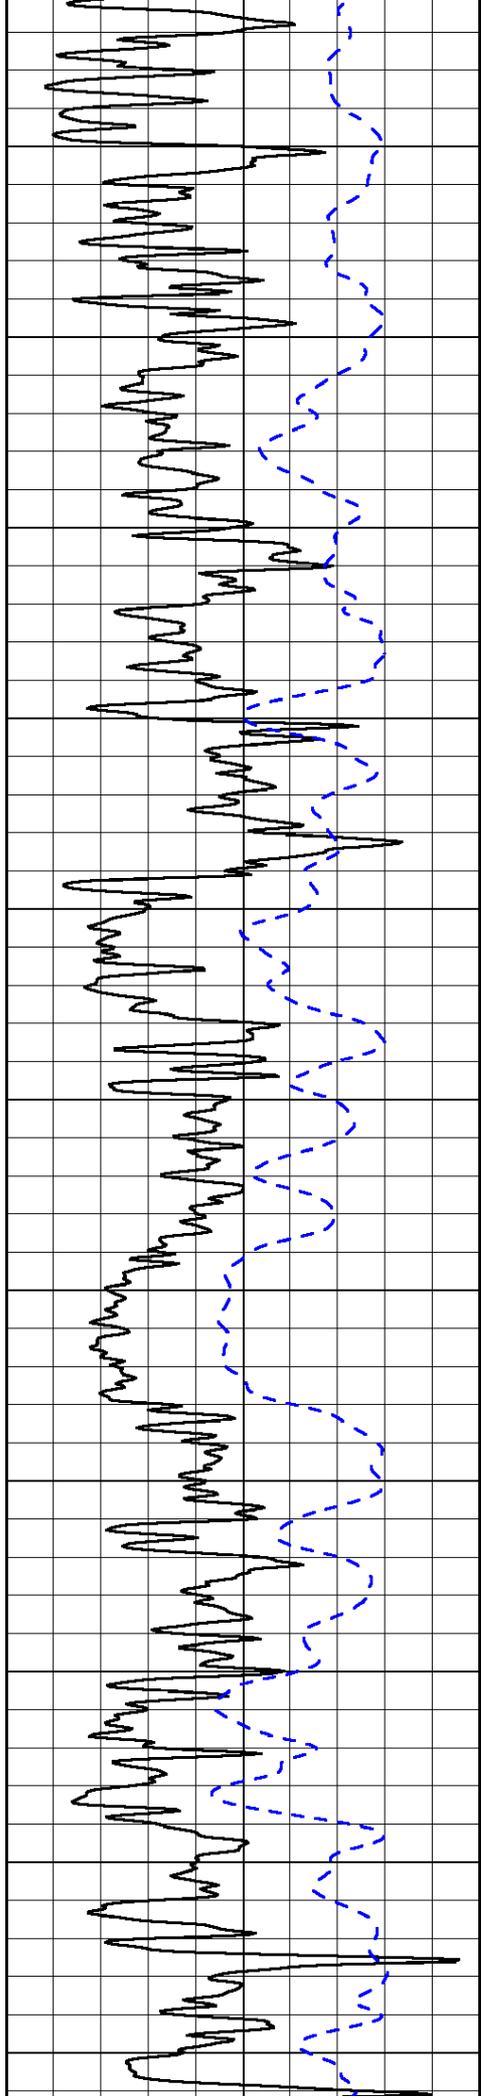


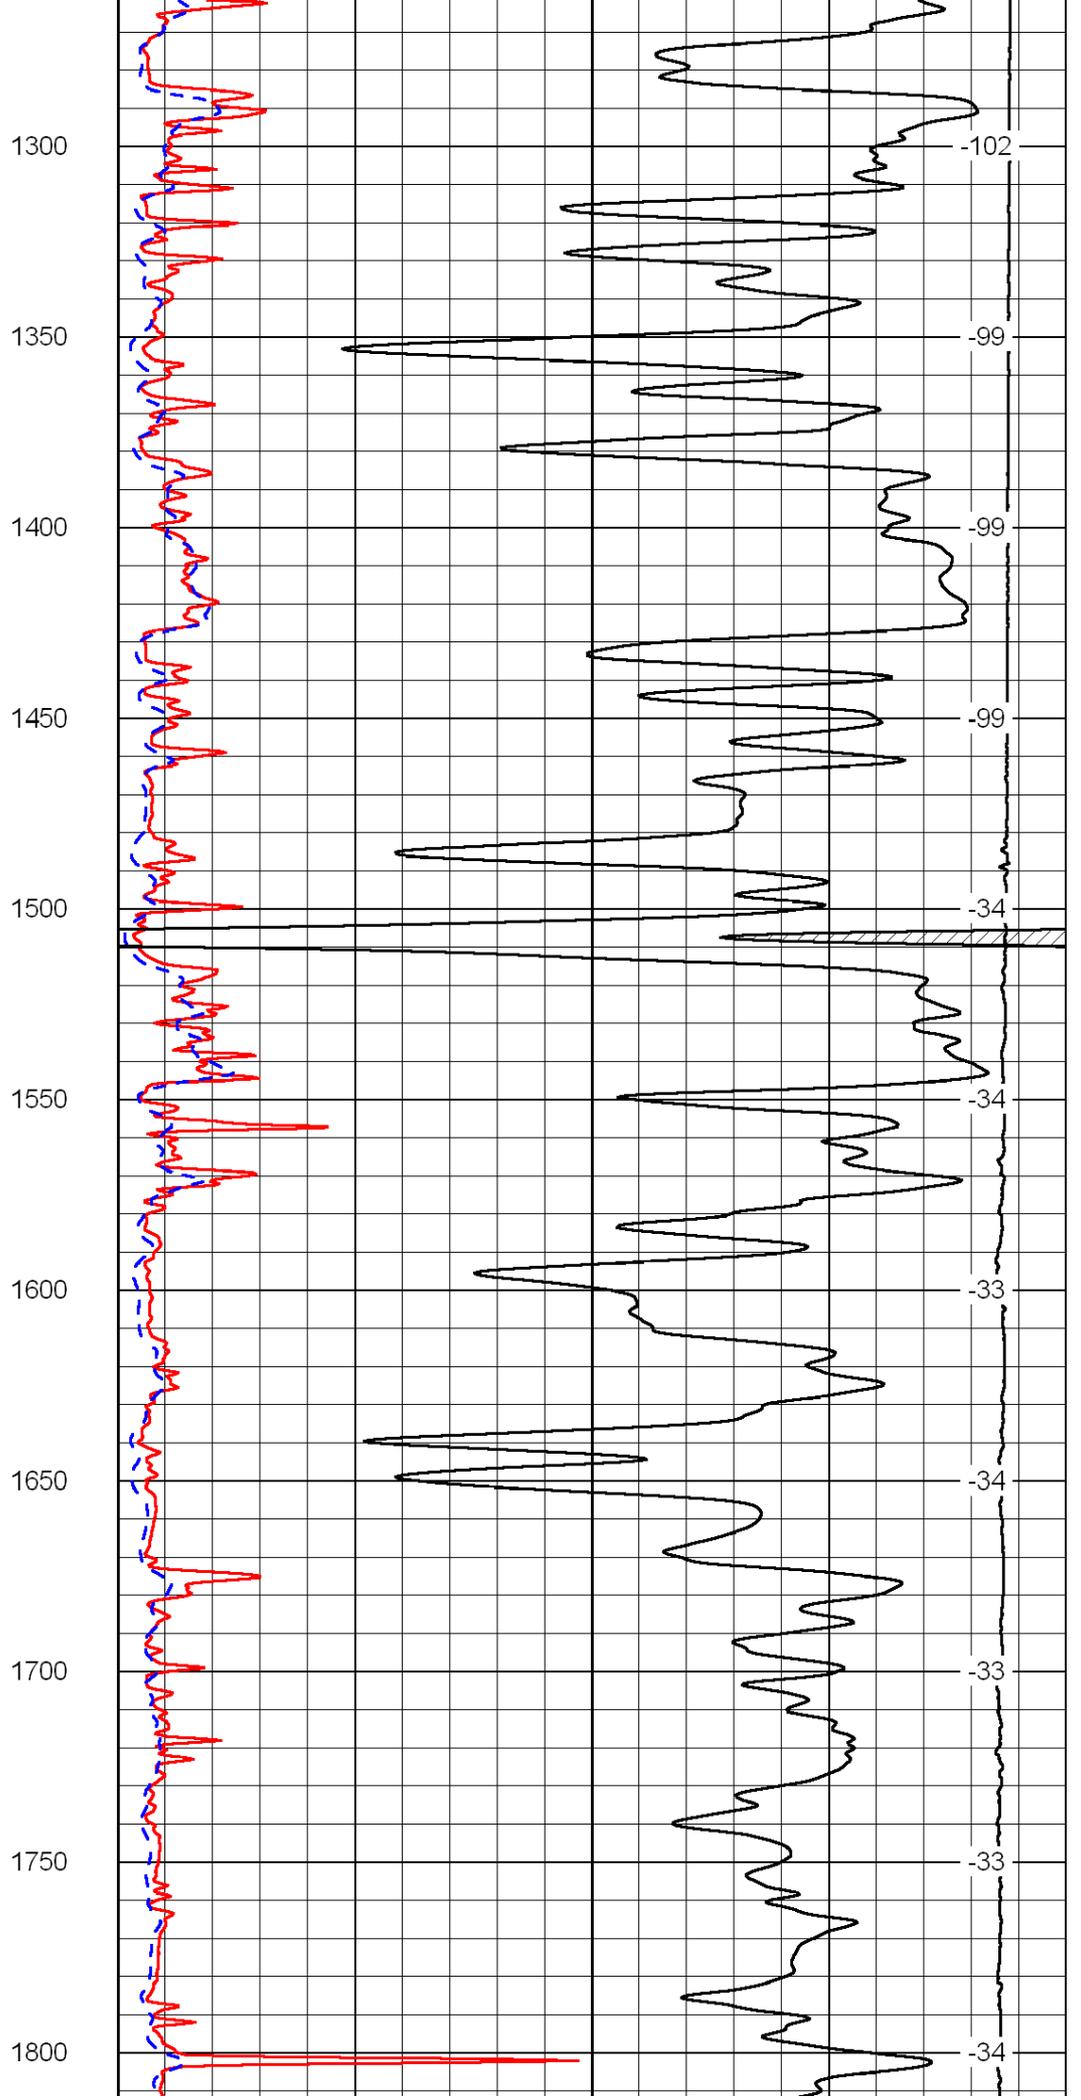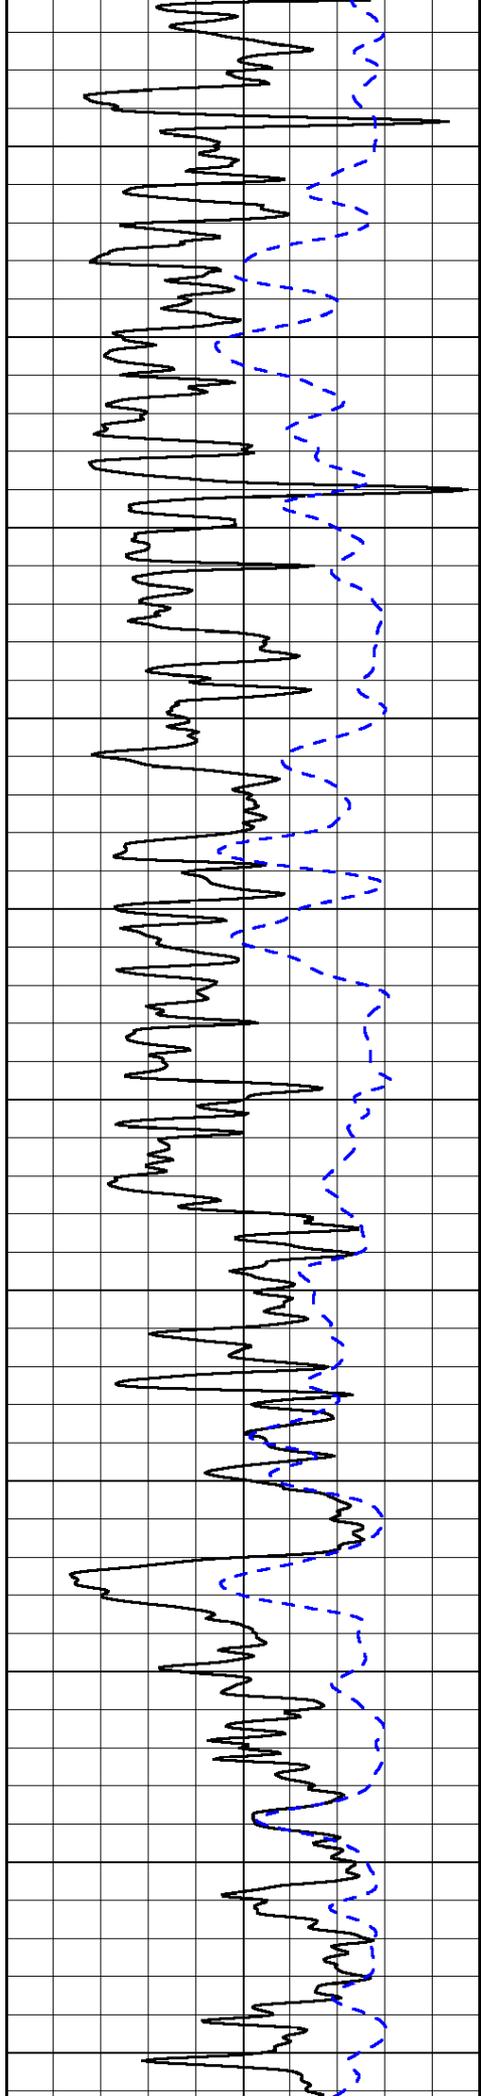


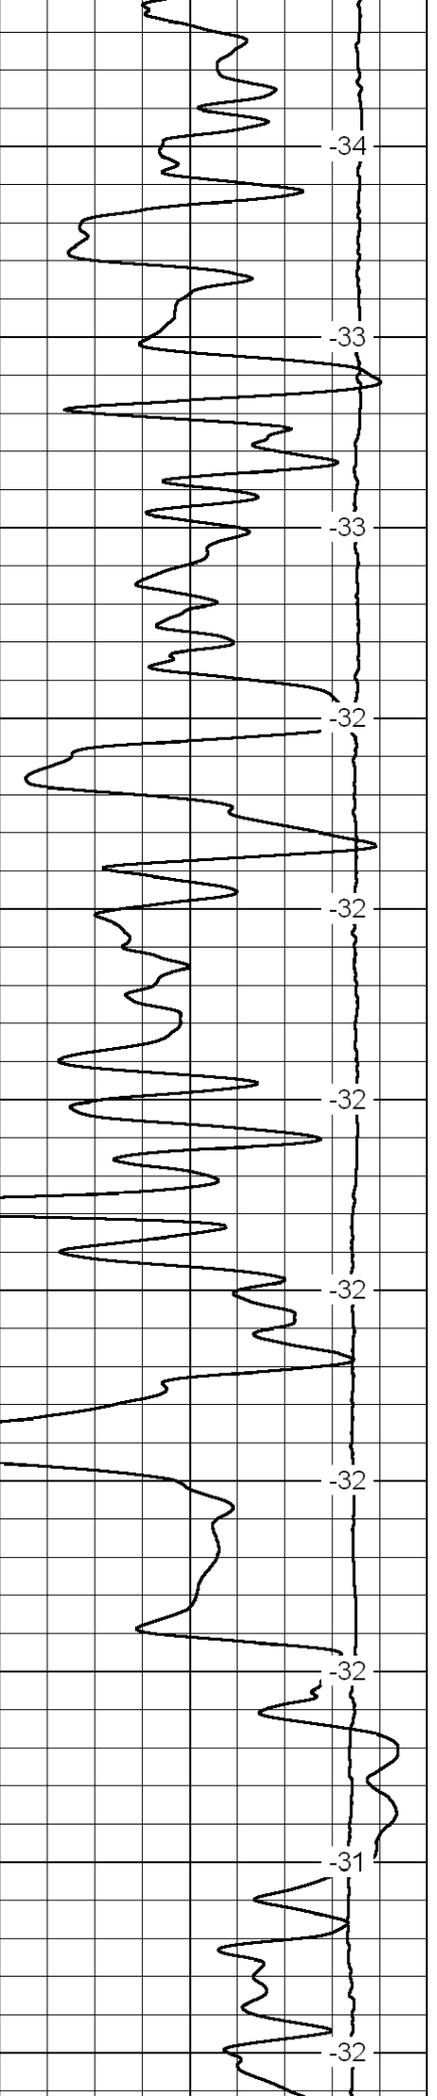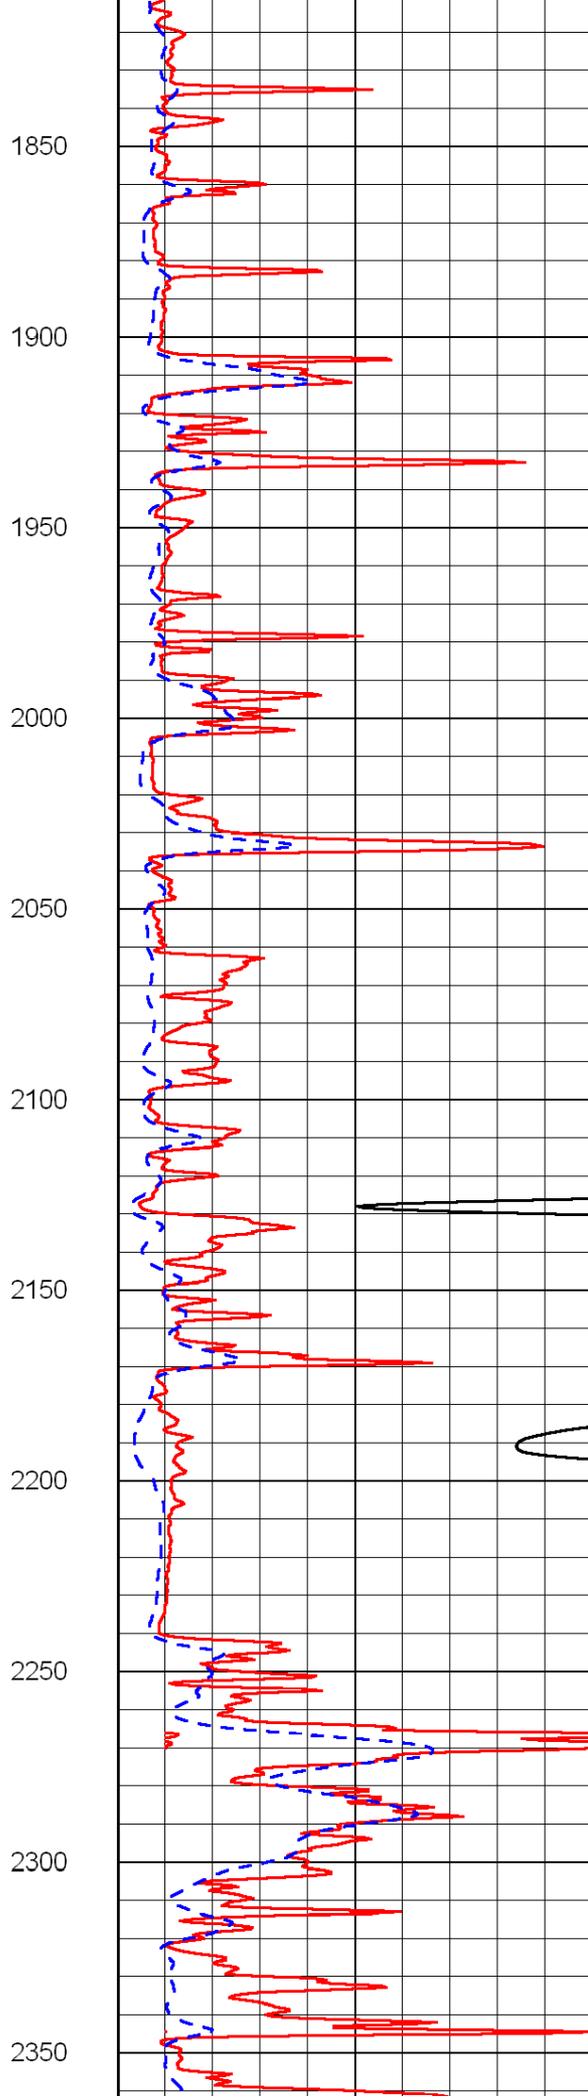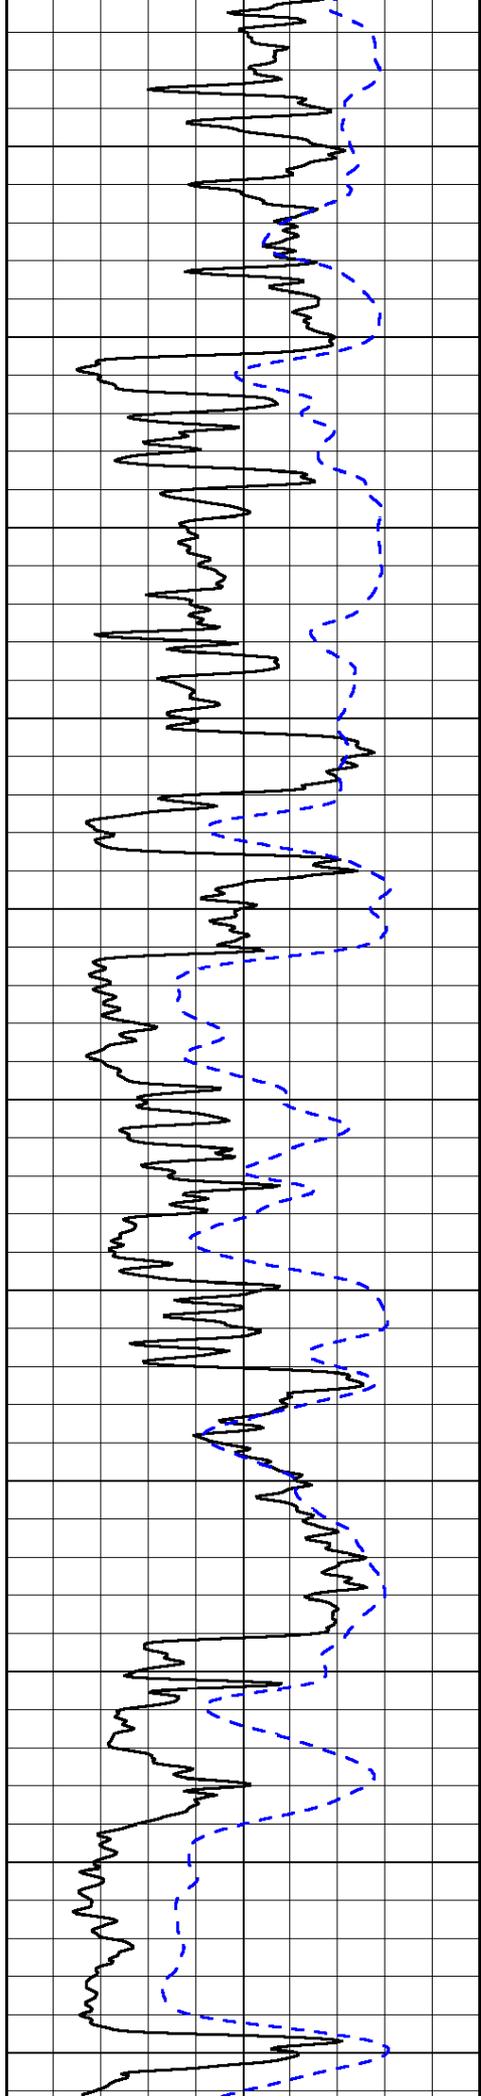

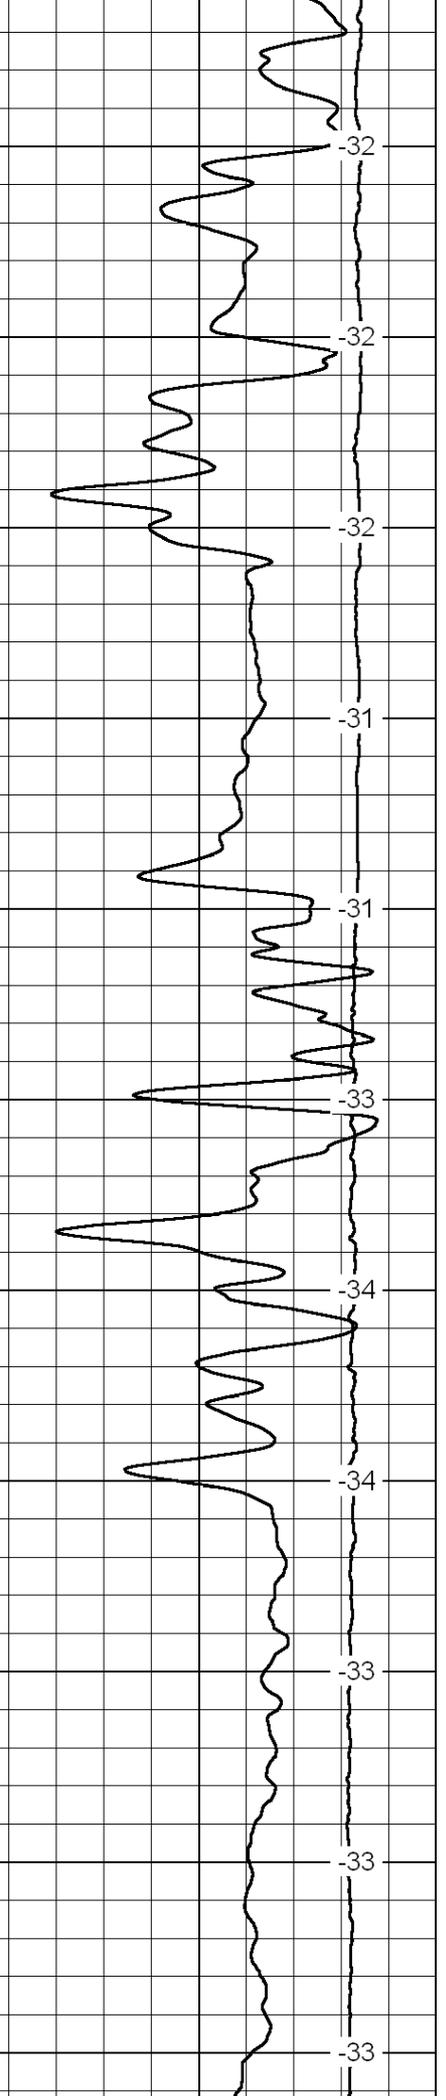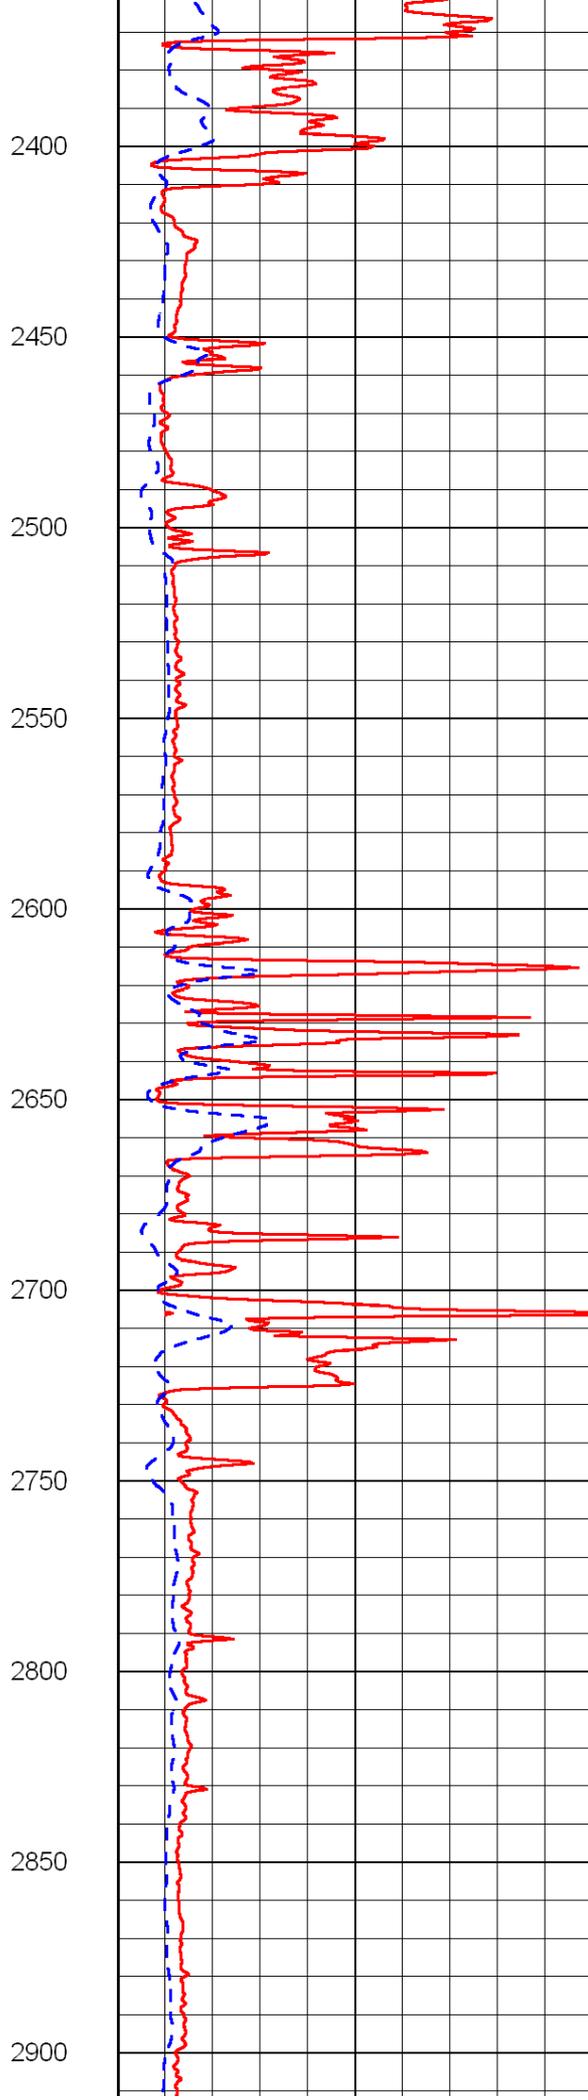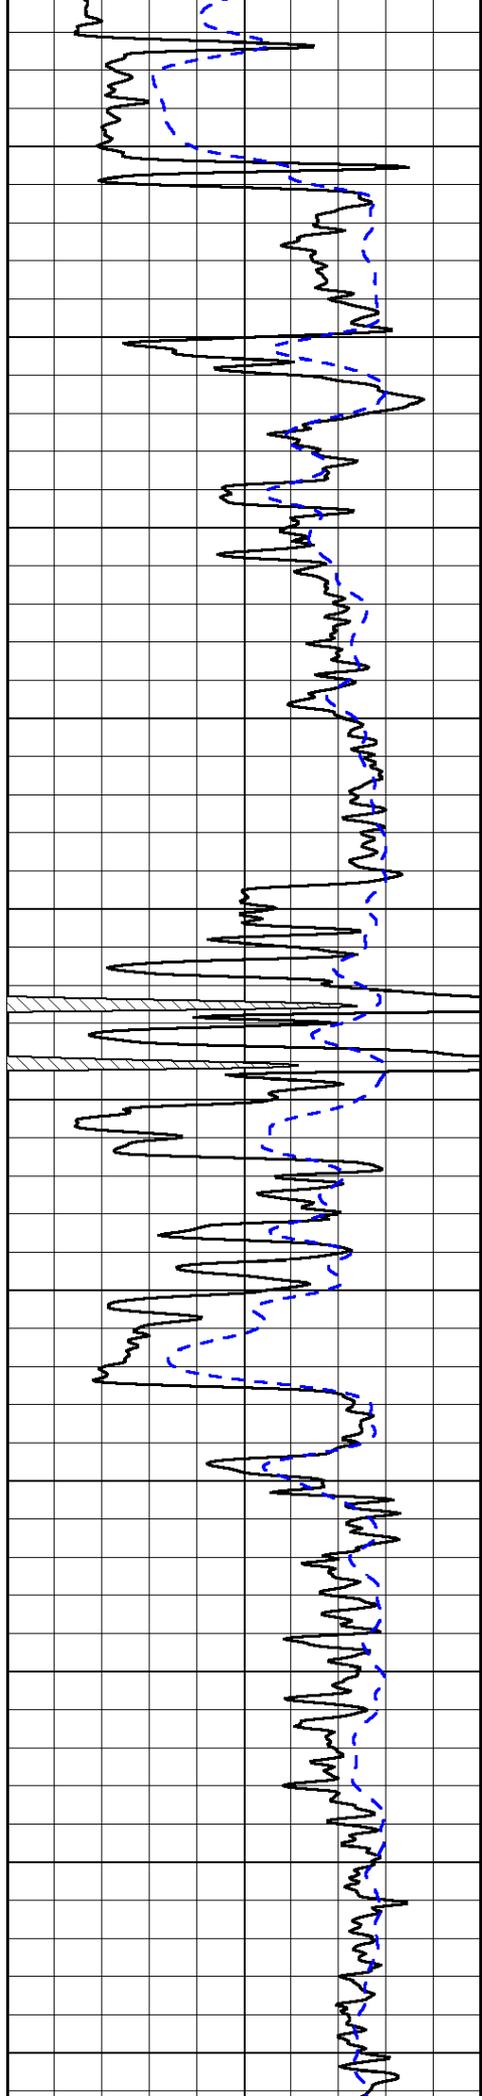

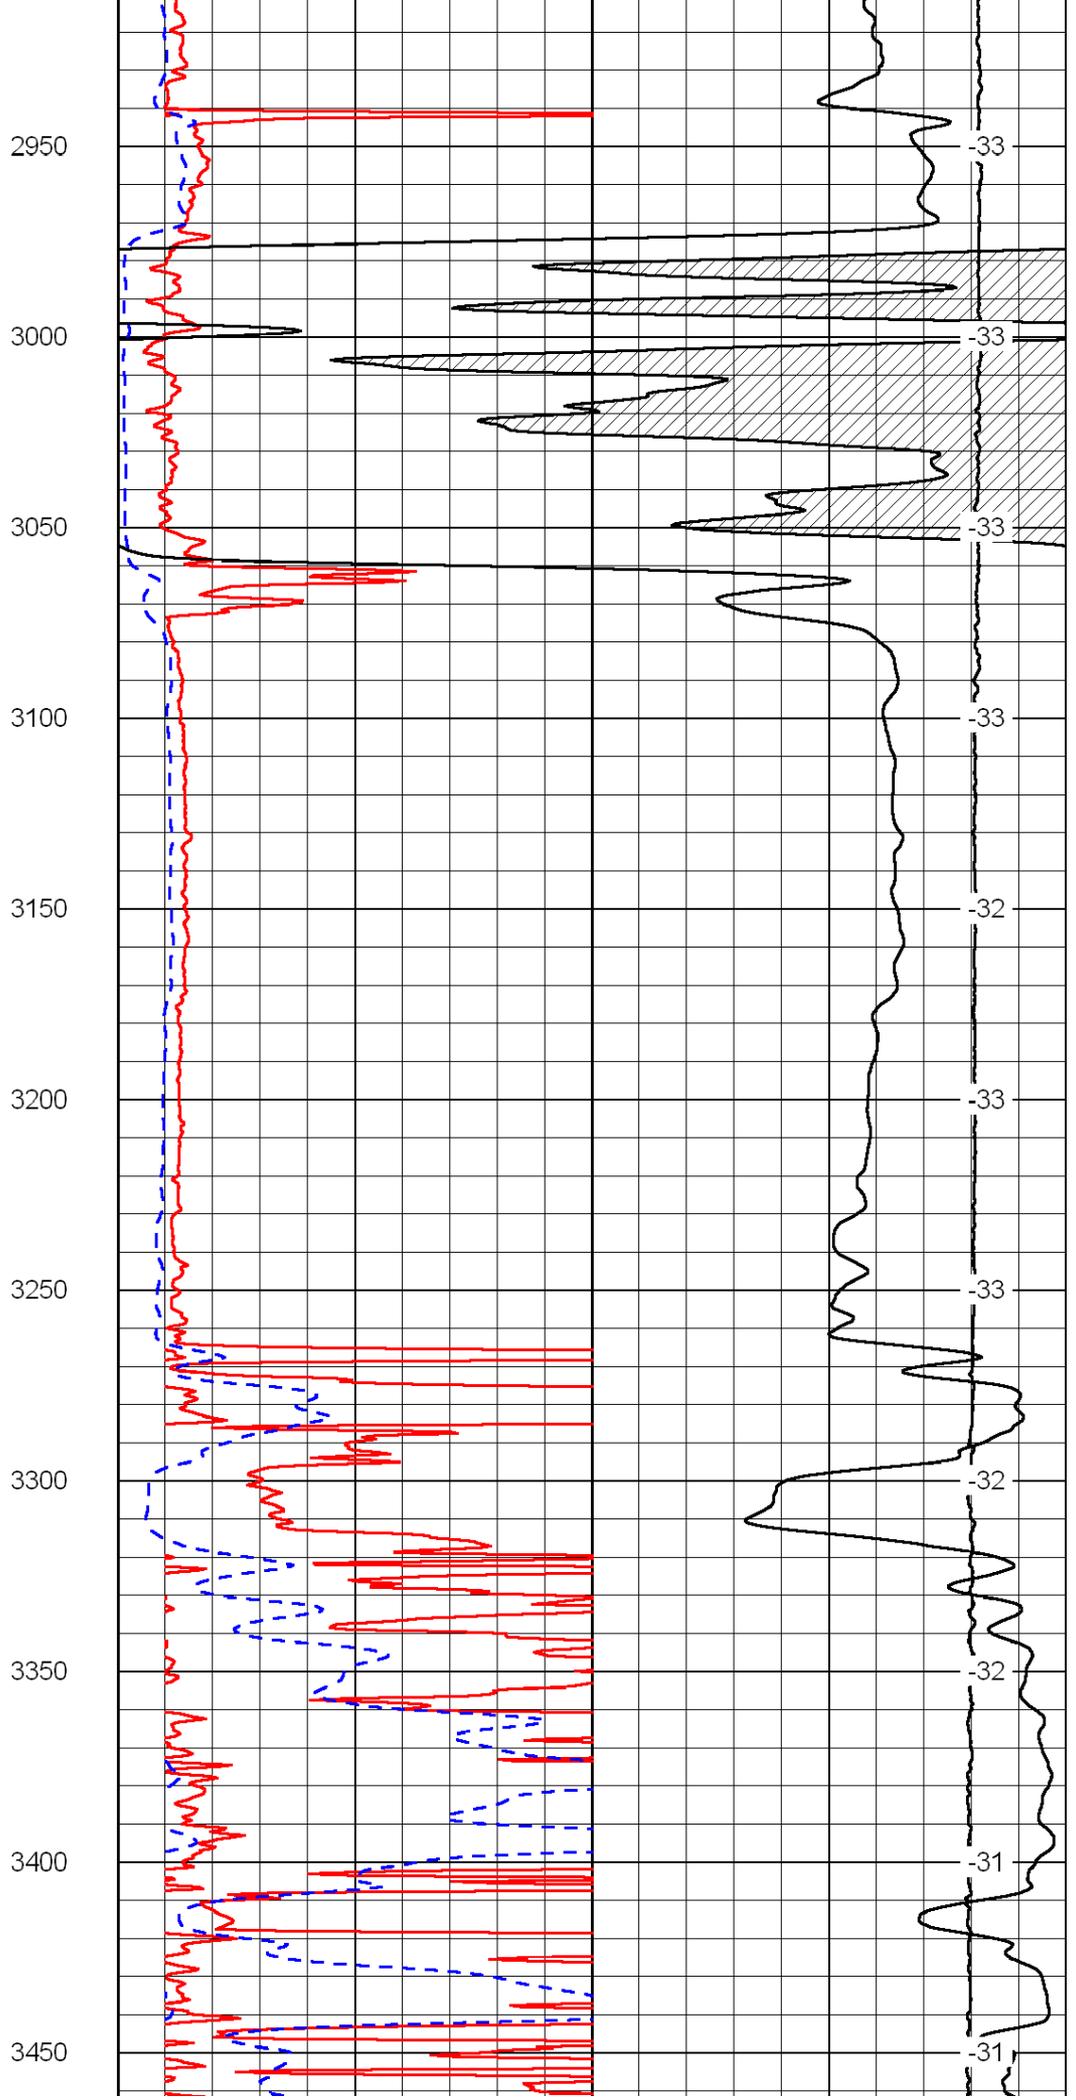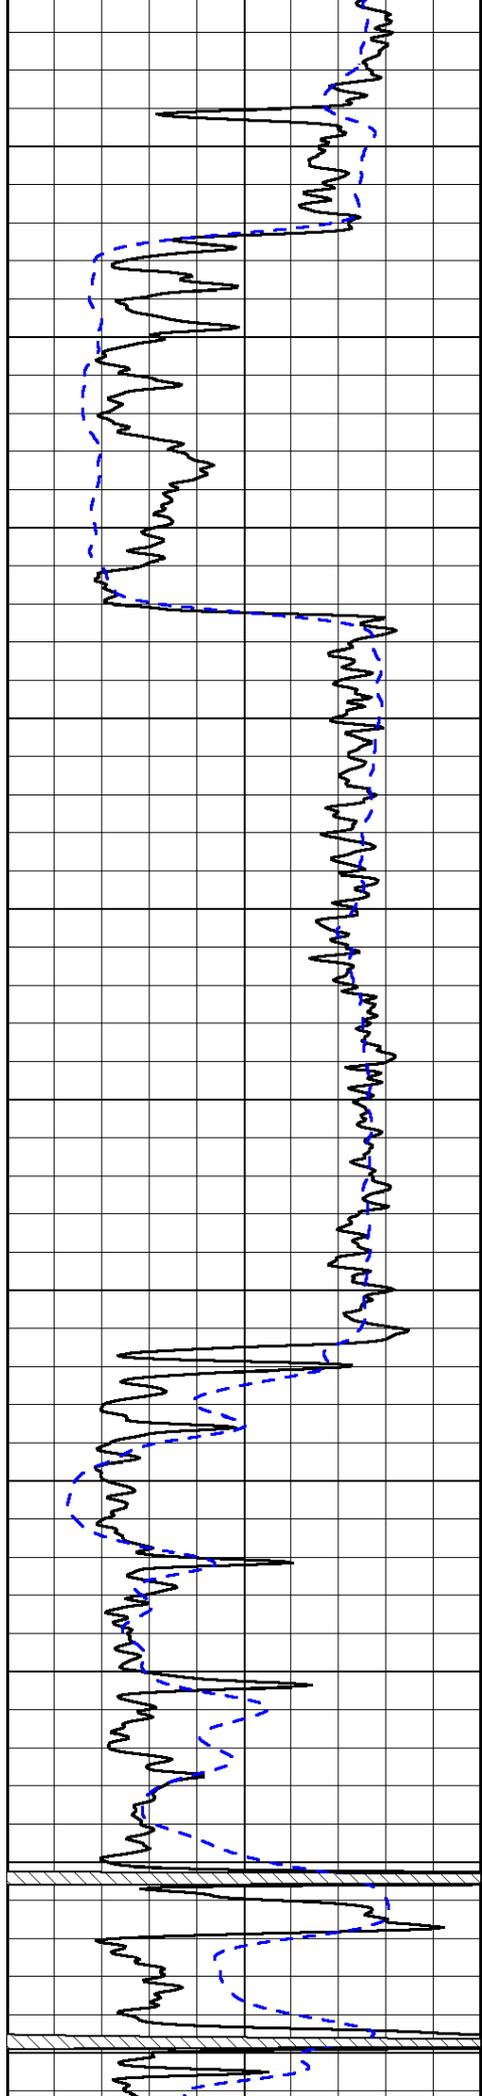

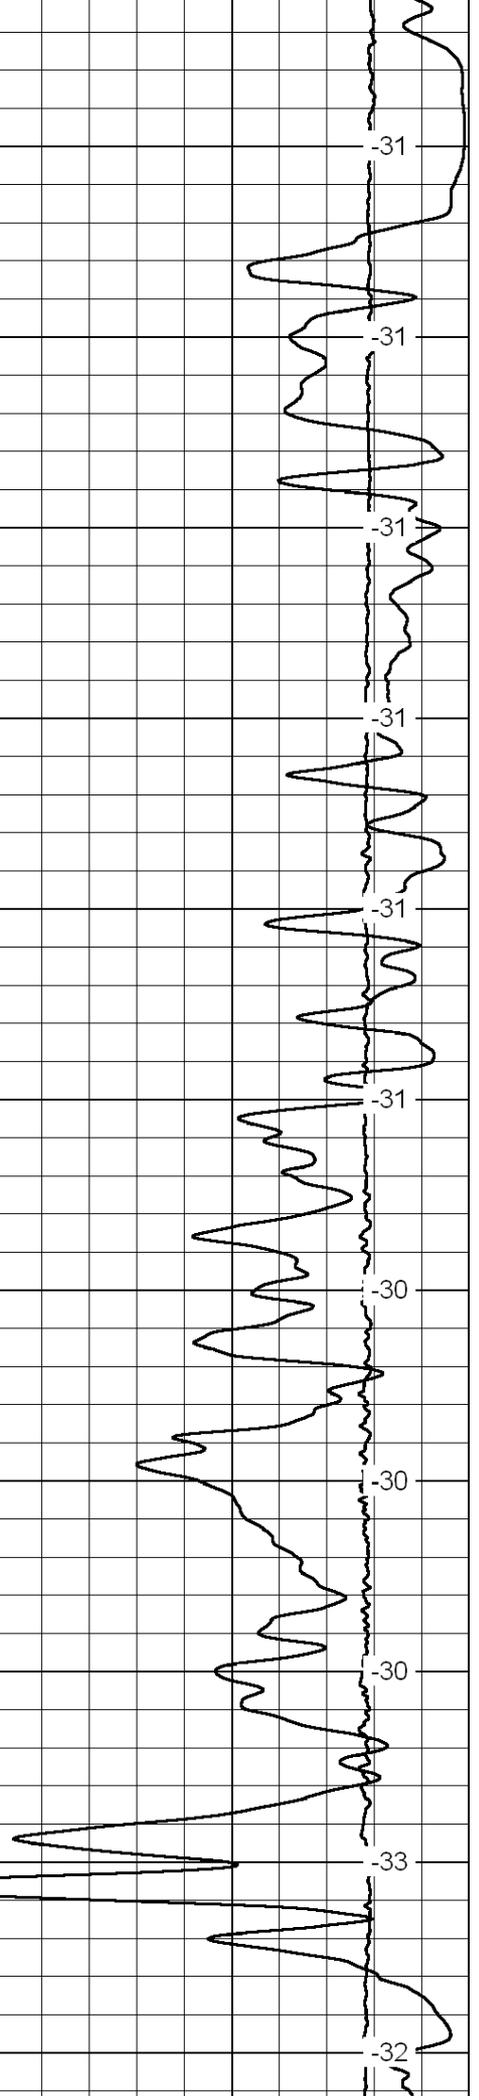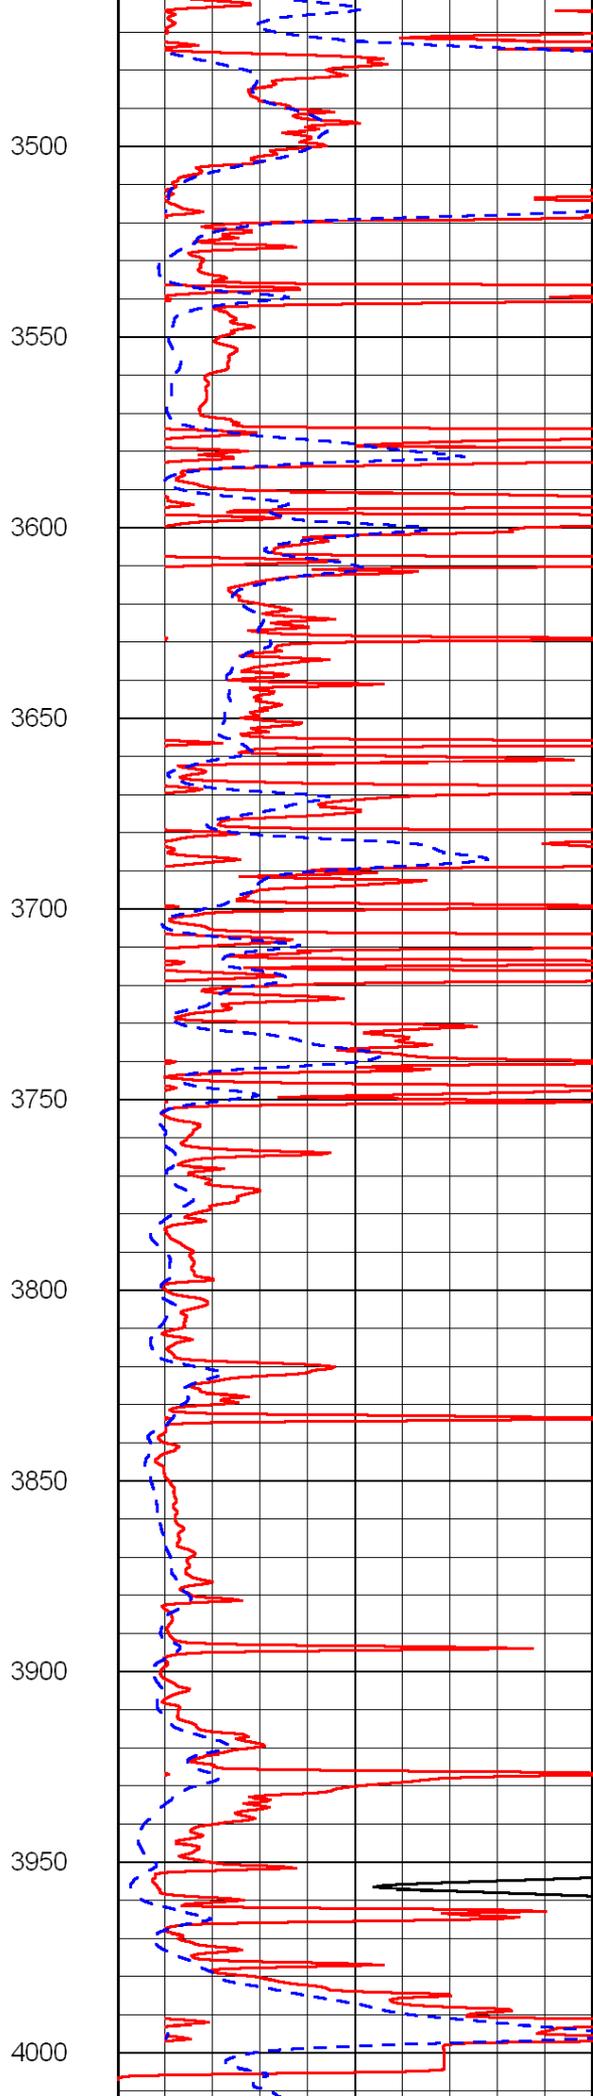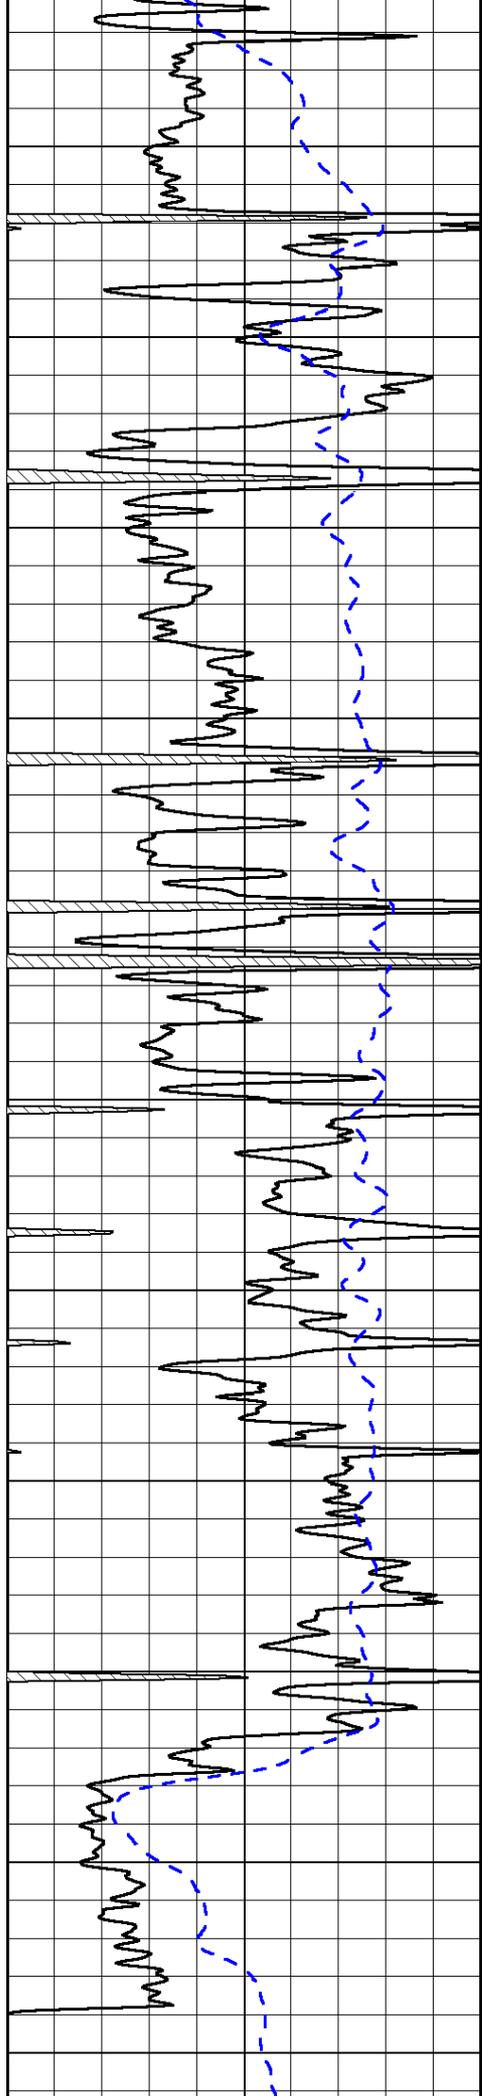

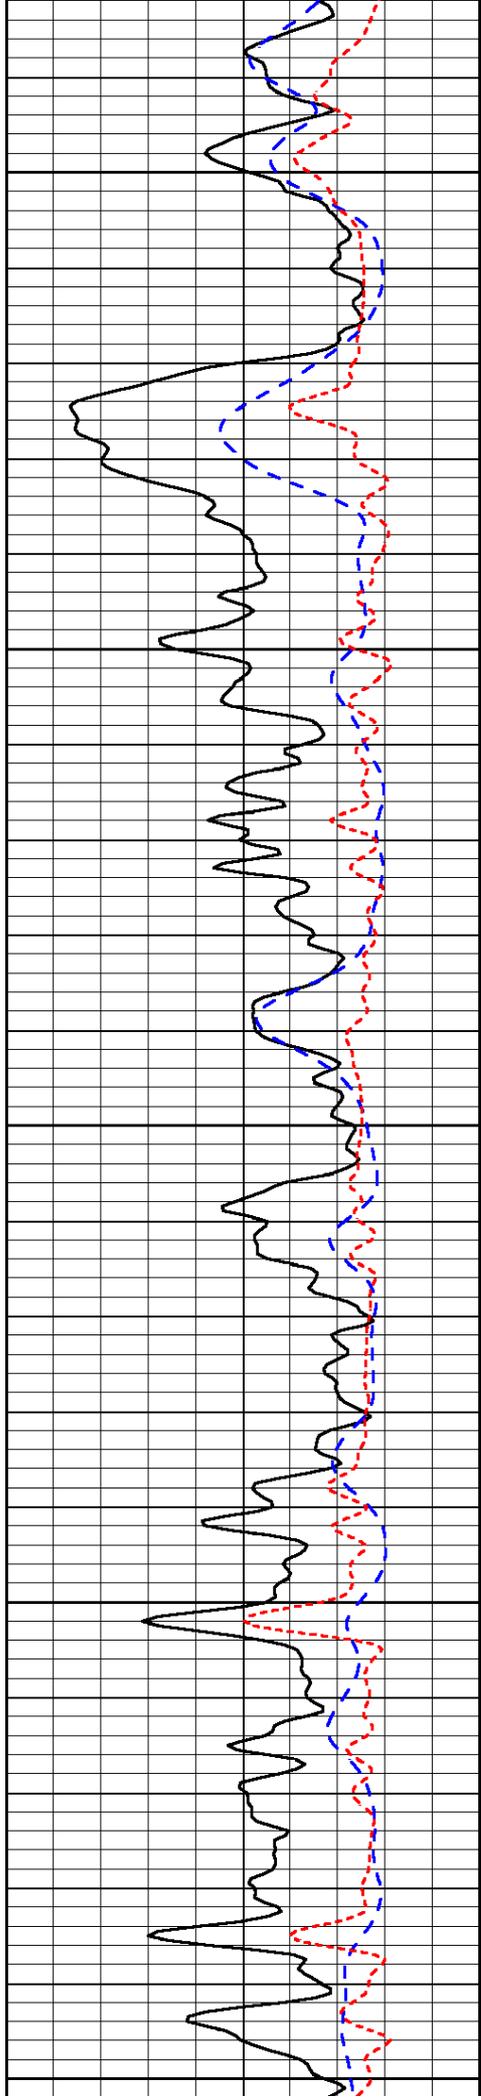


1650

1700

1750

1800

1850

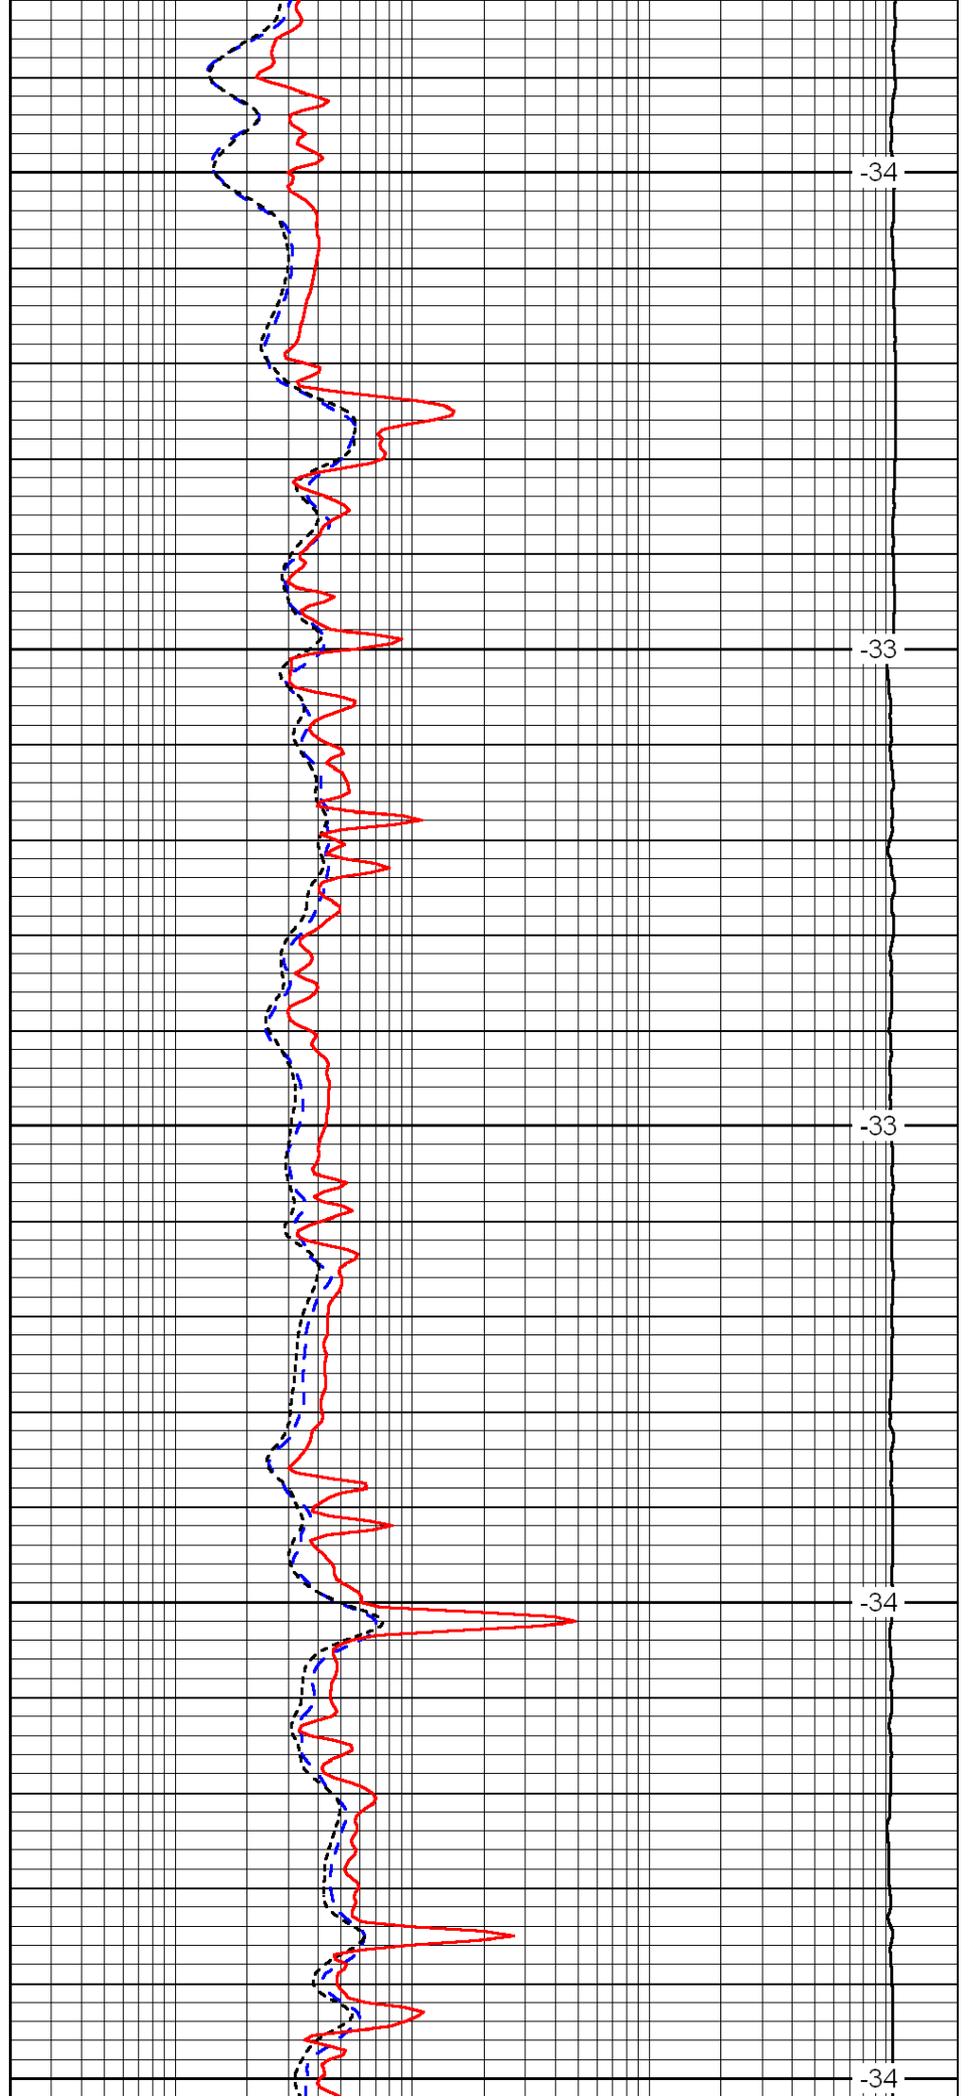


-34

-33

-33

-34

-34

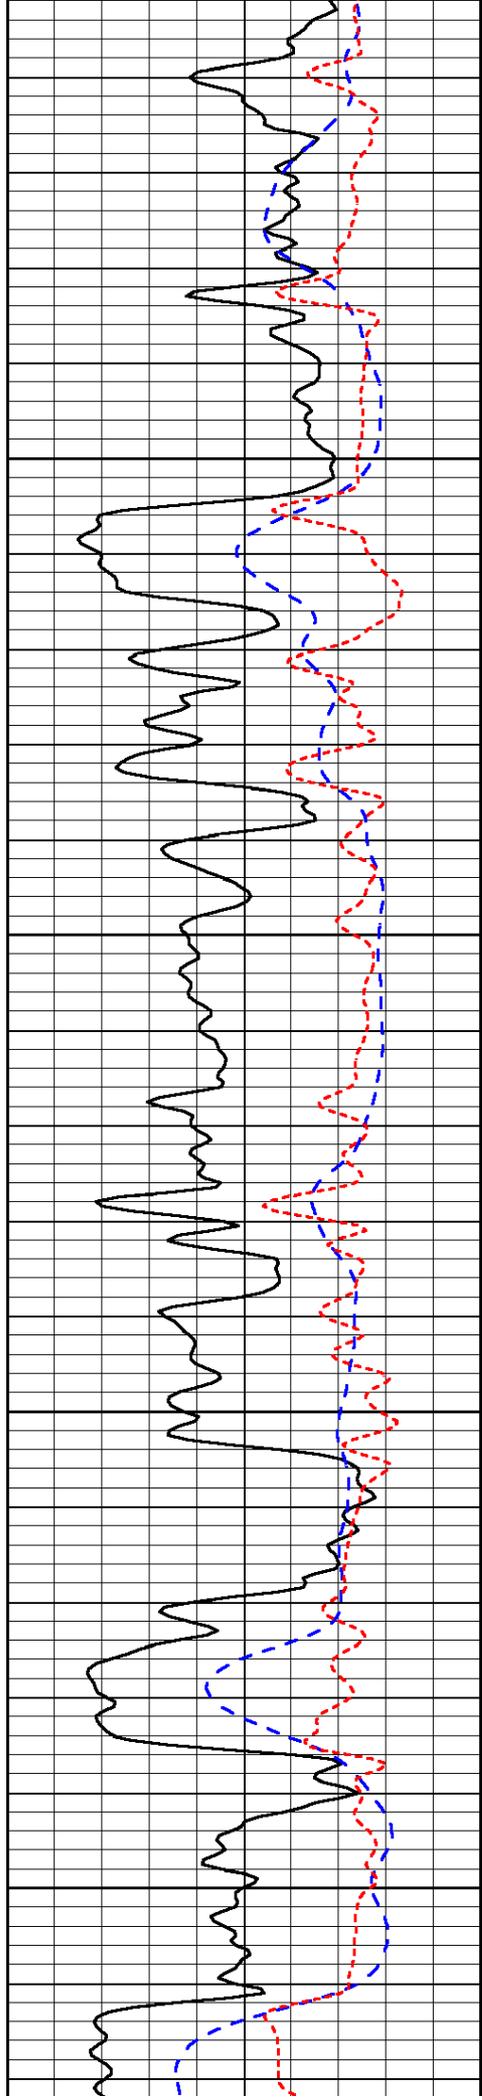


1900

1950

2000

2050

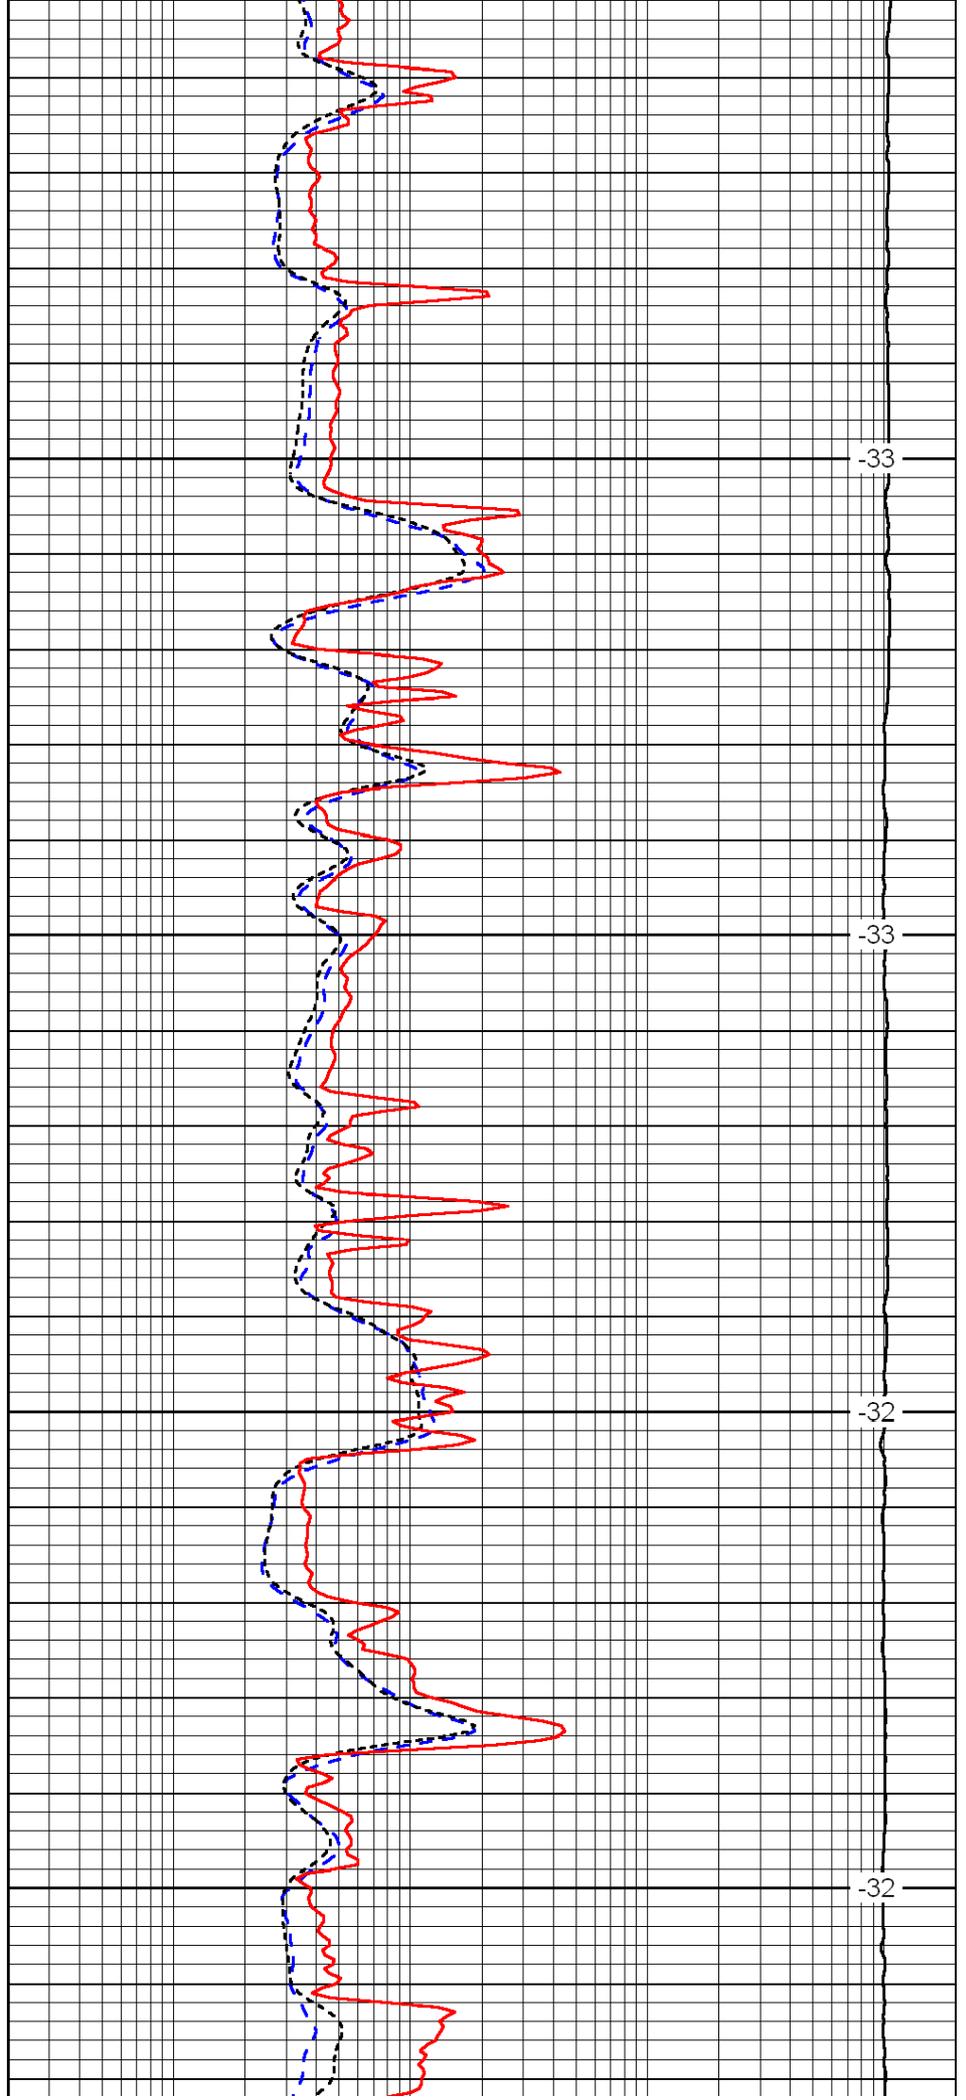


-33

-33

-32

-32

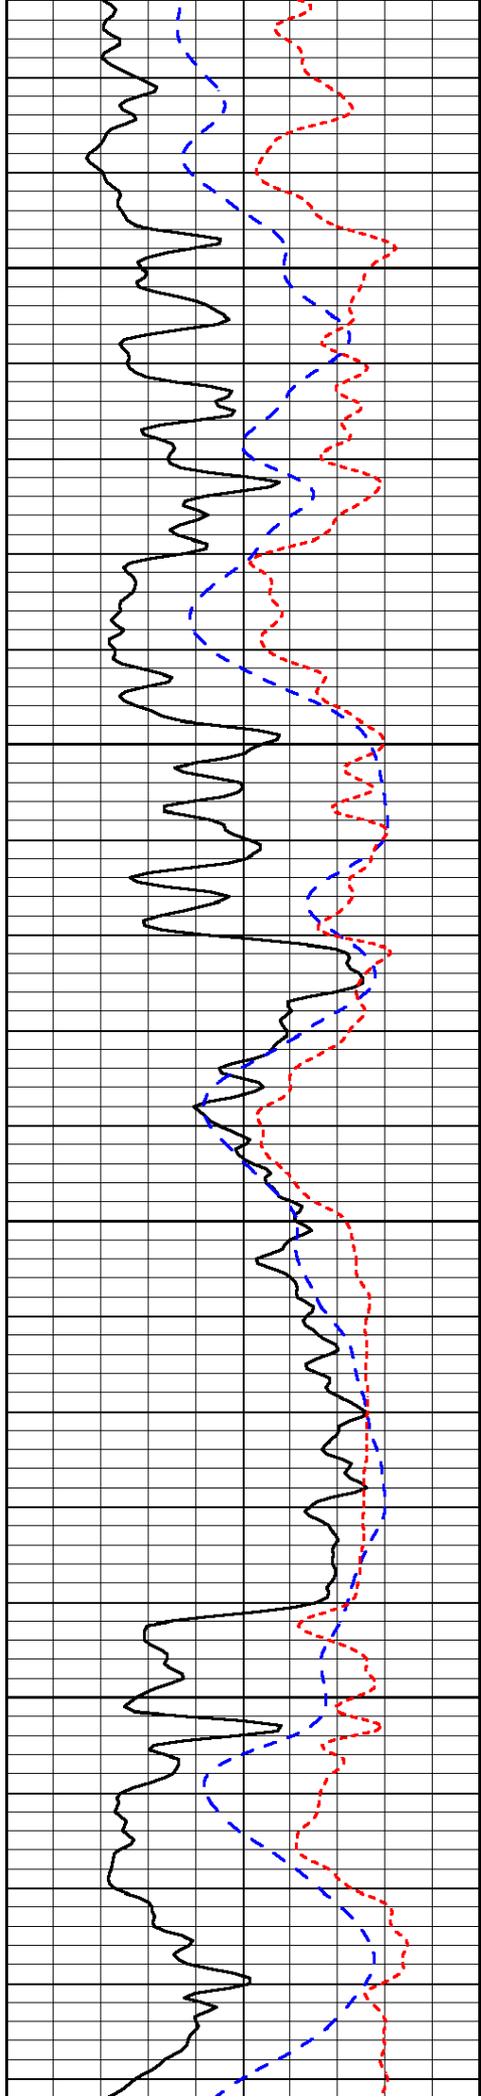


2100

2150

2200

2250

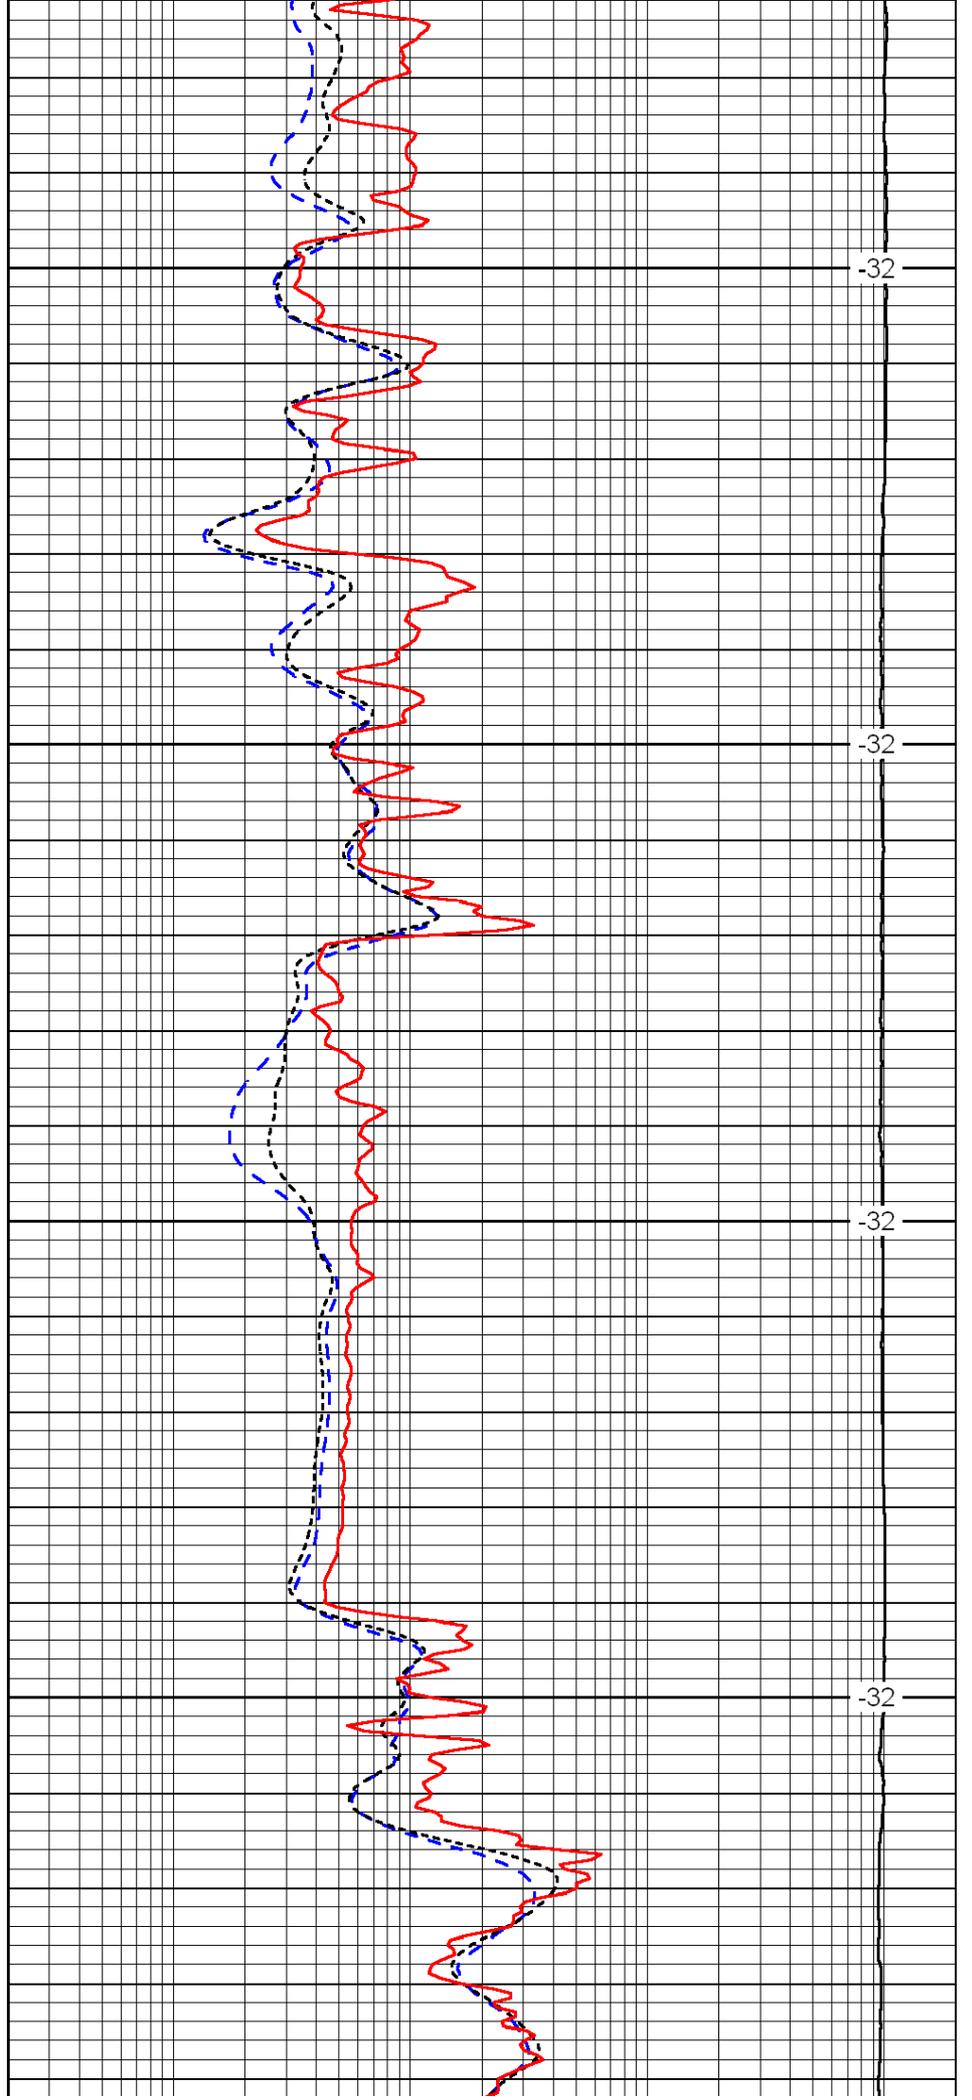


-32

-32

-32

-32

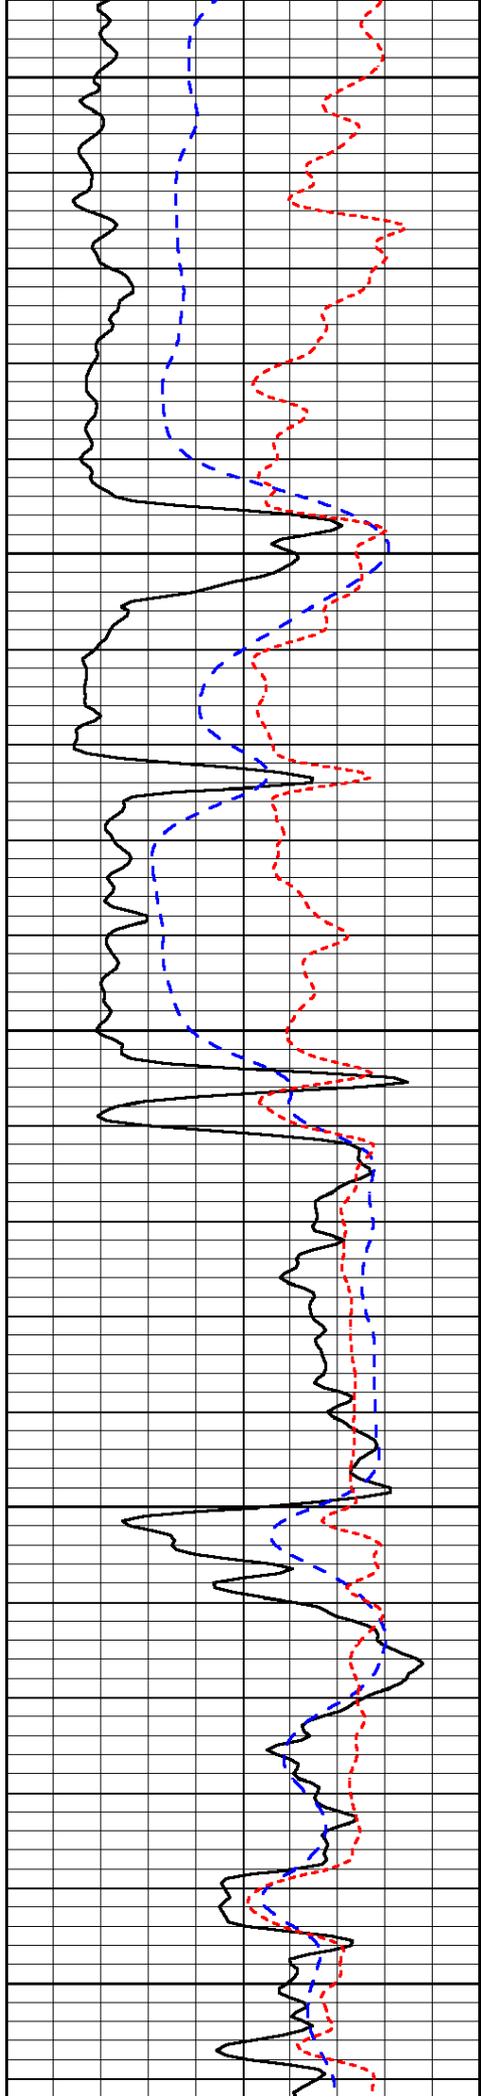


2300

2350

2400

2450

2500

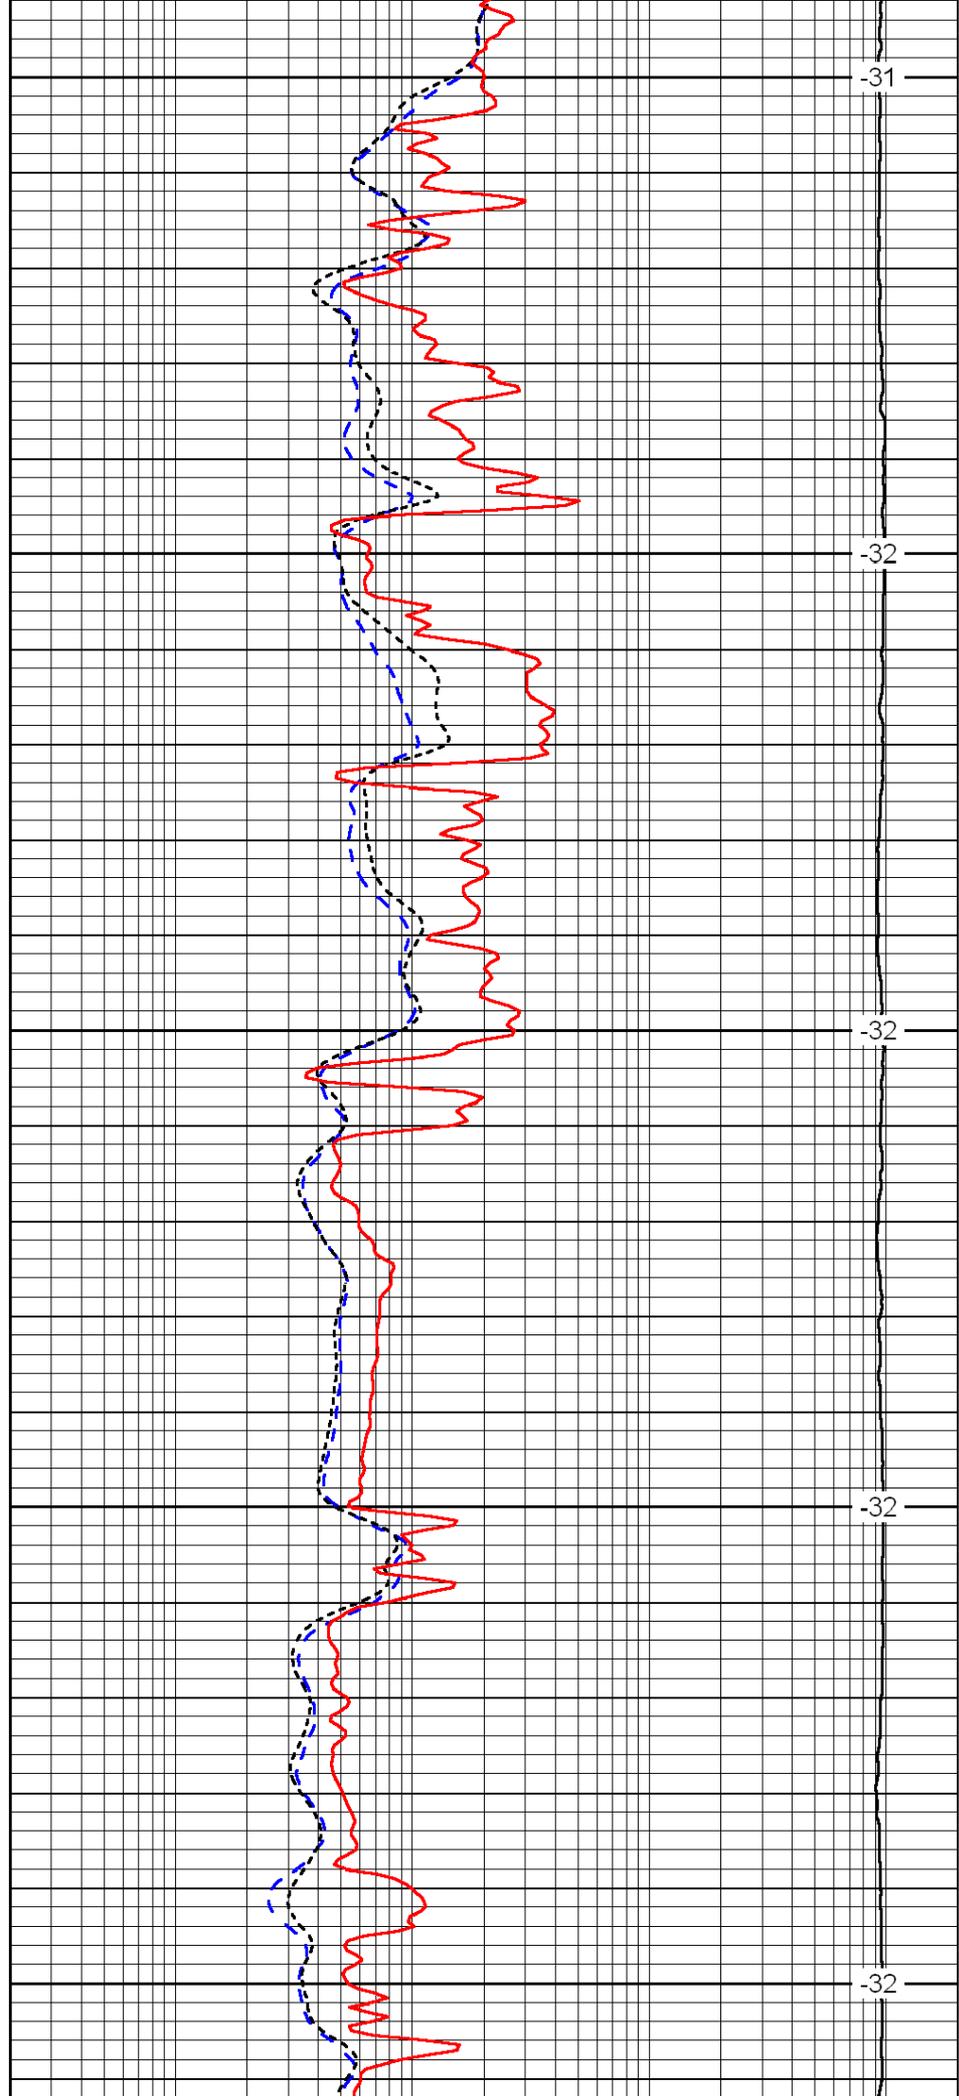


-31

-32

-32

-32

-32

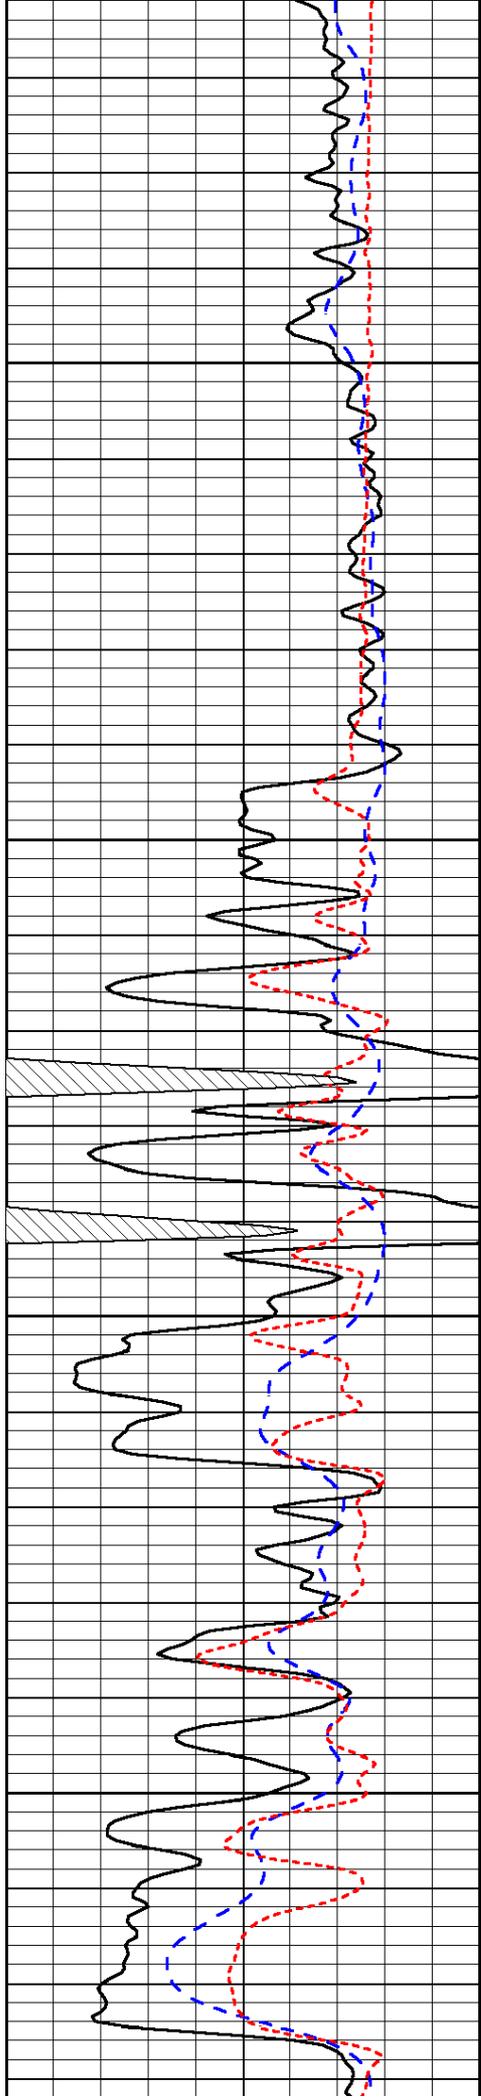


2550

2600

2650

2700

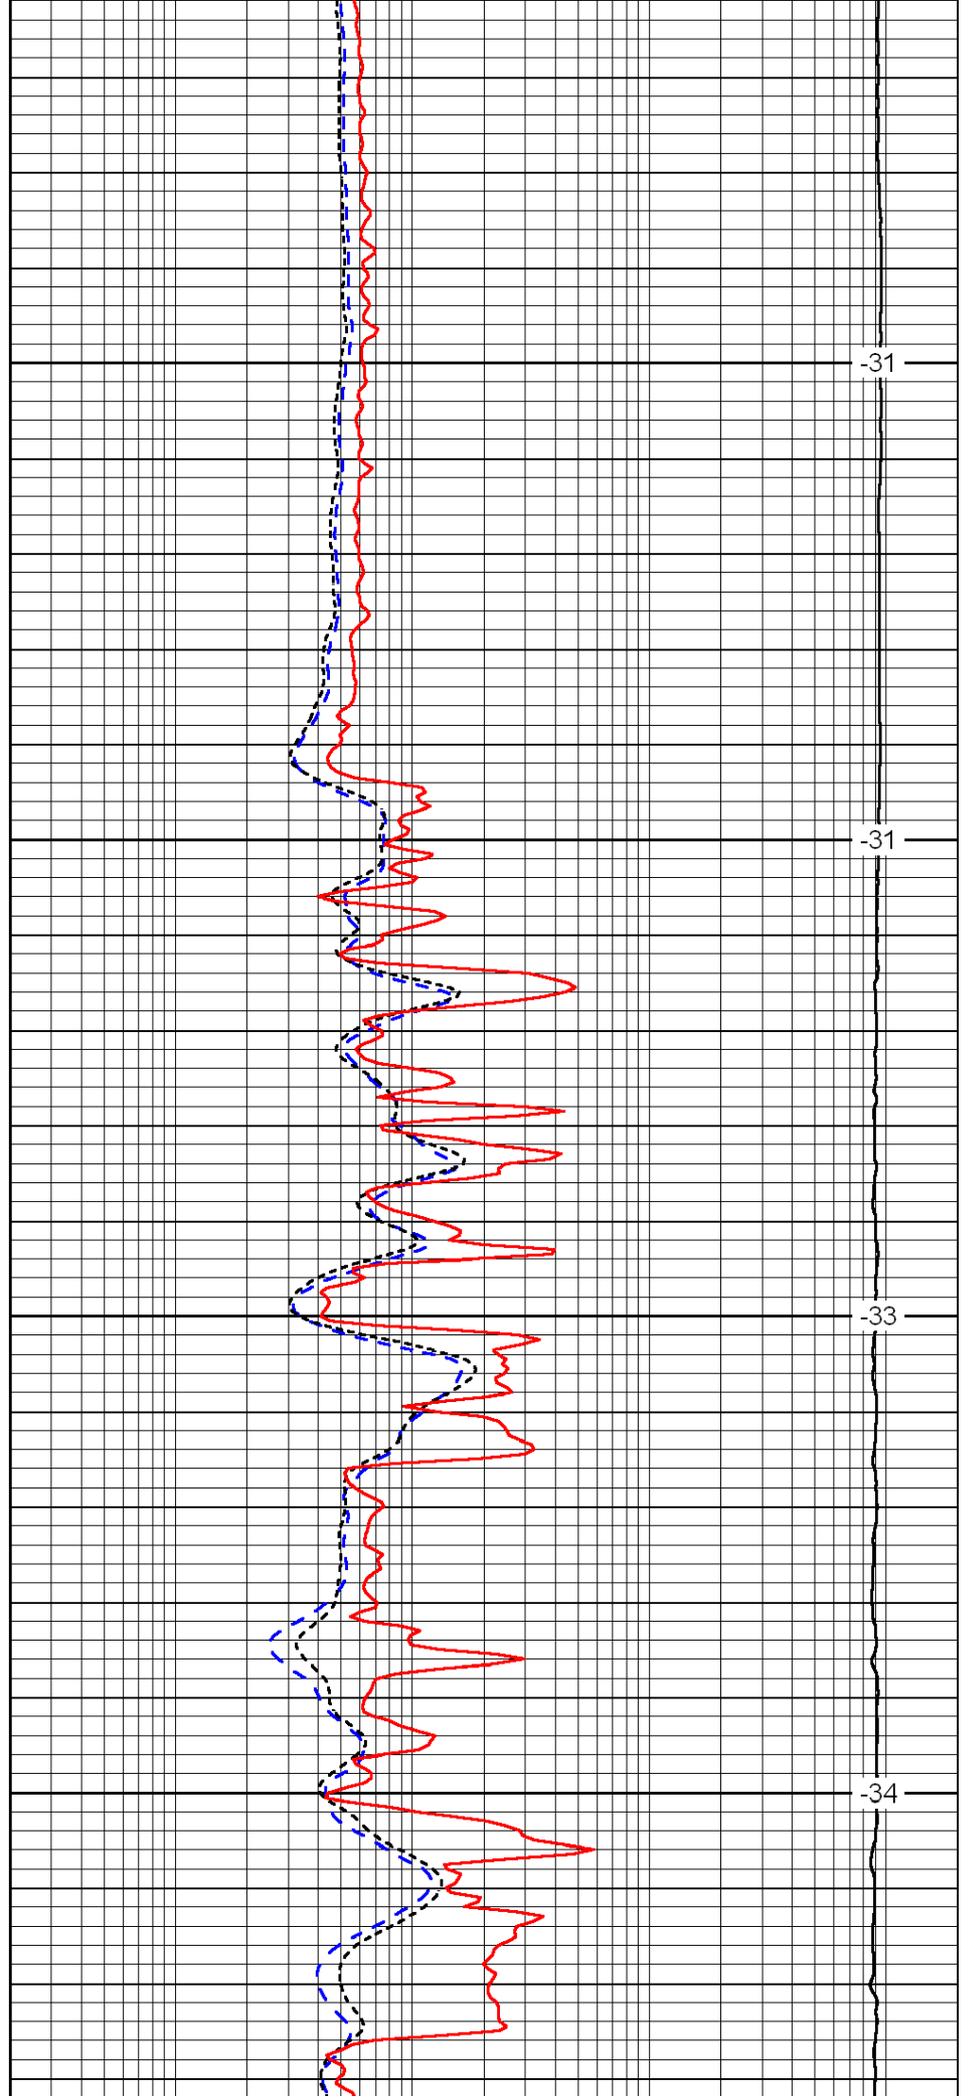


-31

-31

-33

-34

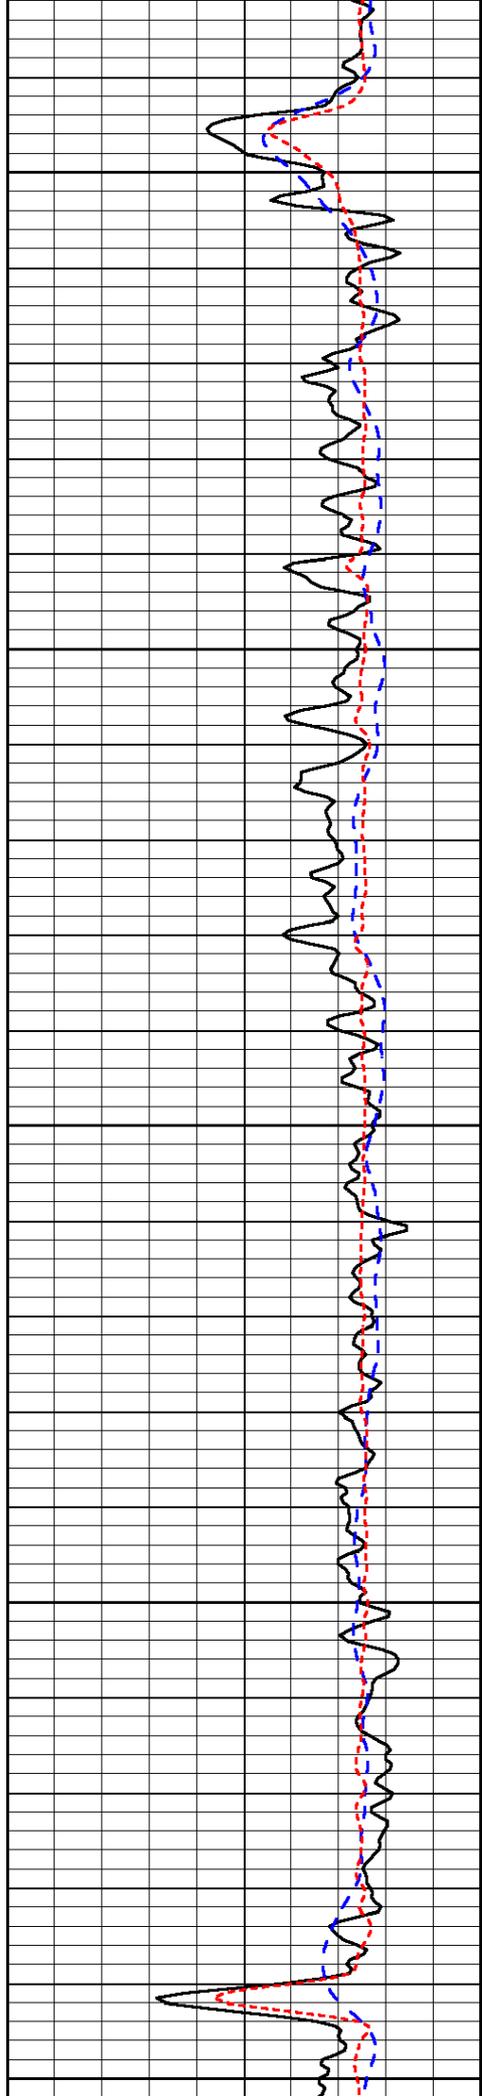


2750

2800

2850

2900

2950

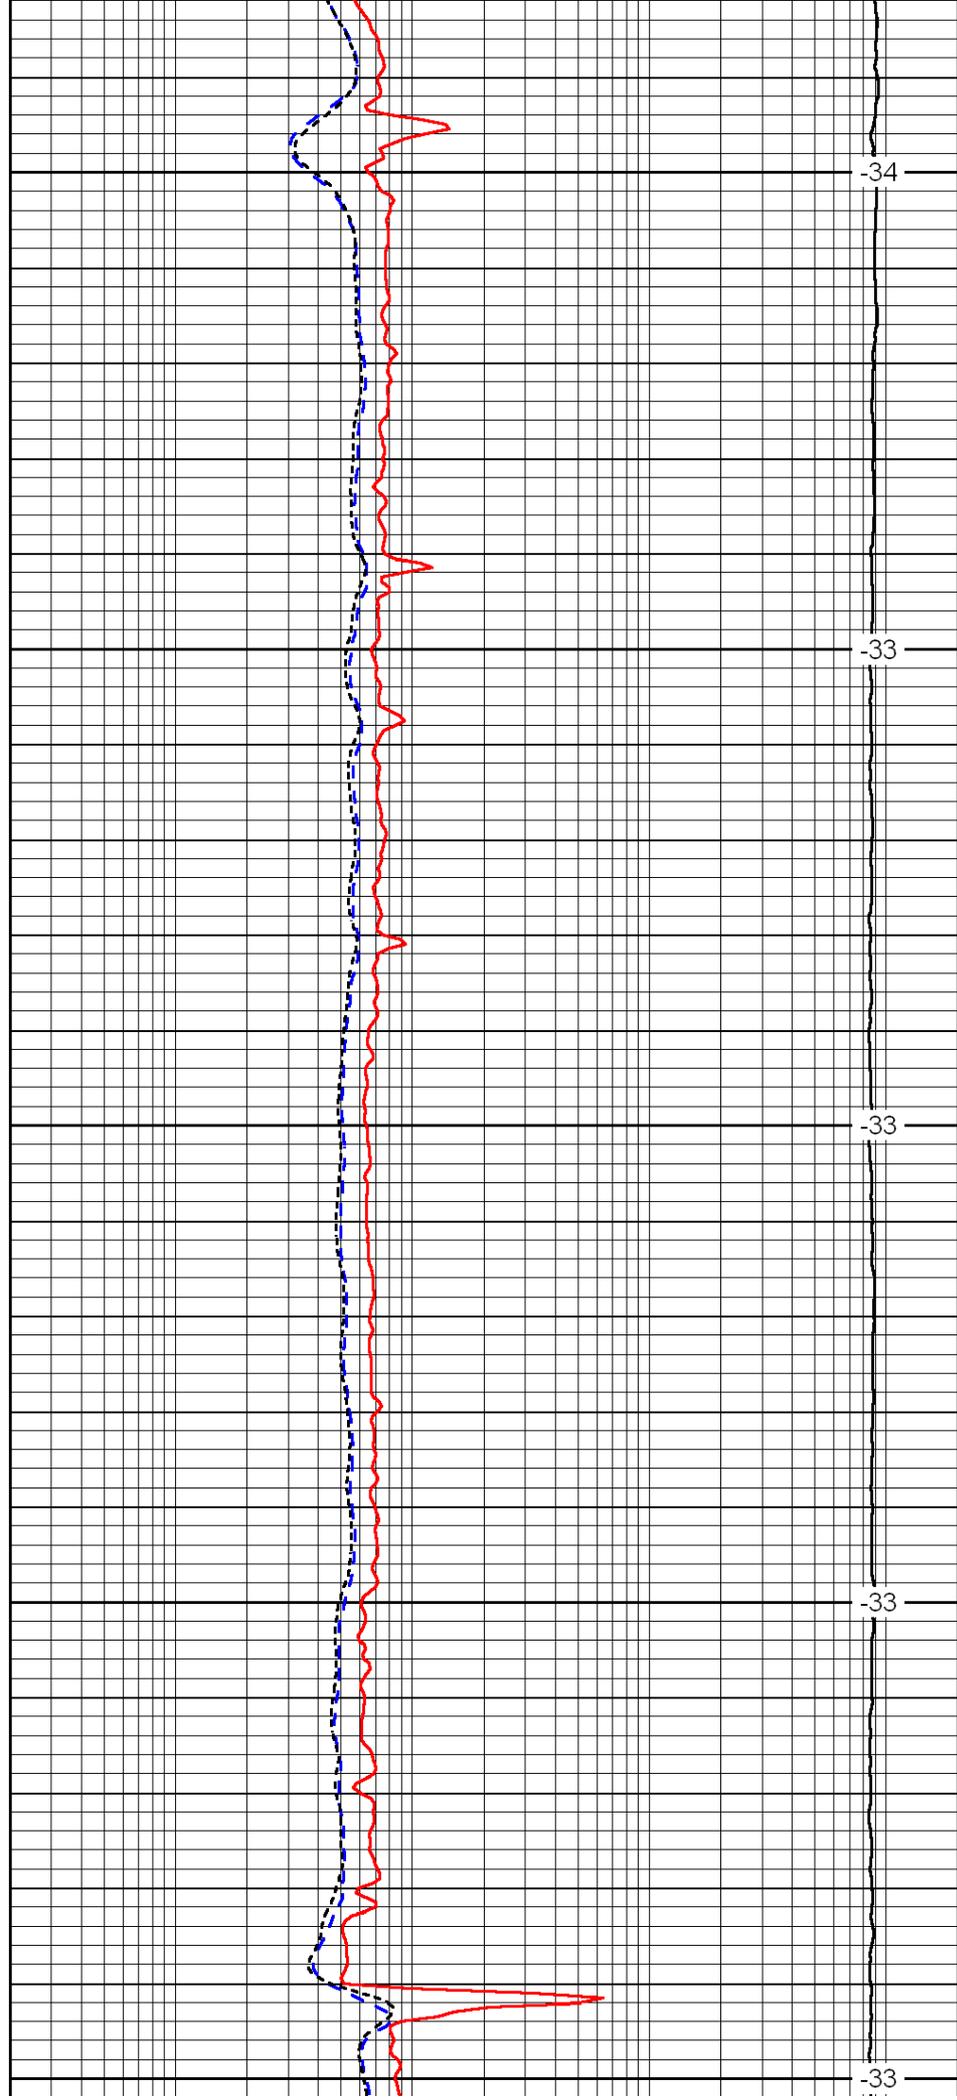


-34

-33

-33

-33

-33

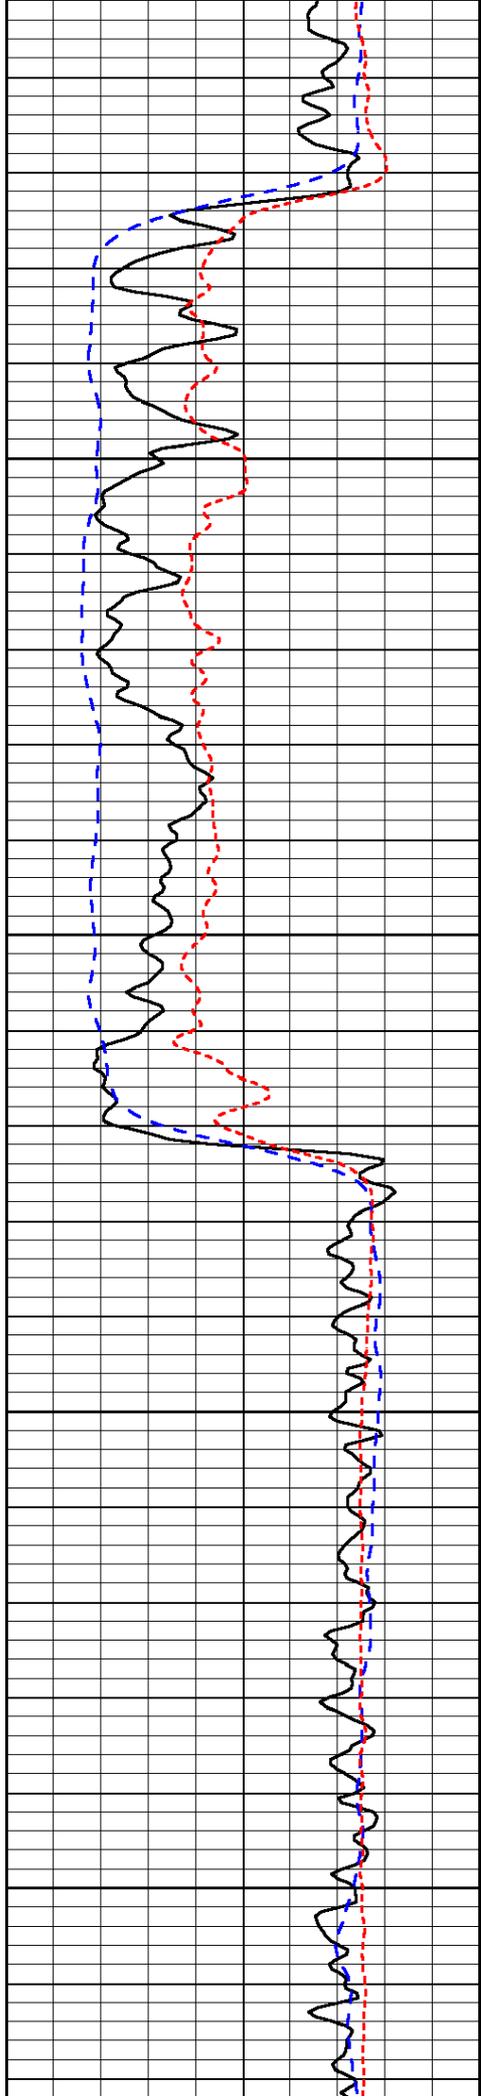


3000

3050

3100

3150

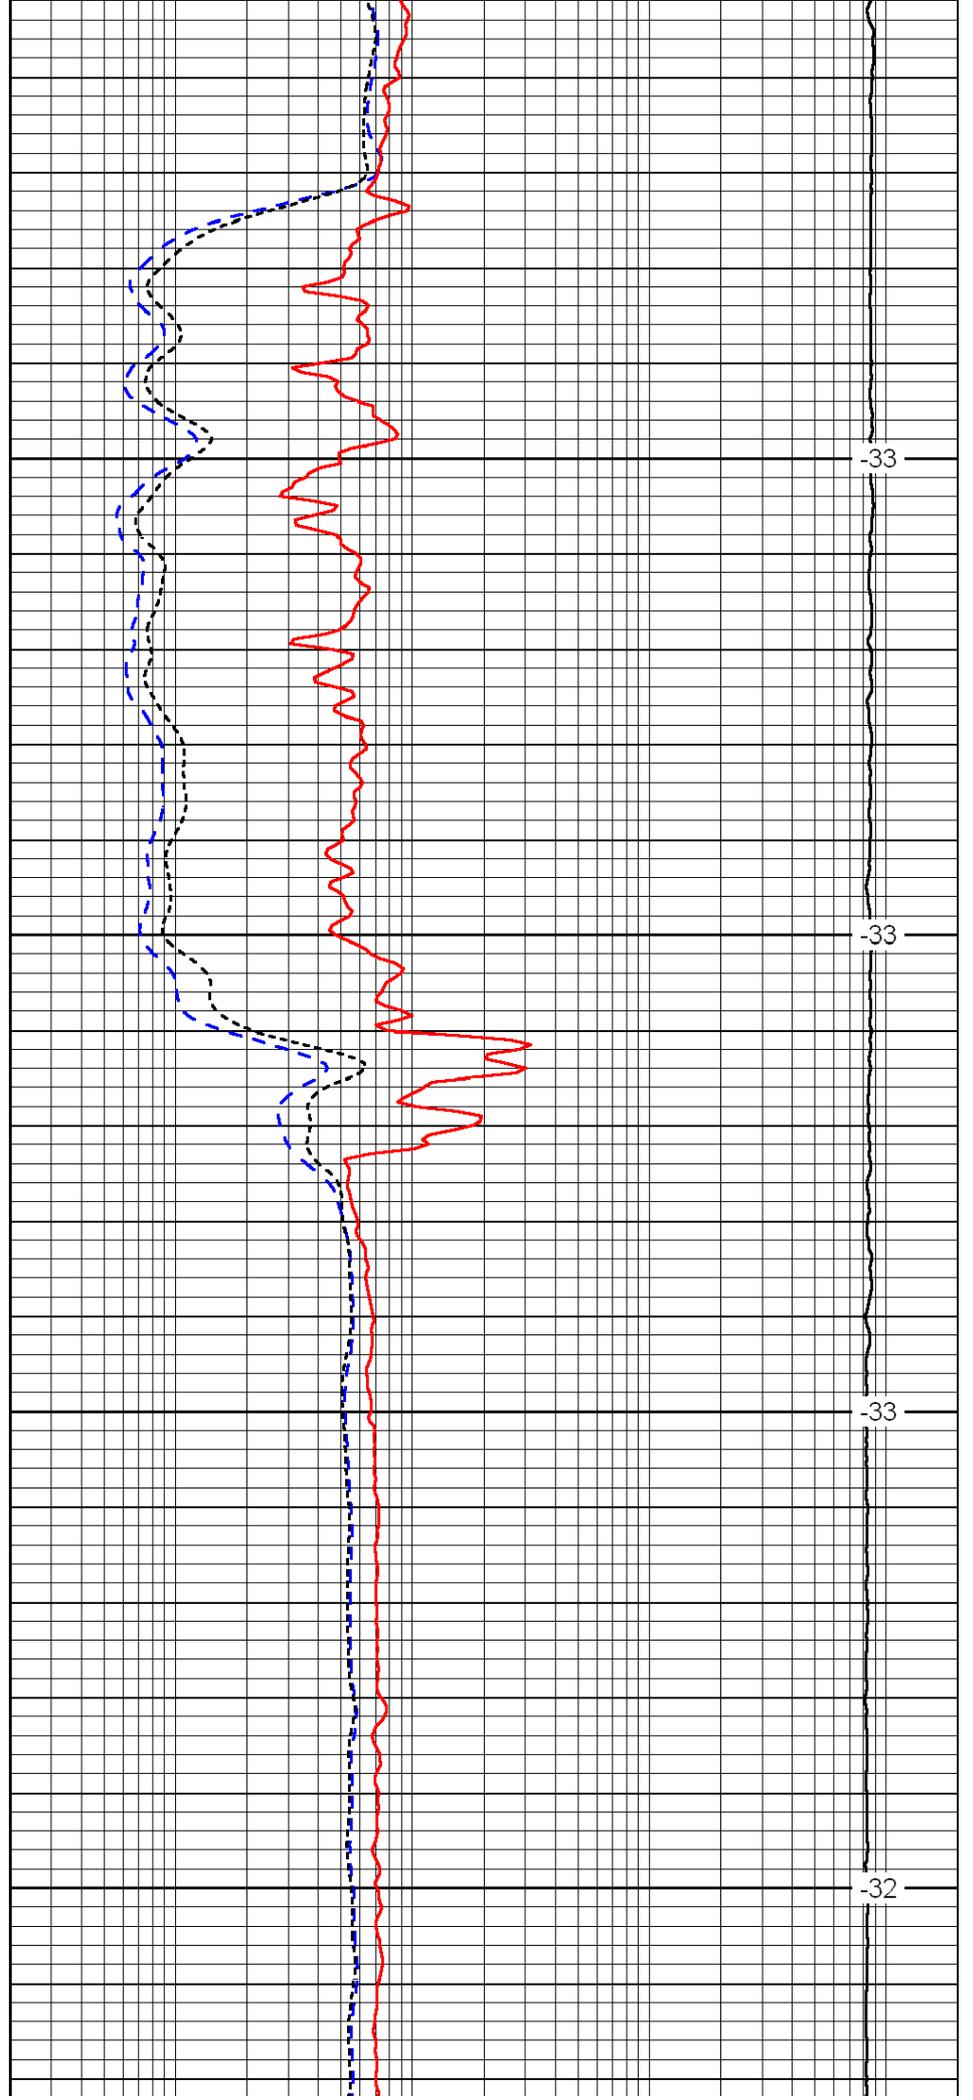


-33

-33

-33

-32

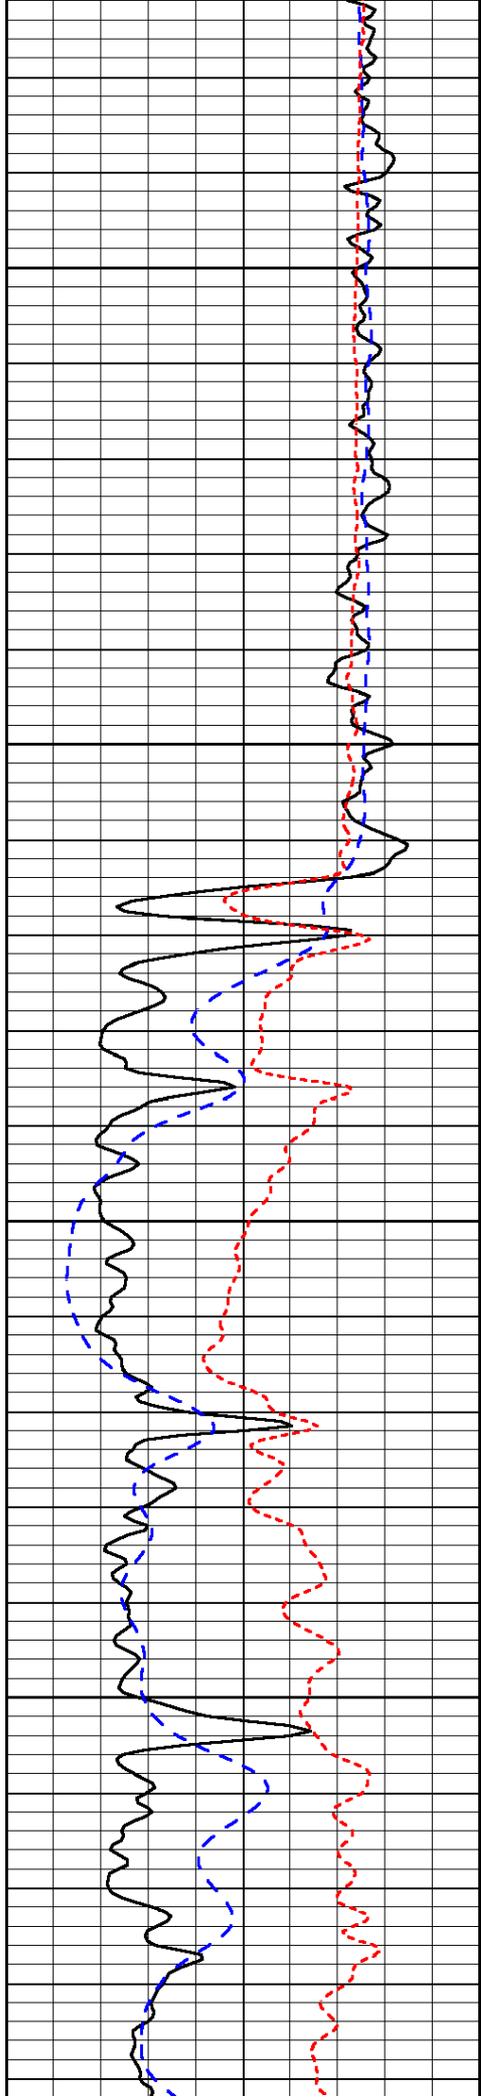


3200

3250

3300

3350

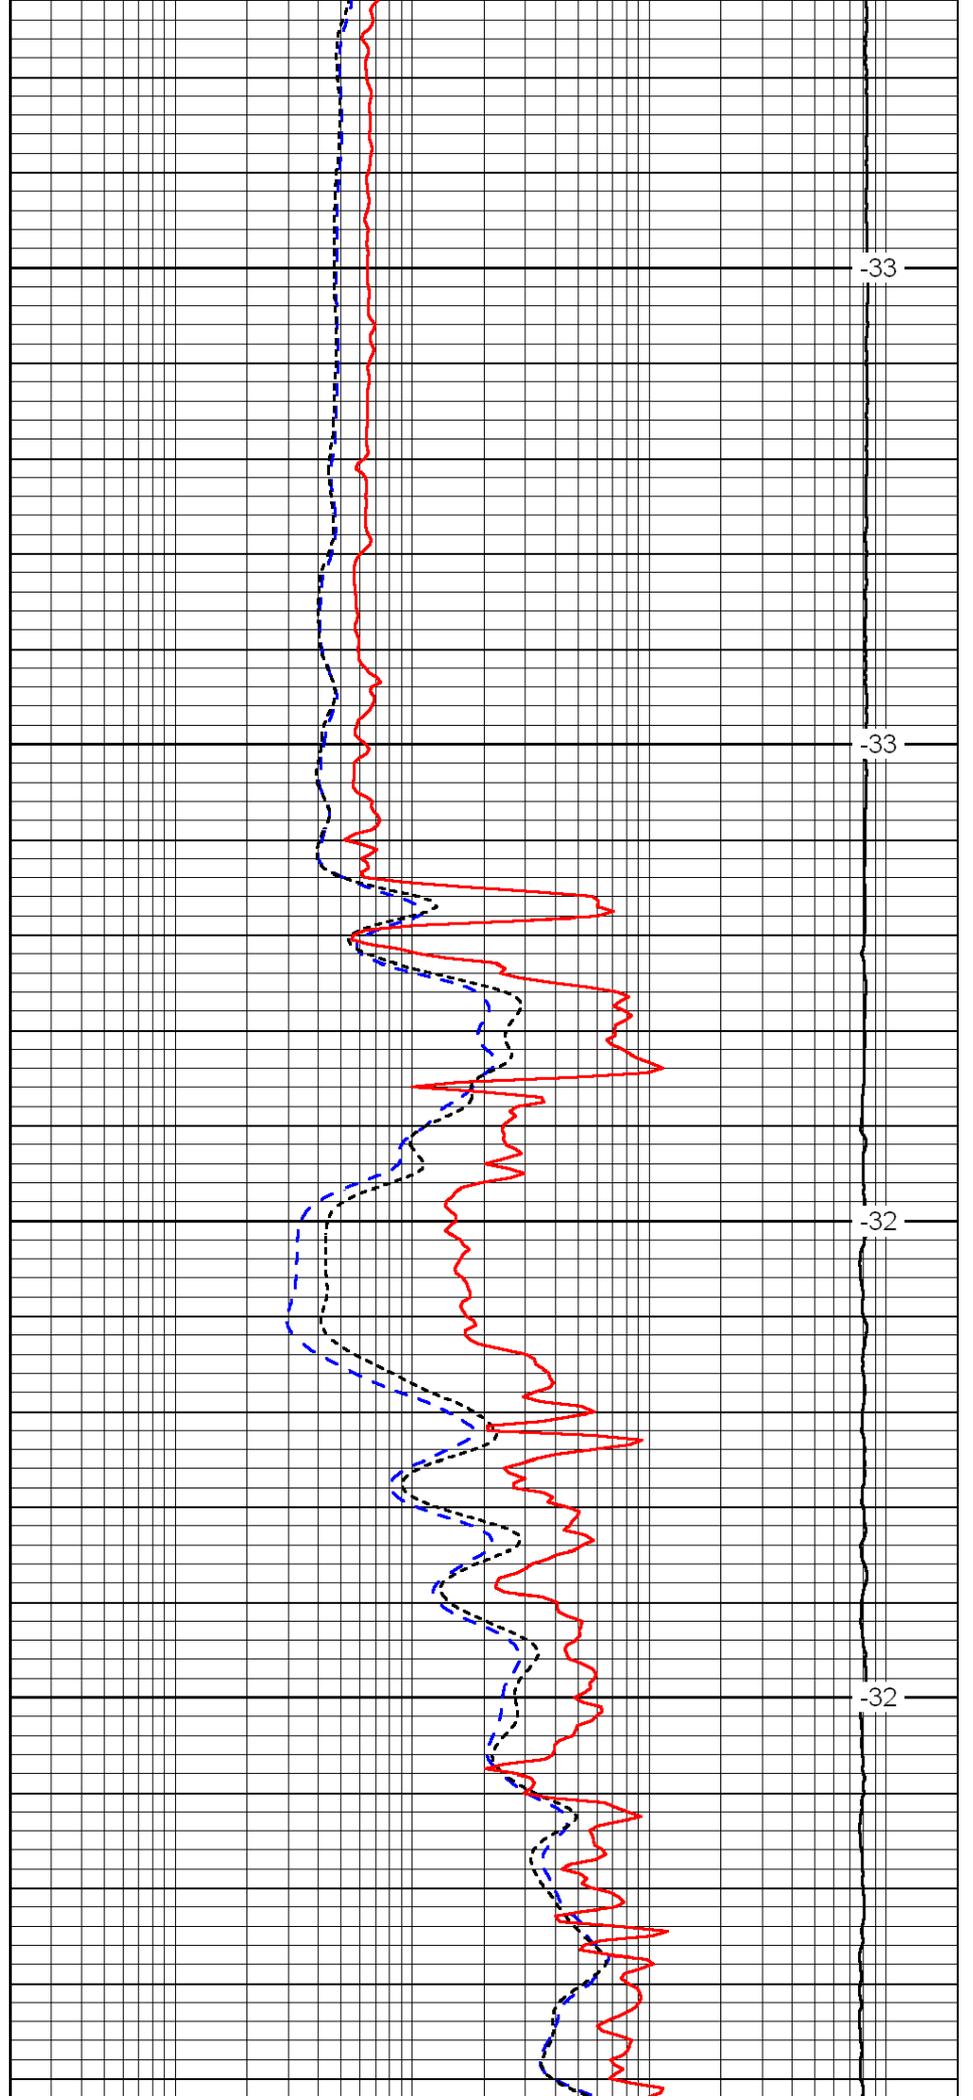


-33

-33

-32

-32

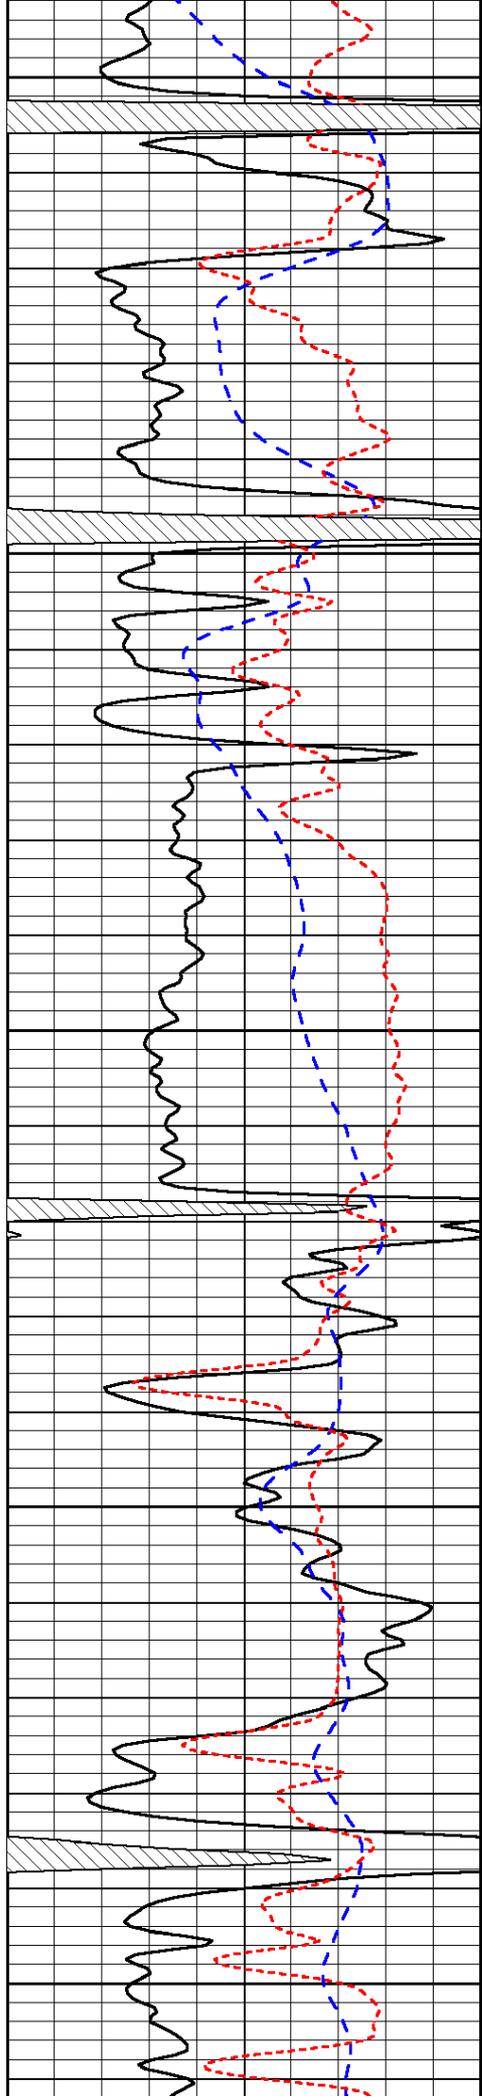


3400

3450

3500

3550

3600

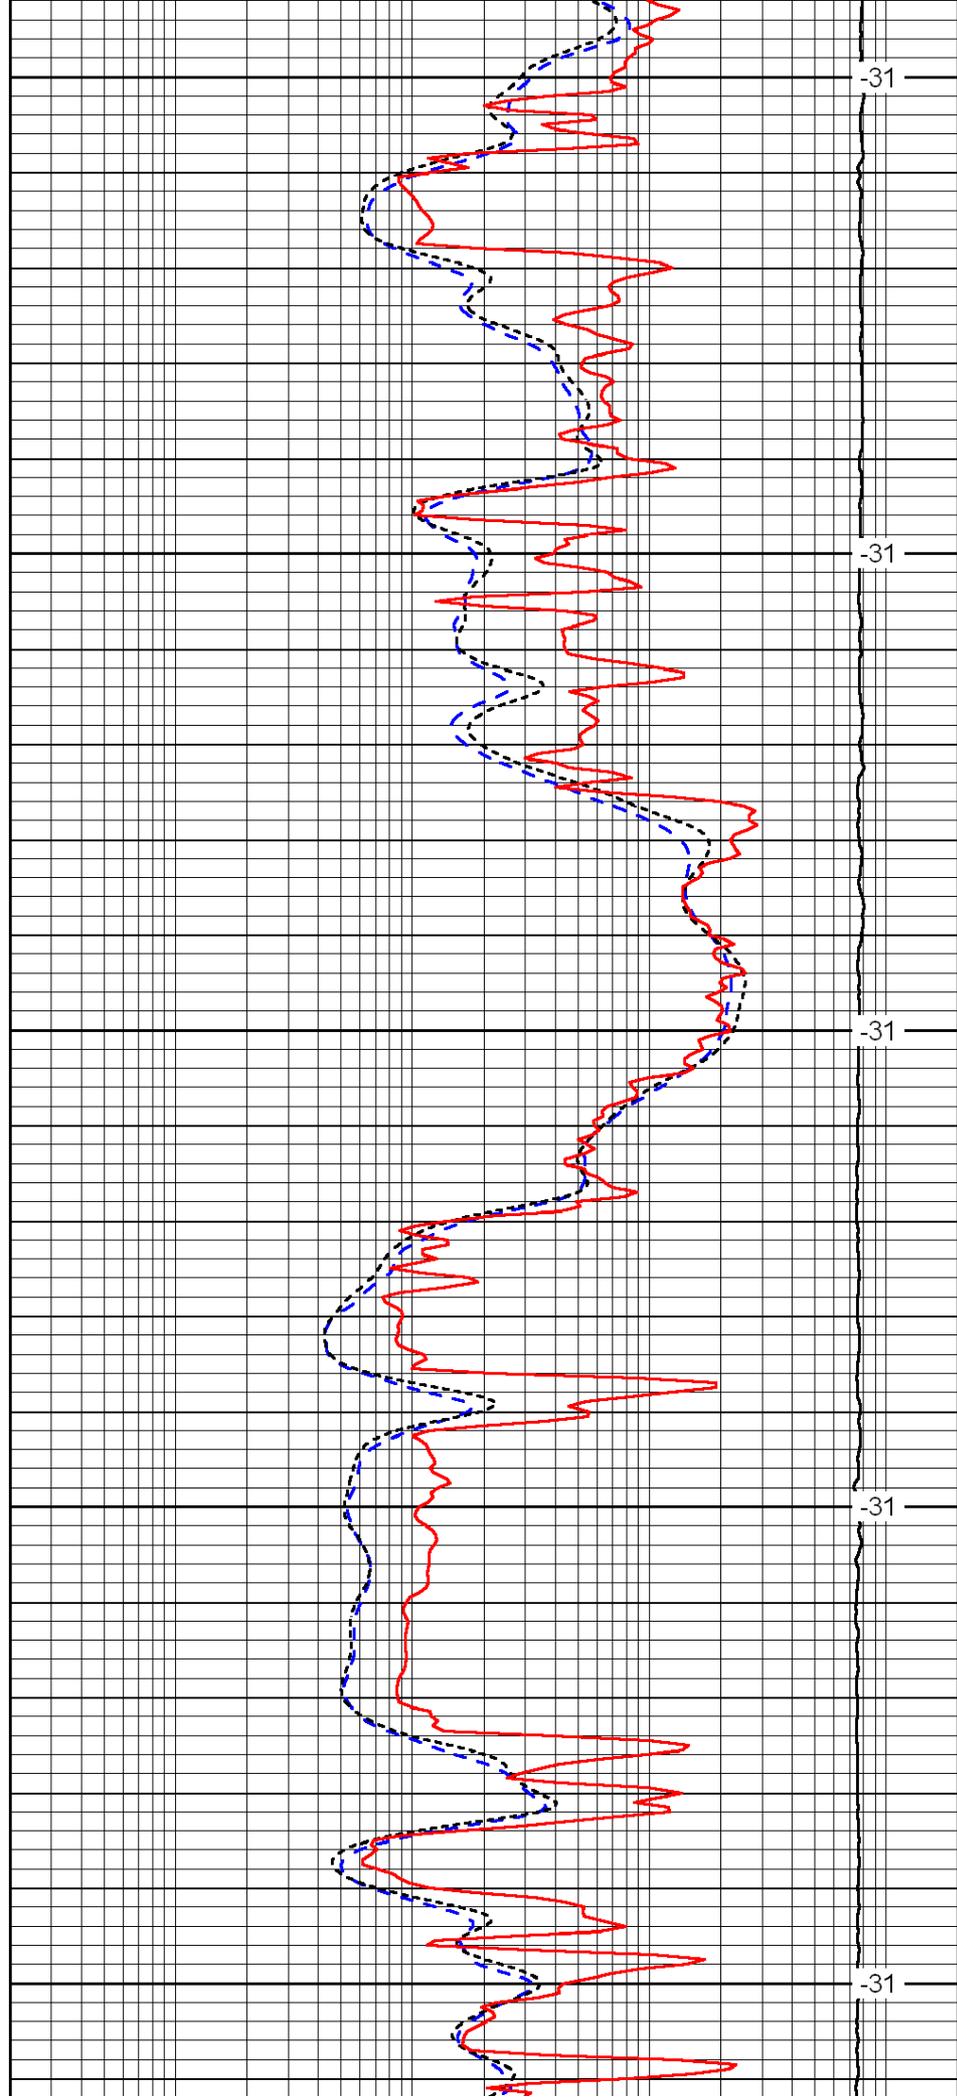


-31

-31

-31

-31

-31

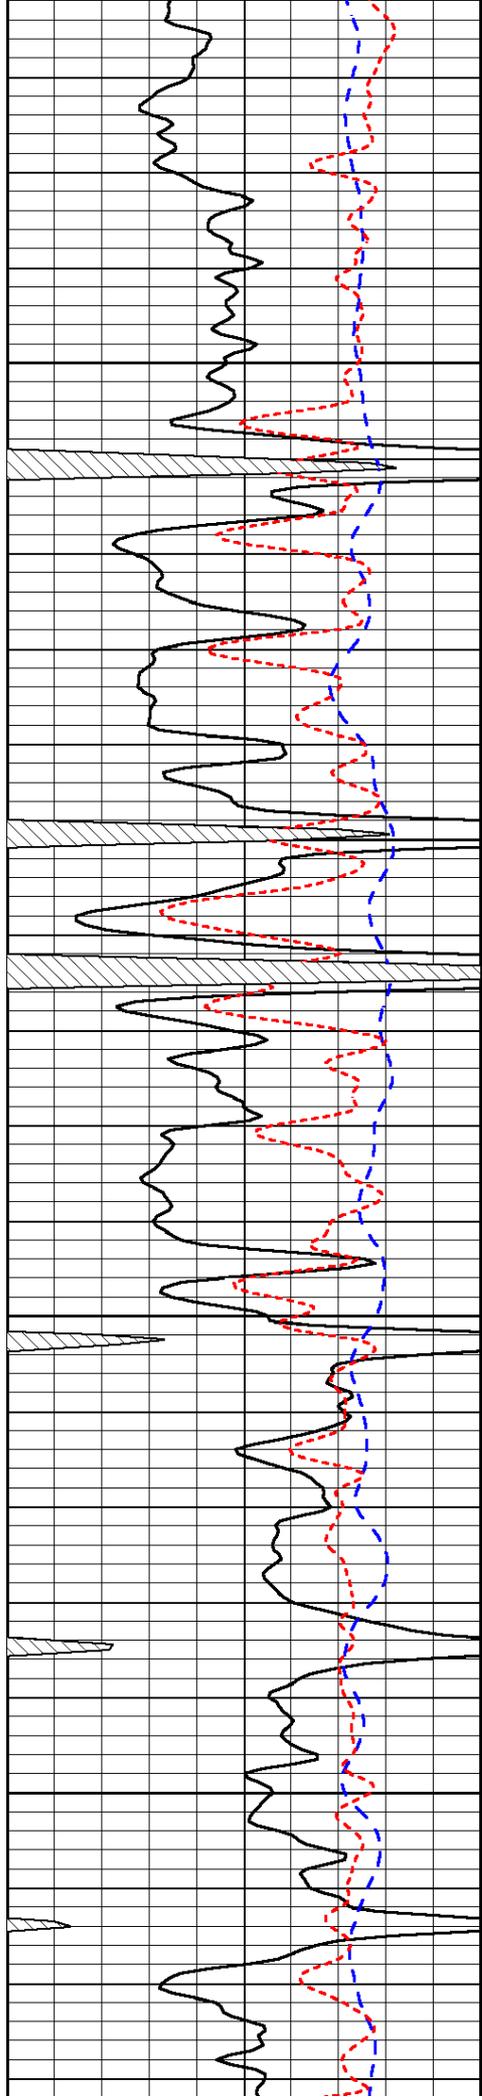


3650

3700

3750

3800

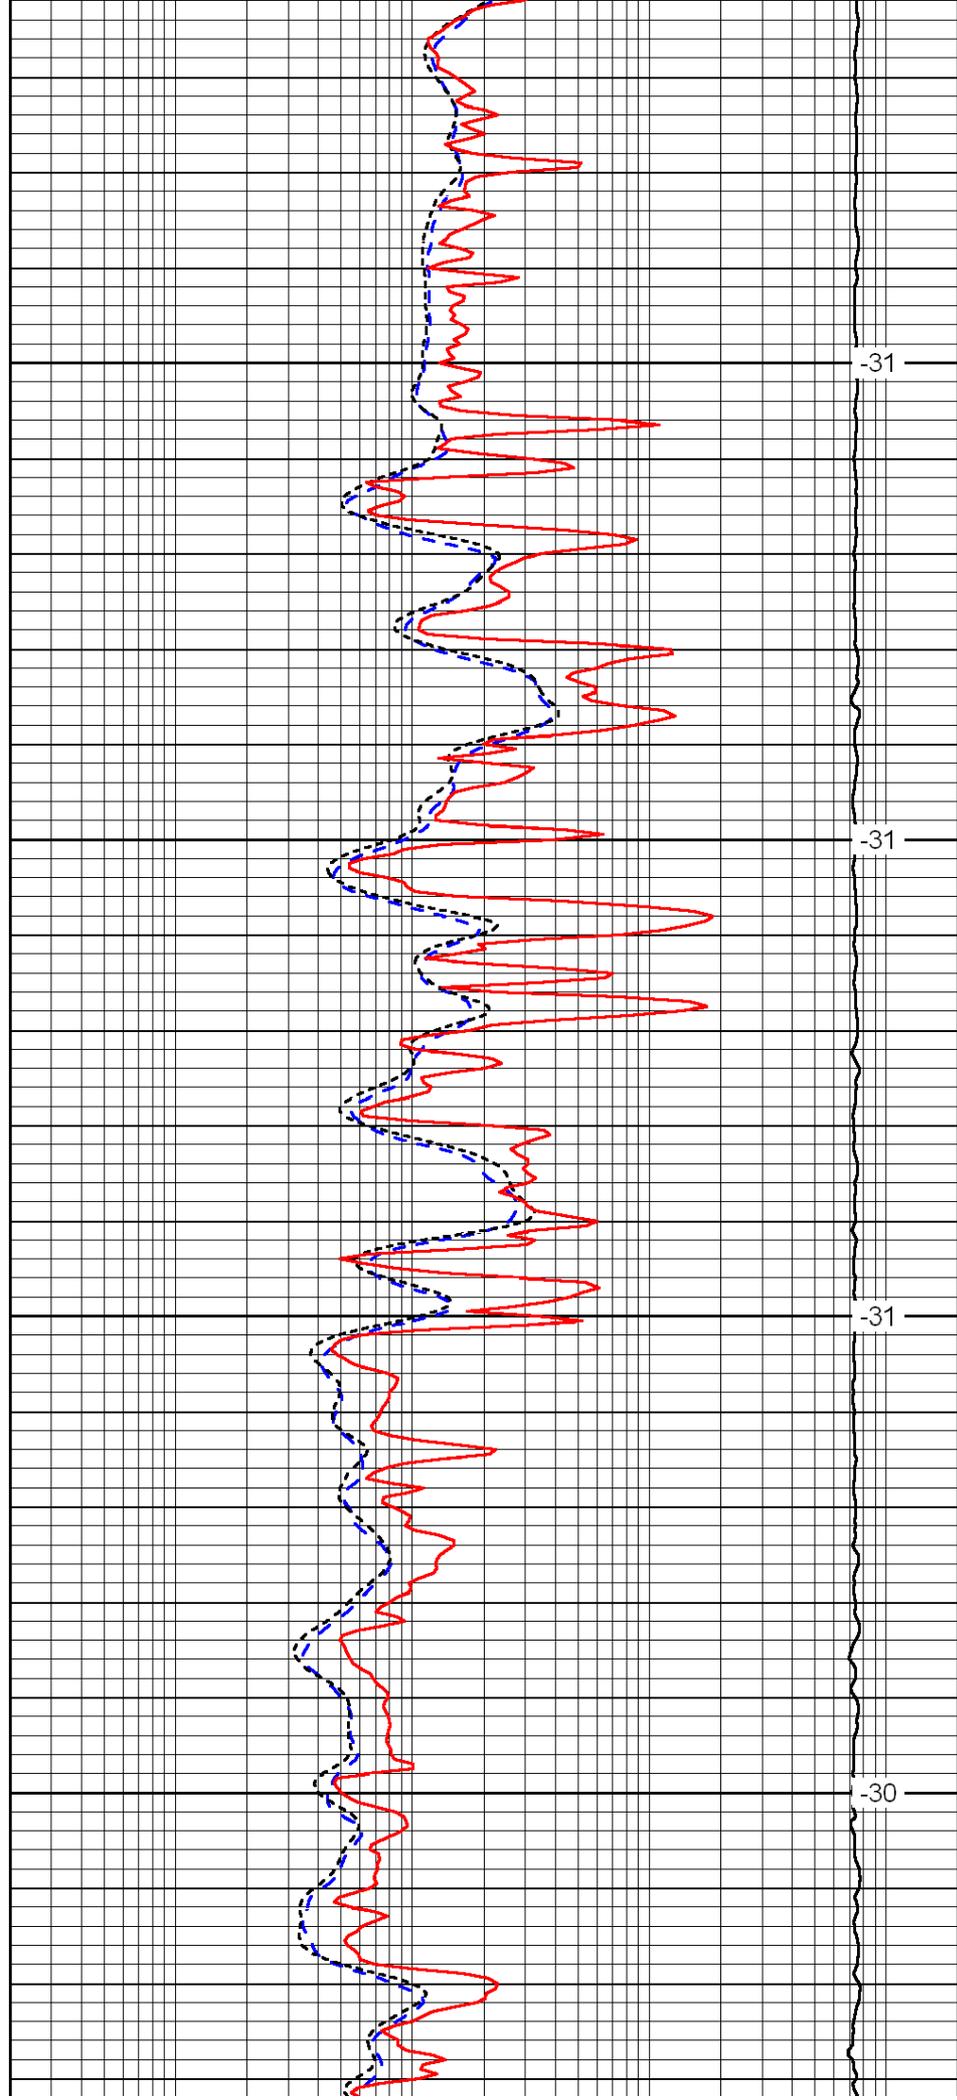


-31


-31

-31

-30

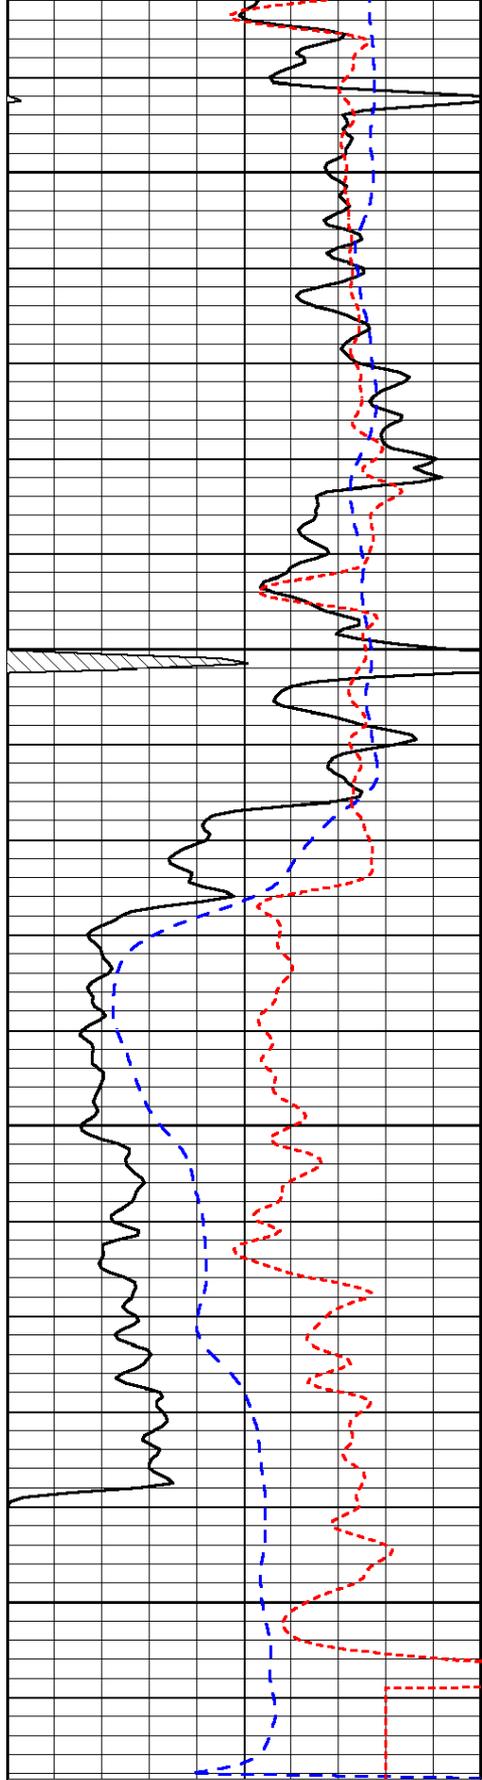

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

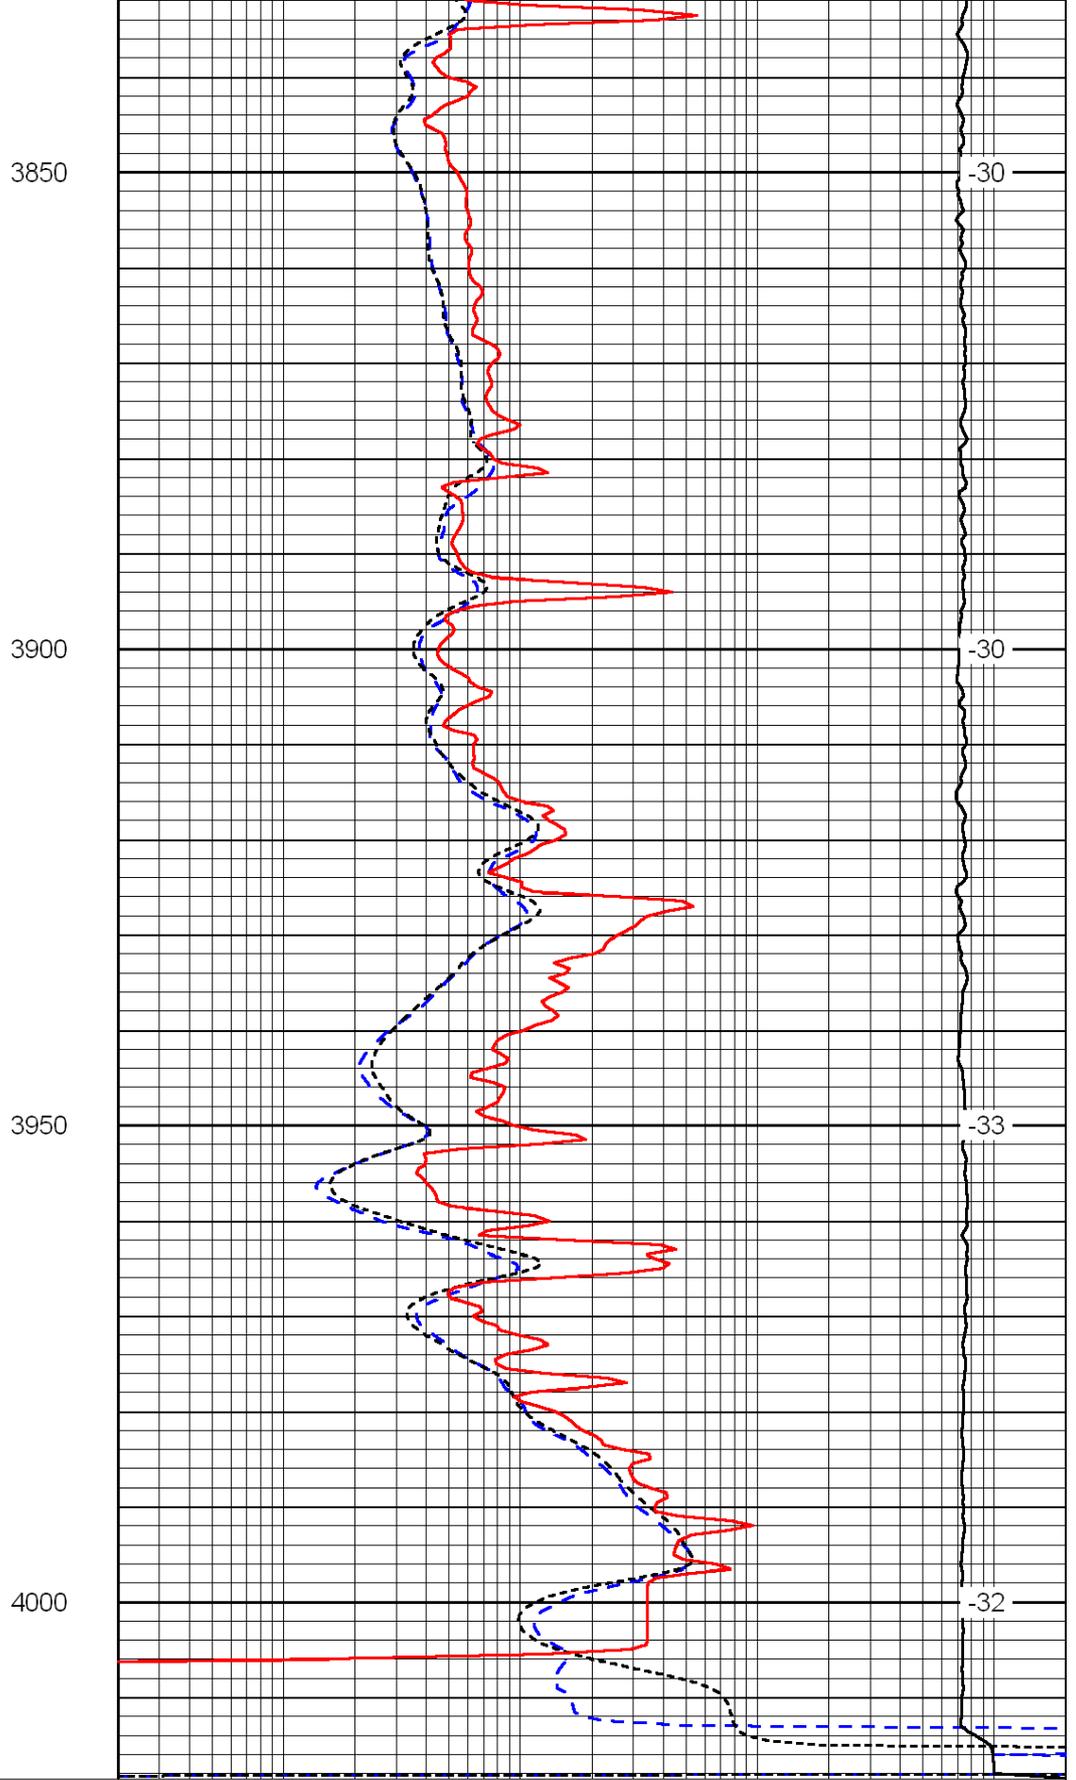

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD